Exhibit 6

Statement of Data Measured and Test Data of Modified

2. Test Equipment and Procedure

Test was performed by:

PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
CONSUMER ELECTRONICS DIVISION
EMI - LAB

5, Tze Chiang 1 Road, Chungli Industrial Park
P.O. Box 123, Chungli, Taoyuan, Taiwan
R. O. C.

Tel.: 886-3-4549862 Fax : 886-3-4549887
E-Mail: ronnie.yang@philips.com

The test was performed in accordance with ANSI C63.4-1992, "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz"

Test equipment used for line Conducted and Radiated emissions as following. All equipment were calibrated according to ANSI C63.4-1992 and ISO-9000 requirement unless otherwise specified.

Test Equipment	Model No.	Serial No.	Calibrated Date
Spectrum	HP8568B	2848A17338	7/22/1999
RF Preselector	HP85685A	2620A00138	7/22/1999
QP Adapter	HP85650A	2811A01326	7/22/1999
EMI Receiver	HP85460A	3441A00199	8/27/1998
RFI Filter Section	HP85460A	3330A00177	8/27/1998
EMI Receiver	R & S ESVS30	8419977/066	3/22/1999
Biconical Antenna	EMCO 3110B	3222	12/17/1998
Biconical Antenna	EMCO 3110B	3224	12/30/1998
Log-Periodic Antenna	EMCO 3146A	1424	12/29/1998
Log-Periodic Antenna	EMCO 3146A	1425	12/29/1998
LISN	EMCO 3825/2	9311-2153	3/15/1999
LISN	EMCO 3825/2	9311-2154	3/15/1999
Turn Table	EMCO 1060	1068	5/2/1999
Antenna Tower	EMCO 1050	1113	5/2/1999
RF Cable	M17/75-RG214-NE	N/A	5/2/1999
Computer	HP9000/300	2614A78610	N/A
Printer	HP2225A	2728S02586	N/A
Plotter	HP7440A	2539A40856	N/A

Traceability to R.O.C. and international standards is assured by using calibrated all equipment.

For system measurement, the EUT "6548-01N" was connected to:

Item	Model No.	Serial No.	FCC ID
1. Computer	IBM Aptiva 2137-E61	AEA$GNA	FCC LOGO
2. Keyboard	IBM KB-8926	K0080384	E8KHB-5923
3. Mouse	IBM S-M34	LZ874553150	DZL211029
4. Printer	HP 2225C	3123S97227	DSI6XU2225
5. Modem	Hayes 07-00038	A29900153966	BFJ9D907-00038
6. Vide Card	Built-in	--	--

The system was configured for testing in a typical fashion (as a customer would normally use it) according to ANSI C63.4-1992, please see the photographs for detail.

Both conducted and radiated testing were performed according to the procedure in ANSI C63.4-1992. Conducted testing was performed in screen room and radiated testing was performed in open site at an antenna to EUT distance of 3-meter on horizontal and vertical polarization.

First, pre-scan all modes in screen room then select 2 higher modes (worst case) were tested and reported.

The line conductive interference was tested with 110VAC and 220VAC receptively. Unshielded power cord was used during test.

Tested and reported modes as following:

Report No.	Resolution	Frequencies
EMI99-047	1280 X 1024	80.0KHz/75Hz
EMI99-047A	1600 X 1200	75.0KHz/60Hz

3. Test Program and Test Results

Set up the EUT and all peripherals as chapter 6 of ANSI C63.4-1992 for AC power line conducted emissions testing and radiated emissions testing.

Turn on the power of EUT and all peripherals, select an appropriate displaying mode using the "setup" software. Then run an EMI test program "HTEST.EMI" as a basic software to execute the EUT operating under test.

Step 1 : Run the "HTEST.EMI" on personal computer then sends "H" character to monitor continuously until full screen.
Step 2 : Personal computer sends a complete line of continuously repeating "H" to HP 2225C printer.
Step 3 : Personal computer sends a file of "H" pattern to floppy disk then read a file of "H" pattern from floppy disk.
Step 4 : Personal computer sends a file of "H" pattern to hard disk then read a file of "H" pattern from hard disk.
Step 5 : Personal computer sends a file of "H" patter to USRobotics 268 modem.
Step 6 : Return to step 1

All data in this report are "PEAK" value within 15dB margin unless otherwise noted. The radiated (open site) data has included antenna and cable factors, sample calculation:

Final Value (dBμv/m) = Reading (dBuv) + Antenna Factor (dB) + Cable Loss (dB)

The measured data of radiated RF interference at open site and line conducted interference as attached.

The subject device is in compliance with the limits for a class B digital device, pursuant to part 15, subpart B of the FCC rules.

Ronnie Yang - Manager, Safety/Dev. PEI-CED
NVLAP Signatory

FCC TEST REPORT

FCC ID : A3KM076
REPORT NO.: EMI99-047
TEST DATE : SEP/01/1999
TEST ENGI.: C.C.Wu

TEST PERFORMED BY
PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
CONSUMER ELECTRONICS DIVISION (PEI-CED)
EMI-LAB
P.O.BOX 123
CHUNGLI, TAOYUAN, TAIWAN, R.O.C.
TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PHILIPS
TESTED SYSTEM:

1. EUT : IBM G76 6548-01N COLOR MONITOR S/N.: TY9904047
   FCC ID. : A3KM076
2. COMPUTER: IBM 2137-E61 S/N.: AEA4GNA
   FCC ID. : FCC LOGO
3. PRINTER : HP 2225C S/N.: 3145S02419
   FCC ID. : DSI6XU2225
4. MODEM : USRobotics 268 S/N.: 0002680559278575
   FCC ID. : CJE-0318
5. MOUSE : IBM M-S34 S/N.: LZ874553150
   FCC ID. : DZL211029
6. KEYBOARD: IBM KB-8926 S/N.: K0080384
   FCC ID. : E8HKB-5923
7. VIDEO CARD : BUILT-IN S/N.: --
   FCC ID. : --

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE ANSI C63.4-1992 ''AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz''

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
80.0KHz MODE(**1280X1024/75Hz**) WAS TESTED.
FLY-IN D-SUB I/F CABLE WITH THREE FERRITE CORES(ONE INSIDE) WAS TESTED.
UNSHIELDED MAINS CORD WAS USED DURING TEST.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
40.35	29.9	31.5	40
53.8	24.24	28.44	40

67.25	23.21	28.51	40
121.08	31.83	29.13	43.5
134.52	34.15	31.75	43.5
147.98	32.18	AMBIENT	43.5
161.43	34.63	30.43	43.5
215.25	35.5	32.1	43.5
228.69	35.08	35.28	46
242.14	35.28	34.38	46
255.58	37.2	38.9	46
269.04	38.56	38.46	46
282.49	38.8	AMBIENT	46
322.85	39.992	36.592	46
349.77	38.9	38.9	46
363.22	36.8	39.6	46
376.66	34.972	36.972	46
390.11	37.54	38.94	46
403.56	36.848	39.648	46
417.01	36.604	37.604	46
430.46	35.32	33.82	46
443.91	34.756	33.256	46
457.34	36.868	36.568	46
497.72	37.136	36.336	46
524.62	38.6	37	46
538.09	38.952	39.852	46
659.14	40.812	42.112	46
686.05	37.964	38.864	46
793.66	39.404	39.404	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
SPECTRUM ANALYZER SETTINGS:
RBW : 100KHz
VBW : 100KHz

QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER 20 - 1000MHz ESVS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
295.95	41.02	36.72	46
309.4	41.136	37.736	46
336.32	39.364	40.164	46
551.54	38.548	42.148	46
564.99	37.16	39.46	46
578.43	39.736	42.136	46
591.88	39.604	42.104	46
605.33	40.66	42.66	46
618.78	39.508	42.308	46
632.23	40.08	42.08	46
645.68	42.14	43.84	46
672.6	41.964	42.364	46
712.95	38.248	38.948	46
726.4	38.788	38.988	46
739.86	37.92	39.22	46
753.31	38.648	38.848	46

780.21	37.38	38.58	46
807.11	36.812	37.612	46

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS ARE RECORDED.
TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :
FINAL VALUE (dBuv/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuv/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT BY NVLAP OR ANY ANGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY: K.J.Hsu
K.J.HSU, NVLAP SIGNATORY

TESTED BY: C.C.Wu

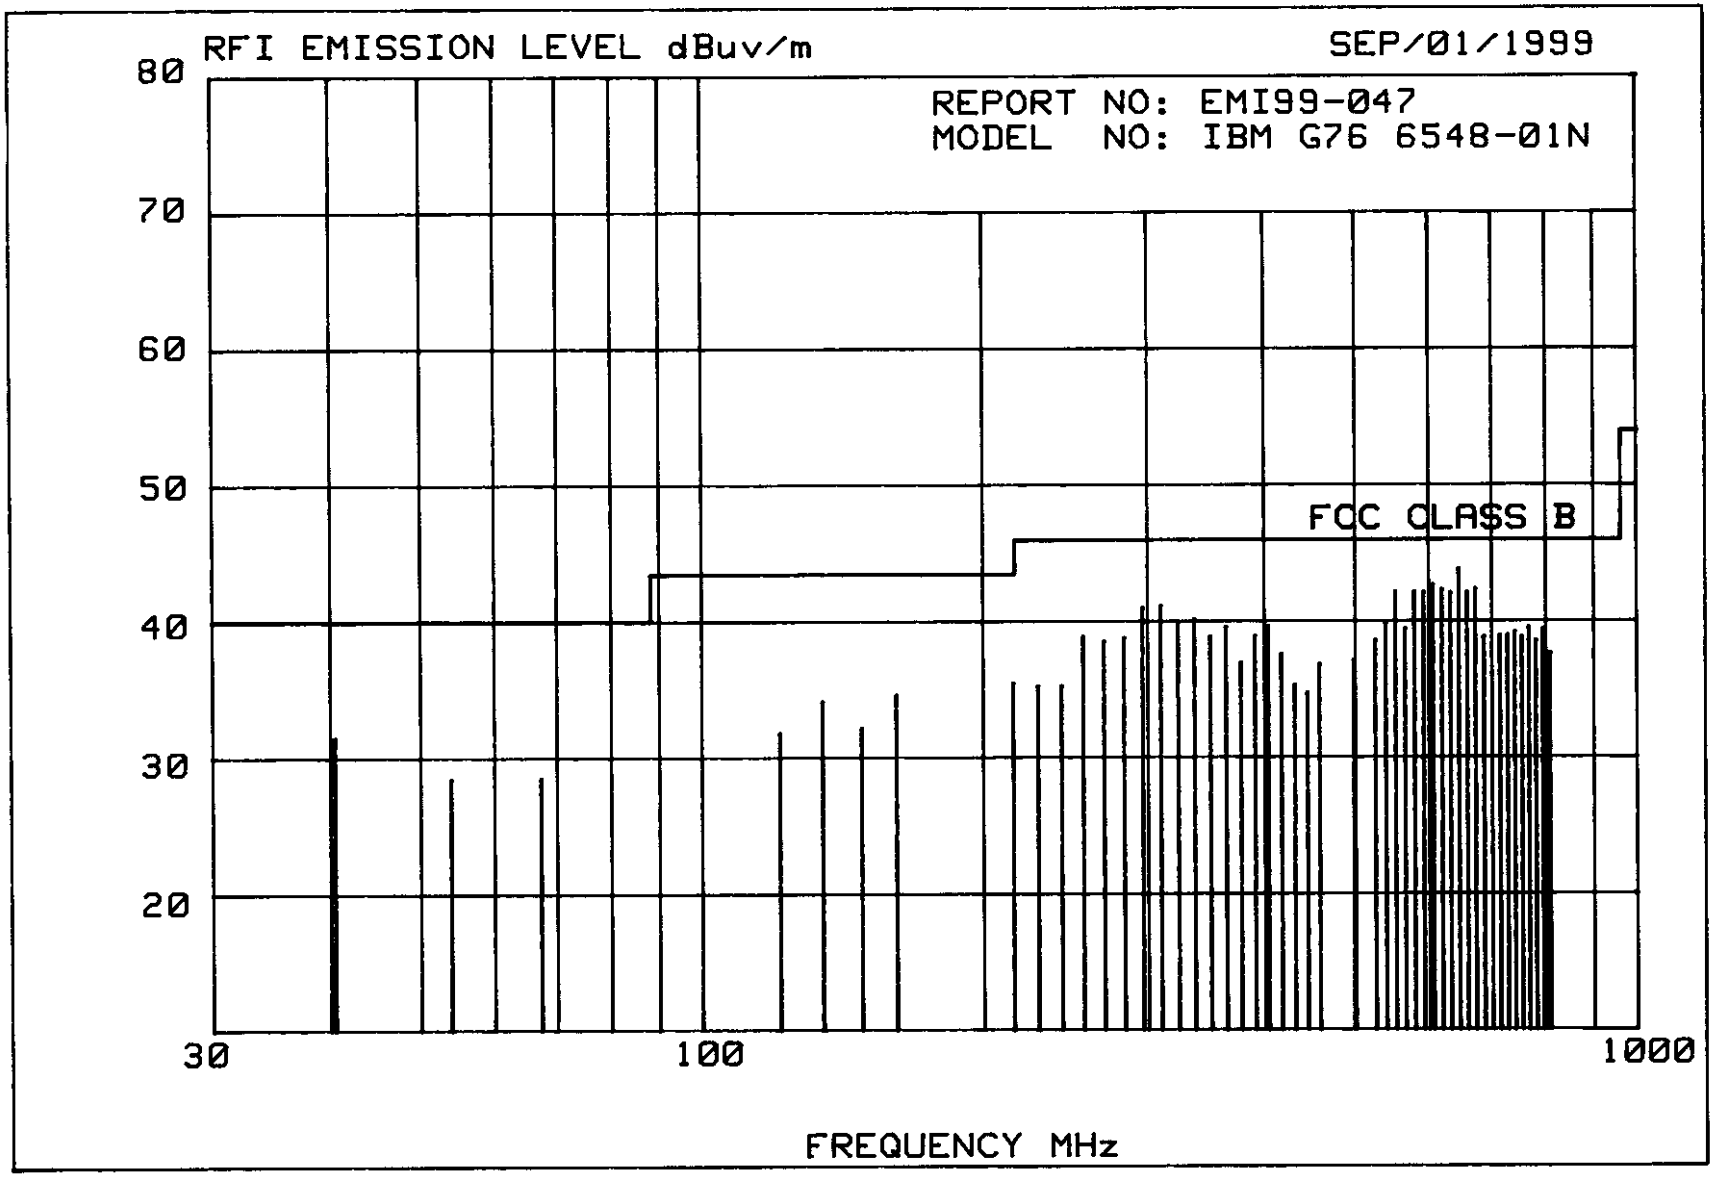
RFI EMISSION LEVEL dBuv/m
SEP/01/1999
REPORT NO: EMI99-047
MODEL NO: IBM G76 6548-01N
FCC CLASS B
80
70
60
50
40
30
20
30
100
1000
FREQUENCY MHz

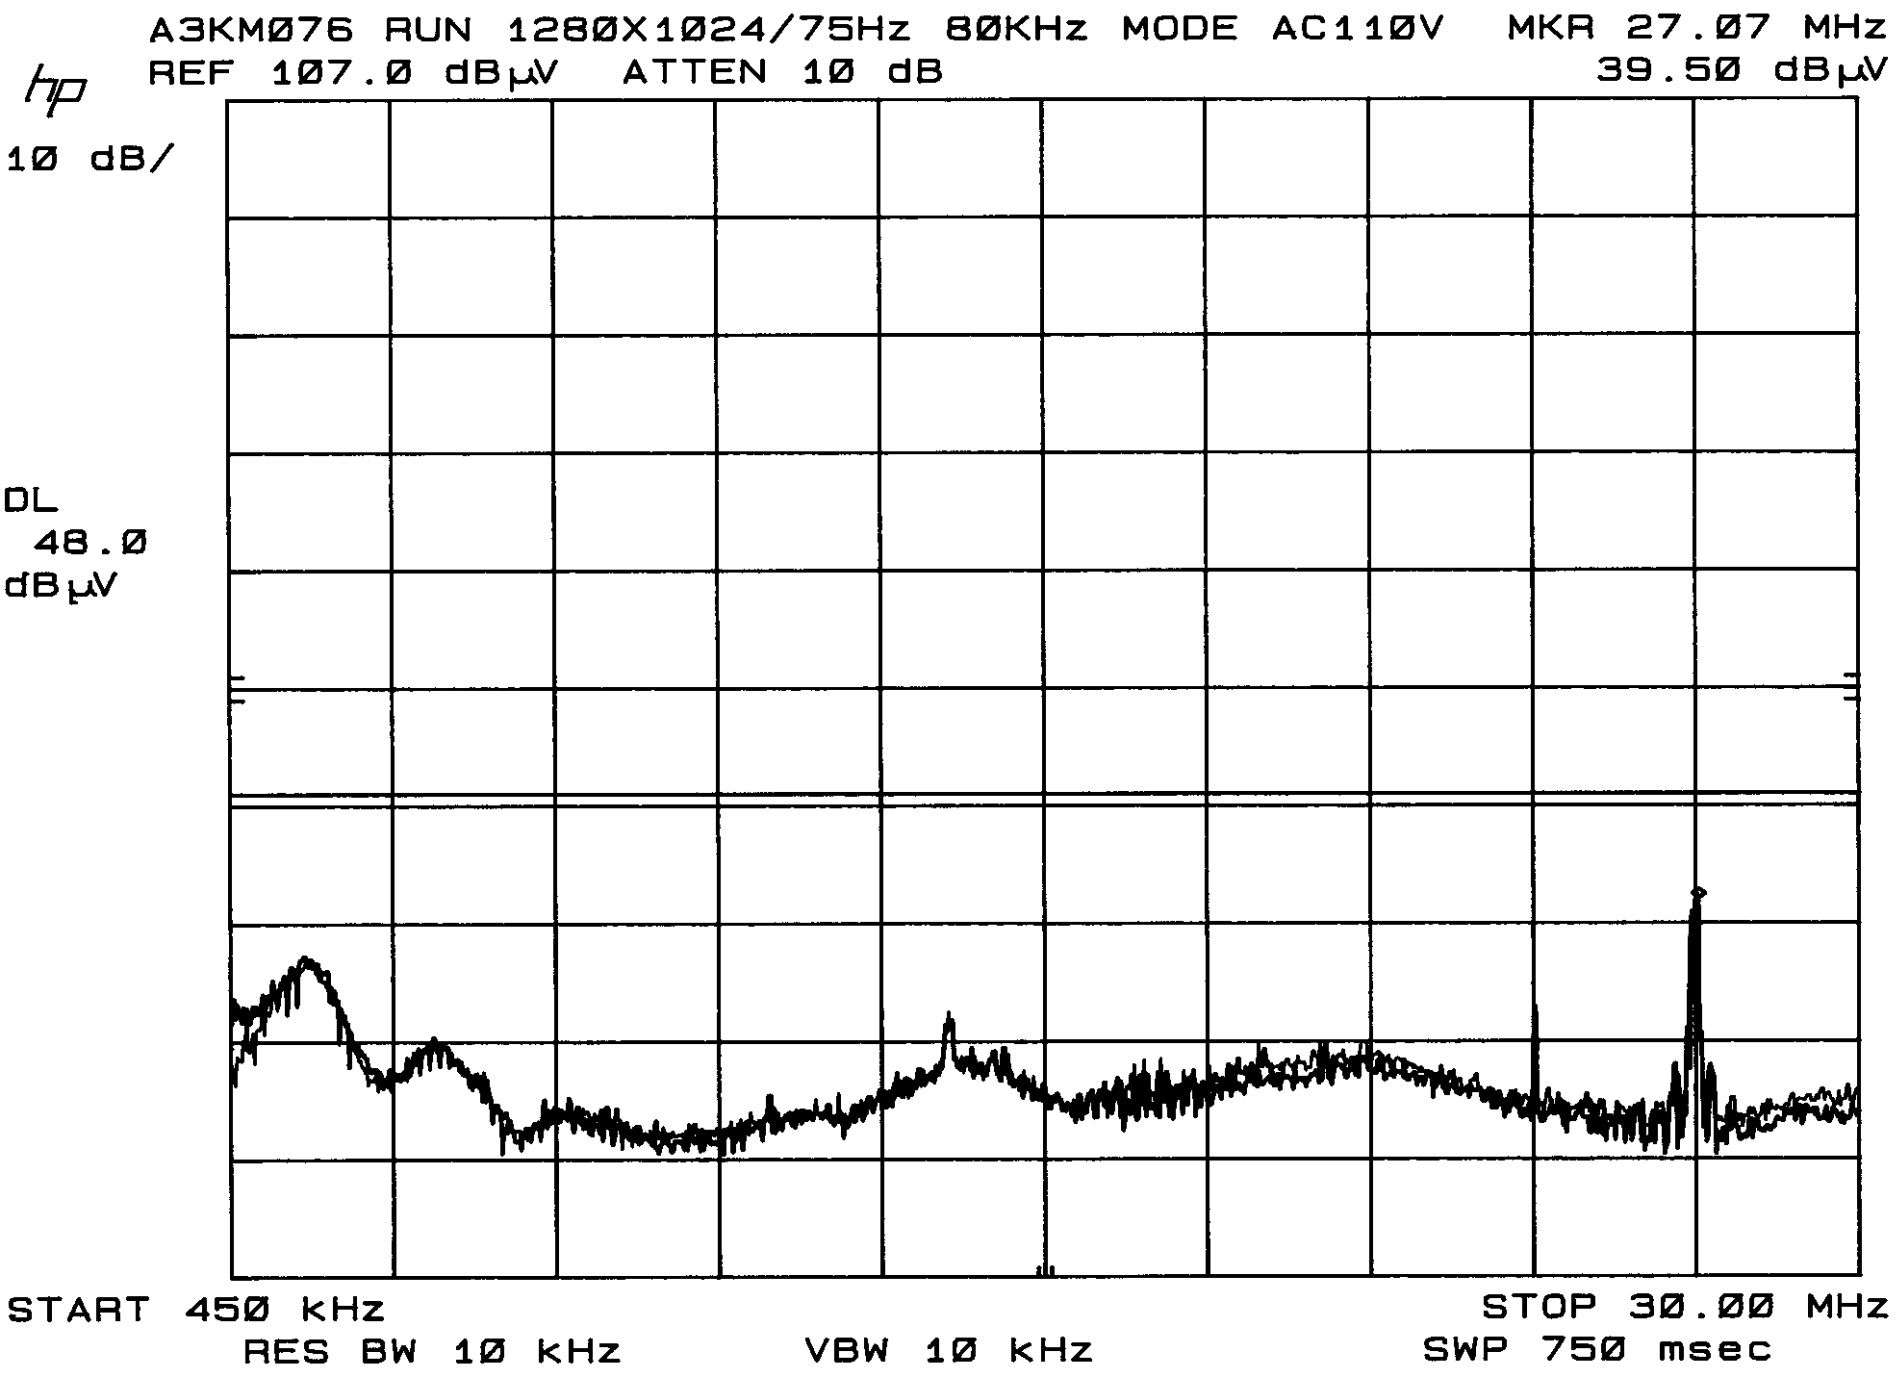
A3KM076 RUN 1280X1024/75Hz 80KHz MODE AC110V MKR 27.07 MHz
REF 107.0 dBµV ATTEN 10 dB 39.50 dBµV
10 dB/
DL
48.0
dBµV
START 450 kHz
STOP 30.00 MHz
RES BW 10 kHz
VBW 10 kHz
SWP 750 msec

FCC TEST REPORT

FCC ID : A3KM076
REPORT NO.: EMI99-047A
TEST DATE : SEP/03/1999
TEST ENGI.: C.C.Wu

TEST PERFORMED BY
PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
CONSUMER ELECTRONICS DIVISION (PEI-CED)
EMI-LAB
P.O.BOX 123
CHUNGLI, TAOYUAN, TAIWAN, R.O.C.
TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PHILIPS
TESTED SYSTEM:

1. EUT : IBM G76 6548-01N COLOR MONITOR S/N.: TY9904047
   FCC ID. : A3KM076
2. COMPUTER: IBM 2137-E61 S/N.: AEA4GNA
   FCC ID. : FCC LOGO
3. PRINTER : HP 2225C S/N.: 3145S02419
   FCC ID. : DSI6XU2225
4. MODEM : USRobotics 268 S/N.: 0002680559278575
   FCC ID. : CJE-0318
5. MOUSE : IBM M-S34 S/N.: LZ874553150
   FCC ID. : DZL211029
6. KEYBOARD: IBM KB-8926 S/N.: K0080384
   FCC ID. : E8HKB-5923
7. VIDEO CARD : BUILT-IN S/N.: --
   FCC ID. : --

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE ANSI C63.4-1992 ''AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz''

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
75.0KHz MODE(**1600X1200/60**Hz) WAS TESTED.
FLY-IN D-SUB I/F CABLE WITH THREE FERRITE CORES(ONE INSIDE) WAS TESTED.
UNSHIELDED MAINS CORD WAS USED DURING TEST.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
62.15	23.76	30.36	40
155.35	32.75	30.45	43.5

170.91	29.53	29.03	43.5
186.44	AMBIENT	31.84	43.5
201.97	35	AMBIENT	43.5
248.57	38.36	39.46	46
264.11	38.06	38.96	46
279.63	38.7	39.1	46
341.78	38.708	37.508	46
372.84	31.3	32.1	46
388.38	36.368	37.568	46
403.92	34.948	37.048	46
434.97	34.24	35.54	46
481.6	35.124	36.524	46
497.13	37.904	39.304	46
512.65	36.204	35.504	46
528.18	37.312	36.112	46
559.26	36.716	38.316	46
730.15	38.54	39.74	46
776.75	38.932	38.732	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
SPECTRUM ANALYZER SETTINGS:
RBW : 100KHz
VBW : 100KHz

QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER 20 - 1000MHz ESVS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
31.08	29.56	33.66	40
46.6	28.98	34.88	40
124.28	30.32	33.62	43.5
217.49	35.16	31.56	46
295.17	40	35.6	46
310.7	41.444	37.044	46
326.25	42.824	36.724	46
357.31	38.3	37.7	46
419.44	35.328	40.528	46
543.72	36.376	38.876	46
574.8	39	39.7	46
590.34	34.98	39.78	46
605.87	40.192	41.792	46
636.95	38.48	41.18	46
652.47	41.236	43.036	46
668	37.524	37.124	46
683.53	39.516	39.916	46
714.62	38.24	38.24	46
745.68	38.148	38.948	46
761.21	38.076	38.776	46
792.28	39.072	38.872	46
823.35	37.668	37.368	46

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS ARE RECORDED.
TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :
FINAL VALUE (dBuv/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuv/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT BY NVLAP OR ANY ANGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY: K. J. Hsu
K.J.HSU, NVLAP SIGNATORY

TESTED BY: C.C. Wu
C.C.Wu

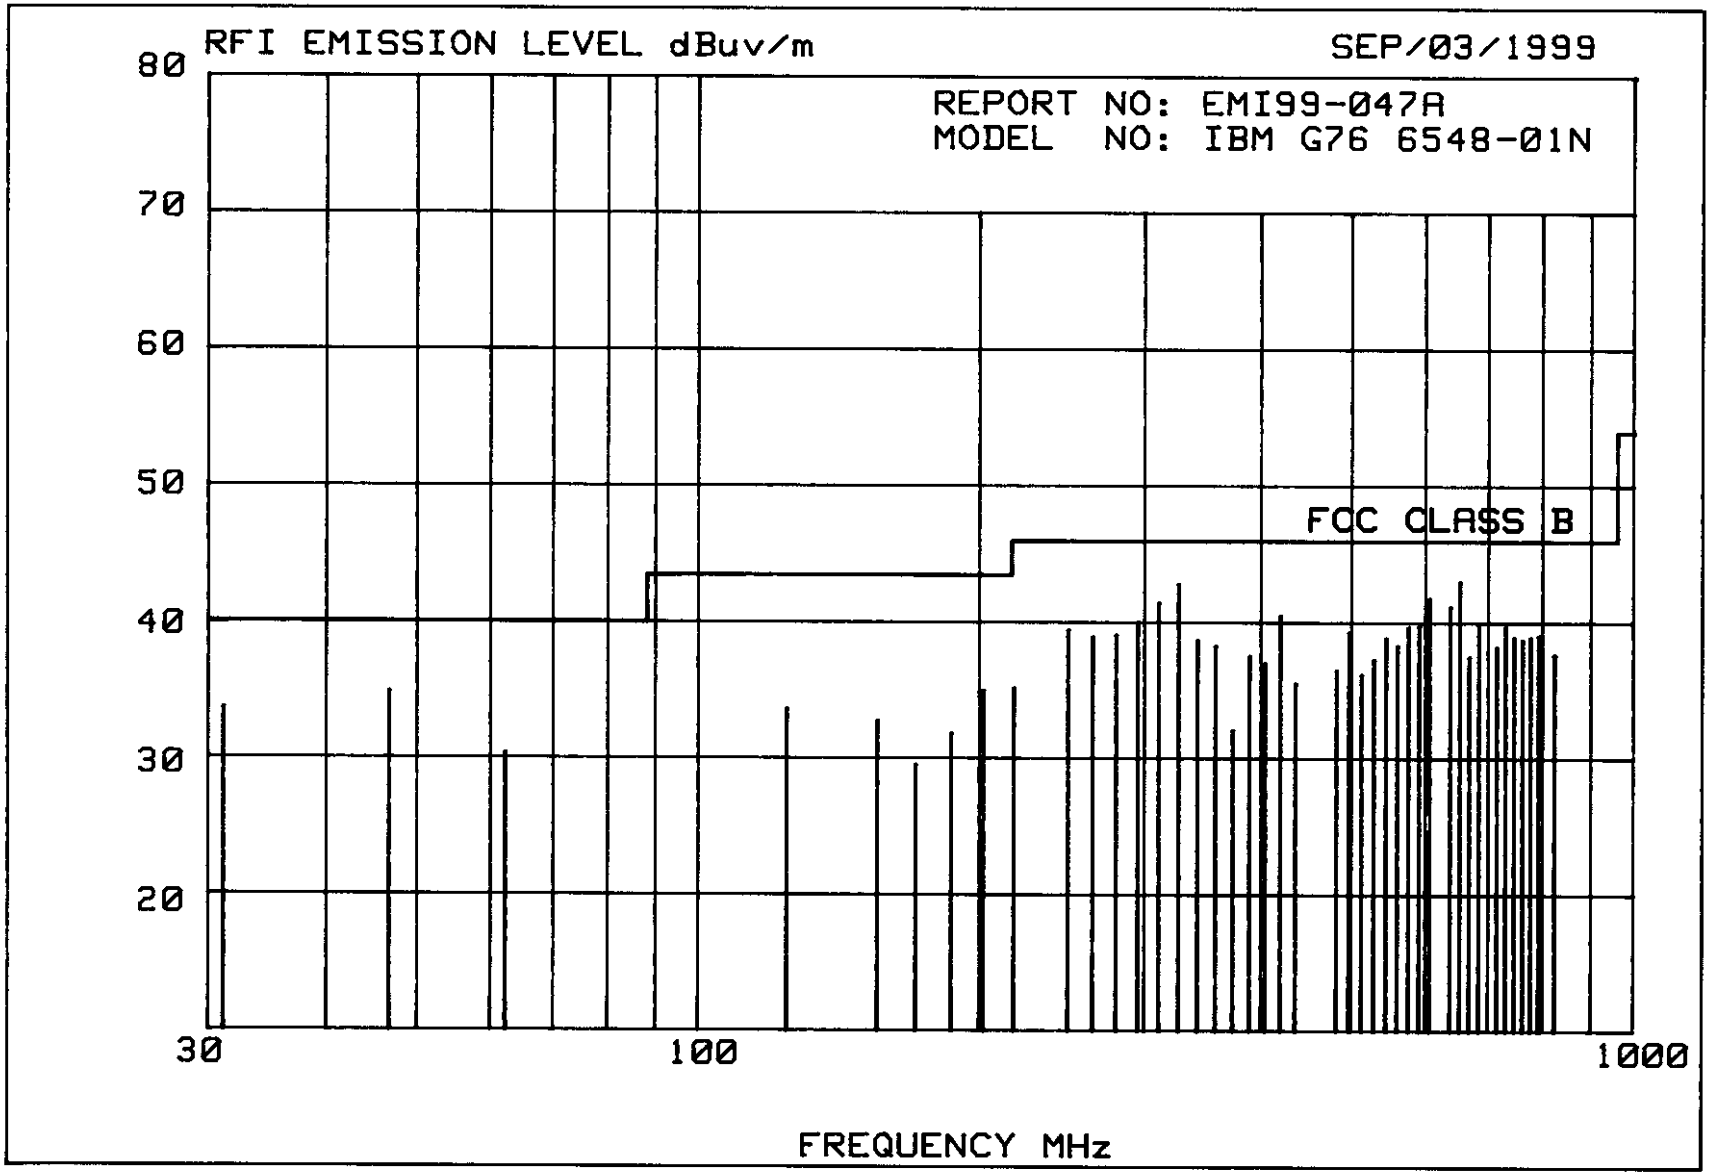
RFI EMISSION LEVEL dBuv/m
SEP/03/1999
REPORT NO: EMI99-047A
MODEL NO: IBM G76 6548-01N
FCC CLASS B
80
70
60
50
40
30
20
30
100
1000
FREQUENCY MHz

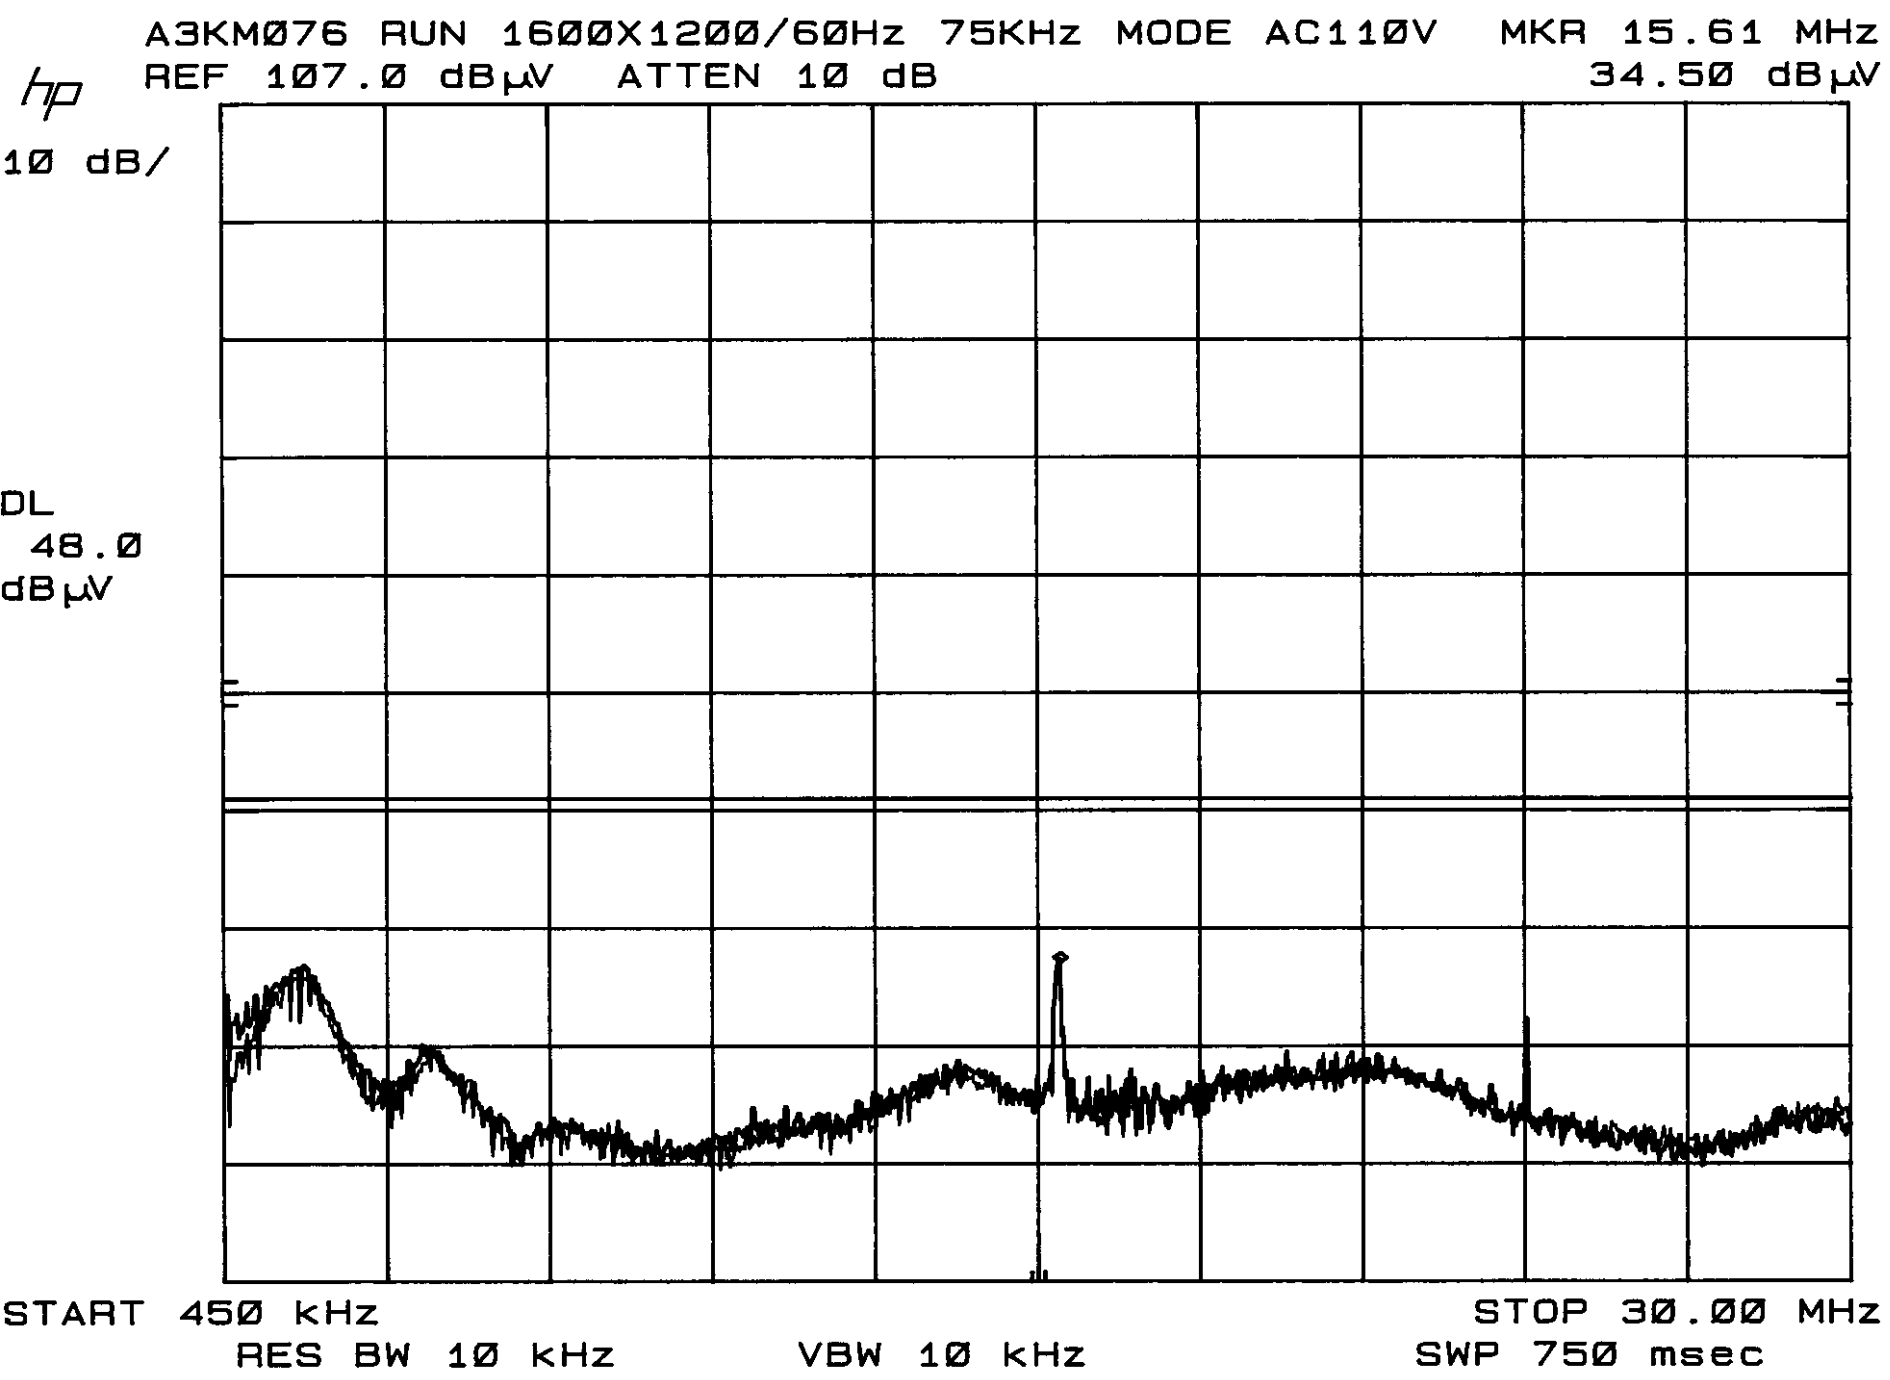
A3KMØ76 RUN 16ØØX12ØØ/6ØHz 75KHz MODE AC11ØV MKR 15.61 MHz
REF 1Ø7.Ø dBµV ATTEN 1Ø dB 34.5Ø dBµV
1Ø dB/
DL
48.Ø
dBµV
START 45Ø kHz STOP 3Ø.ØØ MHz
RES BW 1Ø kHz VBW 1Ø kHz SWP 75Ø msec

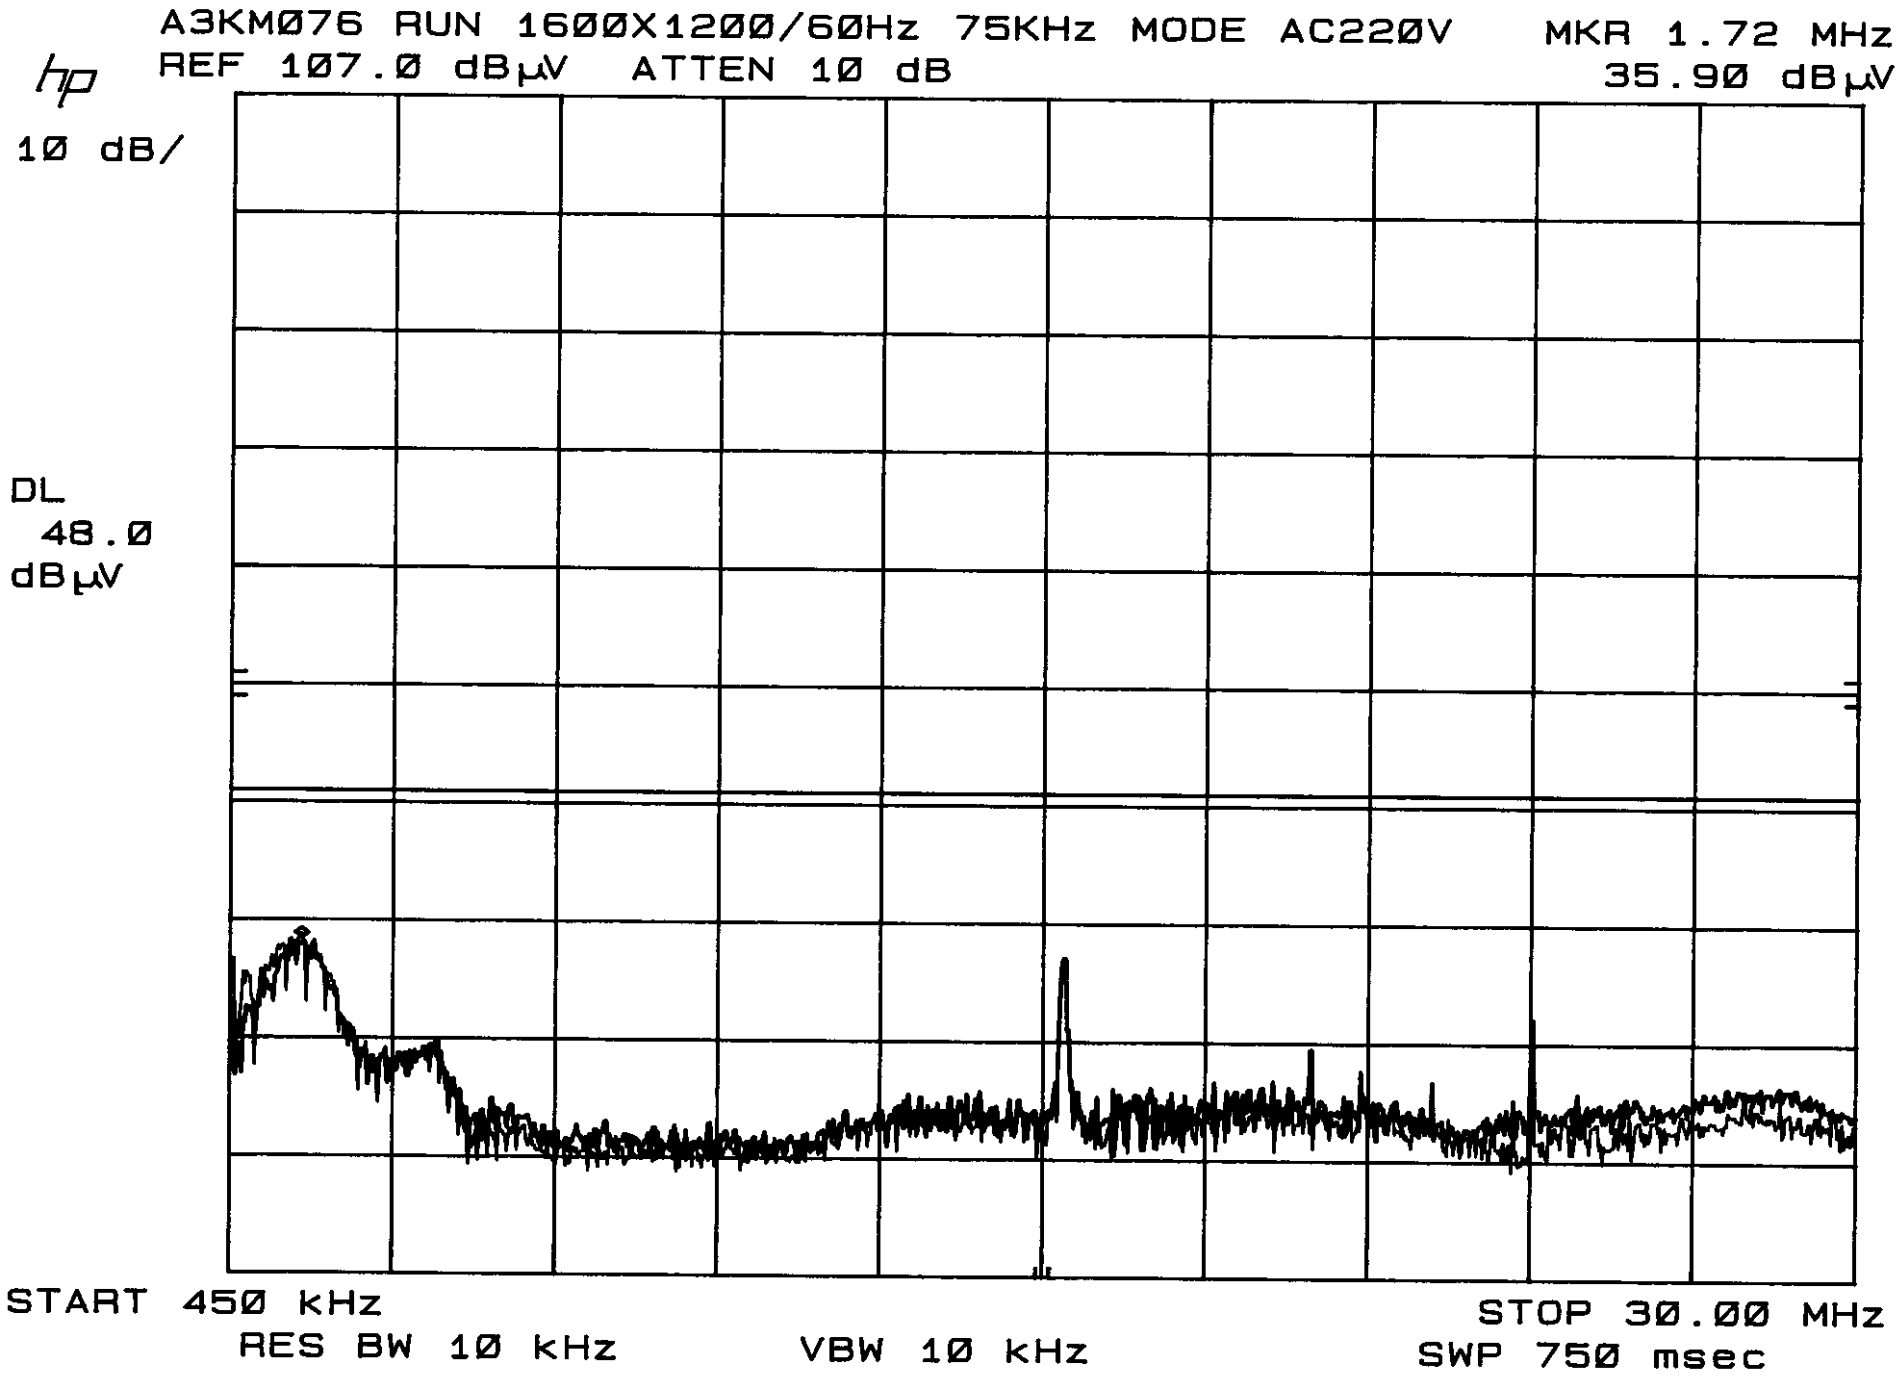
A3KMØ76 RUN 16ØØX12ØØ/6ØHz 75KHz MODE AC22ØV
MKR 1.72 MHz
REF 1Ø7.Ø dBµV ATTEN 1Ø dB
35.9Ø dBµV
1Ø dB/
DL
48.Ø
dBµV
START 45Ø kHz
STOP 3Ø.ØØ MHz
RES BW 1Ø kHz
VBW 1Ø kHz
SWP 75Ø msec

Exhibit 7

Photographs

Exhibit 5

Test Data of Original

FCC TEST REPORT

FCC ID : A3KM076
REPORT NO.: EMI97-094
TEST DATE : OCT/30/1997
TEST ENGI.: C.C.Wu

TEST PERFORMED BY
PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
CONSUMER ELECTRONICS DIVISION (PEI-CED)
EMI-LAB
P.O.BOX 123
CHUNGLI, TAOYUAN, TAIWAN, R.O.C.
TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PEI-CED
TESTED SYSTEM:

1. EUT : 17B2302Q COLOR MONITOR S/N.: NO.1
   FCC ID. : A3KM076
2. COMPUTER: HP Pavilion 8160 S/N.: US72150127
   FCC ID. : FCC LOGO
3. PRINTER : HP 2225C S/N.: 3145S02419
   FCC ID. : DSI6XU2225
4. MODEM : HAYES 07-00038 S/N.: A29900153966
   FCC ID. : BFJ9D907-00038
5. MOUSE : HP M-S34 S/N.: LCA54625637
   FCC ID. : DZL210472
6. KEYBOARD: HP 5182-5521 S/N.: E03633HLUS-C
   FCC ID. : CIGE03633
7. VIDEO CARD : B06-4107B S/N.: 100964
   FCC ID. : I27MM-VS03A
8. CD_ROMD : SONY CDU31A S/N.: --
   FCC ID. : KGACDU31A2

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE ANSI C63.4-1992 ''AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz''

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
85.9KHz MODE(1280X960/85Hz) WAS TESTED.
INTERFACE CABLE WITH THREE FERRITE CORES(ONE INSIDE) WAS TESTED.
UNSHIELDED MAINS CORD WAS USED DURING TEST.
EXTRA MICPHONE WAS USED DURING TEST.
EXTRA EARPHONE WAS USED DURING TEST.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
68.74	29.97	33.57	40
72.01	31.96	33.16	40

233.74	39.2	34	46
247.48	39.48	35.78	46
261.22	37.44	35.34	46
274.99	37.1	35.3	46
288.74	37.65	36.25	46
302.46	31.008	30.308	46
316.21	30.564	31.464	46
343.71	35.156	33.756	46
371.21	32.1	31.1	46
384.97	32.76	33.06	46
412.16	32.744	35.044	46
439.95	33.16	32.76	46
453.7	34.396	35.296	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.

SPECTRUM ANALYZER SETTINGS:
RBW : 100KHz
VBW : 100KHz

QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER 20 - 1000MHz ESVS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
36	29.86	35.06	40
39.27	25.44	32.14	40
41.25	29.64	35.84	40
46.76	31.08	33.68	40
48.01	35.82	35.32	40
55.48	27.65	33.85	40
60.01	30.7	36.2	40
84.01	32.7	36.8	40
85.23	30.35	32.35	40
132.01	33.52	33.52	43.5

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS ARE RECORDED.
TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :
FINAL VALUE (dBuv/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuv/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT BY NVLAP OR ANY ANGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY: K J Hz TESTED BY:

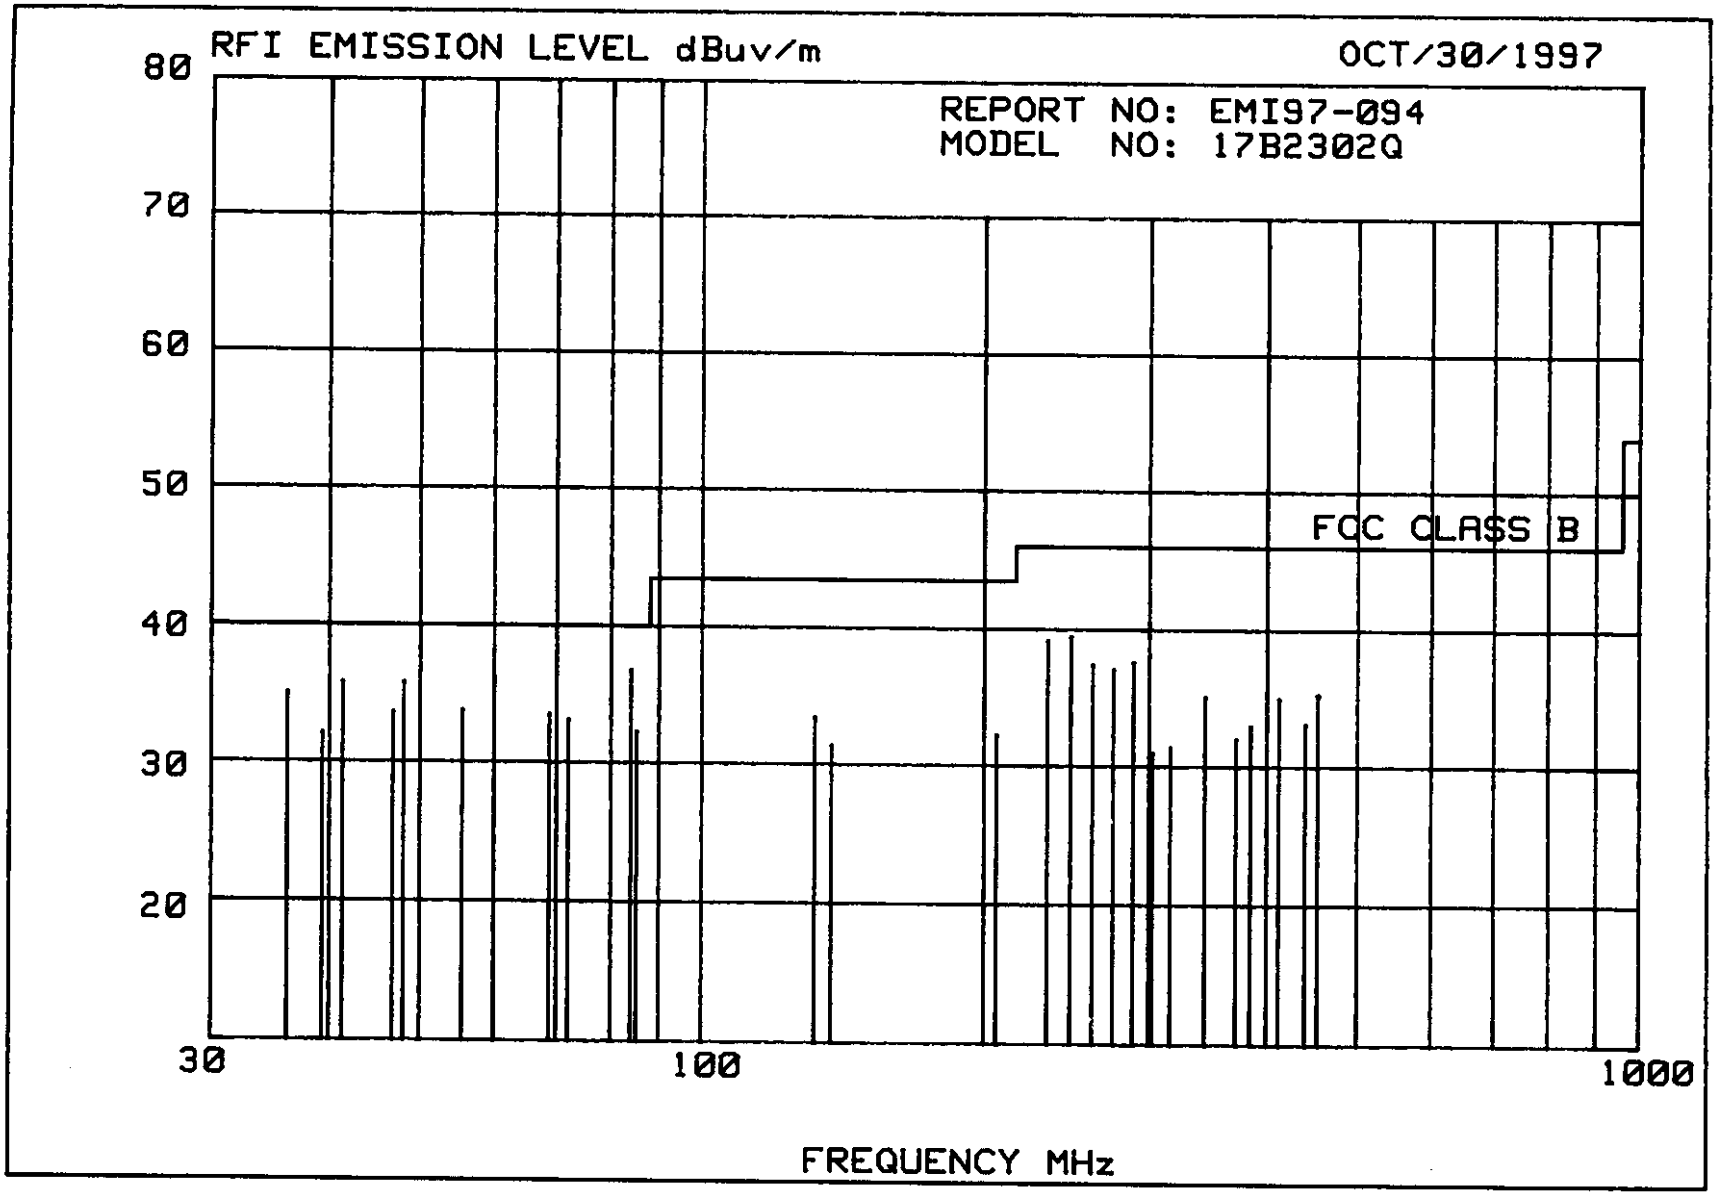
RFI EMISSION LEVEL dBuv/m
OCT/30/1997
REPORT NO: EMI97-094
MODEL NO: 17B2302Q
80
70
60
50
40
30
20
FCC CLASS B
30
100
1000
FREQUENCY MHz

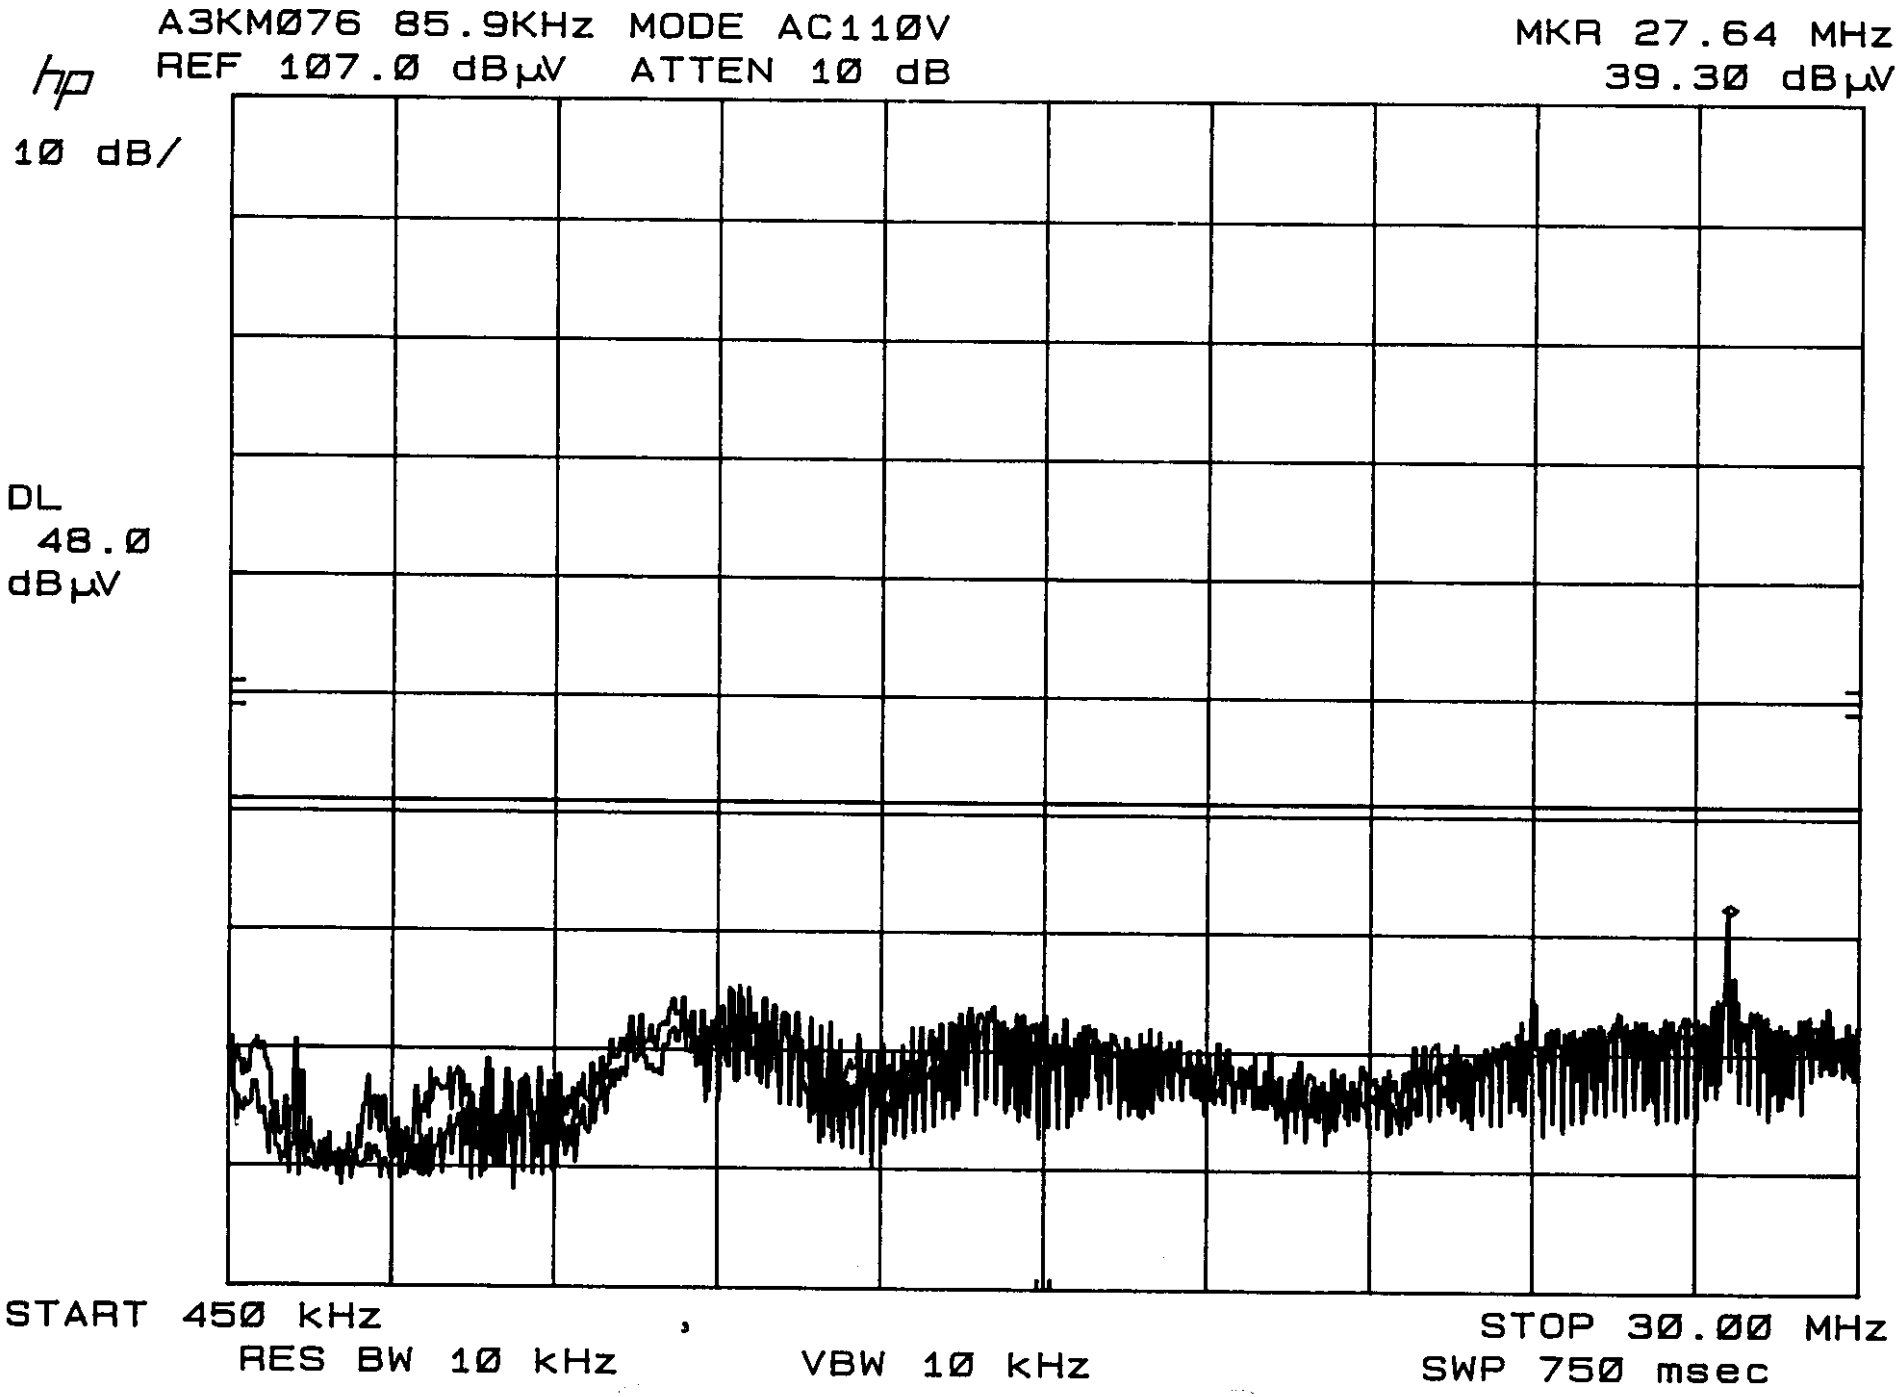
A3KMØ76 85.9KHz MODE AC11ØV
REF 1Ø7.Ø dBµV ATTEN 1Ø dB
MKR 27.64 MHz
39.3Ø dBµV
1Ø dB/
DL
48.Ø
dBµV
START 45Ø kHz
RES BW 1Ø kHz
VBW 1Ø kHz
STOP 3Ø.ØØ MHz
SWP 75Ø msec

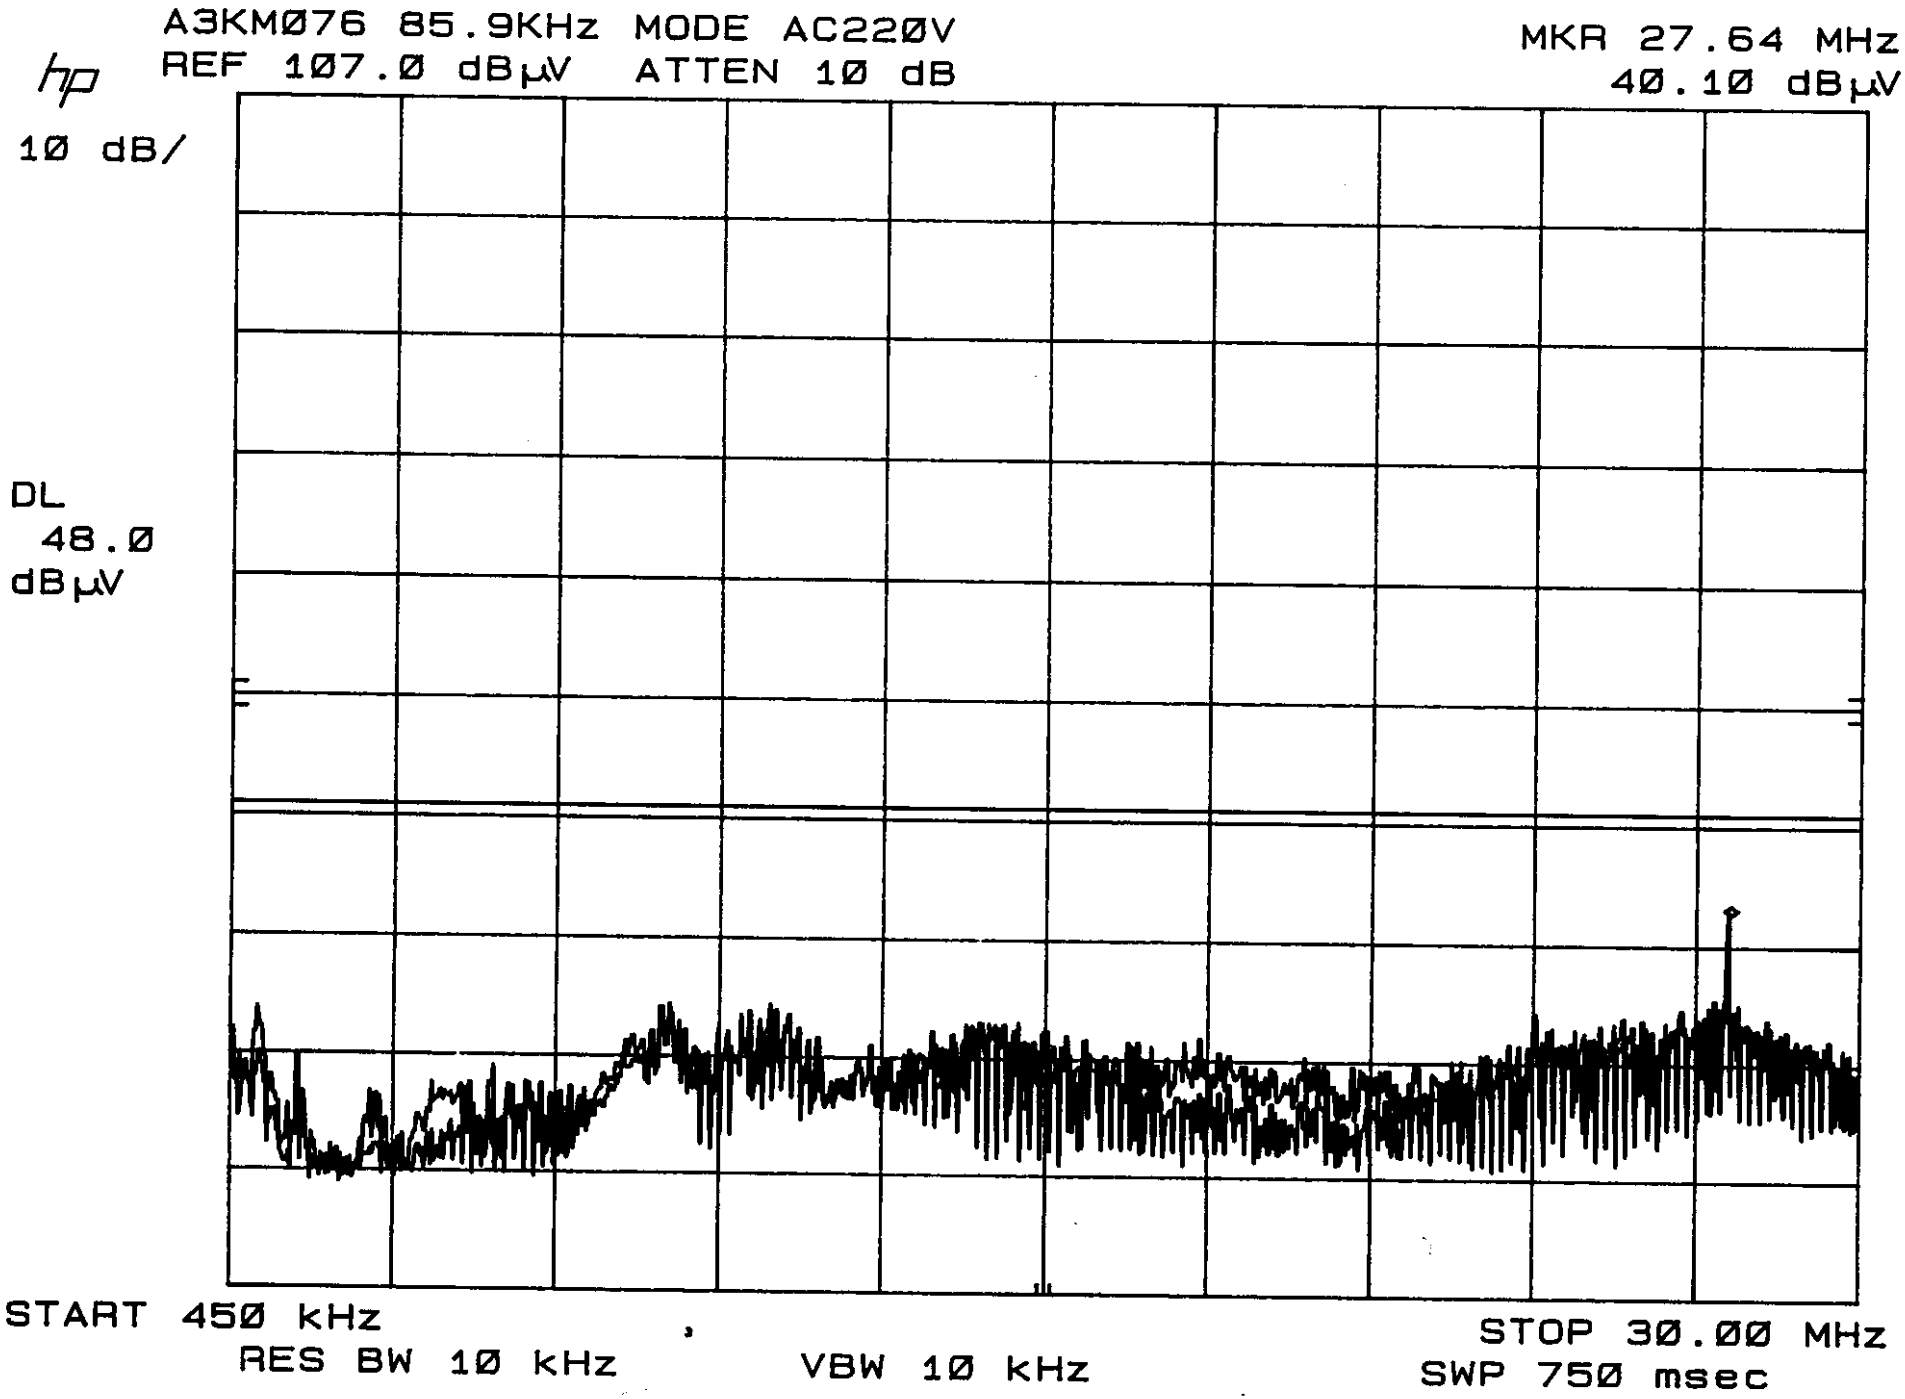
A3KMØ76 85.9KHz MODE AC22ØV
REF 1Ø7.Ø dBµV ATTEN 1Ø dB
MKR 27.64 MHz
4Ø.1Ø dBµV
1Ø dB/
DL
48.Ø
dBµV
START 45Ø kHz
RES BW 1Ø kHz
VBW 1Ø kHz
STOP 3Ø.ØØ MHz
SWP 75Ø msec

FCC TEST REPORT

FCC ID : A3KM076
REPORT NO.: EMI97-094A
TEST DATE : NOV/01/1997
TEST ENGI.: C.C.Wu

TEST PERFORMED BY
PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
CONSUMER ELECTRONICS DIVISION (PEI-CED)
EMI-LAB
P.O.BOX 123
CHUNGLI, TAOYUAN, TAIWAN, R.O.C.
TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PEI-CED
TESTED SYSTEM:

1. EUT : 17B2302Q COLOR MONITOR S/N.: NO.1
   FCC ID. : A3KM076
2. COMPUTER: HP Pavilion 8160 S/N.: US72150127
   FCC ID. : FCC LOGO
3. PRINTER : HP 2225C S/N.: 3145S02419
   FCC ID. : DSI6XU2225
4. MODEM : HAYES 07-00038 S/N.: A29900153966
   FCC ID. : BFJ9D907-00038
5. MOUSE : HP M-S34 S/N.: LCA54625637
   FCC ID. : DZL210472
6. KEYBOARD: HP 5182-5521 S/N.: E03633HLUS-C
   FCC ID. : CIGE03633
7. VIDEO CARD : B06-4107B S/N.: 100964
   FCC ID. : I27MM-VS03A
8. CD_ROMD : SONY CDU31A S/N.: --
   FCC ID. : KGACDU31A2

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE ANSI C63.4-1992 ''AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz''

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
80.0KHz MODE(1280X1024/75Hz) WAS TESTED.
INTERFACE CABLE WITH THREE FERRITE CORES(ONE INSIDE) WAS TESTED.
UNSHIELDED MAINS CORD WAS USED DURING TEST.
EXTRA MICPHONE WAS USED DURING TEST.
EXTRA EARPHONE WAS USED DURING TEST.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
64.45	30.12	33.62	40
72.01	30.36	32.96	40

154.66	31.45	AMBIENT	43.5
167.56	32.34	AMBIENT	43.5
180.45	33.6	27.7	43.5
232	35.9	33.9	46
244.9	39.3	36	46
270.67	39.74	36.24	46
283.57	38.1	35.5	46
309.34	30.236	29.736	46
322.23	32.588	30.088	46
335.12	33.14	31.24	46
360.91	32.3	32.2	46
386.71	32.332	31.032	46
412.54	32.656	31.056	46
425.35	33.1	32.7	46
451.12	33.624	32.824	46
464.02	34.336	34.036	46
580.01	35.86	33.76	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
SPECTRUM ANALYZER SETTINGS:
RBW : 100KHz
VBW : 100KHz
QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER
20 - 1000MHz ESVS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
36.01	29.66	35.46	40
38.67	30.24	36.04	40
48.01	37.02	36.32	40
48.92	36.36	35.06	40
51.57	30.62	32.92	40
55.25	29.65	32.95	40
60.01	29.1	36	40
84.01	31.1	37.1	40
132.01	31.72	34.42	43.5
193.33	33.53	AMBIENT	43.5
206.23	32.9	30.1	43.5
219.11	35.42	32.02	46

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS ARE RECORDED.
TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :
FINAL VALUE (dBuv/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuv/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT BY NVLAP OR ANY ANGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

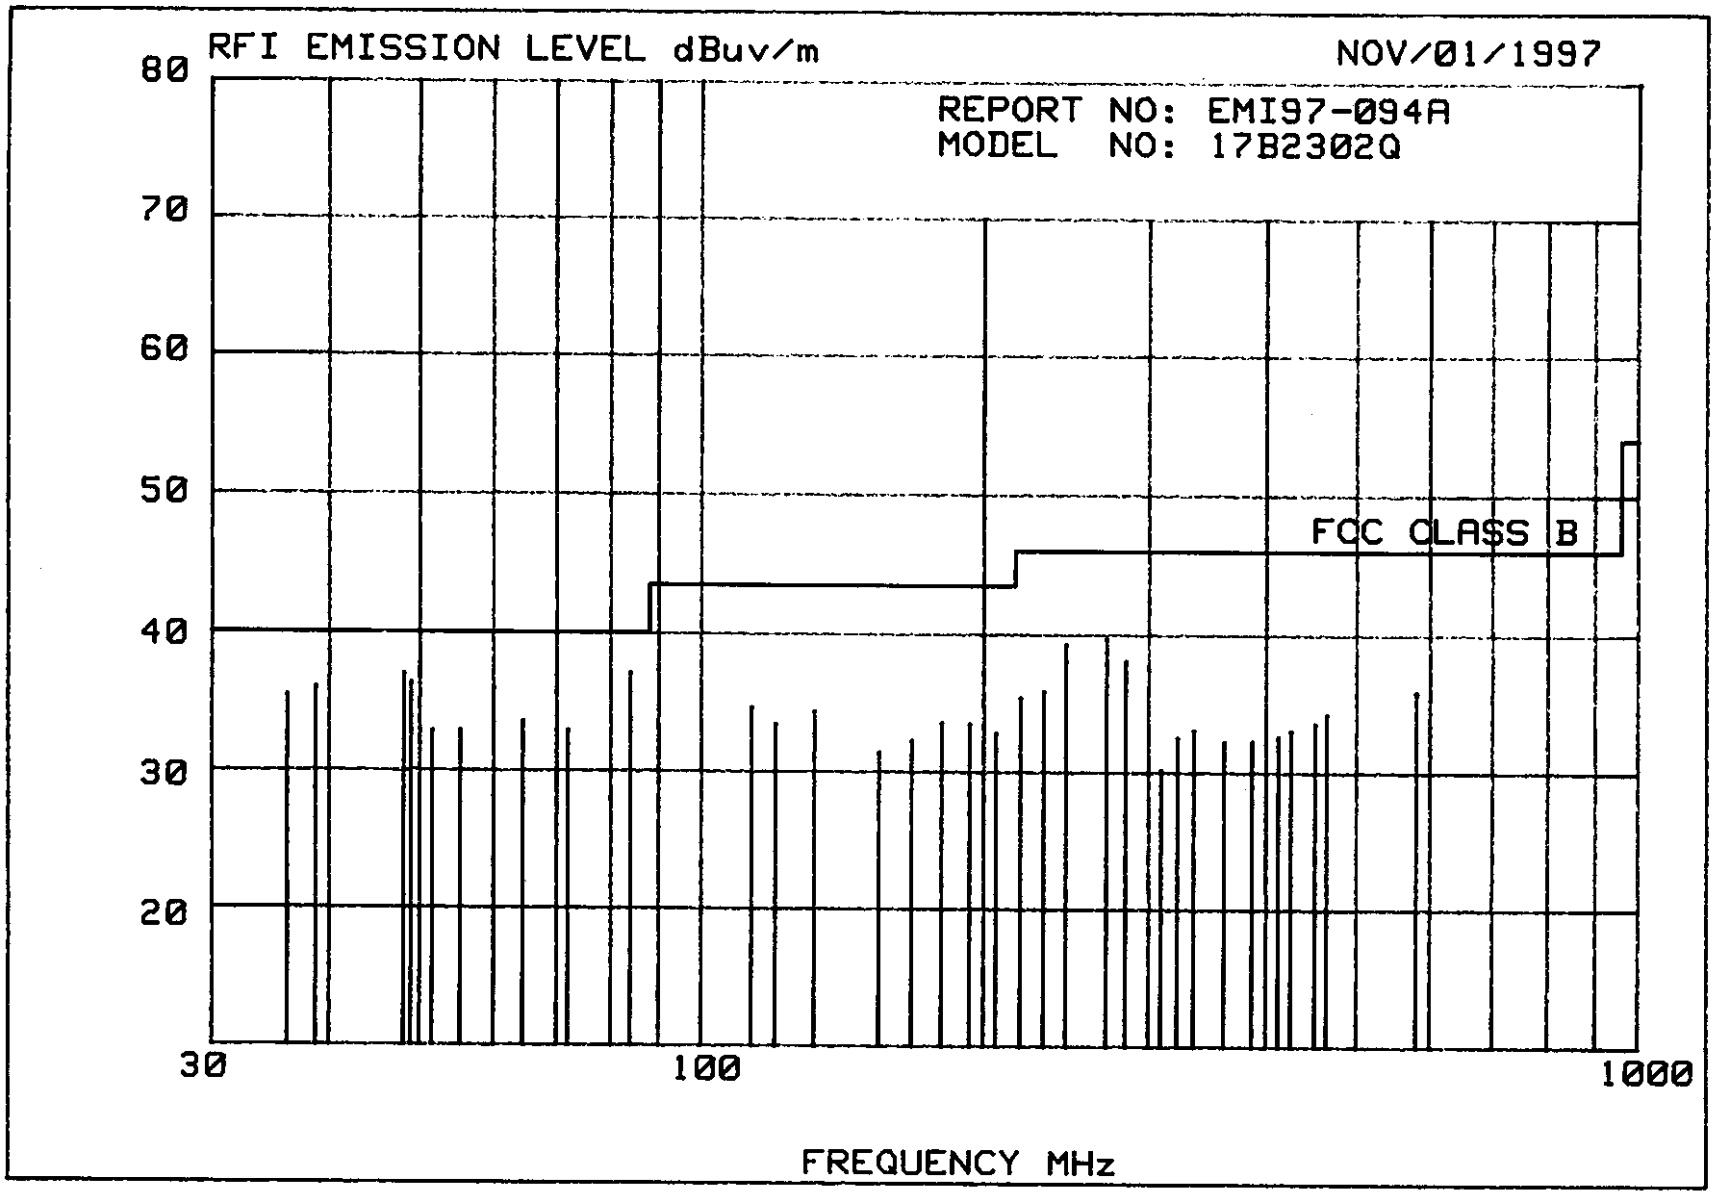
RFI EMISSION LEVEL dBuv/m
NOV/01/1997
REPORT NO: EMI97-094A
MODEL NO: 17B2302Q
80
70
60
50
40
30
20
FCC CLASS B
30
100
1000
FREQUENCY MHz

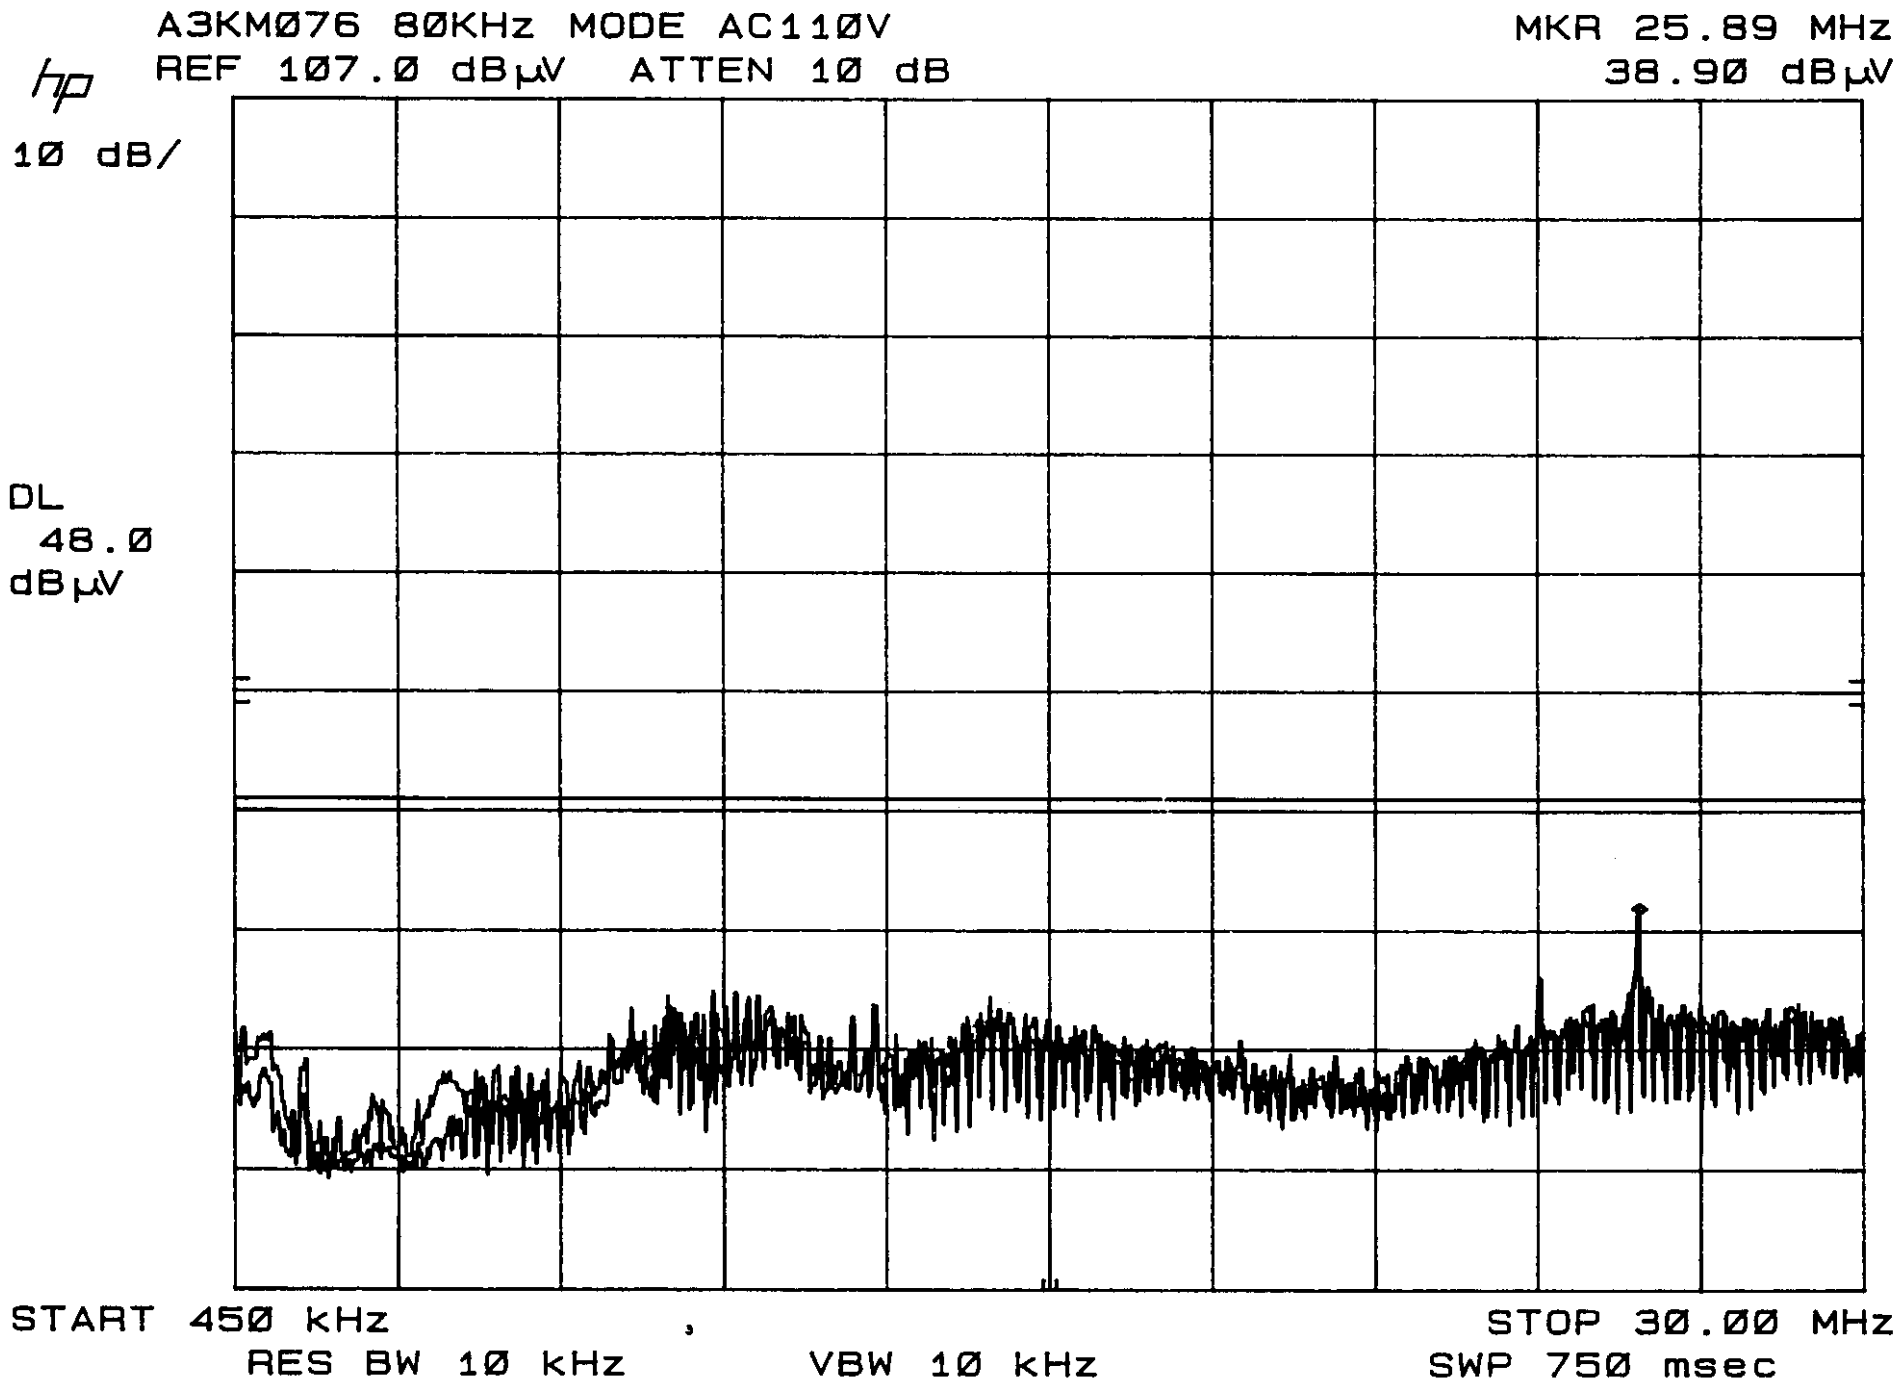
A3KMØ76 8ØKHz MODE AC11ØV
REF 107.Ø dBµV ATTEN 1Ø dB
MKR 25.89 MHz
38.9Ø dBµV
1Ø dB/
DL
48.Ø
dBµV
START 45Ø kHz
STOP 3Ø.ØØ MHz
RES BW 1Ø kHz
VBW 1Ø kHz
SWP 75Ø msec

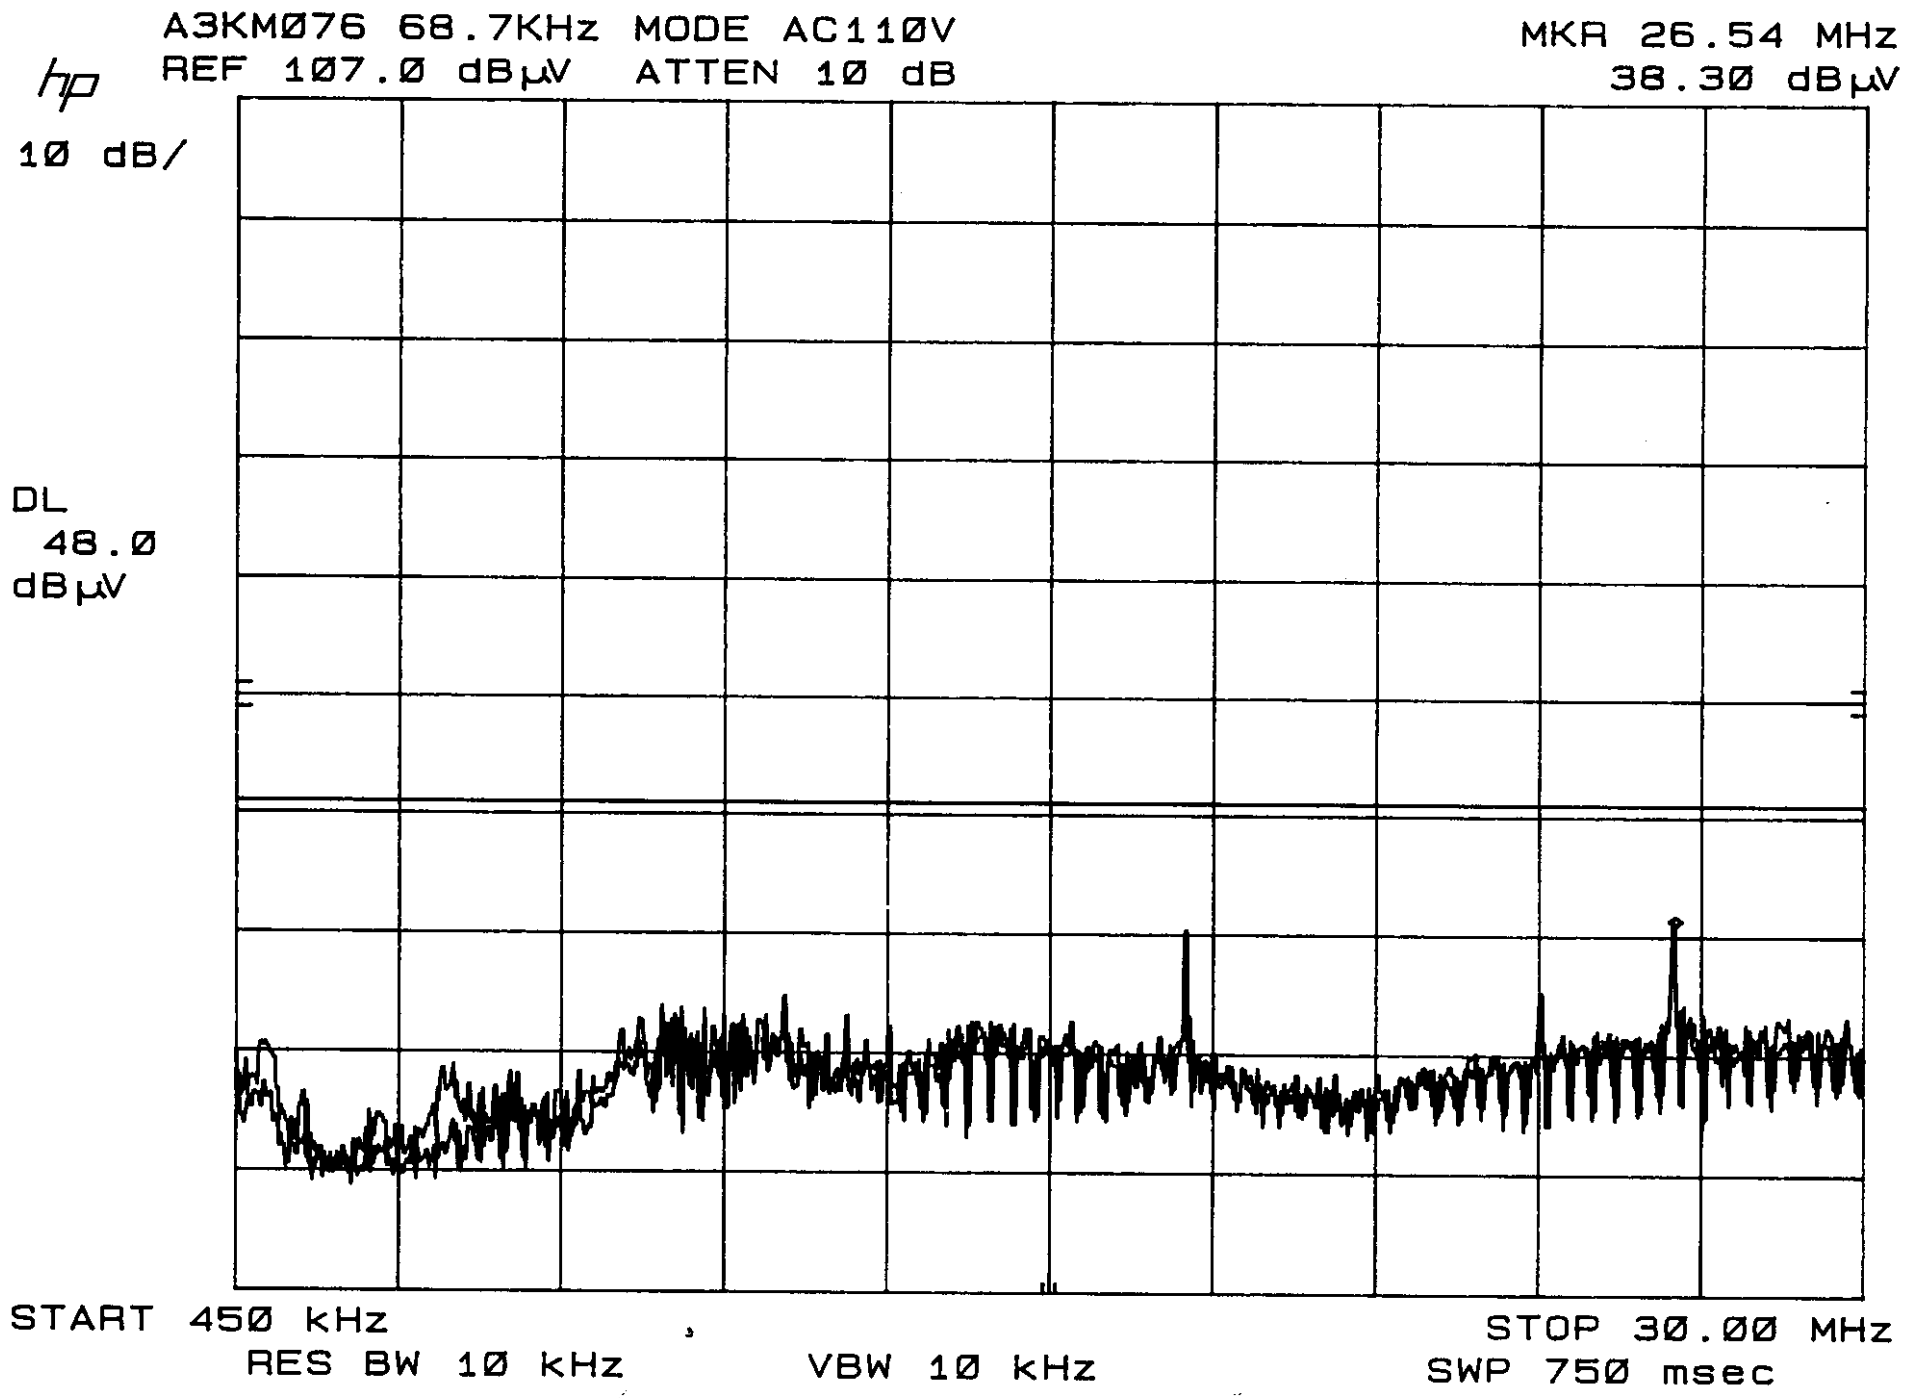
A3KMØ76 68.7KHz MODE AC11ØV
REF 107.Ø dBµV ATTEN 1Ø dB
MKR 26.54 MHz
38.3Ø dBµV
1Ø dB/
DL
48.Ø
dBµV
START 45Ø kHz
RES BW 1Ø kHz
VBW 1Ø kHz
STOP 3Ø.ØØ MHz
SWP 75Ø msec

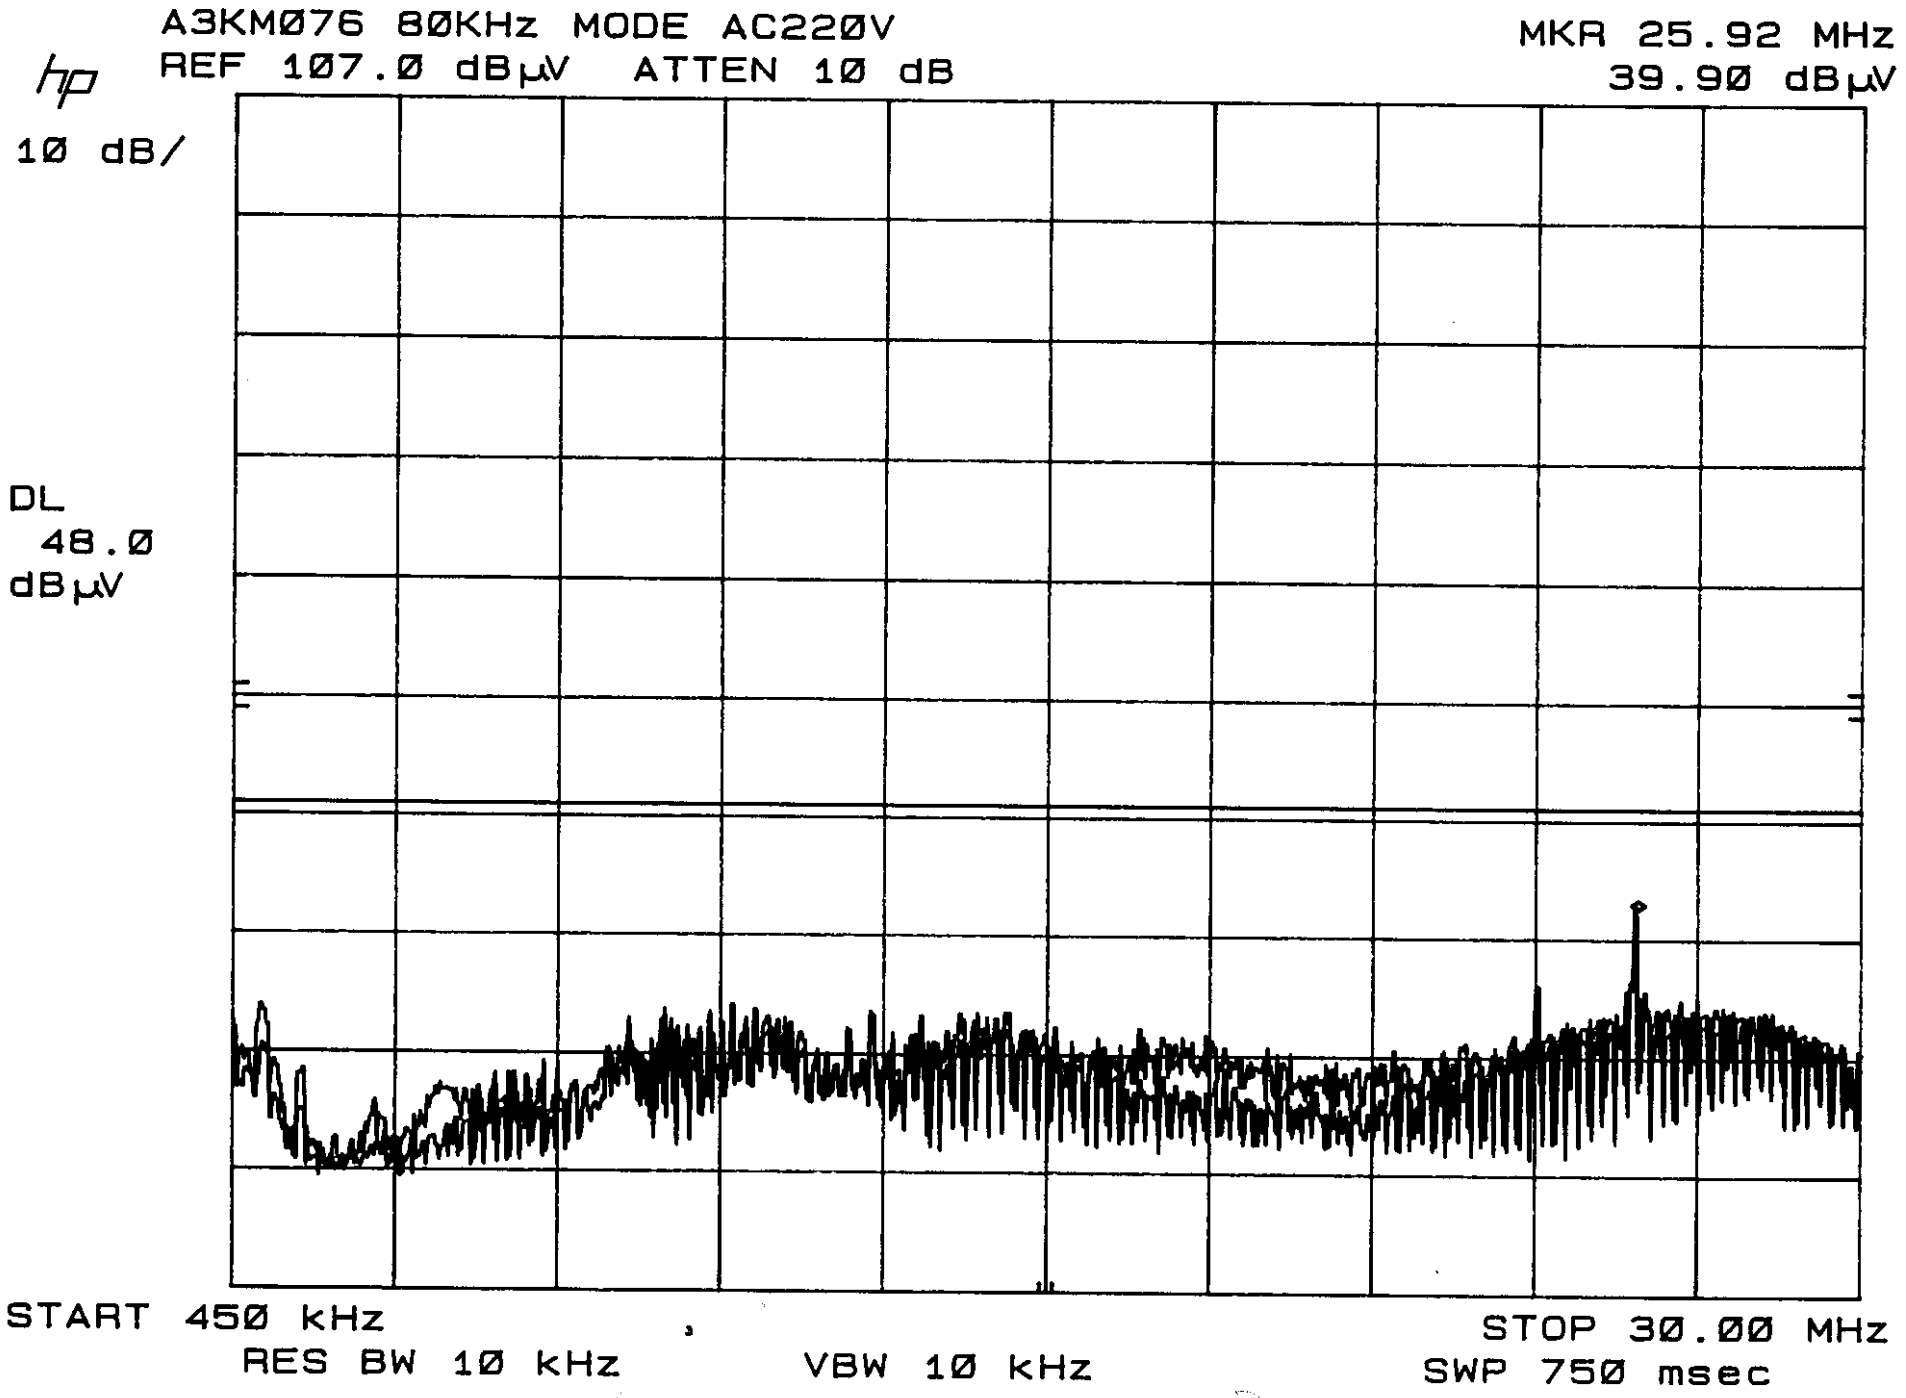
A3KMØ76 8ØKHz MODE AC22ØV
REF 1Ø7.Ø dBµV ATTEN 1Ø dB
MKR 25.92 MHz
39.9Ø dBµV
1Ø dB/
DL
48.Ø
dBµV
START 45Ø kHz
RES BW 1Ø kHz
VBW 1Ø kHz
STOP 3Ø.ØØ MHz
SWP 75Ø msec

FCC TEST REPORT

FCC ID : A3KM076
REPORT NO.: EMI97-094B
TEST DATE : NOV/02/1997
TEST ENGI.: C.C.Wu

TEST PERFORMED BY
PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
CONSUMER ELECTRONICS DIVISION (PEI-CED)
EMI-LAB
P.O.BOX 123
CHUNGLI, TAOYUAN, TAIWAN, R.O.C.
TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PEI-CED
TESTED SYSTEM:

1. EUT : 17C2322E COLOR MONITOR S/N.: --
   FCC ID. : A3KM076
2. COMPUTER: HP Pavilion 8160 S/N.: US72150127
   FCC ID. : FCC LOGO
3. PRINTER : HP 2225C S/N.: 3145S02419
   FCC ID. : DSI6XU2225
4. MODEM : HAYES 07-00038 S/N.: A29900153956
   FCC ID. : BFJ9D907-00038
5. MOUSE : HP M-S34 S/N.: LCA54625637
   FCC ID. : DZL210472
6. KEYBOARD: HP 5182-5521 S/N.: E03633HLUS-C
   FCC ID. : CIGE03633
7. VIDEO CARD : B06-4107B S/N.: 100964
   FCC ID. : I27MM-V503A
8. CD_ROMD : SONY CDU31A S/N.: --
   FCC ID. : KGACDU31A2

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE ANSI C63.4-1992 ''AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz''

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
68.9KHz MODE(1024X768/85Hz) WAS TESTED.
INTERFACE CABLE WITH THREE FERRITE CORES(ONE INSIDE) WAS TESTED.
UNSHIELDED MAINS CORD WAS USED DURING TEST.
EXTRA MICPHONE WAS USED DURING TEST.
EXTRA EARPHONE WAS USED DURING TEST

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/M)	VERTICAL (dBuv/M)	FCC CLASS B LIMIT dBuv/M
70.46	30.9	32.7	40
72.01	31.16	33.56	40
158.54	30.25	28.85	43.5

193.78	32.44	30.04	43.5
237.83	35.3	33.1	46
246.63	36.98	33.88	46
255.43	36.75	35.25	46
264.22	37.36	36.26	46
308.27	30.232	29.332	46
325.87	30.024	29.324	46
334.67	30.94	30.34	46
352.31	31.2	30.6	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
SPECTRUM ANALYZER SETTINGS:
RBW : 100KHz
VBW : 100KHz
QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER
20 - 1000MHz ESVS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
36.01	28.56	35.36	40
46.88	33.08	36.58	40
48.01	37.52	37.62	40
55.13	28.89	33.85	40
60.01	31.5	36.4	40
61.55	27.46	33.36	40
79.39	AMBIENT	34.32	40
84.01	31.4	37.6	40
84.87	29.65	33.05	40
202.59	35.2	30	43.5
220.19	33.9	30.5	46

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS ARE RECORDED.
TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :
FINAL VALUE (dBuv/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuv/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT BY NVLAP OR ANY ANGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY: K J Hsu
F.J.HSU, NVLAP SIGNATORY

TESTED BY:
S.C.Wu

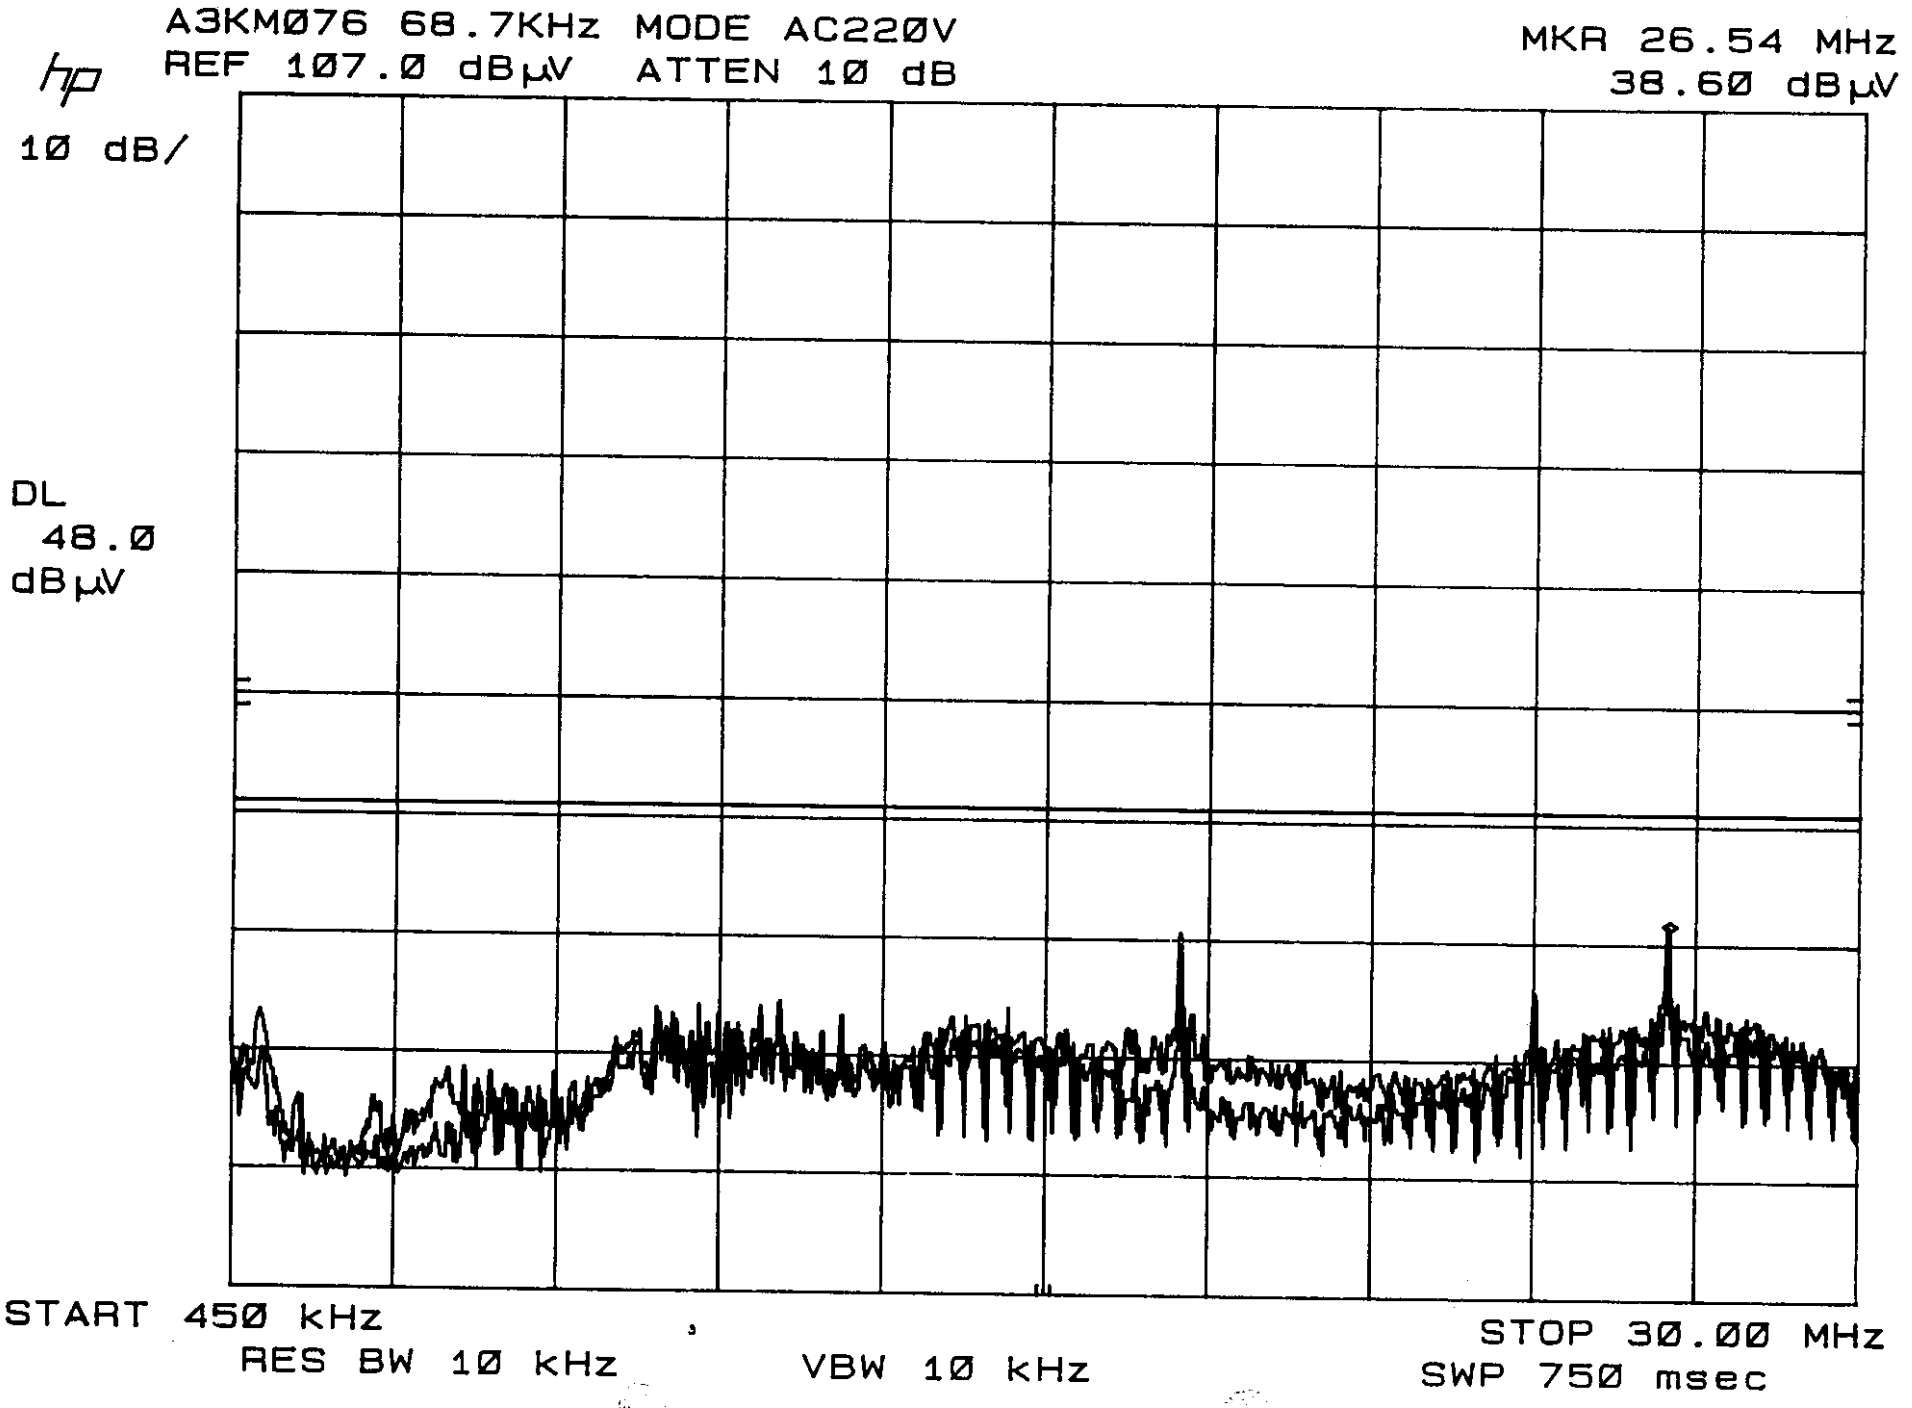
A3KMØ76 68.7KHz MODE AC22ØV
REF 107.Ø dBµV ATTEN 1Ø dB
MKR 26.54 MHz
38.6Ø dBµV
1Ø dB/
DL
48.Ø
dBµV
START 45Ø kHz
RES BW 1Ø kHz
VBW 1Ø kHz
STOP 3Ø.ØØ MHz
SWP 75Ø msec

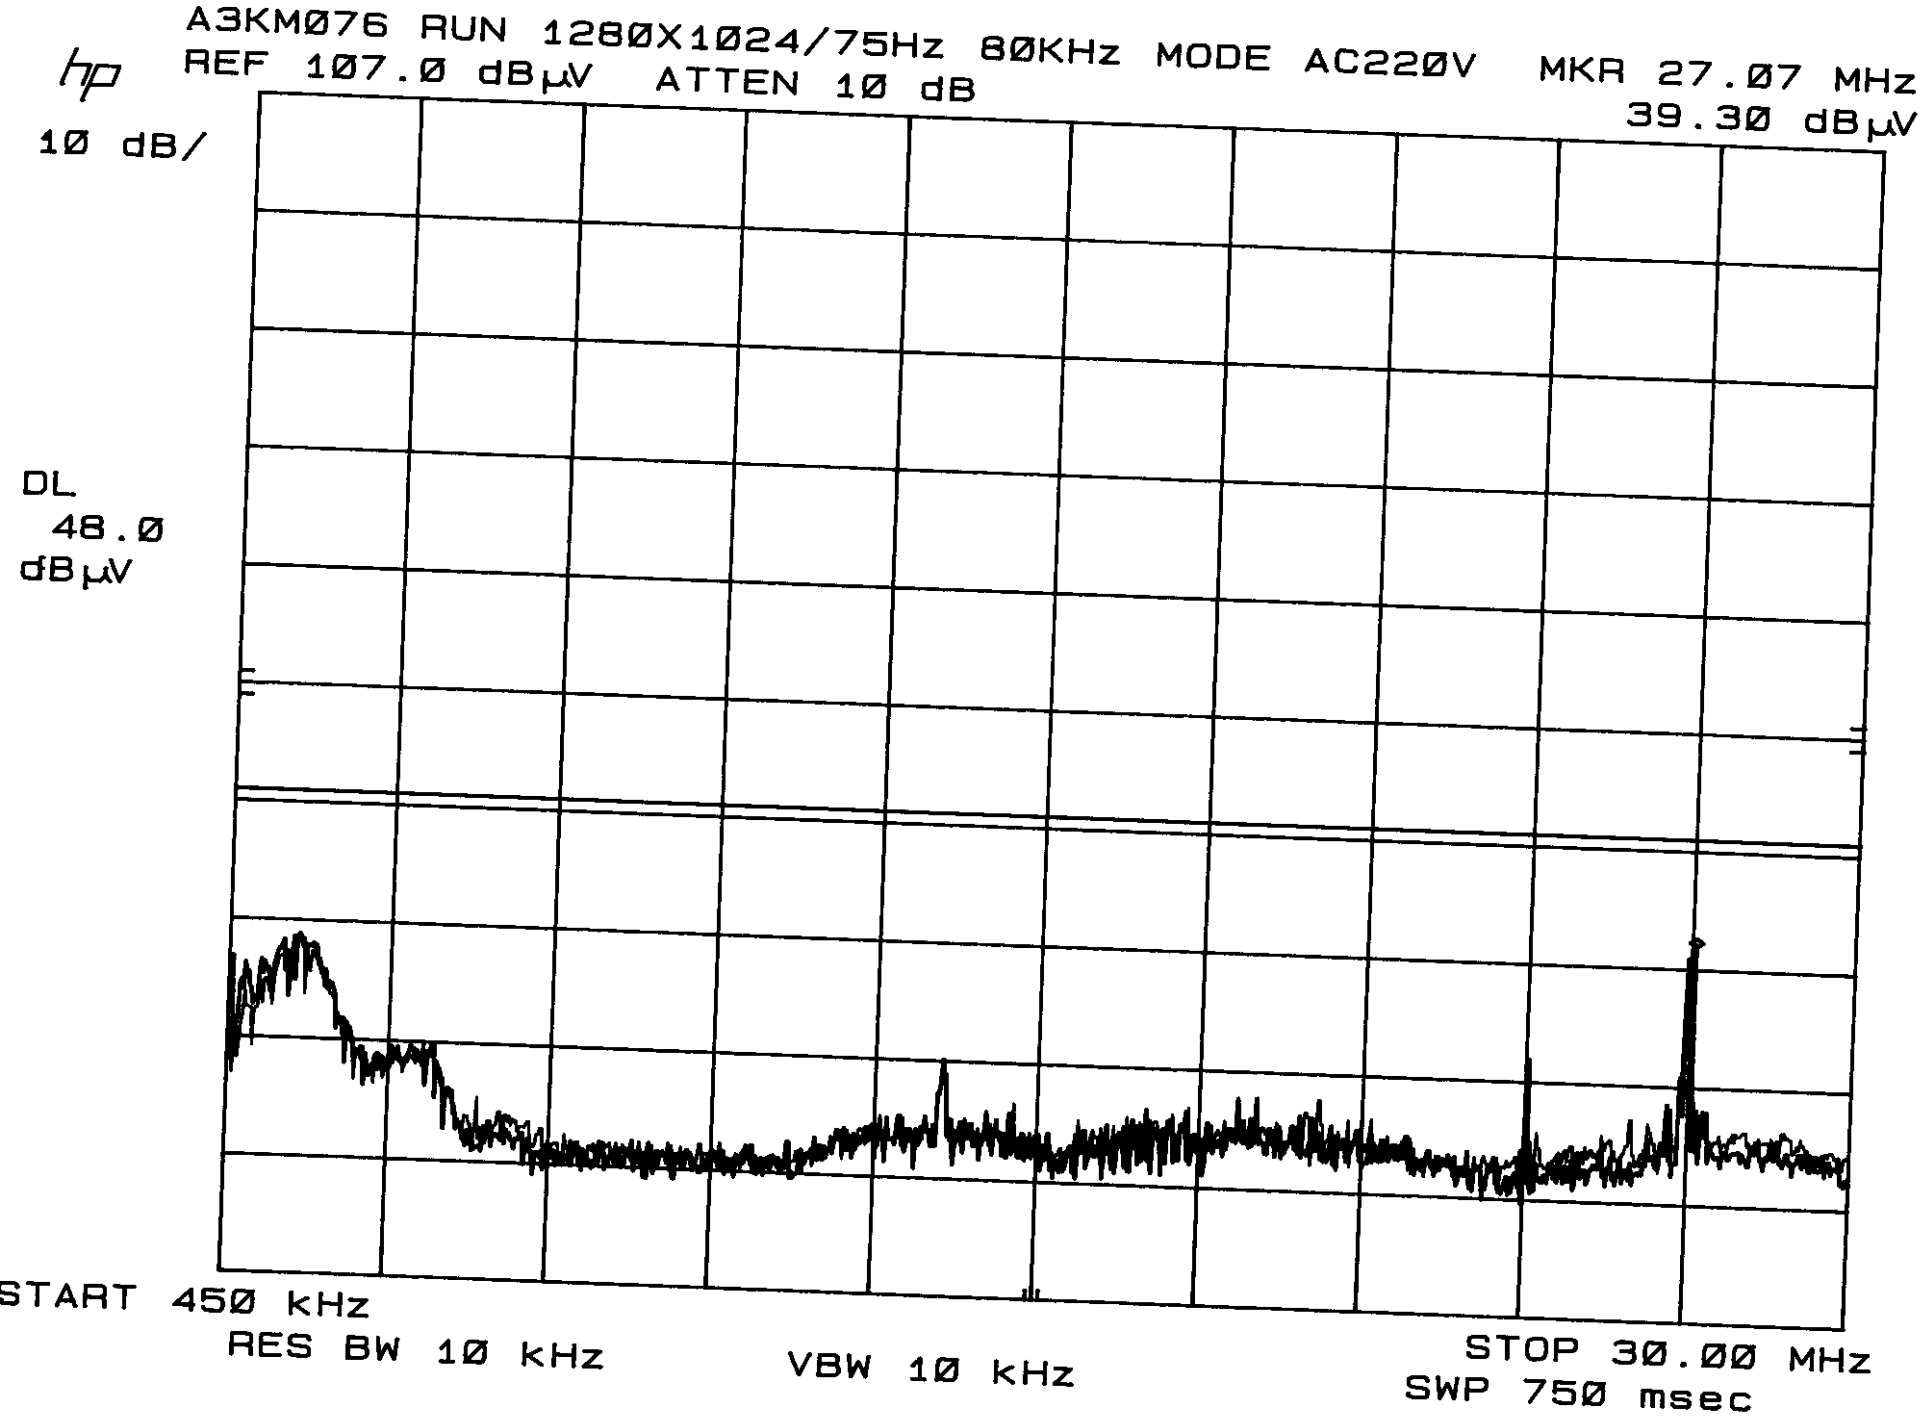
A3KM076 RUN 1280X1024/75Hz 80KHz MODE AC220V MKR 27.07 MHz
REF 107.0 dBµV ATTEN 10 dB
39.30 dBµV
10 dB/
DL
48.0
dBµV
START 450 kHz
RES BW 10 kHz
VBW 10 kHz
STOP 30.00 MHz
SWP 750 msec

STATEMENT OF DATA MEASURED

1. General Information of EUT

The EUT, 17" supper VGA color monitor,

Model No. : 6548-01N
FCC ID : A3KM076
Brand : IBM

The monitor automatically scans horizontal frequencies between 30HKz and 86KHz, and vertical frequencies between 50Hz and 160Hz. This color monitor displays sharp and brilliant images of text and graphics with a maximum resolution up to 1600X1200 pixels. With microprocessor based digital controlled circuit and software control, the monitor can automatically adjust itself to the video card's scanning frequency and displays an image with the precise parameters you desire.

The monitor has 10 factory-preset modes as indicated in the following table:

	Resolution	H-Frequency	V-Frequency	Remark
M01	640 X 480	31.5KHZ	60Hz	Non-interlaced
M02	640 X 480	37.5KHz	75Hz	Non-interlaced
M03	640 X 480	43.2KHz	85Hz	Non-interlaced
M04	720 X 400	31.5KHz	70Hz	Non-interlaced
M05	800 X 600	46.9KHz	75Hz	Non-interlaced
M06	800 X 600	53.7KHz	85Hz	Non-interlaced
M07	1024 X 768	60.0KHz	75Hz	Non-interlaced
M08	1024 X 768	68.7KHz	85Hz	Non-interlaced
M09	1280 X 1024	80.0KHz	75Hz	Non-interlaced
M10	1600 X 1200	75.0KHz	60Hz	Non-interlaced