

Exhibit 8

**TEST REPORT OF RADIATED AND
CONDUCTED EMISSIONS**

STATEMENT OF DATA MEASURED

1. General Information of EUT

The EUT, 15" color LCD monitor,

Model No. : 151AX
 FCC ID : A3KM082
 Brand : PHILIPS

The monitor automatically scans horizontal frequencies between 30KHz and 61KHz, and vertical frequencies between 56Hz and 75Hz. This color monitor displays sharp and brilliant images of text and graphics with a maximum resolution up to 1024X768 pixels.

The monitor has 14 factory-preset modes as indicated in the following table:

	Resolution	H-Frequency	V-Frequency	Remark
M01	640 X 350	31.5KHz	70Hz	Non-interlaced
M02	720 X 400	31.5KHz	70Hz	Non-interlaced
M03	640 X 480	31.5KHz	60Hz	Non-interlaced
M04	640 X 480	35.0KHz	67Hz	Non-interlaced
M05	640 X 480	37.9KHz	73Hz	Non-interlaced
M06	640 X 480	37.5KHz	75Hz	Non-interlaced
M07	800 X 600	35.2KHz	56Hz	Non-interlaced
M08	800 X 600	37.9KHz	60Hz	Non-interlaced
M09	800 X 600	48.1KHz	72Hz	Non-interlaced
M010	800 X 600	46.9KHz	75Hz	Non-interlaced
M011	832 X 624	49.7KHz	75Hz	Non-interlaced
M012	1024 X 768	48.3KHz	60Hz	Non-interlaced
M013	1024 X 768	56.5KHz	70Hz	Non-interlaced
M014	1024 X 768	60.0KHz	75Hz	Non-interlaced

2. Test Equipment and Procedure

Test was performed by:

PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
 CONSUMER ELECTRONICS DIVISION
 EMI - LAB

5, Tze Chiang 1 Road, Chungli Industrial Park
 P.O. Box 123, Chungli, Taoyuan, Taiwan
 R. O. C.

Tel : 886-3-4549862 Fax : 886-3-4549887
 Internet: ronnie.yang@tw.ccmil.philips.com

The test was performed in accordance with ANSI C63.4-1992, "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz"

Test equipments used for line Conducted and Radiated emissions as following. All equipments were calibrated according to ANSI C63.4-1992 and ISO-9000 requirement unless otherwise specified.

Test Equipment	Model No.	Serial No.	Calibrated Date
Spectrum	HP8568B	2928A04640	4/15/1998
RF Preselector	HP85685A	2620A00338	4/15/1998
QP Adapter	HP85650A	2811A01324	4/15/1998
EMI Receiver	R & S ESVS30	8419977/066	11/21/1998
Biconical Antenna	EMCO 3110B	2863	2/07/1998
Biconical Antenna	EMCO 3110B	2864	2/07/1998
Log-Periodic Antenna	EMCO 3146A	1377	2/07/1998
Log-Periodic Antenna	EMCO 3146A	1378	2/07/1998
LISN	EMCO 3825/2	9311-2153	9/17/1997
LISN	EMCO 3825/2	9311-2154	9/17/1997
Turn Table	EMCO 1060	1068	5/18/1997
Antenna Tower	EMCO 1050	1113	5/18/1997
RF Cable	M17/75-RG214-NE	N/A	5/18/1997
Computer	HP9000/300	2614A78610	N/A
Printer	HP2225A	2728S02586	N/A
Plotter	HP7440A	2539A40856	N/A

Traceability to R.O.C. and international standards is assured by using calibrated all equipment.

For system measurement, the EUT "151AX" was connected to:

Item	Model No.	Serial No.	FCC ID
1. Computer	IBM 2176-T33	90-A58TZ	AN02161V
2. Keyboard	IBM KB-9826	K071940	E8HKB-5323
3. Mouse	HP M-S34	23-146196	DZL211029
4. Printer	HP 2225C	3123S97227	DSI6XU2225
5. Modem	Hayes 07-00038	A29900153966	BFJ9D907-00038
6. Vide Card	Winner 3000L	023004001190	KJGW3000L

The system was configured for testing in a typical fashion (as a customer would normally use it) according to ANSI C63.4-1992, please see the photographs for detail.

Both conducted and radiated testings were performed according to the procedure in ANSI C63.4-1992. Conducted testing was performed in screen room and radiated testing was performed in open site at an antenna to EUT distance of 3-meter on horizontal and vertical polarization.

First, pre-scan all modes in screen room, then select 2 higher modes (worst case) were tested and reported.

The line conductive interference was tested with 110VAC and 220VAC receptively. Unshielded power cord was used during test.

Tested and reported modes as following:

Report No.	Resolution	Frequencies
EMC98- 043	1024 X 768	60.0KHz/75Hz
EMC97- 043A	1024 X 768	48.3KHz/60Hz

3. Test Program and Test Results

Set up the EUT and all peripherals as chapter 6 of ANSI C63.4-1992 for AC power line conducted emissions testing and radiated emissions testing.

Turn on the power of EUT and all peripherals, select an appropriate displaying mode using the "setup" software. Then run an EMI test program "HTEST.EMI" as a basic software to execute the EUT operating under test.

- Step 1 : Run the "HTEST.EMI" on personal computer then sends "H" character to monitor continuously until full screen.
- Step 2 : Personal computer sends a complete line of continuously repeating "H" to HP 2225C printer.
- Step 3 : Personal computer sends a file of "H" pattern to floppy disk then read a file of "H" pattern from floppy disk.
- Step 4 : Personal computer sends a file of "H" pattern to hard disk then read a file of "H" pattern from hard disk.
- Step 5 : Personal computer sends a file of "H" patten to Hayes 07-00038 modem.
- Step 6 : Return to step 1

All data in this report are "PEAK" value within 15dB margin unless otherwise noted. The radiated (open site) data has included antenna and cable factors, sample calculation:

Final Value (dB μ v/m) = Reading (dB μ v) + Antenna Factor (dB) + Cable Loss (dB)

The measured data of radiated RF interference at open site and line conducted interference as attached.

The subject device is in compliance with the limits for a class B digital device, pursuant to part 15, subpart B of the FCC rules.



Ronnie Yang - Manager, Safety/Dev. PEI-CED
NVLAP Signatory

FCC TEST REPORT

FCC ID : A3KM082
 REPORT NO.: EMI98-043
 TEST DATE : MAY/30/1998
 TEST ENGI.: C.C.Wu

TEST PERFORMED BY
 PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
 CONSUMER ELECTRONICS DIVISION (PEI-CED)
 EMI-LAB
 P.O.BOX 123
 CHUNGLI, TAoyUAN, TAIWAN, R.O.C.
 TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PEI-CED
 TESTED SYSTEM:

1. EUT : 151AX LCD COLOR MONITOR S/N.: --
 FCC ID. : A3KM082
2. COMPUTER: IBM Aptiva 2176-T33 S/N.: 90-A58TZ
 FCC ID. : AN02161V
3. PRINTER : HP 2225C S/N.: 3145S02419
 FCC ID. : DSI6XU2225
4. MODEM : HAYES 07-00038 S/N.: A29900153966
 FCC ID. : BFJ9D907-00038
5. MOUSE : IBM M-534 S/N.: 23-146196
 FCC ID. : DZL211029
6. KEYBOARD: IBM KB-9826 S/N.: K071940
 FCC ID. : E8HKB-5323
7. VIDEO CARD : WINNER 3000L S/N.: 023004001190
 FCC ID. : KJ6W3000L
8. CD_ROMD : SONY CDU31A S/N.: --
 FCC ID. : K6ACDU31A2

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE
 ANSI C63.4-1992 "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF
 RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC
 EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz"

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
 60.0Kz MODE(1024X768/75Hz) WAS TESTED.
 FLY-IN I/O CABLE WITH FOUR FERRITE CORES(TWO INSIDE) WAS USED
 UNSHIELDED MAINS CORD WAS USED DURING TEST.
 EXTRA EARPHONE AND MICROPHONE WERE USED DURING TEST.
 EXTRA 4 USB CABLES WERE CONNECTED TO DUMMY LOAD WAS USED.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
115.59	33.16	31.96	43.5
136	33.66	33.56	43.5

141.79	32.32	33.12	43.5
156.4	33.2	30.8	43.5
163.2	27.79	29.09	43.5
170	28.9	30.7	43.5
183.6	32.36	30.16	43.5
231.2	36.05	35.55	46
238	37.4	37.5	46
244.8	36.1	36.7	46
251.6	37.9	36.3	46
258.4	38	36.7	46
265.2	37.4	37.8	46
271.98	38.38	36.68	46
278.78	37.66	AMBIENT	46
285.58	39.8	AMBIENT	46
292.39	37.94	36.94	46
299.3	36.48	38.98	46
306	31.424	30.024	46
312.78	32.752	31.852	46
319.58	35.18	35.58	46
326.41	36.224	35.624	46
330.82	34.944	37.944	46
333.18	31.592	30.992	46
338.7	34.136	36.536	46
340	36.36	38.56	46
346.8	36.028	36.328	46
353.6	37.9	39.3	46
354.45	35.6	37.8	46
360.4	36.3	34.4	46
367.19	34	33	46
370.2	35.3	33.5	46
374	38.1	37.1	46
378.09	37.208	34.208	46
380.8	33.816	34.116	46
385.96	33.196	32.896	46
387.6	36.468	36.668	46
394.39	38.284	38.284	46
401.19	34.112	33.412	46
408	37.496	38.496	46
414.78	33.78	32.88	46
421.59	36.364	35.664	46
442	35.408	36.008	46
455.6	36.344	35.544	46
462.4	37.688	38.588	46
476	38.832	39.632	46
535.62	34.844	35.444	46
551.37	37.424	36.024	46
567.11	35.808	36.108	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
SPECTRUM ANALYZER SETTINGS:

RBW : 100KHz

VBW : 100KHz

QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER
20 - 1000MHz ESUS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuV/m)	VERTICAL (dBuV/m)	FCC CLASS B LIMIT (dBuV/m)
71.61	25.66	36.86	40
122.39	35.46	33.26	43.5
129.19	33.37	33.17	43.5
133.92	30.64	34.54	43.5
142.8	35.03	33.13	43.5
149.6	35	32.3	43.5
187.2	31.97	30.27	43.5
210.8	33.48	30.38	43.5
217.6	35.14	30.44	46
224.4	37.98	33.48	46
428.4	37.872	39.572	46
472.6	39.552	38.152	46
590.75	39.692	36.292	46
598.38	40.676	40.176	46
630.13	39.6	39.8	46

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS
ARE RECORDED.

TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :

FINAL VALUE (dBuV/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuV/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN
APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT
BY NVLAP OR ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY:

K. J. Hsu

TESTED BY:

C. C. Wu


K.J.HSU, NVLAP SIGNATORY

C.C.Wu

RFI EMISSION LEVEL dBuV/m

MAY/30/1998

REPORT NO: EMI98-043
MODEL NO: SUNNY-15.1

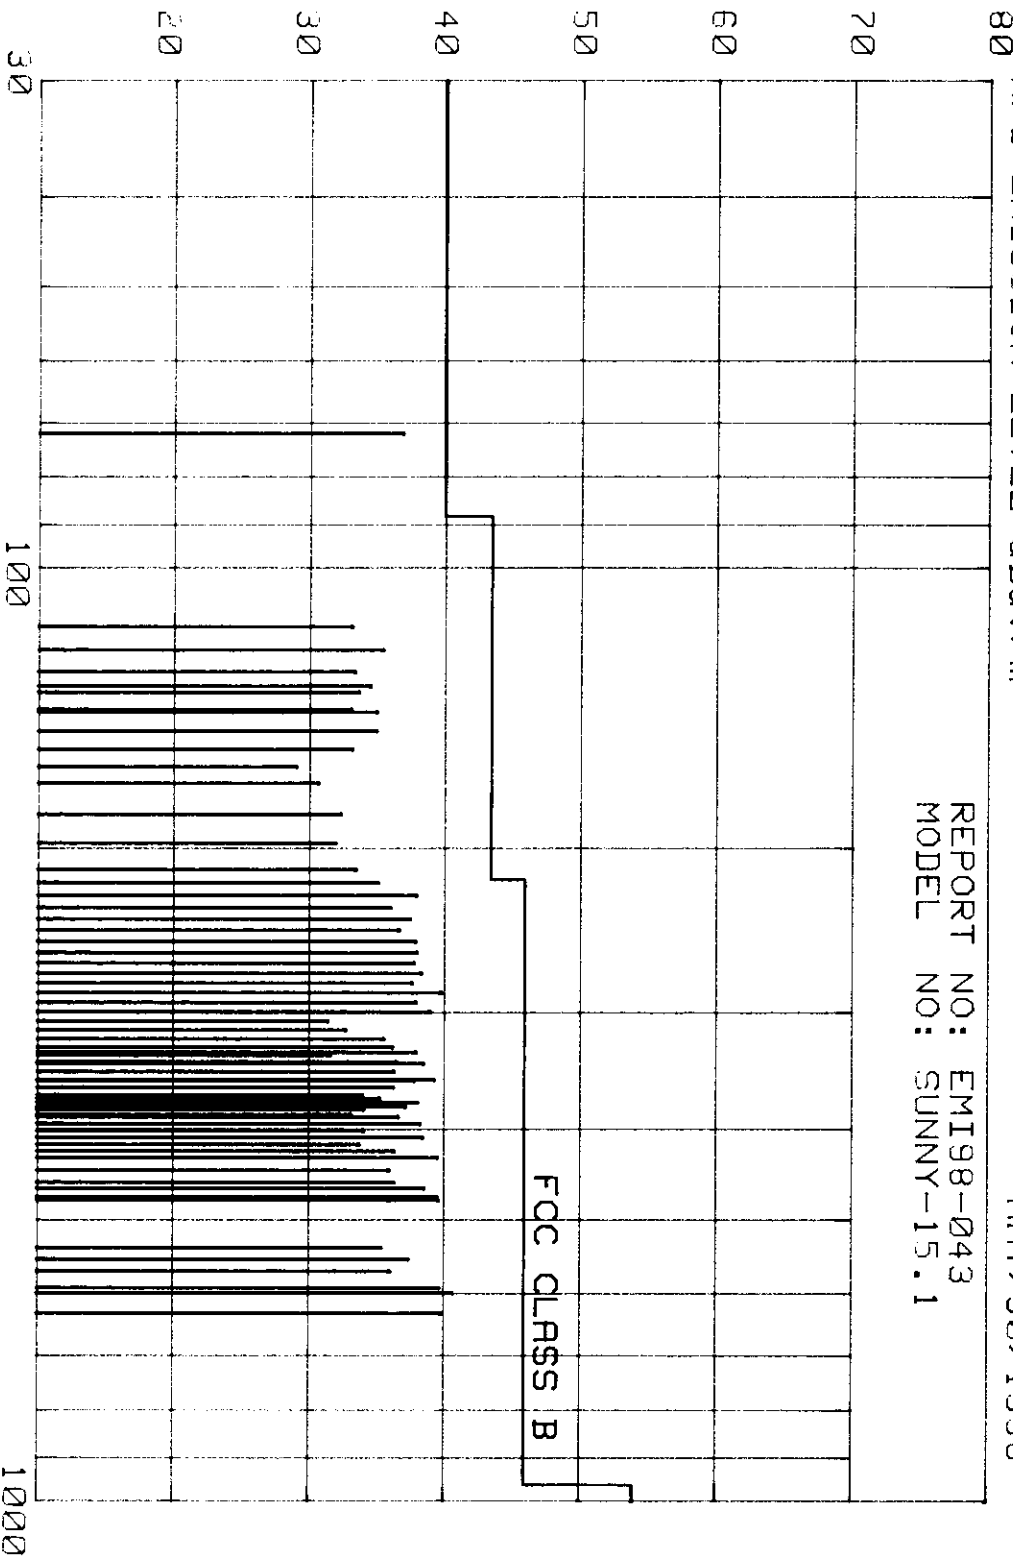


FREQUENCY MHz

HP

10 dB/

DL
48.0
dBμV

A3KM082 RUN 1024X768/75Hz 60KHz MODE 110V MKR 23.76 MHz
REF 107.0 dBμV ATTN 10 dB 35.70 dBμV

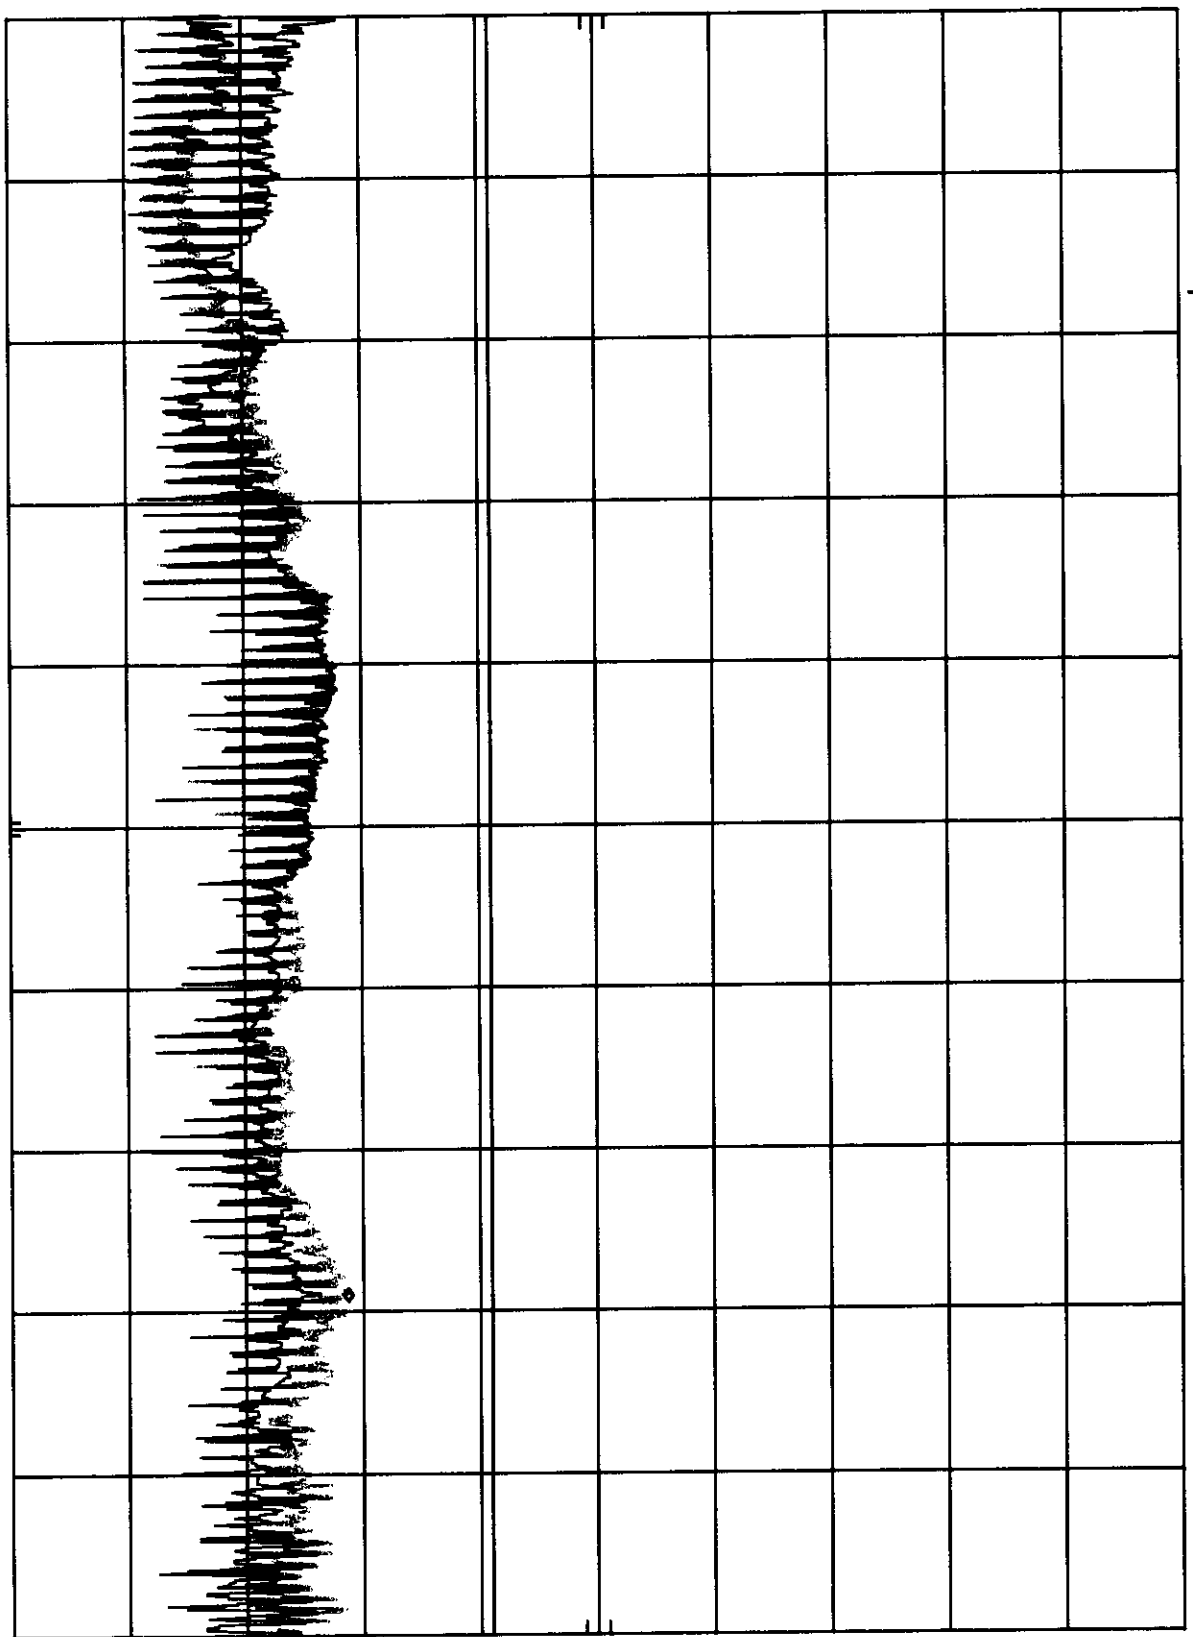


START 450 KHz STOP 30.00 MHz
RES BW 10 KHz VBW 10 KHz SWP 750 msec

A3KM082 RUN 1024X768/75Hz 60KHz MODE AC220V MKR 510 KHz
h_p REF 107.0 dBμV ATTEN 10 dB 39.40 dBμV

10 dB/

DL
48.0
dBμV

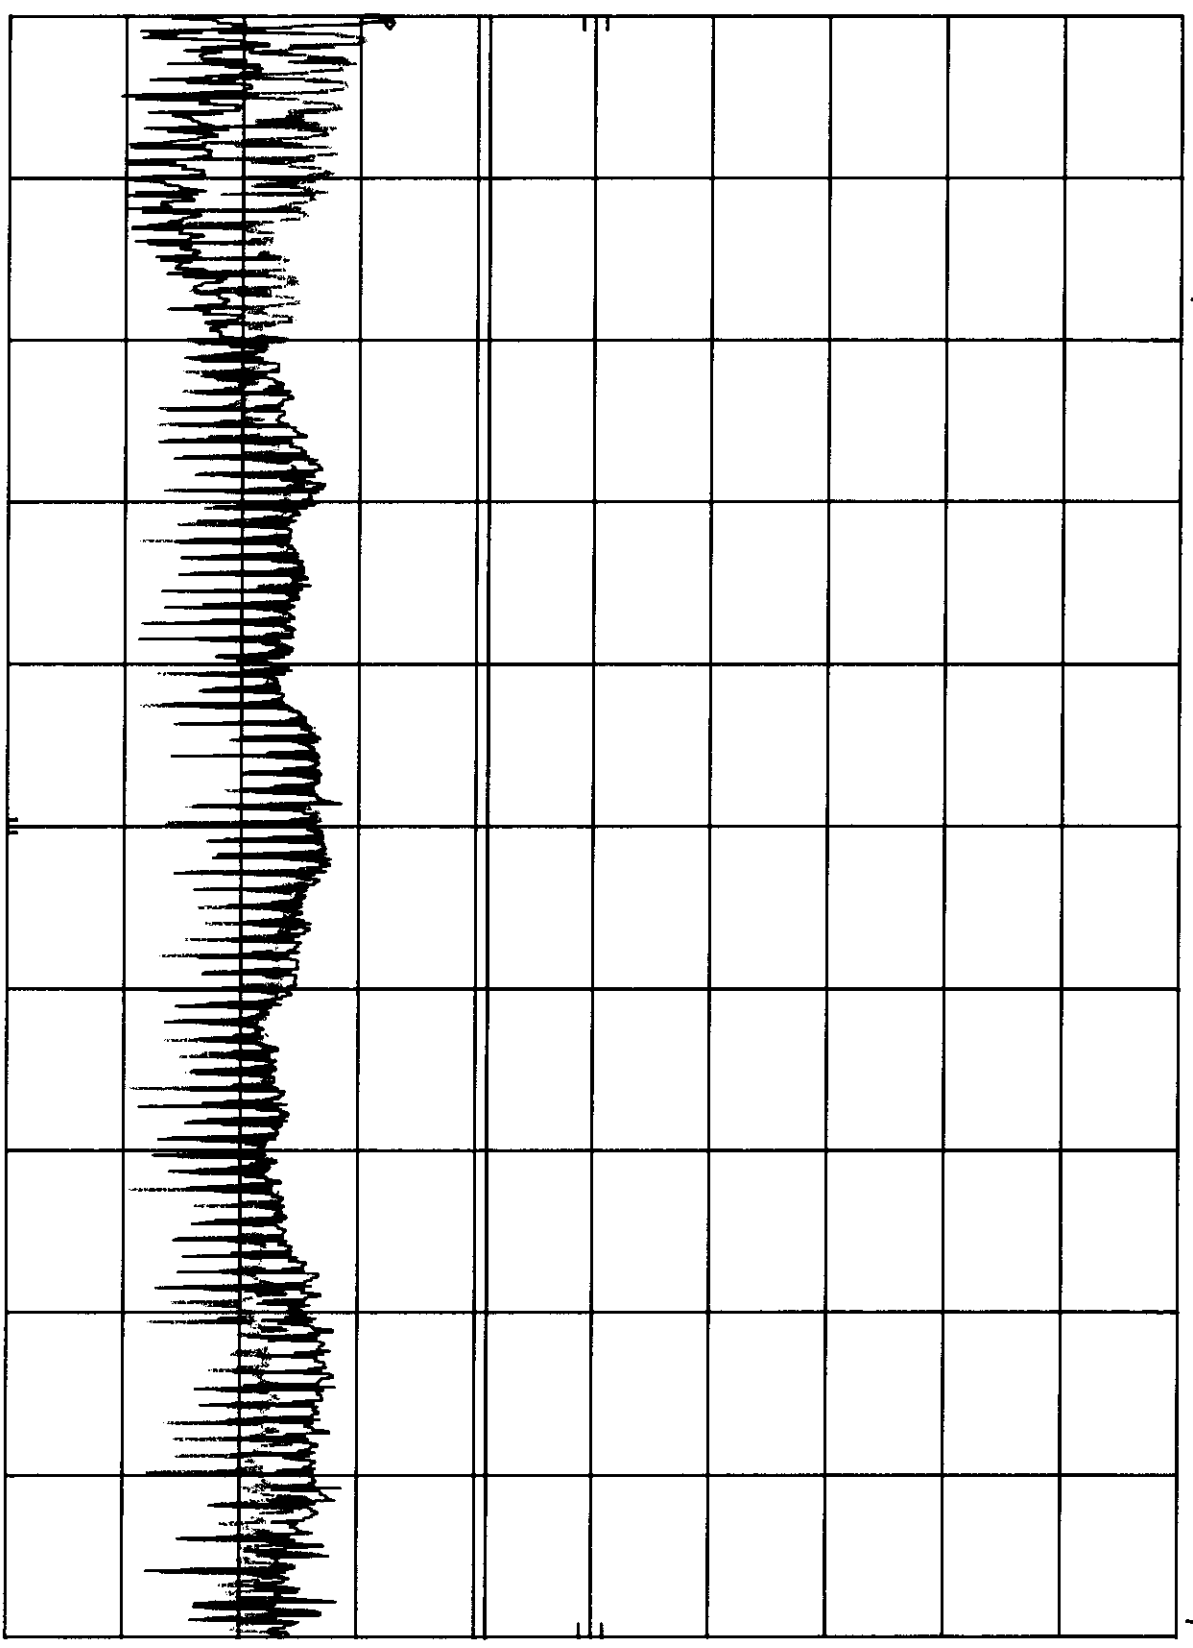

START 450 KHz RES BW 10 KHz VBW 10 KHz STOP 30.00 MHz
SWP 750 msec

FCC TEST REPORT

FCC ID : A3KM082
REPORT NO.: EMI98-043A
TEST DATE : JUN/01/1998
TEST ENGI.: C.C.Wu

TEST PERFORMED BY
PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
CONSUMER ELECTRONICS DIVISION (PEI-CED)
EMI-LAB
P.O.BOX 123
CHUNG LI, TAOYUAN, TAIWAN, R.O.C.
TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PEI-CED
TESTED SYSTEM:

1. EUT : IS1AX LCD COLOR MONITOR S/N.: --
FCC ID. : A3KM082
2. COMPUTER: IBM Aptiva 2176-T33 S/N.: 90-A58TZ
FCC ID. : AN02161V
3. PRINTER : HP 2225C S/N.: 3145S02419
FCC ID. : DS16XU2225
4. MODEM : HAYES 07-00038 S/N.: A29900153966
FCC ID. : BFJ9D907-00038
5. MOUSE : IBM M-534 S/N.: 23-146196
FCC ID. : 02L211029
6. KEYBOARD: IBM KB-9826 S/N.: K071940
FCC ID. : E8HKB-5323
7. VIDEO CARD : WINNER 3000L S/N.: 023004001190
FCC ID. : KJ6W3000L
8. CD_ROMD : SONY CDU31A S/N.: --
FCC ID. : K6ACDU31A2

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE
ANSI C63.4-1992 "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF
RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC
EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz"

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
48.3Kz MODE(1024X768/60Hz) WAS TESTED.
FLY-IN I/O CABLE WITH FOUR FERRITE CORES(TWO INSIDE) WAS USED
UNSHIELDED MAINS CORD WAS USED DURING TEST.
EXTRA EARPHONE AND MICROPHONE WERE USED DURING TEST.
EXTRA 4 USB CABLES WERE CONNECTED TO DUMMY LOAD WAS USED.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
--------------------	------------------------	----------------------	-------------------------------

FCC ID : A3KM082
 -- #043A CONT. --

156.72	31.45	30.25	43.5
170	29.6	30.9	43.5
197.35	33.87	AMBIENT	43.5
231.34	36.25	35.65	46
237.96	37.7	36.9	46
265.29	36.7	37.7	46
271.96	39.08	36.98	46
292.67	38.66	36.66	46
303.85	31.616	36.816	46
310.15	33.24	36.74	46
319.24	32.076	36.376	46
325.91	33.524	29.324	46
335.35	34.84	38.74	46
339.87	35.66	39.96	46
346.56	35.028	37.728	46
353.26	37.1	30.5	46
360.72	37.9	36.7	46
367.29	32.9	35	46
373.85	36.2	38.3	46
408	37.396	28.696	46
421.26	34.252	36.852	46
428.71	36.196	38.796	46
441.99	34.108	38.508	46
455.14	34.42	39.02	46
462.56	30.412	36.212	46
476.01	35.652	37.032	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
 SPECTRUM ANALYZER SETTINGS:
 RBW : 100KHz
 VBW : 100KHz

QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER
 20 - 1000MHz ESVS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
71.33	26.18	37.28	40
115.28	33.1	30.6	43.5
116.5	32.52	36.32	43.5
122.72	33.89	35.29	43.5
135.95	29.56	31.96	43.5
149.27	33.69	33.49	43.5
183.26	32.07	27.67	43.5
210.63	33.28	31.28	43.5
218.07	32.44	32.04	46
223.85	34.08	AMBIENT	46
224.71	AMBIENT	38.4	46
251.27	38.05	33.35	46
258.72	41.25	35.75	46
340	32.86	37.86	46
387.27	33.532	38.532	46
394.72	36.62	39.12	46
580.95	34.272	38.672	46

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS ARE RECORDED.

TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :


FINAL VALUE (dBuv/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuv/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT BY NVLAP OR ANY AGENCY OF THE U.S. GOVERNMENT


THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY:



K.J.HSU, NVLAP SIGNATORY

TESTED BY:




C.C.Wu

RFI EMISSION LEVEL dBuV/m

JUN/01/1998

REPORT NO: EM198-043A
MODEL NO: 151RX

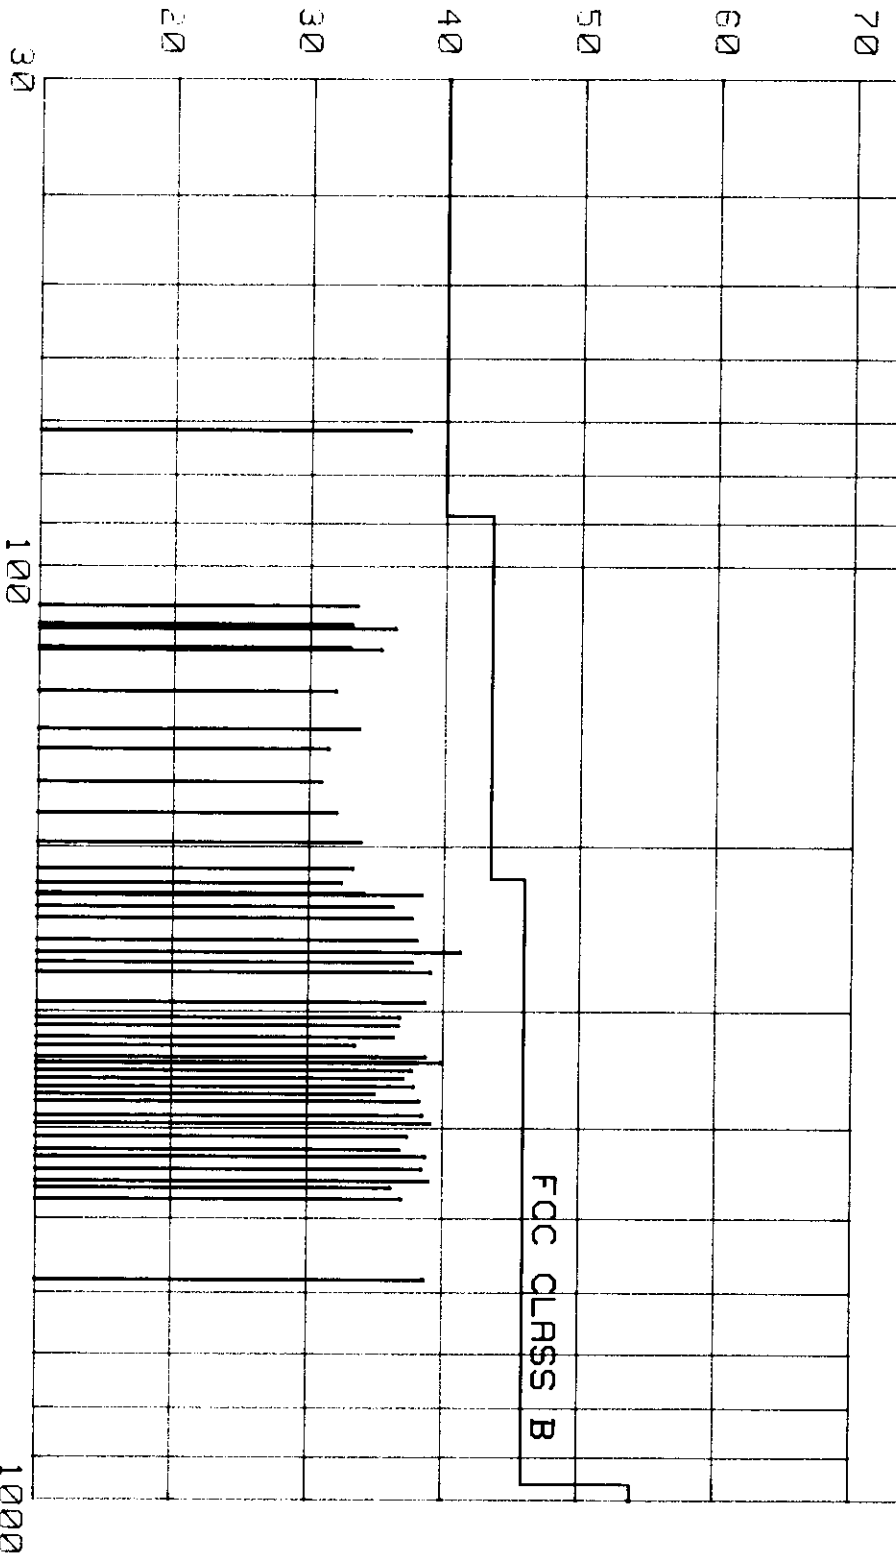


FREQUENCY MHZ

A3KM082 RUN 1024X768/60Hz 48.3KHz MODE AC220V MKR 510 KHz
REF 107.0 dBμV ATTEN 10 dB 39.20 dBμV

10 dB/

DL
48.0
dBμV

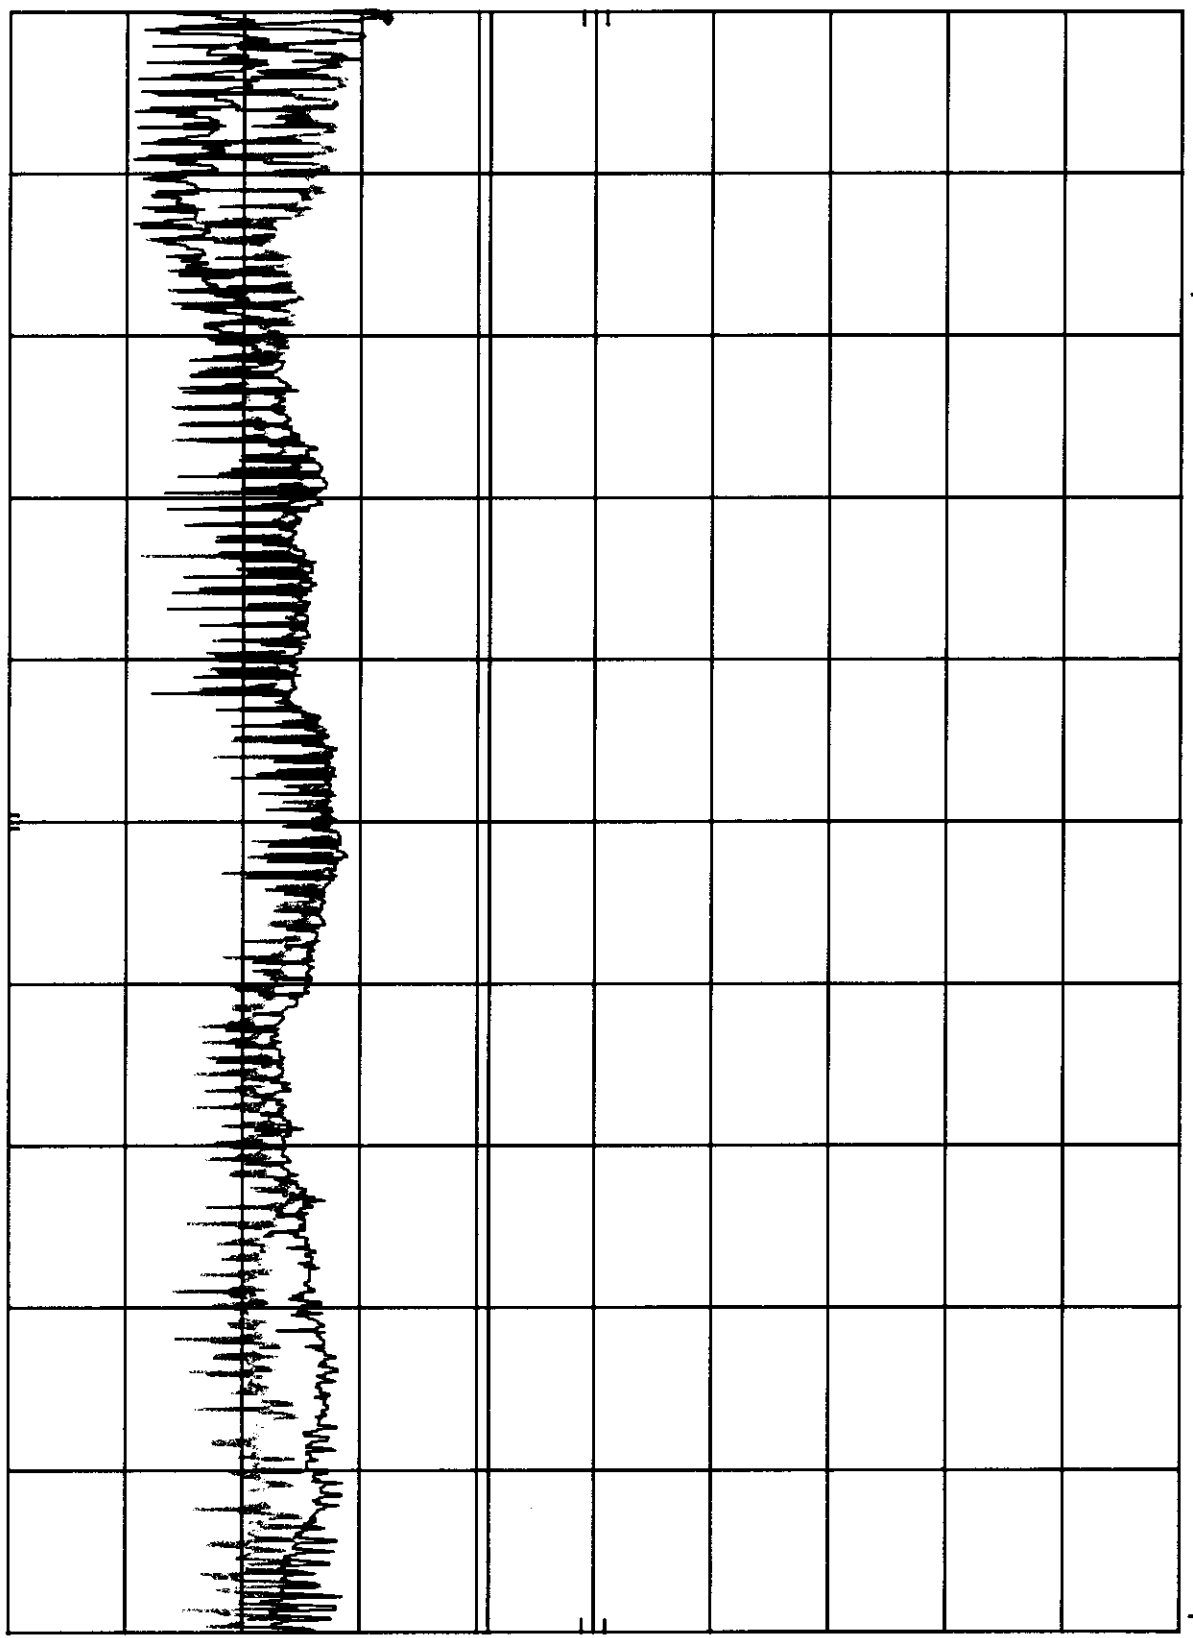


START 450 KHz RES BW 10 KHz VBW 10 KHz STOP 30.00 MHz
SWP 750 msec

A3KM082 RUN 1024X768/60HZ 48.3KHZ MODE AC110V MKR 24.15 MHZ
REF 107.0 dBμV ATTEN 10 dB 36.00 dBμV

10 dB/

DL
48.0
dBμV

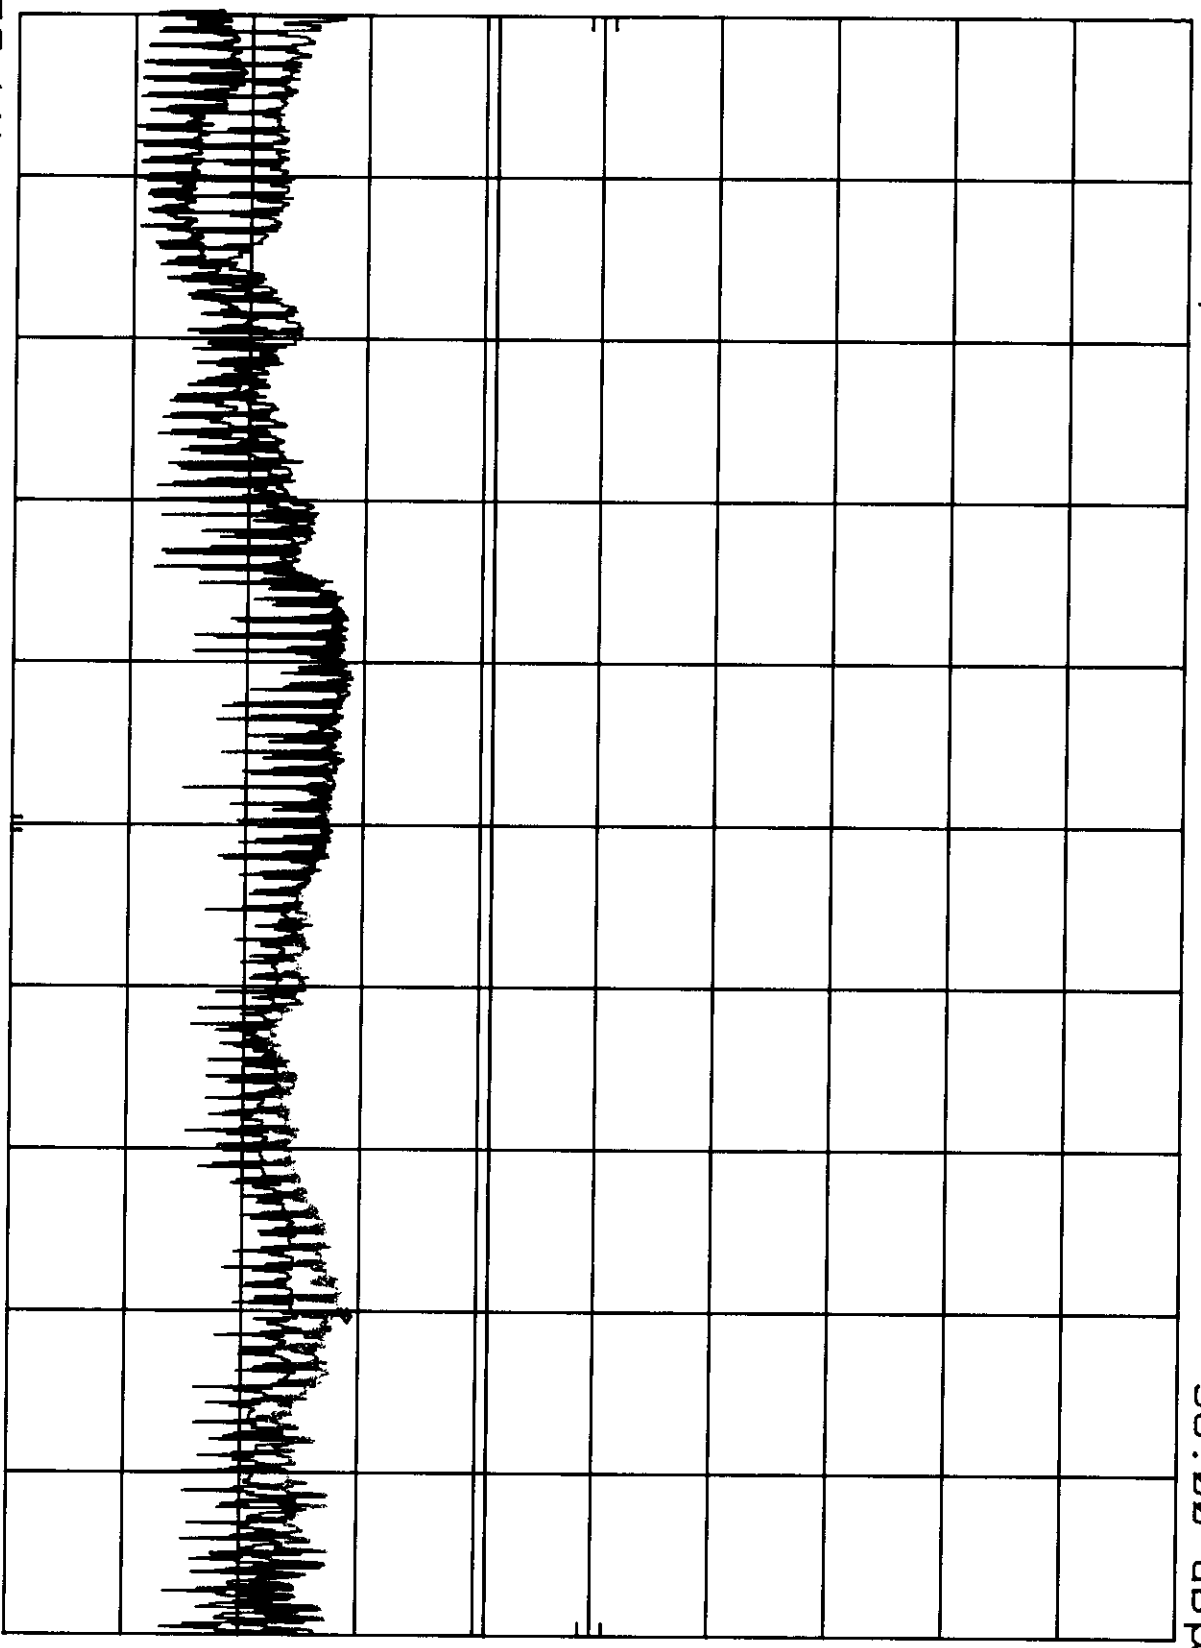

START 450 KHZ RES BW 10 KHZ VBW 10 KHZ STOP 30.00 MHZ
SWP 750 msec