



PHILIPS

Philips Electronics Industries (Taiwan) Ltd - EMC Lab. 5, Tze Chiang 1 Road, Chungli Industrial Park, Chungli, Taoyuan, Taiwan Tel.: +886-3-454-9862 Fax.: +886-3-454-9887 E-mail: ronnie.yang@philips.com	FCC Test Report	Report No.: TYR87-2004 Date : 05 March, 2002 Page : 1 of 28		
Customer : Philips Electronics Industries Name : Mr. S.T. Huang – EE LCD Address : 5, Tze Chiang 1 Road, Zip/City : Chungli Industrial Park, Country : Chungli, Taiwan, R.O.C.				
Equipment Under Test (including peripherals) : FCC ID. : A3KM092 Model Name : 109P40 Serial Number : TY0105692 Description : 19" XGA monitor, Max. resolution 1920x1440/60Hz				
EMC Standards : FCC Part 15 of October 01,1999 Class B ANSI C63.4-1992 Result : PASSED the limits/test-levels in the standards. Note : The results in this report apply only to the sample(s) and mode(s) tested. It is the manufacturer's responsibility to assume the continued EMC compliance of production models.				
Date of receipt of EUT : 14 Jan. 2002 Date of performance of test : 17 Jan., 2002 to 19 Jan., 2002				
<table border="0" style="width: 100%;"><tr><td style="text-align: center;"> C.C. Wu - EMC Test Engineer</td><td style="text-align: center;"> Ronnie Yang - EMC Manager NVLAP Signatory</td></tr></table>			 C.C. Wu - EMC Test Engineer	 Ronnie Yang - EMC Manager NVLAP Signatory
 C.C. Wu - EMC Test Engineer	 Ronnie Yang - EMC Manager NVLAP Signatory			

Philips Electronics Industries (Taiwan) Ltd

This report shall not be reproduce except in full, without written approval of the testing laboratory

Table of contents

1. Summary of test results.....	3
2. General information of EUT.....	4
3. Test equipment.....	5
4. Test configuration of EUT and peripherals.....	6
5. Test procedure.....	7
6. Measurement uncertainty.....	9
7. Conducted emissions test.....	10
8. Radiated emissions test.....	17
9. Photographs of test set-up.....	24
10. References.....	28

1. Summary of test results

Test	Standard	Result	Note
Emission, ANSI C63.4-1992			
Conducted emission	FCC Part 15	Passed	
Radiated emission	FCC Part 15	Passed	

Remark:

The test sample fully complies with the requirements set forth in : FCC Part 15 Class B.

2. General Information of EUT

The EUT, 19" color monitor :

Model No. : 109P40
FCC ID : A3KM092
Brand : Philips

The color monitor automatically scans horizontal frequencies between 30KHz and 111KHz , and vertical frequencies between 50Hz and 160Hz. This color monitor displays sharp and brilliant images of text and graphics with a maximum resolution up to 1920x1440 pixels.

The monitor has 6 factory-preset modes as indicated in the following table:

Mode	Resolution	H. freq. / V. freq	Standard
1.	1024 x 768	60.023Khz/75.029Hz	(VESA/75)
2.	1024 x 768	68.677Khz/84.997Hz	(VESA/85)
3.	1280 x 1024	79.976Khz/75.024Hz	(VESA/75)
4.	1280 x 1024	91.146Khz/85.024Hz	(VESA/85)
5.	1600 x 1200	93.75Khz/75.000Hz	(VESA/75)
6.	1600 x 1200	106.25Khz/85.000Hz	(VESA/85)

3. Test Equipment

Test equipment used for line Conducted and Radiated emissions as following.
All equipment were calibrated according to ANSI C63.4-1992 and ISO-9000 requirement unless otherwise specified.

Traceability to R.O.C. and international standards is assured by using calibrated all equipment.

- For Conducted Emissions Test:

Test Equipment	Model No.	Serial No.	Last Calibrate	Next Calibrate
Spectrum	HP8568B	2415A00346	05/16/2001	05/16/2002
EMI Receiver	R & S ESCS30	830245/026	06/09/2001	06/08/2002
LISN	EMCO 3825/2	9311-2153	12/04/2001	06/04/2002
LISN	EMCO 3825/2	9311-2154	12/04/2001	06/04/2002
RF Cable	8-meter	N/A	05/28-2001	05/28/2002

- For Radiated Emissions Test:

Test Equipment	Model No.	Serial No.	Last Calibrate	Next Calibrate
Spectrum	HP8568B	2415A00346	08/15/2001	08/15/2002
RF Preselector	HP85685A	2901A00946	08/15/2001	08/15/2002
QP Adapter	HP85650A	2043A00366	08/15/2001	08/15/2002
EMI Receiver	HP85460A	3441A00199	09/11/2001	09/11/2002
RFI Filter Section	HP85460A	3330A00177	09/11/2001	09/11/2002
EMI Receiver	R & S ESVS30	841977/006	05/28/2001	05/28/2002
Biconical Antenna	EMCO 3110B	3222	04/27/2001	04/27/2002
Biconical Antenna	EMCO 3110B	3224	04/27/2001	04/27/2002
Log-Periodic Antenna	EMCO 3146A	1424	04/27/2001	04/27/2002
Log-Periodic Antenna	EMCO 3146A	1425	04/27/2001	04/27/2002
Turn Table	EMCO 1060	1068	05/26/2001	05/26/2002
Antenna Tower	EMCO 1050	1113	05/26/2001	05/26/2002
RF Cable	M17/75-RG214-NE	N/A	05/26/2001	05/26/2002

4. Test Configuration of EUT and Peripherals


The system was configured for testing in a typical fashion (as a customer would normally use it) according to ANSI C63.4-1992, please see the photographs for detail. For system measurement, the EUT “109P40” were connected to:

	Description	Brand/ Model No.	Serial No.	FCC ID	Remark
A	monitor	Philips 109P40	TY0105692	A3KM092	EUT
B	PC	Dell MMS	F1807	FCC logo	
C	Keyboard	KB-7959	10422	FCC Logo	
D	Mouse	Logitech M-S34	457249	DZL211029	
E	Modem	USRobotics 268	2680559278575	CJE-0318	
F	Printer	HP 2225C	3145S02419	DSI6XU2225	

Connected Cables

No.	Description	Manufacturer	Length	Shielded	Remark
1	Power Cord	Long Shine	1.8 meters	No	for EUT
2	Power Cord	Acer	1.8 meters	No	for PC
3	Power Cord	Aceex	2.0 meters	No	for Modem
4	Power Cord	HP	1.8 meters	No	for Printer
5	Video Cable	Long Shine	1.5 meters	Yes	
6	Printer Cable	HP	1.8 meters	Yes	
7	Modem Cable	Aceex	1.5 meters	Yes	

System Block Diagram of Test Configuration

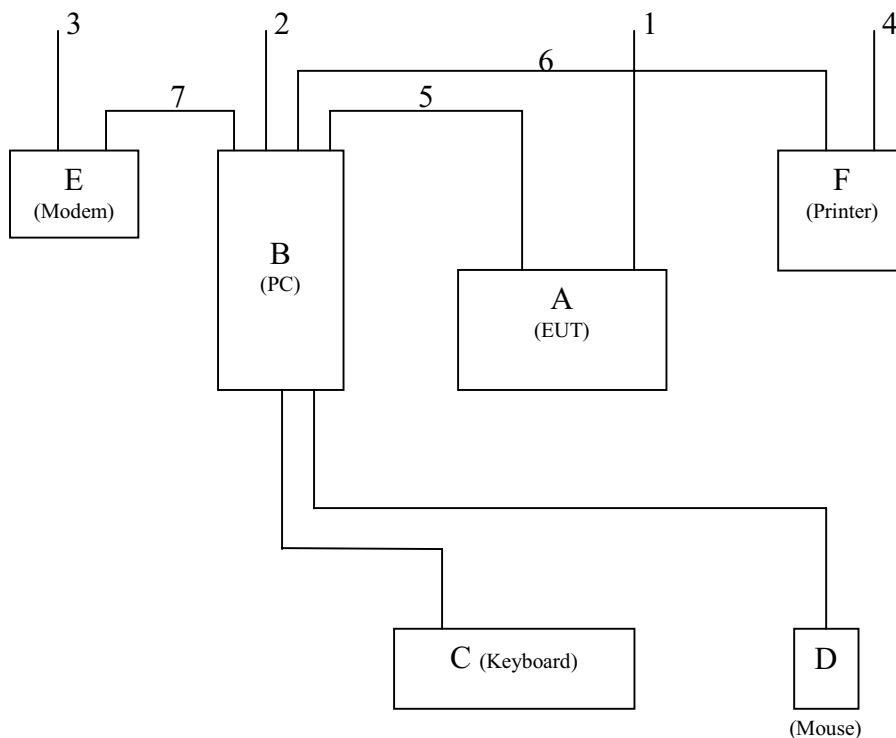

5. Test Procedure

Test was performed by:

PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
CONSUMER ELECTRONICS DIVISION
- EMC LAB

5, Tze Chiang 1 Road, Chungli Industrial Park
P.O. Box 123, Chungli, Taoyuan, Taiwan
Tel : 886-3-4549862 Fax : 886-3-4549887
Internet: ronnie.yang@philips.com

The test was performed in accordance with ANSI C63.4-1992, "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz"

Both conducted and radiated testing were performed according to the procedure in ANSI C63.4-1992. Conducted testing was performed in screen room and radiated testing was performed in open site at an antenna to EUT distance of 3-meter on horizontal and vertical polarization.

First, pre-scan all modes in screen room then select **3 higher modes** (worst case) were tested and reported.

The line conductive interference was tested with 110VAC and 220VAC receptively. Unshielded power cord was used during test.

D-sub I/F cable with two ferrite cores was used.
BNC I/F cable with one ferrite cores was used.

Tested and reported modes as following:

File No.	Resolution	Frequencies	I/F Cable	Figure	
				Conducted	Radiated
EMI02-003	1600x1200	106.3KHz/85Hz	D-sub	Figure 1, 2	Figure 7
EMI02-003A	1600x1200	93.7KHz/75Hz	D-sub	Figure 3, 4	Figure 8
EMI02-003B	1600x1200	106.3KHz/85Hz	BNC	Figure 5, 6	Figure 9

Set up the EUT and all peripherals as chapter 6 of ANSI C63.4-1992 for AC power line conducted emissions testing and radiated emissions testing.

Turn on the power of EUT and all peripherals, select an appropriate displaying mode using the "setup" software. Then run an EMI test program "HTEST.EMI" as a basic software to execute the EUT operating under test. A pattern of scrolling H's should be displayed on the monitor.

Step 1 : Run the "HTEST.EMI" on personal computer then sends "H" character to monitor continuously until full screen.

Step 2 : Personal computer sends a complete line of continuously repeating “H” to HP 2225C printer.

Step 3 : Personal computer sends a file of “H” pattern to floppy disk then read a file of “H” pattern from floppy disk.

Step 4 : Personal computer sends a file of “H” pattern to hard disk then read a file of “H” pattern from hard disk.

Step 5 : Personal computer sends a file of “H” pattern to USRobotics 268 modem.

Step 6 : Return to step 1

All data in this report are “PEAK” value within 15dB margin unless otherwise noted.

6. Measurement Uncertainty

The system uncertainty listed below are based on the instrument absolute specifications, and do not include uncertainties of the equipment under test.

Uncertainty for Radiated Emissions Test at 3 meters Test Site.

Source of Measurement Uncertainty	Uncertainty/dB
Antenna factor calibration	+/-2.0
Cable loss calibration	+/-0.5
Receiver specification	+/-1.0
Antenna position ver.	+/-2.0
Measurement distance ver.	+/-0.5
Site imperfections	+/-2.0
Mismatch	+/-1.1
System repeatability	+/-0.5

Uncertainty for Conducted Emissions Test at 3 meters Test Site.

Source of Measurement Uncertainty	Uncertainty/dB
LISN specification	+/-2.0
Cable loss calibration	+/-0.5
Receiver specification	+/-1.0
Pulse limiter Spec.	+/-0.3
Measurement distance ver.	+/-0.5
Site imperfections	+/-2.0
System repeatability	+/-0.5

Conducted Emissions FCC Part 15		
Operating conditions EUT: EUT powered on with scrolling “H” pattern.		
Limits:		
Frequency range (MHz)	Class A (dBuv) QP	Class B (dBuv) QP
0.45 – 1.705	60.0	48.0
1.705 – 30.0	69.5	48.0
Test Result : Passed FCC Class B Limits		
Option: The following option may be employed if the conducted emissions exceed the limits, as appropriate, when measured using instrumentation employing a quasi-peak detector function: If the level of the emission measured using the quasi-peak instrumentation is 6dB, or, more higher than the level of the same emission measured with instrumentation having an average detector and a 9KHz minimum bandwidth, that emission is considered broadband and the level obtained with the quasi-peak detector may be reduced by 13dB for comparison to the limits.		
Remark:		
Date of Test	: 17 Jan, 2002 to 19 Jan, 2002	
Test Engineer	: C.C.Wu	
For detail measurement results see next pages.		

Figure 1

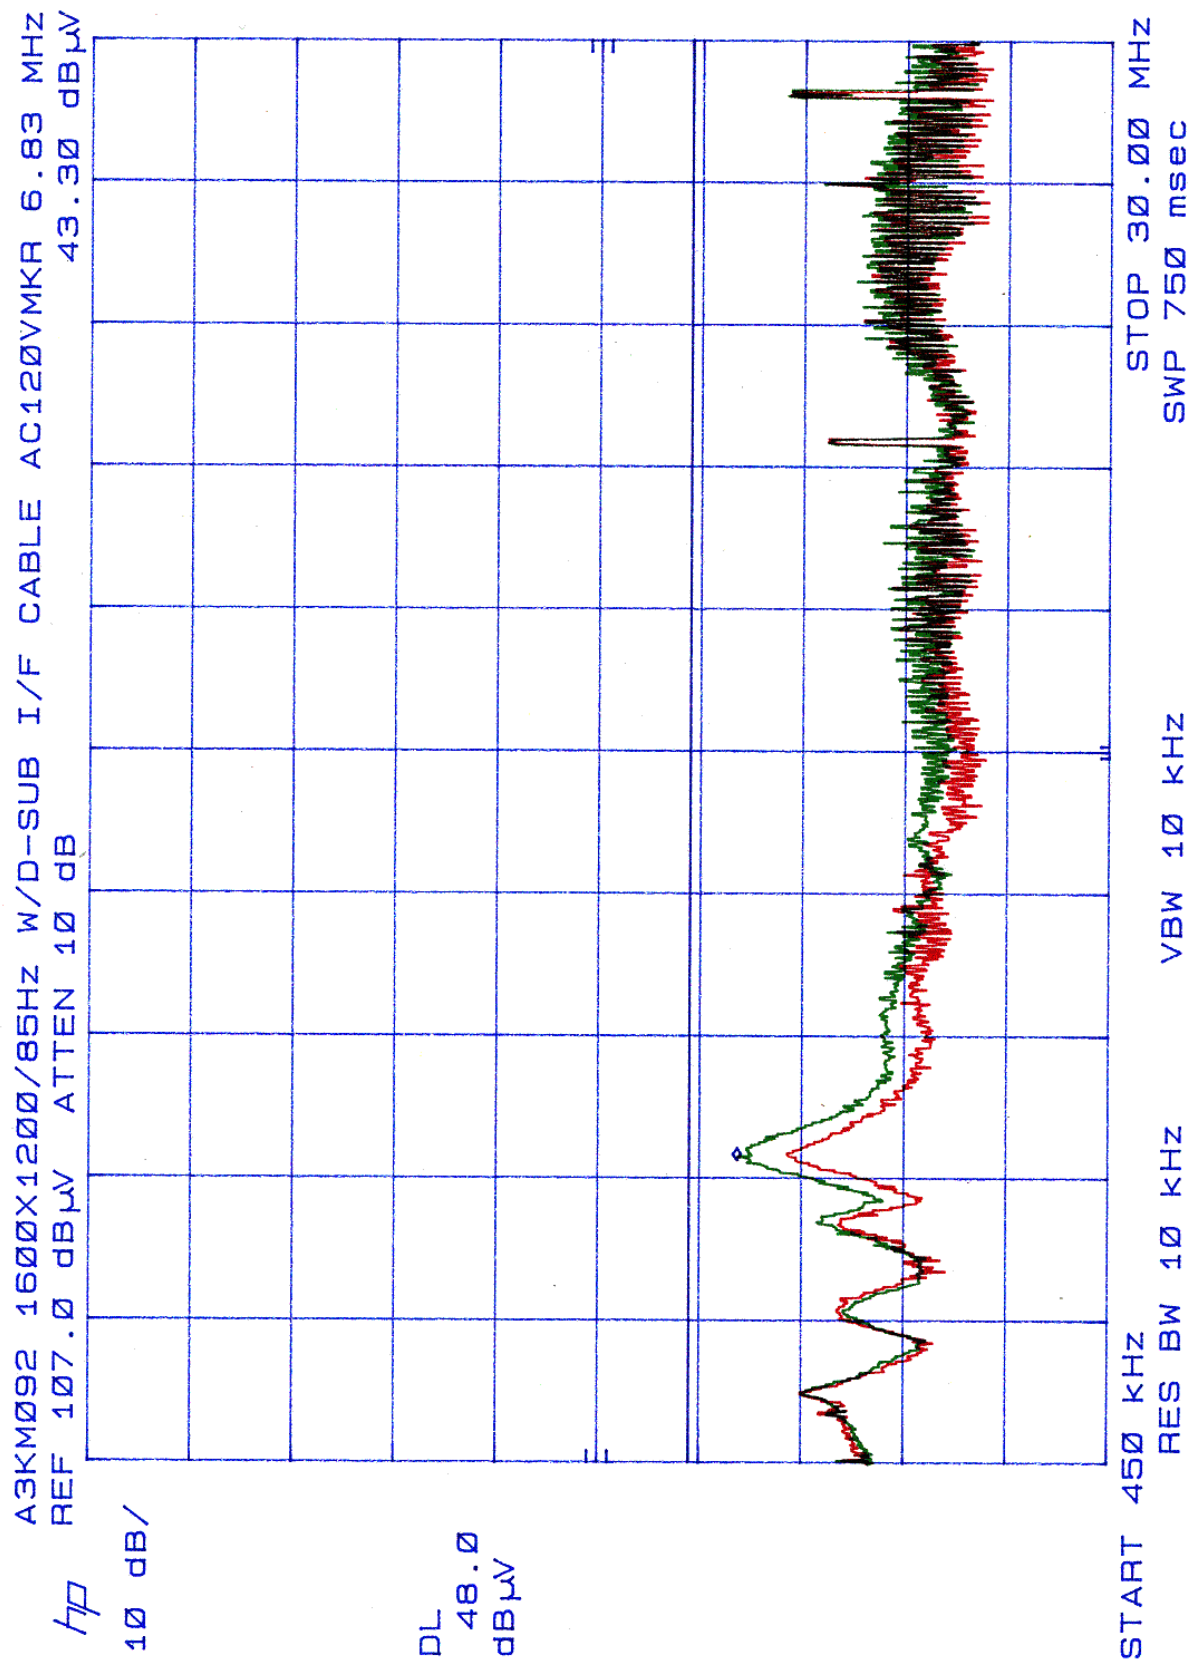


Figure 2

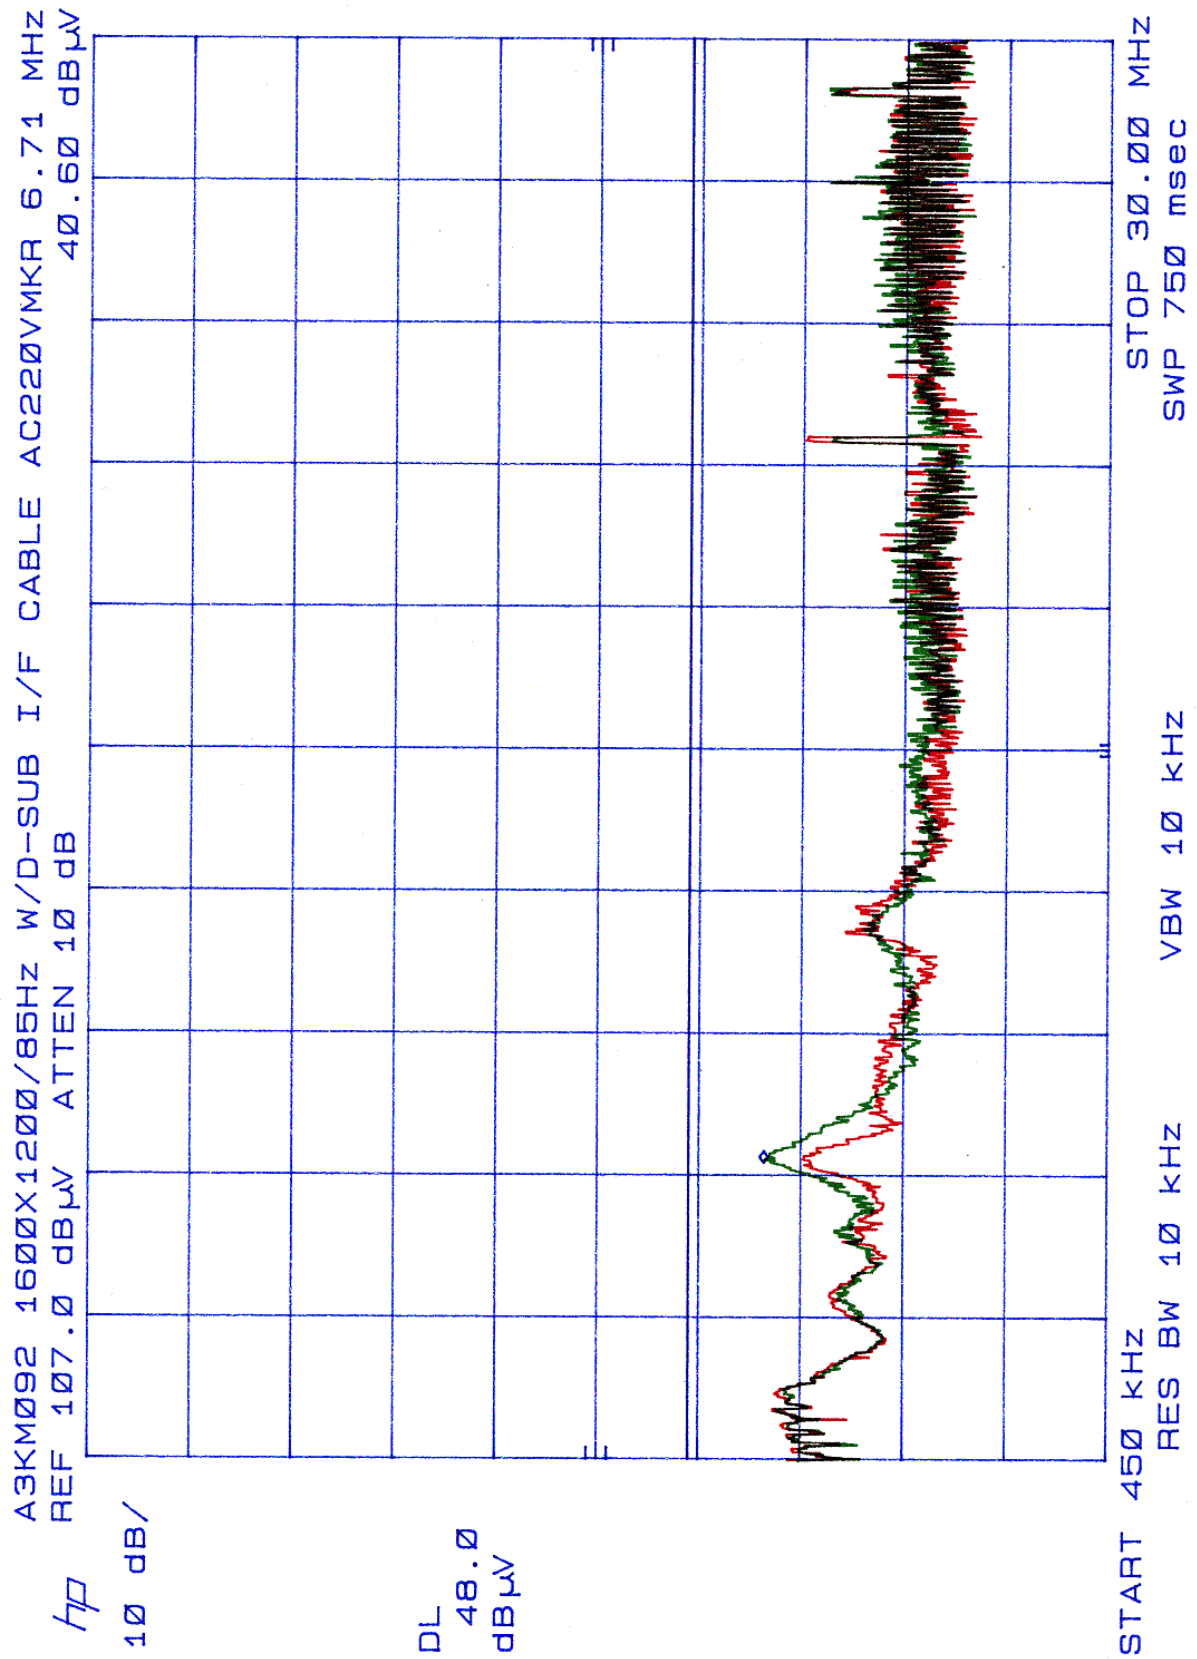


Figure 3

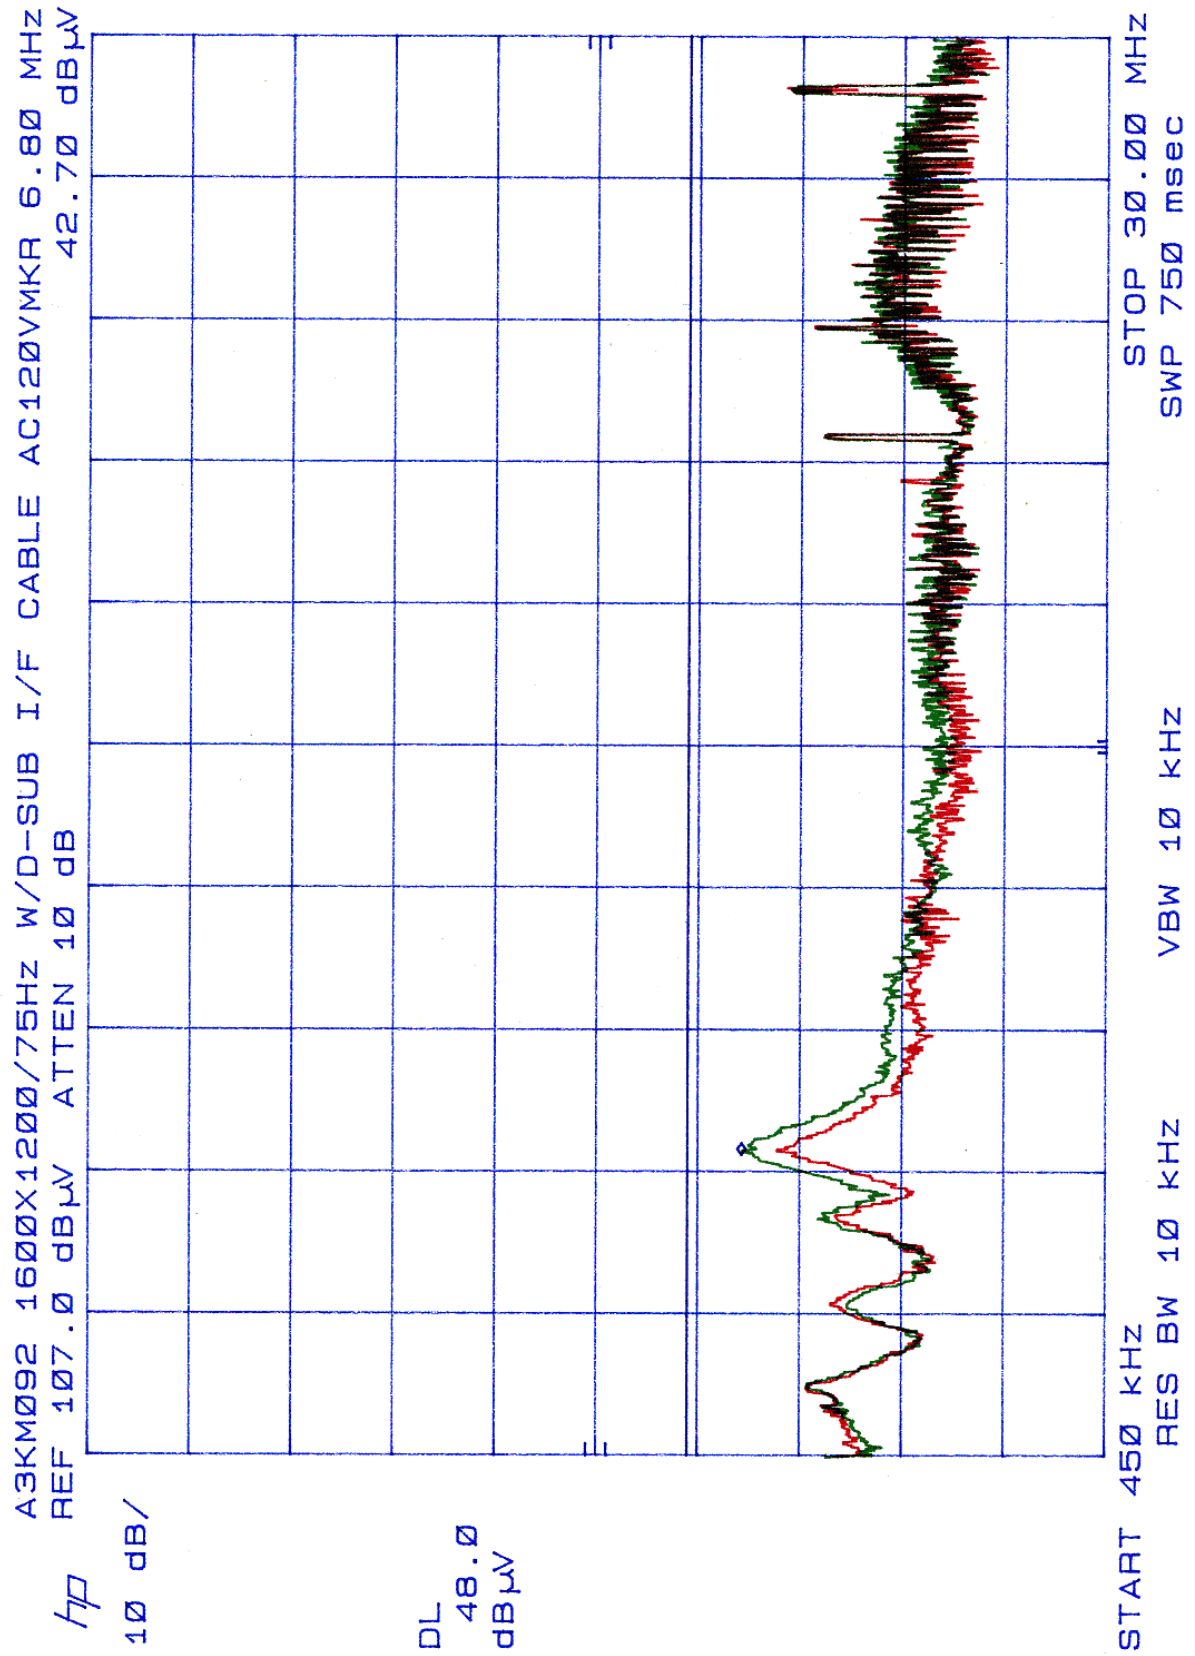


Figure 4

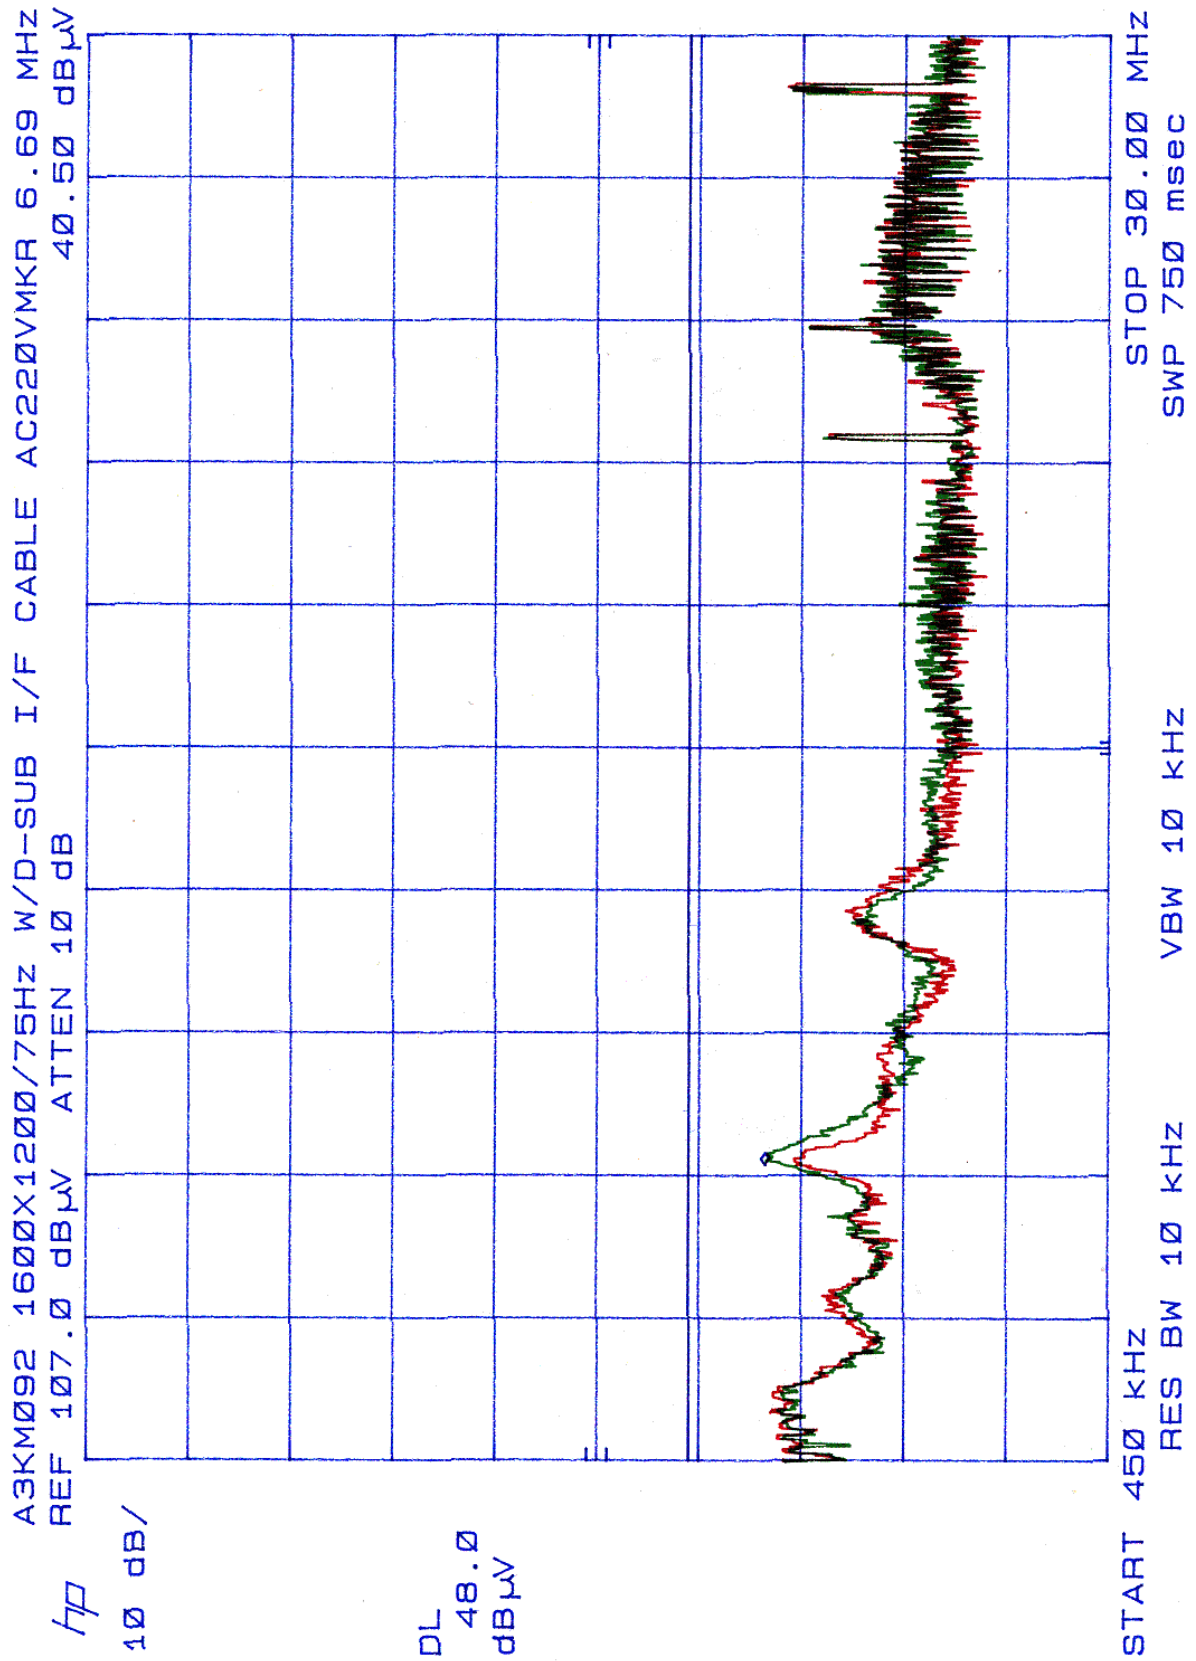


Figure 5


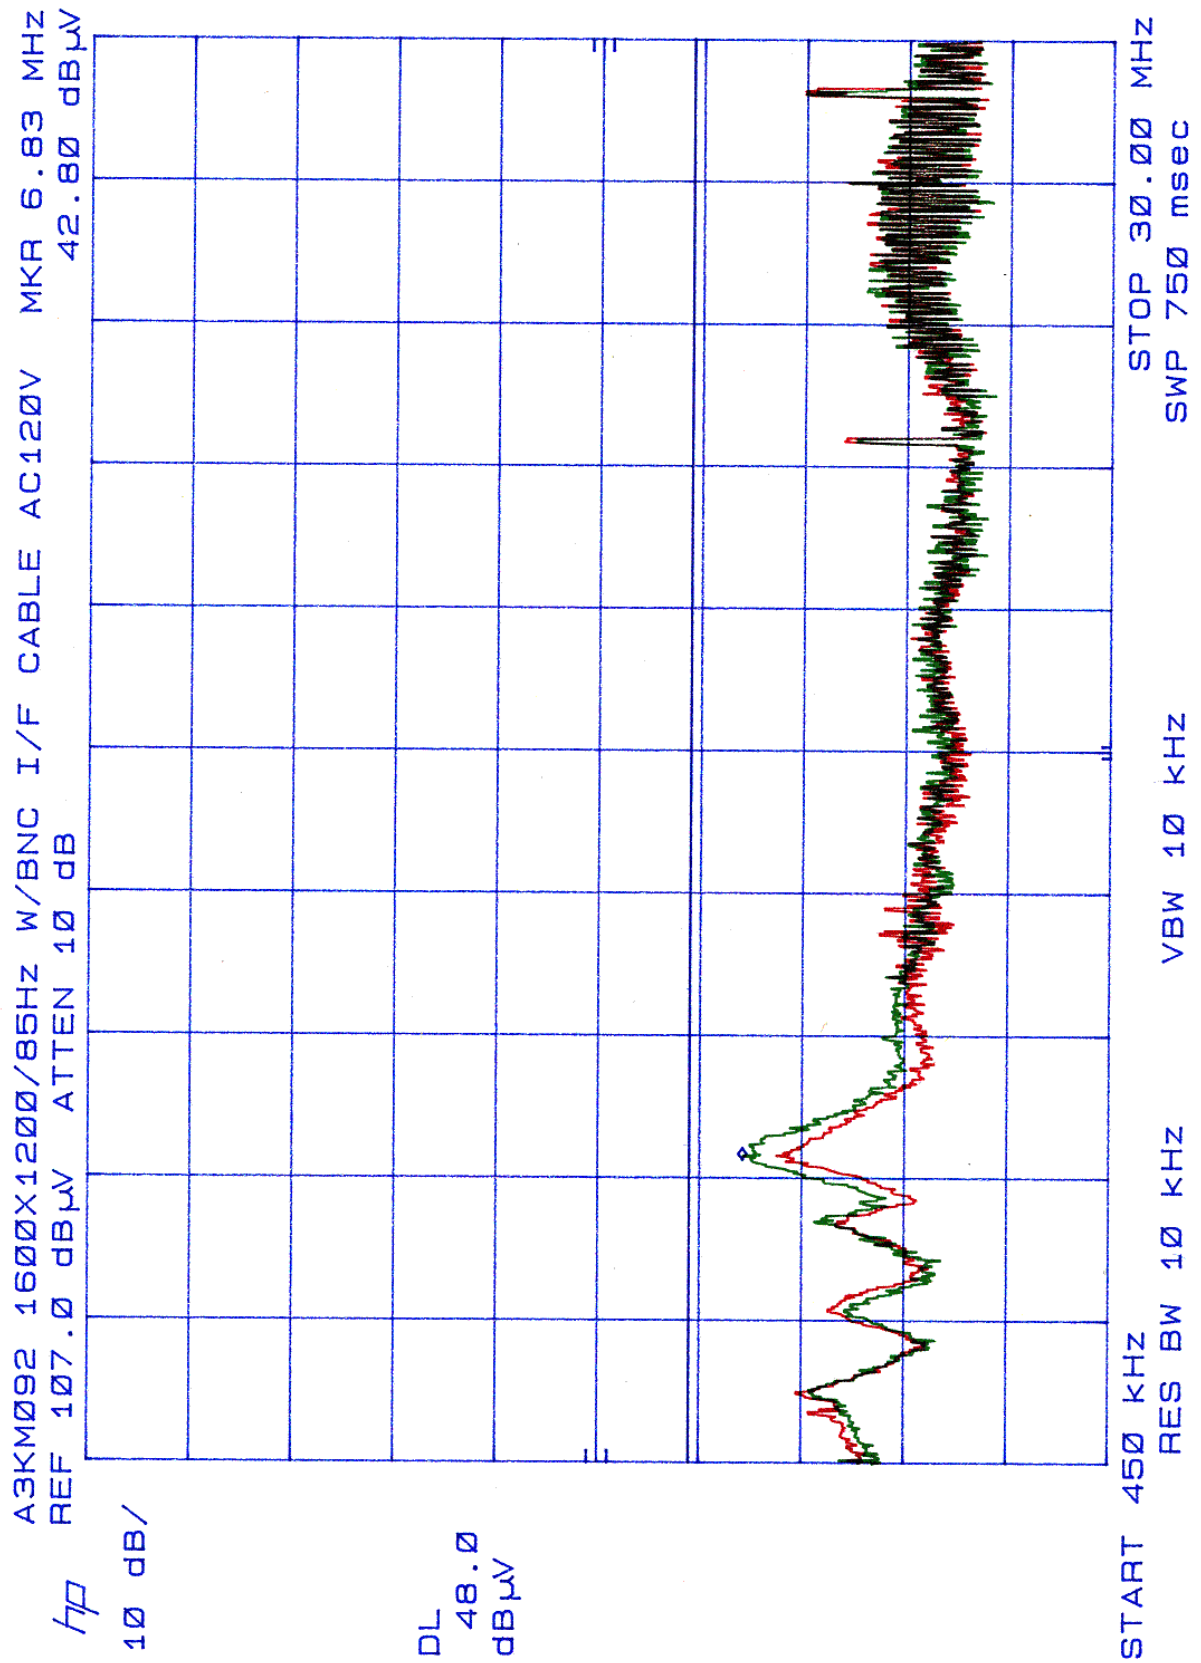


Figure 6

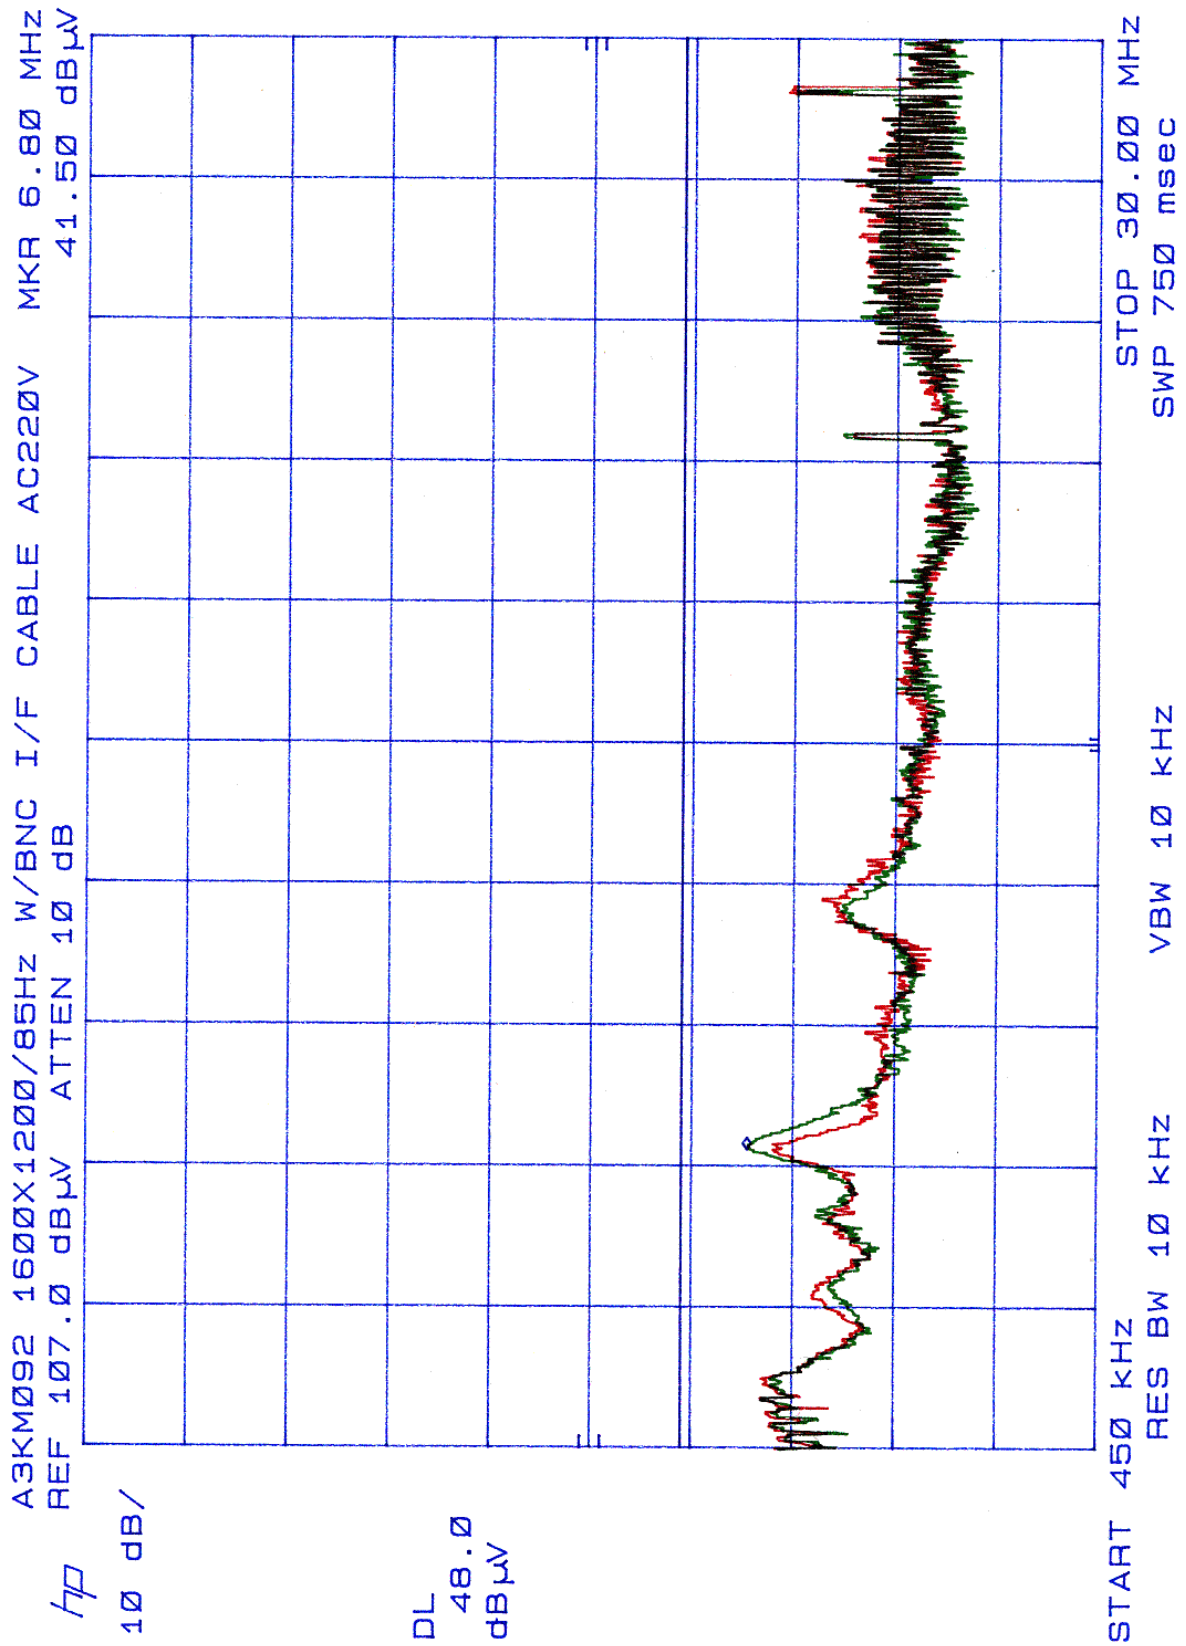

8. Radiated Emission Test

Radiated Emissions

FCC Part 15

Operating conditions EUT:

EUT powered on with scrolling “H” pattern.

Limits:

Frequency range (MHz)	Class A at 10m (dBuv) QP	Class B at 3m (dBuv) QP
30.0 – 88.0	39.0	40.0 Quasi-Peak
88.0 – 216.0	43.5	43.5 Quasi-Peak
216.0 – 960.0	46.5	46.0 Quasi-Peak
960.0 – 1000.0	49.5	54.0 Quasi-Peak
Above 1000.0	49.5	54.0 Average

Test Result :

Passed FCC Class B Limits

Remark:

Date of Test

: 17 Jan, 2002 to 19 Jan, 2002

Test Engineer

: C.C.Wu

For detail measurement results see next pages.

Radiated RF Level – Peak Value

Frequency (MHz)	Horizontal (dBuv/m)	Vertical (dBuv/m)	FCC/B Limit (dBuv/m)
65.48	26.55	27.35	40
130.92	26.81	26.41	43.5
163.69	31.32	29.32	43.5
278.24	36.82	35.52	46
294.59	36.2	36.6	46
310.95	32.744	31.544	46
327.34	31.148	30.448	46
343.69	31.556	31.356	46
392.79	32.948	34.348	46
414.07	31.468	32.568	46
474.59	32.5	33.3	46
523.7	33.892	35.192	46
572.81	35.352	34.652	46

Spectrum Analyzer Setting:

RBW: 100KHz

VBW: 100KHz

Quasi-peak Values were taken with Rohde & Schwarz ESVS 30 EMI test receiver.

Radiated RF Level – QP Value


Frequency (MHz)	Horizontal (dBuv/m)	Vertical (dBuv/m)	FCC/B Limit (dBuv/m)
638.25	40.02	38.32	46

The spectrum was scanned from 30MHz to 1000MHz and the significant emissions were recorded.
Test distance between device under test and receiving antenna was 3-meter.

Sample of calculation:

Final value (dBuv/m) = Antenna Factor (dB) + Cable Loss (dB) + Reading value (dBuv/m)

Figure 7

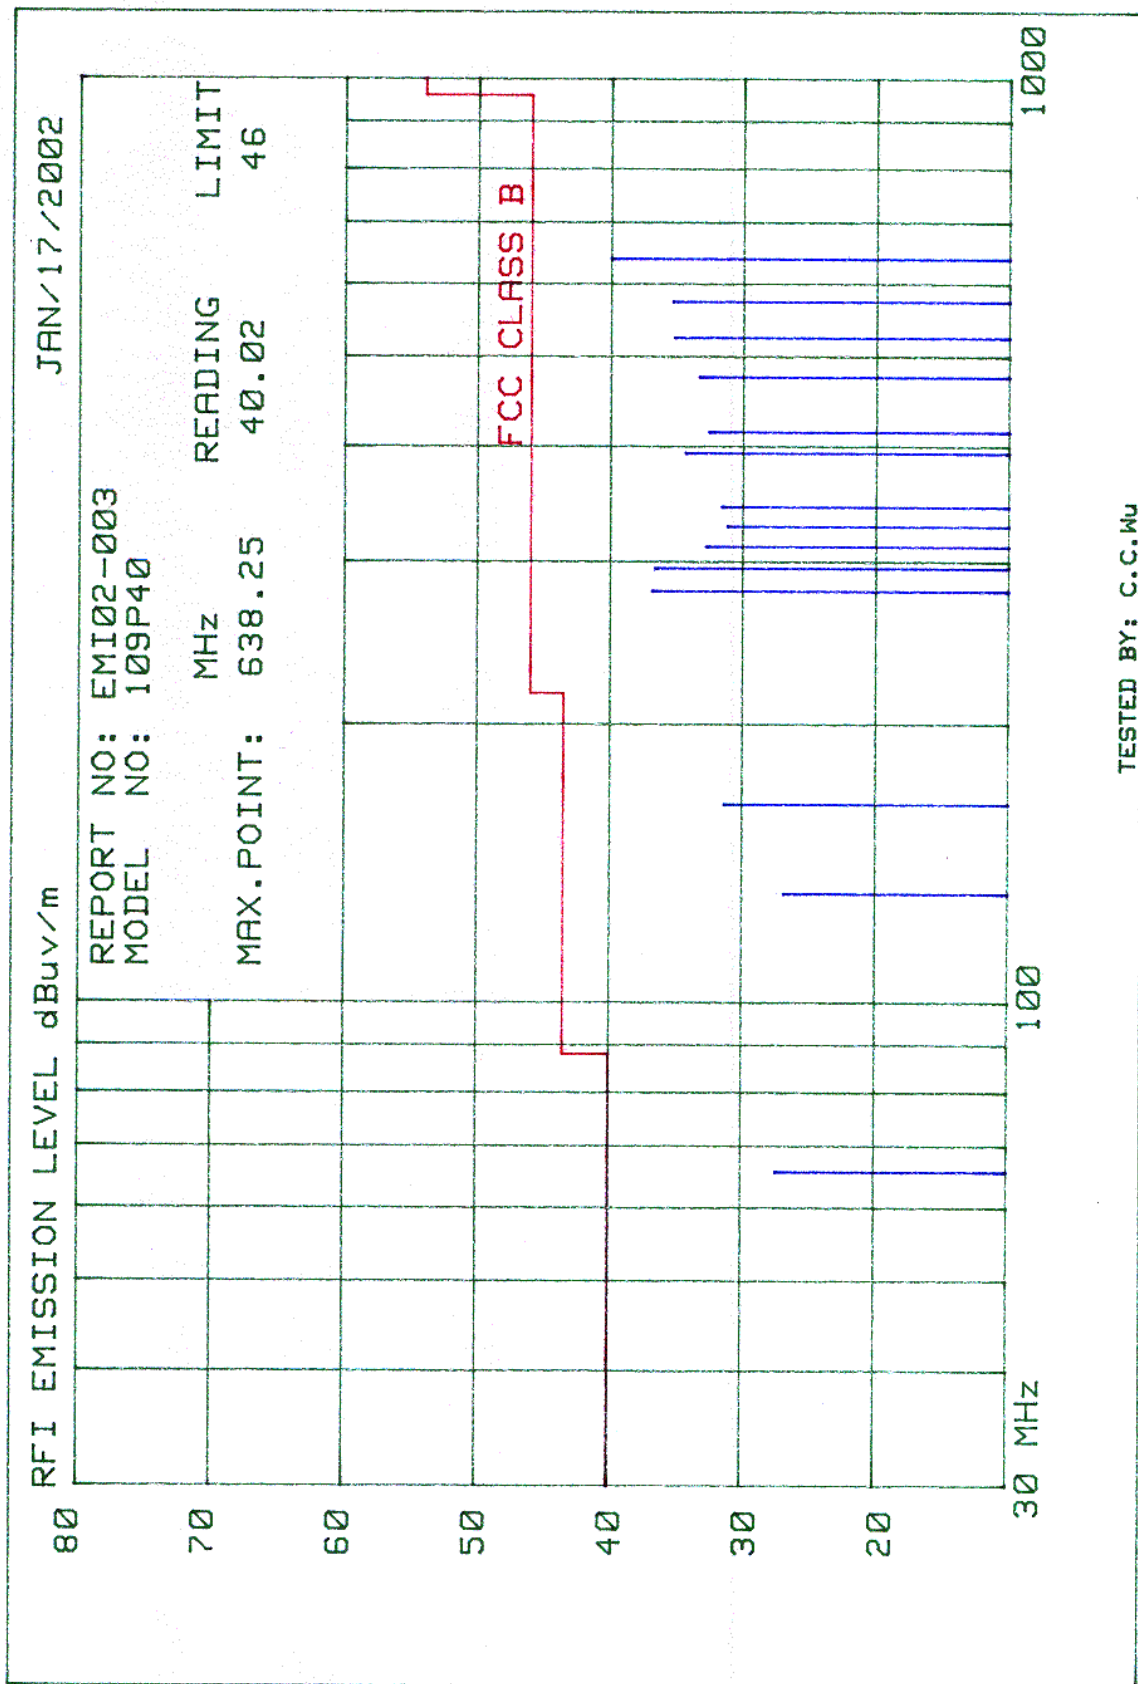

Radiated RF Level – Peak Value

Frequency (MHz)	Horizontal (dBuv/m)	Vertical (dBuv/m)	FCC/B Limit (dBuv/m)
43.49	28.32	29.92	40
57.96	25.78	27.28	40
115.91	25.66	25.76	43.5
130.45	26.6	27.3	43.5
132.03	26.92	27.62	43.5
159.39	28.25	27.35	43.5
173.86	28.12	27.62	43.5
246.36	33.04	33.24	46
260.83	35.24	34.34	46
271.19	38.84	36.04	46
318.79	31.076	31.276	46
333.29	31.092	30.592	46
347.8	34.952	33.052	46
362.27	31.8	31.6	46
391.27	30.476	30.876	46
449.23	33.876	32.376	46
463.7	32.836	32.236	46
492.71	33.176	34.376	46
507.18	33.656	34.456	46
521.66	33.476	35.176	46
536.16	33.344	33.544	46
565.12	34.66	34.86	46
579.62	33.46	34.86	46
623.1	35.736	36.036	46
637.57	AMBIENT	36.02	46
652.1	39.136	37.136	46
666.56	39.056	38.356	46
724.52	38.8	39.2	46

Spectrum Analyzer Setting:

RBW: 100KHz


VBW: 100KHz

The spectrum was scanned from 30MHz to 1000MHz and the significant emissions were recorded.
Test distance between device under test and receiving antenna was 3-meter.

Sample of calculation:

Final value (dBuv/m) = Antenna Factor (dB) + Cable Loss (dB) + Reading value (dBuv/m)

Figure 8

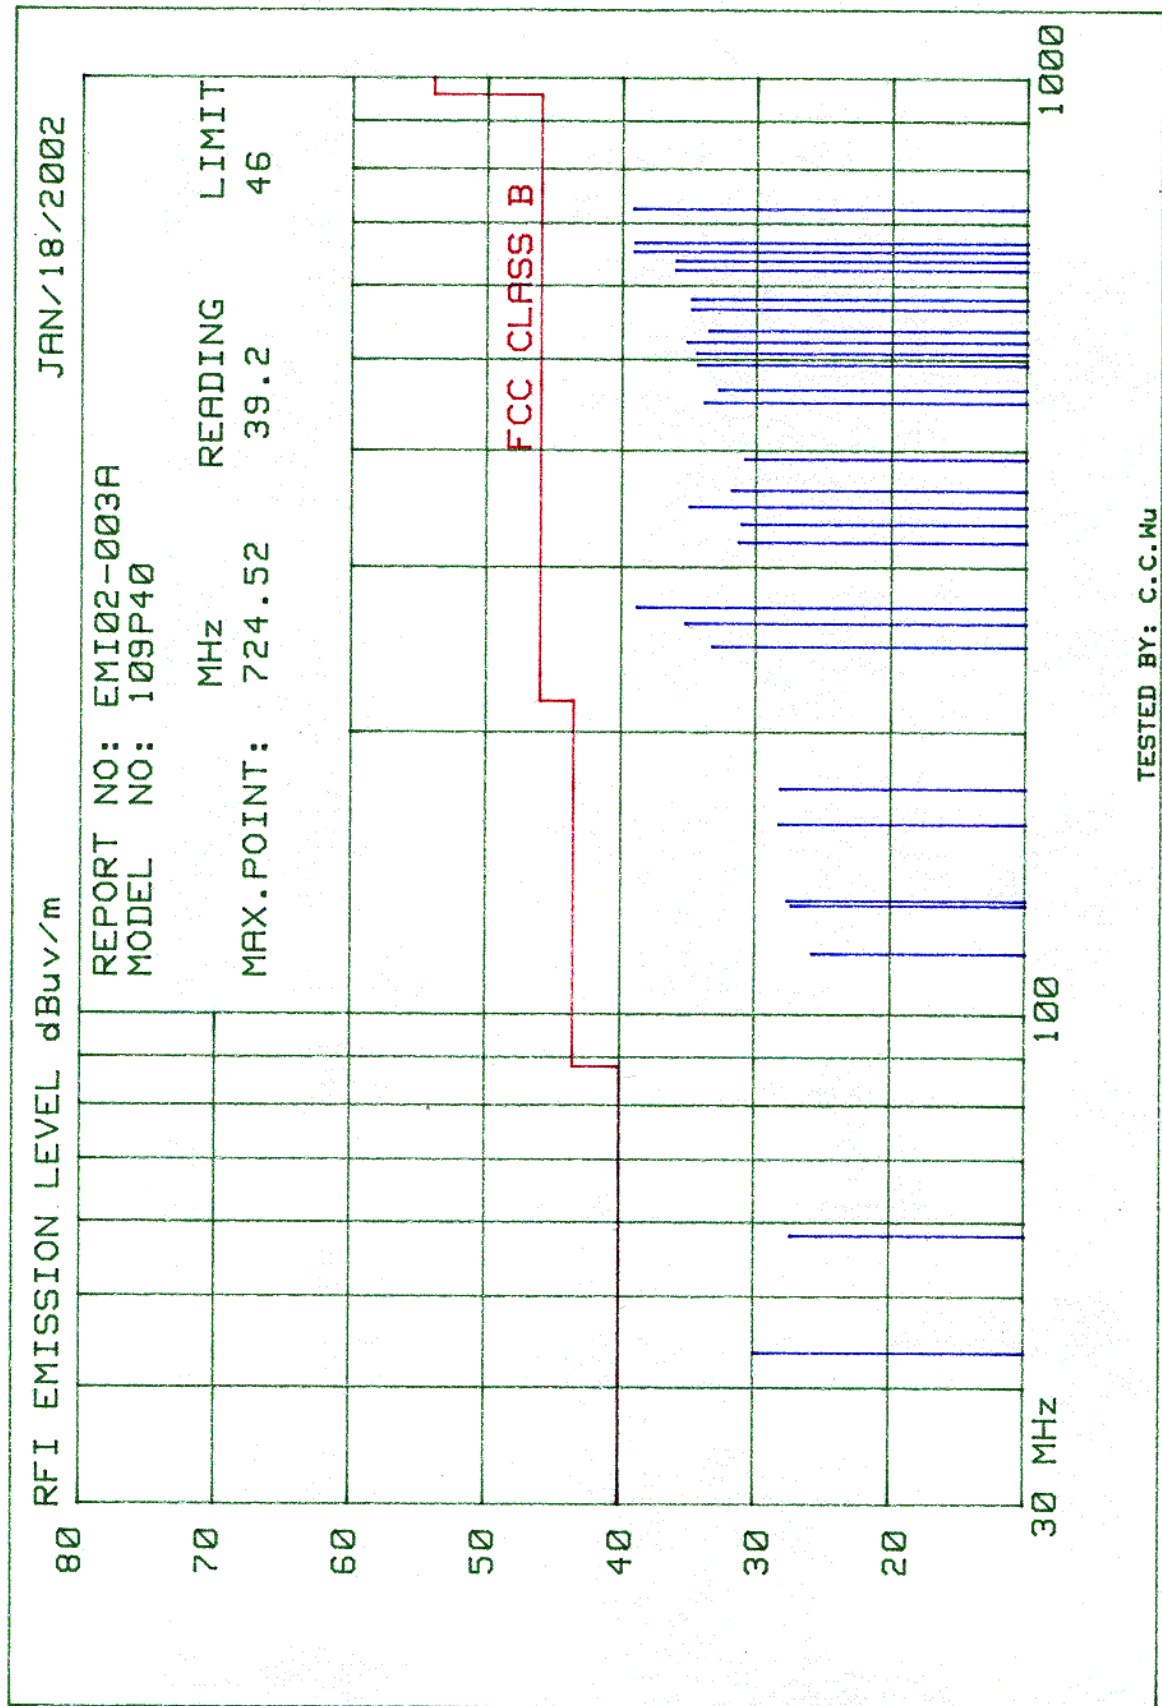

Radiated RF Level – Peak Value

Frequency (MHz)	Horizontal (dBuv/m)	Vertical (dBuv/m)	FCC/B Limit (dBuv/m)
49.12	27.36	29.46	40
65.48	25.55	27.15	40
130.92	26.61	27.31	43.5
163.69	31.02	28.52	43.5
278.24	37.32	35.82	46
294.59	37.6	37.1	46
310.95	31.444	30.644	46
327.34	30.048	23.848	46
343.69	30.856	31.456	46
392.79	34.048	33.348	46
414.07	31.768	32.268	46
474.59	33.6	34.4	46
523.7	33.892	35.192	46
572.81	35.152	35.952	46

Spectrum Analyzer Setting:

RBW: 100KHz

VBW: 100KHz

Quasi-peak Values were taken with Rohde & Schwarz ESVS 30 EMI test receiver.

Radiated RF Level – QP Value

Frequency (MHz)	Horizontal (dBuv/m)	Vertical (dBuv/m)	FCC/B Limit (dBuv/m)
638.25	39.82	37.92	46

The spectrum was scanned from 30MHz to 1000MHz and the significant emissions were recorded.

Test distance between device under test and receiving antenna was 3-meter.

Sample of calculation:

Final value (dBuv/m) = Antenna Factor (dB) + Cable Loss (dB) + Reading value (dBuv/m)

Figure 9

