

FCC TEST REPORT

Report No. : EMI00-026

Tested Date: July/08/00

Test Performed By
Philips Electronics Industries (Taiwan) Ltd.
Business Electronics
EMC Lab.
No. 5, Tze Chiang 1 Road,
Chungli, Taoyuan, Taiwan, R.O.C.
Tel.: + 886-3-454-9862 Fax.: +886-3-454-9887

Manufacturer : Philips Business Electronics

Tested System:

- 1. EUT : 9511-HW2 color monitor s/n: TY0005175
FCC ID : A3KM076
- 2. Computer : IBM V66M s/n: 1158-138A0
FCC ID : FCC Logo
- 3. Keyboard : IBM KB-7959 s/n: 10422
FCC ID : FCC Logo
- 4. Mouse : IBM M-S34 s/n: 457249
FCC ID : DZL211029
- 5. Modem : USRobotics 268 s/n: 002680559278575
FCC ID : CJE-0318
- 6. Printer : HP2225C s/n: 3123S97227
FCC ID : DSI6XU2225
- 7. Video Card : Nvidia 256 AGP s/n: --
FCC ID : FCC Logo

Note: Test was performed in according with FCC measurement procedure ANSI C63.4-1992
“AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE
EMISSION FROM LOW-VOLTAGE ELECTRONIC EQUIPMENT IN THE RANGE
OF 9KHz TO 40GHz”

Monitor was connected to floor mounted AC outlet.

60.0KHz mode (1024X768/75Hz) was tested.

DVI I/F cable with two ferrite cores was used.

Non-shield power cord was used during test.

The test equipment used for testing please refer to the list as attached.

Deviation: None

Radiated RF Level – Peak Value

Frequency (MHz)	Horizontal (dBuV/m)	Vertical (dBuV/m)	FCC/B Limit (dBuV/m)
133.89	30.54	31.04	43.5
141.76	29.02	29.02	43.5
173.26	33.49	33.89	43.5
194.12	32.64	28.84	43.5
214.72	33.3	31.6	43.5
244.14	35.36	35.56	46.0
255.87	36.9	36.6	46.0

FCC ID: A3KM095

263.75	36.76	37.86	46.0
291.4	37.02	37.92	46.0
322.89	33.39	31.69	46.0
338.65	35.43	33.33	46.0
354.4	33.7	34.1	46.0
370.15	38.0	37.3	46.0
393.76	36.28	35.98	46.0
417.4	39.3	34.1	46.0
425.27	39.7	33.3	46.0
441.03	36.28	33.68	46.0
488.27	39.21	36.11	46.0
527.66	38.01	36.21	46.0
535.54	37.04	36.14	46.0
575.54	37.04	36.14	46.0

Spectrum Analyzer Setting:

RBW: 100KHz

VBW: 100KHz

Quasi-peak Values were taken with Rohde & Schwarz ESVS 30 EMI Test receiver.

Radiated RF Level – Quasi-Peak Value

Frequency (MHz)	Horizontal (dBuV/m)	Vertical (dBuV/m)	FCC/B Limit (dBuV/m)
167.83	33.04	27.94	43.5
181.14	32.19	29.49	43.5
220.51	32.02	36.62	46.0
252.02	43.8	43.9	46.0
259.9	43.7	43.9	46.0
267.76	41.62	43.62	46.0
275.64	41.94	43.54	46.0
330.76	39.04	35.34	46.0
409.52	40.22	34.92	46.0
433.14	40.29	35.49	46.0
448.91	38.37	38.04	46.0
623.51	36.66	36.86	46.0
671.47	36.32	35.22	46.0

The spectrum was scanned from 30MHz to 1000MHz and the significant emissions were recorded.

Test distance between device under test and receiving antenna was 3-meter.

Sample of calculation:


Final value (dBuV/m) = Antenna Factor (dB) + Cable Loss (dB) + Reading value (dBuV/m)


Tested by:





C.C. Wu

Checked by:

K.J.Hsu – EMC Engineer
NVLAP Signatory

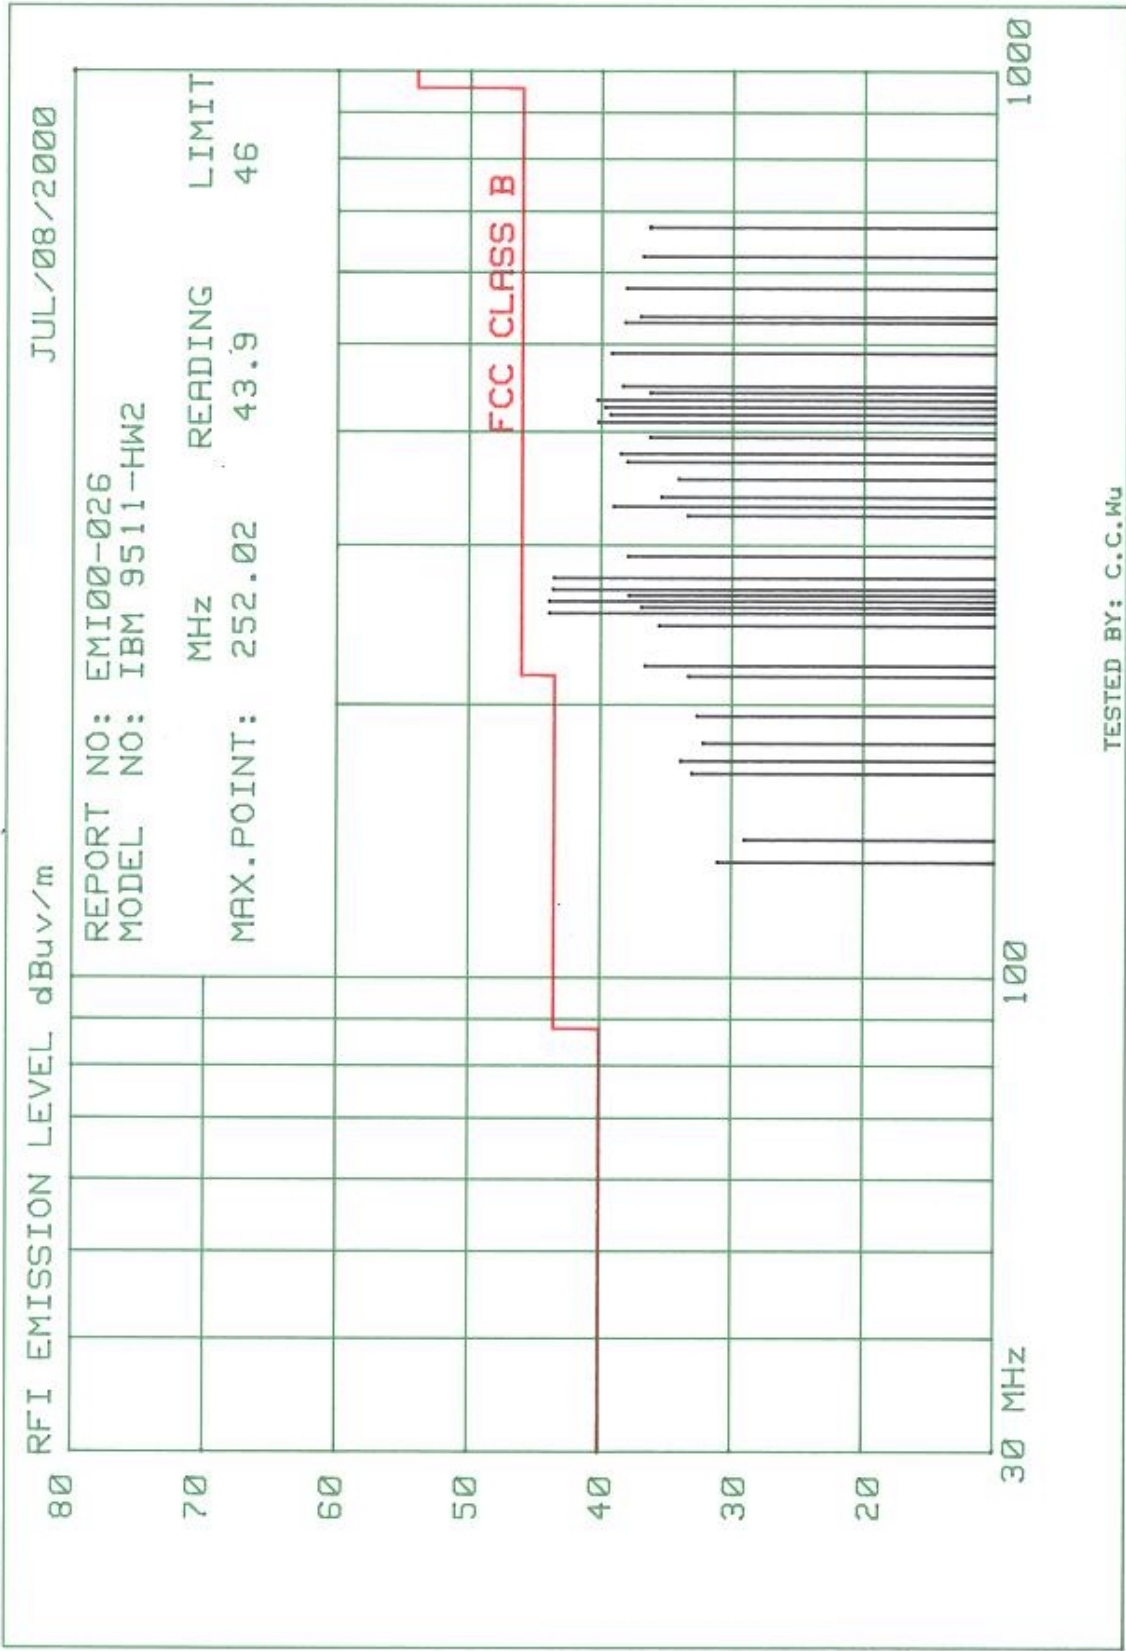

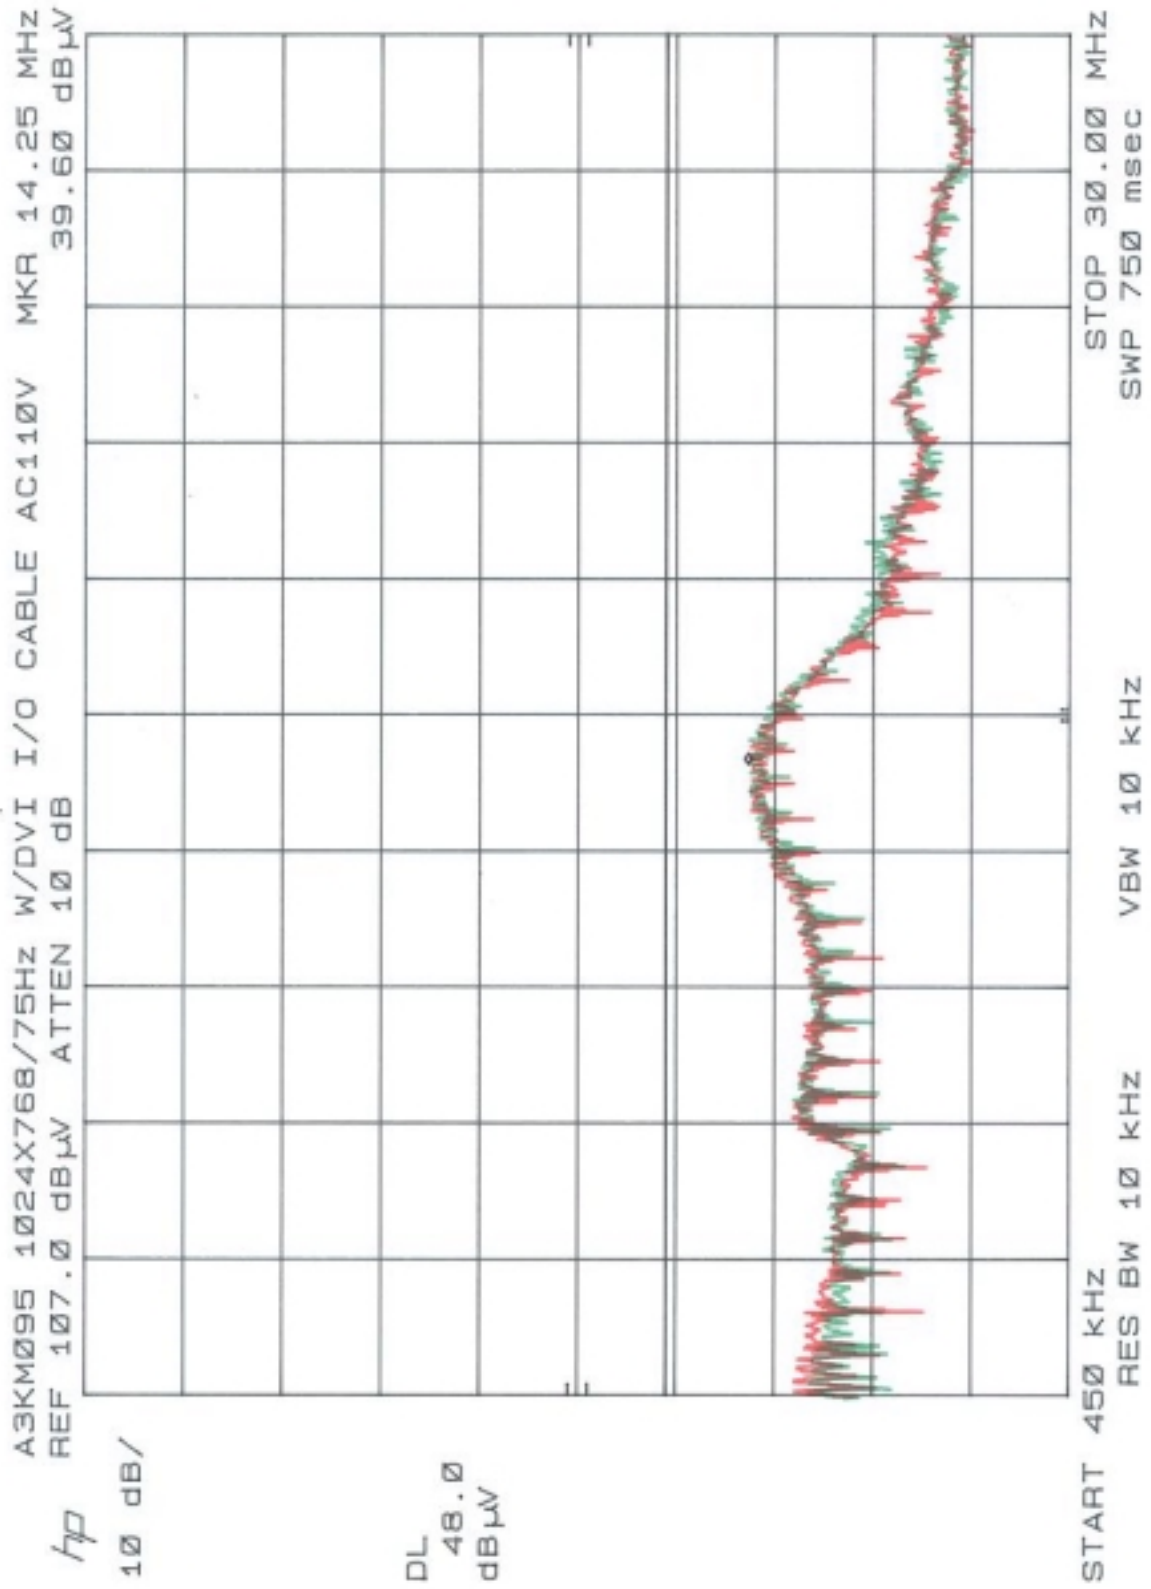

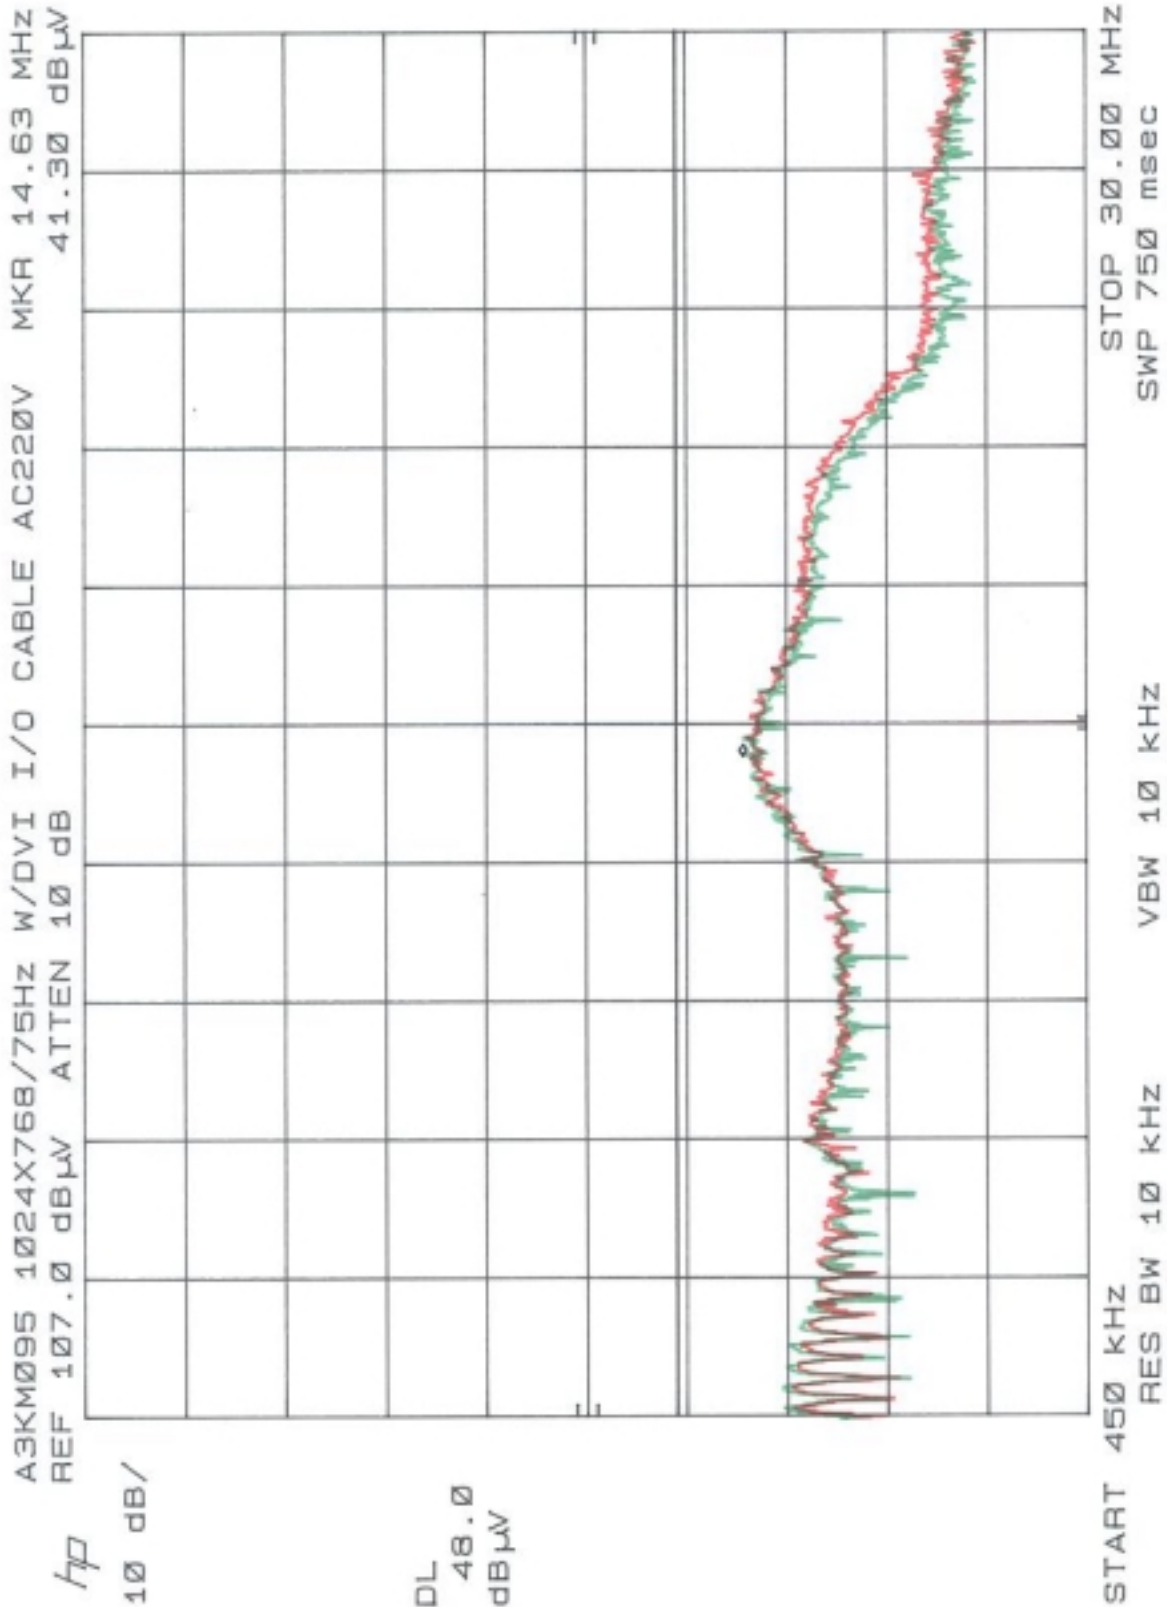

FCC TEST REPORT

Report No. : EMI00-026A

Tested Date: July/09/00

Test Performed By
 Philips Electronics Industries (Taiwan) Ltd.
 Business Electronics
 EMC Lab.
 No. 5, Tze Chiang 1 Road,
 Chungli, Taoyuan, Taiwan, R.O.C.
 Tel.: + 886-3-454-9862 Fax.: +886-3-454-9887

Manufacturer : Philips Business Electronics

Tested System:

1. EUT : 9511-HW2 color monitor s/n: TY0005175
 FCC ID : A3KM076
2. Computer : IBM V66M s/n: 1158-138A0
 FCC ID : FCC Logo
3. Keyboard : IBM KB-7959 s/n: 10422
 FCC ID : FCC Logo
4. Mouse : IBM M-S34 s/n: 457249
 FCC ID : DZL211029
5. Modem : USRobotics 268 s/n: 002680559278575
 FCC ID : CJE-0318
6. Printer : HP2225C s/n: 3123S97227
 FCC ID : DSI6XU2225
7. Video Card : Nvidia 256 AGP s/n: --
 FCC ID : FCC Logo

Note: Test was performed in according with FCC measurement procedure ANSI C63.4-1992
 “AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE
 EMISSION FROM LOW-VOLTAGE ELECTRONIC EQUIPMENT IN THE RANGE
 OF 9KHz TO 40GHz”

Monitor was connected to floor mounted AC outlet.

60.0KHz mode (1024X768/75Hz) was tested.

D-sub I/F cable with two ferrite cores was used.

Non-shield power cord was used during test.

The test equipment used for testing please refer to the list as attached.

Deviation: None

Radiated RF Level – Peak Value

Frequency (MHz)	Horizontal (dBuv/m)	Vertical (dBuv/m)	FCC/B Limit (dBuv/m)
133.89	29.64	30.04	43.5
141.76	27.02	28.32	43.5
173.26	30.59	29.69	43.5
194.12	32.74	31.54	43.5
207.51	32.8	30.7	43.5
259.9	35.8	34.9	46.0
315.01	31.66	31.06	46.0

FCC ID: A3KM095

330.76	31.34	30.64	46.0
409.52	33.92	32.12	46.0
448.91	38.77	35.37	46.0
488.27	34.91	35.31	46.0
527.66	34.41	35.01	46.0
535.54	36.04	37.04	46.0
551.29	35.42	36.72	46.0
567.03	36.1	38.3	46.0
574.91	35.0	36.1	46.0
614.29	39.24	38.74	46.0
645.79	38.84	38.14	46.0

Spectrum Analyzer Setting:

RBW: 100KHz

VBW: 100KHz

Quasi-peak Values were taken with Rohde & Schwarz ESVS 30 EMI Test receiver.

Radiated RF Level – Quasi-Peak Value

Frequency (MHz)	Horizontal (dBuv/m)	Vertical (dBuv/m)	FCC/B Limit (dBuv/m)
167.83	33.74	28.64	43.5
214.72	33.9	31.8	43.5
220.51	31.82	37.62	46.0
630.05	39.3	37.2	46.0

The spectrum was scanned from 30MHz to 1000MHz and the significant emissions were recorded.

Test distance between device under test and receiving antenna was 3-meter.

Sample of calculation:


Final value (dBuv/m) = Antenna Factor (dB) + Cable Loss (dB) + Reading value (dBuv/m)


Tested by:

C.C.Wu

Checked by:

K.J.Hsu – EMC Engineer
NVLAP Signatory

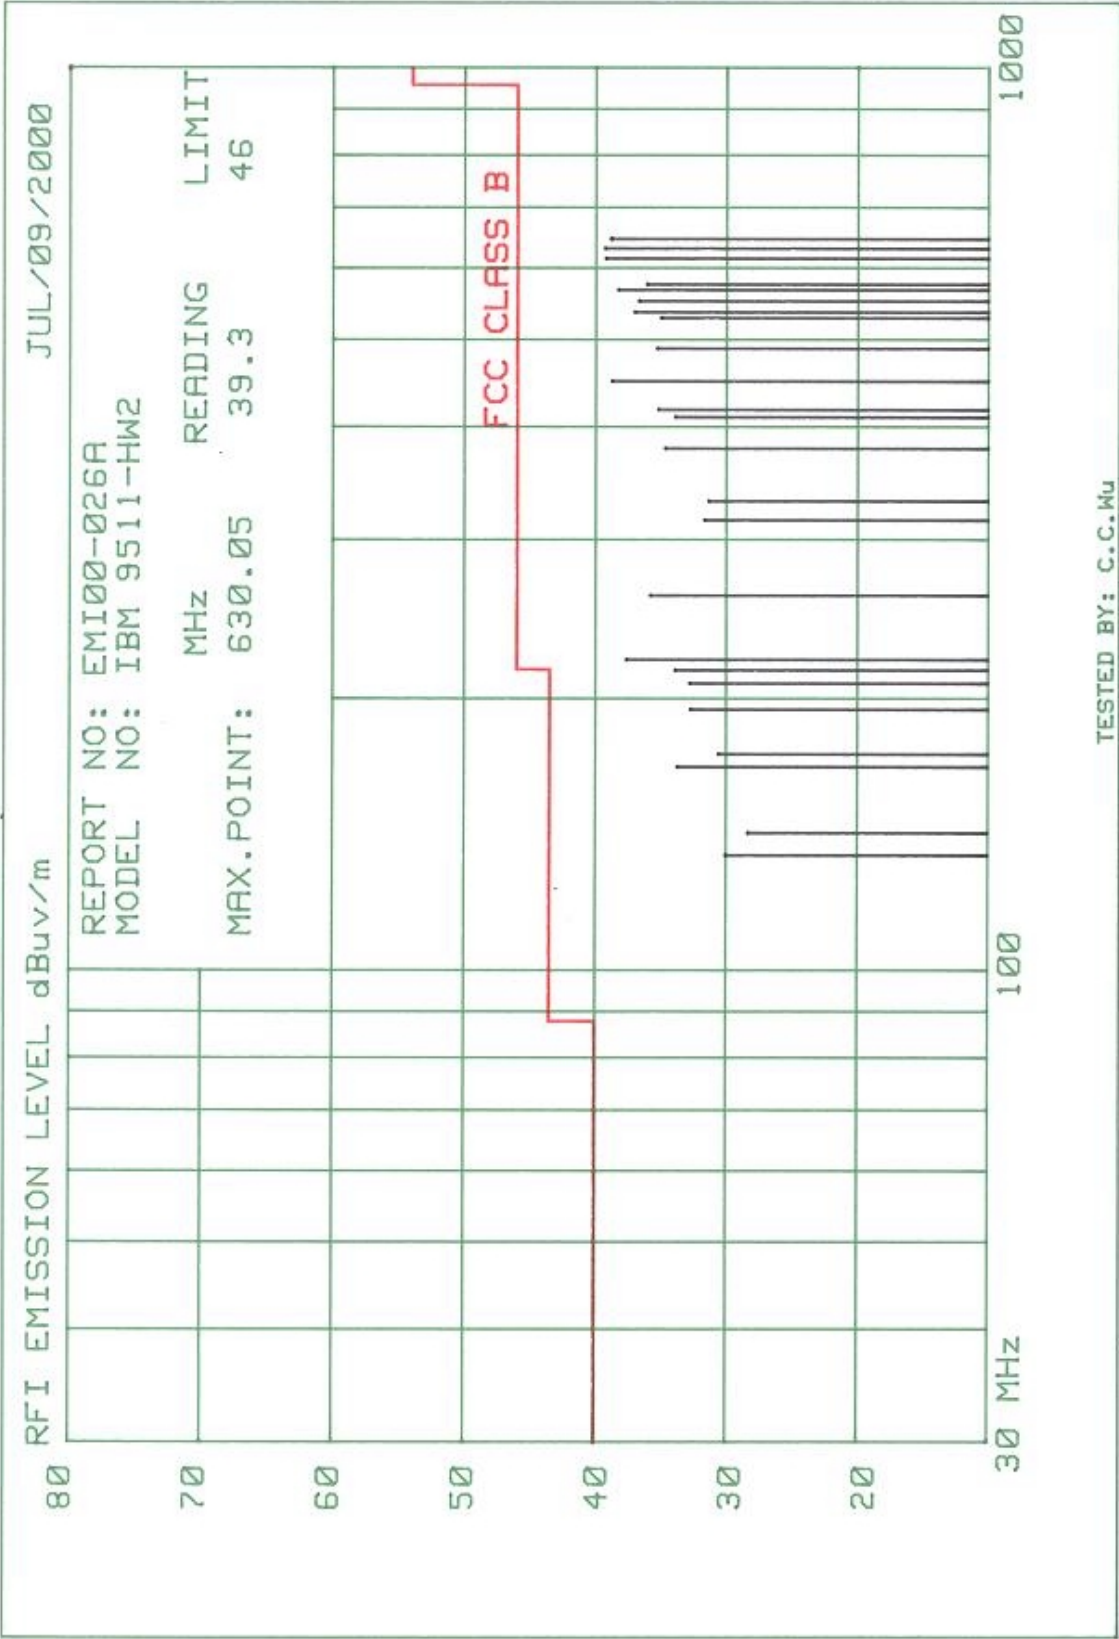

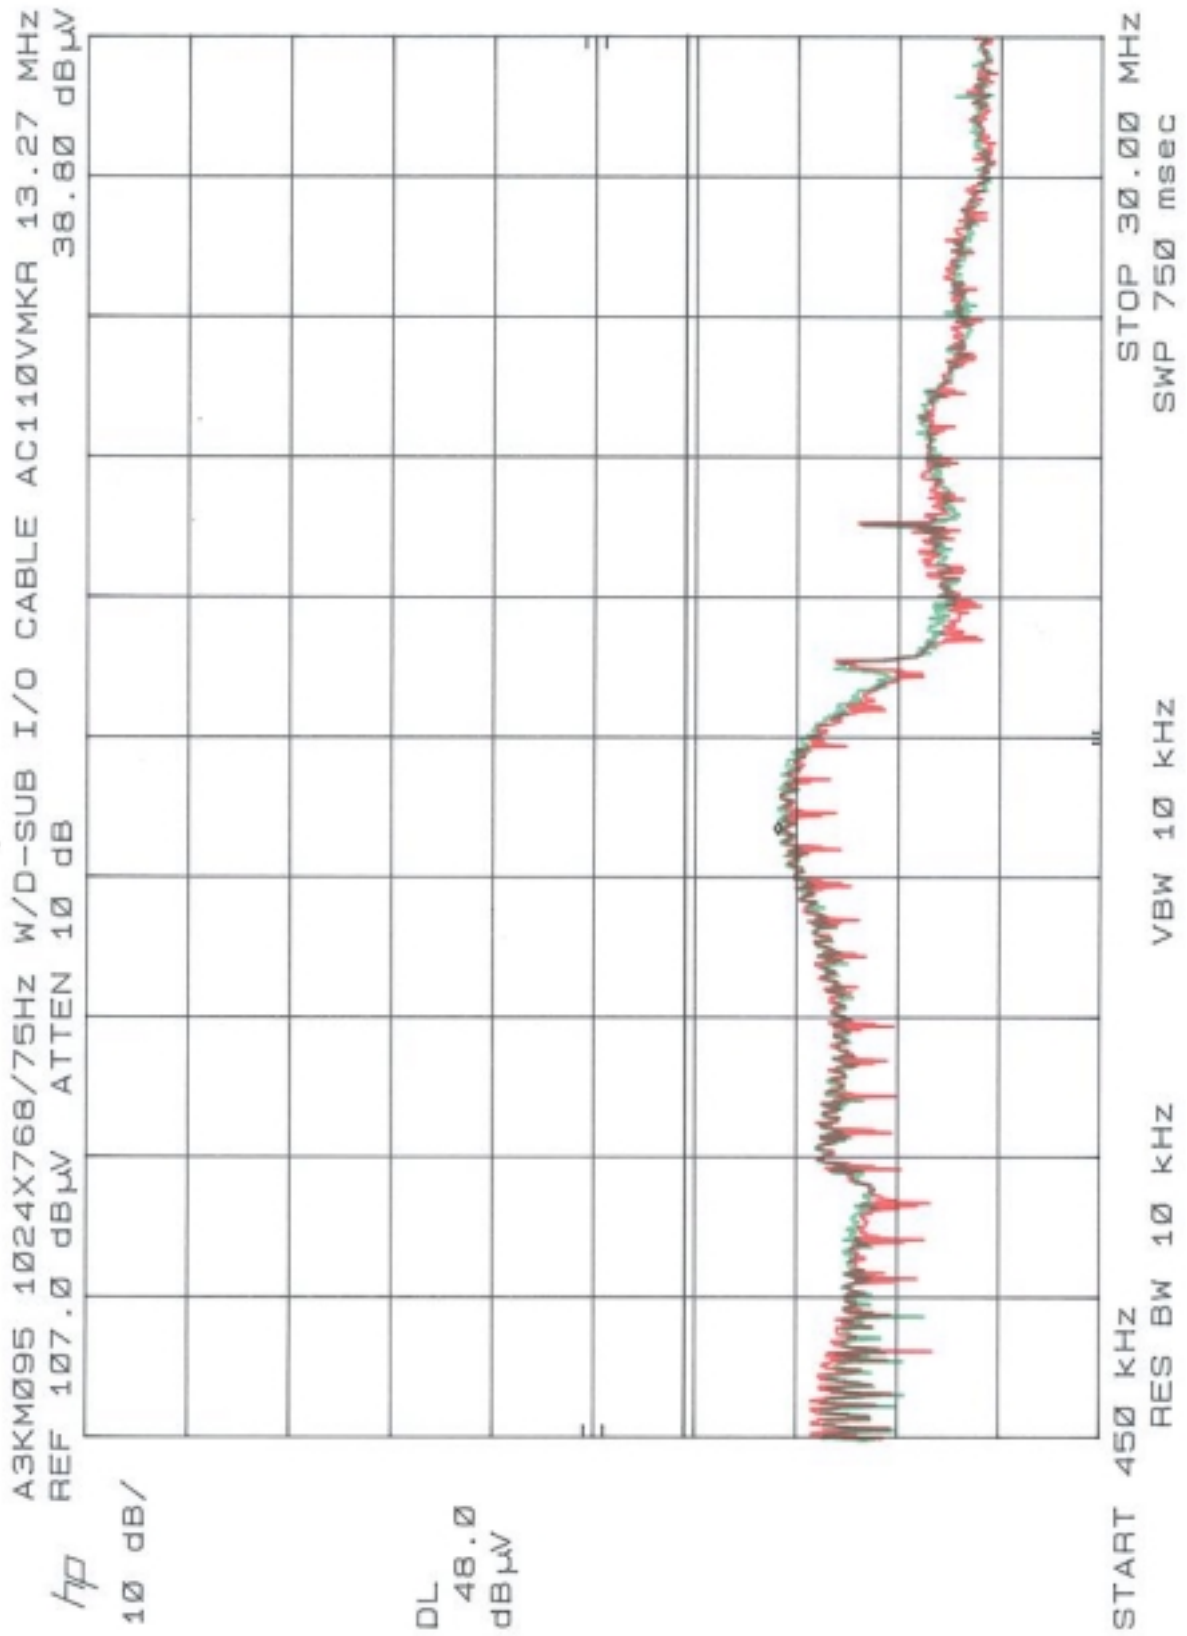


A3KM095 1024X768/75Hz W/D-SUB I/O CABLE AC220V MKR 14.63 MHz
REF 107.0 dBμV ATTN 10 dB 41.20 dBμV

hp

10 dB/

DL
48.0
dBμV

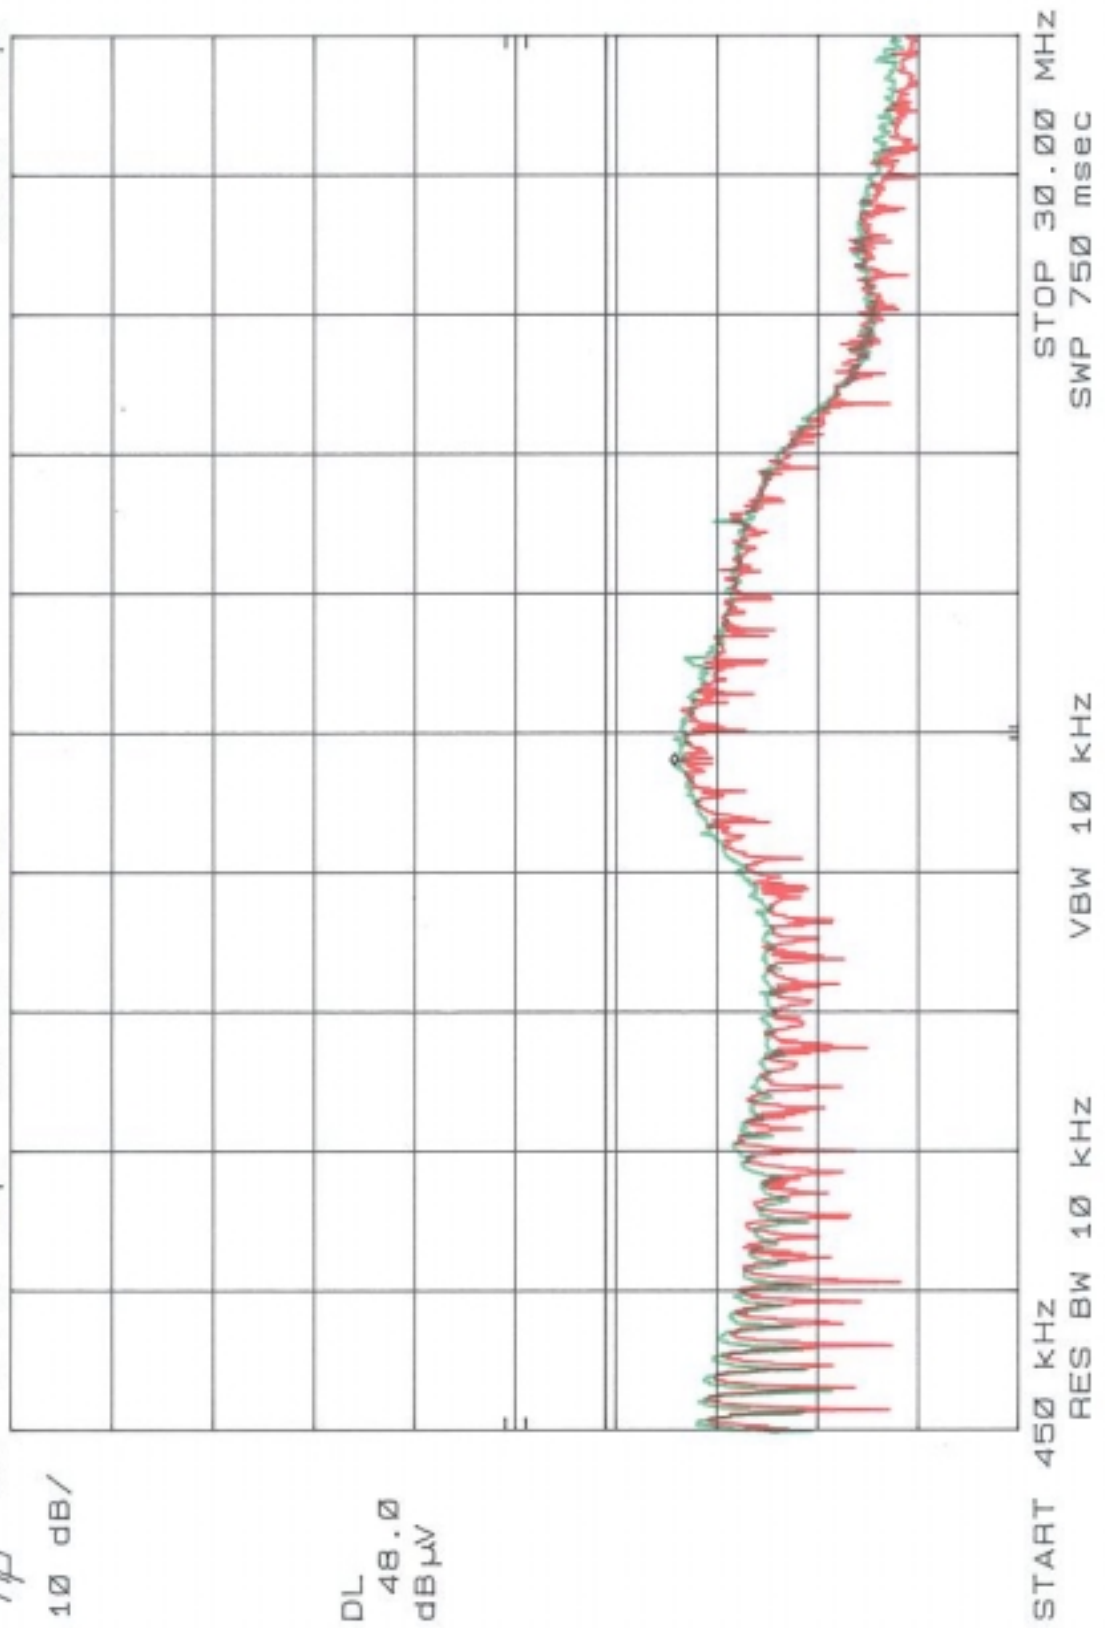

FCC TEST REPORT

Report No. : EMI00-026B

Tested Date: July/10/00

Test Performed By
 Philips Electronics Industries (Taiwan) Ltd.
 Business Electronics
 EMC Lab.
 No. 5, Tze Chiang 1 Road,
 Chungli, Taoyuan, Taiwan, R.O.C.
 Tel.: + 886-3-454-9862 Fax.: +886-3-454-9887

Manufacturer : Philips Business Electronics

Tested System:

- 1. EUT : 9511-HW2 color monitor s/n: TY0005175
FCC ID : A3KM076
- 2. Computer : IBM V66M s/n: 1158-138A0
FCC ID : FCC Logo
- 3. Keyboard : IBM KB-7959 s/n: 10422
FCC ID : FCC Logo
- 4. Mouse : IBM M-S34 s/n: 457249
FCC ID : DZL211029
- 5. Modem : USRobotics 268 s/n: 002680559278575
FCC ID : CJE-0318
- 6. Printer : HP2225C s/n: 3123S97227
FCC ID : DSI6XU2225
- 7. Video Card : Nvidia 256 AGP s/n: --
FCC ID : FCC Logo

Note: Test was performed in according with FCC measurement procedure ANSI C63.4-1992
 “AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE
 EMISSION FROM LOW-VOLTAGE ELECTRONIC EQUIPMENT IN THE RANGE
 OF 9KHz TO 40GHz”

Monitor was connected to floor mounted AC outlet.

60.0KHz mode (1024X768/75Hz) was tested.

DVI I/F cable with two ferrite cores was used.

Non-shield power cord was used during test.

The test equipment used for testing please refer to the list as attached.

Deviation: None

Radiated RF Level – Peak Value

Frequency (MHz)	Horizontal (dB μ V/m)	Vertical (dB μ V/m)	FCC/B Limit (dB μ V/m)
123.48	25.89	27.49	43.5
133.89	26.84	26.44	43.5
153.9	28.1	27.6	43.5
173.26	29.09	27.79	43.5
181.96	31.18	29.78	43.5
194.96	31.85	30.35	43.5
207.95	33.4	32.9	43.5

FCC ID: A3KM095

214.47	33.52	32.62	43.5
259.95	34.7	33.8	46.0
299.16	37.78	37.28	46.0
305.43	32.02	30.32	46.0
311.92	32.94	30.94	46.0
324.94	34.6	34.1	46.0
331.45	30.74	29.54	46.0
337.94	33.71	31.21	46.0
376.94	33.27	31.97	46.0
389.93	32.04	32.14	46.0
409.42	33.4	31.5	46.0
435.42	37.34	34.04	46.0
441.92	37.8	36.6	46.0
467.92	34.33	35.23	46.0
506.9	34.95	Ambient	46.0
532.9	34.83	36.53	46.0
565.4	35.76	37.46	46.0
571.89	37.12	39.72	46.0
584.89	37.62	39.42	46.0
597.89	36.77	39.07	46.0
604.39	35.72	36.82	46.0

Spectrum Analyzer Setting:

RBW: 100KHz

VBW: 100KHz

Quasi-peak Values were taken with Rohde & Schwarz ESVS 30 EMI Test receiver.

Radiated RF Level – Quasi-Peak Value

Frequency (MHz)	Horizontal (dBuV/m)	Vertical (dBuV/m)	FCC/B Limit (dBuV/m)
167.83	34.44	28.44	43.5
180.75	35.19	29.09	43.5
220.83	33.12	35.72	46.0

The spectrum was scanned from 30MHz to 1000MHz and the significant emissions were recorded.

Test distance between device under test and receiving antenna was 3-meter.

Sample of calculation:


Final value (dBuV/m) = Antenna Factor (dB) + Cable Loss (dB) + Reading value (dBuV/m)

Tested by:



C.C. Wu

Checked by:

K.J. Hsu – EMC Engineer
NVLAP Signatory

