



TEST REPORT

 KCTL Eurofins KCTL Co.Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-4904-0113 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR24-SRF0135-C Page (1) of (94)		
1. Client - Name : Samsung Electronics Co., Ltd. - Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea - Date of Receipt : 2024-07-01 2. Use of Report : Class II Permissive Change (FCC) Class III Permissive Change (ISED) 3. Name of Product / Model : Wi-Fi/BLE combo module / ACAU710R 4. Manufacturer / Country of Origin : Samsung Electronics Co., Ltd. / Korea 5. FCC ID : A3LACAU710R 6. IC Certificate No. : 649E-ACAU710R 7. Date of Test : 2024-07-12 to 2024-10-02 8. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing (Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea) 9. Test method used : FCC Part 15 Subpart C, 15.247 RSS-247 Issue 3 August 2023 RSS-Gen Issue 5 February 2021 10. Test Result : Refer to the test result in the test report This laboratory is not accredited for the test results marked. *			
Affirmation	Tested by Name : Euijung Kim (Signature)	Technical Manager Name : Harim Lee (Signature)	
The above testing certificate is the accredited test result by Korea Laboratory Accreditation Scheme, which signed the ILAC-MRA.			2025-07-16
Accredited by KOLAS, Republic of KOREA		Eurofins KCTL Co.,Ltd.	
As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Eurofins KCTL Co.,Ltd.			

 eurofins KCTL Eurofins KCTL Co.Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-4904-0113 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR24-SRF0135-C Page (2) of (94)	 
--	--	---

REPORT REVISION HISTORY

Date	Revision	Page No
2024-10-11	Originally issued	-
2024-10-16	Updated	1
2025-07-08	Updated Test channel in WLAN 2.4 GHz (12, 13 ch)	All
2025-07-16	Update of certification method (ISED)	1

This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is certified according to KS Q ISO/IEC 17025 and KOLAS recognition.

Note. The report No. KR24-SRF0135-B is superseded by the report No. KR24-SRF0135-C.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ Statement not required by the standard or client used for type testing

CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Frequency/channel operations.....	5
2.2.	RF power setting in TEST SW	6
2.3.	RU allocations.....	8
2.4.	Duty Cycle Factor	8
3.	Antenna requirement	10
4.	Summary of tests.....	11
5.	Measurement uncertainty	12
6.	Measurement results explanation example	13
7.	Test results	14
7.1.	Maximum peak output power.....	14
7.2.	Peak Power Spectral Density	25
7.3.	6 dB Bandwidth(DTS Channel Bandwidth) & 99% Bandwidth.....	40
7.4.	Spurious Emission, Band Edge and Restricted bands.....	52
7.5.	Conducted Spurious Emission.....	79
8.	Measurement equipment.....	94

1. General information

Client : Samsung Electronics Co., Ltd.
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
 Manufacturer : Samsung Electronics Co., Ltd.
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
 Factory : Chengdu Xuguang Technology Co., Ltd
 Address : No.86 2nd Section, Park Road, Longquanyi District, Chengdu City, Sichuan Province, P.R. China
 Laboratory : Eurofins KCTL Co., Ltd.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
 CAB Identifier: KR0040
 ISED Number: 8035A
 KOLAS No.: KT231

2. Device information

Equipment under test : Wi-Fi/BLE combo module
 Model : ACAU710R
 Modulation technique : Bluetooth(BDR/EDR) : GFSK, $\pi/4$ DQPSK, 8DPSK
 Bluetooth(BLE) : GFSK
 WIFI(802.11a/b/g/n/ac/ax) : DSSS, OFDM, OFDMA
 Number of channels : Bluetooth : 79 ch
 BLE : 40 ch
 2.4 GHz WLAN : 13 ch (20 MHz)
 UNII 1 : 4 ch (20 MHz)
 UNII 2A : 4 ch (20 MHz)
 UNII 2C : 12 ch (20 MHz)
 UNII 3 : 5 ch (20 MHz)
 Power source : DC 5 V, 12 V
 Antenna specification : Chip antenna
 Antenna gain : BT/BLE/2.4 GHz WLAN : -0.10 dBi
 UNII 1 : 0.90 dBi
 UNII 2A : 0.20 dBi
 UNII 2C : -0.40 dBi
 UNII 3 : -0.70 dBi
 Frequency range : Bluetooth : 2 402 MHz ~ 2 480 MHz (BDR/EDR/BLE)
 2.4 GHz WLAN : 2 412 MHz ~ 2 472 MHz (802.11b/g/n/ax_HT20/HE20)
 UNII-1 : 5 180 MHz ~ 5 240 MHz (802.11a/n/ac/ax_HT20/VHT20/HE20)
 UNII-2A : 5 260 MHz ~ 5 320 MHz (802.11a/n/ac/ax_HT20/VHT20/HE20)
 UNII-2C : 5 500 MHz ~ 5 720 MHz (802.11a/n/ac/ax_HT20/VHT20/HE20)
 UNII-3 : 5 745 MHz ~ 5 825 MHz (802.11a/n/ac/ax_HT20/VHT20/HE20)
 Software version : v1.1
 Hardware version : v1.0
 Test device serial No. : Conducted : 9C443D587C84
 Radiated : C8A6ER364B08
 Operation temperature : -20 °C ~ 85 °C

2.1. Frequency/channel operations

This device contains the following capabilities:

WLAN (11a/b/g/n/ac/ax), Bluetooth (BDR/EDR/BLE)

Ch.	Frequency (MHz)
01	2 412
06	2 437
11	2 462
12	2 467
13	2 472

Table 2.1.1. 802.11ax HE20

2.2. RF power setting in TEST SW

Mode	RU Type		Frequency (MHz)	Power Setting
	RU Tone	RU offset		
802.11b	N/A	N/A	2 412	17.00
			2 437	17.00
			2 462	17.00
			2 467	15.00
			2 472	11.50
802.11g	N/A	N/A	2 412	15.75
			2 437	15.75
			2 462	15.75
			2 467	10.50
			2 472	8.50
802.11n HT20	N/A	N/A	2 412	14.75
			2 437	14.75
			2 462	14.75
			2 467	10.50
			2 472	8.00
802.11ax HE20	26	0	2 412	11.75
		4		11.75
		8		11.75
		0	2 437	15.50
		4		15.50
		8		15.50
		0	2 462	9.00
		4		9.00
		8		9.00
		0	2 467	9.75
		4		9.75
		8		9.75
		0	2 472	1.00
		4		1.00
		8		1.00

Mode	RU Type		Frequency (MHz)	Power Setting
	RU Tone	RU offset		
802.11ax HE20	52	37	2 412	14.00
		38		14.00
		40		14.00
		37	2 437	15.50
		38		15.50
		40		15.50
		37	2 462	13.50
		38		13.50
		40		13.50
		37	2 467	12.50
		38		12.50
		40		12.50
		37	2 472	2.00
		38		2.00
		40		2.00
	106	53	2 412	15.50
		54		15.50
		53	2 437	15.50
		54		15.50
		53	2 462	15.00
		54		15.00
		53	2 467	12.50
		54		12.50
		53	2 472	4.00
		54		4.00
	242	61	2 412	14.50
			2 437	15.50
			2 462	14.00
			2 467	9.75
			2 472	6.25
	SU		2 412	14.75
			2 437	15.50
			2 462	14.25
			2 467	10.25
			2 472	6.25

2.3. RU allocations

BW (MHz)	Tones (T)	RU offset	Test RU offset		
			Low	Mid	High
20	26	0 ~ 8	0	4	8
	52	37 ~ 40	37	38	40
	106	53 ~ 54	53	-	54
	242	61 / SU	-	61 / -	-


2.4. Duty Cycle Factor

Test mode	Tone	Period (ms)	On time (ms)	Duty cycle		Duty Cycle Factor (dB)
				(Linear)	(%)	
802.11ax HE20	26T	2.106 9	2.003 4	0.950 9	95.09	0.22
	52T	2.123 1	2.018 7	0.950 8	95.08	0.22
	106T	2.122 2	2.018 7	0.951 2	95.12	0.22
	242T	2.122 2	2.018 7	0.951 2	95.12	0.22
	SU	1.556 8	1.452 5	0.933 0	93.30	0.30


Notes.

1. Duty cycle (Linear) = Ton time / Period
2. DCF(Duty cycle factor) = $10\log(1/\text{duty cycle})$
3. DCF is not compensated to Average result if duty cycle is more than 98%


26T

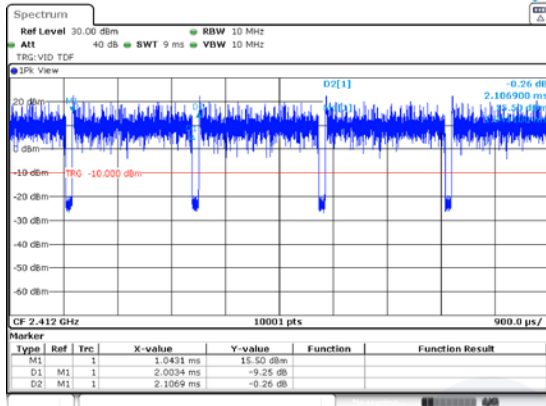


52T

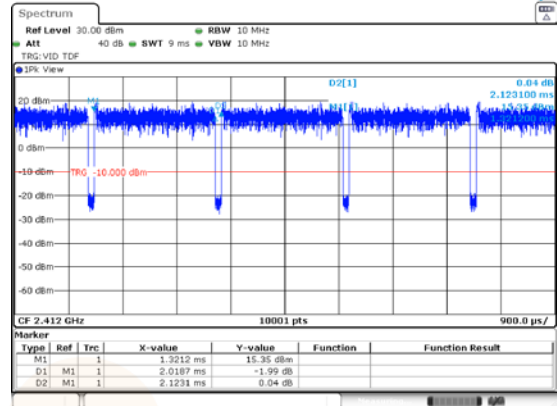


106T

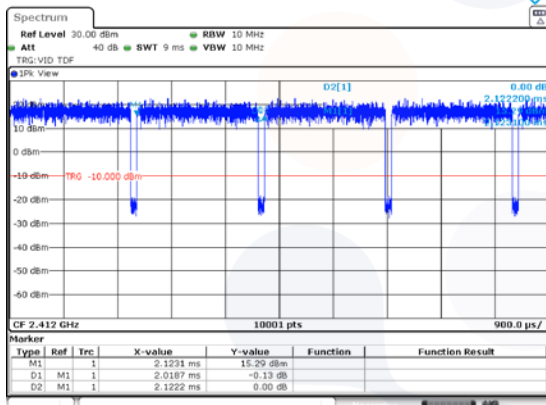

242T

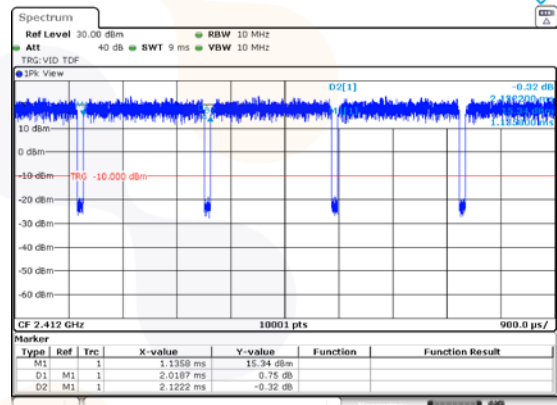

SU

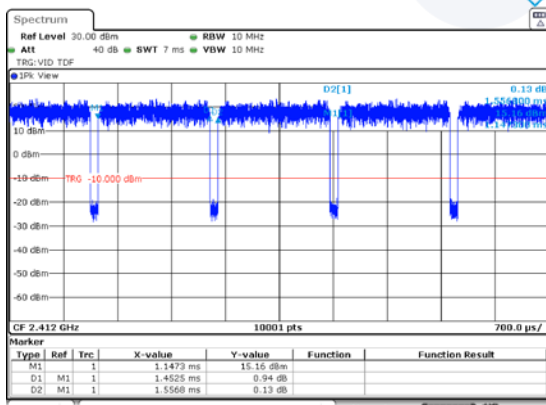

Blank

3. Antenna requirement

Requirement of FCC part section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Requirement of RSS-Gen Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

- The transmitter has permanently attached Chip Antenna (Internal antenna) on board.
- The E.U.T Complies with the requirement of §15.203, §15.247.

4. Summary of tests

FCC Part section(s)	IC Rule Reference	Parameter	Test Condition	Test results
15.247(b)(3)	RSS-247 (5.4)(d)	Maximum peak output power	Conducted	Pass
15.247(e)	RSS-247 (5.2)(b)	Peak power spectral density		Pass
15.247(a)(2)	RSS-247 (5.2)(a)	6 dB channel bandwidth		Pass
-	RSS-Gen (6.7)	Occupied Bandwidth		Pass
15.207(a)	RSS-Gen (8.8)	AC Conducted Emissions		Pass
15.247(d)	RSS-247 (5.5)	Conducted Spurious Emissions		Pass
15.205(a), 15.209(a)	RSS-Gen (8.9), (8.10)	Spurious emission	Radiated	Pass
		Band-edge, restricted band		Pass

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
3. EUT was investigated in three orthogonal orientations X, Y and Z. it was determined that Y orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in X orientation.
4. All configurations have been performed (Stand-alone, Stand-alone with TA, With accessories).
Worst case: Stand-alone with TA
5. The test procedure(s) in this report were performed in accordance as following.
 - ♦ ANSI C63.10-2013
 - ♦ KDB 558074 D01 v05r02
 - ♦ KDB 662911 D01 v02r01
6. The worst-case data rate were : MCS0
7. For AC Conducted emission and spurious emission below 1 GHz, please refer to 15.247 test report.

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicated a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty ($\pm$)	
Maximum Peak Output Power	0.9 dB	
Peak Power Spectral Density	1.0 dB	
6 dB Channel Bandwidth	0.1 %	
Occupied Bandwidth	0.1 %	
Conducted spurious emission	1.9 dB	
Conducted Emissions	150 kHz to 30 MHz	2.8 dB
Radiated spurious Emissions (Bandedge, restricted band)	Below 30 MHz	2.3 dB
	30 MHz to 1 000 MHz	2.5 dB
	1 000 MHz to 18 000 MHz	4.7 dB
	Above 18 000 MHz	4.8 dB

6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	9.94	9 000	13.16
50	10.03	10 000	13.21
100	10.14	11 000	13.41
200	10.26	12 000	13.47
300	10.41	13 000	13.51
400	10.49	14 000	13.32
500	10.47	15 000	13.41
600	10.59	16 000	13.73
700	10.64	17 000	13.77
800	10.66	18 000	13.86
900	10.72	19 000	13.53
1 000	10.66	20 000	13.74
2 000	11.13	21 000	13.86
3 000	11.51	22 000	13.93
4 000	11.58	23 000	14.32
5 000	12.00	24 000	13.84
6 000	12.21	25 000	14.05
7 000	13.05	26 000	14.70
8 000	13.09	26 500	14.88


Notes:

Offset(dB) = RF cable loss(dB) + Attenuator(dB)

7. Test results

7.1. Maximum peak output power

Test setup



Limit

FCC

According to §15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2 400-2 483.5 MHz, and 5 725-5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC

According to RSS-247 5.4(d), For DTSSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

Test procedure

ANSI C63.10 - Section 11.9

Used test method is section 11.9.1.3 and 11.9.2.3.1

Test settings

General

Section 15.247 permits the maximum conducted (average) output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth (see ANSI C63.10 for measurement guidance).

When using a spectrum analyzer or EMI receiver to perform these measurements, it shall be capable of utilizing a number of measurement points in each sweep that is greater than or equal to twice the span/RBW to set a bin-to-bin spacing of $\leq \text{RBW}/2$ so that narrowband signals are not lost between frequency bins.

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level. The intent is to test at 100 % duty cycle; however a small reduction in duty cycle (to no lower than 98 %) is permitted, if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

If continuous transmission (or at least 98 % duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level, with the transmit duration as long as possible, and the duty cycle as high as possible during which sweep triggering/signal gating techniques may be used to perform the measurement over the transmission duration.

11.9.1. Maximum peak conducted output power

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

11.9.1.1. RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq [3 \times \text{RBW}]$.
- c) Set span $\geq [3 \times \text{RBW}]$.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

11.9.1.3. PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

11.9.2.3.1. Measurement using a power meter (PM)

Method AVGPM is a measurement using an RF average power meter, as follows:

- a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied:
 - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal as described in 11.6.
- c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- d) Adjust the measurement in dBm by adding $[10 \log(1/D)]$, where D is the duty cycle

Notes:

A peak responding power sensor is used, where the power sensor system video bandwidth is greater than the occupied bandwidth of the EUT.

Test results**[DC 5 V]**

Frequency (MHz)	Tone	RU offset	Measured output power				Limit (dBm)
			Reading (dBm)		DCF (dB)	Result (dBm)	
			Peak	Average		Average	
2 412	26T	0	23.21	11.73	0.22	11.95	30.00
		4	21.66	12.40	0.22	12.62	
		8	23.73	11.78	0.22	12.00	
	52T	37	25.04	14.32	0.22	14.54	
		38	25.10	14.82	0.22	15.04	
		40	25.02	14.33	0.22	14.55	
	106T	53	26.16	16.02	0.22	16.24	
		54	26.36	16.13	0.22	16.35	
	242T	61	25.71	15.04	0.22	15.26	
	SU	-	25.78	15.24	0.30	15.54	
2 437	26T	0	26.25	15.48	0.22	15.70	
		4	25.35	16.13	0.22	16.35	
		8	26.91	15.48	0.22	15.70	
	52T	37	26.17	15.76	0.22	15.98	
		38	26.26	16.17	0.22	16.39	
		40	26.16	15.67	0.22	15.89	
	106T	53	26.12	15.94	0.22	16.16	
		54	26.16	15.92	0.22	16.14	
	242T	61	26.34	15.89	0.22	16.11	
	SU	-	26.14	15.81	0.30	16.11	
2 462	26T	0	21.31	9.64	0.22	9.86	
		4	19.50	10.27	0.22	10.49	
		8	22.14	9.51	0.22	9.73	
	52T	37	24.70	14.17	0.22	14.39	
		38	24.75	14.54	0.22	14.76	
		40	24.50	14.06	0.22	14.28	
	106T	53	26.29	15.97	0.22	16.19	
		54	26.32	15.81	0.22	16.03	
	242T	61	25.61	14.81	0.22	15.03	
	SU	-	25.69	15.05	0.30	15.35	

Notes:

1. Average result(dB m) = Average Reading (dB m) + DCF(dB)

Frequency (MHz)	Tone	RU offset	Measured output power				Limit (dBm)
			Reading (dBm)		DCF (dB)	Result (dBm)	
			Peak	Average		Average	
2 467	26T	0	21.20	9.94	0.22	10.16	30.00
		4	19.78	10.52	0.22	10.74	
		8	21.93	9.78	0.22	10.00	
	52T	37	23.31	12.66	0.22	12.88	
		38	23.21	12.99	0.22	13.21	
		40	23.18	12.44	0.22	12.66	
	106T	53	23.03	12.74	0.22	12.96	
		54	22.84	12.59	0.22	12.81	
	242T	61	20.85	10.31	0.22	10.53	
	SU	-	21.56	10.72	0.30	11.02	
2 472	26T	0	13.10	-0.83	0.22	-0.61	30.00
		4	11.14	-0.25	0.22	-0.03	
		8	14.11	-0.95	0.22	-0.73	
	52T	37	13.44	2.33	0.22	2.55	
		38	13.25	2.65	0.22	2.87	
		40	13.50	2.12	0.22	2.34	
	106T	53	15.04	4.42	0.22	4.64	
		54	15.10	4.36	0.22	4.58	
	242T	61	17.62	6.74	0.22	6.96	
	SU	-	17.87	6.79	0.30	7.09	

E.I.R.P.

Frequency (MHz)	Tone	RU offset	Measured output power				Max e.i.r.p Limit (dBm)
			Conducted Output Power (dBm)		ANT Gain (dBi)	Max.e.i.r.p (dBm)	
			Peak	Average		Average	
2 412	26T	0	23.21	11.95	-0.10	11.85	36.02
		4	21.66	12.62		12.52	
		8	23.73	12.00		11.90	
	52T	37	25.04	14.54		14.44	
		38	25.10	15.04		14.94	
		40	25.02	14.55		14.45	
	106T	53	26.16	16.24		16.14	
		54	26.36	16.35		16.25	
	242T	61	25.71	15.26		15.16	
	SU	-	25.78	15.54		15.44	
2 437	26T	0	26.25	15.70		15.60	
		4	25.35	16.35		16.25	
		8	26.91	15.70		15.60	
	52T	37	26.17	15.98		15.88	
		38	26.26	16.39		16.29	
		40	26.16	15.89		15.79	
	106T	53	26.12	16.16		16.06	
		54	26.16	16.14		16.04	
	242T	61	26.34	16.11		16.01	
	SU	-	26.14	16.11		16.01	
2 462	26T	0	21.31	9.86		9.76	
		4	19.50	10.49		10.39	
		8	22.14	9.73		9.63	
	52T	37	24.70	14.39		14.29	
		38	24.75	14.76		14.66	
		40	24.50	14.28		14.18	
	106T	53	26.29	16.19		16.09	
		54	26.32	16.03		15.93	
	242T	61	25.61	15.03		14.93	
	SU	-	25.69	15.35		15.25	

Notes:

1. E.I.R.P. Calculation: E.I.R.P. (dB m) = Conducted output power (dB m) + Antenna gain (dB i)

Frequency (MHz)	Tone	RU offset	Measured output power				Max e.i.r.p Limit (dBm)
			Conducted Output Power (dBm)		ANT Gain (dBi)	Max.e.i.r.p (dBm)	
			Peak	Average		Average	
2 467	26T	0	21.20	9.94	-0.10	9.84	36.02
		4	19.78	10.52		10.42	
		8	21.93	9.78		9.68	
	52T	37	23.31	12.66		12.56	
		38	23.21	12.99		12.89	
		40	23.18	12.44		12.34	
	106T	53	23.03	12.74		12.64	
		54	22.84	12.59		12.49	
	242T	61	20.85	10.31		10.21	
	SU	-	21.56	10.72		10.62	
2 472	26T	0	13.10	-0.83	-0.10	-0.93	36.02
		4	11.14	-0.25		-0.35	
		8	14.11	-0.95		-1.05	
	52T	37	13.44	2.33		2.23	
		38	13.25	2.65		2.55	
		40	13.50	2.12		2.02	
	106T	53	15.04	4.42		4.32	
		54	15.10	4.36		4.26	
	242T	61	17.62	6.74		6.64	
	SU	-	17.87	6.79		6.69	

[DC 12 V]

Frequency (MHz)	Tone	RU offset	Measured output power				Limit (dBm)
			Reading (dBm)		DCF (dB)	Result (dBm)	
			Peak	Average		Average	
2 412	26T	0	23.20	11.62	0.22	11.84	
		4	21.40	12.20	0.22	12.42	
		8	23.97	11.49	0.22	11.71	
	52T	37	25.02	14.11	0.22	14.33	
		38	25.05	14.46	0.22	14.68	
		40	25.25	13.96	0.22	14.18	
	106T	53	25.71	15.71	0.22	15.93	
		54	25.86	15.66	0.22	15.88	
	242T	61	25.58	14.73	0.22	14.95	
	SU	-	25.66	14.89	0.30	15.19	
2 437	26T	0	26.53	15.42	0.22	15.64	30.00
		4	25.15	15.98	0.22	16.20	
		8	26.89	15.19	0.22	15.41	
	52T	37	26.08	15.63	0.22	15.85	
		38	26.18	16.06	0.22	16.28	
		40	26.00	15.43	0.22	15.65	
	106T	53	26.09	15.90	0.22	16.12	
		54	26.00	15.68	0.22	15.90	
	242T	61	26.20	15.76	0.22	15.98	
	SU	-	26.16	15.66	0.30	15.96	
2 462	26T	0	20.31	8.43	0.22	8.65	
		4	18.28	9.02	0.22	9.24	
		8	21.20	8.22	0.22	8.44	
	52T	37	23.73	13.04	0.22	13.26	
		38	23.67	13.43	0.22	13.65	
		40	23.69	12.74	0.22	12.96	
	106T	53	25.27	14.73	0.22	14.95	
		54	25.16	14.49	0.22	14.71	
	242T	61	24.73	13.59	0.22	13.81	
	SU	-	24.80	13.77	0.30	14.07	

Notes:

1. Average result(dB m) = Average Reading (dB m) + DCF(dB)

Frequency (MHz)	Tone	RU offset	Measured output power				Limit (dBm)
			Reading (dBm)		DCF (dB)	Result (dBm)	
			Peak	Average		Average	
2 467	26T	0	21.34	9.96	0.22	10.18	30.00
		4	19.64	10.37	0.22	10.59	
		8	22.13	9.54	0.22	9.76	
	52T	37	23.27	12.51	0.22	12.73	
		38	23.13	12.89	0.22	13.11	
		40	23.11	12.18	0.22	12.40	
	106T	53	23.09	12.70	0.22	13.65	
		54	22.91	12.50	0.22	13.45	
	242T	61	20.91	10.20	0.22	10.42	
	SU	-	21.67	10.59	0.30	10.89	
2 472	26T	0	11.71	-0.54	0.22	-0.32	30.00
		4	9.40	-0.09	0.22	0.13	
		8	12.52	-0.82	0.22	-0.60	
	52T	37	13.70	2.57	0.22	2.79	
		38	13.61	2.92	0.22	3.14	
		40	13.81	2.22	0.22	2.44	
	106T	53	15.38	4.69	0.22	4.91	
		54	15.18	4.49	0.22	4.71	
	242T	61	17.78	6.76	0.22	6.98	
	SU	-	17.87	6.70	0.30	7.00	

E.I.R.P.

Frequency (MHz)	Tone	RU offset	Measured output power				Max e.i.r.p Limit (dBm)
			Conducted Output Power (dBm)		ANT Gain (dBi)	Max.e.i.r.p (dBm)	
			Peak	Average		Average	
2 412	26T	0	23.20	11.84	-0.10	11.74	36.02
		4	21.40	12.42		12.32	
		8	23.97	11.71		11.61	
	52T	37	25.02	14.33		14.23	
		38	25.05	14.68		14.58	
		40	25.25	14.18		14.08	
	106T	53	25.71	15.93		15.83	
		54	25.86	15.88		15.78	
	242T	61	25.58	14.95		14.85	
	SU	-	25.66	15.19		15.09	
2 437	26T	0	26.53	15.64		15.54	
		4	25.15	16.20		16.10	
		8	26.89	15.41		15.31	
	52T	37	26.08	15.85		15.75	
		38	26.18	16.28		16.18	
		40	26.00	15.65		15.55	
	106T	53	26.09	16.12		16.02	
		54	26.00	15.90		15.80	
	242T	61	26.20	15.98		15.88	
	SU	-	26.16	15.96		15.86	
2 462	26T	0	20.31	8.65		8.55	
		4	18.28	9.24		9.14	
		8	21.20	8.44		8.34	
	52T	37	23.73	13.26		13.16	
		38	23.67	13.65		13.55	
		40	23.69	12.96		12.86	
	106T	53	25.27	14.95		14.85	
		54	25.16	14.71		14.61	
	242T	61	24.73	13.81		13.71	
	SU	-	24.80	14.07		13.97	


Notes:

1. E.I.R.P. Calculation: E.I.R.P. (dB m) = Conducted output power (dB m) + Antenna gain (dB i)

Frequency (MHz)	Tone	RU offset	Measured output power				Max e.i.r.p Limit (dBm)
			Conducted Output Power (dBm)		ANT Gain (dBi)	Max.e.i.r.p (dBm)	
			Peak	Average		Average	
2 467	26T	0	21.34	9.96	-0.10	9.86	36.02
		4	19.64	10.37		10.27	
		8	22.13	9.54		9.44	
	52T	37	23.27	12.51		12.41	
		38	23.13	12.89		12.79	
		40	23.11	12.18		12.08	
	106T	53	23.09	12.70		12.60	
		54	22.91	12.50		12.40	
	242T	61	20.91	10.20		10.10	
	SU	-	21.67	10.59		10.49	
2 472	26T	0	11.71	-0.54	-0.10	-0.64	36.02
		4	9.40	-0.09		-0.19	
		8	12.52	-0.82		-0.92	
	52T	37	13.70	2.57		2.47	
		38	13.61	2.92		2.82	
		40	13.81	2.22		2.12	
	106T	53	15.38	4.69		4.59	
		54	15.18	4.49		4.39	
	242T	61	17.78	6.76		6.66	
	SU	-	17.87	6.70		6.60	

7.2. Peak Power Spectral Density

Test setup



Limit

According to §15.247(e) and RSS-247(5.2), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test procedure

ANSI C63.10 - Section 11.10.2

Test settings

Method PKPSD (peak PSD)

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set the span to 1.5 times the DTS bandwidth.
- 3) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- 4) Set the VBW $\geq 3 \times \text{RBW}$.
- 5) Detector = peak.
- 6) Sweep time = auto couple.
- 7) Trace mode = max hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- 10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test results**[DC 5 V]**

Frequency (MHz)	Tone	RU offset	Results (dB m/ 3 kHz)	Limit (dBm/ 3kHz)
2 412	26T	0	-11.32	8.00
		4	-10.84	
		8	-11.29	
	52T	37	-11.39	
		38	-11.83	
		40	-12.19	
	106T	53	-12.97	
		54	-13.29	
	242T	61	-17.32	
	SU	-	-17.30	
2 437	26T	0	-7.47	
		4	-6.73	
		8	-7.47	
	52T	37	-9.92	
		38	-10.28	
		40	-10.29	
	106T	53	-12.80	
		54	-12.76	
	242T	61	-15.81	
	SU	-	-15.96	
2 462	26T	0	-11.43	
		4	-11.02	
		8	-12.19	
	52T	37	-10.27	
		38	-10.74	
		40	-11.10	
	106T	53	-11.75	
		54	-11.43	
	242T	61	-15.76	
	SU	-	-15.77	

Frequency (MHz)	Tone	RU offset	Results (dB m/ 3 kHz)	Limit (dBm/ 3kHz)
2 467	26T	0	-12.89	8.00
		4	-12.47	
		8	-13.26	
	52T	37	-13.57	
		38	-13.49	
		40	-14.37	
	106T	53	-16.32	
		54	-16.43	
	242T	61	-21.40	
	SU	-	-21.05	
2 472	26T	0	-23.52	
		4	-23.15	
		8	-23.57	
	52T	37	-23.69	
		38	-24.08	
		40	-24.33	
	106T	53	-24.54	
		54	-24.67	
	242T	61	-25.68	
	SU	-	-25.38	

[DC 12 V]

Frequency (MHz)	Tone	RU offset	Results (dB m/ 3 kHz)	Limit (dBm/ 3kHz)
2 412	26T	0	-11.43	8.00
		4	-10.77	
		8	-11.29	
	52T	37	-11.44	
		38	-11.51	
		40	-12.23	
	106T	53	-13.34	
		51	-13.63	
	242T	61	-16.89	
	SU	-	-16.82	
2 437	26T	0	-7.26	
		4	-6.33	
		8	-7.55	
	52T	37	-9.92	
		38	-10.10	
		40	-9.87	
	106T	53	-12.52	
		51	-12.50	
	242T	61	-15.31	
	SU	-	-15.50	
2 462	26T	0	-11.25	
		4	-11.15	
		8	-12.31	
	52T	37	-9.92	
		38	-10.42	
		40	-11.04	
	106T	53	-11.74	
		54	-11.26	
	242T	61	-15.71	
	SU	-	-15.78	


Frequency (MHz)	Tone	RU offset	Results (dB m/ 3 kHz)	Limit (dBm/ 3kHz)
2 467	26T	0	-12.85	8.00
		4	-12.75	
		8	-13.07	
	52T	37	-12.92	
		38	-13.76	
		40	-13.87	
	106T	53	-15.60	
		54	-15.86	
	242T	61	-21.29	
	SU	-	-21.28	
2 472	26T	0	-23.48	
		4	-23.06	
		8	-23.50	
	52T	37	-22.82	
		38	-22.93	
		40	-23.59	
	106T	53	-23.56	
		54	-23.73	
	242T	61	-24.95	
	SU	-	-24.84	

In order to simplify the report, attached plots were the worst case per each tone RU offset.


[DC 5 V]

2 412 MHz


RU 26T offset 4

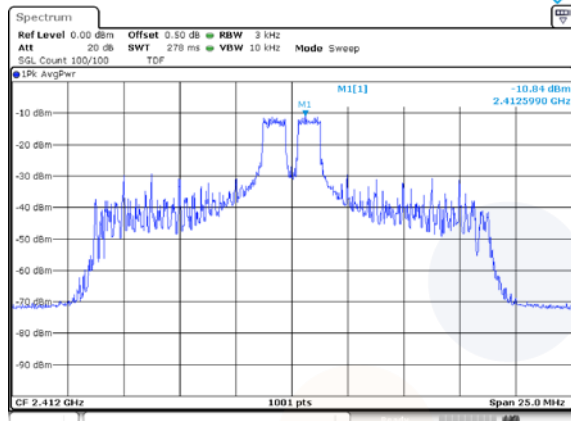


RU 242T offset 61

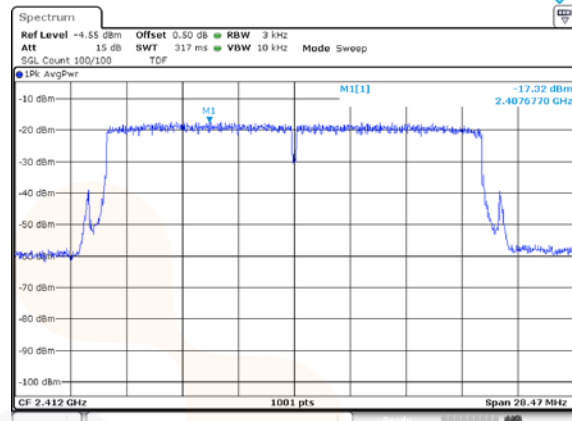


RU 52T offset 37

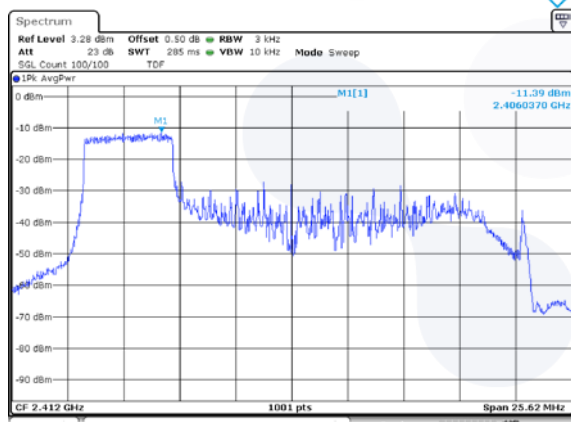

SU

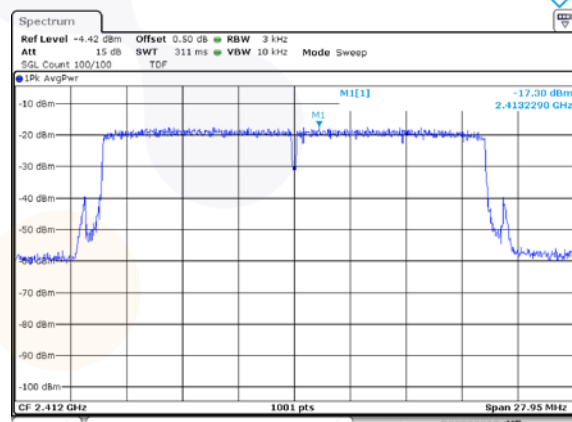


RU 106T offset 53

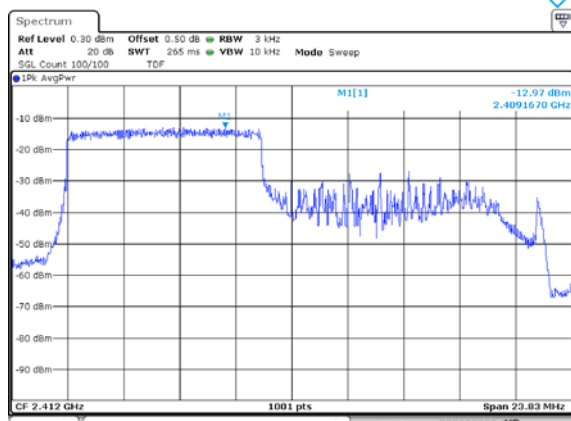


Blank

2 437 MHz


RU 26T offset 4

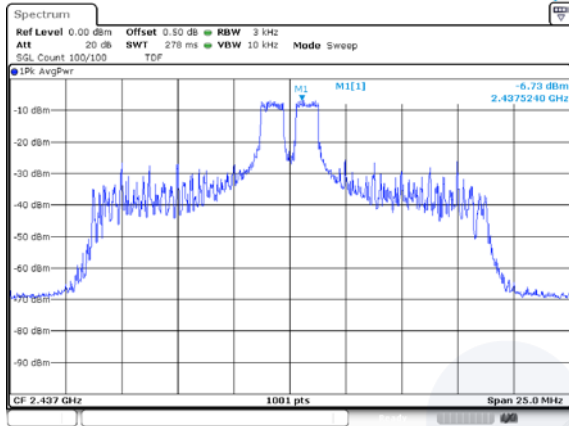


RU 242T offset 61

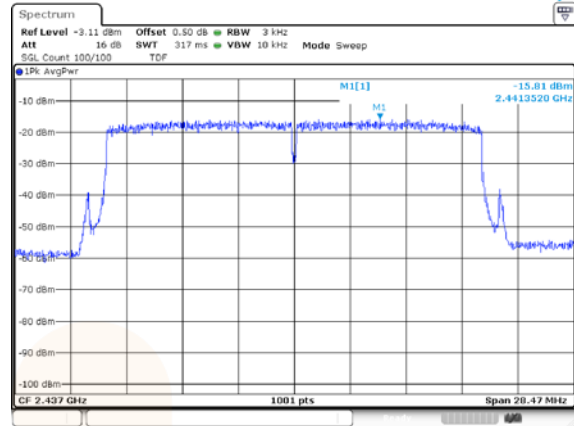


RU 52T offset 37

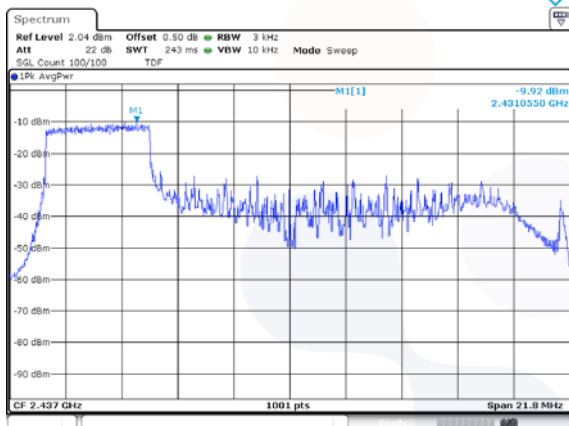

SU

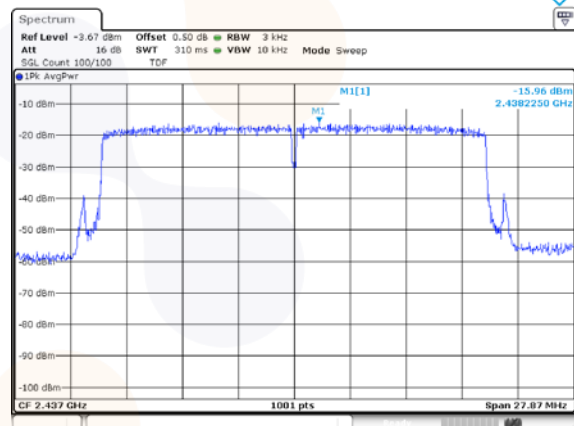


RU 106T offset 54

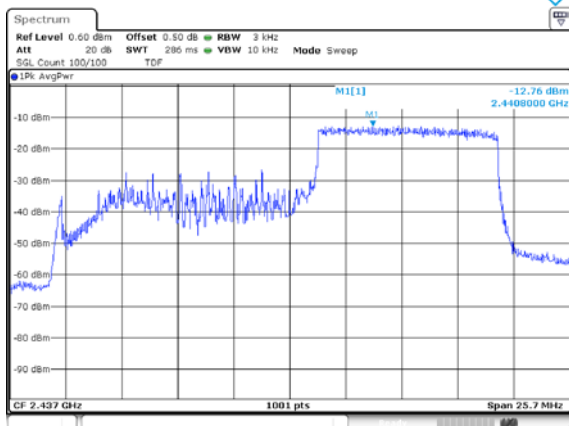


Blank

2 462 MHz


RU 26T offset 4

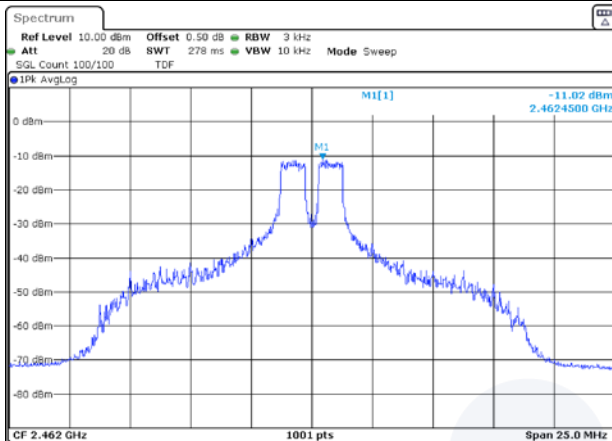


RU 242T offset 61

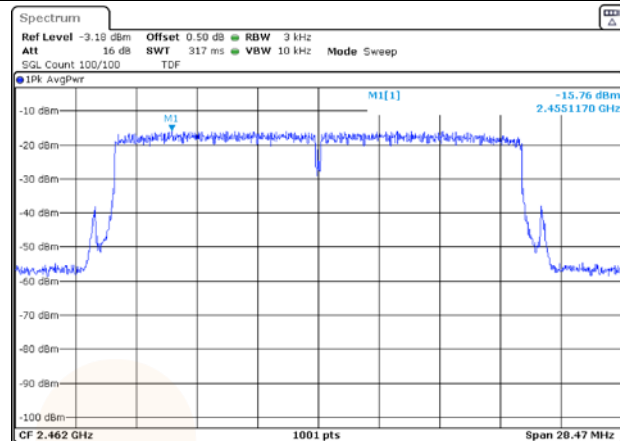


RU 52T offset 37

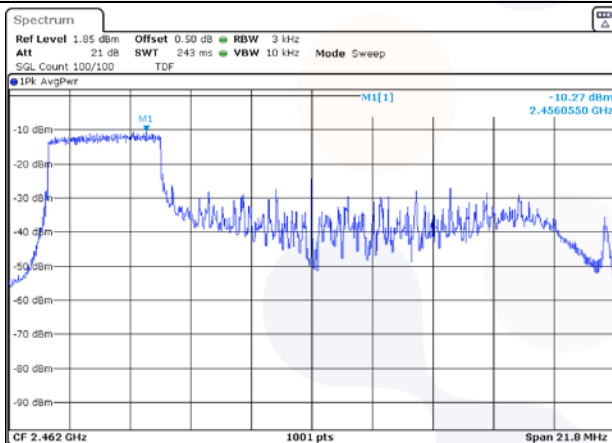

SU

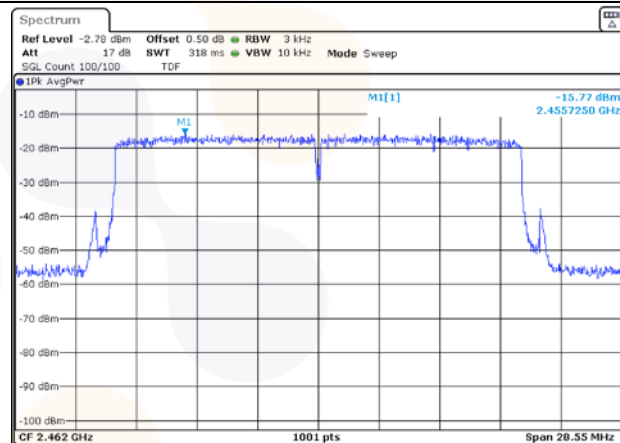


RU 106T offset 54

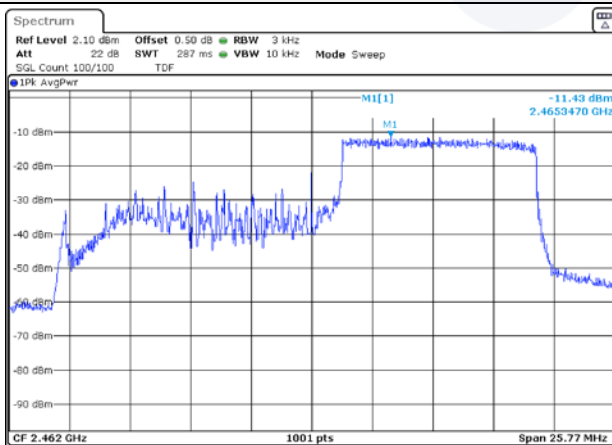


Blank

2 467 MHz


RU 26T offset 4

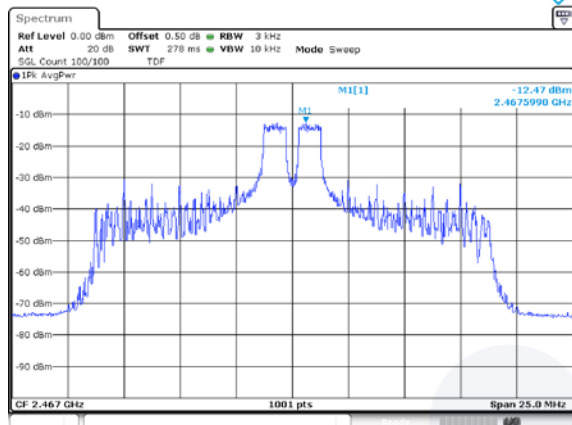


RU 242T offset 61

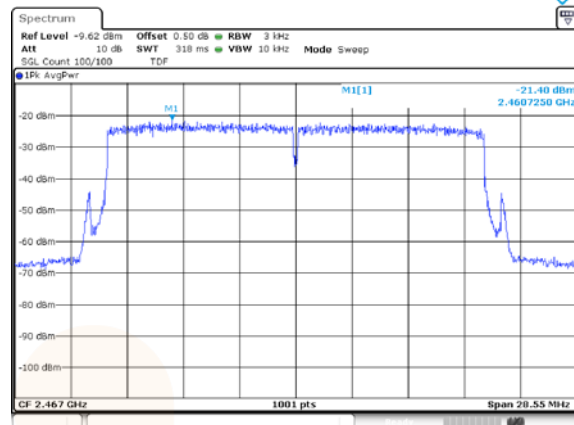


RU 52T offset 38

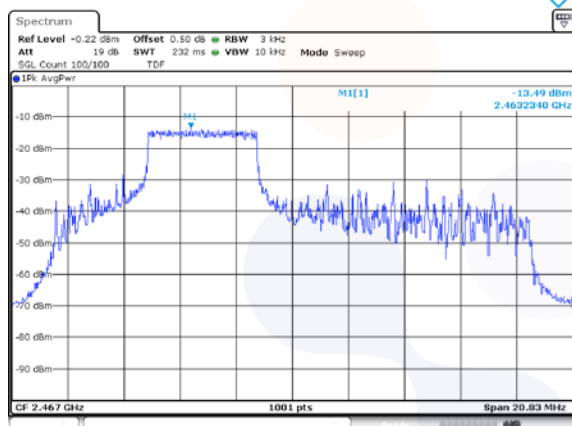

SU

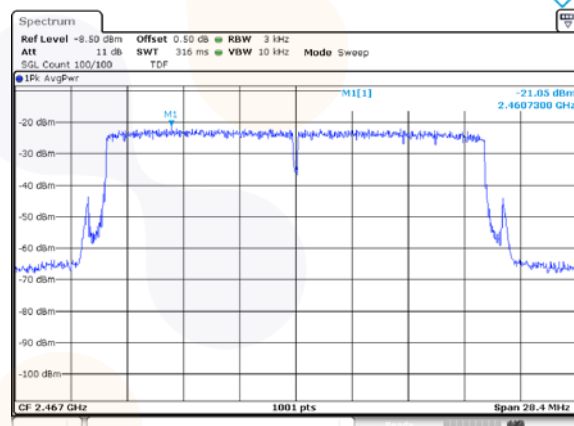


RU 106T offset 53

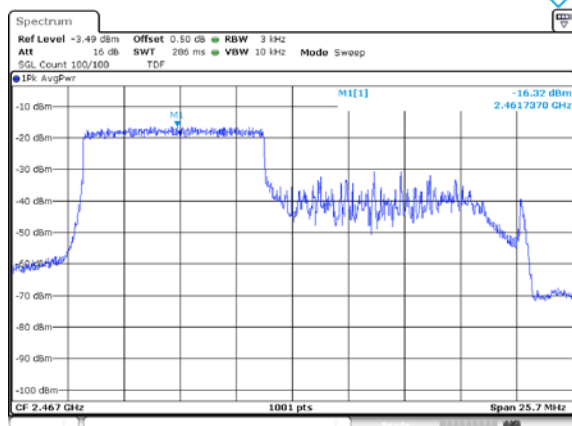


Blank

2 472 MHz


RU 26T offset 4

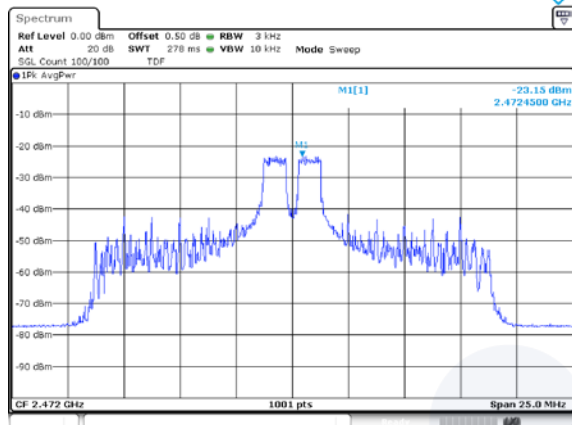


RU 242T offset 61

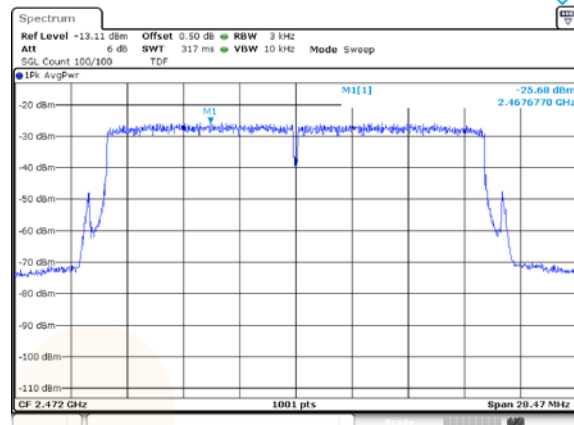


RU 52T offset 37

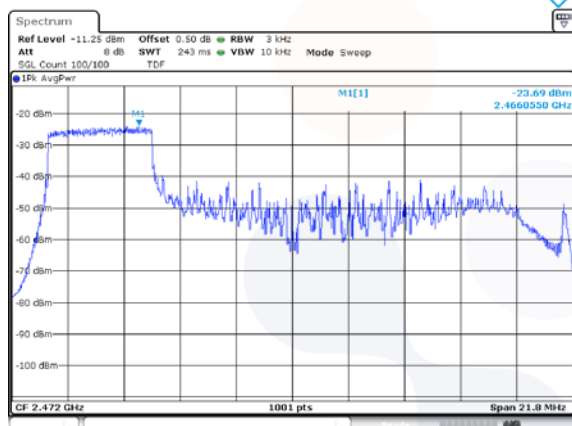

SU

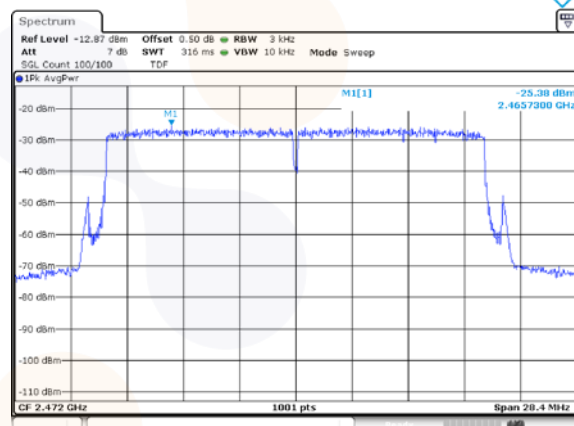

RU 106T offset 53

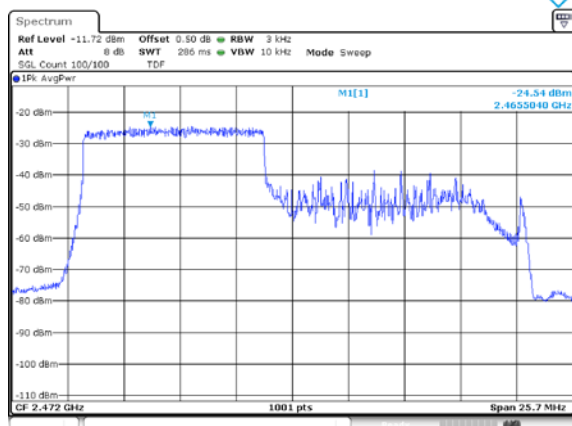


Blank


[DC 12 V]

2 412 MHz


RU 26T offset 4

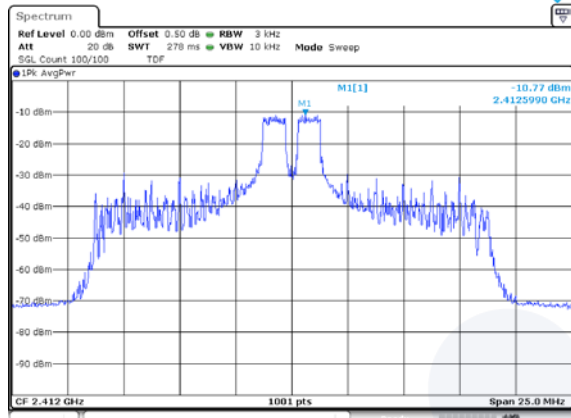


RU 242T offset 61

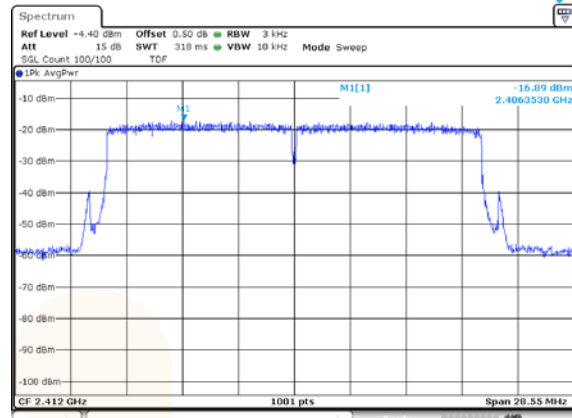


RU 52T offset 37

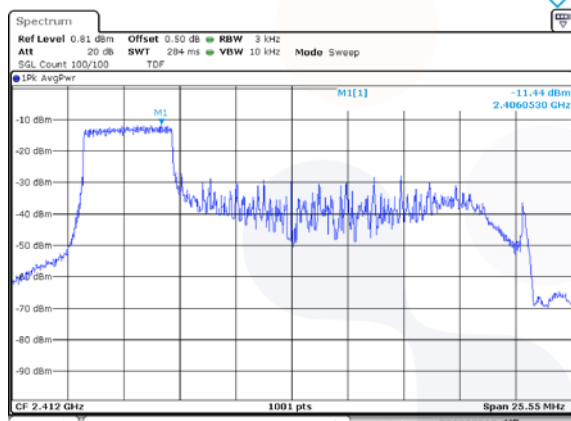

SU

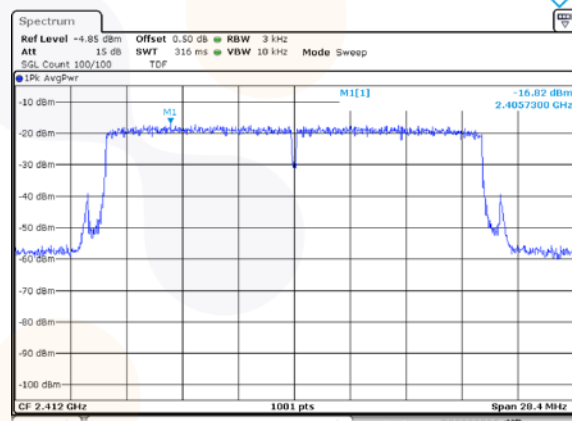


RU 106T offset 53

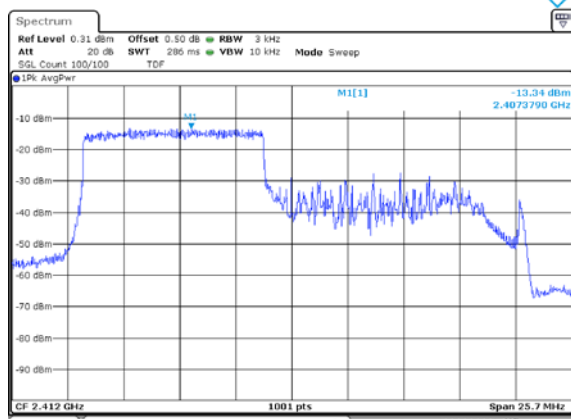


Blank

2 437 MHz


RU 26T offset 4

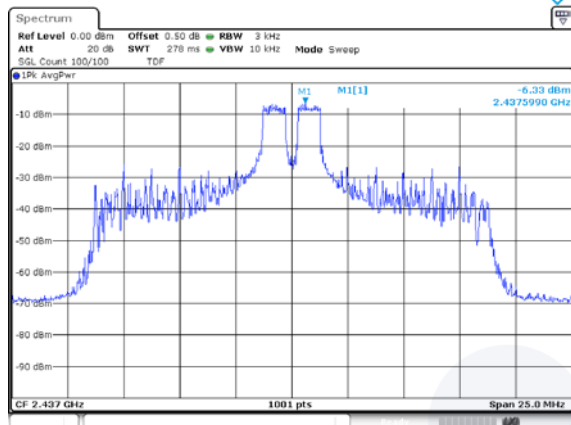


RU 242T offset 61

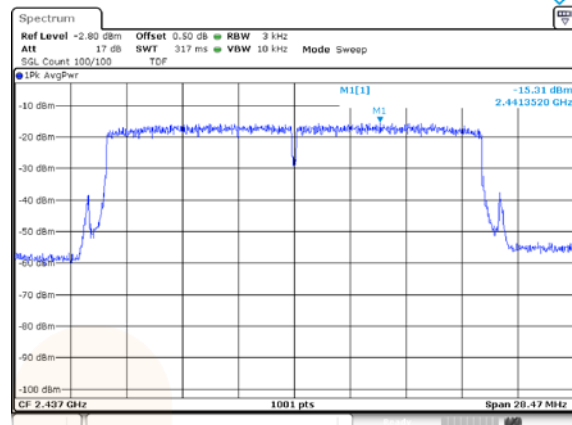


RU 52T offset 40

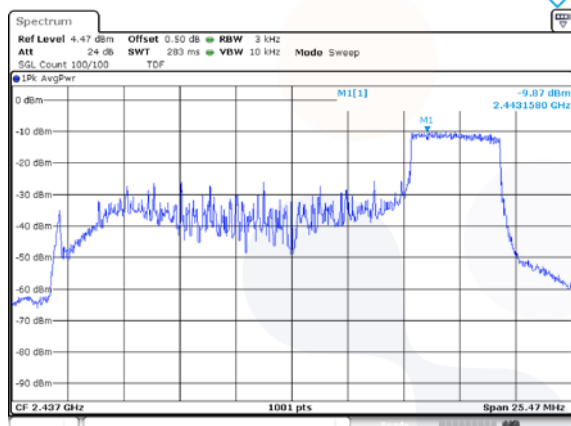

SU

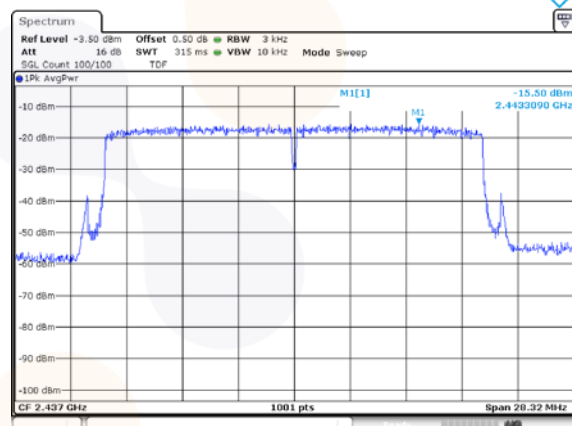


RU 106T offset 54

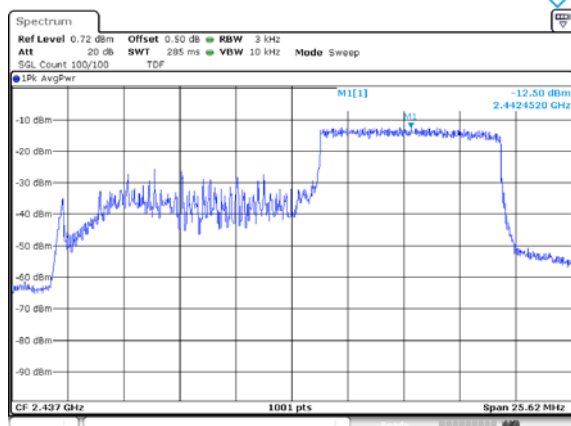


Blank

2 462 MHz


RU 26T offset 4

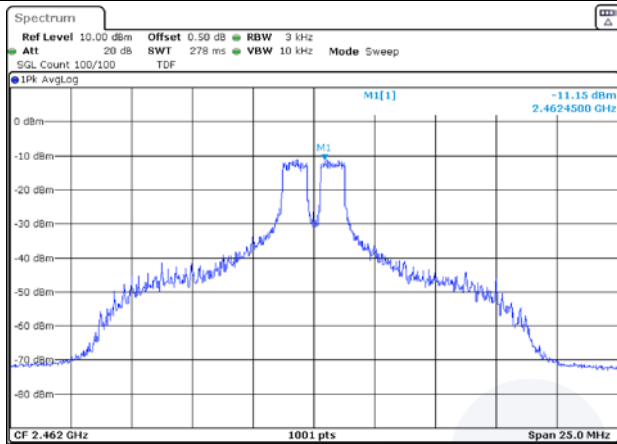


RU 242T offset 61

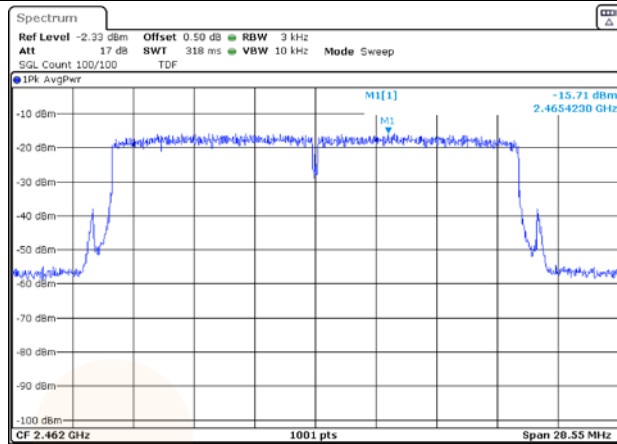


RU 52T offset 37

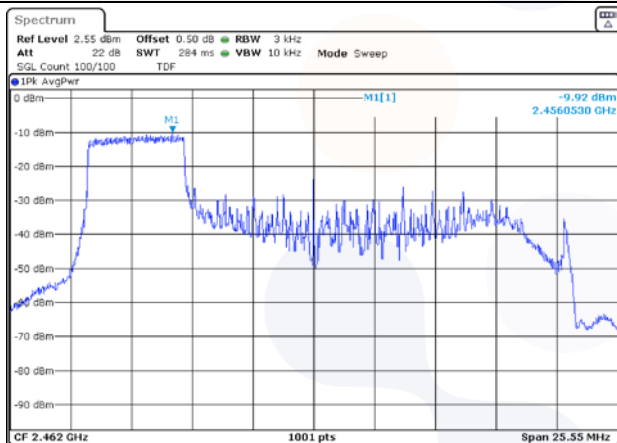

SU

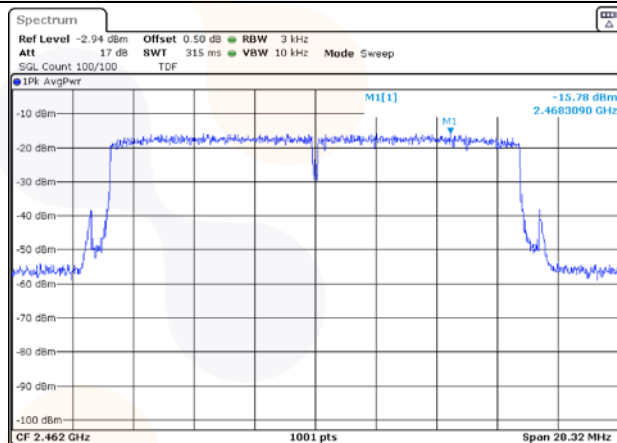


RU 106T offset 54

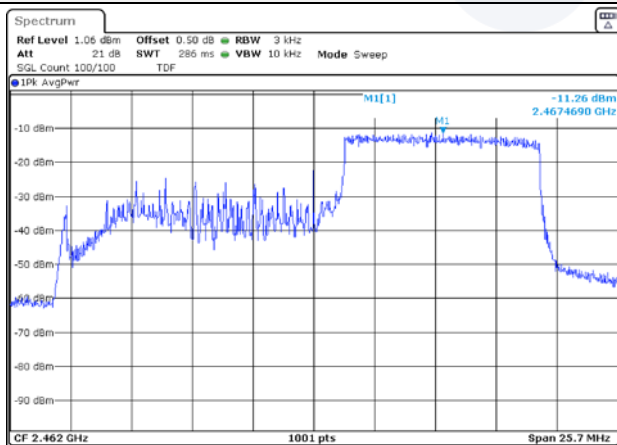


Blank

2 467 MHz


RU 26T offset 4

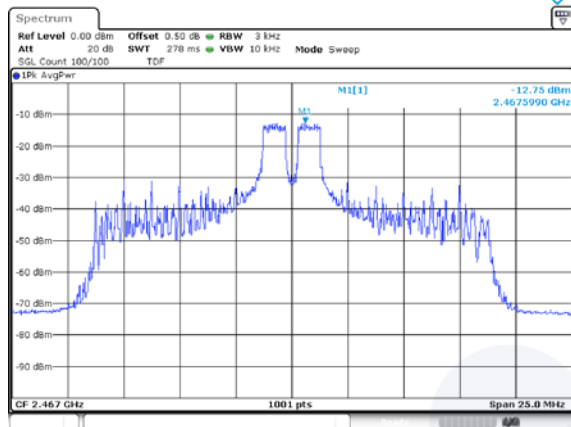


RU 242T offset 61

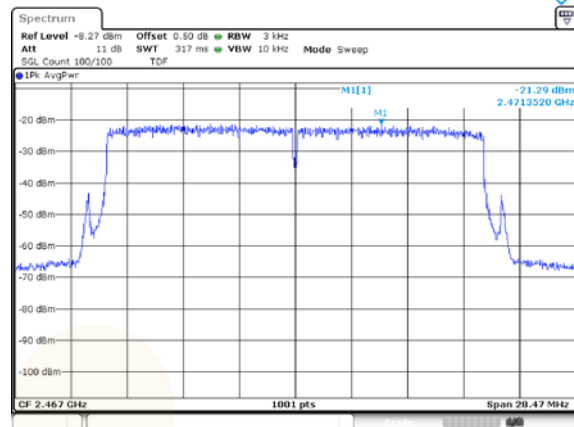


RU 52T offset 37

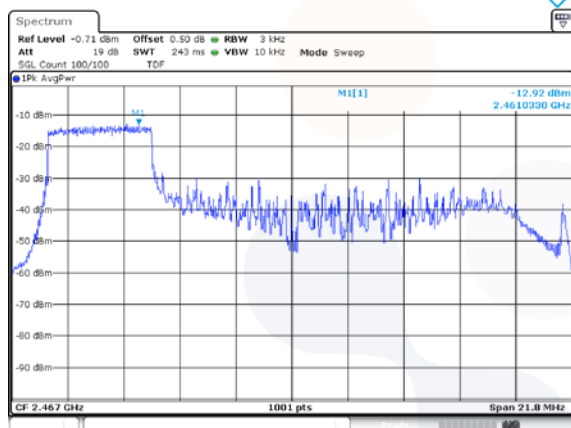

SU

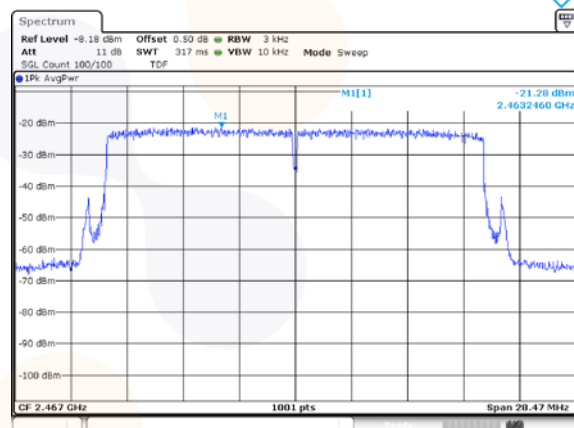


RU 106T offset 53

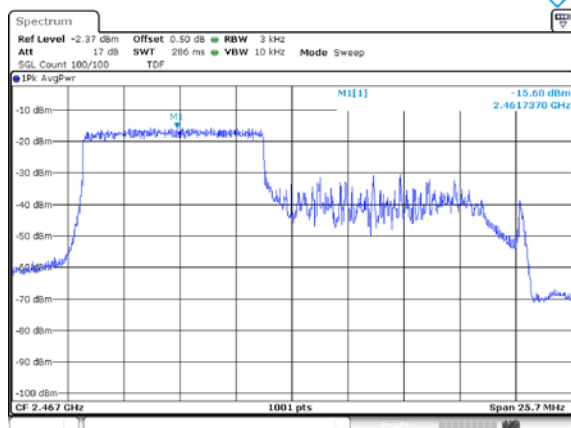


Blank

2 472 MHz


RU 26T offset 4

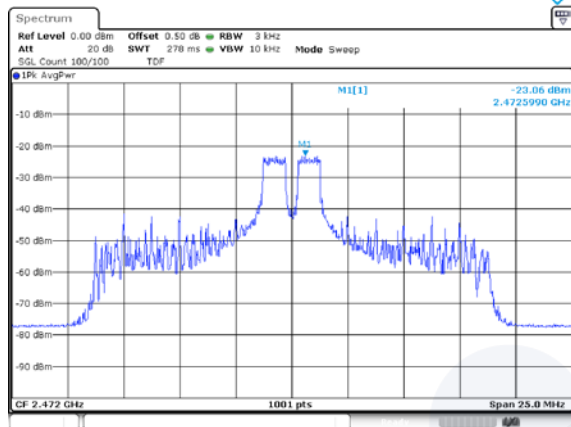


RU 242T offset 61

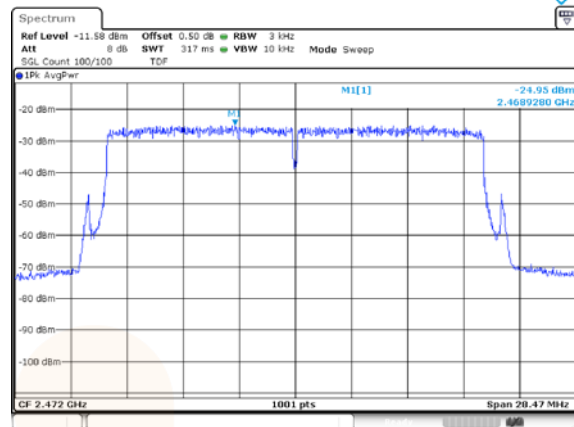


RU 52T offset 37

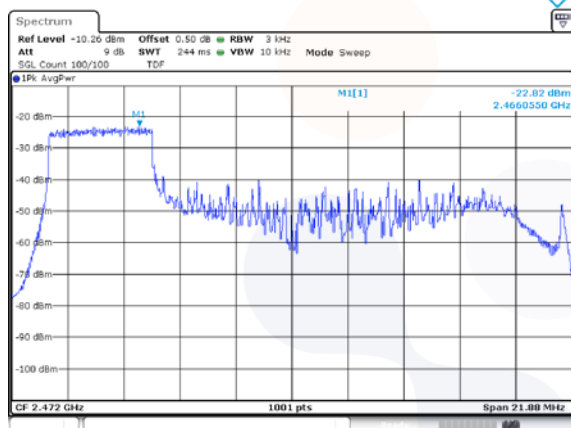

SU

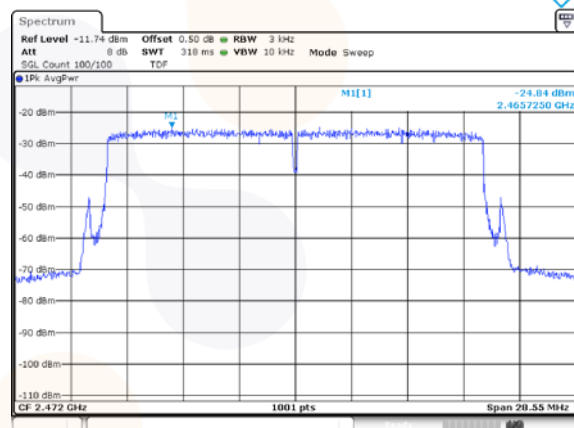


RU 106T offset 53

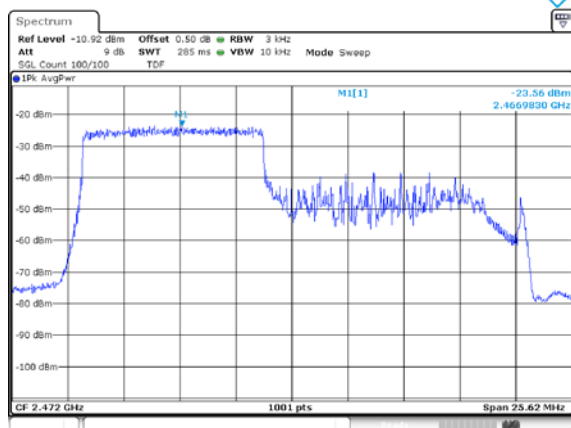

Blank

7.3. 6 dB Bandwidth(DTS Channel Bandwidth) & 99% Bandwidth

Test setup



Limit

According to §15.247(a)(2) and RSS-247(5.2), Systems using digital modulation techniques may operate in the 902–928 MHz, 2 400–2 483.5 MHz, and 5 725–5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test procedure

ANSI C63.10 - Section 11.8.2

Test settings

DTS bandwidth

One of the following procedures may be used to determine the modulated DTS bandwidth.

Option 1

- 1) Set RBW = 100 kHz.
- 2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Sweep = auto couple.
- 6) Allow the trace to stabilize.
- 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Option 2

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB..

Occupied bandwidth (or 99% emission bandwidth)

- ♦ The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- ♦ The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emissions skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- ♦ The detector of the spectrum analyzer shall be set to "Sample". However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or "Max hold") may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- ♦ The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted

Notes: it may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

Test results**[DC 5 V]**

Frequency(MHz)	Tone	RU Offset	6 dB Bandwidth(MHz)	99% Bandwidth(MHz)
2 412	26T	0	2.05	18.18
		4	2.75	16.78
		8	2.15	18.38
	52T	37	17.08	18.03
		38	15.08	16.83
		40	15.83	18.13
	106T	53	17.13	17.98
		54	15.93	18.08
	242T	61	18.98	18.88
	SU	-	18.98	18.88
2 437	26T	0	2.05	18.23
		4	2.75	16.73
		8	2.1	18.33
	52T	37	14.54	18.03
		38	13.84	16.83
		40	16.98	17.93
	106T	53	17.13	17.98
		54	17.13	17.98
	242T	61	18.98	18.83
	SU	-	18.58	18.83
2 462	26T	0	2.10	18.13
		4	2.20	16.73
		8	2.15	18.43
	52T	37	14.54	17.83
		38	13.89	16.68
		40	14.59	18.18
	106T	53	14.64	17.93
		54	17.18	18.08
	242T	61	18.98	18.83
	SU	-	19.03	18.83

Frequency(MHz)	Tone	RU Offset	6 dB Bandwidth(MHz)	99% Bandwidth(MHz)
2 467	26T	0	2.05	18.13
		4	2.75	16.73
		8	2.15	18.38
	52T	37	17.08	17.98
		38	13.89	16.78
		40	17.08	18.13
	106T	53	17.13	17.98
		54	17.18	18.08
	242T	61	19.03	18.83
	SU	-	18.93	18.88
2 472	26T	0	2.05	18.23
		4	2.75	16.73
		8	2.15	18.33
	52T	37	14.54	18.03
		38	13.89	16.93
		40	17.08	18.08
	106T	53	17.13	18.03
		54	17.08	18.08
	242T	61	18.98	18.88
	SU	-	18.93	18.88

[DC 12 V]

Frequency(MHz)	Tone	RU Offset	6 dB Bandwidth(MHz)	99% Bandwidth(MHz)
2 412	26T	0	2.15	18.23
		4	2.75	16.83
		8	2.20	18.33
	52T	37	17.03	17.98
		38	13.89	16.83
		40	15.83	18.08
	106T	53	17.13	18.03
		54	17.13	18.03
	242T	61	19.03	18.88
	SU	-	18.93	18.88
2 437	26T	0	2.10	18.28
		4	2.75	16.73
		8	2.20	18.38
	52T	37	17.03	17.98
		38	12.64	16.73
		40	16.98	18.03
	106T	53	17.13	18.03
		54	17.08	18.03
	242T	61	18.98	18.83
	SU	-	18.88	18.83
2 462	26T	0	2.15	18.13
		4	2.70	16.73
		8	2.15	18.38
	52T	37	17.03	17.98
		38	15.13	16.78
		40	14.59	18.08
	106T	53	14.59	17.88
		54	17.13	18.13
	242T	61	19.03	18.83
	SU	-	18.88	18.88


Frequency(MHz)	Tone	RU Offset	6 dB Bandwidth(MHz)	99% Bandwidth(MHz)
2 467	26T	0	2.05	18.18
		4	2.75	16.83
		8	2.15	18.38
	52T	37	14.54	17.98
		38	8.89	16.73
		40	17.08	18.13
	106T	53	17.13	17.93
		54	17.18	18.13
	242T	61	18.98	18.83
	SU	-	18.98	18.88
2 472	26T	0	2.15	18.23
		4	2.75	16.78
		8	2.15	18.38
	52T	37	14.59	17.93
		38	12.69	16.78
		40	17.08	18.08
	106T	53	17.08	18.03
		54	17.18	18.03
	242T	61	18.98	18.88
	SU	-	19.03	18.88

In order to simplify the report, attached plots were the worst case per RU offset & SU Mode.

6 dB Bandwidth

[DC 5 V]


RU 26T offset 0 / 2 412 MHz

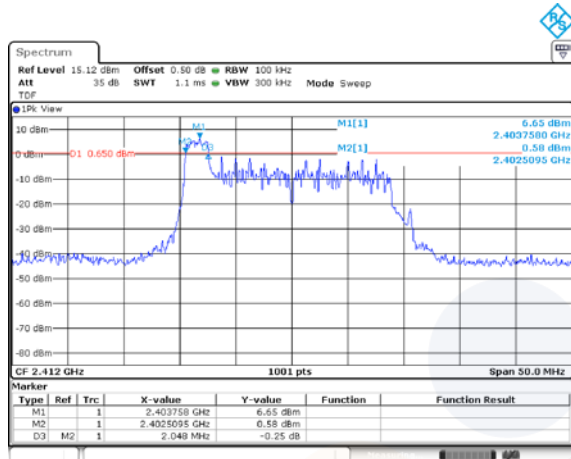


RU 26T offset 0 / 2 437 MHz




RU 26T offset 0 / 2 462 MHz

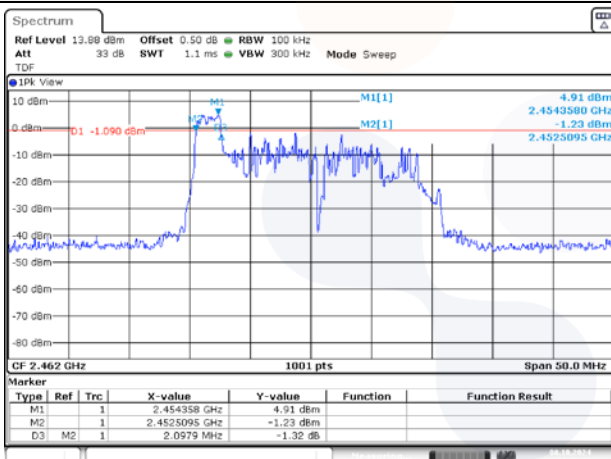

RU 26T offset 0 / 2 467 MHz

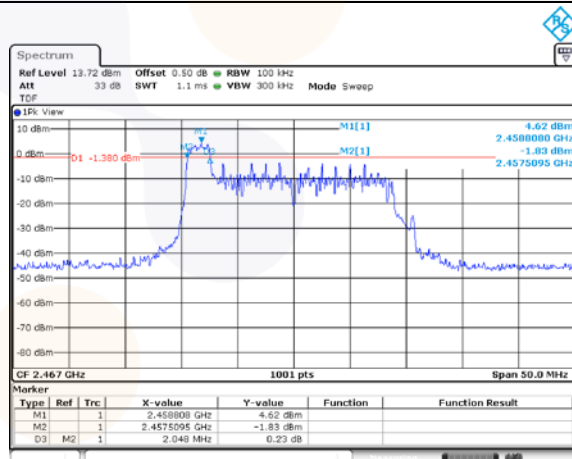


RU 26T offset 0 / 2 472 MHz

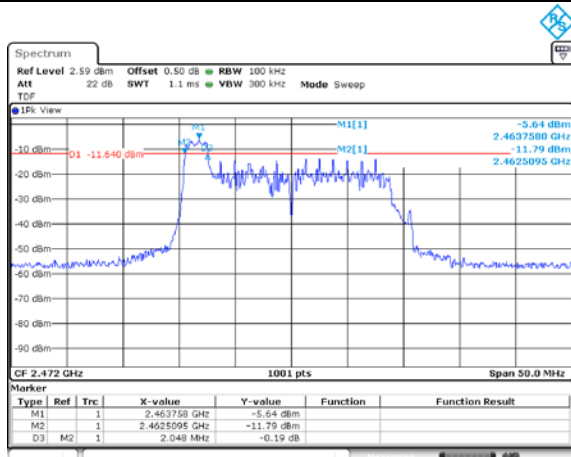


Blank

SU / 2 412 MHz

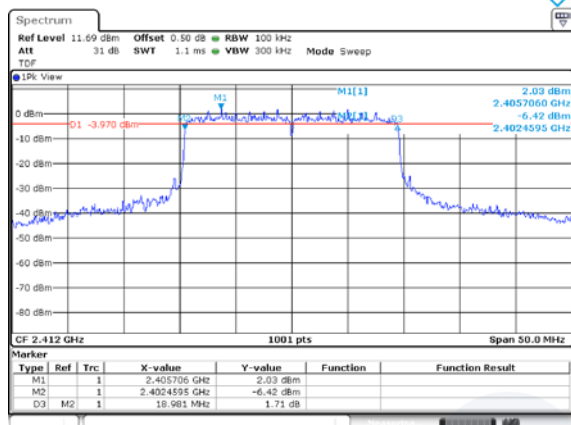


SU / 2 437 MHz

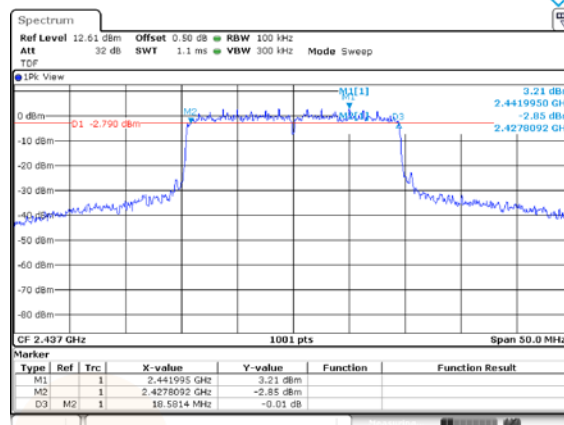


SU / 2 462 MHz



SU / 2 467 MHz

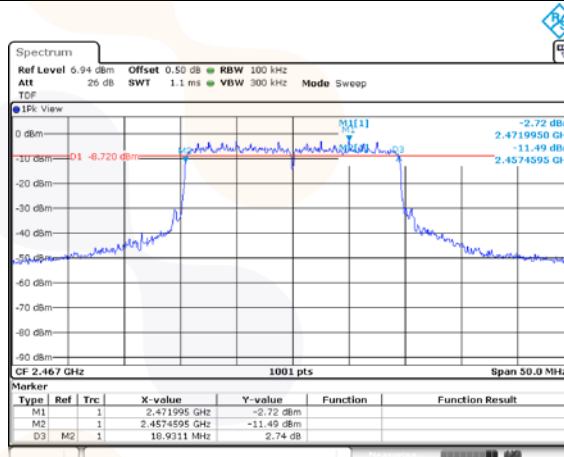

SU / 2 472 MHz

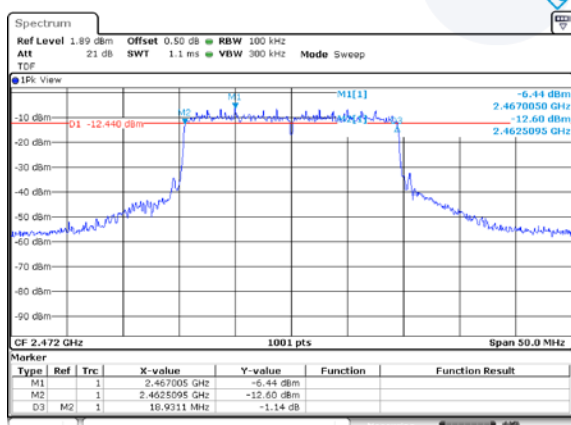

Blank