

# TEST REPORT

of

FCC Part 15 Subpart E §15.407

FCC ID: A3LCCBP730Q

Equipment Under Test : WiFi/BT Combo Module  
Model Name : CCBP730Q  
Applicant : Samsung Electronics Co., Ltd.  
Manufacturer : Samsung Electronics Co., Ltd.  
Date of Receipt : 2019.01.24  
Date of Test(s) : 2019.01.25 ~ 2019.04.30  
Date of Issue : 2019.05.02

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Nancy Park

Date:

2019.05.02

Technical  
Manager:



Hyunchoe You

Date:

2019.05.02

*The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

# INDEX

## Table of contents

|                                                  |     |
|--------------------------------------------------|-----|
| 1. General Information -----                     | 3   |
| 2. Transmitter Radiated Spurious Emissions ----- | 11  |
| 3. 26 dB Bandwidth & 99 % Bandwidth -----        | 49  |
| 4. 6 dB Bandwidth -----                          | 76  |
| 5. Maximum Conducted Output Power -----          | 91  |
| 6. Peak Power Spectral Density -----             | 105 |
| 7. AC Conducted Power Line Emissions -----       | 157 |
| 8. Antenna Requirement -----                     | 161 |

*The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 1. General Information

### 1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

### 1.2. Details of Applicant

Applicant : Samsung Electronics Co., Ltd.

Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, United States, 07058

Contact Person : Chun, Jenni

Phone No. : +1 973 808 6375

### 1.3. Details of Manufacturer

Company : Same as above

Address : Same as above

*The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 1.4. Description of EUT

|                             |                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Kind of Product</b>      |                      | WiFi/BT Combo Module                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Model Name</b>           |                      | CCBP730Q                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Power Supply</b>         |                      | DC 5 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Frequency Range</b>      |                      | 2 402 MHz ~ 2 480 MHz (Bluetooth, Bluetooth Low Energy),<br>2 412 MHz ~ 2 462 MHz (11b/g/n_HT20),<br>2 422 MHz ~ 2 452 MHz (11n_HT40)<br>5 745 MHz ~ 5 825 MHz (Band 3: 11a/n_HT20, 11ac_VHT20),<br>5 755 MHz ~ 5 795 MHz (Band 3: 11n_HT40, 11ac_VHT40),<br>5 775 MHz (Band 3: 11ac_VHT80),<br>5 180 MHz ~ 5 240 MHz (Band 1: 11a/n_HT20, 11ac_VHT20),<br>5 190 MHz ~ 5 230 MHz (Band 1: 11n_HT40, 11ac_VHT40),<br>5 210 MHz (Band 1: 11ac_VHT80),<br>5 260 MHz ~ 5 320 MHz (Band 2A: 11a/n_HT20, 11ac_VHT20),<br>5 270 MHz ~ 5 310 MHz (Band 2A: 11n_HT40, 11ac_VHT40),<br>5 290 MHz (Band 2A: 11ac_VHT80),<br>5 500 MHz ~ 5 720 MHz (Band 2C: 11a/n_HT20, 11ac_VHT20),<br>5 510 MHz ~ 5 710 MHz (Band 2C: 11n_HT40, 11ac_VHT40),<br>5 530 MHz ~ 5 690 MHz (Band 2C: 11ac_VHT80) |
| <b>Modulation Technique</b> |                      | DSSS, OFDM, GFSK, $\pi/4$ DQPSK, 8DPSK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Number of Channels</b>   |                      | 79 channel (Bluetooth), 40 channel (Bluetooth Low Energy),<br>11 channel (11b/g/n_HT20), 7 channel (11n_HT40)<br>5 channel (Band 3: 11a/n_HT20, 11ac_VHT20),<br>2 channel (Band 3: 11n_HT40, 11ac_VHT40), 1 channel (Band 3: 11ac_VHT80),<br>4 channel (Band 1: 11a/n_HT20, 11ac_VHT20),<br>2 channel (Band 1: 11n_HT40, 11ac_VHT40), 1 channel (Band 1: 11ac_VHT80),<br>4 channel (Band 2A: 11a/n_HT20, 11ac_VHT20),<br>2 channel (Band 2A: 11n_HT40, 11ac_VHT40), 1 channel (Band 2A: 11ac_VHT80),<br>9 channel (Band 2C: 11a/n_HT20, 11ac_VHT20),<br>4 channel (Band 2C: 11n_HT40, 11ac_VHT40), 2 channel (Band 2C: 11ac_VHT80)                                                                                                                                                 |
| <b>Antenna Type</b>         |                      | PIFA antenna                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Antenna Gain</b>         | <b>ANT1 (WIFI_R)</b> | 2 400 MHz ~ 2 483.5 MHz: 1.8 dB i,<br>5 150 MHz ~ 5 250 MHz: 1.1 dB i,<br>5 250 MHz ~ 5 350 MHz: 1.6 dB i,<br>5 470 MHz ~ 5 725 MHz: 1.1 dB i,<br>5 725 MHz ~ 5 850 MHz: 0.6 dB i                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                             | <b>ANT2 (WIFI_L)</b> | 2 400 MHz ~ 2 483.5 MHz: 2.8 dB i,<br>5 150 MHz ~ 5 250 MHz: -0.1 dB i,<br>5 250 MHz ~ 5 350 MHz: 1.9 dB i,<br>5 470 MHz ~ 5 725 MHz: 2.4 dB i,<br>5 725 MHz ~ 5 850 MHz: 3.0 dB i                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                             | <b>ANT3</b>          | 2 400 MHz ~ 2 483.5 MHz: -0.1 dB i (Bluetooth, Bluetooth Low Energy)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

## 1.5. Declaration by the Manufacturer

- The EUT is a slave without radar detection and TPC.
- The EUT is not supported TDWR(5.6 - 5.65 GHz) band.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 1.6. Test Equipment List

| Equipment          | Manufacturer                | Model                                | S/N                       | Cal. Date     | Cal. Interval | Cal. Due      |
|--------------------|-----------------------------|--------------------------------------|---------------------------|---------------|---------------|---------------|
| Signal Generator   | Agilent                     | E8257D                               | MY51501169                | Jul. 03, 2018 | Annual        | Jul. 03, 2019 |
| Signal Generator   | R&S                         | SMBV100A                             | 255834                    | Jun. 15, 2018 | Annual        | Jun. 15, 2019 |
| Spectrum Analyzer  | R&S                         | FSV30                                | 103210                    | Dec. 05, 2018 | Annual        | Dec. 05, 2019 |
| Spectrum Analyzer  | Agilent                     | N9020A                               | MY53421758                | Sep. 21, 2018 | Annual        | Sep. 21, 2019 |
| Spectrum Analyzer  | Agilent                     | N9030A                               | US51350132                | Sep. 21, 2018 | Annual        | Sep. 21, 2019 |
| Power Meter        | Anritsu                     | ML2495A                              | 1223004                   | Jun. 12, 2018 | Annual        | Jun. 12, 2019 |
| Power Sensor       | Anritsu                     | MA2411B                              | 1207272                   | Jun. 12, 2018 | Annual        | Jun. 12, 2019 |
| Attenuator         | MCLI                        | FAS-23-20                            | 23834                     | Jun. 12, 2018 | Annual        | Jun. 12, 2019 |
| Low Pass Filter    | Mini-Circuits               | NLP-1200+                            | V 8979400903-2            | Feb. 19, 2019 | Annual        | Feb. 19, 2020 |
| High Pass Filter   | Wainwright Instrument GmbH  | WHKX6.0/18G-10SS                     | 51                        | Jun. 11, 2018 | Annual        | Jun. 11, 2019 |
| High Pass Filter   | Wainwright Instrument GmbH  | WHNX7.5/26.5G-6SS                    | 11                        | May 27, 2018  | Annual        | May 27, 2019  |
| DC Power Supply    | R&S                         | HMP2020                              | 019258024                 | Nov. 06, 2018 | Annual        | Nov. 06, 2019 |
| Preamplifier       | H.P.                        | 8447F                                | 2944A03909                | Aug. 07, 2018 | Annual        | Aug. 07, 2019 |
| Preamplifier       | Agilent                     | 8449B                                | 3008A01932                | Feb. 22, 2019 | Annual        | Feb. 22, 2020 |
| Preamplifier       | MITEQ Inc.                  | JS44-18004000-35-8P                  | 1546891                   | May 13, 2018  | Annual        | May 13, 2019  |
| Loop Antenna       | Schwarzbeck Mess-Elektronik | FMZB 1519                            | 1519-039                  | Aug. 23, 2017 | Biennial      | Aug. 23, 2019 |
| Bilog Antenna      | Schwarzbeck Mess-Elektronik | VULB 9163                            | 01126                     | Mar. 26, 2018 | Biennial      | Mar. 26, 2020 |
| Horn Antenna       | R&S                         | HF906                                | 100326                    | Feb. 14, 2018 | Biennial      | Feb. 14, 2020 |
| Horn Antenna       | Schwarzbeck Mess-Elektronik | BBHA 9170                            | BBHA9170431               | Sep. 10, 2018 | Biennial      | Sep. 10, 2020 |
| Test Receiver      | R&S                         | ESU26                                | 100109                    | Jan. 31, 2019 | Annual        | Jan. 31, 2020 |
| Test Receiver      | R&S                         | ESCI 7                               | 100911                    | Feb. 20, 2019 | Annual        | Feb. 20, 2020 |
| Two-Line V-Network | R&S                         | ENV216                               | 100190                    | May 14, 2018  | Annual        | May 14, 2019  |
| Shield Room        | SY Corporation              | L x W x H<br>(6.5 m x 3.5 m x 3.5 m) | N/A                       | N.C.R.        | N/A           | N.C.R.        |
| Turn Table         | Innco systems GmbH          | DS 1200 S                            | N/A                       | N.C.R.        | N/A           | N.C.R.        |
| Controller         | Innco systems GmbH          | CONTROLLER<br>CO3000-4P              | CO3000/963/383<br>30516/L | N.C.R.        | N/A           | N.C.R.        |
| Antenna Mast       | Innco systems GmbH          | MA4640-XP-ET                         | MA4640/536/383<br>30516/L | N.C.R.        | N/A           | N.C.R.        |
| Anechoic Chamber   | SY Corporation              | L x W x H<br>(9.6 m x 6.4 m x 6.6 m) | N/A                       | N.C.R.        | N/A           | N.C.R.        |
| Coaxial Cable      | SUCOFLEX                    | 104 (3 m)                            | MY3258414                 | Jan. 04, 2019 | Semi-annual   | Jul. 04, 2019 |
| Coaxial Cable      | SUCOFLEX                    | 104 (10 m)                           | MY3145814                 | Jan. 04, 2019 | Semi-annual   | Jul. 04, 2019 |
| Coaxial Cable      | Rosenberger                 | LA1-C006-1500                        | 131014 01/20              | Feb. 28, 2019 | Semi-annual   | Aug. 28, 2019 |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 1.7. Summary of Test Result

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 15 Subpart E                                                |                                         |          |
|----------------------------------------------------------------------------------------|-----------------------------------------|----------|
| Section                                                                                | Test Item(s)                            | Result   |
| 15.205(a)<br>15.209(a)<br>15.407(b)(1)<br>15.407(b)(2)<br>15.407(b)(3)<br>15.407(b)(4) | Transmitter Radiated Spurious Emissions | Complied |
| 15.407(a)                                                                              | 26 dB Bandwidth & 99 % Bandwidth        | Complied |
| 15.407(e)                                                                              | 6 dB Bandwidth                          | Complied |
| 15.407(a)(1)<br>15.407(a)(2)<br>15.407(a)(3)                                           | Maximum Conducted Output Power          | Complied |
| 15.407(a)(1)<br>15.407(a)(2)<br>15.407(a)(3)                                           | Peak Power Spectral Density             | Complied |
| 15.207                                                                                 | AC Power Line Conducted Emission        | Complied |

## 1.8. Test Procedure(s)

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 were used in the measurement of the DUT.

## 1.9. Sample Calculation

Where relevant, the following sample calculation is provided:

### 1.9.1. Conducted Test

Offset value (dB) = Attenuator (dB) + Cable loss (dB)

### 1.9.2. Radiation Test

Field strength level (dB $\mu$ V/m) = Measured level (dB $\mu$ V) + Antenna factor (dB) + Cable loss (dB) - Amplifier gain (dB)

*The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

### 1.10. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Parameter                          | Uncertainty (dB) |
|------------------------------------|------------------|
| RF Output Power                    | $\pm 0.34$ dB    |
| Occupied Bandwidth                 | $\pm 9.66$ kHz   |
| Power Spectral Density             | $\pm 0.41$ dB    |
| Conducted Spurious Emission        | $\pm 0.76$ dB    |
| AC Conducted Emission              | $\pm 3.30$ dB    |
| Radiated Emission, 9 kHz to 30 MHz | $\pm 3.59$ dB    |
| Radiated Emission, below 1 GHz     | $\pm 5.88$ dB    |
| Radiated Emission, above 1 GHz     | $\pm 5.94$ dB    |

Uncertainty figures are valid to a confidence level of 95 %.

### 1.11. Test Report Revision

| Revision | Report number          | Date of Issue | Description                                                                                                                                |
|----------|------------------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| 0        | F690501/RF-RTL013705   | 2019.04.18    | Initial                                                                                                                                    |
| 1        | F690501/RF-RTL013705-1 | 2019.04.30    | Added Measurement Uncertainty of RF conducted test and 6 dB bandwidth test result of which antenna and Corrected test equipment Cal. Date. |
| 2        | c                      | 2019.05.02    | Corrected the frequency of 802.11ac_VHT80.                                                                                                 |

*The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 1.12. Duty Cycle of EUT

Regarding to KDB 789033 D02 v02r01, B, the maximum duty cycles of all modes were investigated and set the spectrum analyzer as below

Set RBW  $\geq$  EBW if possible; otherwise, set RBW to the largest available value, Set VBW  $\geq$  RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100.


| Mode       | Data Rate (Mbps) | Duty Cycle (%) | Correction factor (dB) |
|------------|------------------|----------------|------------------------|
| 11a        | 6                | 95.30          | 0.21                   |
| 11n_HT20   | MCS0             | 95.00          | 0.22                   |
| 11n_HT40   | MCS0             | 90.41          | 0.44                   |
| 11ac_VHT80 | MCS0             | 82.05          | 0.86                   |

### Remark;

- As measured duty cycles of EUT, all of mode and data rate keep constant period and are converted to log scale (power averaging) to compensate correction factor to result of average test items.
- Duty cycle (%) = (Tx on time / Tx on + off time) x 100
- Correction factor (dB) = 10 log (1 / Duty cycle)

### - Test plots

802.11a

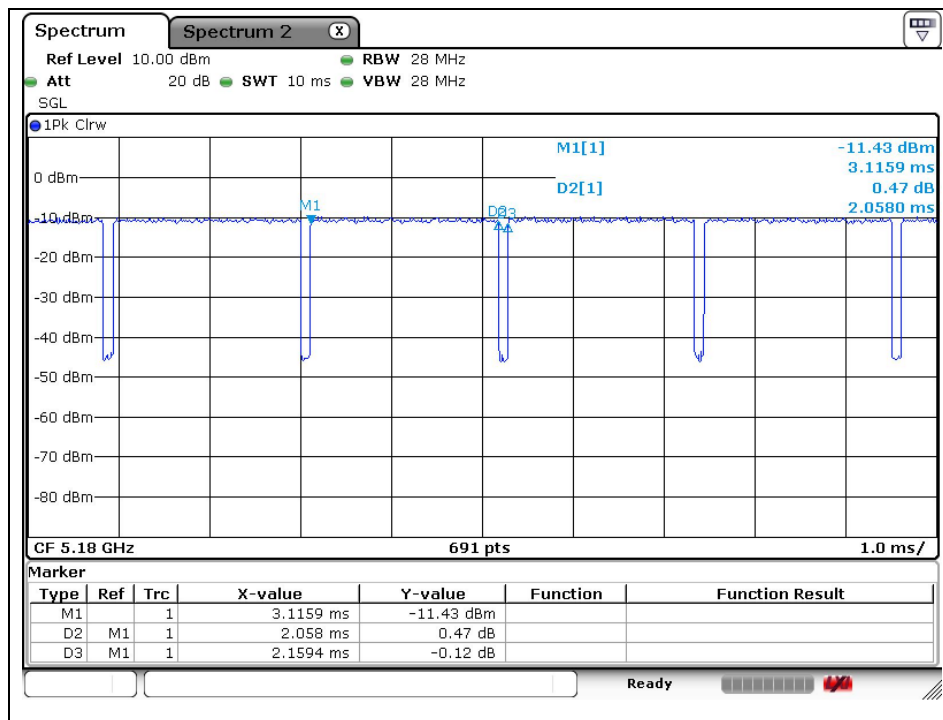

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 802.11n\_HT20

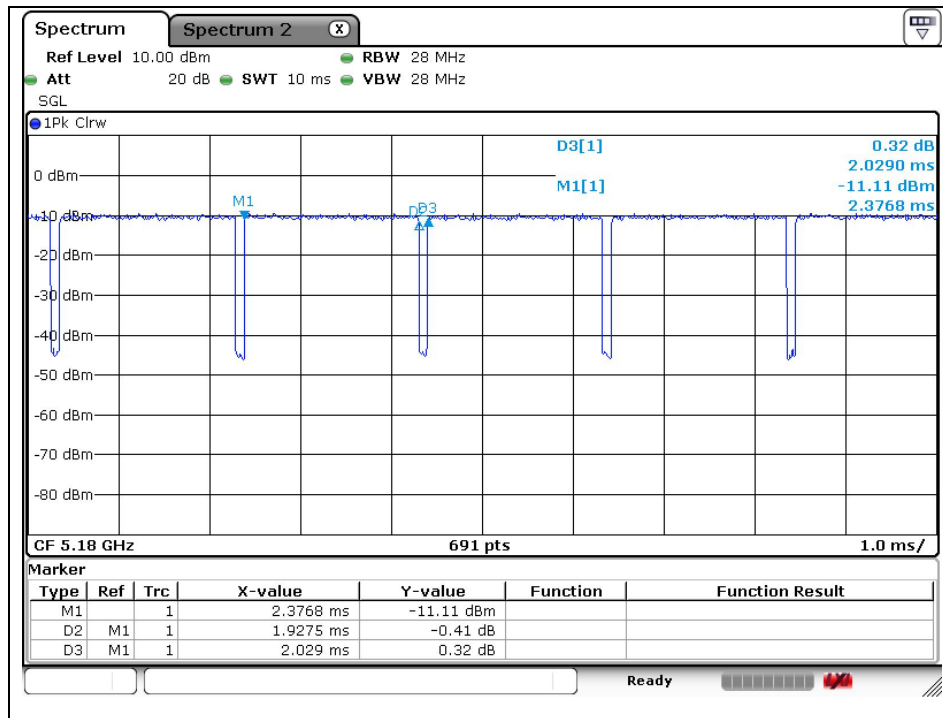

## 802.11n\_HT40

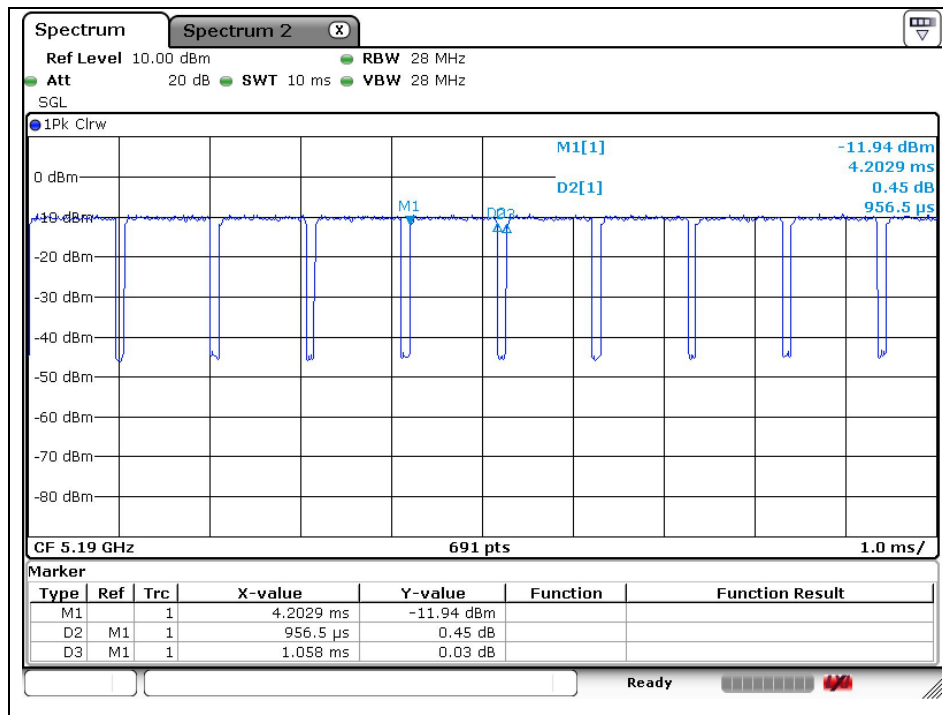

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

802.11ac\_VHT80

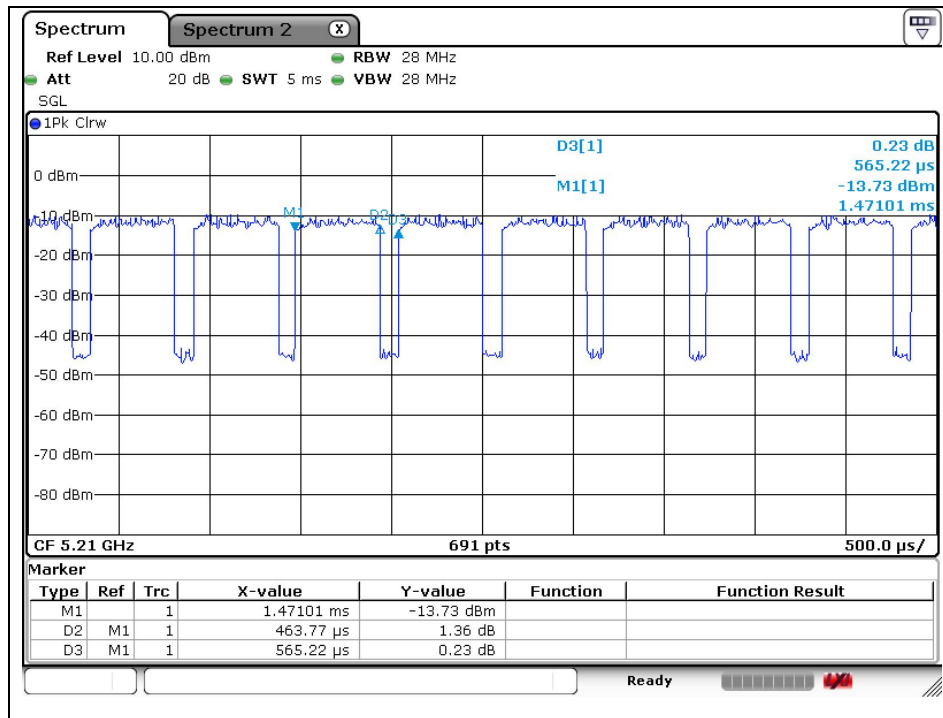

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

## 2. Transmitter Radiated Spurious Emissions


### 2.1. Test Setup

#### 2.1.1. Transmitter Radiated Spurious Emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz emissions.

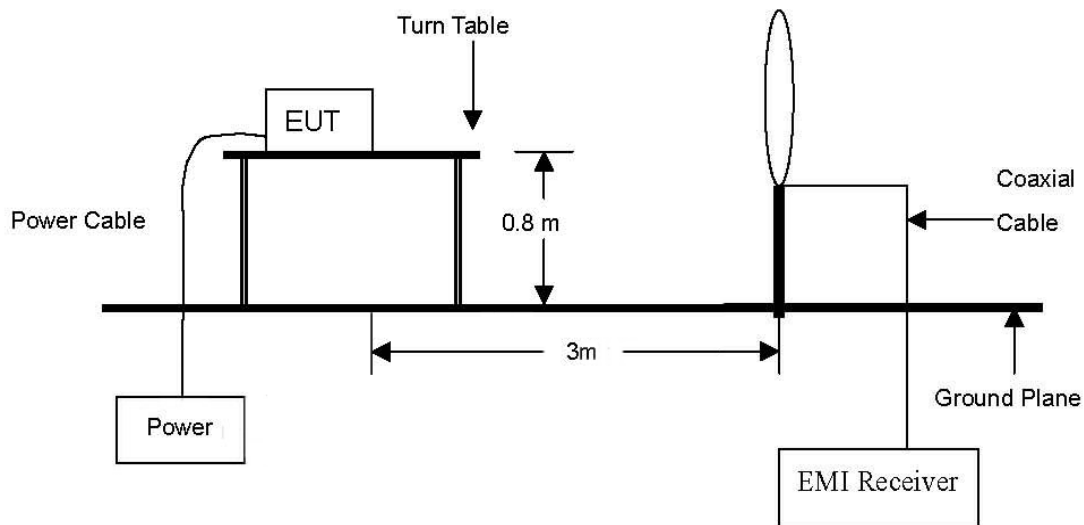

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

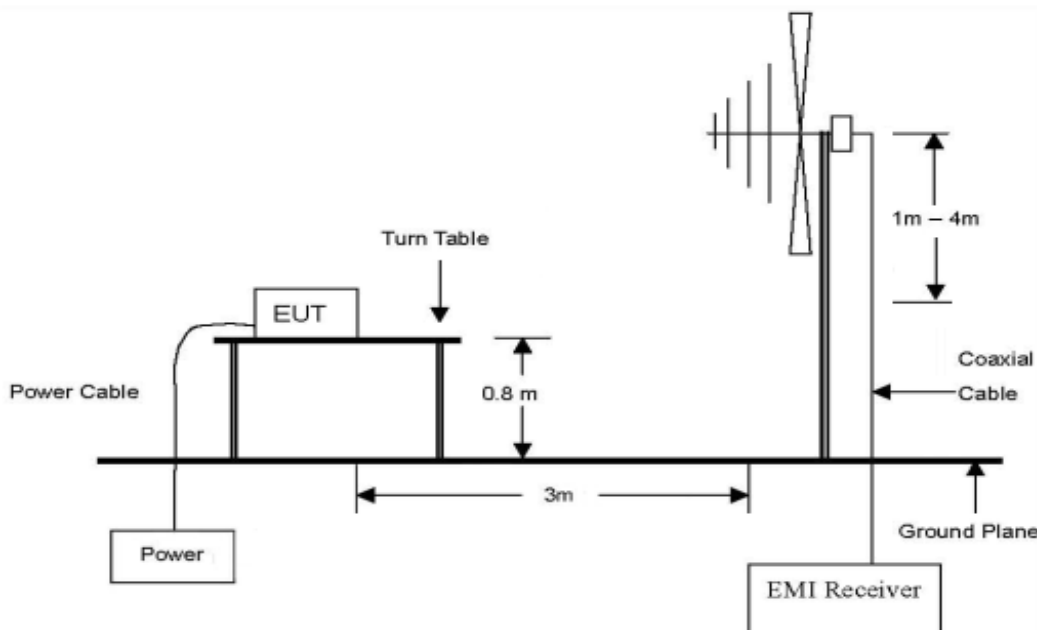

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

The diagram below shows the test setup that is utilized to make the measurements for emission. The spurious emissions were investigated from 1 GHz to the 10th harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

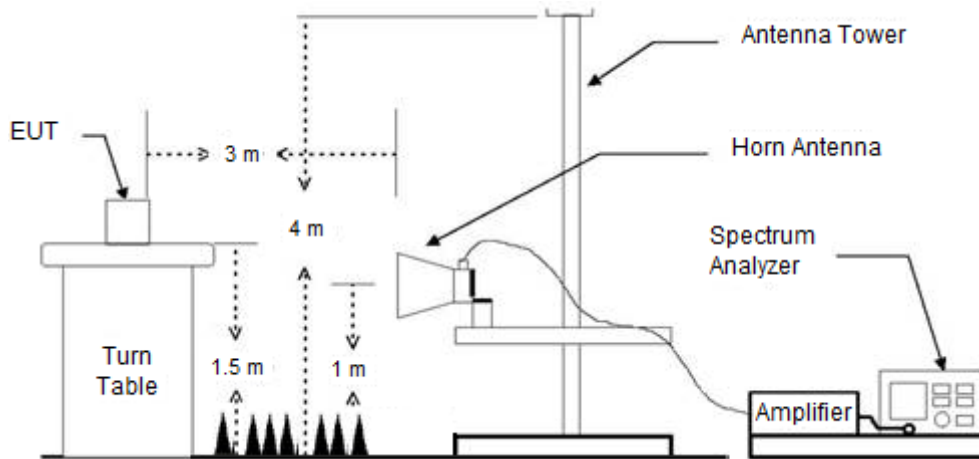

*The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 2.2. Limit

According to § 15.407(b)

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dB m/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dB m/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dB m/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dB m/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dB m/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dB m/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dB m/MHz at the band edge.

According to § 15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency<br>(MHz) | Field Strength<br>( $\mu\text{V/m}$ ) | Measurement Distance<br>(Meters) |
|--------------------|---------------------------------------|----------------------------------|
| 0.009-0.490        | 2 400/F(kHz)                          | 300                              |
| 0.490-1.705        | 24 000/F(kHz)                         | 30                               |
| 1.705-30.0         | 30                                    | 30                               |
| 30-88              | 100**                                 | 3                                |
| 88-216             | 150**                                 | 3                                |
| 216-960            | 200**                                 | 3                                |
| Above 960          | 500                                   | 3                                |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

*The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 2.3. Test Procedures

Radiated spurious emissions from the EUT were measured according to the dictates in section G of KDB 789033 D02 v02r01 and ANSI C63.10-2013.

### 2.3.1. Test Procedures for emission below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum Hold Mode.

### 2.3.2. Test Procedures for emission from above 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site below 1 GHz and 1.5 meter above the ground at a 3 meter anechoic chamber test site above 1 GHz. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a bi-log antenna, a horn antenna and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

*The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

# Note;

All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

- II.G.4. Unwanted emissions measurements below 1 GHz.

Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

- II.G.5. Unwanted maximum emissions measurements above 1 GHz.

Peak emission levels are measured by setting the analyzer as follows:

Set to RBW = 1 MHz, VBW ≥ 3 MHz, Detector = Peak, Sweep time = auto, Trace mode= Max hold.

- II.G.6. Average unwanted emissions measurements above 1 GHz.

Set to RBW = 1 MHz, VBW ≥ 3 MHz, Detector = power averaging (rms), Averaging type = power averaging (rms), Sweep time = auto, Perform a trace average of at least 100 traces If the transmission is continuous, If the transmission is not continuous, the number of traces shall be increased by a factor of 1/x, where x is the duty cycle. For example, with 50 % duty cycle, at least 200 traces shall be averaged.

If tests are performed with the EUT transmitting at a duty cycle less than 98 %, a correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle. The correction factor is computed as follows:

- If power averaging (rms) mode was used in II.G.6.c)(iv), the correction factor is  $10 \log (1/x)$ , where x is the duty cycle. For example, if the transmit duty cycle was 50 %, then 3 dB must be added to the measured emission levels.

- To get a maximum emission level from the EUT, the EUT is manipulated through three orthogonal planes (X, Y, Z). Worst orthogonal plan of EUT is Y – axis during radiation test.

*The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 2.4. Test result

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

### 2.4.1. Radiated Spurious Emission below 1 000 MHz


The frequency spectrum from 9 kHz to 1 000 MHz was investigated. All reading values are peak values.

| Radiated Emissions |                |             | Ant. | Correction Factors |               | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|---------------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP + CL (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 69.85              | 41.00          | Peak        | V    | 9.45               | -26.13        | 24.32           | 40.00          | 15.68       |
| 100.69             | 38.30          | Peak        | V    | 12.13              | -25.48        | 24.95           | 43.50          | 18.55       |
| 146.52             | 43.20          | Peak        | V    | 8.20               | -24.87        | 26.53           | 43.50          | 16.97       |
| 234.99             | 41.10          | Peak        | H    | 12.20              | -24.18        | 29.12           | 46.00          | 16.88       |
| 707.63             | 43.20          | Peak        | H    | 19.78              | -22.22        | 40.76           | 46.00          | 5.24        |
| 838.37             | 42.10          | Peak        | H    | 21.38              | -22.20        | 41.28           | 46.00          | 4.72        |
| Above 900.00       | Not detected   | -           | -    | -                  | -             | -               | -              | -           |

#### Remark;

- Spurious emissions for all channels and modes were investigated and almost the same below 1 GHz.
- Reported spurious emissions are in **11a (Band 2C) / 6Mbps / Low channel.** as worst case among other modes.
- Radiated spurious emission measurement as below.  
(Actual = Reading + AF + AMP + CL)
- According to §15.31(o), emission levels are not report much lower than the limits by over 20 dB.

#### - Test plot

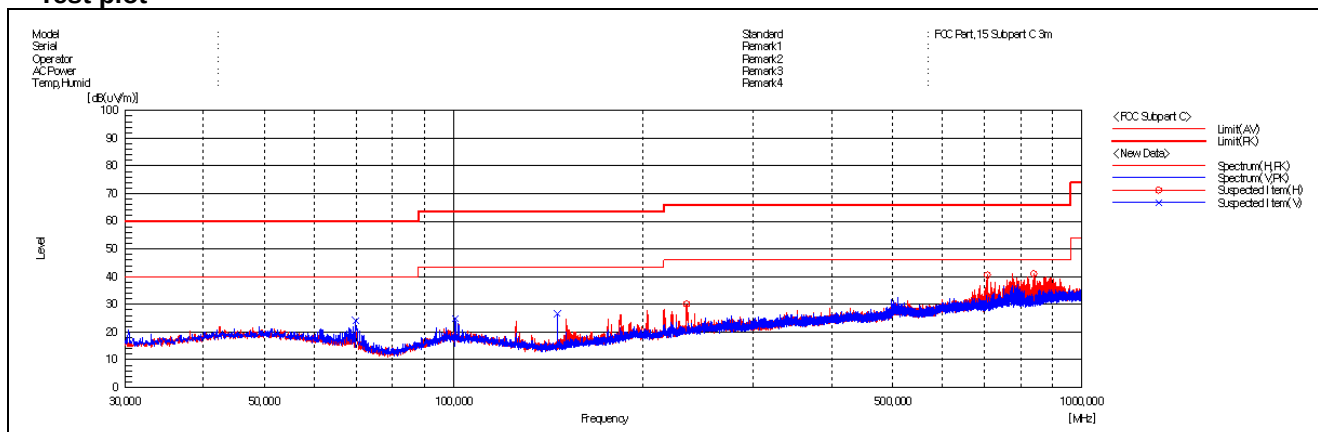

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 2.4.2. Radiated Spurious Emission above 1 000 MHz

### OFDM: 802.11a (6 Mbps) Band 1\_ANT 1+ANT 2

#### A. Low Channel (5 180 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 500.00          | 45.20                | Peak        | V    | 31.80              | -23.35      | -       | 53.65                 | 74.00                | 20.35       |
| *4 500.00          | 34.50                | Average     | V    | 31.80              | -23.35      | 0.21    | 43.16                 | 54.00                | 10.84       |
| *4 959.34          | 46.07                | Peak        | V    | 32.82              | -22.73      | -       | 56.16                 | 74.00                | 17.84       |
| *5 098.18          | 34.97                | Average     | V    | 33.29              | -22.49      | 0.21    | 45.98                 | 54.00                | 8.02        |
| *5 150.00          | 48.47                | Peak        | V    | 33.30              | -22.58      | -       | 59.19                 | 74.00                | 14.81       |
| *5 150.00          | 37.43                | Average     | V    | 33.30              | -22.58      | 0.21    | 48.36                 | 54.00                | 5.64        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

#### B. Middle Channel (5 220 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

#### C. High Channel (5 240 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## OFDM: 802.11a (6 Mbps) Band 2A\_ANT 1+ANT 2

### A. Low Channel (5 260 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

### B. Middle Channel (5 300 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

### C. High Channel (5 320 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *5 350.00          | 45.87                | Peak        | V    | 33.70              | -22.16      | -       | 57.41                 | 74.00                | 16.59       |
| *5 350.00          | 35.48                | Average     | V    | 33.70              | -22.16      | 0.21    | 47.23                 | 54.00                | 6.77        |
| *5 406.60          | 45.56                | Peak        | V    | 33.61              | -22.26      | -       | 56.91                 | 74.00                | 17.09       |
| *5 382.60          | 35.45                | Average     | V    | 33.63              | -22.26      | 0.21    | 47.03                 | 54.00                | 6.97        |
| *5 460.00          | 42.72                | Peak        | V    | 33.74              | -21.97      | -       | 54.49                 | 74.00                | 19.51       |
| *5 460.00          | 33.79                | Average     | V    | 33.74              | -21.97      | 0.21    | 45.77                 | 54.00                | 8.23        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## OFDM: 802.11a (6 Mbps) Band 2C\_ANT 1+ANT 2

### A. Low Channel (5 500 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *5 350.00          | 43.10                | Peak        | V    | 33.70              | -22.16      | -       | 54.64                 | 74.00                | 19.36       |
| *5 350.00          | 34.11                | Average     | V    | 33.70              | -22.16      | 0.21    | 45.86                 | 54.00                | 8.14        |
| *5 381.52          | 47.26                | Peak        | V    | 33.64              | -22.25      | -       | 58.65                 | 74.00                | 15.35       |
| *5 447.52          | 36.12                | Average     | V    | 33.70              | -21.98      | 0.21    | 48.05                 | 54.00                | 5.95        |
| *5 460.00          | 45.73                | Peak        | V    | 33.74              | -21.97      | -       | 57.50                 | 74.00                | 16.50       |
| *5 460.00          | 36.32                | Average     | V    | 33.74              | -21.97      | 0.21    | 48.30                 | 54.00                | 5.70        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

### B. Middle Channel (5 580 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

### C. High Channel (5 700 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

**OFDM: 802.11a (6 Mbps) Band 3\_ANT 1+ANT 2**
**A. Low Channel (5 745 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 5 632.81           | 45.71                | Peak        | V    | 33.70              | -21.87      |         | 57.54                 | 68.23                | 10.69       |
| 5 663.75           | 45.48                | Peak        | V    | 33.76              | -21.84      |         | 57.40                 | 78.40                | 21.00       |
| 5 706.57           | 46.11                | Peak        | V    | 33.90              | -21.61      |         | 58.40                 | 107.07               | 48.67       |
| 5 724.78           | 55.92                | Peak        | V    | 33.90              | -21.68      |         | 68.14                 | 121.73               | 53.59       |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

**B. Middle Channel (5 785 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

**C. High Channel (5 825 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 5 852.36           | 45.63                | Peak        | V    | 34.01              | -21.49      |         | 58.15                 | 116.85               | 58.70       |
| 5 865.71           | 45.57                | Peak        | V    | 34.09              | -21.40      |         | 58.26                 | 107.83               | 49.57       |
| 5 880.38           | 45.56                | Peak        | V    | 34.18              | -21.30      |         | 58.44                 | 101.25               | 42.81       |
| 5 940.88           | 45.30                | Peak        | V    | 34.38              | -21.26      |         | 58.42                 | 68.23                | 9.81        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

**OFDM: 802.11n\_HT20 (MCS0) Band 1\_ANT 1+ANT 2**
**A. Low Channel (5 180 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 500.00          | 44.53                | Peak        | V    | 31.80              | -23.35      | -       | 52.98                 | 74.00                | 21.02       |
| *4 500.00          | 34.78                | Average     | V    | 31.80              | -23.35      | 0.22    | 43.45                 | 54.00                | 10.55       |
| *4 904.74          | 45.49                | Peak        | V    | 32.80              | -22.87      | -       | 55.42                 | 74.00                | 18.58       |
| *4 588.84          | 35.14                | Average     | V    | 31.70              | -23.18      | 0.22    | 43.88                 | 54.00                | 10.12       |
| *5 150.00          | 47.55                | Peak        | V    | 33.30              | -22.58      | -       | 58.27                 | 74.00                | 15.73       |
| *5 150.00          | 38.72                | Average     | V    | 33.30              | -22.58      | 0.22    | 49.66                 | 54.00                | 4.34        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

**B. Middle Channel (5 220 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

**C. High Channel (5 240 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

**OFDM: 802.11n\_HT20 (MCS0) Band 2A\_ANT 1+ANT 2**
**A. Low Channel (5 260 MHz)**

| Radiated Emissions |                |             | Ant. | Correction Factors |             |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|-------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| Above 1 000.00     | Not detected   | -           | -    | -                  | -           | -       | -               | -              | -           |

**B. Middle Channel (5 300 MHz)**

| Radiated Emissions |                |             | Ant. | Correction Factors |             |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|-------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| Above 1 000.00     | Not detected   | -           | -    | -                  | -           | -       | -               | -              | -           |

**C. High Channel (5 320 MHz)**

| Radiated Emissions |                |             | Ant. | Correction Factors |             |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|-------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| *5 350.00          | 43.58          | Peak        | V    | 33.70              | -22.16      | -       | 55.12           | 74.00          | 18.88       |
| *5 350.00          | 36.46          | Average     | V    | 33.70              | -22.16      | 0.22    | 48.22           | 54.00          | 5.78        |
| *5 367.60          | 46.36          | Peak        | V    | 33.66              | -22.21      | -       | 57.81           | 74.00          | 16.19       |
| *5 376.80          | 35.77          | Average     | V    | 33.65              | -22.24      | 0.22    | 47.40           | 54.00          | 6.60        |
| *5 460.00          | 43.08          | Peak        | V    | 33.74              | -21.97      | -       | 54.85           | 74.00          | 19.15       |
| *5 460.00          | 34.12          | Average     | V    | 33.74              | -21.97      | 0.22    | 46.11           | 54.00          | 7.89        |

| Radiated Emissions |                |             | Ant. | Correction Factors |             |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|-------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| Above 1 000.00     | Not detected   | -           | -    | -                  | -           | -       | -               | -              | -           |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

**OFDM: 802.11n\_HT20 (MCS0) Band 2C\_ANT 1+ANT 2**
**A. Low Channel (5 500 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *5 350.00          | 42.38                | Peak        | V    | 33.70              | -22.16      | -       | 53.92                 | 74.00                | 20.08       |
| *5 350.00          | 34.14                | Average     | V    | 33.70              | -22.16      | 0.22    | 45.90                 | 54.00                | 8.10        |
| *5 457.42          | 46.96                | Peak        | V    | 33.73              | -21.97      | -       | 58.72                 | 74.00                | 15.28       |
| *5 442.24          | 36.10                | Average     | V    | 33.68              | -22.01      | 0.22    | 47.99                 | 54.00                | 6.01        |
| *5 460.00          | 44.99                | Peak        | V    | 33.74              | -21.97      | -       | 56.76                 | 74.00                | 17.24       |
| *5 460.00          | 36.37                | Average     | V    | 33.74              | -21.97      | 0.22    | 48.36                 | 54.00                | 5.64        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

**B. Middle Channel (5 580 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

**C. High Channel (5 700 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

**OFDM: 802.11n\_HT20 (MCS0) Band 3\_ANT 1+ANT 2**
**A. Low Channel (5 745 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 5635.70            | 45.30                | Peak        | V    | 33.70              | -21.88      |         | 57.12                 | 68.23                | 11.11       |
| 5692.31            | 46.80                | Peak        | V    | 33.87              | -21.64      |         | 59.03                 | 99.54                | 40.51       |
| 5720.00            | 47.59                | Peak        | V    | 33.90              | -21.67      |         | 59.82                 | 110.83               | 51.01       |
| 5725.00            | 55.94                | Peak        | V    | 33.90              | -21.68      |         | 68.16                 | 122.23               | 54.07       |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

**B. Middle Channel (5 785 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

**C. High Channel (5 825 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 5851.21            | 46.15                | Peak        | V    | 34.01              | -21.50      |         | 58.66                 | 119.47               | 60.81       |
| 5861.75            | 46.26                | Peak        | V    | 34.07              | -21.43      |         | 58.90                 | 108.94               | 50.04       |
| 5881.20            | 46.14                | Peak        | V    | 34.19              | -21.29      |         | 59.04                 | 100.64               | 41.60       |
| 5941.21            | 45.27                | Peak        | V    | 34.38              | -21.26      |         | 58.39                 | 68.23                | 9.84        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

**OFDM: 802.11n\_HT40 (MCS0) Band 1\_ANT 1+ANT 2**
**A. Low Channel (5 190 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 500.00          | 43.82                | Peak        | V    | 31.80              | -23.35      | -       | 52.27                 | 74.00                | 21.73       |
| *4 500.00          | 34.84                | Average     | V    | 31.80              | -23.35      | 0.44    | 43.73                 | 54.00                | 10.27       |
| *5 135.62          | 48.57                | Peak        | V    | 33.30              | -22.55      | -       | 59.32                 | 74.00                | 14.68       |
| *5 020.96          | 35.10                | Average     | V    | 32.98              | -22.67      | 0.44    | 45.85                 | 54.00                | 8.15        |
| *5 150.00          | 47.91                | Peak        | V    | 33.30              | -22.58      | -       | 58.63                 | 74.00                | 15.37       |
| *5 150.00          | 36.43                | Average     | V    | 33.30              | -22.58      | 0.44    | 47.59                 | 54.00                | 6.41        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

**B. High Channel (5 230 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

**OFDM: 802.11n\_HT40 (MCS0) Band 2A\_ANT 1+ANT 2**
**A. Low Channel (5 270 MHz)**

| Radiated Emissions |                |             | Ant. | Correction Factors |             |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|-------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| Above 1 000.00     | Not detected   | -           | -    | -                  | -           | -       | -               | -              | -           |

**B. High Channel (5 310 MHz)**

| Radiated Emissions |                |             | Ant. | Correction Factors |             |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|-------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| *5 350.00          | 47.27          | Peak        | V    | 33.70              | -22.16      | -       | 58.81           | 74.00          | 15.19       |
| *5 350.00          | 37.92          | Average     | V    | 33.70              | -22.16      | 0.44    | 49.90           | 54.00          | 4.10        |
| *5 355.40          | 56.00          | Peak        | V    | 33.69              | -22.18      | -       | 67.51           | 74.00          | 6.49        |
| *5 356.60          | 36.72          | Average     | V    | 33.69              | -22.18      | 0.44    | 48.67           | 54.00          | 5.33        |
| *5 460.00          | 43.87          | Peak        | V    | 33.74              | -21.97      | -       | 55.64           | 74.00          | 18.36       |
| *5 460.00          | 33.48          | Average     | V    | 33.74              | -21.97      | 0.44    | 45.69           | 54.00          | 8.31        |

| Radiated Emissions |                |             | Ant. | Correction Factors |             |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|-------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| Above 1 000.00     | Not detected   | -           | -    | -                  | -           | -       | -               | -              | -           |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## OFDM: 802.11n\_HT40 (MCS0) Band 2C\_ANT 1+ANT 2

### A. Low Channel (5 510 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *5 350.00          | 43.24                | Peak        | V    | 33.70              | -22.16      | -       | 54.78                 | 74.00                | 19.22       |
| *5 350.00          | 33.53                | Average     | V    | 33.70              | -22.16      | 0.44    | 45.51                 | 54.00                | 8.49        |
| *5 458.52          | 57.33                | Peak        | V    | 33.73              | -21.97      | -       | 69.09                 | 74.00                | 4.91        |
| *5 450.60          | 36.19                | Average     | V    | 33.70              | -21.96      | 0.44    | 48.37                 | 54.00                | 5.63        |
| *5 460.00          | 46.20                | Peak        | V    | 33.74              | -21.97      | -       | 57.97                 | 74.00                | 16.03       |
| *5 460.00          | 36.87                | Average     | V    | 33.74              | -21.97      | 0.44    | 49.08                 | 54.00                | 4.92        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

### B. Middle Channel (5 550 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

### C. High Channel (5 670 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

**OFDM: 802.11n\_HT40 (MCS0) Band 3\_ANT 1+ANT 2**
**A. Low Channel (5 755 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |    | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|----|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 5 647.26           | 51.35                | Peak        | V    | 33.70              | -21.92      |    | 63.13                 | 68.23                | 5.10        |
| 5 697.92           | 54.56                | Peak        | V    | 33.89              | -21.60      |    | 66.85                 | 103.69               | 36.84       |
| 5 716.26           | 56.98                | Peak        | V    | 33.90              | -21.65      |    | 69.23                 | 109.78               | 40.55       |
| 5 723.25           | 59.23                | Peak        | V    | 33.90              | -21.68      |    | 71.45                 | 118.24               | 46.79       |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

**B. High Channel (5 795 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |    | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|----|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 5 850.22           | 53.64                | Peak        | V    | 34.00              | -21.51      |    | 66.13                 | 121.73               | 55.60       |
| 5 856.80           | 54.06                | Peak        | V    | 34.04              | -21.46      |    | 66.64                 | 110.32               | 43.68       |
| 5 876.75           | 51.15                | Peak        | V    | 34.16              | -21.32      |    | 63.99                 | 103.93               | 39.94       |
| 5 937.91           | 49.56                | Peak        | V    | 34.38              | -21.25      |    | 62.69                 | 68.23                | 5.54        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

**OFDM: 802.11ac\_VHT80 (MCS0) Band 1\_ANT 1+ANT 2**

## A. Low Channel (5 210 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 500.00          | 43.39                | Peak        | V    | 31.80              | -23.35      | -       | 51.84                 | 74.00                | 22.16       |
| *4 500.00          | 33.70                | Average     | V    | 31.80              | -23.35      | 0.86    | 43.01                 | 54.00                | 10.99       |
| *5 129.38          | 47.34                | Peak        | V    | 33.30              | -22.54      | -       | 58.10                 | 74.00                | 15.90       |
| *5 135.62          | 36.51                | Average     | V    | 33.30              | -22.55      | 0.86    | 48.12                 | 54.00                | 5.88        |
| *5 150.00          | 46.36                | Peak        | V    | 33.30              | -22.58      | -       | 57.08                 | 74.00                | 16.92       |
| *5 150.00          | 37.88                | Average     | V    | 33.30              | -22.58      | 0.86    | 49.46                 | 54.00                | 4.54        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

**OFDM: 802.11ac\_VHT80 (MCS0) Band 2A\_ANT 1+ANT 2**

## A. Middle Channel (5 290 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *5 350.00          | 45.87                | Peak        | V    | 33.70              | -22.16      | -       | 57.41                 | 74.00                | 16.59       |
| *5 350.00          | 37.08                | Average     | V    | 33.70              | -22.16      | 0.86    | 49.48                 | 54.00                | 4.52        |
| *5 371.40          | 47.06                | Peak        | V    | 33.66              | -22.22      | -       | 58.50                 | 74.00                | 15.50       |
| *5 364.40          | 36.54                | Average     | V    | 33.67              | -22.20      | 0.86    | 48.87                 | 54.00                | 5.13        |
| *5 460.00          | 43.30                | Peak        | V    | 33.74              | -21.97      | -       | 55.07                 | 74.00                | 18.93       |
| *5 460.00          | 33.55                | Average     | V    | 33.74              | -21.97      | 0.86    | 46.18                 | 54.00                | 7.82        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

**OFDM: 802.11ac\_VHT80 (MCS0) Band 2C\_ANT 1+ANT 2**
**A. Low Channel (5 530 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *5 350.00          | 43.29                | Peak        | V    | 33.70              | -22.16      | -       | 54.83                 | 74.00                | 19.17       |
| *5 350.00          | 33.75                | Average     | V    | 33.70              | -22.16      | 0.86    | 46.15                 | 54.00                | 7.85        |
| *5 455.00          | 46.24                | Peak        | V    | 33.72              | -21.97      | -       | 57.99                 | 74.00                | 16.01       |
| *5 455.00          | 35.75                | Average     | V    | 33.72              | -21.97      | 0.86    | 48.36                 | 54.00                | 5.64        |
| *5 460.00          | 43.90                | Peak        | V    | 33.74              | -21.97      | -       | 55.67                 | 74.00                | 18.33       |
| *5 460.00          | 35.47                | Average     | V    | 33.74              | -21.97      | 0.86    | 48.10                 | 54.00                | 5.90        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

**B. High Channel (5 690 MHz)**

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| Above 1 000.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

**OFDM: 802.11ac\_VHT80 (MCS0) Band 3\_ANT 1+ANT 2**

## A. Middle Channel (5 775 MHz)

| Radiated Emissions |                |             | Ant. | Correction Factors |             |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|-------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 5 642.67           | 46.05          | Peak        | V    | 33.70              | -21.91      |         | 57.84           | 68.23          | 10.39       |
| 5 679.39           | 47.56          | Peak        | V    | 33.82              | -21.73      |         | 59.65           | 89.98          | 30.33       |
| 5 710.31           | 46.65          | Peak        | V    | 33.90              | -21.63      |         | 58.92           | 108.11         | 49.19       |
| 5 724.10           | 52.83          | Peak        | V    | 33.90              | -21.68      |         | 65.05           | 120.18         | 55.13       |
| 5 852.80           | 45.15          | Peak        | V    | 34.02              | -21.49      |         | 57.68           | 115.84         | 58.16       |
| 5 860.32           | 46.35          | Peak        | V    | 34.06              | -21.44      |         | 58.97           | 109.34         | 50.37       |
| 5 911.76           | 46.27          | Peak        | V    | 34.32              | -21.19      |         | 59.40           | 78.03          | 18.63       |
| 5 966.11           | 46.32          | Peak        | V    | 34.40              | -21.29      |         | 59.43           | 68.41          | 8.98        |

| Radiated Emissions |                |             | Ant. | Correction Factors |             |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|-------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| Above 1 000.00     | Not detected   | -           | -    | -                  | -           | -       | -               | -              | -           |

**Remark;**

1. “\*” means the restricted band.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using Peak / average detector mode if frequency was in restricted band. Otherwise the frequency was out of restricted band, only peak detector should be used.
3. Actual = Reading + AF + AMP + CL + (DF)
4. If frequency was out of restricted band, the calculation method for peak limit is same as below.  
 $68.23 \text{ dB}\mu\text{V/m} = \text{EIRP} - 20 \log(d) + 104.77 = -27 - 20 \log(3) + 104.77$
5. In case of the emissions within  $\pm 75 \text{ MHz}$  from band edge of band 3, limit should be adjusted to emission mask of 15.407(4)(i).
6. According to § 15.31(o), emission levels are not reported much lower than the limits by over 20 dB.
7. The maximized peak measured value complies with the average limit, to perform an average measurement is unnecessary.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)


## - Test plots

### OFDM: 802.11a (6 Mbps)\_ANT 1+ANT 2

#### Low channel Band edge (Peak) - Band 1

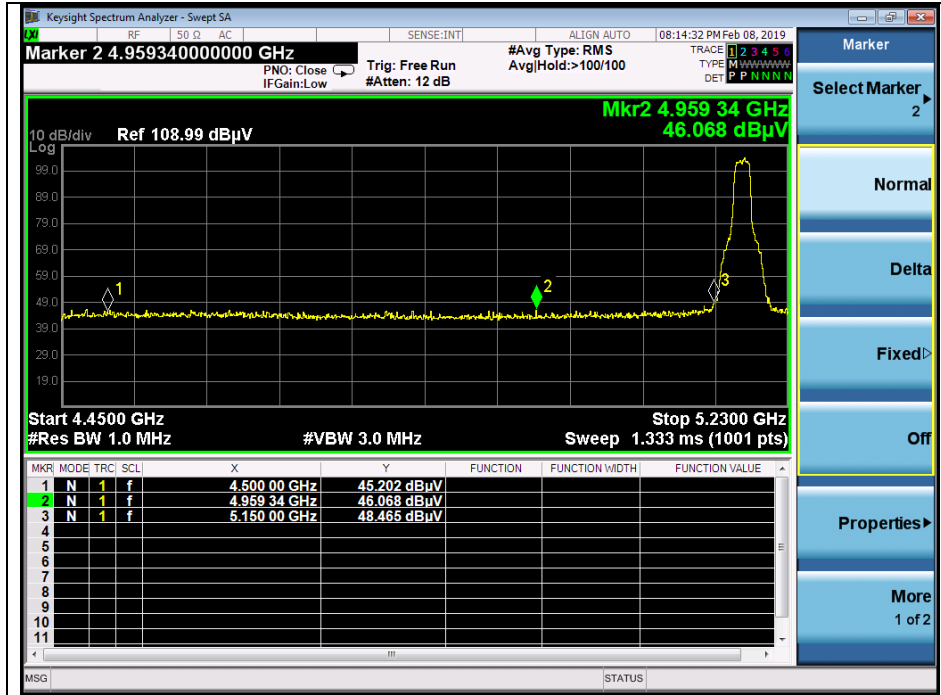

#### Low channel Band edge (Average) - Band 1

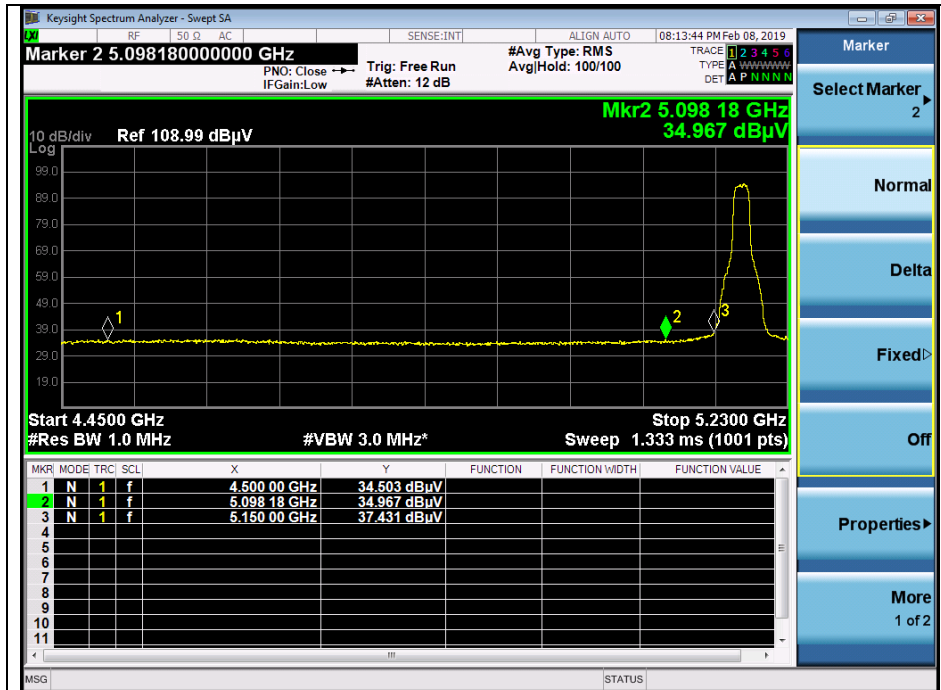

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## High channel Band edge (Peak) - Band 2A

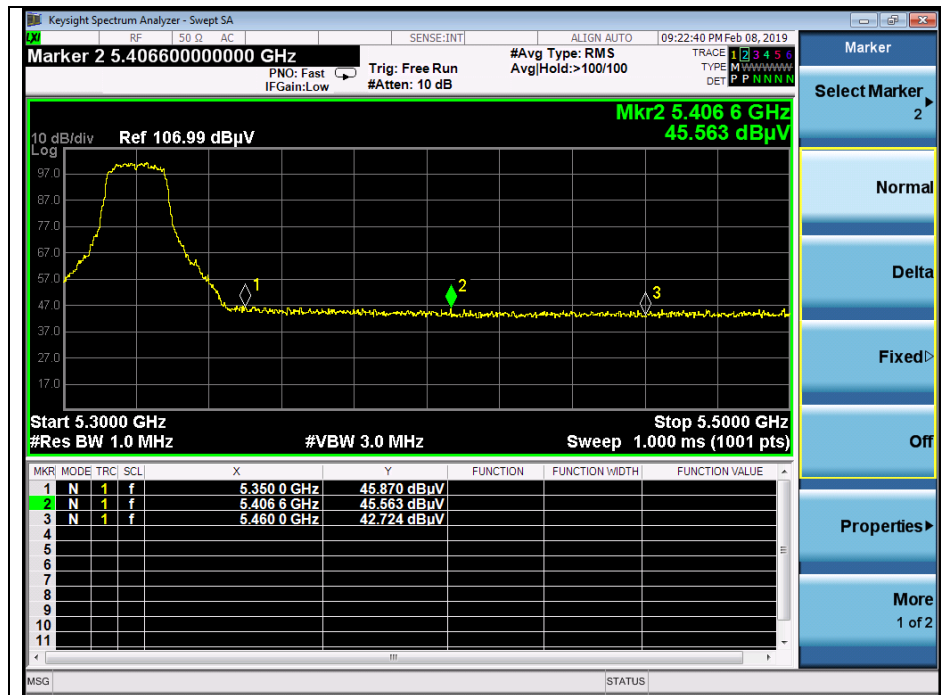

## High channel Band edge (Average) - Band 2A

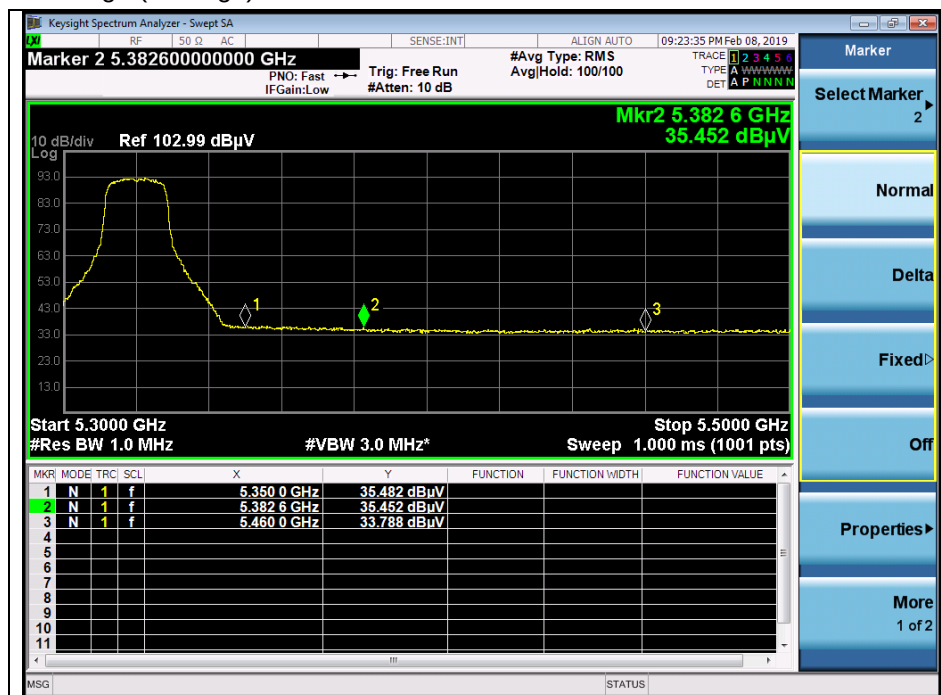

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## Low channel Band edge (Peak) - Band 2C

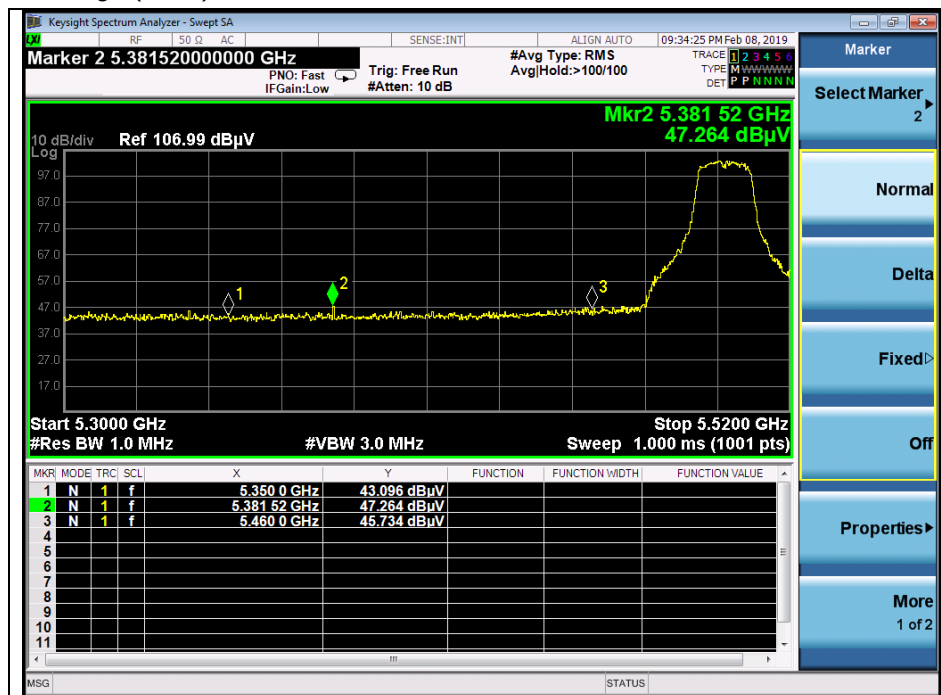

## Low channel Band edge (Average) - Band 2C

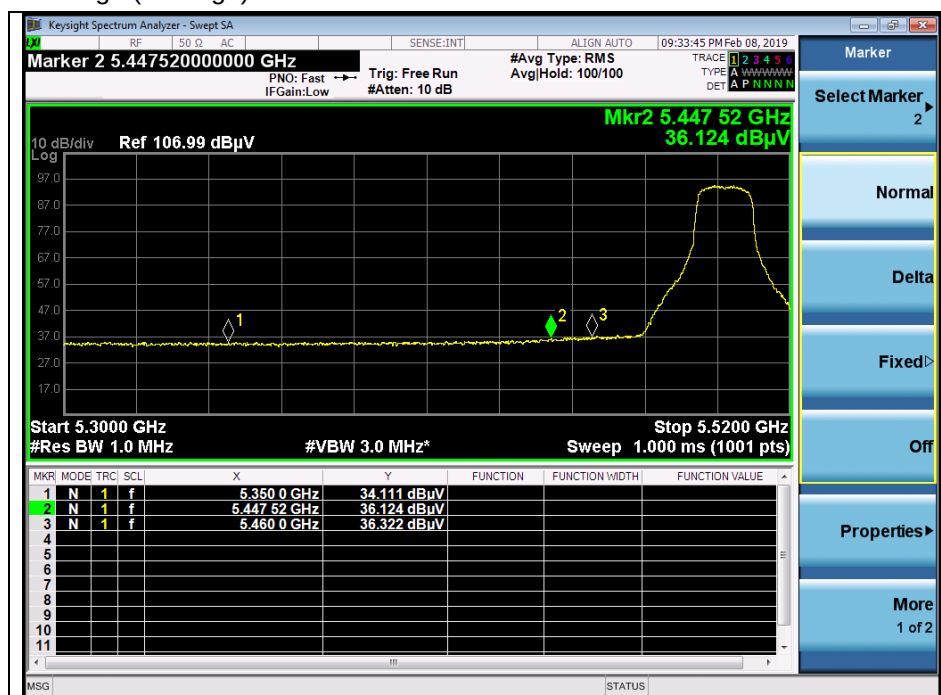

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## Low channel Band edge (Peak) - Band 3

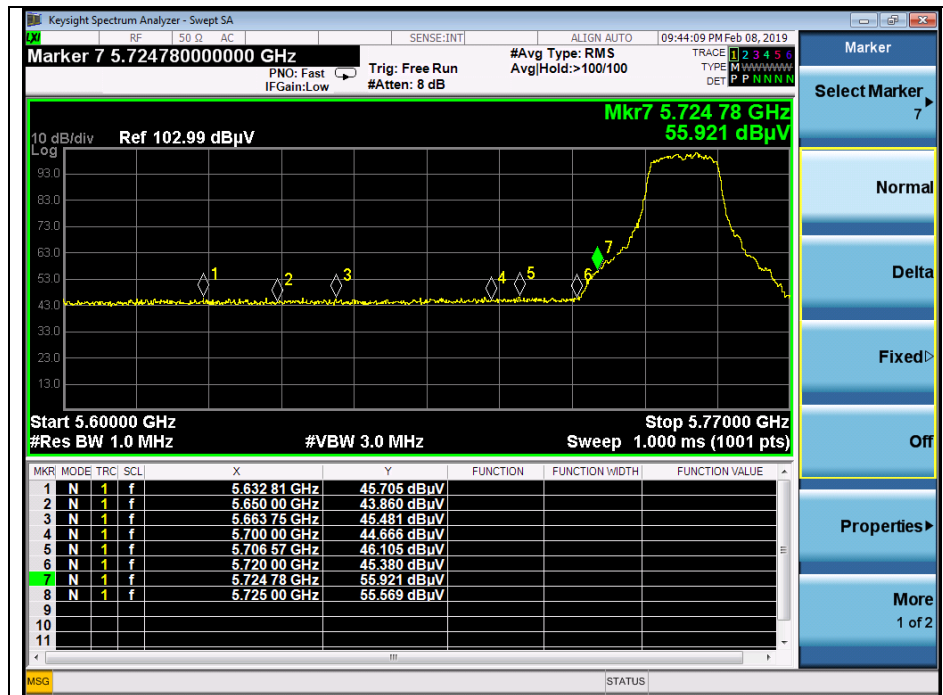

## High channel Band edge (Peak) - Band 3




The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

## OFDM: 802.11n\_HT20 (MCS0)\_ANT 1+ANT 2

### Low channel Band edge (Peak) - Band 1

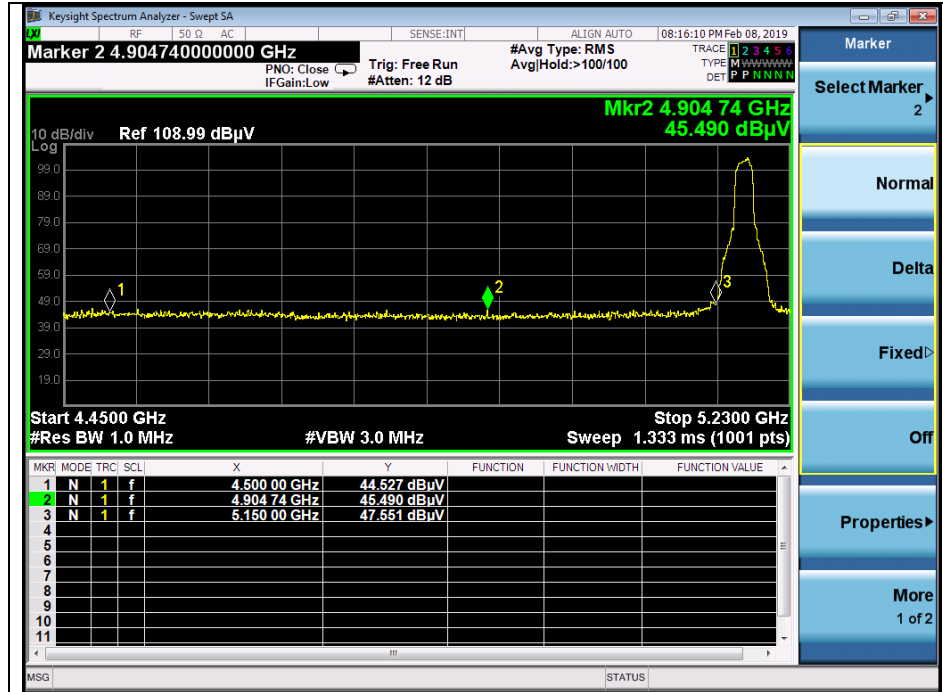

### Low channel Band edge (Average) - Band 1

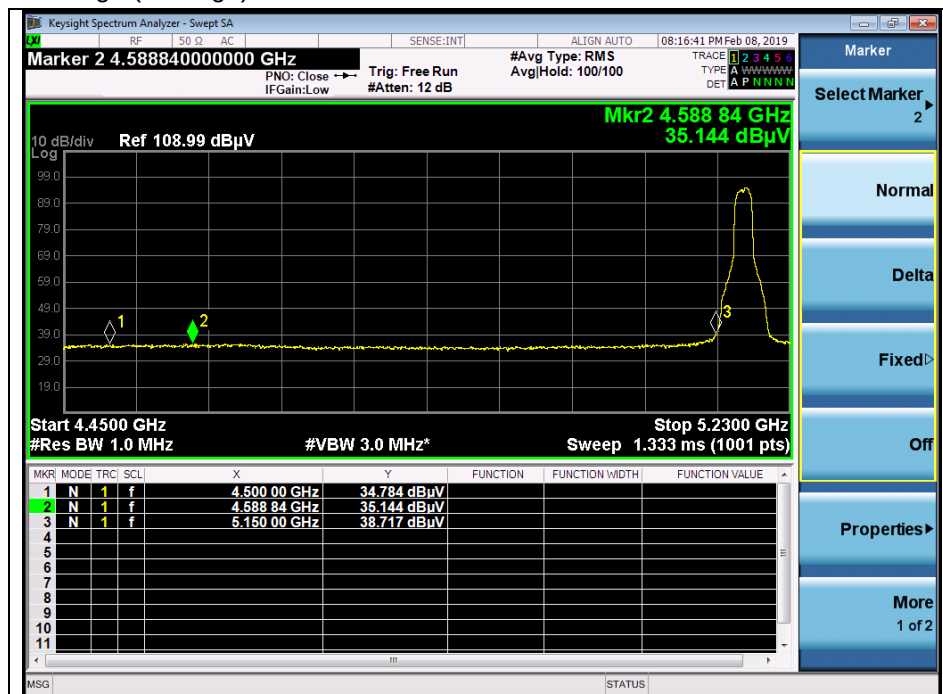

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## High channel Band edge (Peak) - Band 2A

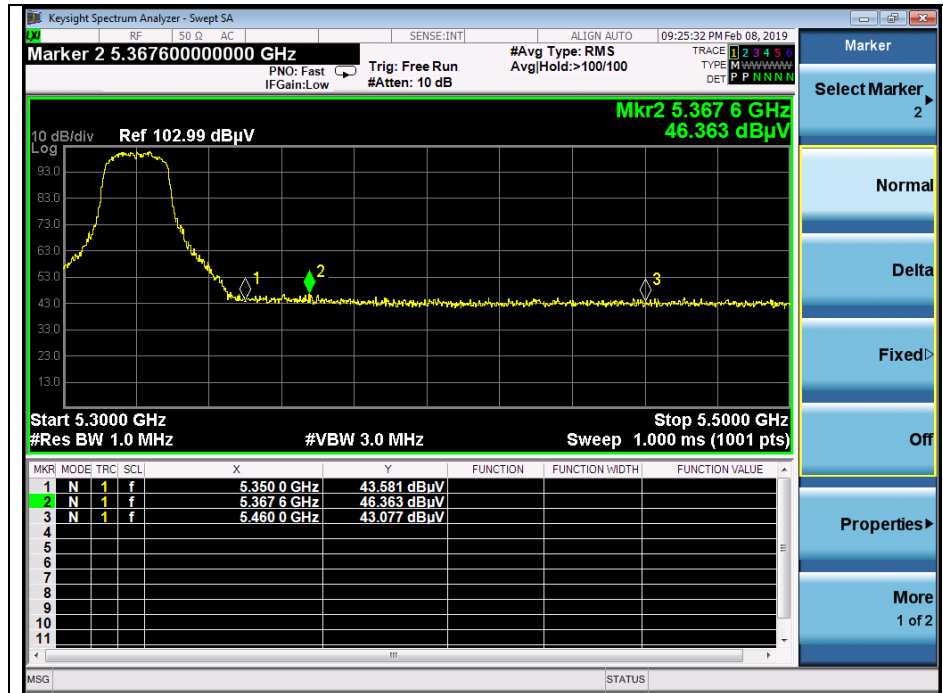

## High channel Band edge (Average) - Band 2A

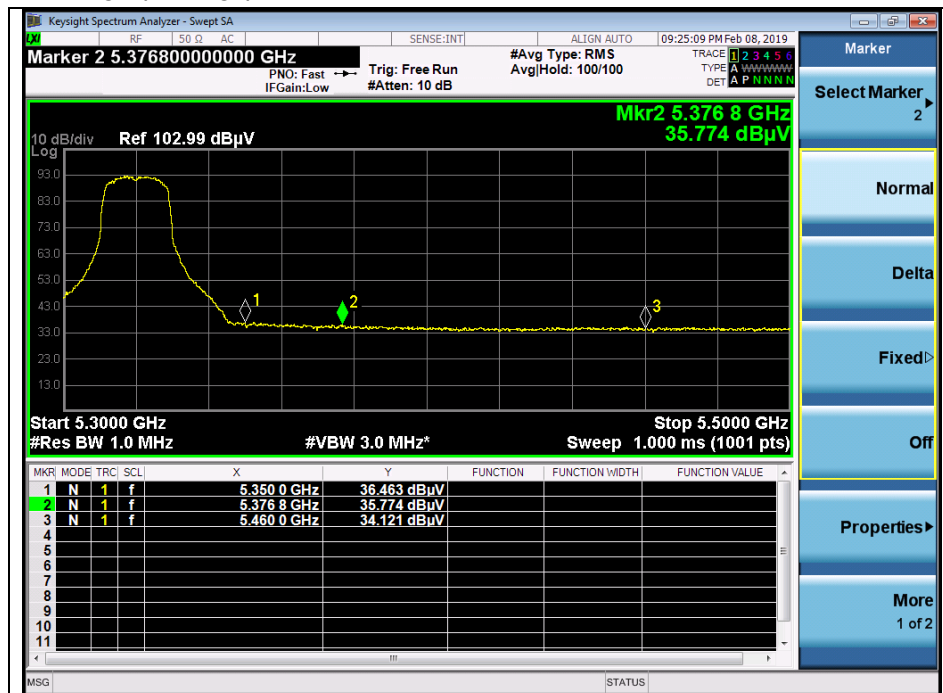

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## Low channel Band edge (Peak) - Band 2C

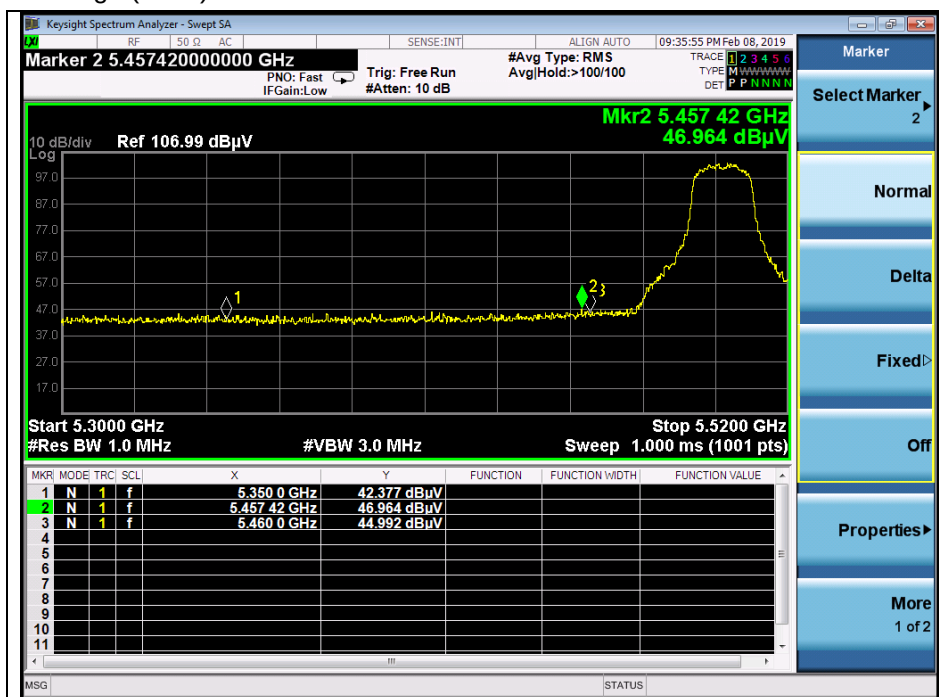

## Low channel Band edge (Average) - Band 2C

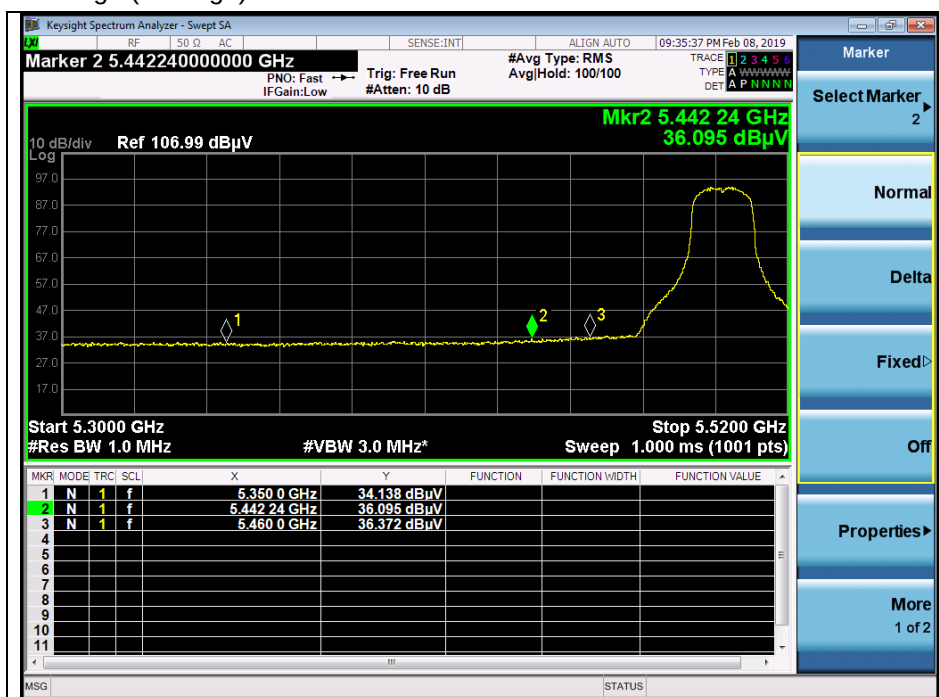

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## Low channel Band edge (Peak) - Band 3

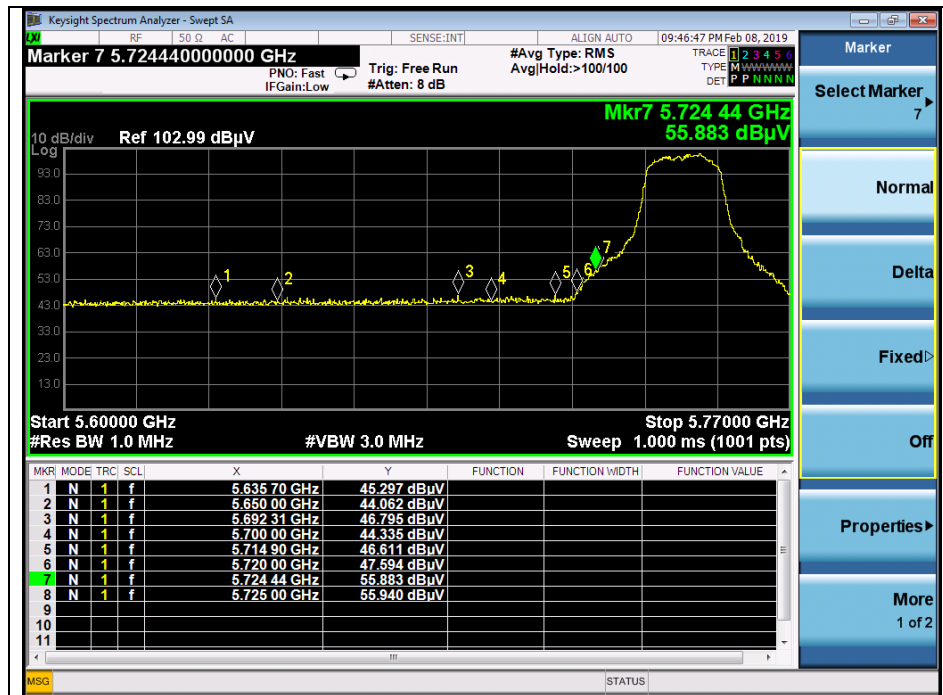

## High channel Band edge (Peak) - Band 3




The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

## OFDM: 802.11n\_HT40 (MCS0)\_ANT 1+ANT 2

### Low channel Band edge (Peak) - Band 1

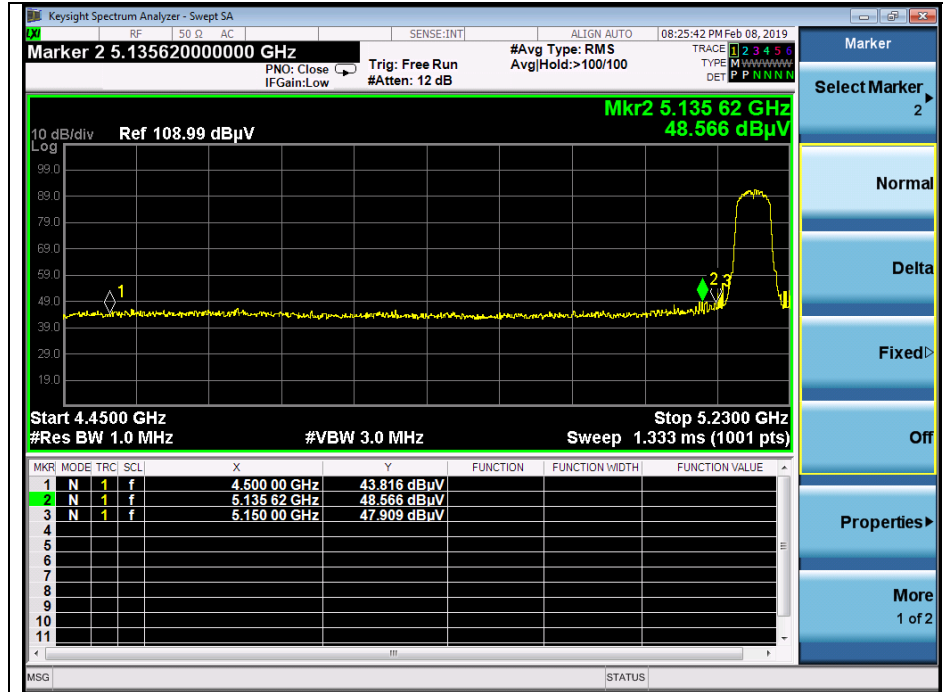

### Low channel Band edge (Average) - Band 1

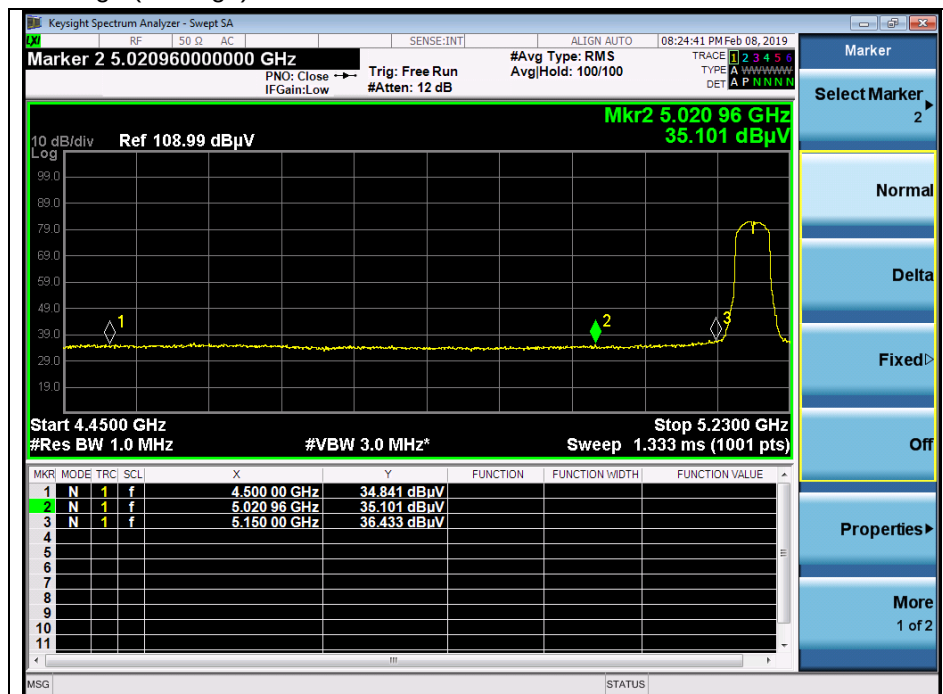

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## High channel Band edge (Peak) - Band 2A

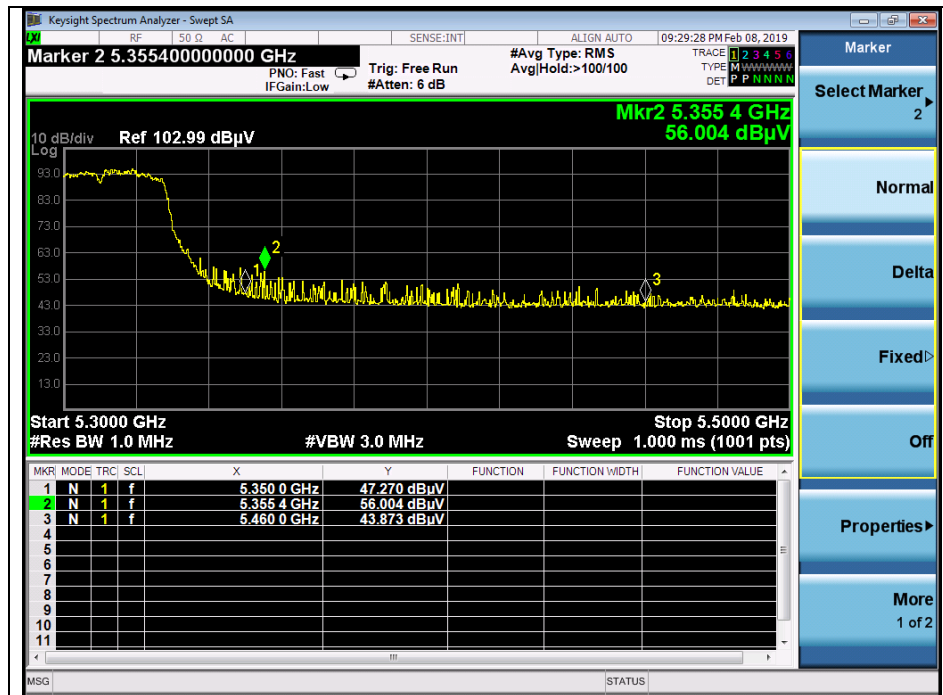

## High channel Band edge (Average) - Band 2A

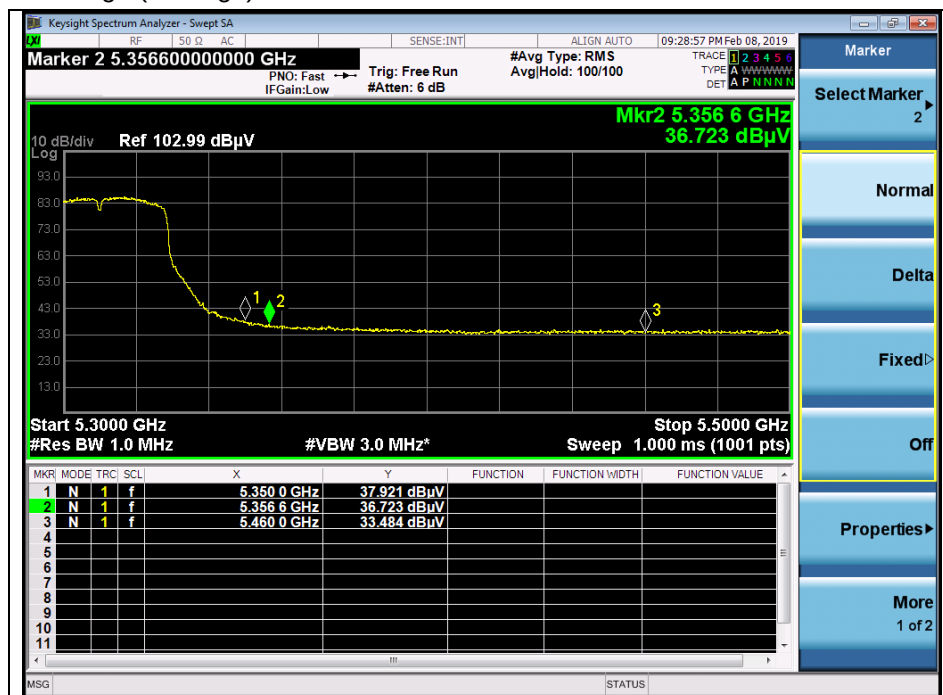

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## Low channel Band edge (Peak) - Band 2C

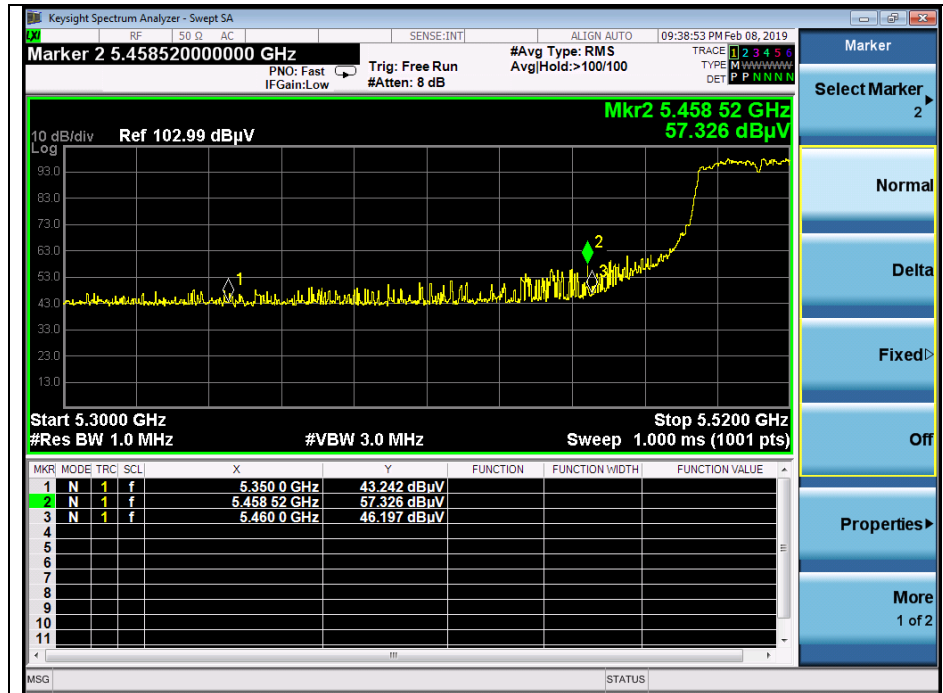

## Low channel Band edge (Average) - Band 2C

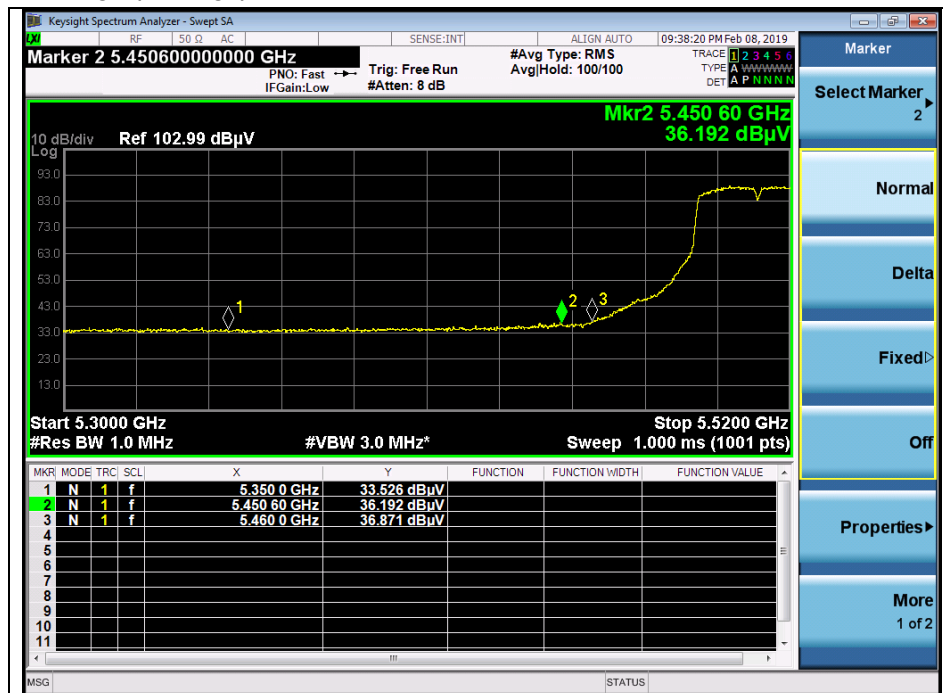

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## Low channel Band edge (Peak) - Band 3

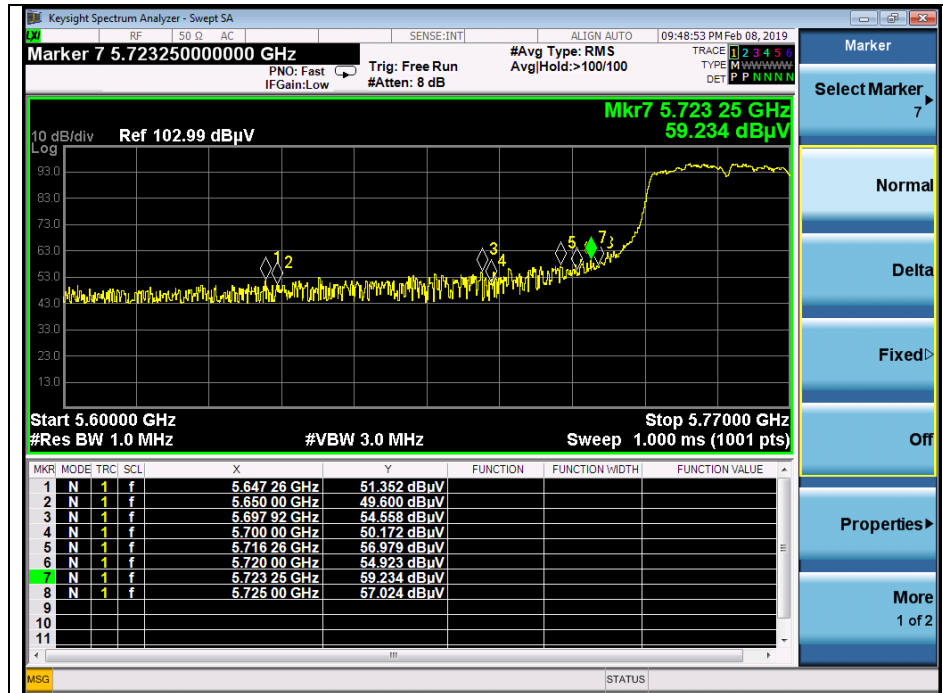

## High channel Band edge (Peak) - Band 3

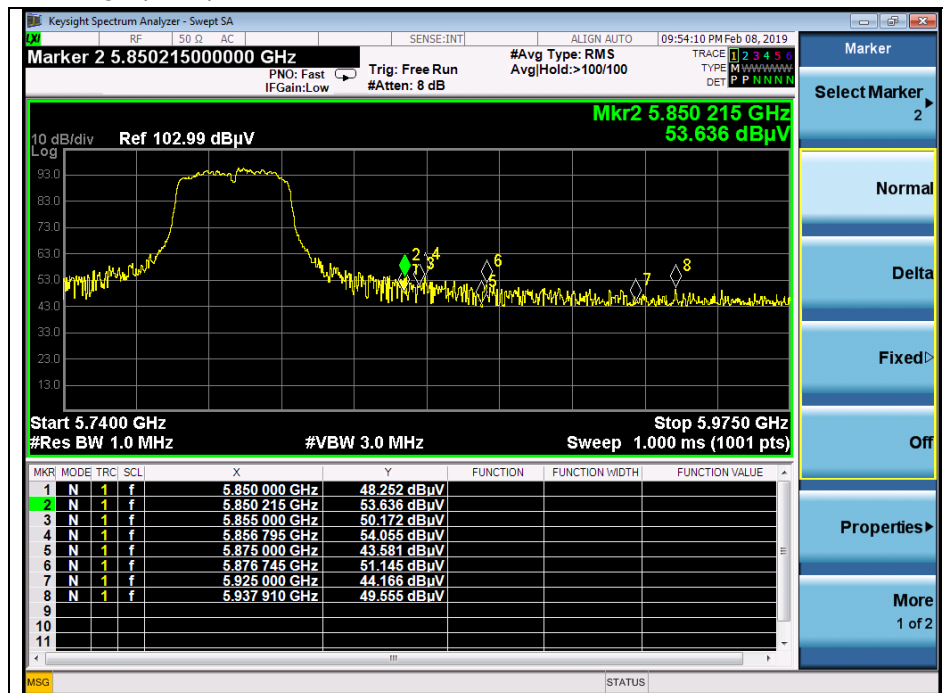

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## OFDM: 802.11ac\_VHT80 (MCS0)\_ANT 1+ANT 2

### Middle channel Band edge (Peak) - Band 1

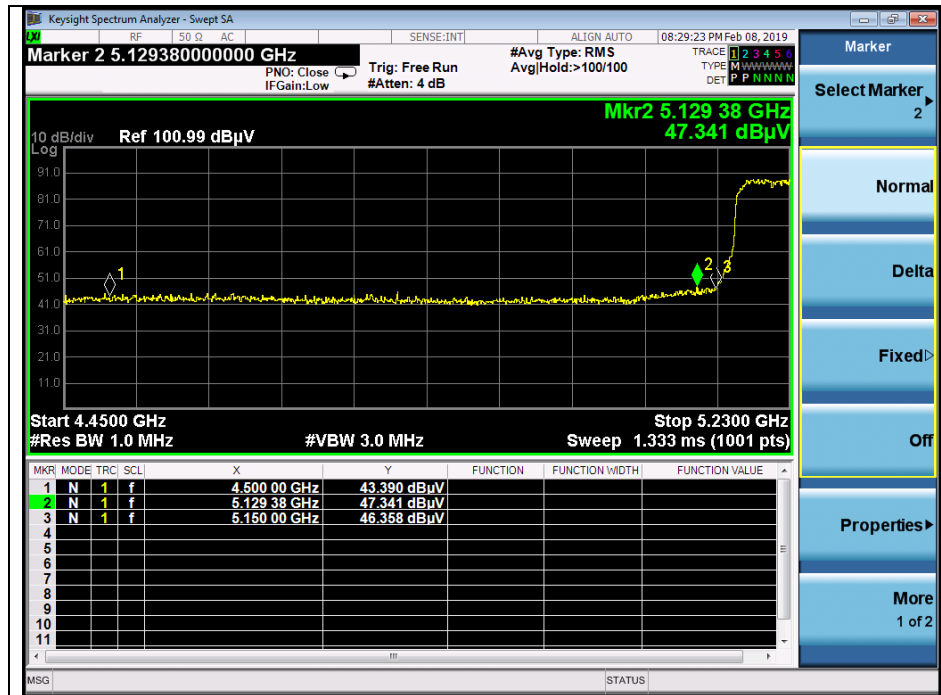

### Middle channel Band edge (Average) - Band 1



The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## Middle channel Band edge (Peak) - Band 2A

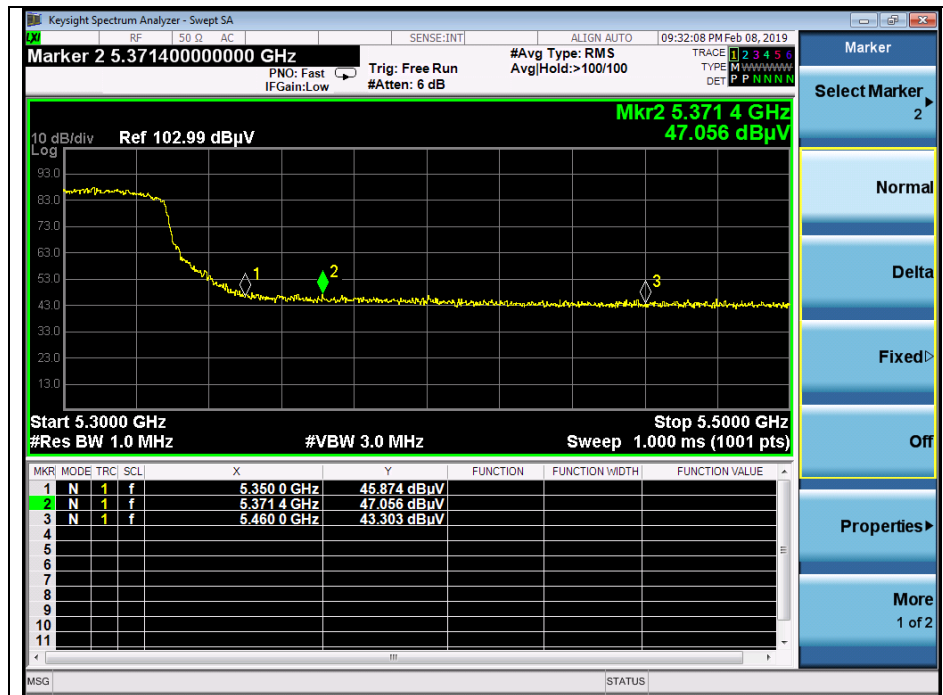

## Middle channel Band edge (Average) - Band 2A

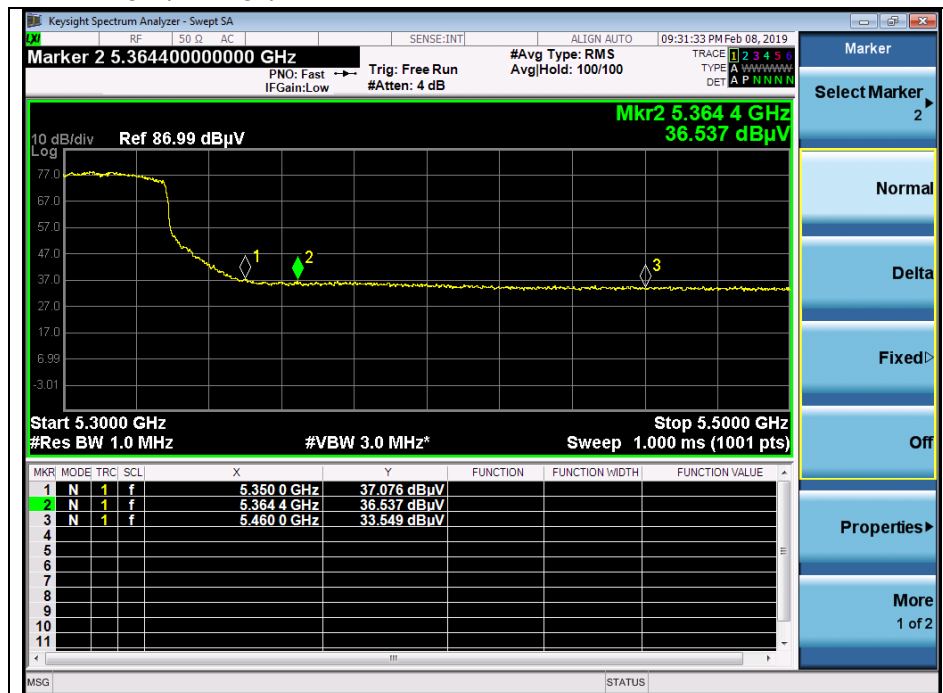

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## Low channel Band edge (Peak) - Band 2C

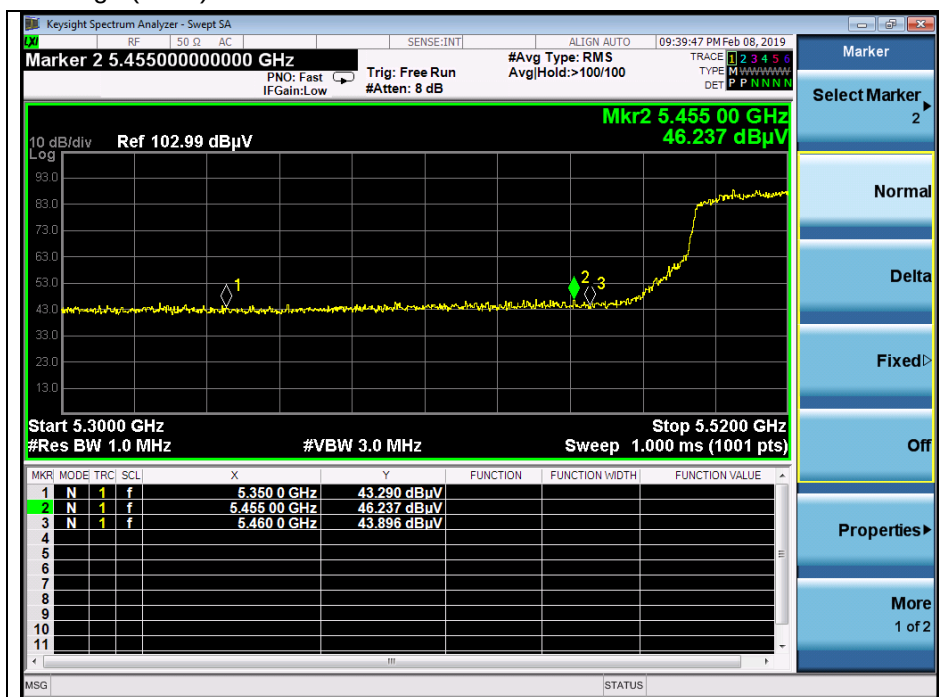

## Low channel Band edge (Average) - Band 2C

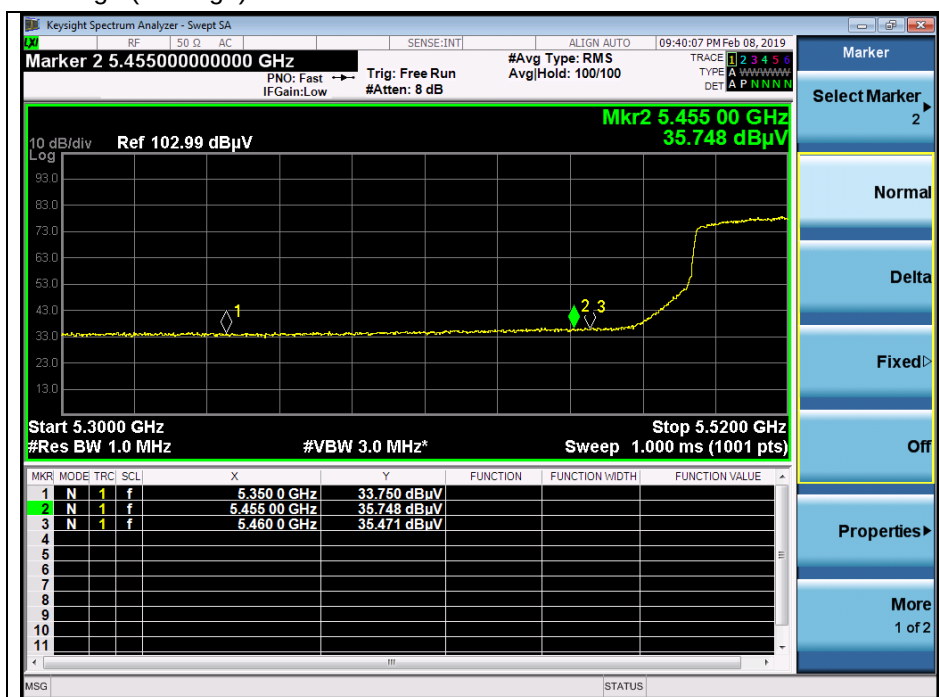

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## Low channel Band edge (Peak) - Band 3

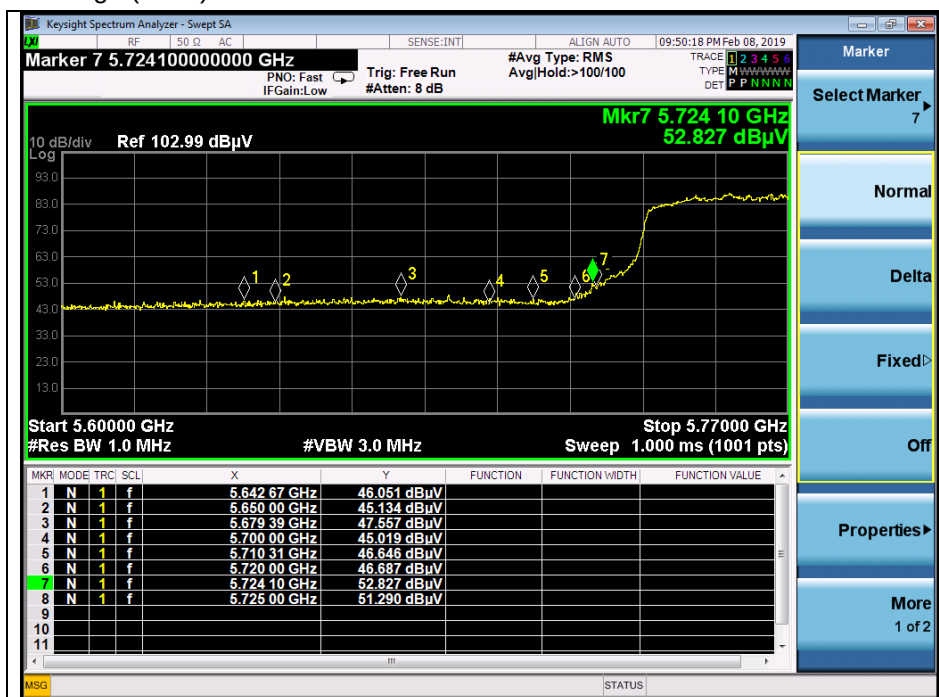

## High channel Band edge (Peak) - Band 3

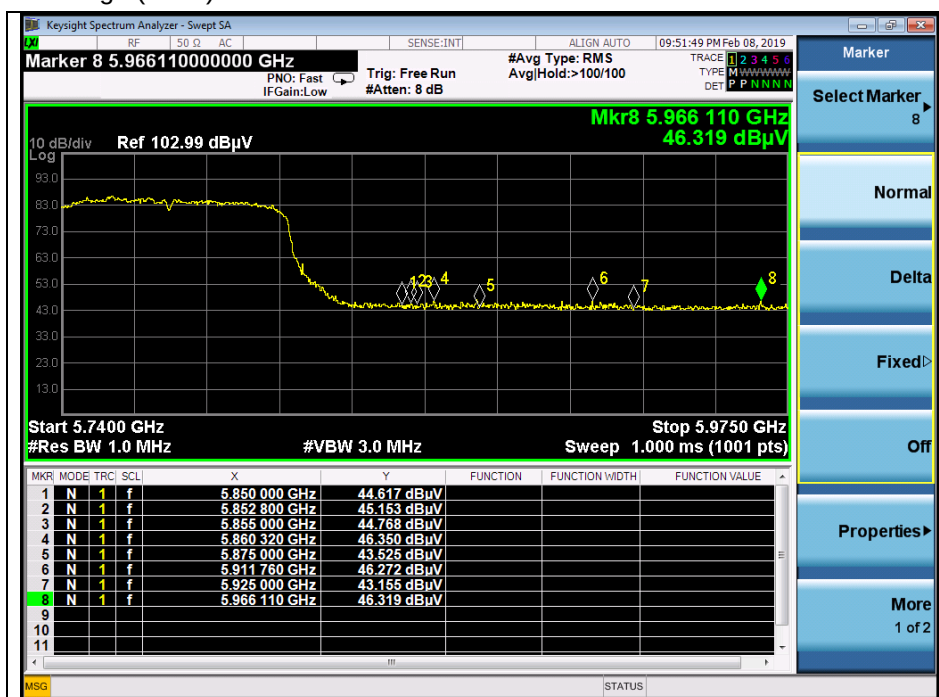

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)