

High Channel (5 320 MHz)



802.11n-HT20 (DFS)

Low Channel (5 500 MHz)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040


Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

Middle Channel (5 580 MHz)



High Channel (5 700 MHz)

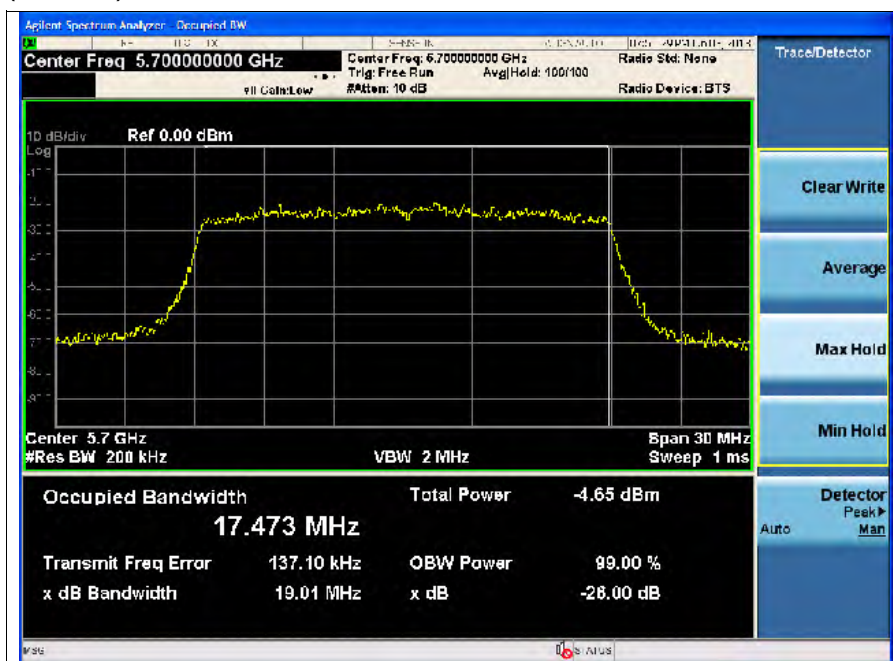

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

802.11n-HT40 (Non-DFS)

Low Channel (5 190 MHz)



High Channel (5 230 MHz)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

802.11n-HT40 (DFS)

Low Channel (5 270 MHz)



High Channel (5 310 MHz)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

802.11n-HT40 (DFS)

Low Channel (5 510 MHz)

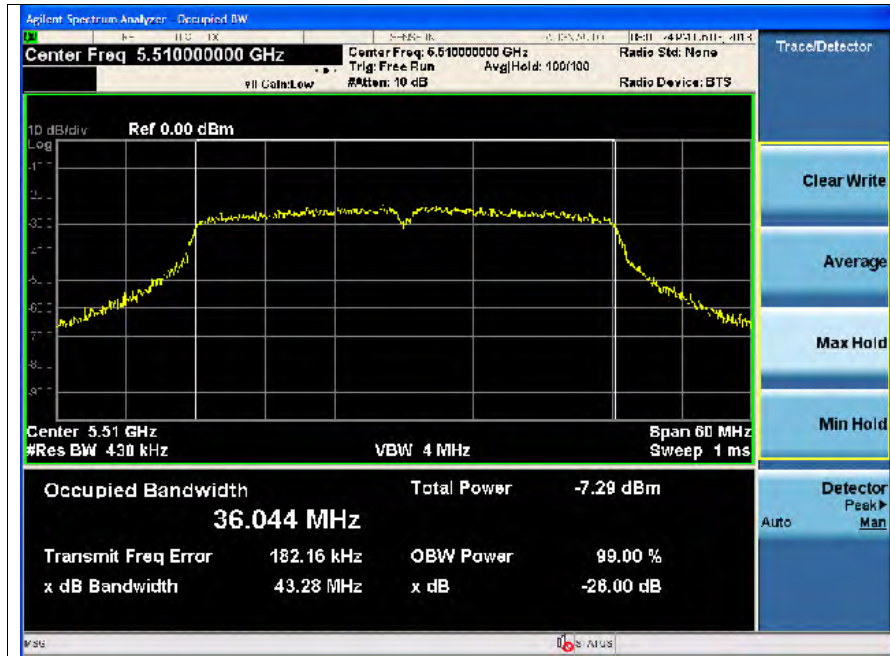

Low Channel (5 550 MHz)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

High Channel (5 670 MHz)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

4. Output power

4.1. Test setup

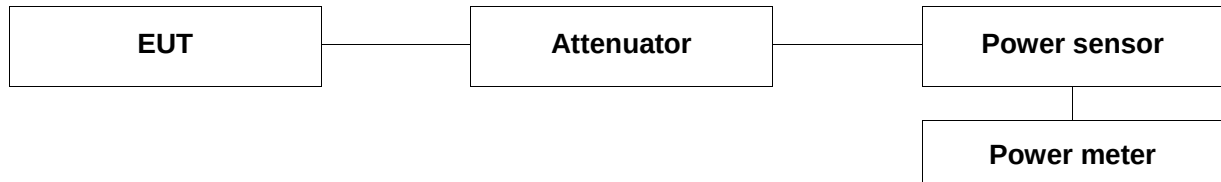

4.2. Limit

4.2.1. FCC 15.407

(a)(1)

For the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a)(2)

For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3. Test procedure

1. This measurement settings are specified in clause 3) of section E of KDB 789033.
2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.
 - The EUT is configured to transmit continuously or to transmit with a consistent duty cycle.
 - At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
3. If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B).
4. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
5. Adjust the measurement in dBm by adding 10 log (1/x) where x is the duty cycle (e.g., 10 log(1/0.25) if the duty cycle is 25 percent).

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

4.4. Test result

Ambient temperature : (24 ± 2) °C
Relative humidity : 49 % R.H.

4.4.1. Limit

-11a

Mode	Frequency (MHz)	Data Rate (Mbps)	Fixed Limit (dB m)	26 dB BW (MHz)	4+10LogB (dB m)	Antenna gain (dB i)	Limit (dB m)
11a	5 180	6	17	18.64	16.70	-0.35	16.70
	5 220	6	17	18.71	16.72	-0.35	16.72
	5 240	6	17	18.59	16.69	-0.35	16.69
Mode	Frequency (MHz)	Data Rate (Mbps)	Fixed Limit (dB m)	26 dB BW (MHz)	11+10LogB (dB m)	Antenna gain (dB i)	Limit (dB m)
11a	5 260	6	24	18.63	23.70	-0.35	23.70
	5 300	6	24	18.59	23.69	-0.35	23.69
	5 320	6	24	18.73	23.73	-0.35	23.73
	5 500	6	24	18.50	23.67	-0.14	23.67
	5 580	6	24	18.86	23.76	-0.14	23.76
	5 700	6	24	18.57	23.69	-0.14	23.69

-11n_HT20

Mode	Frequency (MHz)	Data Rate (Mbps)	Fixed Limit (dB m)	26 dB BW (MHz)	4+10LogB (dB m)	Antenna gain (dB i)	Limit (dB m)
11n_HT20	5 180	MCS0	17	18.98	16.78	-0.35	16.78
	5 220	MCS0	17	18.99	16.79	-0.35	16.79
	5 240	MCS0	17	19.03	16.79	-0.35	16.79
Mode	Frequency (MHz)	Data Rate (Mbps)	Fixed Limit (dB m)	26 dB BW (MHz)	11+10LogB (dB m)	Antenna gain (dB i)	Limit (dB m)
11n_HT20	5 260	MCS0	24	18.94	23.77	-0.35	23.77
	5 300	MCS0	24	19.06	23.80	-0.35	23.80
	5 320	MCS0	24	19.05	23.80	-0.35	23.80
	5 500	MCS0	24	18.98	23.78	-0.14	23.78
	5 580	MCS0	24	18.96	23.78	-0.14	23.78
	5 700	MCS0	24	19.01	23.79	-0.14	23.79

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

-11n_HT40

Mode	Frequency (MHz)	Data Rate (Mbps)	Fixed Limit (dB m)	26 dB BW (MHz)	4+10LogB (dB m)	Antenna gain (dB i)	Limit (dB m)
11n_HT40	5 190	MCS0	17	43.36	20.37	-0.35	17
	5 230	MCS0	17	43.75	20.41	-0.35	17
Mode	Frequency (MHz)	Data Rate (Mbps)	Fixed Limit (dB m)	26 dB BW (MHz)	11+10LogB (dB m)	Antenna gain (dB i)	Limit (dB m)
11n_HT40	5 270	MCS0	24	42.62	27.30	-0.35	24
	5 310	MCS0	24	42.12	27.24	-0.35	24
	5 510	MCS0	24	43.28	27.36	-0.14	24
	5 550	MCS0	24	43.51	27.39	-0.14	24
	5 670	MCS0	24	42.48	27.28	-0.14	24

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

4.4.1. Result

-11a

Operation Mode	Channel	Data rate	Channel Frequency (MHz)	Reading (dB m)	Duty factor (dB)	Result (dB m)	Limit (dB m)
Non DFS 11a	Low	6	5 180	12.52	0.32	12.84	16.70
		9		12.32	0.48	12.80	16.70
		12		12.04	0.61	12.65	16.70
		18		11.88	0.88	12.76	16.70
		24		11.74	1.11	12.85	16.70
		36		11.61	1.57	13.18	16.70
		48		11.36	1.99	13.35	16.70
		54		11.25	2.12	13.37	16.70
	Middle	6	5 220	12.22	0.32	12.54	16.72
		9		12.11	0.48	12.59	16.72
		12		12.05	0.61	12.66	16.72
		18		11.85	0.88	12.73	16.72
		24		11.63	1.11	12.74	16.72
		36		11.45	1.57	13.02	16.72
		48		11.05	1.99	13.04	16.72
		54		10.90	2.12	13.02	16.72
	High	6	5 240	12.28	0.32	12.60	16.69
		9		12.14	0.48	12.62	16.69
		12		12.02	0.61	12.63	16.69
		18		11.86	0.88	12.74	16.69
		24		11.64	1.11	12.75	16.69
		36		11.42	1.57	12.99	16.69
		48		11.15	1.99	13.14	16.69
		54		11.02	2.12	13.14	16.69

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

Operation Mode	Channel	Data rate	Channel Frequency (MHz)	Reading (dB m)	Duty factor (dB)	Result (dB m)	Limit (dB m)
DFS 11a	Lower Band	6	5 260	12.55	0.32	12.87	23.70
		9		12.43	0.48	12.91	23.70
		12		12.15	0.61	12.76	23.70
		18		11.94	0.88	12.82	23.70
		24		11.52	1.11	12.63	23.70
		36		11.32	1.57	12.89	23.70
		48		11.24	1.99	13.23	23.70
		54		11.19	2.12	13.31	23.70
		6	5 300	12.03	0.32	12.35	23.69
		9		11.85	0.48	12.33	23.69
		12		11.74	0.61	12.35	23.69
		18		11.49	0.88	12.37	23.69
		24		11.25	1.11	12.36	23.69
		36		11.12	1.57	12.69	23.69
		48		10.85	1.99	12.84	23.69
		54		10.78	2.12	12.90	23.69
		6	5 320	12.15	0.32	12.47	23.73
		9		12.04	0.48	12.52	23.73
		12		11.85	0.61	12.46	23.73
		18		11.56	0.88	12.44	23.73
		24		11.49	1.11	12.60	23.73
		36		11.28	1.57	12.85	23.73
		48		11.98	1.99	13.97	23.73
		54		10.81	2.12	12.93	23.73

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

Operation Mode	Channel	Data rate	Channel Frequency (MHz)	Reading (dB m)	Duty factor (dB)	Result (dB m)	Limit (dB m)
DFS 11a	Upper Band	6	5 500	12.47	0.32	12.79	23.67
		9		12.28	0.48	12.76	23.67
		12		12.16	0.61	12.77	23.67
		18		11.98	0.88	12.86	23.67
		24		11.76	1.11	12.87	23.67
		36		11.35	1.57	12.92	23.67
		48		11.06	1.99	13.05	23.67
		54		10.92	2.12	13.04	23.67
		6	5 580	12.67	0.32	12.99	23.76
		9		12.36	0.48	12.84	23.76
		12		12.24	0.61	12.85	23.76
		18		12.13	0.88	13.01	23.76
		24		12.05	1.11	13.16	23.76
		36		11.67	1.57	13.24	23.76
		48		11.35	1.99	13.34	23.76
		54		11.16	2.12	13.28	23.76
		6	5 700	12.58	0.32	12.90	23.69
		9		12.36	0.48	12.84	23.69
		12		12.24	0.61	12.85	23.69
		18		12.05	0.88	12.93	23.69
		24		11.75	1.11	12.86	23.69
		36		11.49	1.57	13.06	23.69
		48		11.21	1.99	13.20	23.69
		54		11.05	2.12	13.17	23.69

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

-11n_HT20

Operation Mode	Channel	Data rate	Channel Frequency (MHz)	Reading (dB m)	Duty factor (dB)	Result (dB m)	Limit (dB m)
Non DFS 11n_HT20	Low	MCS0	5 180	11.01	0.35	11.36	16.78
		MCS1		10.87	0.64	11.51	16.78
		MCS2		10.75	0.91	11.66	16.78
		MCS3		10.59	1.18	11.77	16.78
		MCS4		10.37	1.61	11.98	16.78
		MCS5		10.11	1.94	12.05	16.78
		MCS6		9.88	2.09	11.97	16.78
		MCS7		9.75	2.27	12.02	16.78
	Middle	MCS0	5 220	10.82	0.35	11.17	16.79
		MCS1		10.68	0.64	11.32	16.79
		MCS2		10.56	0.91	11.47	16.79
		MCS3		10.40	1.18	11.58	16.79
		MCS4		10.18	1.61	11.79	16.79
		MCS5		9.96	1.94	11.90	16.79
		MCS6		9.69	2.09	11.78	16.79
		MCS7		9.56	2.27	11.83	16.79
	High	MCS0	5 240	11.02	0.35	11.37	16.79
		MCS1		10.88	0.64	11.52	16.79
		MCS2		10.76	0.91	11.67	16.79
		MCS3		10.60	1.18	11.78	16.79
		MCS4		10.38	1.61	11.99	16.79
		MCS5		10.16	1.94	12.10	16.79
		MCS6		9.89	2.09	11.98	16.79
		MCS7		9.76	2.27	12.03	16.79

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

Operation Mode	Channel	Data rate	Channel Frequency (MHz)	Reading (dB m)	Duty factor (dB)	Result (dB m)	Limit (dB m)
DFS 11n_HT20	Lower Band	MCS0	5 260	11.21	0.35	11.56	23.77
		MCS1		11.07	0.64	11.71	23.77
		MCS2		10.95	0.91	11.86	23.77
		MCS3		10.79	1.18	11.97	23.77
		MCS4		10.35	1.61	11.96	23.77
		MCS5		10.11	1.94	12.05	23.77
		MCS6		9.85	2.09	11.94	23.77
		MCS7		9.77	2.27	12.04	23.77
		MCS0	5 300	10.99	0.35	11.34	23.80
		MCS1		10.85	0.64	11.49	23.80
		MCS2		10.65	0.91	11.56	23.80
		MCS3		10.57	1.18	11.75	23.80
		MCS4		10.12	1.61	11.73	23.80
		MCS5		9.74	1.94	11.68	23.80
		MCS6		9.41	2.09	11.50	23.80
		MCS7		9.32	2.27	11.59	23.80
		MCS0	5 320	10.75	0.35	11.10	23.80
		MCS1		10.61	0.64	11.25	23.80
		MCS2		10.49	0.91	11.40	23.80
		MCS3		10.33	1.18	11.51	23.80
		MCS4		10.02	1.61	11.63	23.80
		MCS5		9.74	1.94	11.68	23.80
		MCS6		9.45	2.09	11.54	23.80
		MCS7		9.39	2.27	11.66	23.80

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

Operation Mode	Channel	Data rate	Channel Frequency (MHz)	Reading (dB m)	Duty factor (dB)	Result (dB m)	Limit (dB m)
DFS 11n_HT20	Upper Band	MCS0	5 500	10.95	0.35	11.30	23.78
		MCS1		10.81	0.64	11.45	23.78
		MCS2		10.69	0.91	11.60	23.78
		MCS3		10.53	1.18	11.71	23.78
		MCS4		10.24	1.61	11.85	23.78
		MCS5		9.95	1.94	11.89	23.78
		MCS6		9.72	2.09	11.81	23.78
		MCS7		9.59	2.27	11.86	23.78
		MCS0	5 580	11.18	0.35	11.53	23.78
		MCS1		11.04	0.64	11.68	23.78
		MCS2		10.92	0.91	11.83	23.78
		MCS3		10.76	1.18	11.94	23.78
		MCS4		10.54	1.61	12.15	23.78
		MCS5		10.32	1.94	12.26	23.78
		MCS6		10.05	2.09	12.14	23.78
		MCS7		9.92	2.27	12.19	23.78
		MCS0	5 700	12.35	0.35	12.70	23.79
		MCS1		12.21	0.64	12.85	23.79
		MCS2		12.09	0.91	13.00	23.79
		MCS3		11.93	1.18	13.11	23.79
		MCS4		11.53	1.61	13.14	23.79
		MCS5		11.31	1.94	13.25	23.79
		MCS6		11.04	2.09	13.13	23.79
		MCS7		10.91	2.27	13.18	23.79

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

-11n_HT40

Operation Mode	Channel	Data rate	Channel Frequency (MHz)	Reading (dB m)	Duty factor (dB)	Result (dB m)	Limit (dB m)
Non DFS 11n_HT40	Low	MCS0	5 190	9.04	0.60	9.64	17
		MCS1		8.74	1.04	9.78	17
		MCS2		8.61	1.45	10.06	17
		MCS3		8.32	1.76	10.08	17
		MCS4		7.88	2.26	10.14	17
		MCS5		7.45	2.65	10.10	17
		MCS6		7.36	2.78	10.14	17
		MCS7		7.17	2.96	10.13	17
	High	MCS0	5 230	8.87	0.60	9.47	17
		MCS1		8.52	1.04	9.56	17
		MCS2		8.15	1.45	9.60	17
		MCS3		7.86	1.76	9.62	17
		MCS4		7.35	2.26	9.61	17
		MCS5		7.11	2.65	9.76	17
		MCS6		6.81	2.78	9.59	17
		MCS7		6.67	2.96	9.63	17

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

Operation Mode	Channel	Data rate	Channel Frequency (MHz)	Reading (dB m)	Duty factor (dB)	Result (dB m)	Limit (dB m)
DFS 11n_HT40	Lower Band	MCS0	5 270	9.28	0.60	9.88	24
		MCS1		9.05	1.04	10.09	24
		MCS2		8.61	1.45	10.06	24
		MCS3		8.23	1.76	9.99	24
		MCS4		7.78	2.26	10.04	24
		MCS5		7.41	2.65	10.06	24
		MCS6		7.31	2.78	10.09	24
		MCS7		7.11	2.96	10.07	24
		MCS0	5 310	8.82	0.60	9.42	24
		MCS1		8.52	1.04	9.56	24
		MCS2		8.31	1.45	9.76	24
		MCS3		8.03	1.76	9.79	24
		MCS4		7.45	2.26	9.71	24
		MCS5		7.12	2.65	9.77	24
		MCS6		6.98	2.78	9.76	24
		MCS7		6.82	2.96	9.78	24

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

Operation Mode	Channel	Data rate	Channel Frequency (MHz)	Reading (dB m)	Duty factor (dB)	Result (dB m)	Limit (dB m)
DFS 11n_HT40	Upper Band	MCS0	5 510	9.05	0.60	9.65	24
		MCS1		8.69	1.04	9.73	24
		MCS2		8.32	1.45	9.77	24
		MCS3		8.12	1.76	9.88	24
		MCS4		7.59	2.26	9.85	24
		MCS5		7.13	2.65	9.78	24
		MCS6		7.02	2.78	9.80	24
		MCS7		6.91	2.96	9.87	24
		MCS0	5 550	9.12	0.60	9.72	24
		MCS1		8.82	1.04	9.86	24
		MCS2		8.36	1.45	9.81	24
		MCS3		7.95	1.76	9.71	24
		MCS4		7.61	2.26	9.87	24
		MCS5		7.31	2.65	9.96	24
		MCS6		7.19	2.78	9.97	24
		MCS7		7.01	2.96	9.97	24
		MCS0	5 670	9.42	0.60	10.02	24
		MCS1		9.13	1.04	10.17	24
		MCS2		8.63	1.45	10.08	24
		MCS3		8.31	1.76	10.07	24
		MCS4		7.74	2.26	10.00	24
		MCS5		7.45	2.65	10.10	24
		MCS6		7.32	2.78	10.10	24
		MCS7		7.22	2.96	10.18	24

Note;

Result = Reading + Duty factor

Duty factor = $10\log(1/x)$, x = Duty cycle

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

5. Peak power spectral density

5.1. Test setup



5.2. Limit

5.2.1. FCC 15.407

(a)(1)

For the band 5.15-5.25 GHz band, the peak power spectral density shall not exceed 4 dBm in any 1 MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a)(2)

For the band 5.25–5.35 GHz and 5.47–5.725 GHz bands, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

5.3. Test procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

1. This measurement settings are specified in clause d) Method SA-2 of section E of KDB 789033.
2. Set span to encompass the 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
3. Set RBW = 1 MHz
4. Set VBW $\geq$ 3 MHz
5. Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
6. Sweep time = auto.
7. Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
8. Do not use sweep triggering. Allow the sweep to "free run".
9. Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
11. Make the following adjustments to the peak value of the spectrum, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.
11. The result is the PPSD.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

5.4. Test result

Ambient temperature : (24 ± 2) °C
Relative humidity : 49 % R.H.

5.4.1. Non-DFS Band

Operation Mode	Channel	Data Rate (Mbps)	Channel Frequency (MHz)	Peak power spectral density (dB m)			Limit (dB m)
				Reading	Duty factor	Result	
11a	Low	6	5 180	2.506	0.32	2.826	4
	Middle	6	5 220	1.843	0.32	2.163	
	High	6	5 240	1.965	0.32	2.285	
11n_HT20	Low	MCS0	5 180	1.025	0.35	1.375	
	Middle	MCS0	5 220	0.422	0.35	0.772	
	High	MCS0	5 240	0.940	0.35	1.290	
11n_HT40	Low	MCS0	5 190	-4.676	0.60	-4.076	
	High	MCS0	5 230	-5.326	0.60	-4.726	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

5.4.2. DFS Band

Operation Mode	Channel	Data Rate (Mbps)	Channel Frequency (MHz)	Peak power spectral density (dB m)			Limit (dB m)
				Reading	Duty factor	Result	
11a	Lower Band	6	5 260	2.253	0.32	2.573	11
		6	5 300	1.430	0.32	1.750	
		6	5 320	1.361	0.32	1.681	
	Upper Band	6	5 500	1.311	0.32	1.631	
		6	5 580	1.840	0.32	2.160	
		6	5 700	2.013	0.32	2.333	
11n_HT20	Lower Band	MCS0	5 260	0.656	0.35	1.006	
		MCS0	5 300	0.092	0.35	0.442	
		MCS0	5 320	-0.377	0.35	-0.027	
	Upper Band	MCS0	5 500	-0.178	0.35	0.172	
		MCS0	5 580	0.405	0.35	0.755	
		MCS0	5 700	0.728	0.35	1.078	
11n_HT40	Lower Band	MCS0	5 270	-4.893	0.60	-4.293	
		MCS0	5 310	-5.358	0.60	-4.758	
	Upper Band	MCS0	5 510	-5.324	0.60	-4.724	
		MCS0	5 550	-5.438	0.60	-4.838	
		MCS0	5 670	-4.663	0.60	-4.063	

Note;

Result = Reading + Duty factor

Duty factor = $10\log(1/x)$, x = Duty cycle

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371


www.ee.sgs.com/korea

802.11a (Non-DFS)

Low Channel (5 180 MHz)

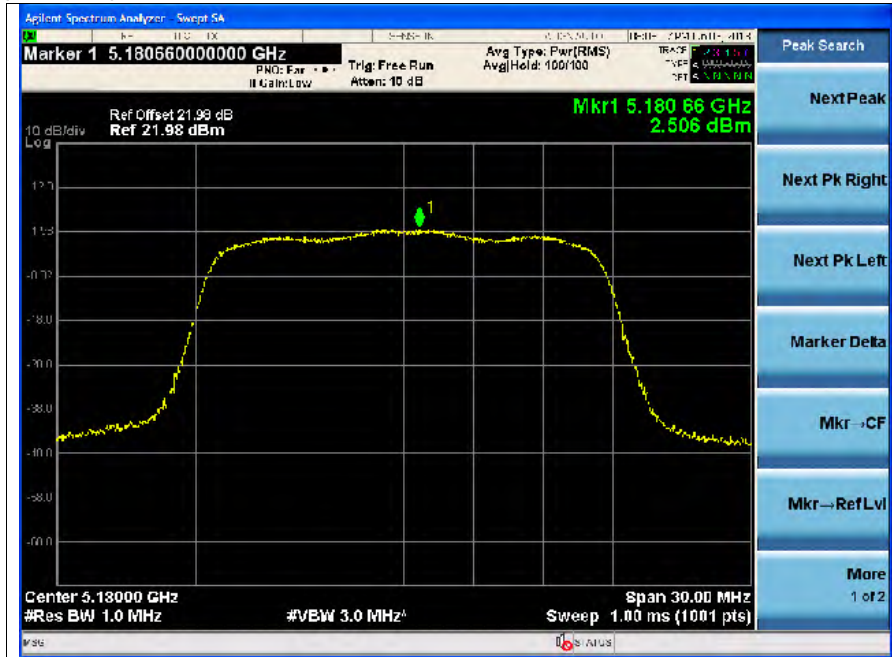

Middle Channel (5 220 MHz)

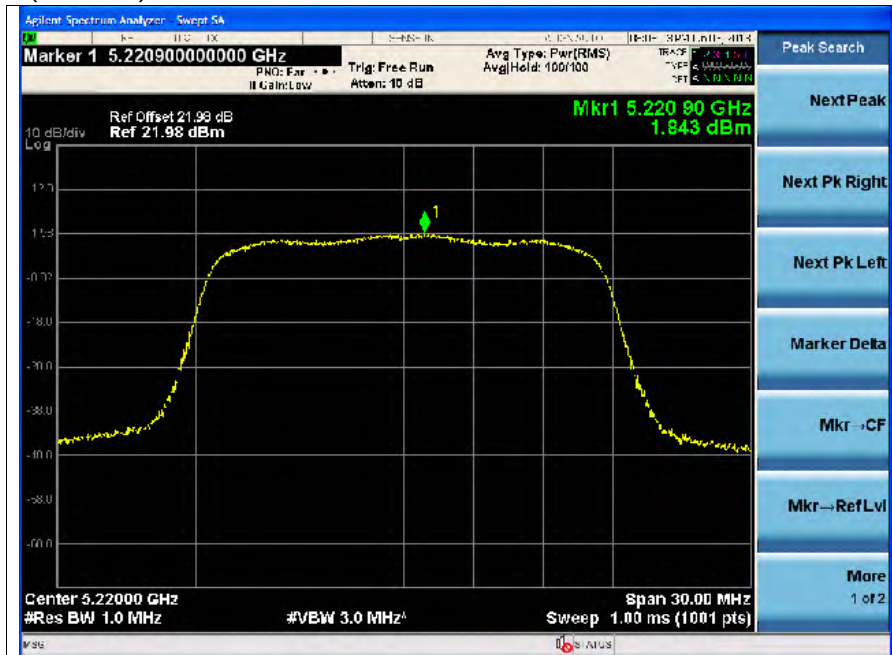


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

High Channel (5 240 MHz)

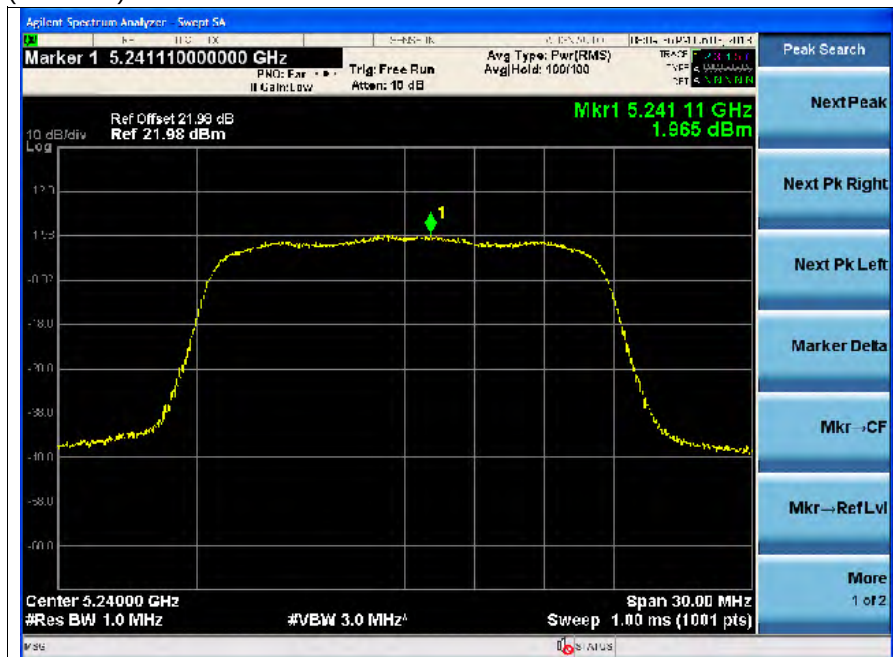

802.11a (DFS)

Low Channel (5 260 MHz)




The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040


Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

Middle Channel (5 300 MHz)

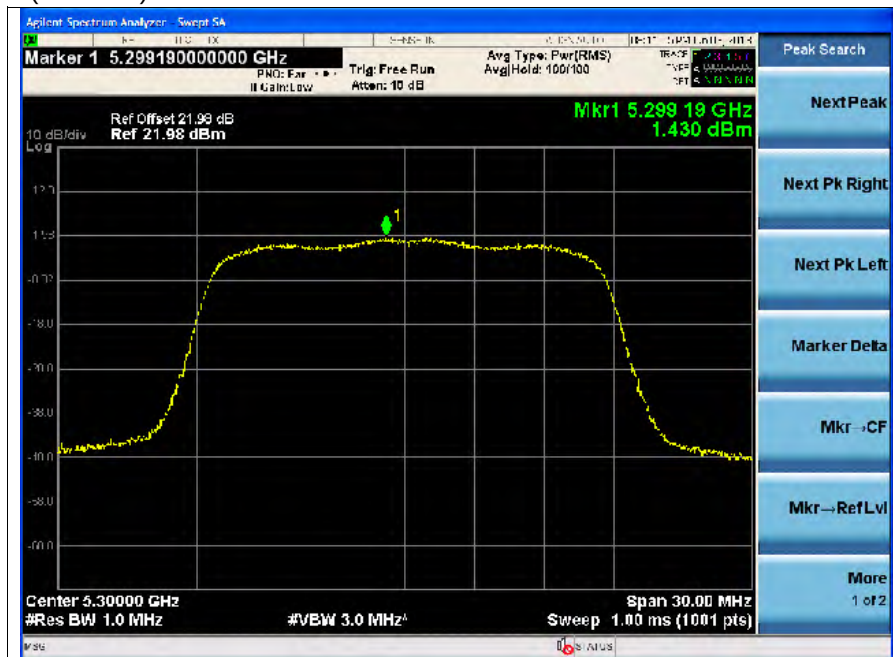

High Channel (5 320 MHz)

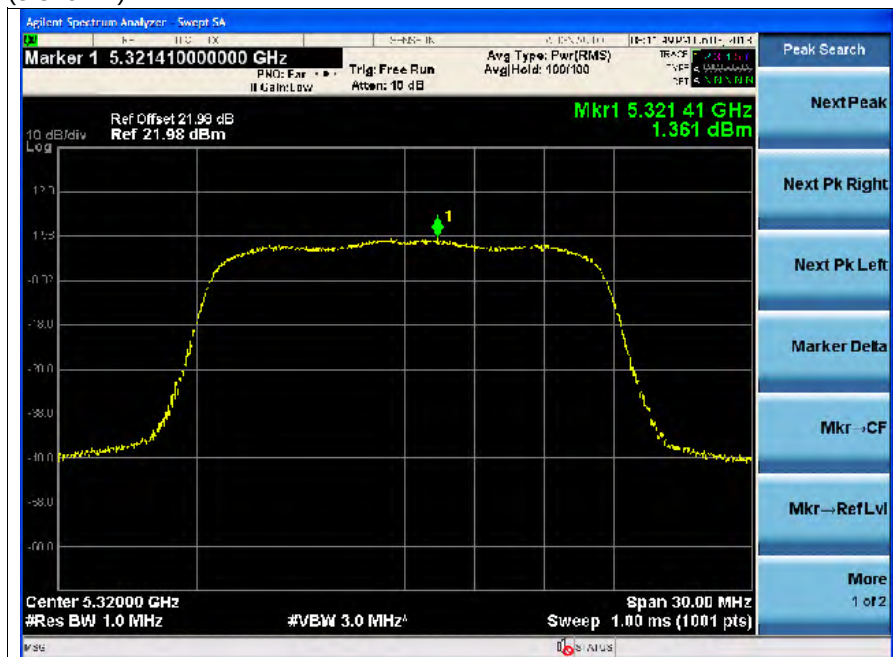

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371


www.ee.sgs.com/korea

802.11a (DFS)

Low Channel (5 500 MHz)

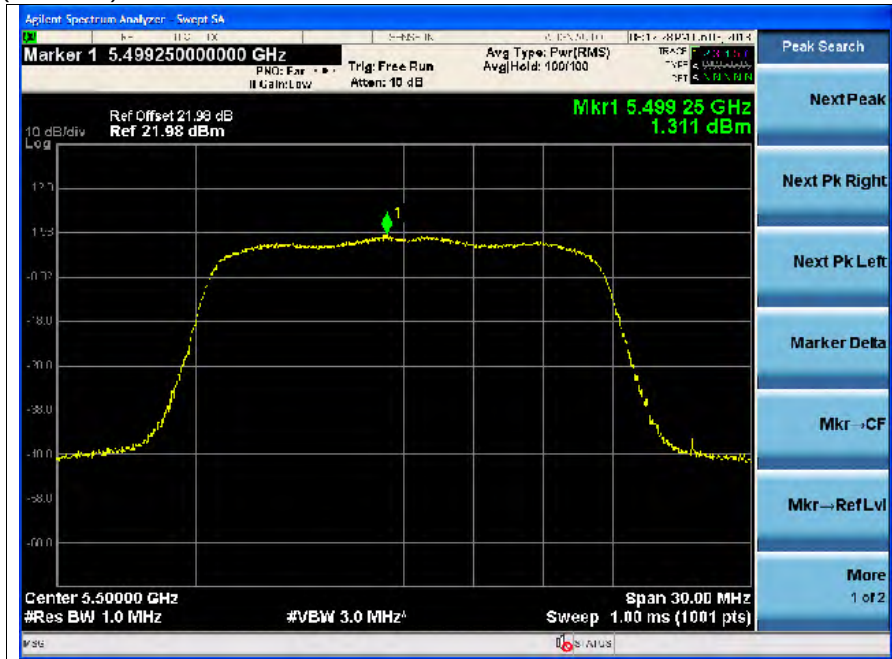

Middle Channel (5 580 MHz)

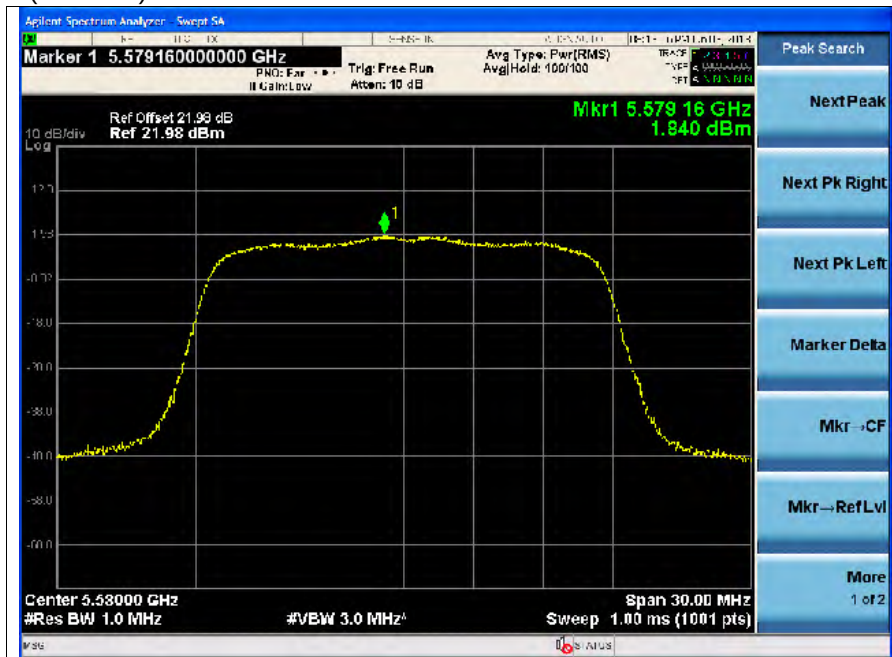


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371


www.ee.sgs.com/korea

High Channel (5 700 MHz)

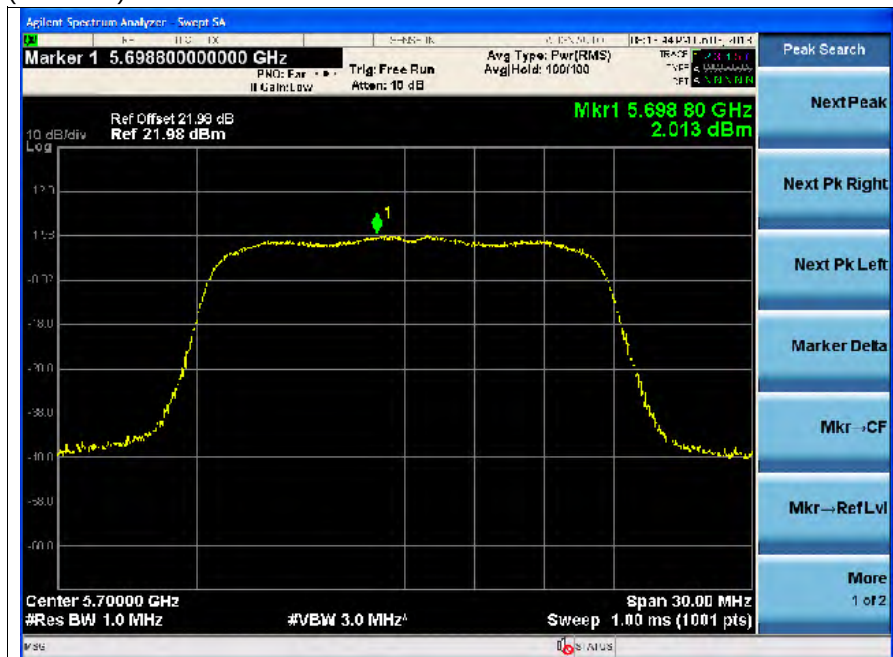

802.11n-HT20 (Non-DFS)

Low Channel (5 180 MHz)

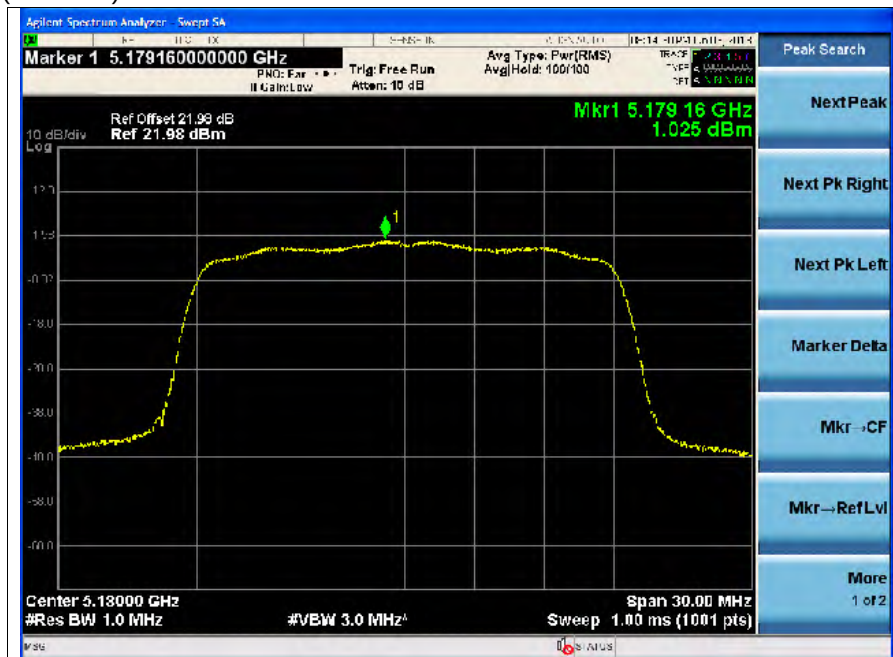

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040


Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

Middle Channel (5 220 MHz)



High Channel (5 240 MHz)

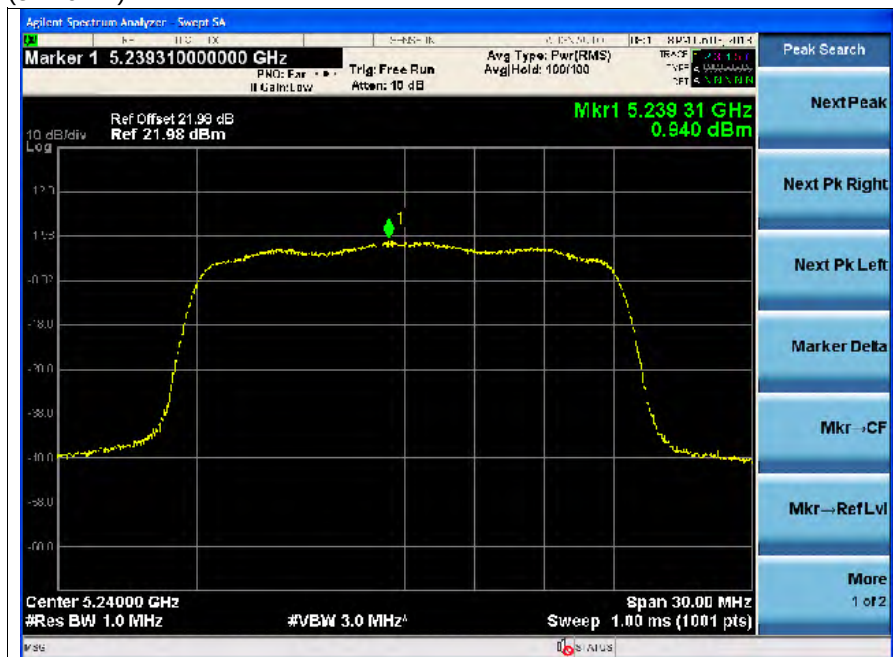

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

802.11-HT20 (DFS)

Low Channel (5 260 MHz)

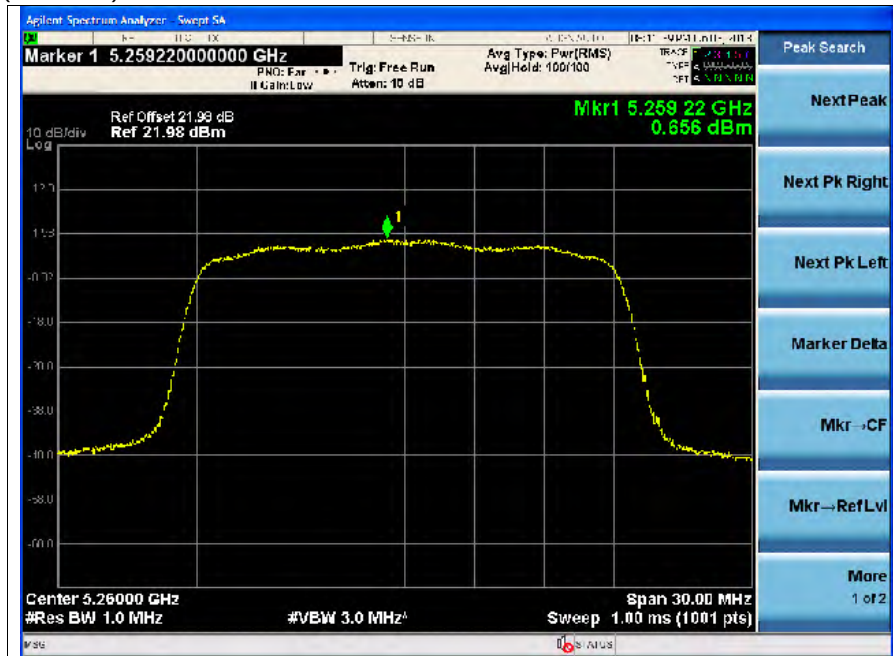

Middle Channel (5 300 MHz)




The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371


www.ee.sgs.com/korea

High Channel (5 320 MHz)

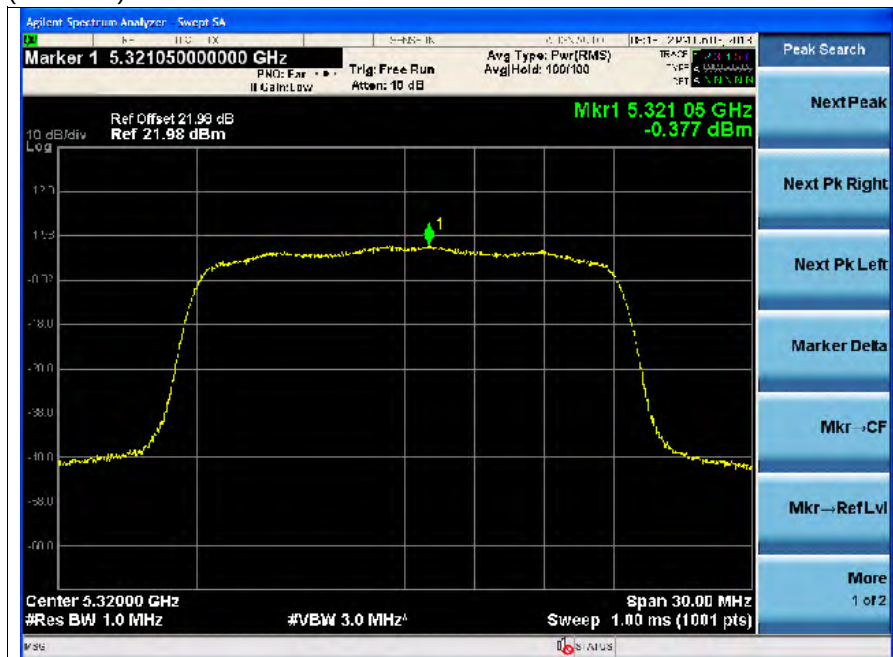

802.11-HT20 (DFS)

Low Channel (5 500 MHz)

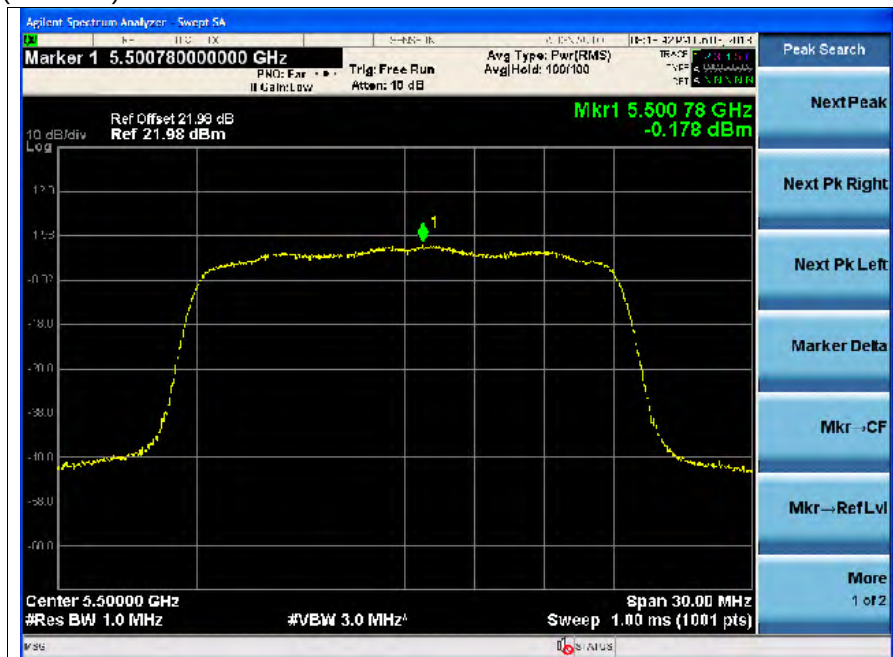


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

Middle Channel (5 580 MHz)

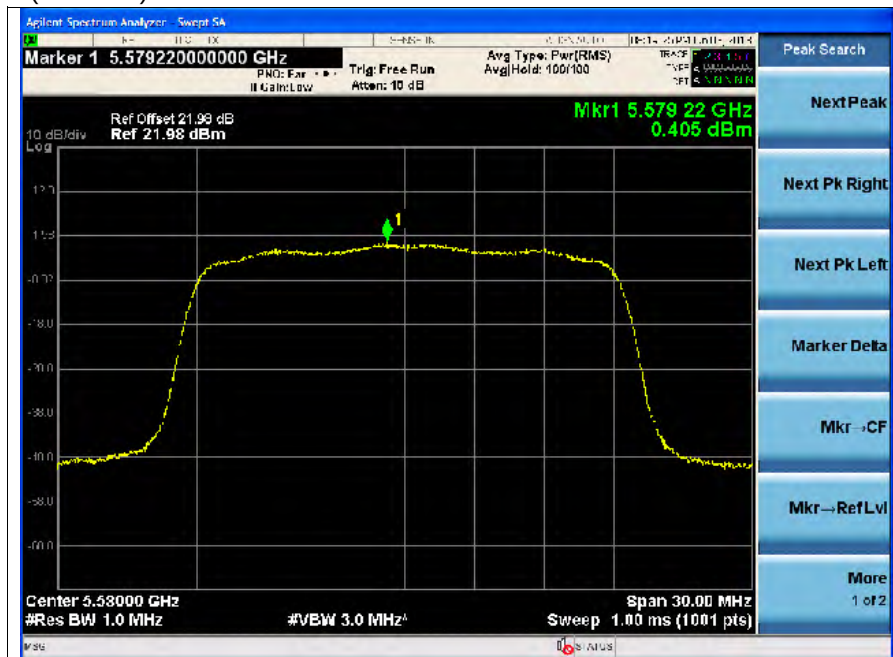

High Channel (5 700 MHz)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

802.11n-HT40 (Non-DFS)

Low Channel (5 190 MHz)

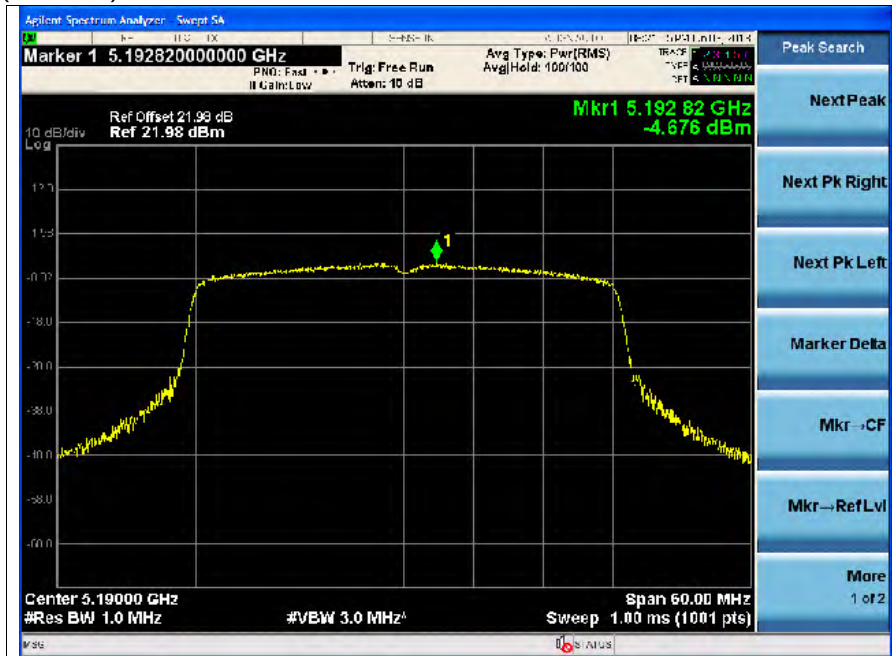

High Channel (5 230 MHz)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371


www.ee.sgs.com/korea

802.11-HT40 (DFS)

Low Channel (5 270 MHz)



High Channel (5 310 MHz)

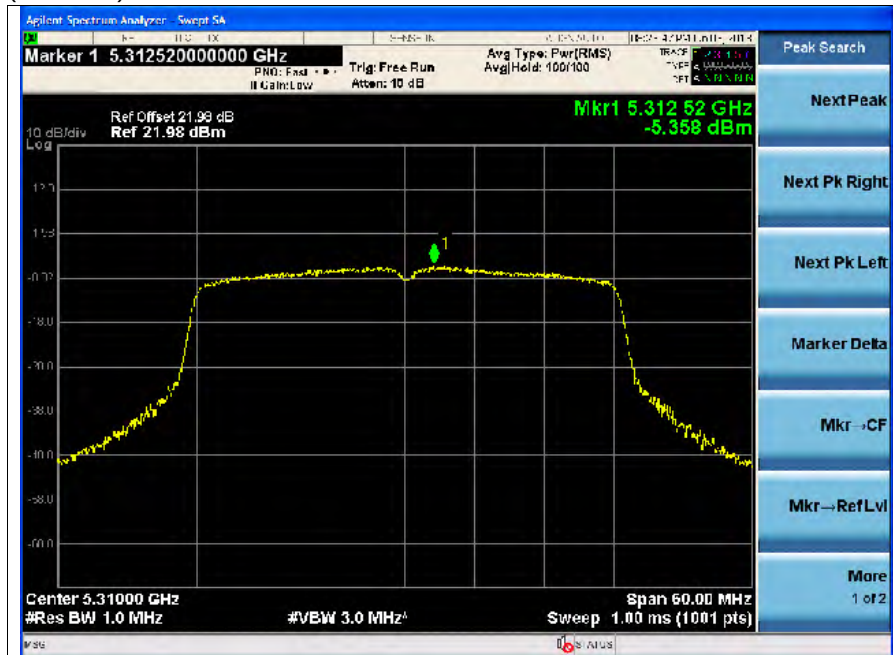

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371


www.ee.sgs.com/korea

802.11-HT40 (DFS)

Low Channel (5 510 MHz)



Middle Channel (5 550 MHz)

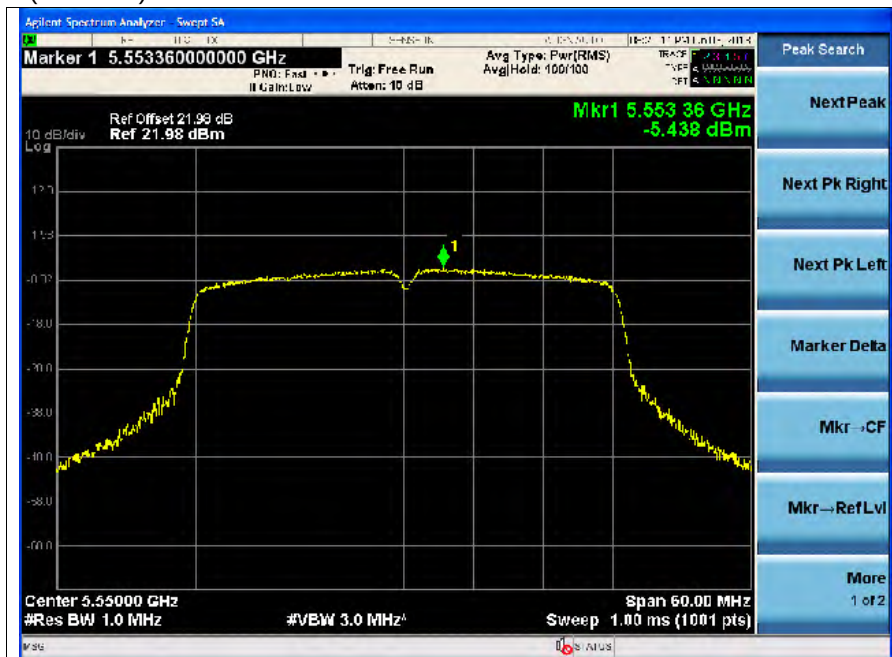

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

High Channel (5 670 MHz)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

6. Peak excursion

6.1. Test setup



6.2. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

6.3. Test procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

1. This measurement settings are specified in section G of KDB 789033.
2. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth.
3. Find the maximum of the peak-max-hold spectrum.
4. Set RBW = 1 MHz.
5. Set VBW $\geq$ 3 MHz.
6. Detector = Peak.
7. Trace mode = max-hold.
8. Allow the sweeps to continue until the trace stabilizes.
9. Use the peak search function to find the peak of the spectrum.
10. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.
 - Testing each modulation mode on a single channel in a single operating band is sufficient to demonstrate compliance with the peak excursion requirement.
 - Tests performed all signal types, all modulation types, all bandwidth modes, all variations in signal parameters.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

6.4. Test result

Ambient temperature : (24 ± 2) °C
Relative humidity : 49 % R.H.

- 11a

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Peak excursion (dB)	Limit (dB)
36	5 180	6	8.797	13
		9	8.152	
		12	9.182	
		18	9.287	
		24	10.058	
		36	9.843	
		48	10.243	
		54	11.353	

- 11n_HT20

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Peak excursion (dB)	Limit (dB)
36	5 180	MCS0	8.295	13
		MCS1	8.812	
		MCS2	8.828	
		MCS3	9.315	
		MCS4	9.301	
		MCS5	10.010	
		MCS6	10.377	
		MCS7	9.981	

- 11n_HT40

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Peak excursion (dB)	Limit (dB)
36	5 190	MCS0	8.679	13
		MCS1	9.373	
		MCS2	9.578	
		MCS3	10.325	
		MCS4	11.156	
		MCS5	10.176	
		MCS6	10.376	
		MCS7	11.069	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040


Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

5 180 MHz(12 Mbps)



5 180 MHz(18 Mbps)

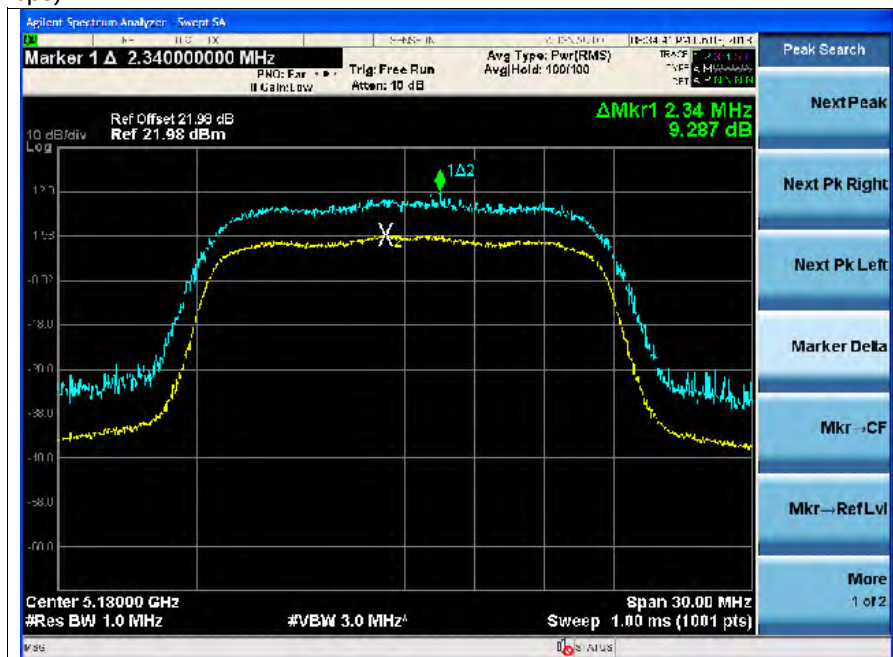


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040


Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

5 180 MHz(24 Mbps)

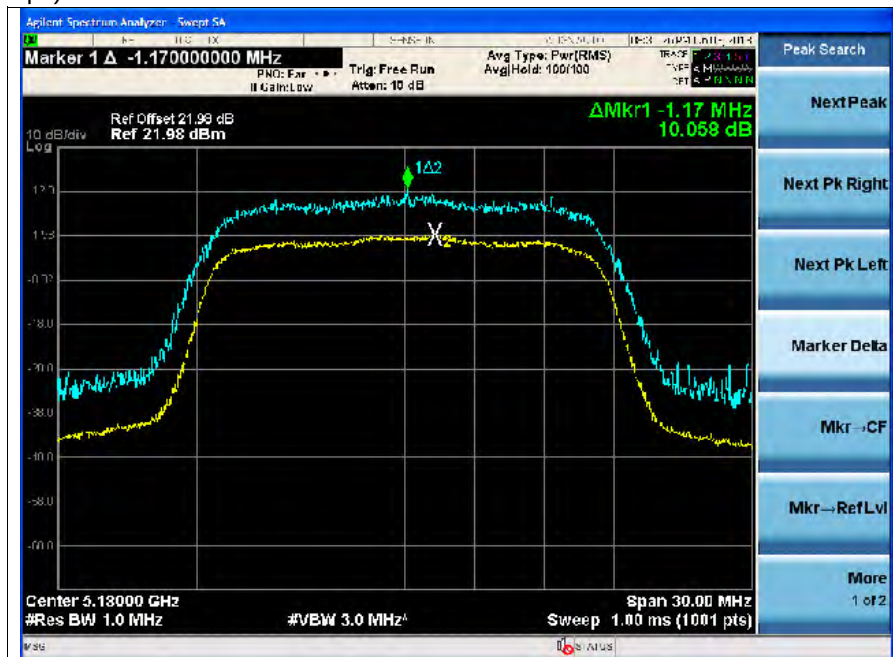

5 180 MHz(36 Mbps)

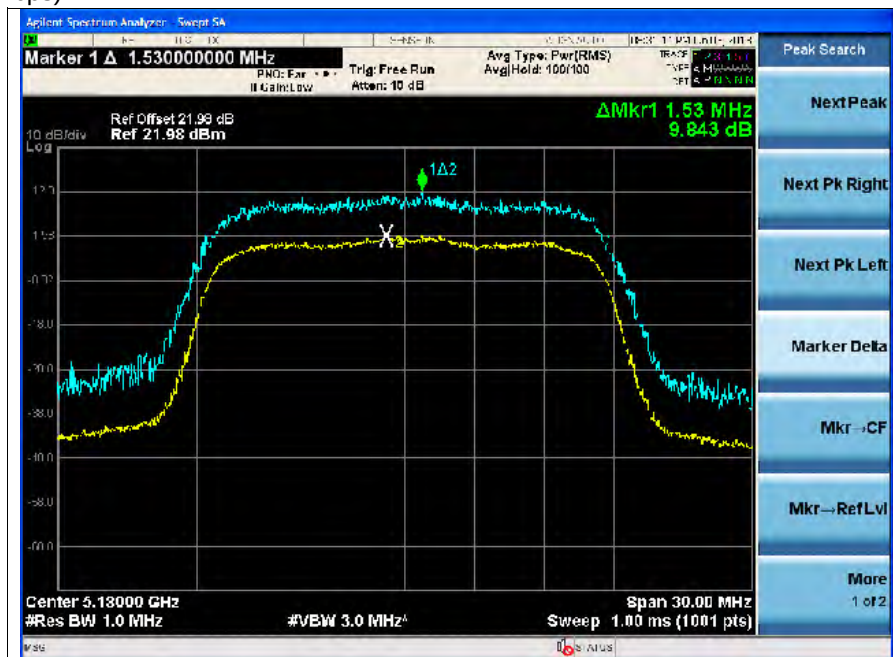


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040


Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

5 180 MHz(48 Mbps)

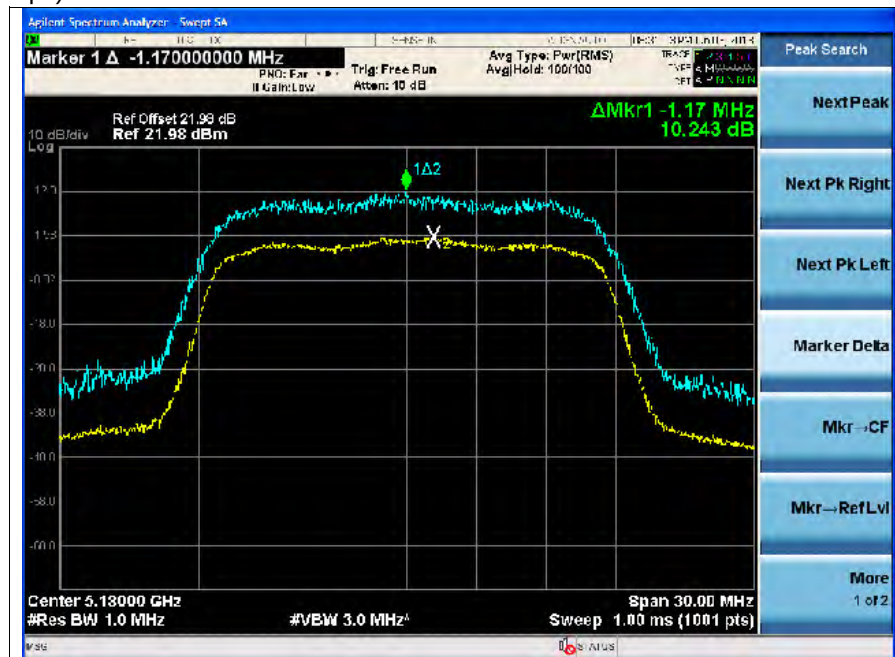

5 180 MHz(54 Mbps)

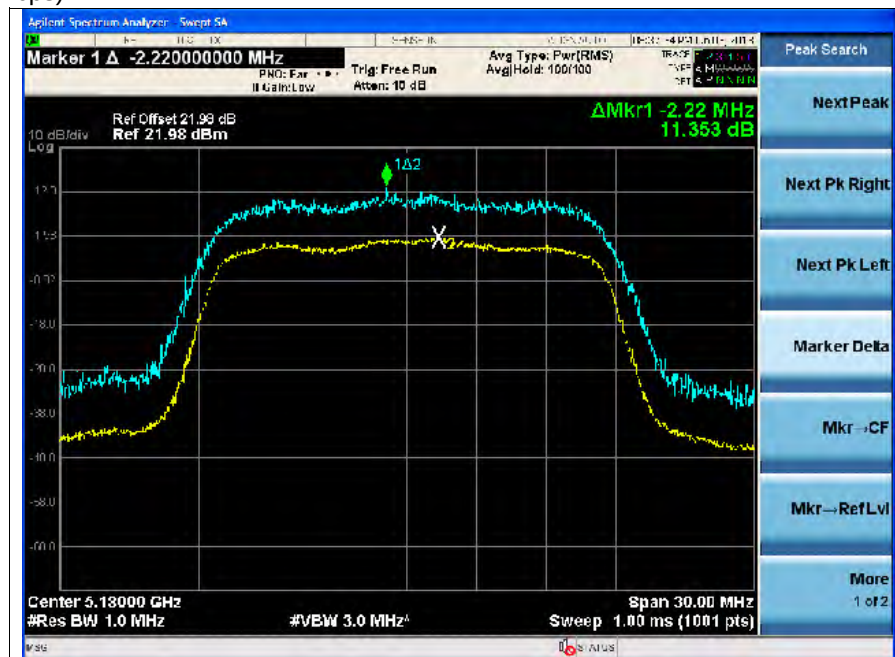

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory)

18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

5 180 MHz(MCS2)



5 180 MHz(MCS3)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040


Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

5 180 MHz(MCS4)



5 180 MHz(MCS5)

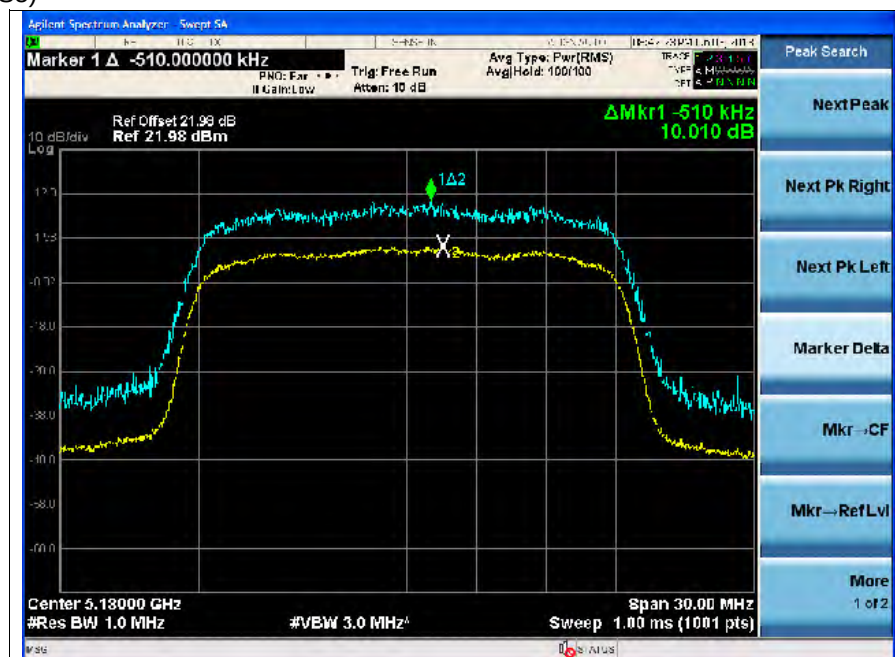

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

5 180 MHz(MCS6)



5 180 MHz(MCS7)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

- 11n_HT20

5 190 MHz(MCS0)



5 190 MHz(MCS1)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040


Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

5 190 MHz(MCS2)



5 190 MHz(MCS3)

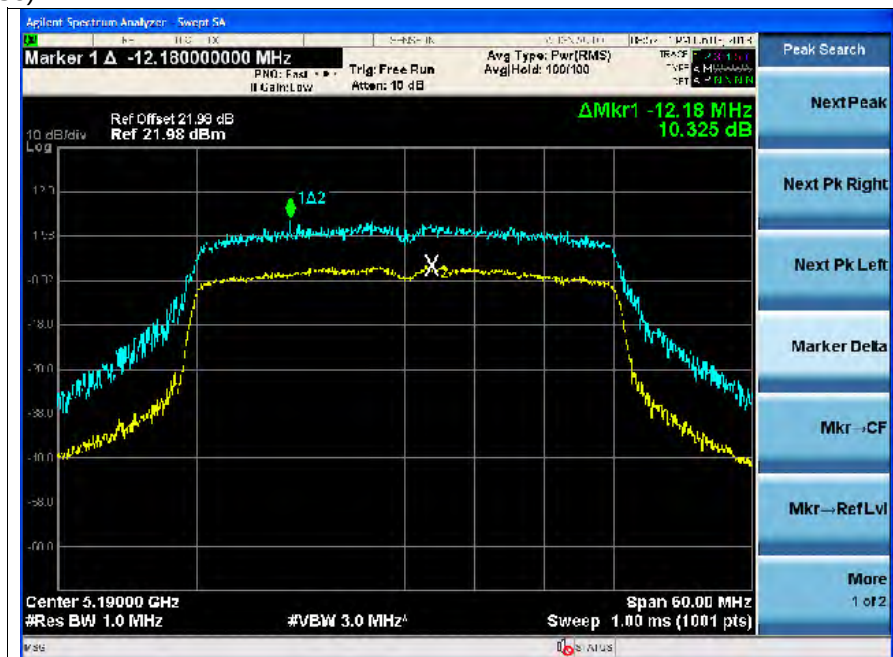

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

5 190 MHz(MCS4)



5 190 MHz(MCS5)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

5 190 MHz(MCS6)



5 190 MHz(MCS7)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

7. Transmitter AC Power Line Conducted Emission

7.1. Test Setup

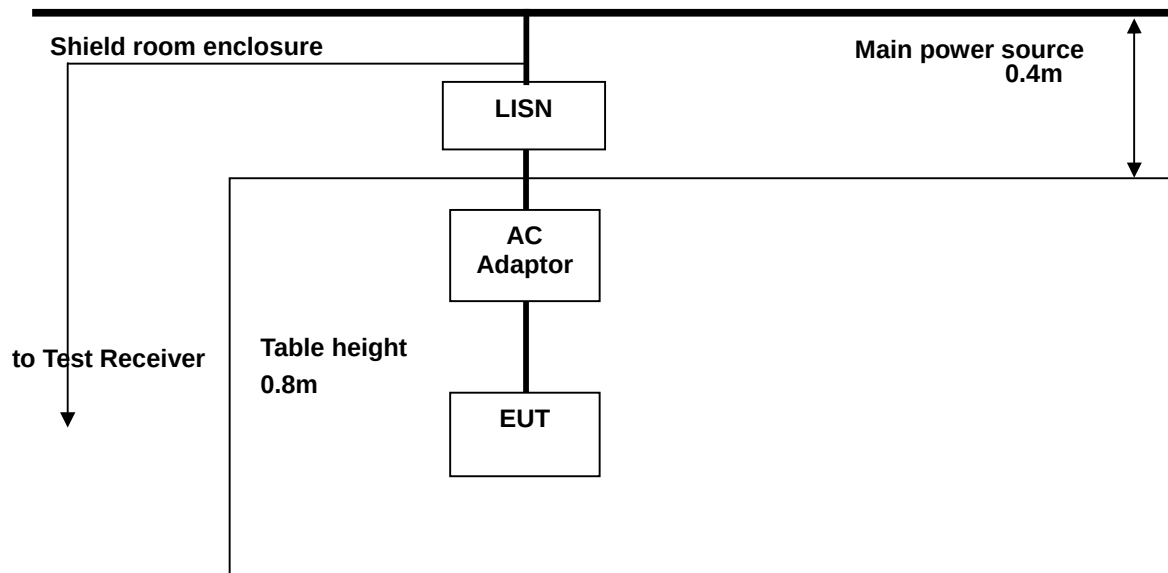

7.2. Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

* Decreases with the logarithm of the frequency.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

7.3. Test Procedures

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

AC line conducted emissions from the EUT were measured according to the dictates of ANSI C63.4-2003

1. The test procedure is performed in a 6.5m × 3.6m × 3.6m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m(W) × 1.5 m(L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. The excess power cable between the EUT and the LISN was bundled. All connecting cables of EUT were moved to find the maximum emission.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

7.4. Test Results (Worst case configuration_ 11n_HT40 mode, MCS0)

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Ambient temperature : (24 ± 2) °C
Relative humidity : 47 % R.H.

Frequency range : 0.15 MHz – 30 MHz
Measured Bandwidth : 9 kHz

FREQ. (MHz)	LEVEL(dB μ V)		LINE	LIMIT(dB μ V)		MARGIN(dB)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.16	49.98	32.28	N	65.52	55.52	15.54	23.24
0.18	48.38	33.58	N	64.53	54.53	16.15	20.95
0.21	43.78	31.28	N	63.17	53.17	19.39	21.89
0.44	27.99	22.59	N	57.02	47.02	29.03	24.43
1.62	17.51	13.11	N	56.00	46.00	38.49	32.89
4.55	14.75	8.65	N	56.00	46.00	41.25	37.35
0.16	50.30	33.60	H	65.41	55.41	15.11	21.81
0.18	48.20	33.10	H	64.72	54.72	16.52	21.62
0.21	44.30	31.40	H	63.32	53.32	19.02	21.92
0.24	40.80	28.70	H	62.20	52.20	21.40	23.50
0.44	30.81	23.91	H	56.99	46.99	26.18	23.08
1.72	14.44	10.84	H	56.00	46.00	41.56	35.16

Note ;

1. Line (H): Hot, Line (N): Neutral
2. All modes of operation were investigated and the worst-case emissions are reported using 11n_HT40 MCS0
3. The limit for Class B device(s) from 150 kHz to 30 MHz are specified in Section of the Title 47 CFR.
4. Traces shown in plot mad using a peak detector and average detector
5. Deviations to the Specifications: None.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

Plot of Conducted Power line

Test mode : (Neutral)

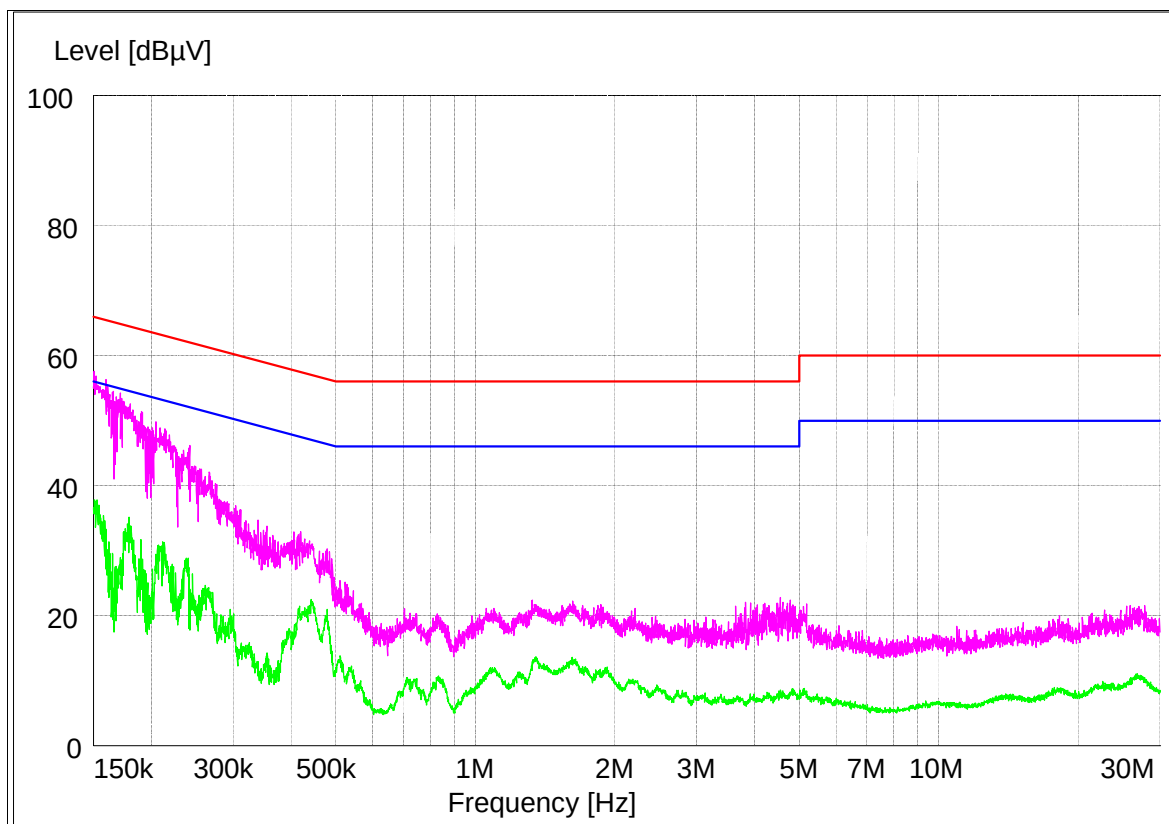


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea

Test mode : (Hot)

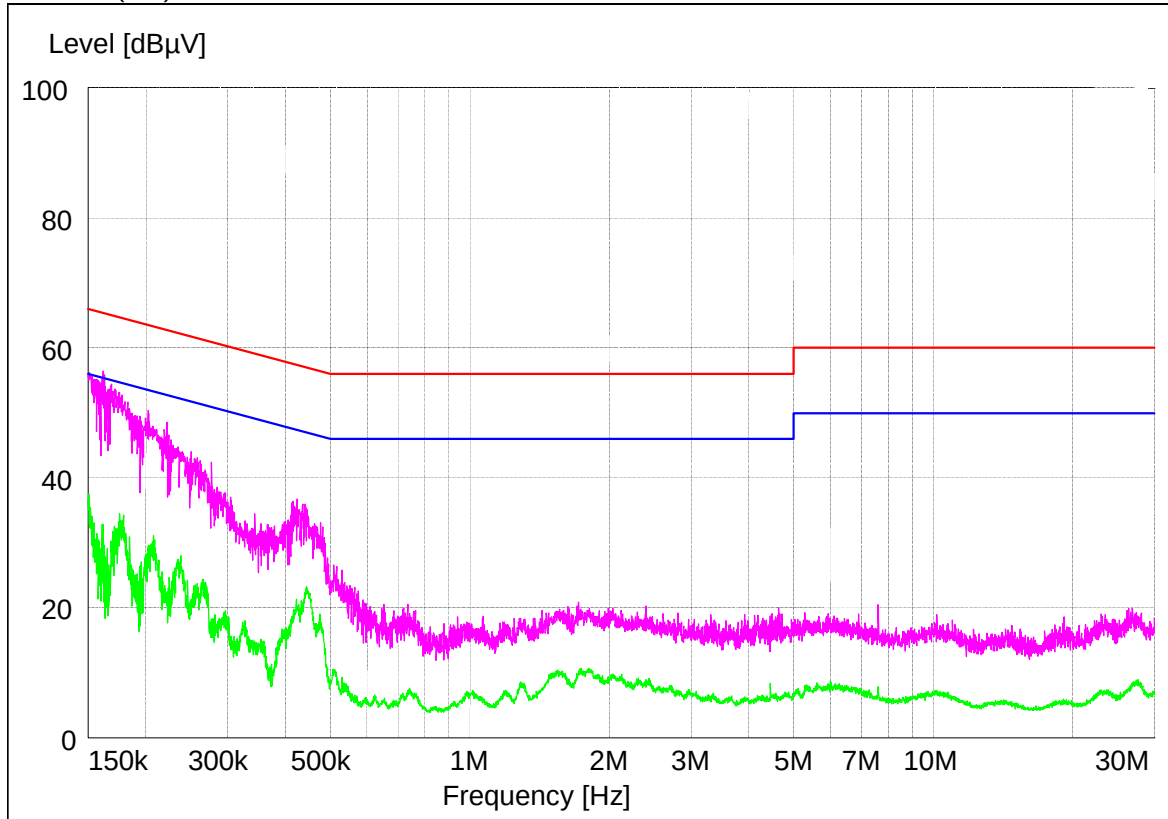

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.ee.sgs.com/korea