



TEST REPORT

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr		Report No.: KR21-SRF0206 Page (1) of (24)	
1. Client - Name : Samsung Electronics Co., Ltd. - Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea - Date of Receipt : 2021-08-20			
2. Use of Report : Certification			
3. Name of Product / Model : Galaxy SmartTag / EI-T5300			
4. Manufacturer / Country of Origin : SOLUM VINACO., LTD / Vietnam			
5. FCC ID : A3LEIT5300			
6. Date of Test : 2021-08-31 to 2021-09-02			
7. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing (Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)			
8. Test method used : FCC Part 15 Subpart C, 15.247			
9. Test Result : Refer to the test result in the test report			
Affirmation	Tested by Name : Taekyong Nam (Signature)		Technical Manager Name : Heesu Ahn (Signature)
2021-09-09			
KCTL Inc.			
As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.			

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR21-SRF0206 Page (2) of (24)	
---	---	---

REPORT REVISION HISTORY

Date	Revision	Page No
2021-09-09	Originally issued	-

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ Statement not required by the standard or client used for type testing

CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Frequency/channel operations.....	5
3.	Antenna requirement	5
4.	Summary of tests.....	6
5.	Measurement uncertainty	7
6.	Spurious Emission, Band Edge and Restricted bands.....	8
7.	Measurement equipment.....	24

1. General information

Client : Samsung Electronics Co., Ltd.
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
 Manufacturer : SOLUM VINACO., LTD
 Address : Plot B3, Ba Thien 2 Industrial park, Thien Ke Ward, Binh Xuyen District, Vinh Phuc Province, 281200., People's Republic of Vietnam
 Laboratory : KCTL Inc.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
 Industry Canada Registration No. : 8035A
 KOLAS No.: KT231

2. Device information

Equipment under test : Galaxy SmartTag
 Model : EI-T5300
 Frequency range : 2 402 MHz ~ 2 480 MHz (Bluetooth Low Energy)
 Modulation technique : GFSK
 Number of channels : 40 ch
 Power source : DC 3.0 V
 Antenna type : PCB pattern Antenna
 Antenna gain : -0.11 dBi
 Software version : 1.1
 Hardware version : 1.1
 Test device serial No. : N/A
 Operation temperature : -20 °C ~ 50 °C

2.1. Frequency/channel operations

This device contains the following capabilities:

Bluetooth Low Energy

Ch.	Frequency (MHz)
00	2 402
.	.
19	2 440
.	.
39	2 480

Table 2.1.1. Bluetooth Low Energy

2.2. Duty Cycle Factor

Test mode	Period (ms)	On time (ms)	Duty cycle		Duty Cycle Factor (dB)
			(Linear)	(%)	
1M Bits/s, 37 Packet	0.626	0.391	0.624 3	62.43	2.05
2M Bits/s, 37 Packet	0.626	0.205	0.327 6	32.76	4.85
1M Bits/s, 255 Packet	1.248	0.598	0.479 3	47.93	3.19
2M Bits/s, 255 Packet	0.625	0.308	0.492 8	49.28	3.07
125k, 37 Packet	3.748	3.100	0.827 3	82.73	0.82
500k, 37 Packet	1.865	1.069	0.573 1	57.31	2.42
125k, 255 Packet	5.613	4.755	0.847 2	84.72	0.72
500k, 255 Packet	1.866	1.483	0.795 0	79.50	1.00

Notes.

1. Duty cycle (Linear) = On time / Period
2. DCF(Duty cycle factor) = $10\log(1/\text{duty cycle})$
3. DCF is not compensated to average result if the duty cycle is more than 98%

3. Antenna requirement

Requirement of FCC part section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The transmitter has permanently attached PCB Pattern antenna(internal antenna) on board.
- The E.U.T Complies with the requirement of §15.203, §15.247.

4. Summary of tests

FCC Part section(s)	Parameter	Test Condition	Test results
15.247(d), 15.205(a), 15.209(a)	Spurious emission	Radiated	Pass ²⁾
	Band-edge, restricted band		Pass ²⁾

Notes:

- For other test items, please refer to original test report.
-Report No. KR20-SRF0297 issued on November 20, 2020 by KCTL Inc.
- Only tested radiated due to change of switching oscillator, X-tal
- The worst-case data rate were: 1M Bits/s, Packet length 37 Bytes
2M Bits/s, Packet length 37 Bytes

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

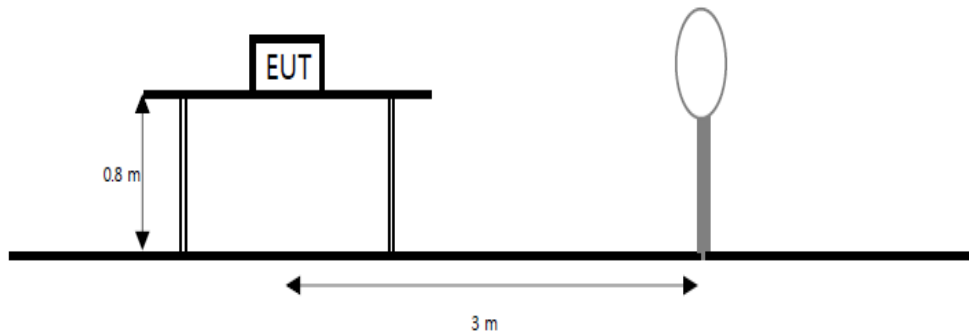
All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicated a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty ($\pm$)	
Conducted emissions	9 kHz ~ 150 kHz	3.7 dB
	150 kHz ~ 30 MHz	3.3 dB

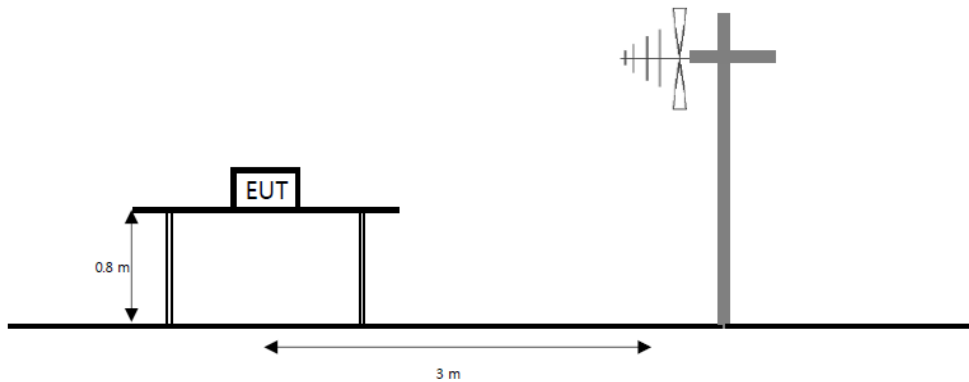
6. Spurious Emission, Band Edge and Restricted bands

Test setup

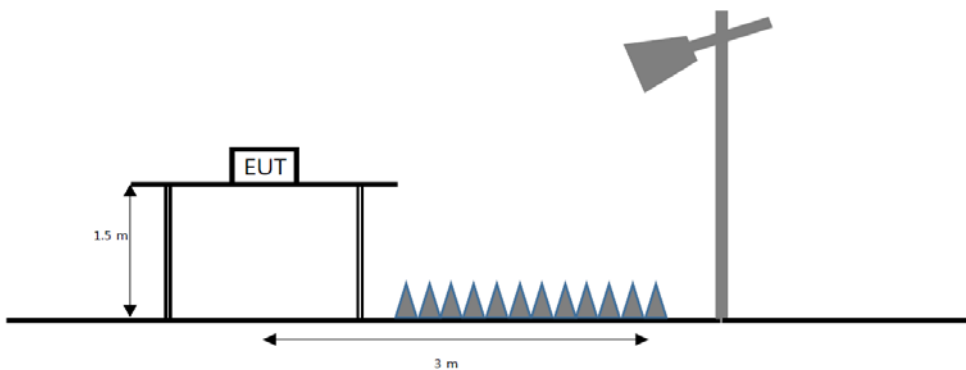
The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions



The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.



The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.



Limit

According to section 15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength ($\mu V/m$)	Measurement distance (m)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 – 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 – 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 – 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 – 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 – 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 – 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 – 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 – 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525	2 483.5 – 2 500	17.7 - 21.4
8.376 25 - 8.386 75	25	2 690 – 2 900	22.01 - 23.12
8.414 25 - 8.414 75	156.7 - 156.9	3 260 – 3 267	23.6 - 24.0
12.29 - 12.293	162.012 5 - 167.17	3 332 – 3 339	31.2 - 31.8
12.519 75 - 12.520 25	167.72 - 173.2	3 345.8 – 3 358	36.43 - 36.5
12.576 75 - 12.577 25	240 - 285	3 600 – 4 400	Above 38.6
13.36 - 13.41	322 - 335.4		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

Test procedure

ANSI C63.10-2013

Test settings**Peak field strength measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW $\geq$ (3 $\times$ RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

Table. RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1 000 MHz	100 kHz to 120 kHz
> 1 000 MHz	1 MHz

Average field strength measurements**Trace averaging with continuous EUT transmission at full power**

If the EUT can be configured or modified to transmit continuously ($D \geq 98\%$), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

1. RBW = 1 MHz (unless otherwise specified).
2. VBW $\geq$ (3 $\times$ RBW).
3. Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
4. Averaging type = power (i.e., rms):
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.

Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT ($D \geq 98\%$) cannot be achieved and the duty cycle is constant (duty cycle variations are less than $\pm 2\%$), then the following procedure shall be used:

1. The EUT shall be configured to operate at the maximum achievable duty cycle.
2. Measure the duty cycle D of the transmitter output signal as described in 11.6.
3. RBW = 1 MHz (unless otherwise specified).
4. VBW $\geq [3 \times \text{RBW}]$.
5. Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
6. Averaging type = power (i.e., rms):

- 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
- 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
7. Sweep time = auto.
8. Perform a trace average of at least 100 traces.
9. A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in step f), then the applicable correction factor is $[10 \log (1 / D)]$, where D is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $[20 \log (1 / D)]$, where D is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous ($D \geq 98\%$) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Notes:

1. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40 \log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20 \log(D_m/D_s)$
 Where:
 F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters
2. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
3. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
4. Average test would be performed if the peak result were greater than the average limit.
5. ¹⁾ means restricted band.

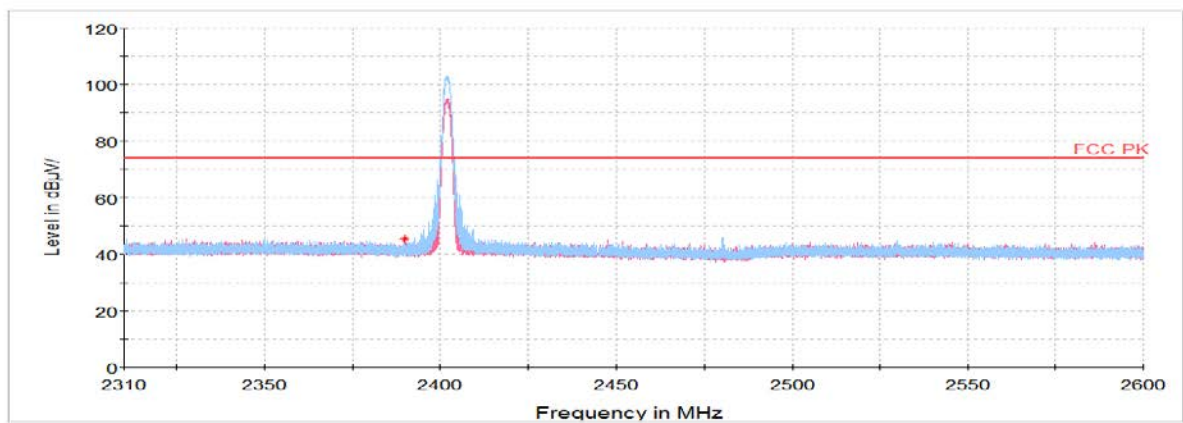
KCTL Inc.

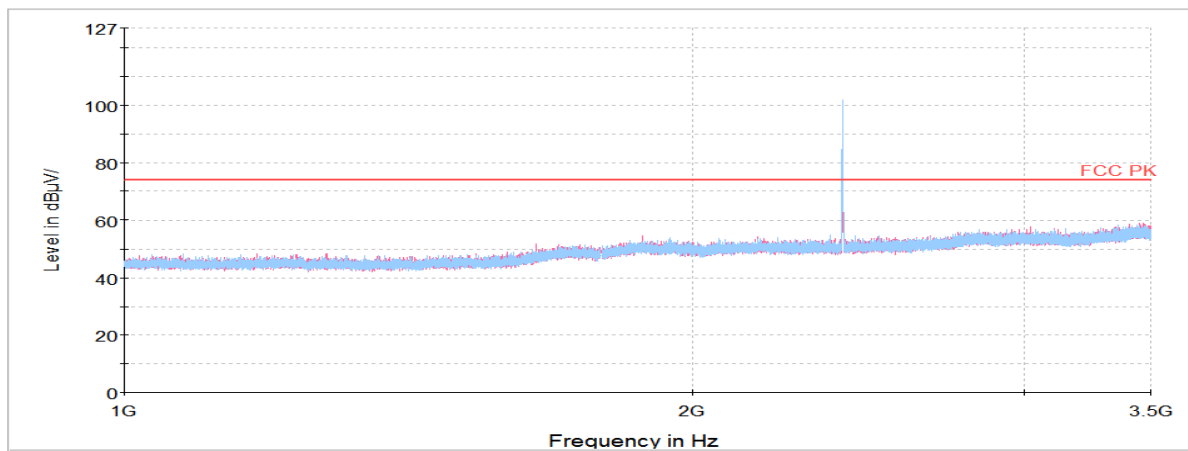
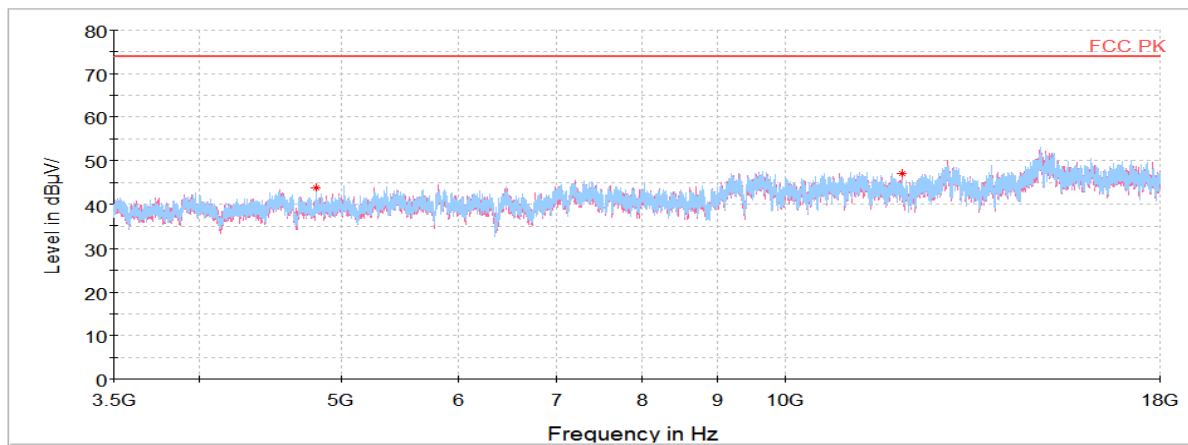
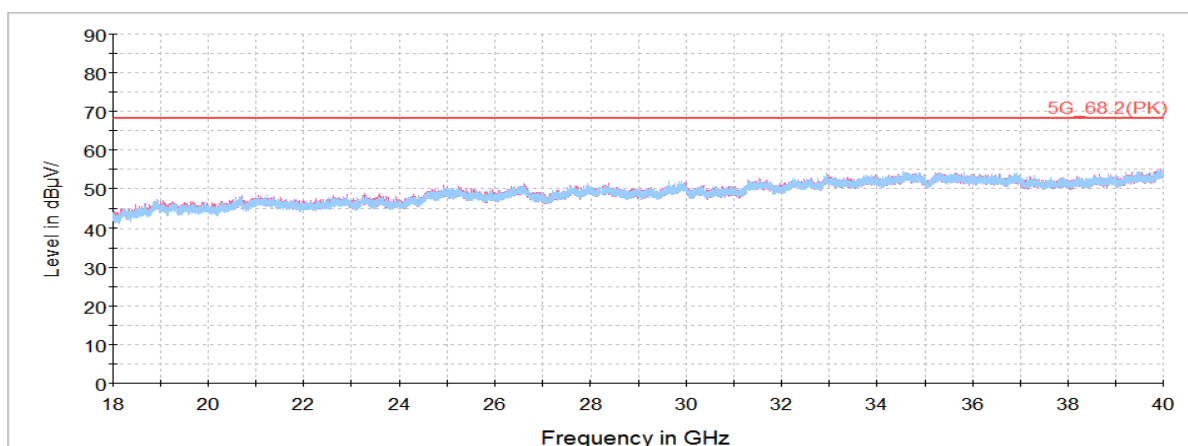
65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0206
Page (12) of (24)

**Test results (Above 1 000 MHz)_1M Bits/s(37 Bytes) Low Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
2 389.86 ¹⁾	V	40.86	32.00	-27.27	-	45.59	74.00	28.41
4 804.09 ¹⁾	H	63.10	33.78	-53.10	-	43.78	74.00	30.22
12 008.78 ¹⁾	V	58.03	38.71	-49.70	-	47.04	74.00	26.96
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

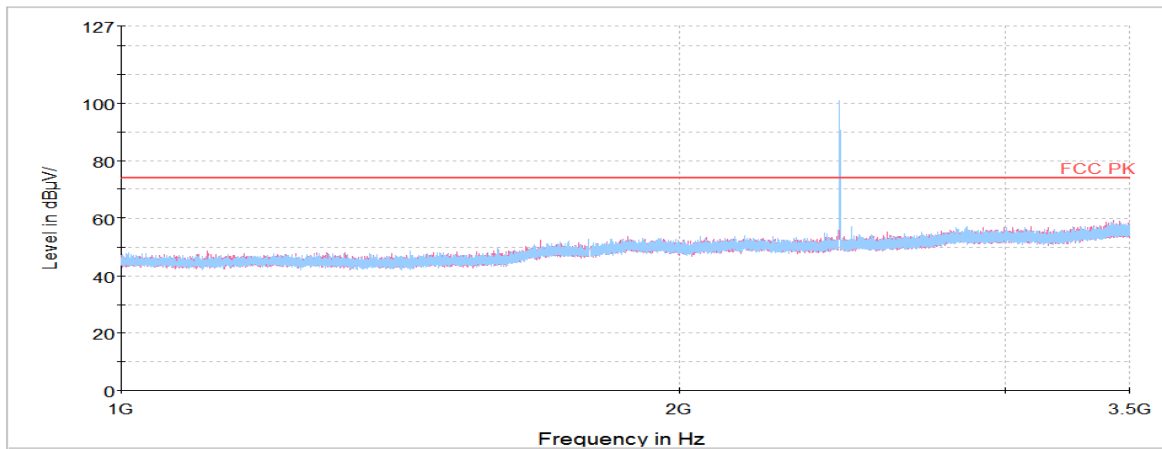
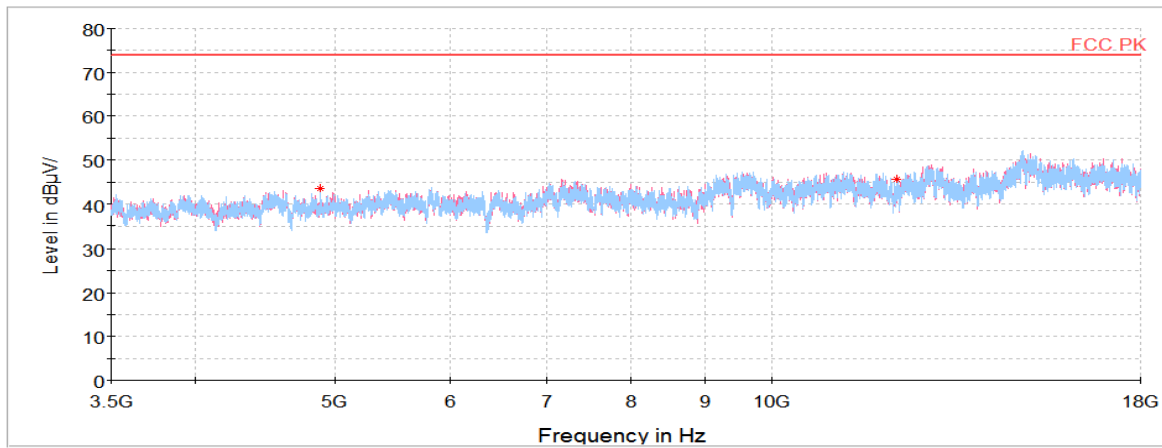
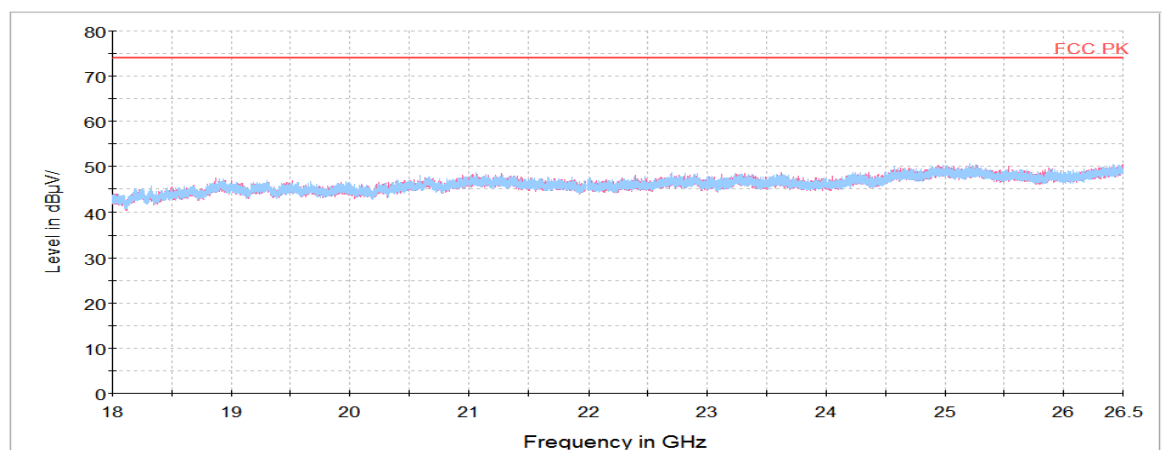
Horizontal/Vertical for Band-edge

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR21-SRF0206 Page (14) of (24)	
---	--	---

Middle Channel

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
Peak data								
4 879.77 ¹⁾	H	62.82	33.83	-53.16	-	43.49	74.00	30.51
12 201.81 ¹⁾	V	56.18	38.86	-49.54	-	45.50	74.00	28.50
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

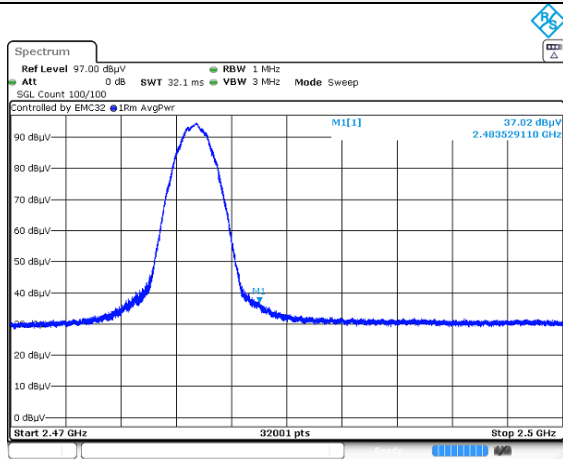
KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

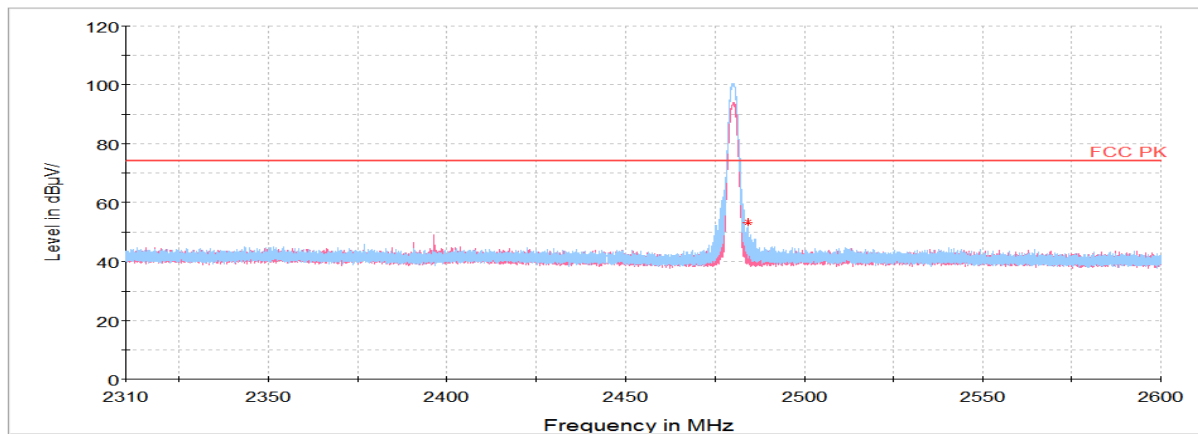
Report No.:
KR21-SRF0206
Page (16) of (24)

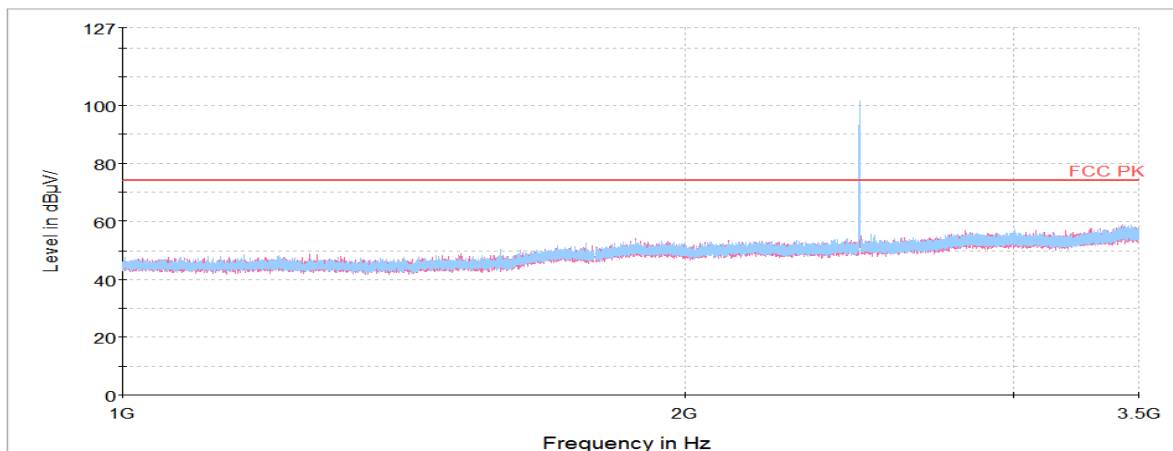
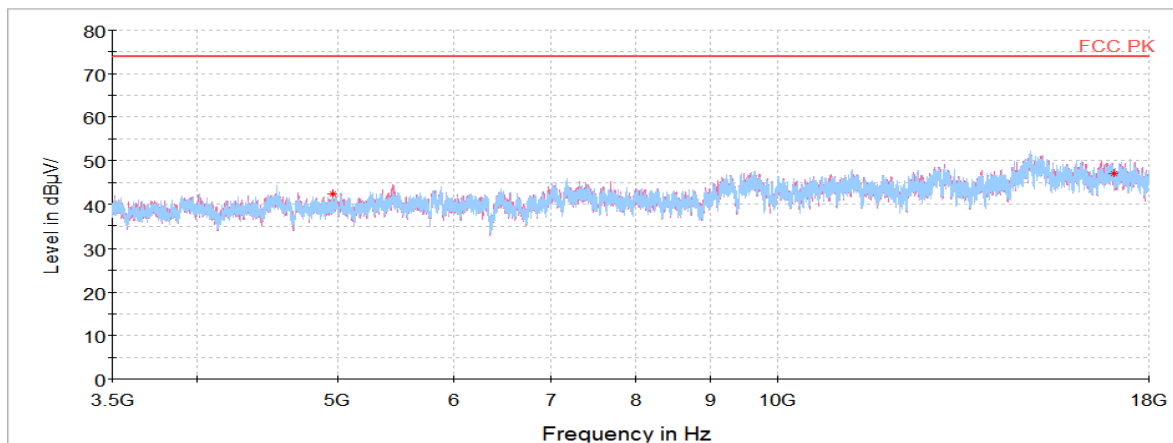
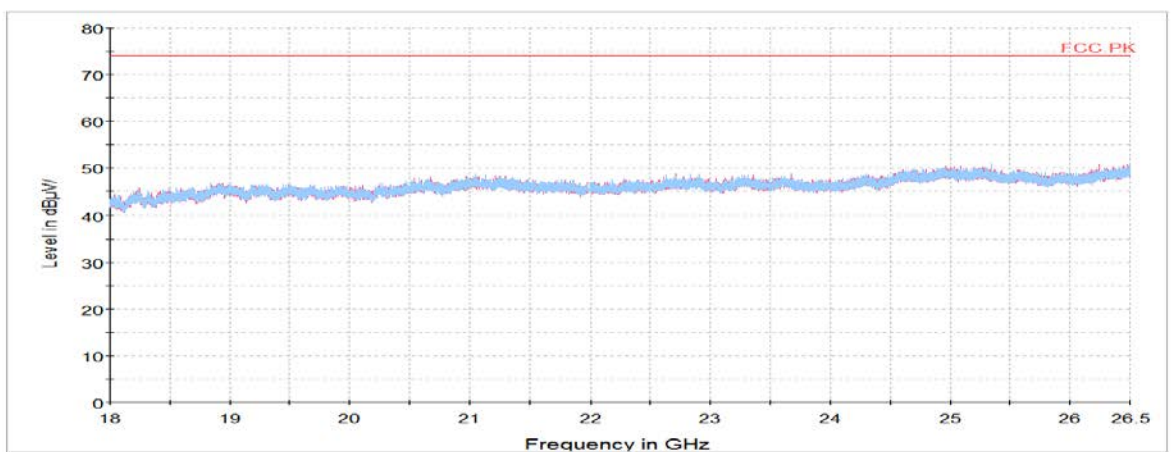
**High Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
Peak data								
2 483.53 ¹⁾	H	49.27	32.17	-28.30	-	53.14	74.00	20.86
4 959.97 ¹⁾	H	60.85	33.88	-52.49	-	42.24	74.00	31.76
17 046.17	V	53.17	40.67	-46.84	-	47.00	74.00	27.00
Average Data								
2 483.53 ¹⁾	H	37.02	32.17	-28.30	2.05	42.94	54.00	11.06

Average data

Blank

Horizontal/Vertical for Band-edge

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

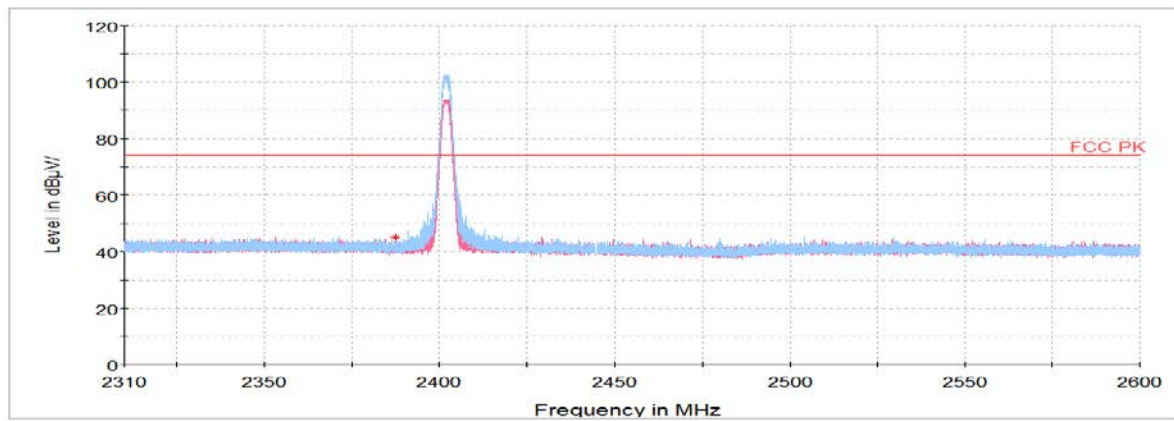
KCTL Inc.

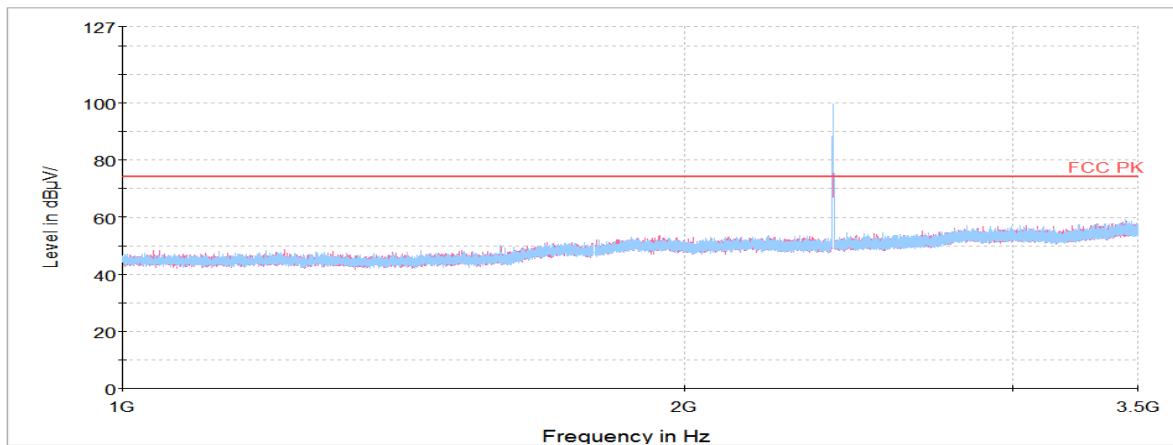
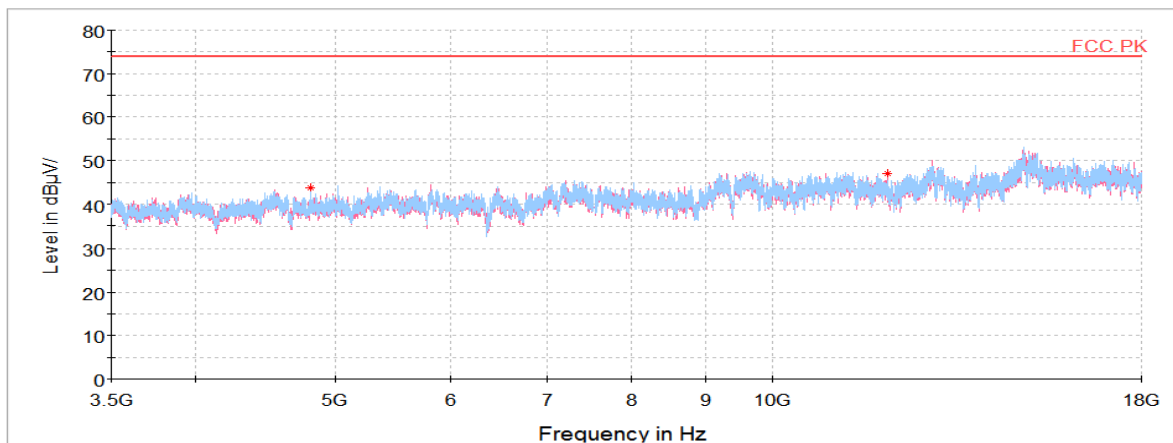
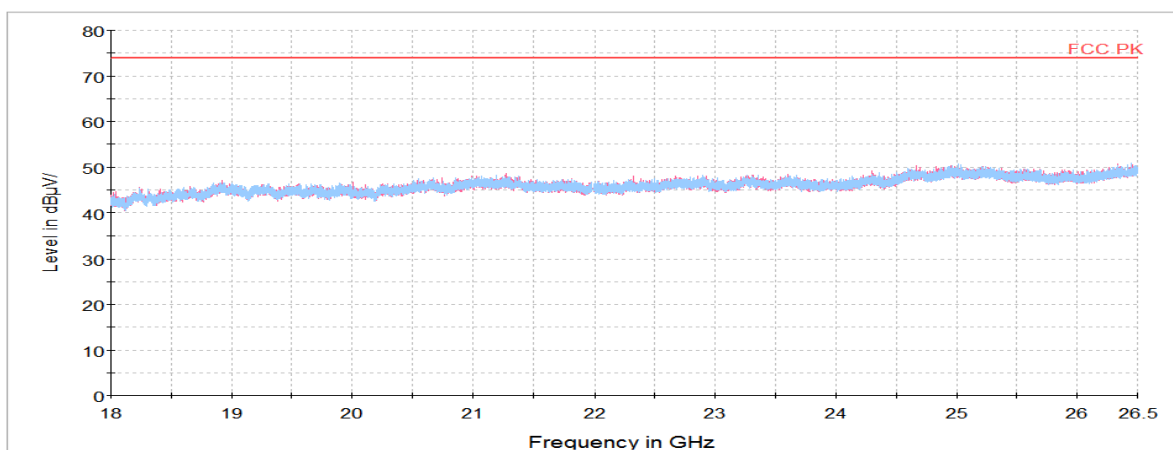
65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0206
Page (18) of (24)

**2M Bits/s(37 Bytes) Low Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
2 387.66 ¹⁾	H	40.55	32.00	-27.27	-	45.28	74.00	28.72
4 805.00 ¹⁾	H	62.81	33.78	-53.10	-	43.49	74.00	30.51
16 816.44	H	54.76	41.25	-47.15	-	48.86	74.00	25.14
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

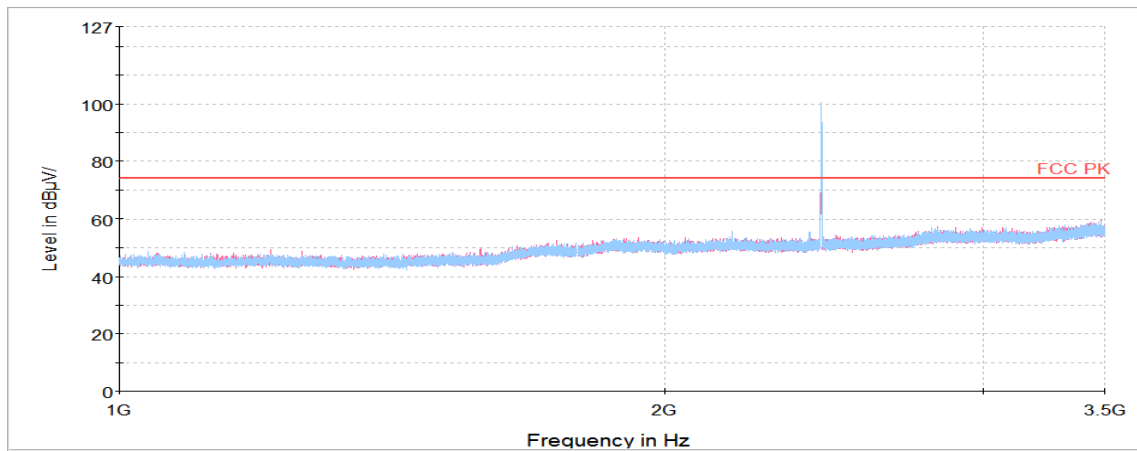
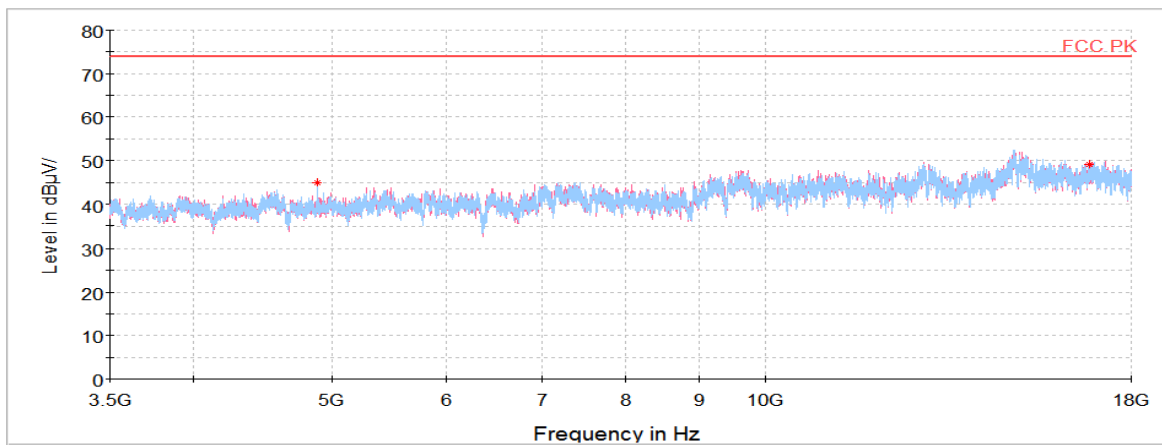
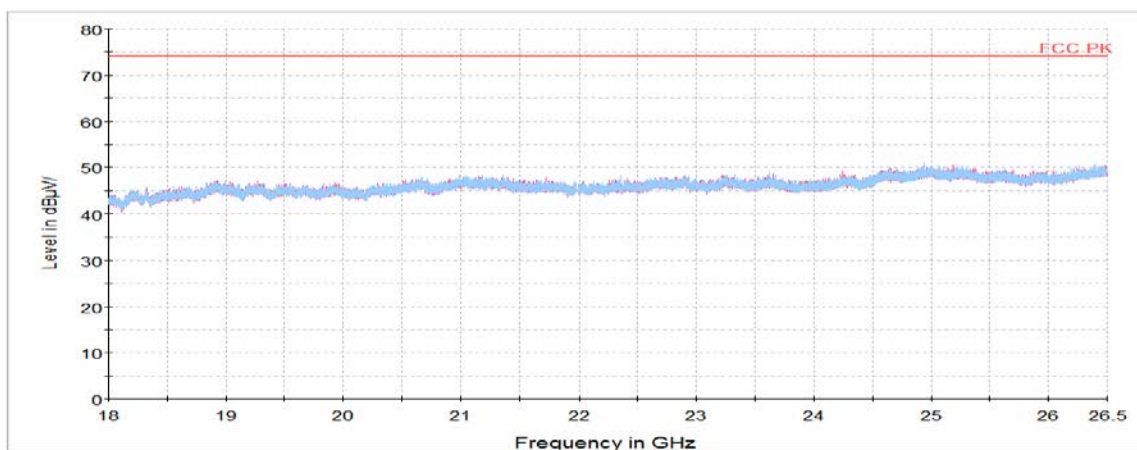
Horizontal/Vertical for Band-edge

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR21-SRF0206 Page (20) of (24)	
---	--	---

Middle Channel

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
Peak data								
4 879.77 ¹⁾	H	64.18	33.83	-53.16	-	44.85	74.00	29.15
16 832.30	V	55.00	41.27	-47.12	-	49.15	74.00	24.85
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

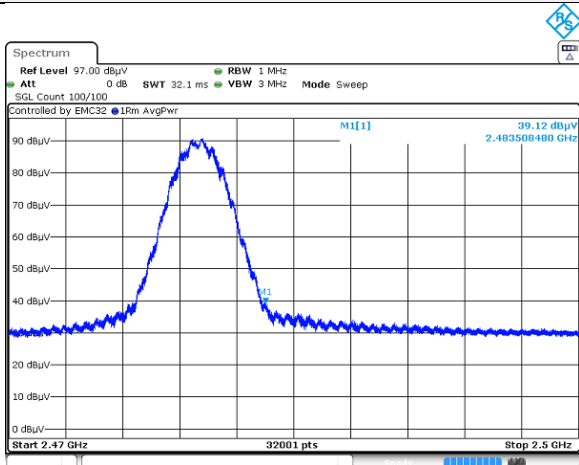
KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

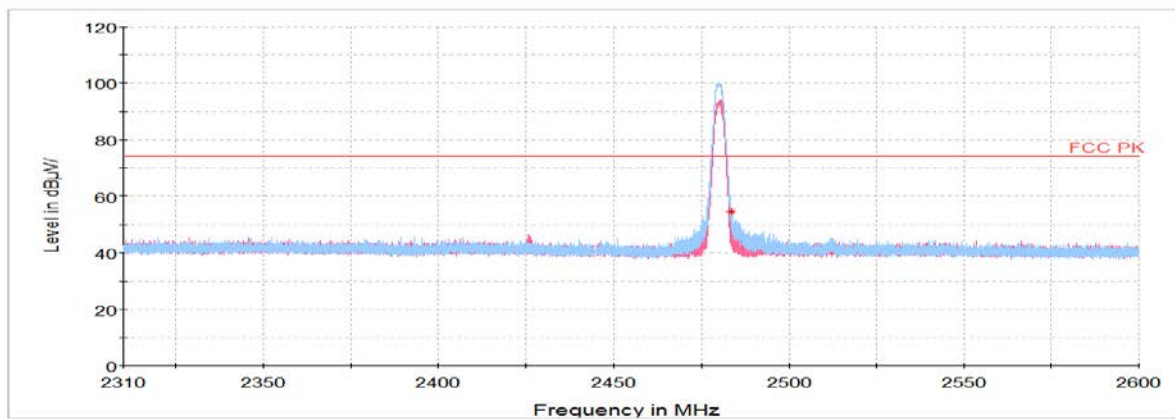
Report No.:
KR21-SRF0206
Page (22) of (24)

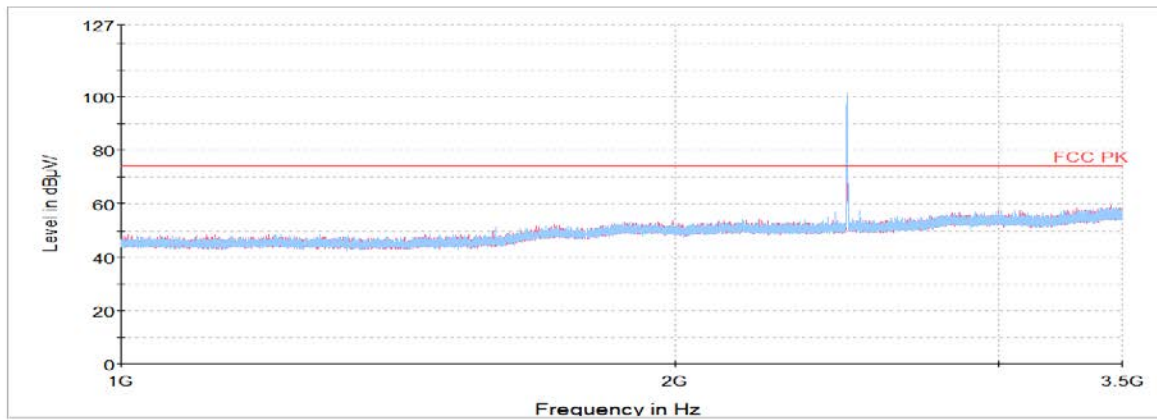
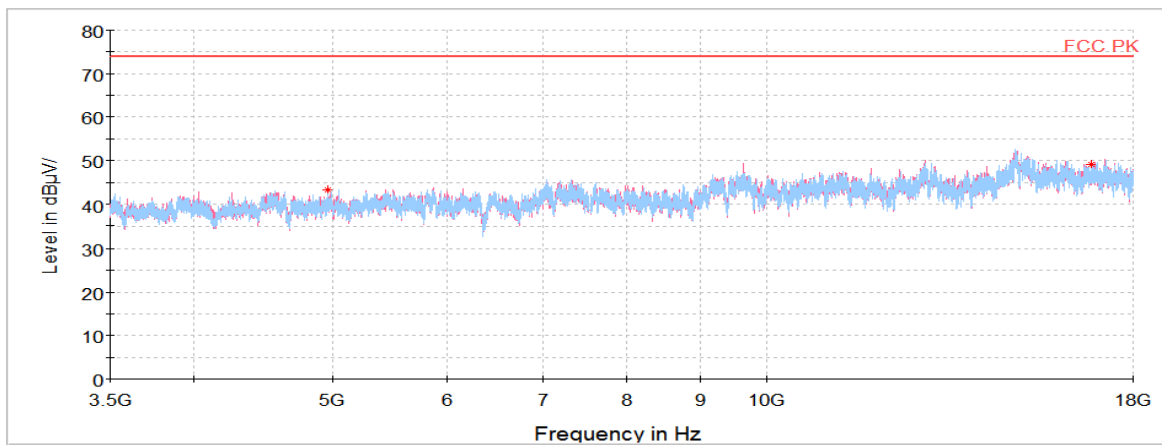
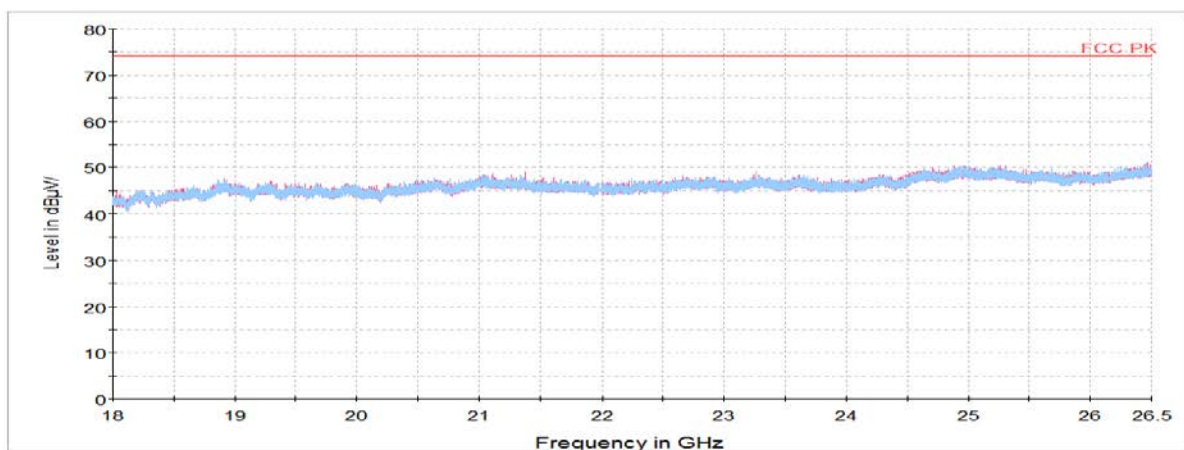
KCTL**High Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
Peak data								
2 483.51 ¹⁾	H	50.57	32.17	-28.29	-	54.45	74.00	19.55
4 958.61 ¹⁾	H	61.88	33.88	-52.50	-	43.26	74.00	30.74
16 826.86	H	54.92	41.26	-47.13	-	49.05	74.00	24.95
Average Data								
2 483.51 ¹⁾	H	39.12	32.17	-28.29	4.85	47.85	54.00	6.15

Average data

Blank

Horizontal/Vertical for Band-edge

Horizontal/Vertical for 1 GHz ~ 3.5 GHz**Horizontal/Vertical for 3.5 GHz ~ 18 GHz****Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

7. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV40	100989	21.12.23
Horn antenna	ETS.lindgren	3117	155787	21.10.28
Horn antenna	ETS.lindgren	3116	00086635	22.05.17
Attenuator	API Inmet	40AH2W-10	12	22.05.11
Broadband PreAmplifier	SCHWARZBECK	BBV9718	216	22.07.27
AMPLIFIER	L-3 Narda-MITEQ	AMF-7D-01001800-22-10P	2003683	22.08.19
AMPLIFIER	L-3 Narda-MITEQ	JS44-18004000-33-8P	2000996	22.01.21
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	DT2000	79	-
Highpass Filter	WT	WT-A1698-HS	WT160411001	22.05.10
Signal Generator	R&S	SMB100A	176206	22.01.20
Cable Assembly	RadiAll	2301761768000PJ	1724.659	-
Cable Assembly	gigalane	RG-400	-	-
Cable Assembly	HUER+SUHNER	SUCOFLEX 104	MY4342/4	-

End of test report