

SAR TEST REPORT

Test File No : F690501-RF-SAR000732

Equipment Under Test	Galaxy Smart Tag3
Model Name	EI-T5900
Applicant	Samsung Electronics Co., Ltd.
Address of Applicant	19 Chapin Rd., Building D, Pine Brook, New Jersey, United States, 07058
FCC ID	A3LEIT5900
Exposure Category	General Population/Uncontrolled Exposure
Standards	FCC 47 CFR Part 2 (2.1093) IEEE 1528, 2013
Receipt No.	GPRI2606001275SR
Date of Receipt	2026-06-17
Date of Test(s)	2026-08-07 ~ 2026-08-10
Date of Issue	2026-08-12
Test Result	PASS, Refer to the Page 04
Measurement Uncertainty	Refer to the Page 27

In the configuration tested, the EUT complied with the standards specified above.

This test report does not assure KOLAS accreditation.

Remarks:

- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.



Report prepared by /
Jane Lee
Test Engineer



Approved by /
Minhyuk Han
Technical Manager

Report File No : F690501-RF-SAR000732

Date of Issue : 2026-08-12

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

Revision history

Revision	Date of issue	Revisions	Revised By
-	2026-08-12	Initial issue	-

Table of Contents

1. Testing Laboratory.....	4
2. Details of Manufacturer.....	4
3. Description of EUT(s) ※	4
4. The Highest Reported SAR Values.....	4
5. Test Methodology	5
6. Testing Environment.....	5
7. Specific Absorption Rate (SAR).....	6
7.1. Introduction	6
7.2. SAR Definition	6
7.3. Test Standards and Limits.....	6
8. The SAR Measurement System.....	8
9. System Components	9
9.1. Probe.....	9
9.2. SAM Phantom	9
9.3. Device Holder.....	9
10. SAR Measurement Procedures	10
10.1. Normal SAR Measurement Procedure.....	10
11. SAR System Verification	12
12. Tissue Simulant Fluid for the Frequency Band.....	13
13. Instruments List	14
14. FCC Power Measurement Procedures	15
15. Measured and Reported SAR	15
16. Maximum Output Power Specifications※	16
17. RF Conducted Power Measurement	17
17.1. Bluetooth LE Conducted Power	17
17.2. Bluetooth Channel Sounding Conducted Power.....	17
18. Duty Cycle used for SAR Testing.....	18
18.1. Bluetooth LE 125k Duty Cycle	18
18.2. Bluetooth Channel Sounding ASK Duty Cycle	19
19. SAR Data Summary	20
19.1. SAR data.....	20
20. SAR Measurement Variability	21
20.1. Measurement Variability.....	21
Appendixes List.....	22
Appendix A.1 Verification Test Plots for 2450MHz.....	23
Appendix A.2 SAR Test Plots for Bluetooth LE	25
Appendix A.3 SAR Test Plots for Bluetooth Channel Sounding	26
Appendix B.1 Uncertainty Analysis	27

1. Testing Laboratory

Company Name	SGS Korea Co., Ltd. (Gunpo Laboratory)
Address	4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807 Republic of Korea
Laboratory Conformity Assessment Body Identifier (CABID)	KR0150
Telephone	+82 31 428 5700
FAX	+82 31 427 2371

2. Details of Manufacturer

Manufacturer	Samsung Electronics Co., Ltd.
Address	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Republic of Korea
Email	ssun.song@samsung.com
Phone No.	+82 10 4913 6355

3. Description of EUT(s) ※

EUT Type	Galaxy Smart Tag3	
Model Name	EI-T5900	
Serial Number	RF7L7F009ZXCYP	
Software Version	1.0	
Hardware Version	1.0	
Mode of Operation	Bluetooth LE, Bluetooth Channel Sounding	
Body worn Accessory	None	
Tx Frequency Range	2 402.00 MHz ~ 2 480.00 MHz (Bluetooth LE) 2 404.00 MHz ~ 2 478.00 MHz (Bluetooth Channel Sounding)	
Antenna Information ※	Manufacturer	Galtronics Korea
	Type	LDS
	Antenna Gain (dBi)	-1.19

- The data marked ※ in this report was provided by the customer and may affect the validity of the test results.
We are responsible for all the information of this test report except for the data(※) provided by the customer.

4. The Highest Reported SAR Values

Band	Highest Reported SAR 1g (W/kg)
Bluetooth LE	0.733
Bluetooth Channel Sounding	0.709
Simultaneous SAR(TER) per KDB 690783 D01v01r03 :	N/A

5. Test Methodology

ANSI/IEEE C95.1-2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg / 4.0 W/kg as averaged over any 1 gram / 10 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

Test tests documented in this report were performed in accordance with IEEE Standard 1528-2013 and the following published KDB procedures.

In additions;

☒	KDB 865664 D01v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz
☒	KDB 865664 D02v01r02	RF Exposure Compliance Reporting and Documentation Considerations
☒	KDB 447498 D01v06	RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices
☐	KDB 447498 D02v02r01	SAR Measurement Procedures for USB Dongle Transmitters
☐	KDB 248227 D01v02r02	SAR Guidance For IEEE 802.11 (Wi-Fi) Transmitters
☐	KDB 615223 D01v01r01	802.16e/WiMax SAR Measurement Guidance
☐	KDB 616217 D04v01r02	SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers
☐	KDB 643646 D01v01r03	SAR Test Considerations for Occupational PTT Radios
☐	KDB 648474 D03v01r04	Evaluation and Approval Considerations for Handsets with Specific Wireless Charging Battery Covers
☐	KDB 648474 D04v01r03	SAR Evaluation Considerations for Wireless Handsets
☐	KDB 680106 D01v03r01	RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications
☐	KDB 941225 D01v03r01	3G SAR Measurement Procedures
☐	KDB 941225 D05v02r05	SAR Evaluation Considerations for LTE Devices
☐	KDB 941225 D06v02r01	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
☐	KDB 941225 D07v01r02	SAR Evaluation Procedures for UMPC Mini-Tablet Devices

6. Testing Environment

Ambient temperature	: 18°C ~ 25°C
Relative humidity	: 30% ~ 70%
Liquid temperature of during the test	: $\pm 2^{\circ}\text{C}$
Ambient noise & Reflection	: $< 0.012 \text{ W/kg}$

7. Specific Absorption Rate (SAR)

7.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7.3. Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.3-2003, Copyright 2003 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range

Report File No : F690501-RF-SAR000732

Date of Issue : 2026-08-12

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

(1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube). Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

(2) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Partial Peak SAR (Partial)	1.60 mW/g	8.00 mW/g
Partial Average SAR (Whole Body)	0.08 mW/g	0.40 mW/g
Partial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

1. The spatial Peak value of the SAR averaged over any 1g gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

8. The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. 1. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli TX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- A dosimeter probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- Data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

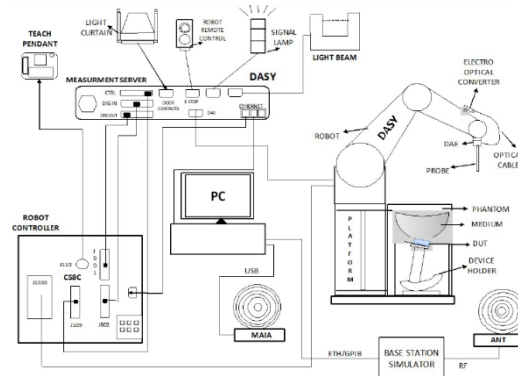


Fig a. The microwave circuit arrangement used for SAR system verification

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows.
- DASY software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Verification dipole kits allowing to validate the proper functioning of the system.

9. System Components

9.1. Probe

Construction	: Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	: Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 835 and HSL1900. Additional CF-Calibration for other liquids and frequencies upon request.
Frequency	: 10 MHz to 6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	: ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	: $10\mu\text{W/g}$ to $> 100\text{ mW/g}$; Linearity: ± 0.2 dB(noise: typically $< 1\mu\text{W/g}$)
Dimensions	: Overall length: 337 mm (Tip length: 20 mm) Tip diameter: 2.5 mm (Body diameter: 12 mm) Distance from probe tip to dipole centers: 1 mm
Application	: High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%



EX3DV4 E-Field Probe

NOTE:

1. The Probe parameters have been calibrated by the SPEAG. Please reference “APPENDIX C” for the Calibration Certification Report.

9.2. SAM Phantom

Construction	: The SAM Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90 % of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot
Shell Thickness	: $2.0\text{ mm} \pm 0.1\text{ mm}$
Filling Volume	: Approx. 25 liters



SAM Phantom

9.3. Device Holder

Construction:	: In combination with the Twin SAM PhantomV4.0/V4.0C or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).
----------------------	--



Device Holder

10. SAR Measurement Procedures

10.1. Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2 and 3: Area Scan & Zoom Scan Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan.
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1 g and 10 g.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1. SAR drift shall be kept within $\pm 5\%$ and if it without $\pm 5\%$, SAR retest according to measurement procedure step 1~4.

< Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04 >

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^{\circ} \pm 1^{\circ}$	$20^{\circ} \pm 1^{\circ}$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

11. SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig 1. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. These tests were done at 2450 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1. (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was in the range $(22 \pm 2)^\circ\text{C}$, the relative humidity was in the range $(55 \pm 5)\%$ R.H and the liquid depth above the ear reference points was $\geq 15\text{ cm} \pm 5\text{ mm}$ (frequency $\leq 3\text{ GHz}$) or $\geq 10\text{ cm} \pm 5\text{ mm}$ (frequency $> 3\text{ GHz}$) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

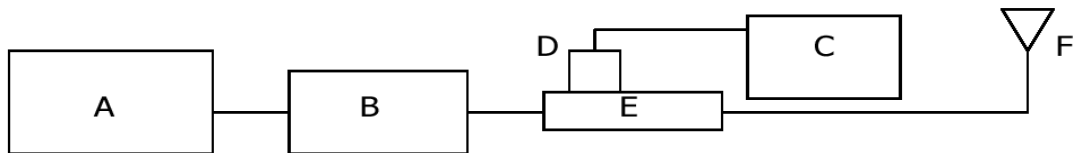


Fig 1. The microwave circuit arrangement used for SAR system verification

- A. Signal Generator
- B. RF Amplifier
- C. Power Meter
- D. Power Sensor
- E. Dual Directional Coupler
- F. Reference dipole Antenna



Photo of the dipole Antenna

SAR System Verification

Dipole Validation Kits		Probe S/N	Freq. (MHz)	Input Power (W)	Target SAR values (W/Kg)	1 W normalized Measured SAR (W/Kg)	Deviation (%)	Date	Temperature (°C)	
					1g SAR	1g SAR	1g SAR		Ambient	Liquid
D2450V2	734	7574	2450	0.10	51.80	52.70	1.74	2026-08-07	22.4	21.4
D2450V2	734	7574	2450	0.10	51.80	50.50	-2.51	2026-08-10	22.7	21.0

Table 1 Results system verification

12. Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this simulant fluid were measured by using the Speag Model DAK-3.5 Dielectric Probe in conjunction with Agilent E5063A Network Analyze by using a procedure.

Freq. (MHz)	Target Value		Measure Value		Deviation (%)		Date	Liquid Temperature (°C)
	Permittivity	Conductivity (S/m)	Permittivity	Conductivity (S/m)	Permittivity	Conductivity (S/m)		
2450*	39.20	1.80	37.879	1.785	-3.37	-0.83	2026-08-07	21.4
2402.00	39.20	1.80	37.942	1.738	-3.21	-3.44		
2450*	39.20	1.80	38.177	1.788	-2.61	-0.67	2026-08-10	21.0
2402.00	39.20	1.80	38.234	1.741	-2.46	-3.28		
2440.00	39.20	1.80	38.153	1.776	-2.67	-1.33		

Note: The data marked (*) in this table was Permittivity/Conductivity results of Verification

The brain mixtures consist of a viscous gel using hydroxyethyl cellulose (HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation. The dielectric properties of the liquid material required to fill the phantom shell shall be target.

Frequency (MHz)	450	835	900	1800-2000	2450	2600
Tissue Type	Body					
Ingredient (% by weight)						
Water	38.91	40.29	40.29	55.24	45.0	45.0
Salt (NaCl)	3.79	1.38	1.38	0.31	0	0
Sugar	56.93	57.90	57.90	0	0	0
HEC	0.25	0.24	0.24	0	0	0
Bactericide	0.12	0.18	0.18	0	0	0
Triton X-100	0	0	0	0	0	0
DGBE	0	0	0	44.45	55.00	55.00
Tissue parameter target by IEEE 1528-2013						
Dielectric Constant	43.50	41.50	41.50	40.00	39.20	39.00
Conductivity (S/m)	0.87	0.90	0.97	1.40	1.80	1.96
Salt: 99+% Pure Sodium Chloride Water: De-ionized, 16 M ⁺ resistivity DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]				Sucrose: 98+% Pure Sucrose HEC: Hydroxyethyl Cellulose		

13. Instruments List

Test Platform	SPEAG DASY System				
Manufacture	SPEAG				
Description	SAR Test System				
Software Reference	DASY52: 52.10.4(1535) / SEMCAD X: 14.6.14(7501)				
Equipment	Type	Serial Number	Cal Date	Cal Interval	Cal Due
Phantom	SAM Phantom	TP-1910	N/A	N/A	N/A
Verification Dipole	D2450V2	734	2026-01-20	Biennial	2028-01-20
Dielectric Assessment Kit	DAK-3.5	1228	2025-11-16	Annual	2026-11-16
DAE	DAE4	1595	2026-02-03	Annual	2027-02-03
E-Field Probe	EX3DV4	7574	2026-06-18	Annual	2027-06-18
Network Analyzer	E5063A	MY54706220	2026-01-12	Annual	2027-01-12
Power Meter	N1914A	MY56120017	2026-06-04	Annual	2027-06-04
Power Meter	N1914A	MY63210027	2026-07-06	Annual	2027-07-06
Power Sensor	N8481A	MY63190004	2026-07-06	Annual	2027-07-06
Power Sensor	N8481A	MY63190005	2026-07-06	Annual	2027-07-06
Power Sensor	N8481A	MY63070006	2025-09-05	Annual	2026-09-05
Signal Generator	E8247C	MY43321024	2026-06-01	Annual	2027-06-01
RF Amplifier	AMP2027ADB	10006	2026-03-17	Annual	2027-03-17
Dual Directional Coupler	772D	MY52180259	2026-07-10	Annual	2027-07-10
LP Filter	WLJ4-3000-5850-8000-60EF	2	2026-07-06	Annual	2027-07-06
Attenuator	18N-03	18	2025-12-04	Annual	2026-12-04
Attenuator	18N-10	20	2025-12-04	Annual	2026-12-04
Attenuator	18N-20	23	2025-11-26	Annual	2026-11-26
Hygro-Thermometer	303	210700189	2026-01-27	Annual	2027-01-27
Digital Thermometer	SDT25	19041500179	2025-08-27	Annual	2026-08-27
Spectrum Analyzer	FSV7	103082	2026-02-06	Annual	2027-02-06

14. FCC Power Measurement Procedures

The SAR measurement Software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5 % occurred, the tests were repeated.

15. Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

16. Maximum Output Power Specifications※

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

Bluetooth LE Tune-up Power

Mode	Maximum /Normal	1M			2M
		PHY 1M	125k Coded	500k Coded	PHY 2M
LE	Maximum	8.00	8.00	8.00	8.00
	Normal	7.00	7.00	7.00	7.00
Tolerance: + 1.0 dB / - 1.5 dB					

Bluetooth Channel Sounding Tune-up Power

Mode	Maximum /Normal	GFSK		ASK
		PHY 1M	PHY 2M	
CS	Maximum	8.00	8.00	8.00
	Normal	7.00	7.00	7.00
Tolerance: + 1.0 dB / - 1.5 dB				

- The data marked ※ in this report was provided by the customer and may affect the validity of the test results.
We are responsible for all the information of this test report except for the data(※) provided by the customer.

17. RF Conducted Power Measurement

17.1. Bluetooth LE Conducted Power


Mode	Packet	Frequency (MHz)	Channel	Burst-Conducted Average Power(dBm)	
				Conducted Power(dBm)	E.I.R.P
LE	PHY_1M	2402.00	0	6.56	5.37
		2440.00	19	6.26	5.07
		2480.00	39	6.59	5.40
	125k Coded	2402.00	0	6.80	5.61
		2440.00	19	6.58	5.39
		2480.00	39	6.79	5.60
	500k Coded	2402.00	0	6.75	5.56
		2440.00	19	6.50	5.31
		2480.00	39	6.78	5.59
	PHY 2M	2404.00	1	6.62	5.43
		2440.00	19	6.51	5.32
		2478.00	38	6.69	5.50

17.2. Bluetooth Channel Sounding Conducted Power

Mode	Packet	Frequency (MHz)	Channel	Burst-Conducted Average Power(dBm)	
				Conducted Power(dBm)	E.I.R.P
CS	PHY_1M	2404.00	2	6.63	5.44
		2440.00	38	6.49	5.30
		2478.00	76	6.69	5.50
	PHY 2M	2404.00	2	6.52	5.33
		2440.00	38	6.46	5.27
		2478.00	76	6.51	5.32
	ASK	2404.00	2	6.80	5.61
		2440.00	38	6.84	5.65
		2478.00	76	6.80	5.61

18. Duty Cycle used for SAR Testing

18.1. Bluetooth LE 125k Duty Cycle

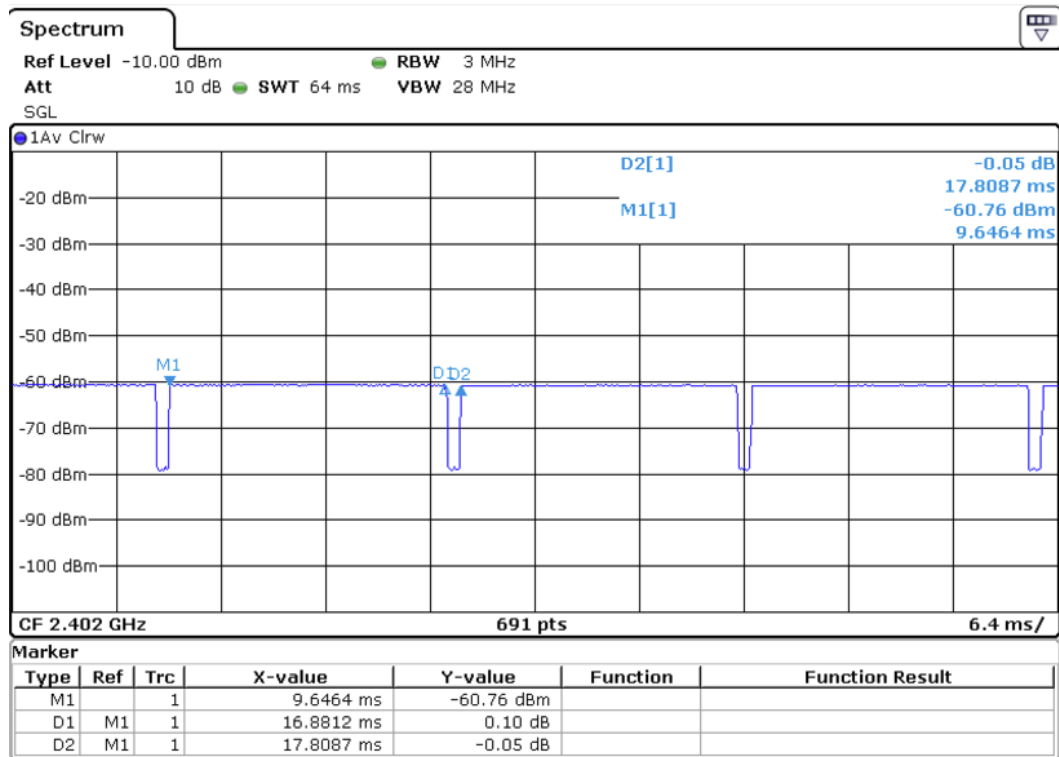

Bluetooth LE Duty cycle measurement

$T_{on} = 16.881 \text{ ms}$

$T_{on} + T_{off} = 17.809 \text{ ms}$


Duty Cycle = $(T_{on} / T_{on} + T_{off}) \times 100$

94.8 % = $(16.881 / 17.809) \times 100$

SAR Crest Factor = $1 / (16.881 / 17.809) = 1.055$

Bluetooth LE Duty cycle: 94.8 %

18.2. Bluetooth Channel Sounding ASK Duty Cycle

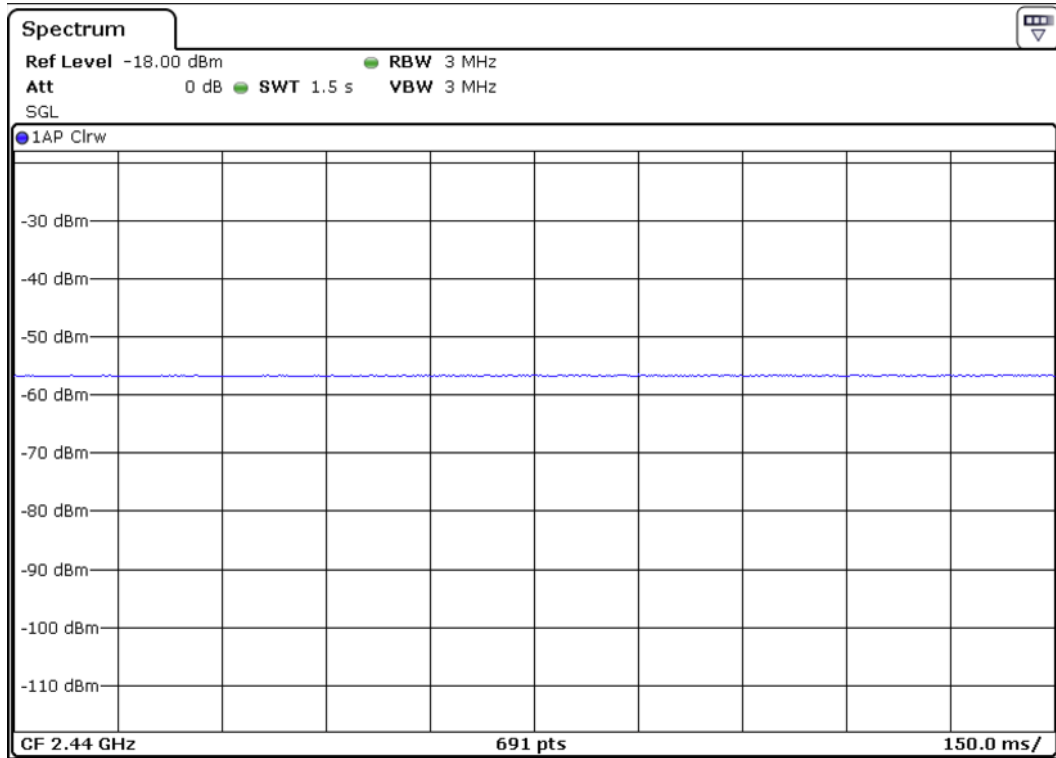

Bluetooth CS Duty cycle measurement

SAR Crest Factor = **1.000**

Bluetooth CS Duty cycle: **100.0 %**

- Note: The Bluetooth Channel Sounding ASK mode was tested in CW (Continuous Wave) mode.

19. SAR Data Summary

19.1. SAR data

Bluetooth LE SAR					Ambient Temperature (°C)			22.4, 22.7			
					Liquid Temperature (°C)			21.4, 21.0			
					Date			2026-08-07, 2026-08-10			
Position	Mod.	Freq (MHz)	Ch.	Sensor State	Space (mm)	Measure Power (dBm)	Measure 1 g SAR (W/kg)	Tune-Up Limit (dBm)	Power Scaling Factor	Duty Scaling Factor	Scaling 1 g SAR (W/kg)
Front	125k	2402.00	0	N/A	0	6.80	0.090	8.00	1.318	1.055	0.125
Rear	125k	2402.00	0	N/A	0	6.80	0.527	8.00	1.318	1.055	0.733
Right Edge	125k	2402.00	0	N/A	0	6.80	0.017	8.00	1.318	1.055	0.024
Left Edge	125k	2402.00	0	N/A	0	6.80	0.206	8.00	1.318	1.055	0.286
Top	125k	2402.00	0	N/A	0	6.80	0.118	8.00	1.318	1.055	0.164
Bottom	125k	2402.00	0	N/A	0	6.80	0.035	8.00	1.318	1.055	0.049

Bluetooth Channel Sounding SAR_FCC					Ambient Temperature (°C)			22.7			
					Liquid Temperature (°C)			21.0			
					Date			2026-08-10			
Position	Mod.	Freq (MHz)	Ch.	Sensor State	Space (mm)	Measure Power (dBm)	Measure 1 g SAR (W/kg)	Tune-Up Limit (dBm)	Power Scaling Factor	Duty Scaling Factor	Scaling 1 g SAR (W/kg)
Front	ASK	2440.00	38	N/A	0	6.84	0.137	8.00	1.306	1.000	0.179
Rear	ASK	2440.00	38	N/A	0	6.84	0.543	8.00	1.306	1.000	0.709
Right Edge	ASK	2440.00	38	N/A	0	6.84	0.021	8.00	1.306	1.000	0.027
Left Edge	ASK	2440.00	38	N/A	0	6.84	0.243	8.00	1.306	1.000	0.317
Top	ASK	2440.00	38	N/A	0	6.84	0.136	8.00	1.306	1.000	0.178
Bottom	ASK	2440.00	38	N/A	0	6.84	0.047	8.00	1.306	1.000	0.061

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 447498 D01v06.
2. Liquid tissue depth was at least 15 cm for all frequencies.
3. All modes of operation were investigated, and worst-case results are reported.
4. The EUT is tested 2nd hot-spot peak if it is less than 2 dB below the highest peak.
5. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
6. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
7. The Bluetooth Channel Sounding ASK mode was tested in CW (Continuous Wave) mode.

20. SAR Measurement Variability

20.1. Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Appendixes List

Appendix A	A.1 Verification Test Plots for 2450MHz
	A.2 SAR Test Plots for Bluetooth LE
	A.3 SAR Test Plots for Bluetooth Channel Sounding
Appendix B	B.1 Uncertainty Analysis
Appendix C	C.1 Calibration certificate for Probe (S/N: 7574)
	C.2 Calibration certificate for DAE (S/N: 1595)
	C.3 Calibration certificate for Dipole 2450 MHz (S/N: 734)

Appendix A.1 Verification Test Plots for 2450MHz

Date/Time: 2026-08-07 09:05:58

Test Laboratory : SGS Korea (Gunpo Laboratory)
File Name: [Verification 2450MHz 2026-08-07.da53:0](#)

Input Power : 100 mW

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:734

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.785$ S/m; $\epsilon_r = 37.879$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7574; ConvF(6.8, 7.01, 7.71) @ 2450 MHz; Calibrated: 2026-06-18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1595; Calibrated: 2026-02-03
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: TP-1910
- DASY52 52.10.4(1535)SEMCAD X 14.6.14(7501)

Verification/Verification 2450MHz/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 8.62 W/kg

Verification/Verification 2450MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 77.00 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 10.5 W/kg


SAR(1 g) = 5.27 W/kg; SAR(10 g) = 2.48 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 51%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 8.69 W/kg

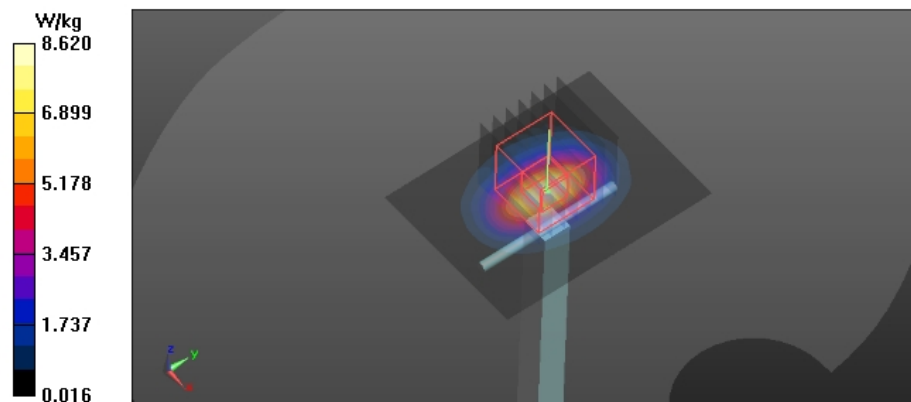

Date/Time: 2026-08-10 09:59:37

Test Laboratory : SGS Korea (Gunpo Laboratory)
File Name: [Verification 2450MHz 2026-08-10.da53:0](#)

Input Power : 100 mW

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:734

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 38.177$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7574; ConvF(6.8, 7.01, 7.71) @ 2450 MHz; Calibrated: 2026-06-18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1595; Calibrated: 2026-02-03
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: TP-1910
- DASY52 52.10.4(1535)SEMCAD X 14.6.14(7501)

Verification/Verification 2450MHz/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 8.33 W/kg

Verification/Verification 2450MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 78.63 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 9.98 W/kg


SAR(1 g) = 5.05 W/kg; SAR(10 g) = 2.38 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 8.16 W/kg

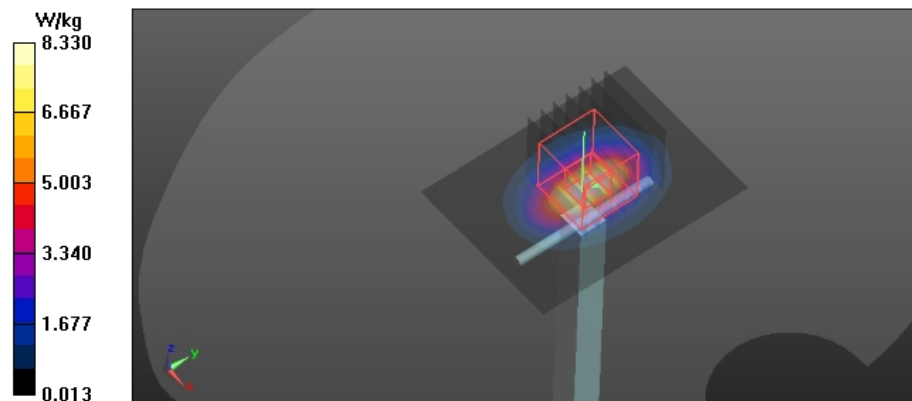

Appendix A.2 SAR Test Plots for Bluetooth LE

Date/Time: 2026-08-07 18:29:29

Test Laboratory : SGS Korea (Gunpo Laboratory)
File Name: [BTLE Ant1_Rear_125k_CH0.da53:0](#)

DUT: EI-T5900; Type: Galaxy Smart Tag3; Serial: RF7L7F009ZXCYB

Communication System: UID 0, Bluetooth LE (0); Frequency: 2402 MHz; Duty Cycle: 1:1.05512
Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.738$ S/m; $\epsilon_r = 37.942$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7574; ConvF(6.8, 7.01, 7.71) @ 2402 MHz; Calibrated: 2026-06-18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1595; Calibrated: 2026-02-03
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: TP-1910
- DASY52 52.10.4(1535)SEMCAD X 14.6.14(7501)

Body/BTLE Ant1_Rear_125k_CH0/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.26 W/kg

Body/BTLE Ant1_Rear_125k_CH0/Zoom Scan (11x11x11)/Cube 0: Measurement grid: dx=3mm, dy=3mm, dz=3mm

Reference Value = 27.87 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.90 W/kg


SAR(1 g) = 0.527 W/kg; SAR(10 g) = 0.243 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 42.5%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.17 W/kg

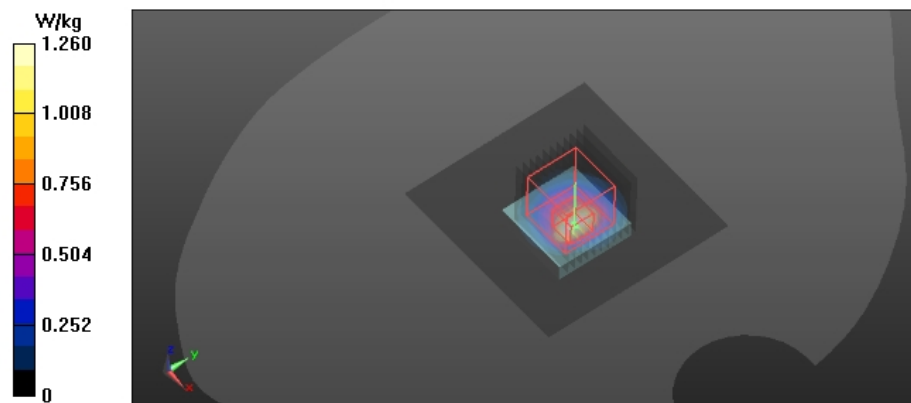

Appendix A.3 SAR Test Plots for Bluetooth Channel Sounding

Date/Time: 2026-08-10 15:24:03

Test Laboratory : SGS Korea (Gunpo Laboratory)
File Name: [BTCS Ant1 Rear ASK_CH38.da53:0](#)

DUT: EI-T5900; Type: Galaxy Smart Tag3; Serial: RF7L7F009ZXCYB

Communication System: UID 0, Bluetooth Channel Sounding (0); Frequency: 2440 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2440$ MHz; $\sigma = 1.776$ S/m; $\epsilon_r = 38.153$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7574; ConvF(6.8, 7.01, 7.71) @ 2440 MHz; Calibrated: 2026-06-18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1595; Calibrated: 2026-02-03
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: TP-1910
- DASY52 52.10.4(1535)SEMCAD X 14.6.14(7501)

Body/BTCS Ant1 Rear ASK_CH38/Area Scan (81x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.31 W/kg

Body/BTCS Ant1 Rear ASK_CH38/Zoom Scan (13x11x11)/Cube 0: Measurement grid: $dx=3$ mm, $dy=3$ mm, $dz=3$ mm

Reference Value = 27.99 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.543 W/kg; SAR(10 g) = 0.251 W/kg

Smallest distance from peaks to all points 3 dB below = 3.8 mm

Ratio of SAR at M2 to SAR at M1 = 40.9%

Maximum value of SAR (measured) = 1.18 W/kg

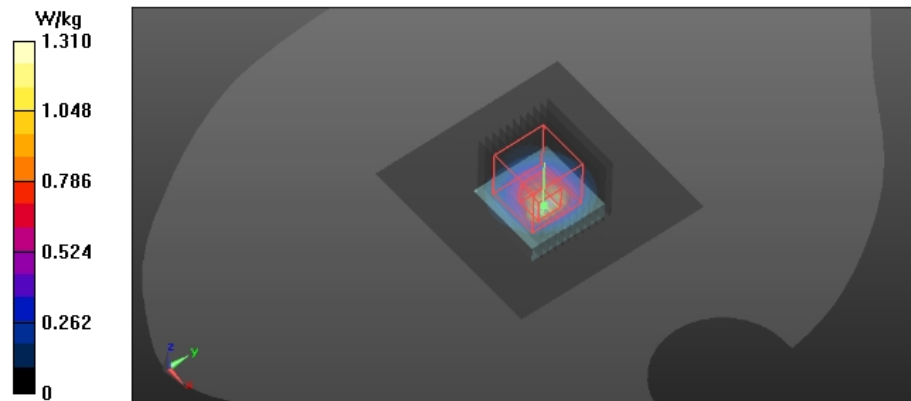

Appendix B.1 Uncertainty Analysis

a	b	c	d	e = f(d,k)	f	g	h =	i =	Contribution		k
							cxg/e	cxg/e			
Uncertainty Component	Ref.	Tol	Prob .	Div.	Ci	Ci	1g	10g	1g	10g	Vi
		(%)	Dist.		(1g)	(10g)	ui (%)	ui (%)	(%)	(%)	(Veff)
Measurement system errors											
Probe calibration	8.4.1.1	6.55	N	1.00	1.00	1.00	6.55	6.55	13.04	12.53	∞
Probe calibration drift	8.4.1.2	0.00	R	1.73	1.00	1.00	0.00	0.00	0.00	0.00	∞
Linearity	8.4.1.3	4.70	R	1.73	1.00	1.00	2.72	2.72	5.41	5.20	∞
Detection limit	8.4.1.3	0.25	R	1.73	1.00	1.00	0.14	0.14	0.29	0.28	∞
Broadband signal	8.4.1.4	0.50	R	1.73	1.00	1.00	0.29	0.29	0.58	0.55	∞
Axial isotropy	8.4.1.5	4.70	R	1.73	0.71	0.71	1.93	1.93	3.84	3.69	∞
Hemispherical isotropy	8.4.1.5	9.60	R	1.73	0.71	0.71	3.94	3.94	7.84	7.54	∞
Boundary effect	8.4.1.6	2.00	R	1.73	1.00	1.00	1.16	1.16	2.30	2.21	∞
Readout electronics	8.4.1.6	0.30	N	1.00	1.00	1.00	0.30	0.30	0.60	0.57	∞
Response time	8.4.1.6	0.80	R	1.73	1.00	1.00	0.46	0.46	0.92	0.88	∞
Integration time	8.4.1.6	2.60	R	1.73	1.00	1.00	1.50	1.50	2.99	2.88	∞
RF ambient Condition – Noise	8.4.1.7	3.00	R	1.73	1.00	1.00	1.73	1.73	3.45	3.32	∞
RF ambient Condition – reflections	8.4.1.7	3.00	R	1.73	1.00	1.00	1.73	1.73	3.45	3.32	∞
Probe Positioner mechanical tolerance	8.4.1.8	0.40	R	1.73	1.00	1.00	0.23	0.23	0.46	0.44	∞
Probe Positioning with respect to phantom shell	8.4.1.8	6.70	R	1.73	1.00	1.00	3.87	3.87	7.71	7.41	∞
Post-processing	8.4.1.9	4.00	R	1.73	1.00	1.00	2.31	2.31	4.60	4.42	∞
Phantom and device (DUT or validation antenna) errors											
Liquid Conductivity – measurement uncertainty	8.4.2.1	3.25	N	1.00	0.78	0.71	2.54	2.31	5.05	4.41	69
Liquid Permittivity – temperature uncertainty	8.4.2.2	1.24	R	1.73	0.23	0.26	0.16	0.19	0.33	0.36	21
Liquid Conductivity – temperature uncertainty	8.4.2.2	1.47	R	1.73	0.78	0.71	0.66	0.60	1.32	1.15	21
Liquid Permittivity – measurement uncertainty	8.4.2.3	2.48	N	1.00	0.23	0.26	0.57	0.64	1.14	1.23	69
Phantom uncertainty	8.4.2.4	7.90	R	1.73	1.00	1.00	4.57	4.57	9.09	8.74	∞
Distance between the radiating element of the DUT and the phantom medium	8.4.2.4	2.00	N	1.00	1.00	1.00	2.00	2.00	3.98	3.83	∞
Test sample positioning	8.4.2.5	1.92/2.90	N	1.00	1.00	1.00	1.92	2.90	3.82	5.55	71
Device holder uncertainty	8.4.2.6	3.28/4.52	N	1.00	1.00	1.00	3.28	4.52	6.53	8.65	5
Modulation Response	8.4.2.7	4.80	R	1.73	1.00	1.00	2.77	2.77	5.52	5.31	∞
Time-average SAR	8.4.2.8	0.00	R	1.73	1.00	1.00	0.00	0.00	0.00	0.00	∞
SAR drift measurement	8.4.2.9	5.00	R	1.73	1.00	1.00	2.89	2.89	5.75	5.53	∞
Combined standard uncertainty				RSS			12.75	13.26	100.0	100.0	1103/364
Expanded uncertainty (95% CONFIDENCE INTERVAL)				k=2			25.50	26.52			