



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center

416, Maetan-3dong,
Yeongtong-gu, Suwon-si,
Gyeonggi-do, Korea 443-742

TEST REPORT ON SAR

Model Tested: GT-B5512
FCC ID (Requested): A3LGTB5512
Job No: FI-280
Report No: FI-280-S1

- Abstract -

This document reports on SAR Tests carried out in accordance with FCC/OET Bulletin 65, Supplement C(June 2001).

Prepared By

JO LEE - Test Engineer

Authorized By

SH ONG - Technical Manager

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	1 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

Contents

1. GENERAL INFORMATION	3
2. DESCRIPTION OF DEVICE	3
3. DESCRIPTION OF TEST EQUIPMENT	4
3.1 SAR Measurement Setup	4
3.2 E-field Probe	5
3.3 Phantom.....	7
3.4 Brain Simulating Mixture Characterization	10
3.5 Device Holder for Transmitters.....	10
3.6 Validation Dipole	10
3.7 Equipment Calibration.....	12
4. SAR MEASUREMENT PROCEDURE.....	12
5. DESCRIPTION OF TEST POSITION	13
5.1 SAM Phantom Shape.....	13
5.2 “cheek” Position	13
5.3 “tilted” Position	15
5.4 Body Configurations for Single TX SAR considerations.....	16
6. MEASUREMENT UNCERTAINTY	18
7. SYSTEM VERIFICATION.....	21
7.1 Tissue Verification	21
7.2 Test System Validation	21
8. SAR MEASUREMENT RESULTS.....	22
8.1 GSM850 Head SAR Results	31
8.2 GPRS850 Body SAR Results(Without Holster).....	31
8.3 GSM1900 Head SAR Results	32
8.4 GPRS1900 Body SAR Results(Without Holster).....	33
8.5 WLAN Head SAR Results	34
8.6 WLAN Body SAR Results(Without Holster)	35
9. CONCLUSION	36
10. REFERENCES.....	37
APPENDIX A SAR Definition	39
APPENDIX B Probe Calibration Process	40
APPENDIX C ANSI/IEEE C95.1 – 1992 RF EXPOSURE LIMITS.....	41
APPENDIX D The Validation Measurements	42
APPENDIX E lots of The SAR Measurements	49
APPENDIX F Probe Calibration	90
APPENDIX G Calibration of The Validation Dipole	102

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	2 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

1. GENERAL INFORMATION

Test Dates : Nov.28, 2011 ~ Dec.01, 2011
Manufacturer : SAMSUNG ELECTRONICS Co., Ltd.
Address : 416 Maetan3-Dong, Suwon City, Korea
Test Standard : §2.1093; FCC/OET Bulletin 65, Supplement C(June 2001)
FCC Classification : Licensed Portable Transmitter Held to Ear (PCE)
Digital Transmitter System (DTS)
Tested for : FCC/TCB Certification

2. DESCRIPTION OF DEVICE

Test Sample : 850/1900 GSM/GPRS Phone with Bluetooth ,
WLAN and EDGE RX only
Model Number : GT-B5512
Serial Number : Identical prototype (S/N : # FI-280-A)
Tx Freq.Range: 824.2 ~ 848.8 MHz (GSM850)
1850.20 ~ 1909.80 MHz (GSM1900)
2412 ~ 2462 MHz (WLAN)
Rx Freq.Range: 869.2 ~ 893.8 MHz (GSM850)
1930.20 ~ 1989.80 MHz (GSM1900)
2412 ~ 2462 MHz (WLAN)
Antenna Manufacturer : Patron
Antenna Model No.: MAIN ANT
Antenna Dimensions : 58*12.93*4.94(mm)
Separation distance between
Main and Bluetooth antenna : 29(mm)

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	3 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	4 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

System Electronics

The DAE4(or DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

3.2 E-field Probe



The SAR measurement were conducted with the dosimetric probe ES3DV2, ES3DV3, EX3DV4 and ET3DV6, designed in the classical triangular configuration (see Fig.3.3) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting (see Fig.3.2). The approach is

Figure 3.2 DAE System stopped at reaching the maximum.

Probe Specifications

- Construction Symmetrical design with triangular core
- Interleaved sensors
- Built-in shielding against static charges
- PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

- Calibration Basic Broad Band Calibration in air: 10-3000 MHz
- Conversion Factors (CF) for HSL 900 and HSL 1800

Additional CF for other liquids and frequencies upon request




Figure 3.3 Triangular Probe Configuration

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	5 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

Frequency 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Directivity **[ES3DV3], [ET3DV6]**
 ± 0.2 dB in HSL (rotation around probe axis)
 ± 0.3 dB in tissue material (rotation normal to probe axis)
[EX3DV4]
 ± 0.3 dB in HSL (rotation around probe axis)
 ± 0.5 dB in tissue material (rotation normal to probe axis)

Dynamic Range **[ES3DV3], [ET3DV6]**
 $5\mu\text{W/g}$ to $> 100\text{mW/g}$; Linearity: $\pm 0.2\text{dB}$
[EX3DV4]
 $10\mu\text{W/g}$ to $> 100\text{mW/g}$; Linearity: ± 0.2 dB

Dimensions **[ES3DV3], [ES3DV2]**
Overall length: 330 mm (Tip: 20 mm)
Tip diameter: 3.9 mm (Body: 12 mm)
Distance from probe tip to dipole centers: 2.1 mm
[EX3DV4]
Overall length: 330 mm (Tip: 20 mm)
Tip diameter: 2.5 mm (Body: 12 mm)
Typical distance from probe tip to dipole centers: 1 mm



[ES3DV3] ,[ES3DV2]

[ET3DV6]
Overall length: 330mm
Tip length: 16mm
Body diameter: 12mm
Tip diameter: 6.8mm
Distance from probe tip to dipole centers: 2.7mm



[EX3DV4]

Application **[ES3DV3], [ES3DV2]**

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	6 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

General dosimetry up to 5 GHz
 Dosimetry in strong gradient fields
 Compliance tests of mobile phones

[EX3DV4]

High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30 %.



[ET3DV6]

[ET3DV6]

General dosimetry up to 3 GHz
 Compliance tests of mobile phones
 Fast automatic scanning in arbitrary phantoms

Optical
 Surface
 Detection

[ET3DV6]

± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces

3.3 Phantom

SAM Twin Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid.

Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (See Figure 3.5)



Figure3.5 SAM Twin Phantom

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	7 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

SAM Twin Phantom Specification

Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, EN 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid.
Shell Thickness	2 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Height: 810 mm; Length: 1000 mm; Width: 500 mm

Modular Flat Phantom

The Modular Flat Phantom V5.1 is constructed of a fiberglass shell integrated in a wooden table. Also It consists of three identical flat phantoms (modules) which can be installed and removed separately without emptying the liquid, as well as a wooden support.. It enables the dosimetric evaluation of body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid.

Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (See Figure 3.6)



Figure 3.6 Modular Flat Phantom

Modular Flat Phantom Specification

Construction	The shell corresponds to the specifications of IEEE 1528-2003. It enables the dosimetric evaluation of body mounted usage above 800 MHz at the flat phantom region. A cover prevents evaporation of the liquid		
Shell Thickness	2 ± 0.2 mm		
Filling Volume	Approx. 10 liters		
Dimension	Wooden support -	Height: 810 mm; Length: 830 mm; Width: 500 mm	
	Each Module -	Height:190 mm; Length: 200 mm; width: 300 mm	

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	8 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

3.4 Brain Simulating Mixture Characterization

The brain mixtures consist of a viscous gel using hydroxyethylcellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue.

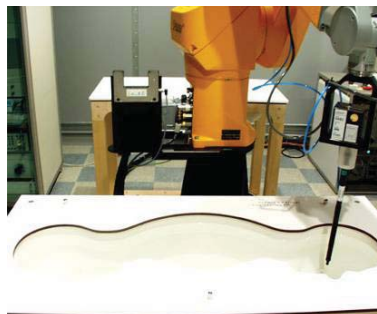


Figure 3.7 Simulated Tissue

Table 3.1 Composition of the Brain Tissue Equivalent Matter

INGREDIENTS	835MHz Brain	835MHz Muscle	1900MHz Brain	1900MHz Muscle	2450MHz Brain	2450MHz Muscle
WATER	40.29%	50.75%	55.24%	70.23%	62.7%	73.2%
SUGAR	57.90%	48.21%	-	-	-	-
SALT	1.38%	0.94%	0.24%	0.21%	-	0.04%
TWEEN20	-	-	44.52%	29.56%	37.3%	26.76%
BACTERIACIDE	0.18%	0.10%	-	-	-	-
HEC	0.25%	-	-	-	-	-
Dielectric Constant Target	41.50	55.20	40.00	53.30	39.2	52.7
Conductivity Target (S/m)	0.900	0.970	1.400	1.520	1.80	1.95

3.5 Device Holder for Transmitters

In combination with the Twin SAM Phantom V4.0, the Mounting Device (see Fig. 3.7) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately and repeatedly be positioned according to the EN 50360:2001 and FCC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Figure 3.8 Device Holder

*Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configuration. To produce worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	9 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

3.6 Validation Dipole

The reference dipole should have a return loss better than –20 dB (measured in the setup) at the resonant frequency to reduce the uncertainty in the power measurement.

Frequency	835, 1900, 2450 MHz
Return Loss	< -20 dB at specified validation position
Dimensions	D835V2: dipole length: 161 mm; overall height: 330 mm D1900V2: dipole length: 68 mm; overall height: 300 mm D2450V2: dipole length: 51.8 mm; overall height: 300 mm

- End of page –

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	10 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

3.7 Equipment Calibration

Table 3.2 Test Equipment Calibration

Type	Calibration Due Date	Serial No.
SPEAG E-Field Probe EX3DV4	Mar.22, 2012	3520
SPEAG DAE4	Mar.17, 2012	724
SPEAG Validation Dipole D835V2	Feb.23, 2013	4d050
SPEAG Validation Dipole D1900V2	Feb.23, 2013	5d082
SPEAG Validation Dipole D2450V2	Apr.19, 2013	708
Stäubli Robot RX90BL	Not Required	F05/51G6A1/A/01
SPEAG SAM Twin Phantom V4.0	Not Required	TP-1364
SPEAG SAM Twin Phantom V4.0	Not Required	TP-1604
Modular Phantom	Not Required	MP-1010
E4421B Signal Generator	Oct.12, 2012	MY41000654
BBS3Q7ELU Power Amp	Oct.12, 2012	1007D/C0035
E4419B Power meter	Oct.12, 2012	GB41293847
E9300B Power sensor	Jan.28, 2012	MY41495533
HP-8753ES Network Analyzer	Apr.27, 2012	US39173712
HP85070C Dielectric Probe Kit	Not Required	US99360087
E4419B Power meter	Feb.25, 2012	MY45103291
E9300B Power sensor	Mar.04, 2012	MY41496209
E9300B Power sensor	Mar.04, 2012	MY41496085
DASY4 S/W (ver 4.7)	Not Required	-
8560E Spectrum Analyzer	Sep.16, 2012	3635A02452
778D Dual Directional Coupler	Dec.02, 2011	50189
777D Dual Directional Coupler	Feb.23, 2012	07523
Base Station Simulator	Feb.09, 2012	GB43460148

NOTE:

The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Validation measurement is performed by Samsung Lab. before each test. (see § 7.2) The brain simulating material is calibrated by Samsung using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material. (see § 7.1)

- End of page -

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	11 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

4. SAR MEASUREMENT PROCEDURE

The evaluation was performed using the following procedure.

STEP 1

The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed location point was measured and used as a reference value.

STEP 2

The SAR distribution at the exposed side of the head was measured at a distance of 3.9mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 20mm x 20mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

STEP 3

Around this point, a volume of 32mm x 32mm x 30mm (fine resolution volume scan, zoom scan) was assessed by measuring 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the center of the dipoles is 2.7mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

STEP 4

The SAR value at the same location as in step 1 was again measured.

(If the value changed by more than 5%, the evaluation is repeated.)

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	12 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

5. DESCRIPTION OF TEST POSITION

5.1 SAM Phantom Shape

Figure 5.1 shows the front, back and side views of SAM. The point “M” is the reference point for the center of mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERPs are 15 mm posterior to the entrance to ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5.2.



Figure 5.1 Front, back and side view of SAM

The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 5.3). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines should be marked on the external phantom shell to facilitate handset positioning. Posterior to the N-F line, the thickness of the phantom shell with the shape of an ear is a flat surface 6 mm thick at the ERPs.

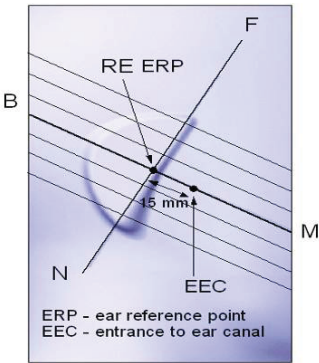


Figure 5.2 Close up side view

5.2 “cheek” Position

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (see Fig. 5.4). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its tip and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	13 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE RX only	Issue Date :	Dec.08, 2011




Figure 5.4 Handset vertical and horizontal reference lines





Figure 5.3 Side view of the phantom showing relevant markings



Step 1

The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 5.5), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom

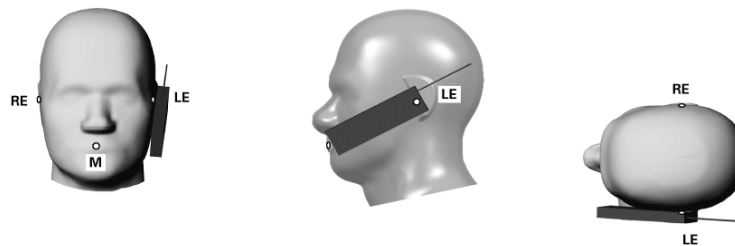


Figure 5.5 Front, Side and Top View of Cheek/Touch Position

Step 2

The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.

Step 3

While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).

Step 4

Rotate the handset around the vertical centerline until the phone (horizontal line) was symmetrical was respect to the line NF.

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	14 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

Step 5

While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). See Figure 5.2.

5.3 “tilted” Position

With the test device aligned in the “cheek” position :

Step 1

Repeat steps 1 to 5 of 5.2 to place the device in the “Cheek/Touch Position”

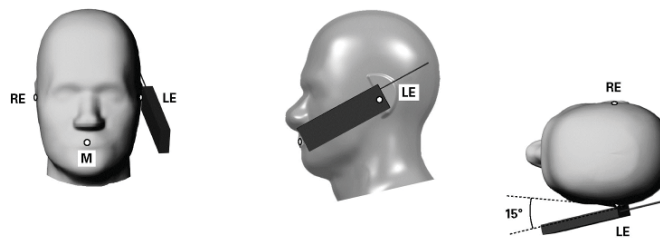


Figure 5.6 Front, side and Top View of Ear/Tilt 15° Position

Step 2

While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.

Step 3

The phone was then rotated around the horizontal line by 15 degree.

Step 4

While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head.

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	15 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

5.4 Body Configurations for Single TX SAR considerations

5.4.1 SAR Test Configurations

Mode	Back	Front	Left	Right	Top	Bottom
GPRS850	Yes	Yes	Yes	Yes	No	Yes
GPRS1900	Yes	Yes	Yes	Yes	No	Yes
WIFI	Yes	Yes	Yes	No	No	No

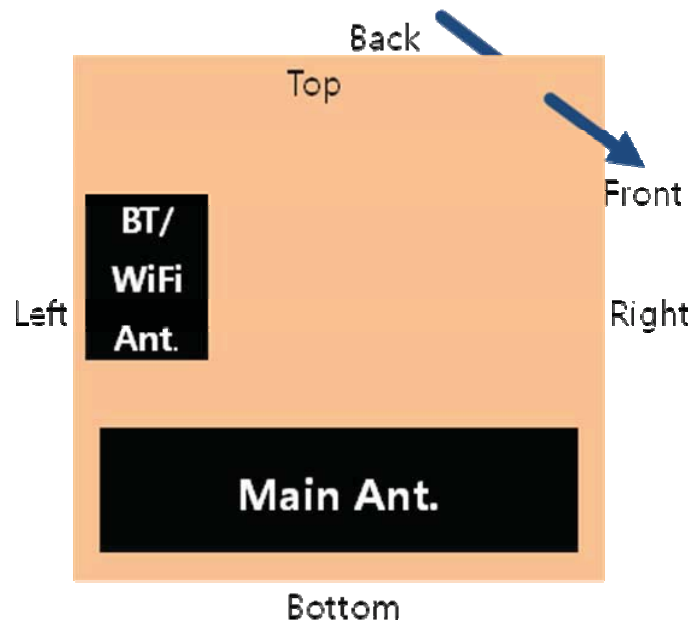


Figure 5.7 Identification of Sides for SAR Testing

Note : Per Oct 2010 TCB FCC Workshop, the edges with antennas within 2.5 cm are required to be evaluated for SAR. See Figure 5.8 distances of the actual device.

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	16 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

5.4.2 Transmit Antenna Separation Distances

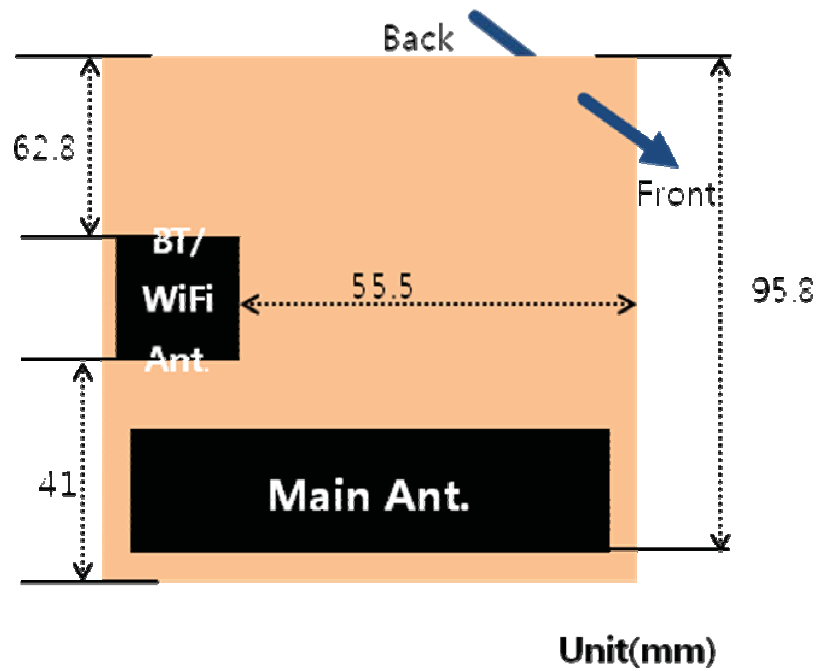


Figure 5.8 Antenna Locations, as viewed from back of device

- End of page -

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	17 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

6. MEASUREMENT UNCERTAINTY

Table 6.1 Uncertainty Budget at 835MHz

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	C _i	Standard uncertainty (±%)	v _i ² or v _{eff}
Measurement System						
Probe Calibration	11.00	normal	2.000	1	5.50	∞
Axial Isotropy	4.70	rectangular	1.732	0.7	1.90	∞
Hemispherical Isotropy	9.60	rectangular	1.732	0.7	3.88	∞
Linearity	4.70	rectangular	1.732	1	2.71	∞
System Detection Limits	0.25	rectangular	1.732	1	0.14	∞
Boundary effects	1.00	rectangular	1.732	1	0.58	∞
Readout electronics	0.30	normal	1.000	1	0.30	∞
Response time	0.80	rectangular	1.732	1	0.46	∞
RF ambient conditions	3.00	rectangular	1.732	1	1.73	∞
Integration time	1.73	rectangular	1.732	1	1.00	∞
Mechanical constrains of robot	1.50	rectangular	1.732	1	0.87	∞
Probe positioning	2.90	rectangular	1.732	1	1.67	∞
Extrapolation and integration	1.00	rectangular	1.732	1	0.58	∞
Test Sample Related						
Test Sample positioning	1.12	normal	1.000	1	1.12	14
Device holded uncertainty	3.44	normal	1.000	1	3.44	∞
Power Drift	5.00	rectangular	1.732	1	2.89	∞
Phantom and Setup						
Modular Phantom uncertainty	5.62	normal	1.000	1	5.62	2
Phantom uncertainty	4.00	rectangular	1.732	1	2.31	∞
Liquid conductivity (deviation from target)	5.00	rectangular	1.732	0.64	1.85	∞
Liquid conductivity (measurement error)	0.38	normal	1.000	0.64	0.24	∞
Liquid permittivity (deviation from target)	5.00	rectangular	1.732	0.6	1.73	∞
Liquid permittivity (measurement error)	5.44	normal	1.000	0.6	3.26	∞
Combined Standard Uncertainty		Normal	-	-	11.84	172776
Extended Standard Uncertainty(K=2.00)					23.69	172776

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	18 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

Table 6.2 Uncertainty Budget at 1900MHz

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	c _i	Standard uncertainty (±%)	v _i ² or v _{eff}
Measurement System						
Probe Calibration	11.00	normal	2.000	1	5.50	∞
Axial Isotropy	4.70	rectangular	1.732	0.7	1.90	∞
Hemispherical Isotropy	9.60	rectangular	1.732	0.7	3.88	∞
Linearity	4.70	rectangular	1.732	1	2.71	∞
System Detection Limits	0.25	rectangular	1.732	1	0.14	∞
Boundary effects	1.00	rectangular	1.732	1	0.58	∞
Readout electronics	0.30	normal	1.000	1	0.30	∞
Response time	0.80	rectangular	1.732	1	0.46	∞
RF ambient conditions	3.00	rectangular	1.732	1	1.73	∞
Integration time	0.00	rectangular	1.732	1	0.00	∞
Mechanical constrains of robot	1.50	rectangular	1.732	1	0.87	∞
Probe positioning	2.90	rectangular	1.732	1	1.67	∞
Extrapolation and integration	1.00	rectangular	1.732	1	0.58	∞
Test Sample Related						
Test Sample positioning	1.50	normal	1.000	1	1.50	14
Device holded uncertainty	3.44	normal	1.000	1	3.44	∞
Power Drift	5.00	rectangular	1.732	1	2.89	∞
Phantom and Setup						
Modular Phantom uncertainty	6.02	normal	1.000	1	6.02	2
Phantom uncertainty	4.00	rectangular	1.732	1	2.31	∞
Liquid conductivity (deviation from target)	5.00	rectangular	1.732	0.64	1.85	∞
Liquid conductivity (measurement error)	1.84	normal	1.000	0.64	1.18	∞
Liquid permittivity (deviation from target)	5.00	rectangular	1.732	0.6	1.73	∞
Liquid permittivity (measurement error)	4.54	normal	1.000	0.6	2.73	∞
Combined Standard Uncertainty		Normal	-	-	12.00	60176
Extended Standard Uncertainty(K=2.00)					24.00	60176

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	19 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

Table 6.3 Uncertainty Budget at 2450MHz

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	c _i	Standard uncertainty (±%)	v _i ² or v _{eff}
Measurement System						
Probe Calibration	11.00	normal	2.000	1	5.00	∞
Axial Isotropy	4.70	rectangular	1.732	0.7	1.90	∞
Hemispherical Isotropy	9.60	rectangular	1.732	0.7	3.88	∞
Linearity	4.70	rectangular	1.732	1	2.71	∞
System Detection Limits	0.25	rectangular	1.732	1	0.14	∞
Boundary effects	1.00	rectangular	1.732	1	0.58	∞
Readout electronics	0.30	normal	1.000	1	0.30	∞
Response time	0.80	rectangular	1.732	1	0.46	∞
RF ambient conditions	3.00	rectangular	1.732	1	1.73	∞
Integration time	0.00	rectangular	1.732	1	0.00	∞
Mechanical constrains of robot	1.50	rectangular	1.732	1	0.87	∞
Probe positioning	2.90	rectangular	1.732	1	1.67	∞
Extrapolation and integration	1.00	rectangular	1.732	1	0.58	∞
Test Sample Related						
Test Sample positioning	4.22	normal	1.000	1	4.22	14
Device holded uncertainty	3.44	normal	1.000	1	3.44	∞
Power Drift	5.00	rectangular	1.732	1	2.89	∞
Phantom and Setup						
Modular Phantom uncertainty	2.32	Normal	1.0001	1	2.32	2
Phantom uncertainty	4.00	rectangular	1.732	1	2.31	∞
Liquid conductivity (deviation from target)	5.00	rectangular	1.732	0.64	1.85	∞
Liquid conductivity (measurement error)	2.04	normal	1.000	0.64	1.30	∞
Liquid permittivity (deviation from target)	5.00	rectangular	1.732	0.6	1.73	∞
Liquid permittivity (measurement error)	4.27	normal	1.000	0.6	2.56	∞
Combined Standard Uncertainty		Normal	-	-	11.32	728
Extended Standard Uncertainty(K=2.00)					22.64	728

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	20 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

7. SYSTEM VERIFICATION

7.1 Tissue Verification

Table 7.1 MEASURED TISSUE PARAMETERS

duf	835MHz Head		835MHz Body		1900MHz Head		1900MHz Body		2450MHz Head		2450MHz Body	
	Target	Measured	Target	Measured	Target	Measured	Target	Measured	Target	Measured	Target	Measured
Date	Nov.29, 2011		Nov.29, 2011		Nov.28, 2011		Nov.28, 2011		Dec.01, 2011		Dec.01, 2011	
Liquid Temperature(°C)	21.6		21.6		21.6		21.6		22.4		21.7	
Dielectric Constant: ϵ'	41.5	42.3	55.2	53.7	40	39.2	53.3	52.3	39.2	38.3	52.7	51.4
Conductivity:	0.9	0.91	0.97	0.96	1.4	1.41	1.52	1.51	1.8	1.85	1.95	1.91
Tissue Batch Number	835DF2001L		1900F2001T		1900F2001T		1900B2002J		2450MF3001H		2450B1001V	

The measured value must be within $\pm 5\%$ of the target value.

7.2 Test System Validation

Prior to assessment, the system is verified to the $\pm 10\%$ of the specification at 835MHz, 1900MHz and 2450MHz by using the system validation kit(s). (see Appendix D, Graphic Plot Attached)

Table 7.2 System Validation Results

System Validation Kit	Tissue	Targeted SAR _{1g} (mW/g)	Measured SAR _{1g} (mW/g)	Normalized SAR _{1g} (mW/g)	Deviation (%)	Date	Liquid Temperature(°C)	Ambient Temperature(°C)	Input Power (mW)
4d050	835MHz Brain	9.61	2.41	9.64	0.31	Nov.29, 2011	21.6	22.0	250
4d050	835MHz Body	10.0	2.35	9.4	-6.0	Nov.29, 2011	21.5	21.8	250
5d082	1900MHz Brain	41.4	4.3	43.0	3.86	Nov.28, 2011	21.6	21.8	100
5d082	1900MHz Body	40.7	3.83	38.3	-5.90	Nov.28, 2011	21.6	22.0	100
708	2450MHz Brain	55.8	5.69	56.9	1.97	Dec.01, 2011	22.4	22.5	100
708	2450MHz Body	51.2	4.92	49.2	-3.91	Dec.01, 2011	21.7	22.2	100

*Validation was measured with input power 100 mW, 250 mW and normalized to 1W.

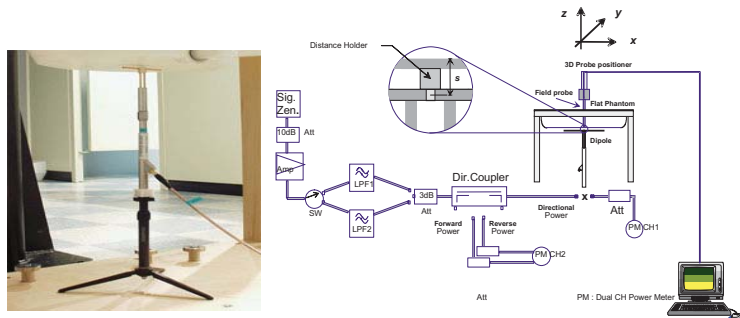


Figure 7.1 Dipole Validation Test Setup

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	21 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

8. SAR MEASUREMENT RESULTS

Procedures Used To Establish Test Signal

The handset was placed into simulated call mode using base station simulator. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR. When test modes are not available or inappropriate for testing a handset, the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s". Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes) should be tabulated in the test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations should be clearly identified.

Head SAR Measurements

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than ¼ dB higher than that measured in 12.2kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4kbps SRB (signaling radio bearer) using the exposure configuration that results in the highest SAR for that RF channel in 12.2 RMC.

Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all "1s". SAR for other spreading codes and multiple DPDCHn, when supported by the DUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCHn configuration, are less than ¼ dB higher than those measured in

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	22 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

12.2 RMC. Otherwise, SAR is measured on the maximum output channel with an applicable RMC configuration for the corresponding spreading code or DPDCHn using the exposure configuration that results in the highest SAR with 12.2 RMC. When more than 2 DPDCHn are supported by the DUT, it may be necessary to configure the additional DPDCHn for the DUT using FTM(Factory Test Mode) with parameters similar to those used in 384 kbps and 768 kbps RMC.

Device Test Conditions

The handset is battery operated. Each SAR measurement was taken with a fully charged battery. In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power. If a conducted power deviation of more than 5% occurred, the test was repeated. And all Tx(1~4Tx) conducted power were also investigated for Body-Worn SAR Measurement

Table 8.1 GPRS Power Table for GT-B5510

Band	Channel	Voice	1Tx	2Tx	3Tx	4Tx
850 [dBm]	128	32.55	32.44	30.9	28.91	26.9
	190	32.42	32.37	30.86	28.89	26.91
	251	32.3	32.31	30.81	28.84	26.89
1900 [dBm]	512	29.7	29.75	28.21	26.3	24.27
	661	29.8	29.76	28.25	26.37	24.36
	810	29.83	29.77	28.3	26.4	24.4

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	23 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

Table 8.2 Calculated Frame-Averaged Output Power Table for GT-B5510

Band	Channel	Voice	1Tx	2Tx	3Tx	4Tx
850 [dBm]	128	23.52	23.41	24.88	24.65	23.89
	190	23.39	23.34	24.84	24.63	23.90
	251	23.27	23.28	24.79	24.58	23.88
1900 [dBm]	512	20.67	20.72	22.19	22.04	21.26
	661	20.77	20.73	22.23	22.11	21.35
	810	20.80	20.74	22.28	22.14	21.39

Note:

Both burst-averaged and calculated frame-averaged powers are included. The bolded GPRS modes were selected according to the highest frame-averaged output power table per KDB Publication 941225 D03.

The conducted Power of GPRS(GMSK) were measured with CS1 and the EDGE (8-PSK) conducted Power were measured with MCS7

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	24 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

GSM Class : B

GPRS Multislot Class : 12 (max 4 Tx Uplink slots)

DTM Multislot Class : N/A

*The calculated frame averaged output powers are derived from GPRS power table with time averaging. To average output power, subtract $10 \cdot \log(\text{Num of Tx slot})$ from GPRS power.

Table 8.3 802.11b Conducted Output Power

Freq [MHz]	Channel	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2412	1	1	14.61	17.41
		2	14.61	17.41
		5.5	14.61	17.40
		11	14.56	17.39
2437	6	1	14.73	17.54
		2	14.61	17.47
		5.5	14.66	17.51
		11	14.63	17.48
2462	11	1	14.78	17.59
		2	14.68	17.54
		5.5	14.76	17.59
		11	14.74	17.57

Table 8.4 802.11g Conducted Output Power

Freq [MHz]	Channel	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2412	1	6	12.40	20.18
		9	12.39	19.88
		12	12.40	20.08
		18	12.44	20.10
		24	12.41	20.02
		36	12.41	20.14
		48	12.32	20.09
		54	12.33	20.08
2437	6	6	12.46	20.19
		9	12.47	20.09
		12	12.48	20.12
		18	12.47	20.19
		24	12.49	20.26
		36	12.50	20.32
		48	12.46	20.26
		54	12.45	20.15
2462	11	6	12.55	20.32
		9	12.58	20.13
		12	12.64	20.25
		18	12.52	20.19
		24	12.61	20.41
		36	12.60	20.42
		48	12.57	20.49
		54	12.57	20.47

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	25 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

Table 8.5 802.11n Conducted Output Power

Freq [MHz]	Channel	MCS Index	Data Rate [Mbps]	Measured Average Power [dBm]	Measured Peak Power [dBm]
2412	1	0	6.5/7.2	10.63	18.32
		1	13/14.4	10.58	18.42
		2	19.5/21.7	10.58	18.23
		3	26/28.9	10.52	18.42
		4	39/43.3	10.55	18.37
		5	52/57.8	10.59	18.41
		6	58.5/65	10.56	18.39
		7	65/72.2	10.51	18.29
2437	6	0	6.5/7.2	10.67	18.52
		1	13/14.4	10.67	18.33
		2	19.5/21.7	10.66	18.54
		3	26/28.9	10.73	18.71
		4	39/43.3	10.67	18.58
		5	52/57.8	10.59	18.42
		6	58.5/65	10.61	18.31
		7	65/72.2	10.63	18.69
2462	11	0	6.5/7.2	10.80	18.56
		1	13/14.4	10.73	18.66
		2	19.5/21.7	10.76	18.48
		3	26/28.9	10.75	18.66
		4	39/43.3	10.72	18.57
		5	52/57.8	10.76	18.70
		6	58.5/65	10.78	18.60
		7	65/72.2	10.81	18.75

Simultaneous Transmission

Refer to the FCC OET document, 'SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas' (Feb 2008)

Table 8.6 Output Power Thresholds for Unlicensed Transmitters

	2.45	5.15 - 5.35	5.47 - 5.85	GHz
P Ref	12	6	5	mW
Device output power should be rounded to the nearest mW to compare with values specified in this table				

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	26 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

Table 8.7 Summary of SAR Evaluation Requirements for Cell phones with Multiple Transmitters

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	<u>Routine evaluation required</u>	SAR not required: <u>Unlicensed only</u> - o when stand-alone 1-g SAR is not required and antenna is > 5 cm from other antennas <u>Licensed & Unlicensed</u> - o when the sum of the 1-g SAR is <1.6 W/kg for all simultaneous transmitting antennas - o when SAR to antenna separation ratio of simultaneous transmitting antenna pair is < 0.3 SAR required: <u>Licensed & Unlicensed</u> antenna pairs with SAR to antenna separation ratio ≥ 0.3; test is only required for the configuration that results in the highest SAR in standalone configuration for each wireless mode and exposure condition Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply
Unlicensed Transmitters	When there is no simultaneous transmission – - o output < 60/f: SAR not required - o output $\geq 60/f$: stand-alone SAR required When there is simultaneous transmission – <u>Stand-alone SAR not required when</u> - o output $\leq 2.P_{Ref}$ and antenna is > 5.0 cm from other antennas - o output $\leq P_{Ref}$ and antenna is ≥ 2.5 cm from other antennas - o output $\leq P_{Ref}$ and antenna is < 2.5 cm from other antennas, each with either output power $\leq P_{Ref}$ or 1-g SAR < 1.2 W/kg <u>Otherwise stand-alone SAR is required</u> When stand-alone SAR is required - o test SAR on highest output channel for each wireless mode and exposure condition - o if SAR for highest output channel is > 50% of SAR limit, evaluate all channels according to normal procedures	

Table 8.8 Simultaneous Transmission Summation for Held to Ear Voice Call

Simult Tx	Configuration	GSM850 SAR(W/Kg)	WIFI SAR (W/Kg)	Σ SAR (W/Kg)	Simult Tx	Configuration	GSM1900 SAR(W/Kg)	WIFI SAR (W/Kg)	Σ SAR (W/Kg)
Head SAR	Right Cheek	0.471	0.120	0.591	Head SAR	Right Cheek	0.585	0.120	0.705
	Right Tilt	0.224	0.014	0.238		Right Tilt	0.202	0.014	0.216
	Left Cheek	0.445	0.073	0.518		Left Cheek	0.397	0.073	0.470
	Left Tilt	0.236	0.020	0.256		Left Tilt	0.190	0.020	0.210

Table 8.9 Simultaneous Transmission Summation for 2G Data and WIFI(Body-Worn)

Configuration	Mode	2G SAR (W/Kg)	WIFI SAR (W/Kg)	Σ SAR (W/Kg)
Back	GPRS850 SAR(W/Kg)	1.03	0.015	1.045
	GPRS1900 SAR(W/Kg)	0.675	0.015	0.690

Table 8.10 Simultaneous Transmission Summation for 2G Data and WIFI(Hotspot)

Simult Tx	Configuration	GPRS850 SAR(W/Kg)	WIFI SAR (W/Kg)	Σ SAR (W/Kg)	Simult Tx	Configuration	GPRS1900 SAR(W/Kg)	WIFI SAR (W/Kg)	Σ SAR (W/Kg)
Body SAR	Back	1.03	0.015	1.045	Body SAR	Back	0.675	0.015	0.690
	Front	0.584	0.020	0.604		Front	0.459	0.020	0.479
	Left	0.273	0.00681	0.27981		Left	0.058	0.00681	0.06481
	Right	0.408	-	0.408		Right	0.162	-	0.162
	Top	-	-	-		Top	-	-	-
	Bottom	0.100	-	0.100		Bottom	0.584	-	0.584

Multiple Antenna/Transmission Information for GT-B5512

The separation between the main antenna and the Bluetooth and WLAN antennas is 29mm.

RF Conducted Power of Bluetooth Tx is 8 dBm.

RF Conducted Power of WLAN is 15 dBm.

Conclusion

The above tables represent the worst-case simultaneous transmission scenarios possible with this device. The above numerical summed SAR was below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit. Therefore, no volumetric SAR summation is required since the numerical sums are below the limit Based on the output power, antenna separation distance, and Body SAR, a stand-alone BT SAR test is not required. The summation of BT SAR and Licensed Transmitter SAR is 1.03 + 0 = 1.03, which is less than 1.6 W/Kg, therefore, a simultaneous SAR evaluation is not required.

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	29 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

8.1 GSM850 Head SAR Results

Frequency		Mode	Conducted		Side	Test Position	Antenna Type	Battery	Drift (dB)	SAR Level (W/kg)
MHz	Ch		Start	End						
836.6	190	GSM850	32.47	32.49	Right	Cheek/Touch	Intenna	Standard	0.043	0.471
836.6	190	GSM850	32.43	32.45	Right	Ear/Tilt 15°	Intenna	Standard	-0.006	0.224
836.6	190	GSM850	32.41	32.44	Left	Cheek/Touch	Intenna	Standard	0.008	0.445
836.6	190	GSM850	32.45	32.41	Left	Ear/Tilt 15°	Intenna	Standard	-0.049	0.236
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram				

NOTES:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
2. Tissue parameters and temperatures are listed on the SAR plot.
3. Liquid tissue depth is 15.2 ± 0.2 cm
4. Battery is fully charged for all readings.
5. Test Configuration ☐ Manu. Test Codes ☒ Base Station Simulator
6. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June, 2001), if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	30 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

8.2 GPRS850 Body SAR Results(Without Holster)

Frequency		Mode	Conducted		Separation Distance	Test Position	Antenna Type	Battery	TX GPRS slots	Drift (dB)	SAR Level (W/kg)
MHz	Ch		Start	End							
836.6	190	GPRS850	30.84	30.83	1.0 Cm	Back	Intenna	Standard	2	0.043	1.03
836.6	190	GPRS850	28.86	28.81	1.0 Cm	Back	Intenna	Standard	3	0.000	0.952
836.6	190	GPRS850	26.90	26.86	1.0 Cm	Back	Intenna	Standard	4	-0.017	0.777
824.2	128	GPRS850	30.92	30.94	1.0 Cm	Back	Intenna	Standard	2	0.004	0.510
848.8	251	GPRS850	30.83	30.81	1.0 Cm	Back	Intenna	Standard	2	-0.032	0.934
836.6	190	GPRS850	30.84	30.81	1.0 Cm	Front	Intenna	Standard	2	0.029	0.584
836.6	190	GPRS850	30.85	30.88	1.0 Cm	Left	Intenna	Standard	2	-0.163	0.273
836.6	190	GPRS850	30.81	30.83	1.0 Cm	Right	Intenna	Standard	2	0.032	0.408
836.6	190	GPRS850	30.84	30.86	1.0 Cm	Bottom	Intenna	Standard	2	0.023	0.100
824.2	128	GPRS850	30.91	30.95	1.0 Cm	Back	Intenna	Standard	3	-0.076	0.956
848.8	251	GPRS850	30.84	30.82	1.0 Cm	Back	Intenna	Standard	3	-0.045	1.02
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram					

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is 15.2 ± 0.2 cm
- Battery is fully charged for all readings.
- Test Configuration ☐ Manu. Test Codes ☒ Base Station Simulator
- Justification for reduced test configurations: This model supports GPRS CLASS "12" (4Tx) So the burst power and timing period is more than 2dB higher in GPRS mode than in GSM850 mode. Hence, the GSM850 mode was not measured.
- Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
- Body SAR was tested at 1cm distance because battery operated personal wireless routers(hotspots) enable multiple Wi-Fi connections, per KDB 941225 D06. But position 'SideD' was not tested because antenna distance was >2.5 cm.
- Per FCC KDB Publication 941225 D06, when the same wireless modes and device transmission configurations are required for body-worn accessories and hotspot mode, it is not necessary to additionally test body-worn accessory SAR for the same device orientation. Therefore, the hotspot data for the back side configuration additionally shows body-worn compliance.
- During SAR Testing for the Wireless Router conditions per KDB 941225 D06, the actual Portable Hotspot operation (with actual simultaneous transmission with WIFI) was not activated.

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	31 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

8.3 GSM1900 Head SAR Results

Frequency		Mode	Conducted		Side	Test Position	Antenna Type	Battery	Drift (dB)	SAR Level (W/kg)
MHz	Ch		Start	End						
1880	661	GSM1900	29.81	29.84	Right	Cheek/Touch	Intenna	Standard	-0.112	0.585
1880	661	GSM1900	29.83	29.87	Right	Ear/Tilt 15°	Intenna	Standard	0.093	0.202
1880	661	GSM1900	29.84	29.81	Left	Cheek/Touch	Intenna	Standard	0.104	0.397
1880	661	GSM1900	29.85	29.83	Left	Ear/Tilt 15°	Intenna	Standard	0.039	0.190
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram				

NOTES:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
2. Tissue parameters and temperatures are listed on the SAR plot.
3. Liquid tissue depth is 15.2 ± 0.2cm
4. Battery is fully charged for all readings.
5. Test Configuration ☐ Manu. Test Codes ☒ Base Station Simulator
6. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June, 2001), if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	32 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

8.4 GPRS1900 Body SAR Results(Without Holster)

Frequency		Mode	Conducted		Separation Distance	Test Position	Antenna Type	Battery	Tx GPRS slots	Drift (dB)	SAR Level (W/kg)
MHz	Ch		Start	End							
1880	661	GPRS1900	28.23	28.29	1.0 Cm	Back	Intenna	Standard	2	0.091	0.675
1880	661	GPRS1900	26.31	26.33	1.0 Cm	Back	Intenna	Standard	3	-0.015	0.641
1880	661	GPRS1900	24.32	24.37	1.0 Cm	Back	Intenna	Standard	4	0.041	0.537
1880	661	GPRS1900	28.28	28.22	1.0 Cm	Front	Intenna	Standard	2	0.018	0.459
1880	661	GPRS1900	28.21	28.28	1.0 Cm	Left	Intenna	Standard	2	0.114	0.058
1880	661	GPRS1900	28.24	28.20	1.0 Cm	Right	Intenna	Standard	2	0.087	0.162
1880	661	GPRS1900	28.27	28.22	1.0 Cm	Bottom	Intenna	Standard	2	-0.049	0.584
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram					

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is 15.2 ± 0.2 cm
- Battery is fully charged for all readings.
- Test Configuration ☐ Manu. Test Codes ☒ Base Station Simulator
- Justification for reduced test configurations: This model supports GPRS CLASS "12" (4Tx) So the burst power and timing period is more than 2dB higher in GPRS mode than in GSM1900 mode. Hence, the GSM1900 mode was not measured.
- Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
- Body SAR was tested at 1cm distance because battery operated personal wireless routers(hotspots) enable multiple Wi-Fi connections, per KDB 941225 D06. But position 'SideD' was not tested because antenna distance was >2.5 cm.
- Per FCC KDB Publication 941225 D06, when the same wireless modes and device transmission configurations are required for body-worn accessories and hotspot mode, it is not necessary to additionally test body-worn accessory SAR for the same device orientation. Therefore, the hotspot data for the back side configuration additionally shows body-worn compliance.
- During SAR Testing for the Wireless Router conditions per KDB 941225 D06, the actual Portable Hotspot operation (with actual simultaneous transmission with WIFI) was not activated.

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	33 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

8.5 WLAN Head SAR Results

Frequency		Mode	Conducted		Side	Test Position	Antenna Type	Battery	Data Rate (Mbps)	Drift (dB)	SAR Level (W/kg)
MHz	Ch		Start	End							
2437	11	WLAN	14.63	14.61	Right	Cheek/Touch	Intenna	Standard	1	0.001	0.120
2437	11	WLAN	14.62	14.69	Right	Ear/Tilt 15°	Intenna	Standard	1	0.101	0.014
2437	11	WLAN	14.67	14.65	Left	Cheek/Touch	Intenna	Standard	1	0.179	0.073
2437	11	WLAN	14.69	14.67	Left	Ear/Tilt 15°	Intenna	Standard	1	0.154	0.020
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram					

NOTES:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
2. Tissue parameters and temperatures are listed on the SAR plot.
3. Liquid tissue depth is 15.2 ± 0.2 cm
4. Battery is fully charged for all readings.
5. Test Configuration ☒ Manu. Test Codes ☐ Base Station Simulator
6. Justification for reduced test configurations for WIFI channels per KDB 941225 D06 : Highest average RF output power channel for the lowest data rate were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11n) were not investigated since the average output powers were not greater than 0.25 dB than that of the corresponding channel in the lowest data rate IEEE 802.11b mode.
7. WLAN Transmission was verified using a spectrum analyzer.

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	34 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

8.6 WLAN Body SAR Results(Without Holster)

Frequency		Mode	Conducted		Separation Distance	Test Position	Antenna Type	Battery	Bar	Data Rate (Mbps)	Drift (dB)	SAR Level (W/kg)
MHz	Ch		Start	End								
2437	11	WLAN	14.65	14.63	1.0Cm	Back	Intenna	Standard	Body	1	-0.004	0.015
2437	11	WLAN	14.64	14.61	1.0Cm	Front	Intenna	Standard	Body	1	0.000	0.020
2437	11	WLAN	14.69	14.62	1.0Cm	Left	Intenna	Standard	Body	1	-0.044	0.00681
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						1.6W/kg (mW/g) averaged over 1 gram						

NOTES:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [June 2001].
- Tissue parameters and temperatures are listed on the SAR plot.
- Liquid tissue depth is $15.2 \pm 0.2\text{cm}$
- Battery is fully charged for all readings.
- Test Configuration ☒ Manu. Test Codes ☐ Base Station Simulator
- Justification for reduced test configurations for WIFI channels per KDB 941225 D06 : Highest average RF output power channel for the lowest data rate were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11n) were not investigated since the average output powers were not greater than 0.25 dB than that of the corresponding channel in the lowest data rate IEEE 802.11b mode.
- Body SAR was tested at 1cm distance because battery operated personal wireless routers(hotspots) enable multiple Wi-Fi connections, per KDB 941225 D06. But position 'SideC' was not tested because antenna distance was $>2.5\text{cm}$.
- Per FCC KDB Publication 941225 D06, when the same wireless modes and device transmission configurations are required for body-worn accessories and hotspot mode, it is not necessary to additionally test body-worn accessory SAR for the same device orientation. Therefore, the hotspot data for the back side configuration additionally shows body-worn compliance.
- During SAR Testing for the Wireless Router conditions per KDB 941225 D06, the actual Portable Hotspot operation (with actual simultaneous transmission with WIFI) was not activated.
- WLAN Transmission was verified using a spectrum analyzer.

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	35 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

9. CONCLUSION

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

The highest reported SAR values are as follows:

GSM850: Head: 0.471W/Kg : Body-worn: 1.03W/Kg

GSM1900: Head: 0.585W/Kg : Body-worn: 0.675W/Kg

WLAN: Head: 0.120W/Kg : Body-worn: 0.02W/Kg

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	36 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

10. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, June 2001.
- [6] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [7] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [8] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [9] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [10] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [11] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [12] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [13] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [14] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [15] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [16] W. Gander, Computermathematic, Birkhaeuser, Basel, 1992.
- [17] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [18] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	37 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth,WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.

- [19] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [20] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [21] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [22] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [23] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [24] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [25] FCC Public Notice DA-02-1438. Office of Engineering and Technology Announces a Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65, June 19, 2002
- [26] FCC SAR Measurement Procedures for 3G Devices KDB 941225
- [27] SAR Measurement procedures for IEEE 802.11a/b/g KDB 248227
- [28] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB 648474
- [29] FCC Application Note for SAR Probe Calibration and System Verification Consideration for Measurements at 150 MHz – 3 GHz, KDB 450824
- [30] FCC SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens, KDB 616217
- [31] FCC SAR Measurement Requirements for 3 – 6 GHz, KDB 865664
- [32] FCC Mobile Portable RF Exposure Procedure, KDB 447498
- [33] FCC SAR Procedures for Dongle Transmitters, KDB 447498
- [34] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [35] FCC SAR Test Considerations for LTE Handsets and Data Modems, KDB Publication 941225
- [36] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.
- [37] FCC Hot Spot SAR v01, KDB Publication 941225 D06.

FCC ID: A3LGTB5512	Report Number: FI-280-S1		Page :	38 of 38
 SAMSUNG Electronics CO. LTD	EUT Type:	850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE RX only	Issue Date :	Dec.08, 2011

APPENDIX A

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (p). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see

Fig. A.1) .

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{p dv} \right)$$

Figure A.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \sigma E^2 / p$$

Where :

- σ = conductivity of the tissue-simulant material (S/m)
- p = mass density of the tissue-simulant material (kg/m³)
- E = Total RMS electric field strength (V/m)

Note: The primary factors that control rate or energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

- End of page -

APPENDIX B

Probe Calibration Process

Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure described in K. Pokovic, T.Schmid, N. Kuster, *Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies*, ICECOM97, Oct. 1997, pp. 120-124 with an accuracy better than +/-10%. The spherical isotropy was evaluated with the procedure described in K. Pokovic, T.Schmid, N. Kuster, *E-field Probe with improved isotropy in brain simulating liquids*, Proceedings of the ELMAR, Zadar, June 23-25, 1996, pp. 172-175 and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe is tested.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz (see Fig. B.1), and in a waveguide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

Temperature Assessment

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe (see Fig. B.2).

$$SAR = C \frac{\Delta T}{\Delta t}$$

where:

Δt = exposure time (30 seconds)

C = heat capacity of tissue (brain or muscle).

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E-field;

$$SAR = \frac{|E|^2 \cdot \sigma}{p}$$

where:

σ = simulated tissue conductivity

p = Tissue density (1.25 g/cm³ for brain tissue)




Figure B.1. E-Field and Temperature measurements at 900MHz




Figure B.2. E-Field and temperature measurements at 1.9GHz

APPENDIX C

ANSI/IEEE C95.1 – 1992 RF EXPOSURE LIMITS

Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is the exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table C.1 Safety Limits for Partial Body Exposure

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)
SPATIAL PEAK SAR ¹ Brain	1.60	8.00
SPATIAL PEAK SAR ² Whole Body	0.08	0.40
SPATIAL PEAK SAR ³ Hands, Feet, Ankles, Wrists	4.00	20.00

¹ The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as tissue volume in the shape of a cube) and over the appropriate averaging time.

² The Spatial Average value of the SAR averaged over the whole body.

³ The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

APPENDIX D

The Validation Measurements

DUT: Dipole 835 MHz; Serial: 4d050

Program Name: 835MHz Dipole Validation 2011.11.29

Procedure Name: 835MHz @ 250mW

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.6;Test Date-29/Nov/2011

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

835MHz @ 250mW/Area Scan (51x51x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 2.57 mW/g


835MHz @ 250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.4 V/m ; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 3.64 W/kg

SAR(1 g) = 2.41 mW/g ; SAR(10 g) = 1.57 mW/g

Maximum value of SAR (measured) = 2.61 mW/g

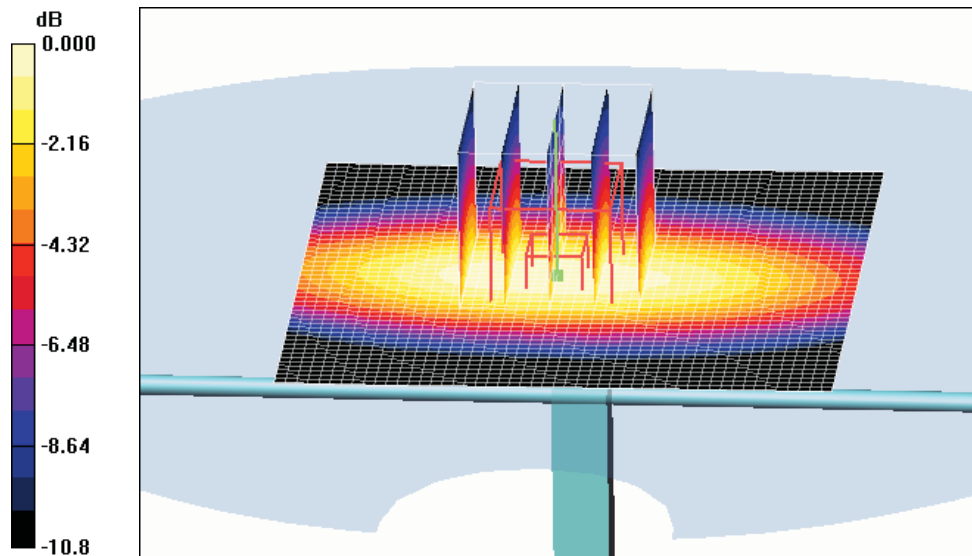

0 dB = 2.61mW/g

DUT: Dipole 835 MHz; Serial: 4d050

Program Name: 835MHz Dipole Validation 2011.11.29

Procedure Name: 835MHz @ 250mW

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.5;Test Date-29/Nov/2011

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

835MHz @ 250mW/Area Scan (51x51x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 2.63 mW/g


835MHz @ 250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 51.2 V/m ; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 3.50 W/kg

SAR(1 g) = 2.35 mW/g ; SAR(10 g) = 1.53 mW/g

Maximum value of SAR (measured) = 2.54 mW/g

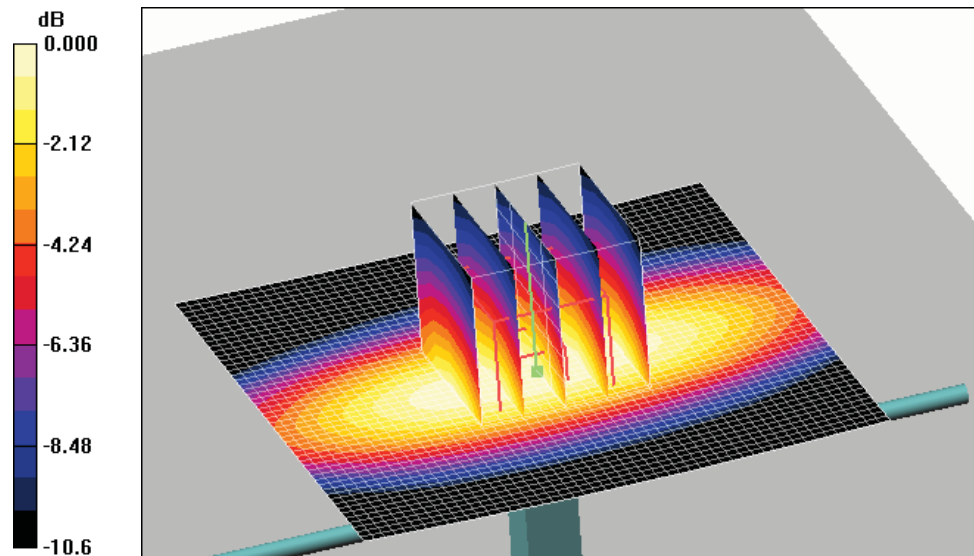

0 dB = 2.54mW/g

DUT: Dipole 1900 MHz; Serial: 5d082

Program Name: 1900MHz Dipole Validation 2011.11.28

Procedure Name: 1900MHz @ 100mW

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.6;Test Date-28/Nov/2011

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

1900MHz @ 100mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 5.61 mW/g


1900MHz @ 100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 46.6 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 7.84 W/kg

SAR(1 g) = 4.3 mW/g; SAR(10 g) = 2.25 mW/g

Maximum value of SAR (measured) = 4.81 mW/g

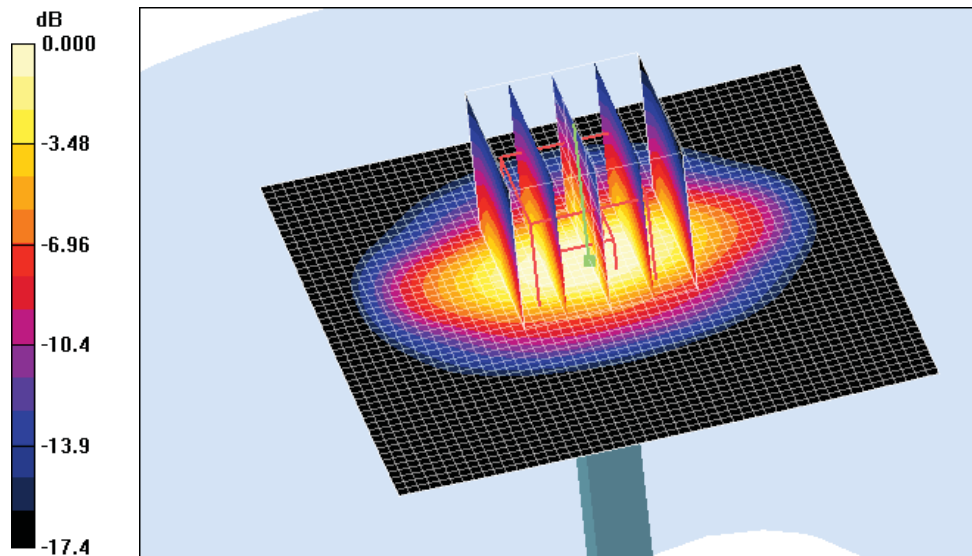

0 dB = 4.81mW/g

DUT: Dipole 1900 MHz; Serial: 5d082

Program Name: 1900MHz Dipole Validation 2011.11.28

Procedure Name: 1900MHz @ 100mW

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.6;Test Date-28/Nov/2011

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

1900MHz @ 100mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 5.41 mW/g


1900MHz @ 100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 52.2 V/m; Power Drift = -0.190 dB

Peak SAR (extrapolated) = 6.83 W/kg

SAR(1 g) = 3.83 mW/g; SAR(10 g) = 2.02 mW/g

Maximum value of SAR (measured) = 4.27 mW/g

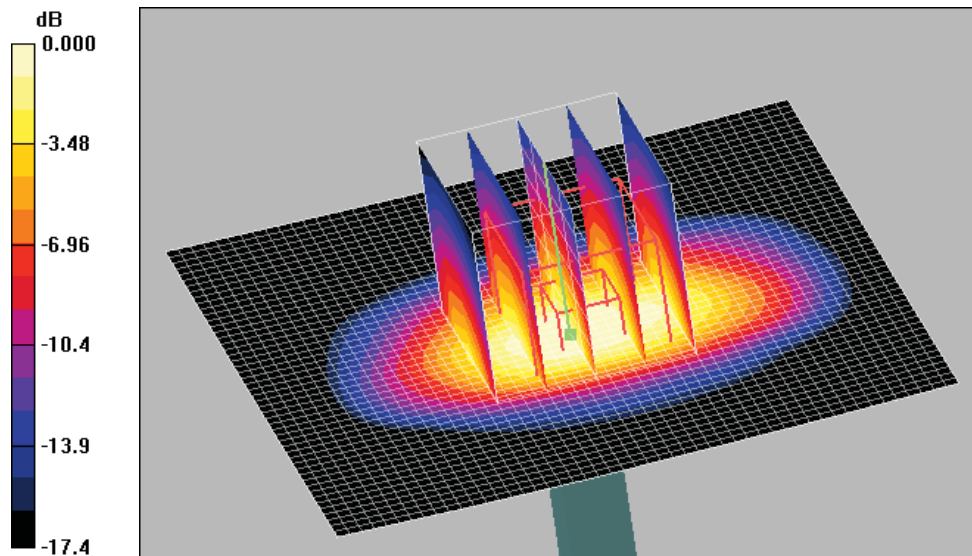

0 dB = 4.27mW/g

DUT: Dipole 2450 MHz; Serial: D2450V2 - SN:708

Program Name: 2450MHz Dipole Validation 2011.12.01

Procedure Name: 2450MHz @ 100mW

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.4;Test Date-01/Dec/2011

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

2450MHz @ 100mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 7.38 mW/g


2450MHz @ 100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.2 V/m; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 5.69 mW/g; SAR(10 g) = 2.6 mW/g

Maximum value of SAR (measured) = 6.44 mW/g

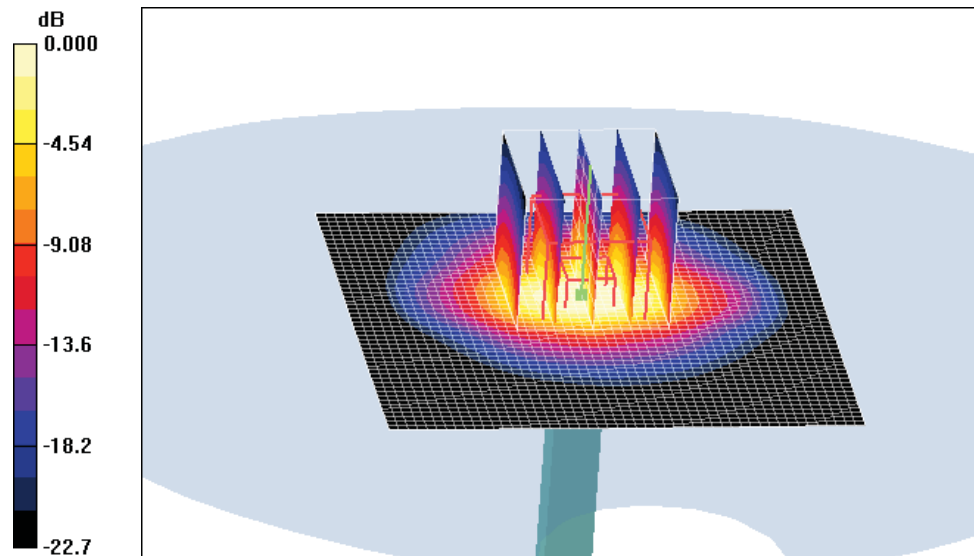

0 dB = 6.44mW/g

DUT: Dipole 2450 MHz; Serial: D2450V2 - SN:708

Program Name: 2450MHz Dipole Validation 2011.12.01

Procedure Name: 2450MHz @ 100mW

Meas. Ambient Temp(celsius)-22.2,Tissue Temp(celsius)-21.7;Test Date-01/Dec/2011

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.43, 7.43, 7.43); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn724; Calibrated: 2011-03-17

- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

2450MHz @ 100mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 6.03 mW/g


2450MHz @ 100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.3 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 9.79 W/kg

SAR(1 g) = 4.92 mW/g; SAR(10 g) = 2.31 mW/g

Maximum value of SAR (measured) = 5.48 mW/g

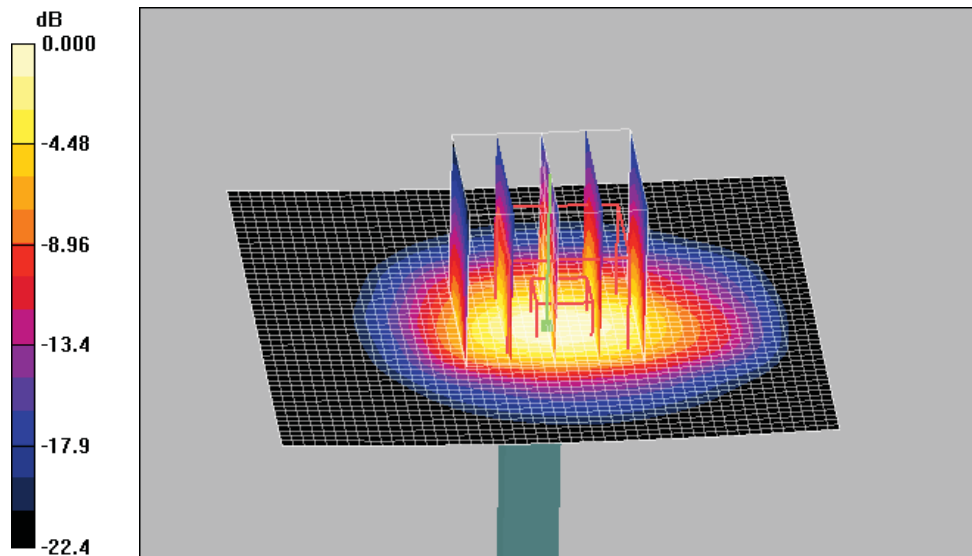

0 dB = 5.48mW/g

APPENDIX E

Plots of The SAR Measurements

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GSM850 Right (Job No. : FI-280)

Procedure Name: Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.6;Test Date-29/Nov/2011

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.514 mW/g

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.3 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.609 W/kg

SAR(1 g) = 0.471 mW/g; SAR(10 g) = 0.348 mW/g

Maximum value of SAR (measured) = 0.496 mW/g

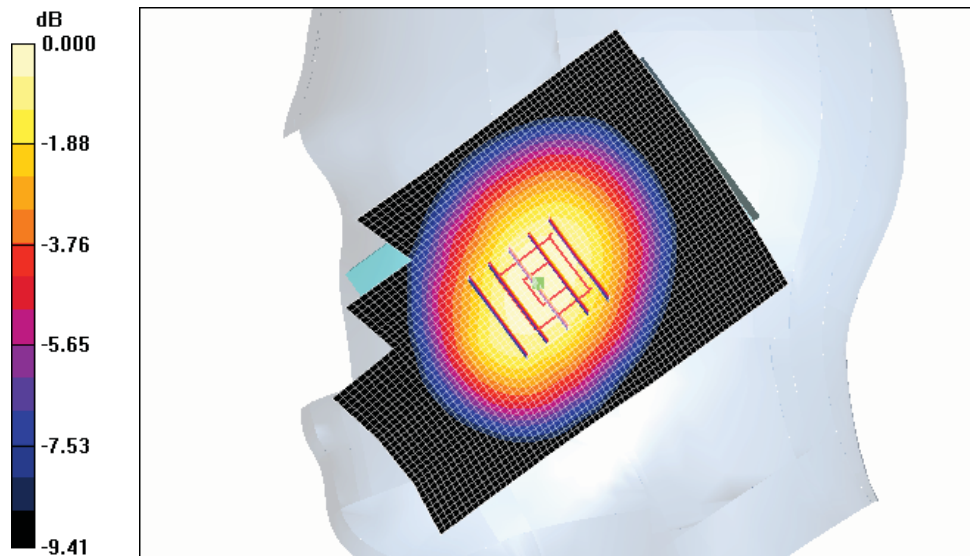

0 dB = 0.496mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GSM850 Right (Job No. : FI-280)

Procedure Name: Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.6;Test Date-29/Nov/2011

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:
dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.234 mW/g


Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement
grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.88 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.170 mW/g

Maximum value of SAR (measured) = 0.236 mW/g

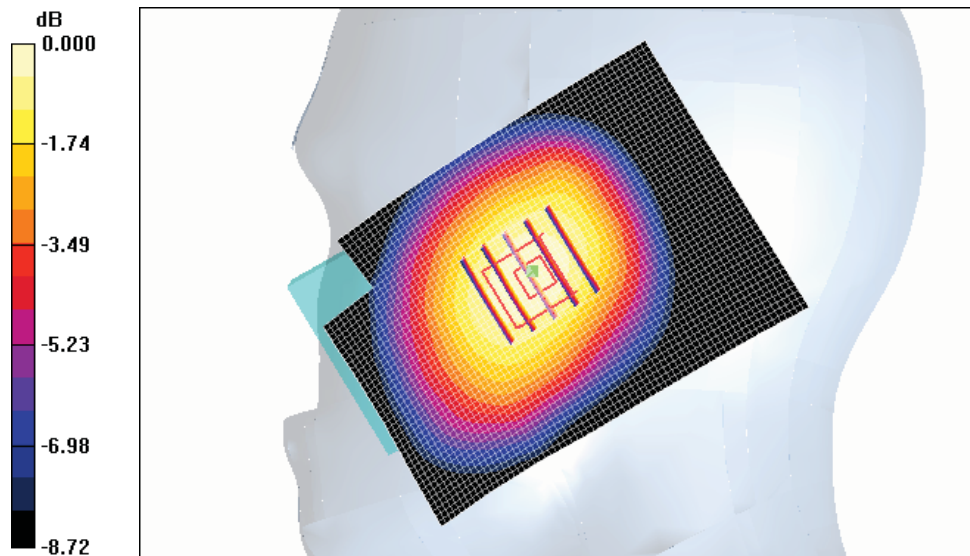

0 dB = 0.236mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GSM850 Left (Job No. : FI-280)

Procedure Name: Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.6;Test Date-29/Nov/2011

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.488 mW/g

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.5 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.445 mW/g; SAR(10 g) = 0.329 mW/g

Maximum value of SAR (measured) = 0.472 mW/g

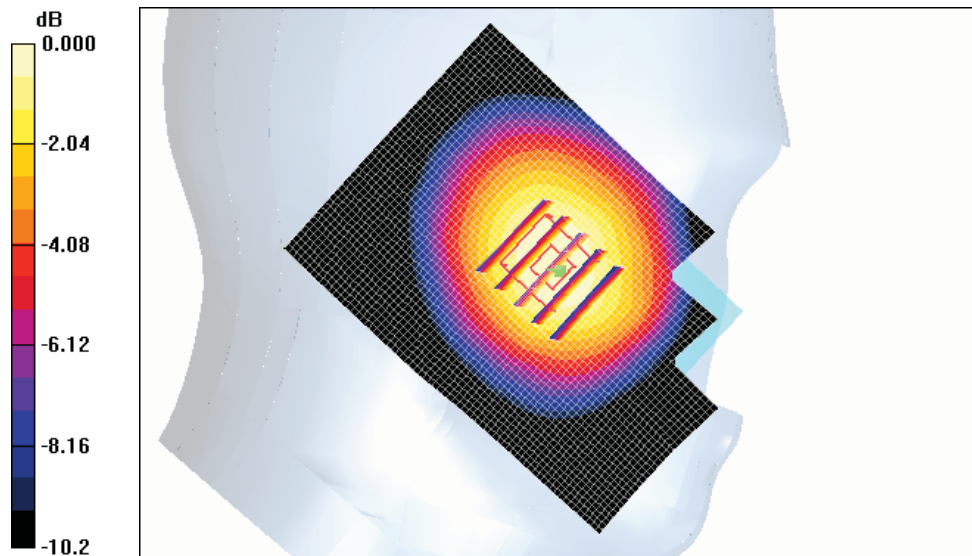

0 dB = 0.472mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GSM850 Left (Job No. : FI-280)

Procedure Name: Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.6;Test Date-29/Nov/2011

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:
dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.248 mW/g


Ear/Tilt, Ch.190, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.9 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.236 mW/g; SAR(10 g) = 0.177 mW/g

Maximum value of SAR (measured) = 0.249 mW/g

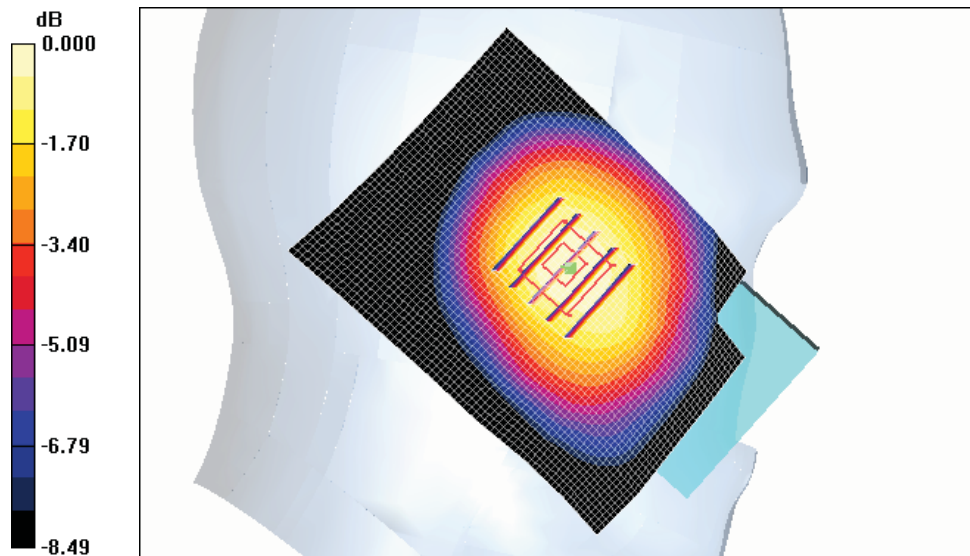

0 dB = 0.249mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GSM850 Right (Job No. : FI-280)

Procedure Name: Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.6;Test Date-29/Nov/2011

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.52, 9.52, 9.52); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn724; Calibrated: 2011-03-17

- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.514 mW/g

Cheek/Touch, Ch.190, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.3 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.609 W/kg

SAR(1 g) = 0.471 mW/g; SAR(10 g) = 0.348 mW/g

Maximum value of SAR (measured) = 0.496 mW/g

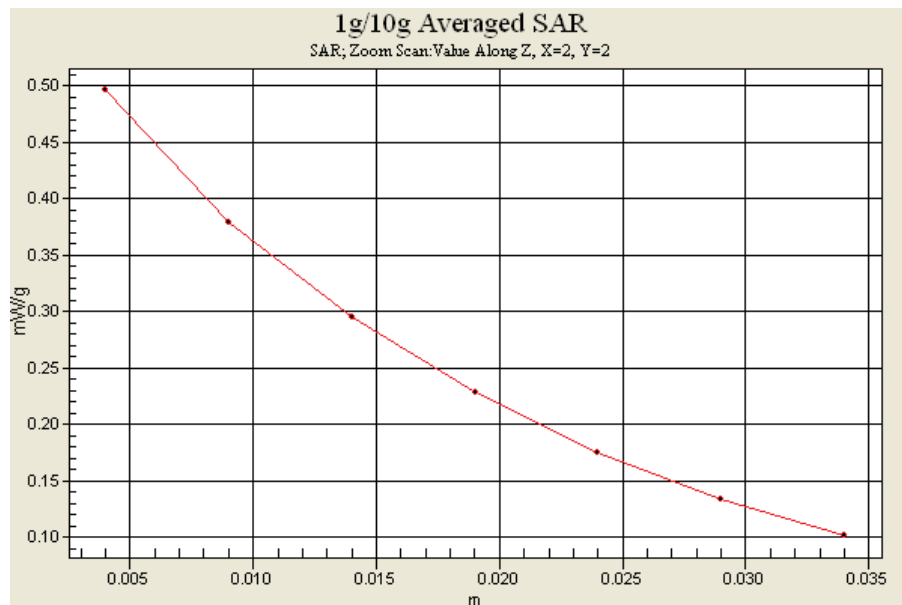

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS850 Body (Job No. : FI-280)

Procedure Name: Body, Ch. 190, Ant. Intenna, Bat. Standard Back_2Tx

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.5;Test Date-29/Nov/2011

Communication System: GPRS 850; Frequency: 836.6 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn724; Calibrated: 2011-03-17

- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch. 190, Ant. Intenna, Bat. Standard Back_2Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.15 mW/g

Body, Ch. 190, Ant. Intenna, Bat. Standard Back_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.730 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

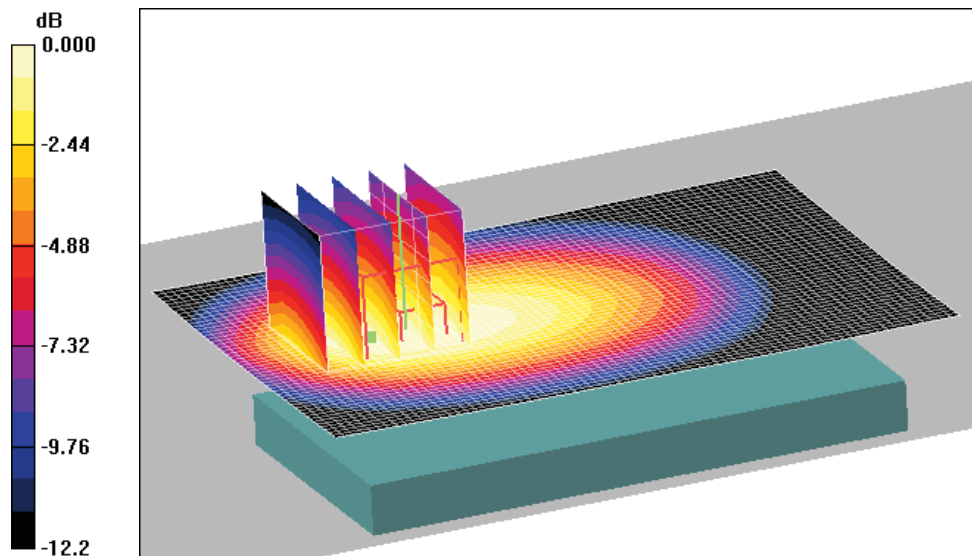

0 dB = 1.09mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS850 Body (Job No. : FI-280)

Procedure Name: Body, Ch. 190, Ant. Intenna, Bat. Standard Back_3Tx

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.5;Test Date-29/Nov/2011

Communication System: GPRS 850; Frequency: 836.6 MHz;Duty Cycle: 1:2.767

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch. 190, Ant. Intenna, Bat. Standard Back_3Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.07 mW/g

Body, Ch. 190, Ant. Intenna, Bat. Standard Back_3Tx/Zoom Scan 2 (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.8 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.952 mW/g; SAR(10 g) = 0.679 mW/g

Maximum value of SAR (measured) = 1.00 mW/g

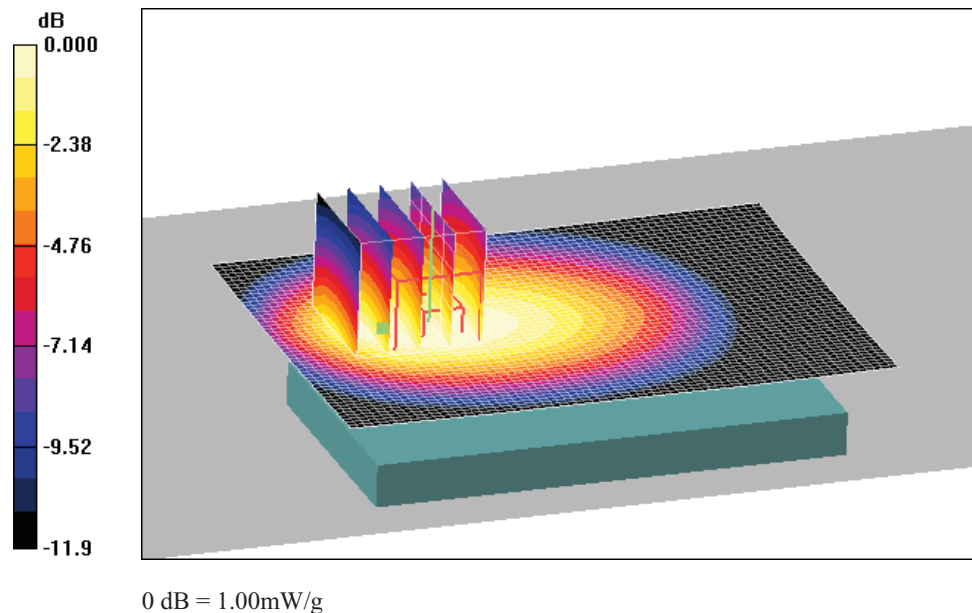

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS850 Body (Job No. : FI-280)

Procedure Name: Body, Ch. 190, Ant. Intenna, Bat. Standard Back_4Tx

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.5;Test Date-29/Nov/2011

Communication System: GPRS 850; Frequency: 836.6 MHz;Duty Cycle: 1:2.075

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn724; Calibrated: 2011-03-17

- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch. 190, Ant. Intenna, Bat. Standard Back_4Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.876 mW/g

Body, Ch. 190, Ant. Intenna, Bat. Standard Back_4Tx/Zoom Scan 2 (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.3 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.777 mW/g; SAR(10 g) = 0.557 mW/g

Maximum value of SAR (measured) = 0.822 mW/g

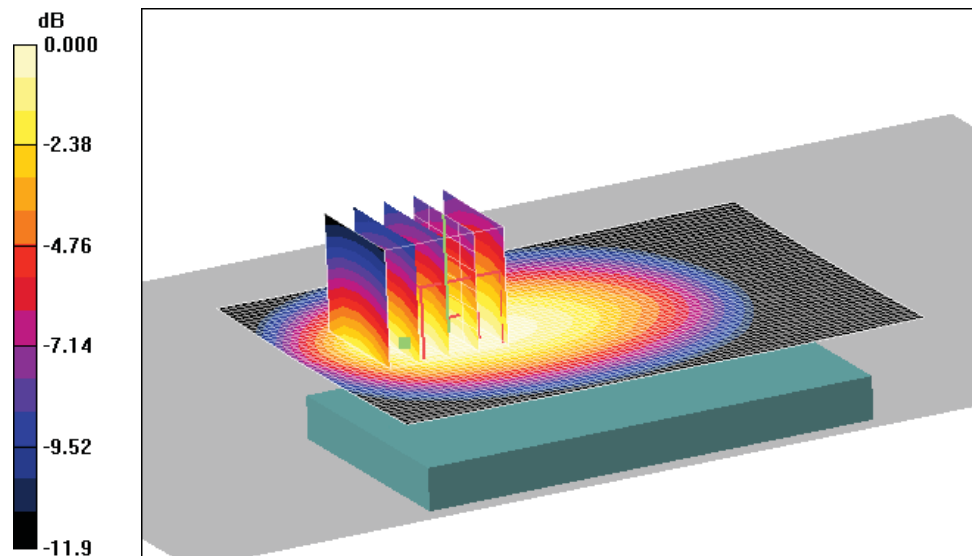

0 dB = 0.822mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS850 Body (Job No. : FI-280)

Procedure Name: Body, Ch. 128, Ant. Intenna, Bat. Standard Back_2Tx

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.5;Test Date-29/Nov/2011

Communication System: GPRS 850; Frequency: 824.2 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn724; Calibrated: 2011-03-17

- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch. 128, Ant. Intenna, Bat. Standard Back_2Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.576 mW/g

Body, Ch. 128, Ant. Intenna, Bat. Standard Back_2Tx/Zoom Scan 2 (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.2 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.679 W/kg

SAR(1 g) = 0.510 mW/g; SAR(10 g) = 0.365 mW/g

Maximum value of SAR (measured) = 0.542 mW/g

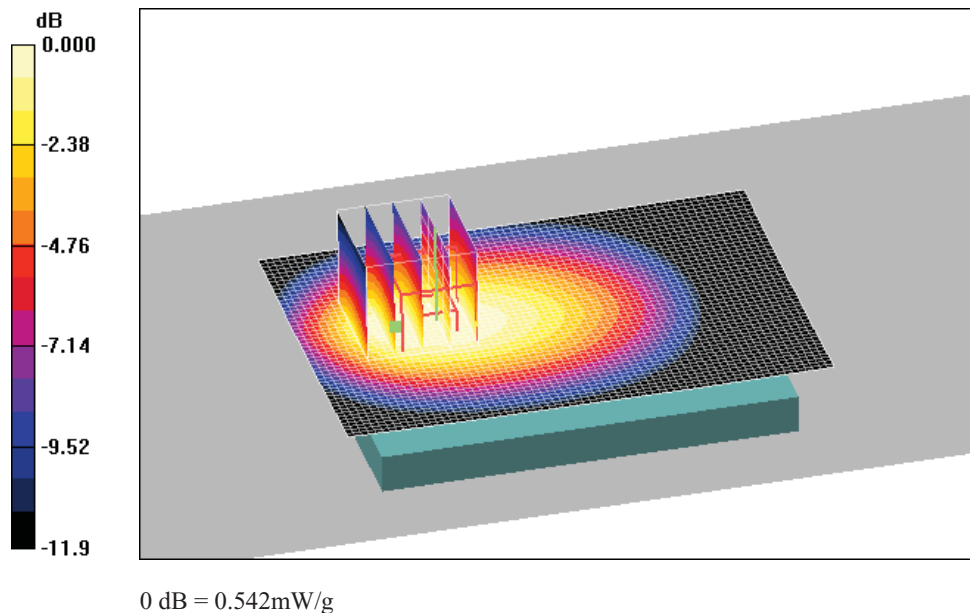

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS850 Body (Job No. : FI-280)

Procedure Name: Body, Ch. 251, Ant. Intenna, Bat. Standard Back_2Tx

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.5;Test Date-29/Nov/2011

Communication System: GPRS 850; Frequency: 848.8 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn724; Calibrated: 2011-03-17

- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch. 251, Ant. Intenna, Bat. Standard Back_2Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.05 mW/g

Body, Ch. 251, Ant. Intenna, Bat. Standard Back_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.5 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.934 mW/g; SAR(10 g) = 0.663 mW/g

Maximum value of SAR (measured) = 0.988 mW/g

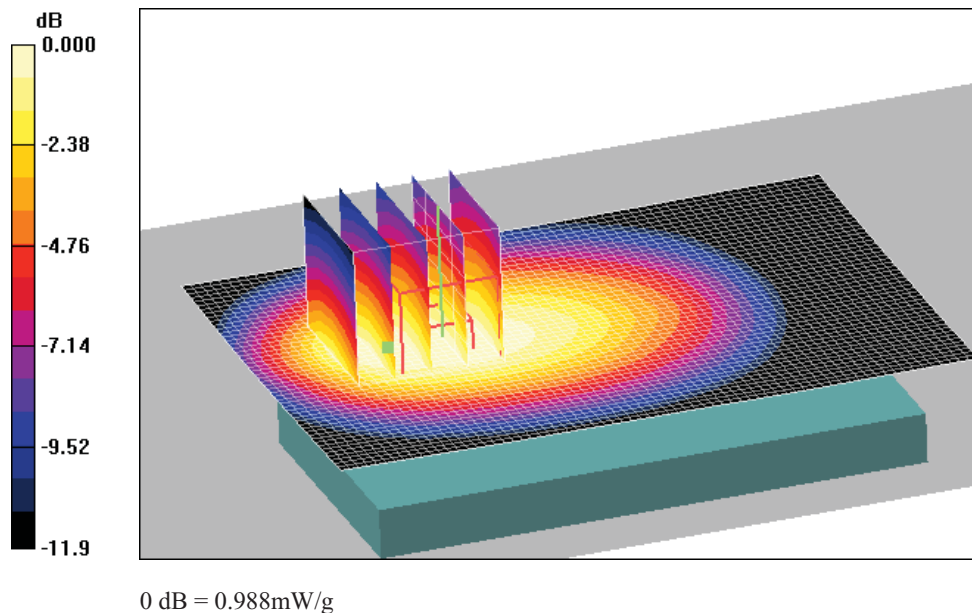

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS850 Body (Job No. : FI-280)

Procedure Name: Body, Ch. 190, Ant. Intenna, Bat. Standard Front_2Tx

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.5;Test Date-29/Nov/2011

Communication System: GPRS 850; Frequency: 836.6 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn724; Calibrated: 2011-03-17

- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch. 190, Ant. Intenna, Bat. Standard Front_2Tx/Area Scan (51x71x1):

Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.625 mW/g

Body, Ch. 190, Ant. Intenna, Bat. Standard Front_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.5 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.745 W/kg

SAR(1 g) = 0.584 mW/g; SAR(10 g) = 0.435 mW/g

Maximum value of SAR (measured) = 0.612 mW/g

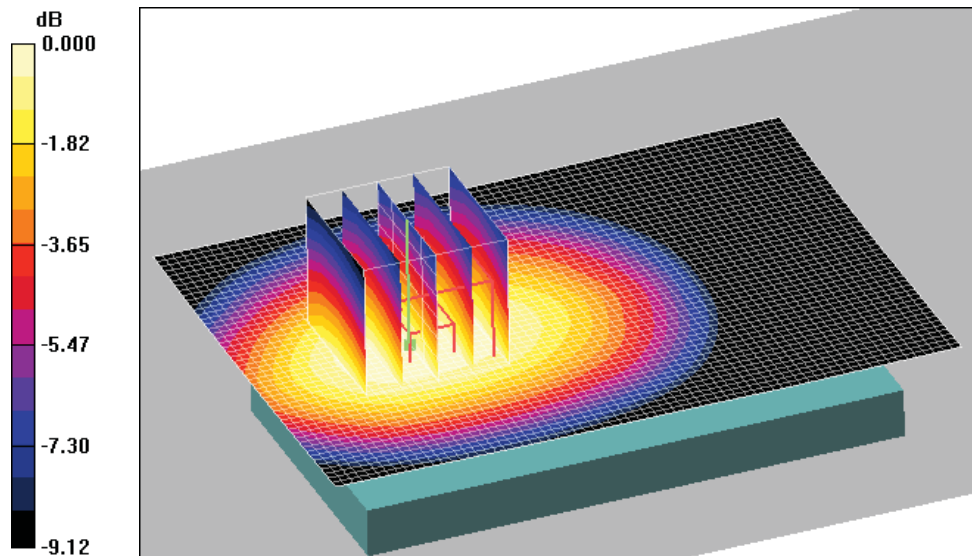

0 dB = 0.612mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS850 Body (Job No. : FI-280)

Procedure Name: Body, Ch. 190, Ant. Intenna, Bat. Standard Left_2Tx

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.5;Test Date-29/Nov/2011

Communication System: GPRS 850; Frequency: 836.6 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn724; Calibrated: 2011-03-17

- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch. 190, Ant. Intenna, Bat. Standard Left_2Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.297 mW/g

Body, Ch. 190, Ant. Intenna, Bat. Standard Left_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.4 V/m; Power Drift = -0.163 dB

Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.194 mW/g

Maximum value of SAR (measured) = 0.290 mW/g

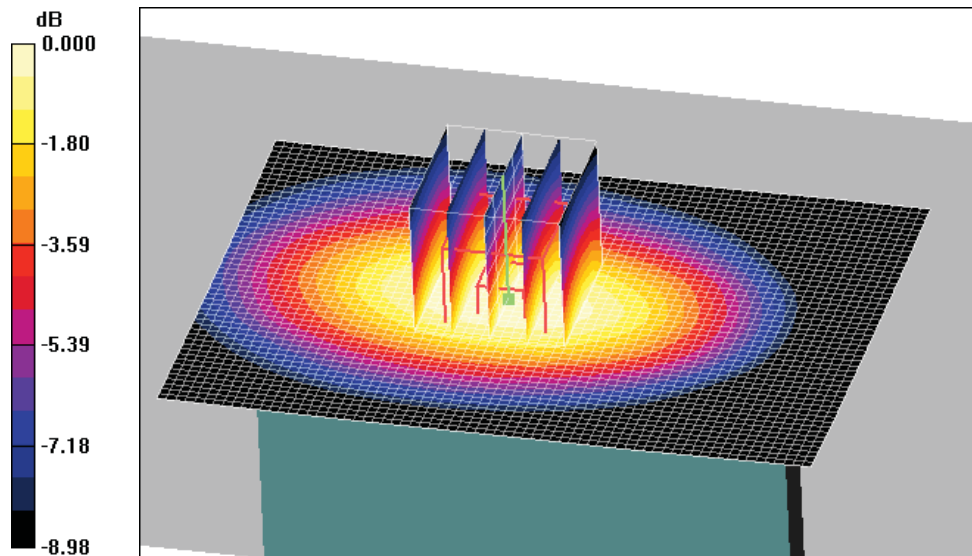

0 dB = 0.290mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS850 Body (Job No. : FI-280)

Procedure Name: Body, Ch. 190, Ant. Intenna, Bat. Standard Right_2Tx

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.5;Test Date-29/Nov/2011

Communication System: GPRS 850; Frequency: 836.6 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch. 190, Ant. Intenna, Bat. Standard Right_2Tx/Area Scan (51x71x1):

Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.437 mW/g

Body, Ch. 190, Ant. Intenna, Bat. Standard Right_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.9 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.559 W/kg

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.287 mW/g

Maximum value of SAR (measured) = 0.434 mW/g

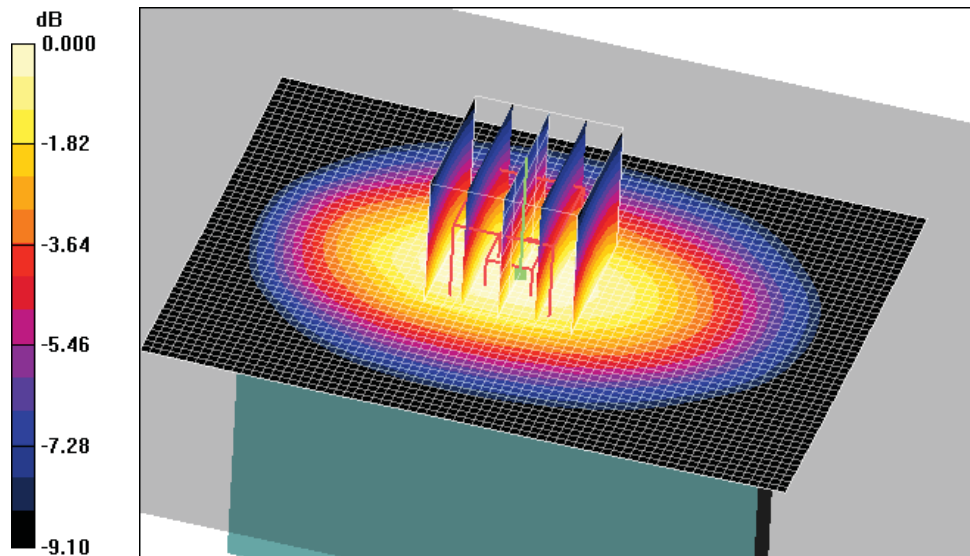

0 dB = 0.434mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS850 Body (Job No. : FI-280)

Procedure Name: Body, Ch. 190, Ant. Intenna, Bat. Standard Bottom_2Tx

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.5;Test Date-29/Nov/2011

Communication System: GPRS 850; Frequency: 836.6 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch. 190, Ant. Intenna, Bat. Standard Bottom_2Tx/Area Scan (51x71x1):

Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.110 mW/g

Body, Ch. 190, Ant. Intenna, Bat. Standard Bottom_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.95 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.059 mW/g

Maximum value of SAR (measured) = 0.111 mW/g

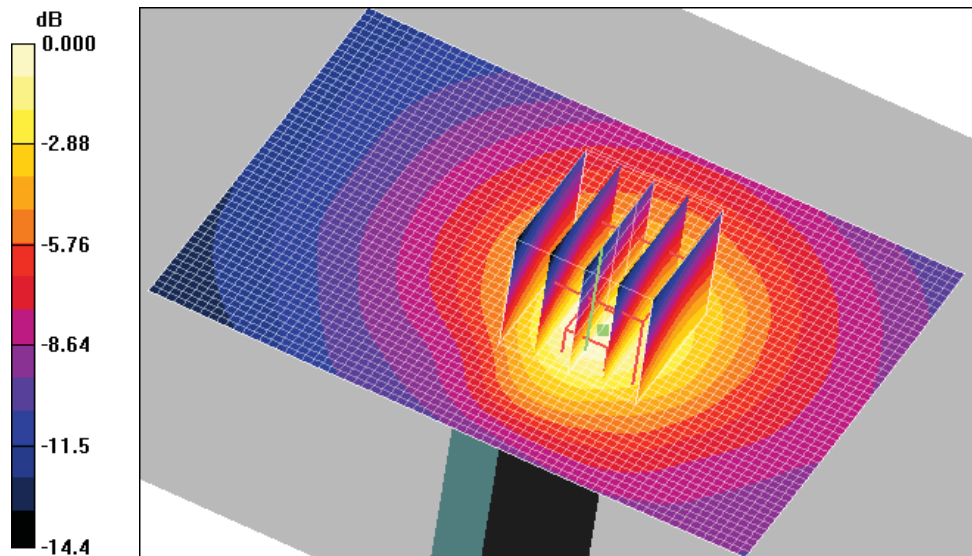

0 dB = 0.111mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS850 Body (Job No. : FI-280)

Procedure Name: Body, Ch. 128, Ant. Intenna, Bat. Standard Back_3Tx

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.5;Test Date-29/Nov/2011

Communication System: GPRS 850; Frequency: 824.2 MHz;Duty Cycle: 1:2.767

Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch. 128, Ant. Intenna, Bat. Standard Back_3Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.05 mW/g

Body, Ch. 128, Ant. Intenna, Bat. Standard Back_3Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.0 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.956 mW/g; SAR(10 g) = 0.702 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

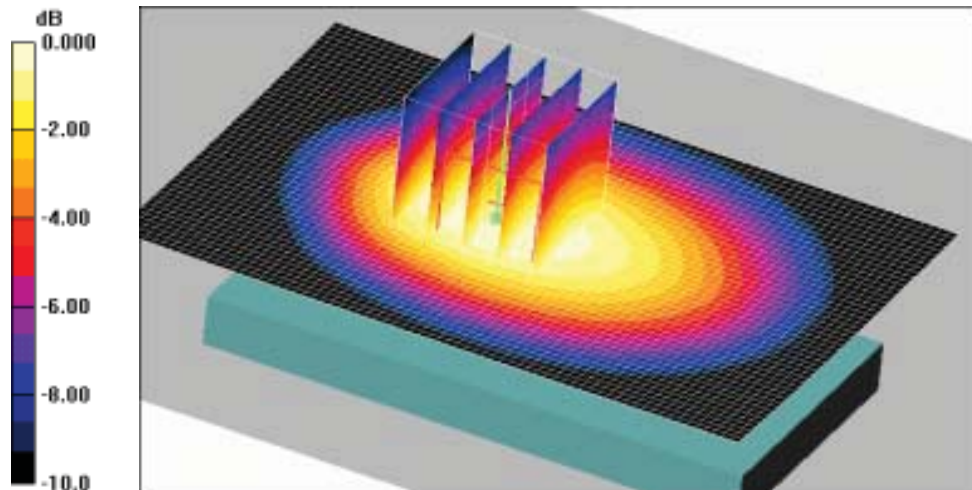

0 dB = 1.01mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS850 Body (Job No. : FI-280)

Procedure Name: Body, Ch. 251, Ant. Intenna, Bat. Standard Back_3Tx

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.5;Test Date-29/Nov/2011

Communication System: GPRS 850; Frequency: 848.8 MHz;Duty Cycle: 1:2.767

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch. 251, Ant. Intenna, Bat. Standard Back_3Tx/Area Scan (51x71x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 1.13 mW/g

Body, Ch. 251, Ant. Intenna, Bat. Standard Back_3Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 33.3 V/m; Power Drift = -0.045 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.745 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

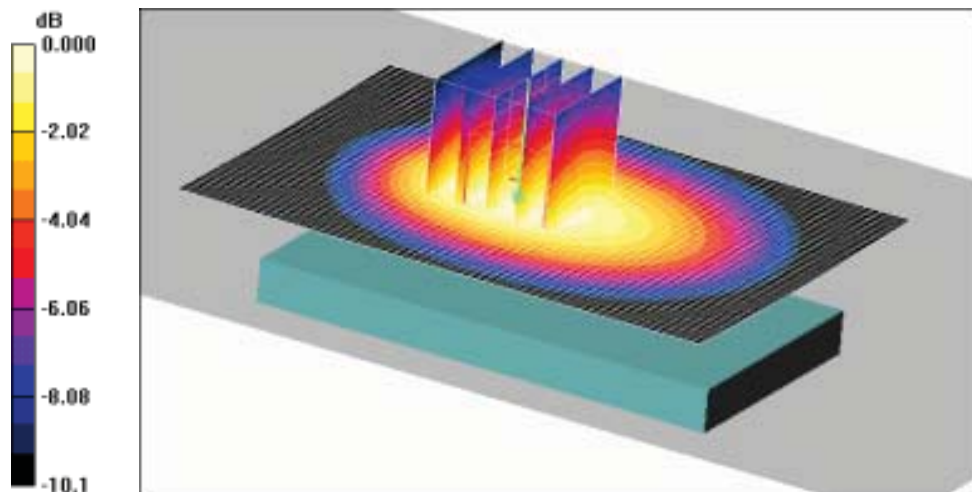

0 dB = 1.09mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS850 Body (Job No. : FI-280)

Procedure Name: Body, Ch. 190, Ant. Intenna, Bat. Standard Back_2Tx

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.5;Test Date-29/Nov/2011

Communication System: GPRS 850; Frequency: 836.6 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(9.49, 9.49, 9.49); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn724; Calibrated: 2011-03-17

- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch. 190, Ant. Intenna, Bat. Standard Back_2Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.15 mW/g

Body, Ch. 190, Ant. Intenna, Bat. Standard Back_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.730 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

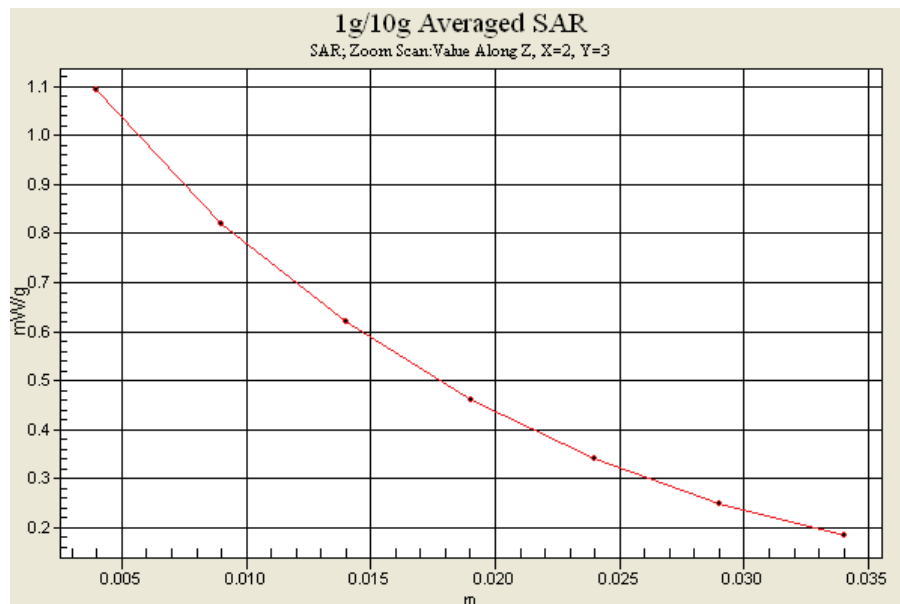

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GSM1900 Right (Job No. : FI-280)

Procedure Name: Cheek, Ch.661, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.6;Test Date-28/Nov/2011

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek, Ch.661, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.678 mW/g

Cheek, Ch.661, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.0 V/m; Power Drift = -0.112 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.585 mW/g; SAR(10 g) = 0.322 mW/g

Maximum value of SAR (measured) = 0.615 mW/g

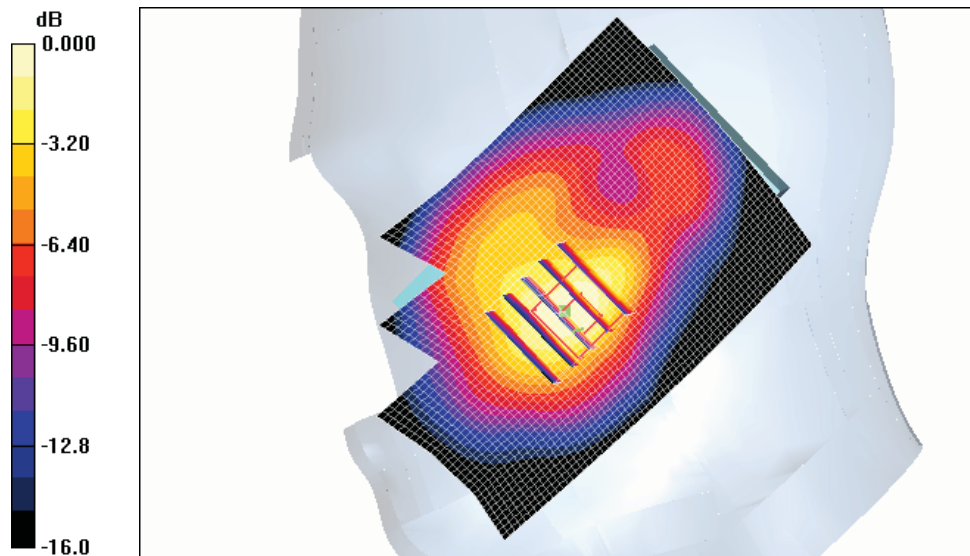

0 dB = 0.615mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GSM1900 Right (Job No. : FI-280)

Procedure Name: Tilt, Ch.661, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.6;Test Date-28/Nov/2011

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt, Ch.661, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.233 mW/g

Tilt, Ch.661, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = 0.093 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.119 mW/g

Maximum value of SAR (measured) = 0.223 mW/g

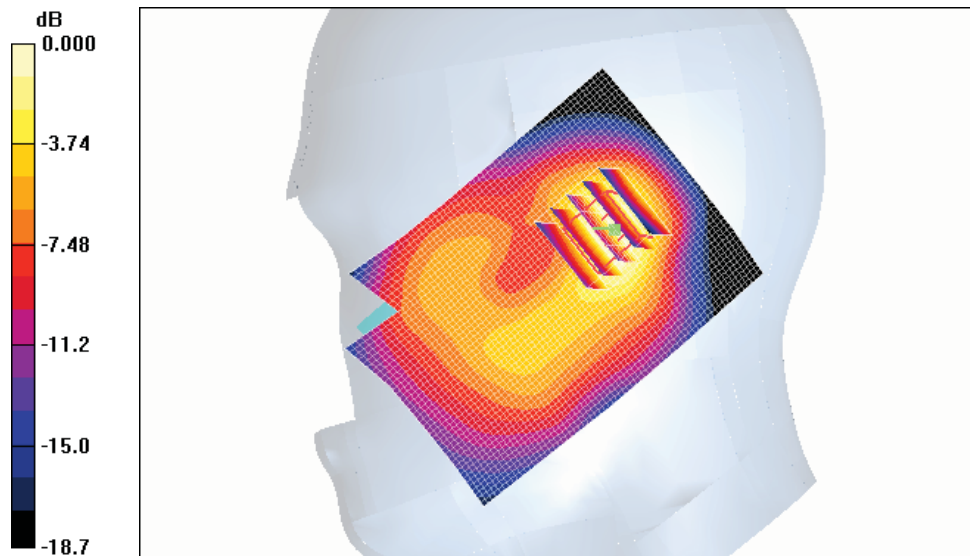

0 dB = 0.223mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GSM1900 Left (Job No. : FI-280)

Procedure Name: Cheek, Ch.661, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.6;Test Date-28/Nov/2011

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek, Ch.661, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.440 mW/g

Cheek, Ch.661, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = 0.104 dB

Peak SAR (extrapolated) = 0.590 W/kg

SAR(1 g) = 0.397 mW/g; SAR(10 g) = 0.241 mW/g

Maximum value of SAR (measured) = 0.434 mW/g

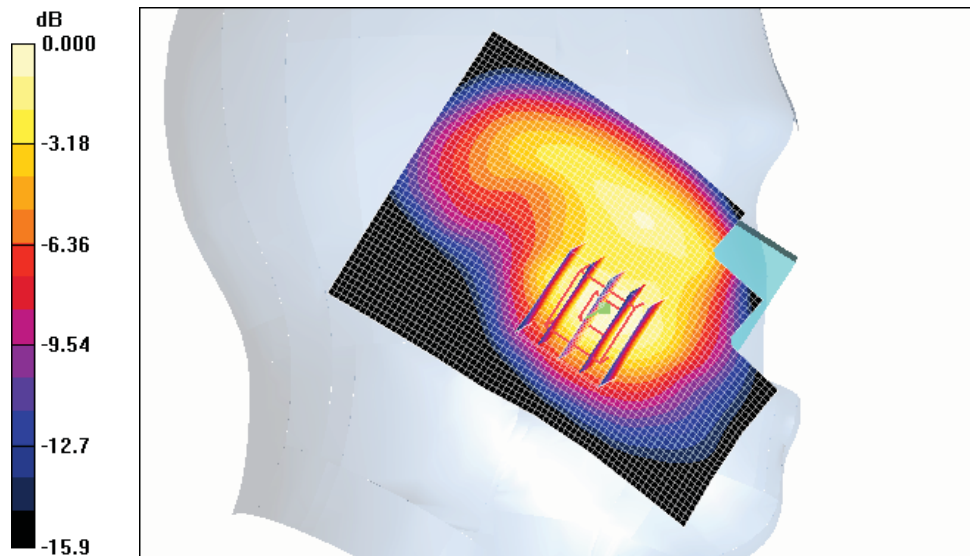

0 dB = 0.434mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GSM1900 Left (Job No. : FI-280)

Procedure Name: Tilt, Ch.661, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.6;Test Date-28/Nov/2011

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt, Ch.661, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.207 mW/g

Tilt, Ch.661, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 0.292 W/kg

SAR(1 g) = 0.190 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.200 mW/g

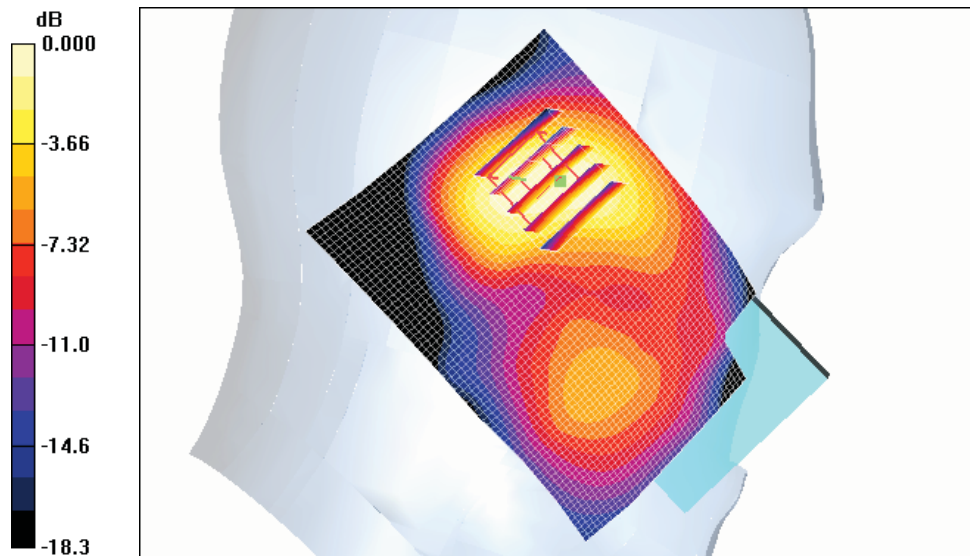

0 dB = 0.200mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GSM1900 Right (Job No. : FI-280)

Procedure Name: Cheek, Ch.661, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-21.8,Tissue Temp(celsius)-21.6;Test Date-28/Nov/2011

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.07, 8.07, 8.07); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: PHANTOM #1; Type: SAM; Serial: TP-1364
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek, Ch.661, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.678 mW/g

Cheek, Ch.661, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.0 V/m; Power Drift = -0.112 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.585 mW/g; SAR(10 g) = 0.322 mW/g

Maximum value of SAR (measured) = 0.615 mW/g

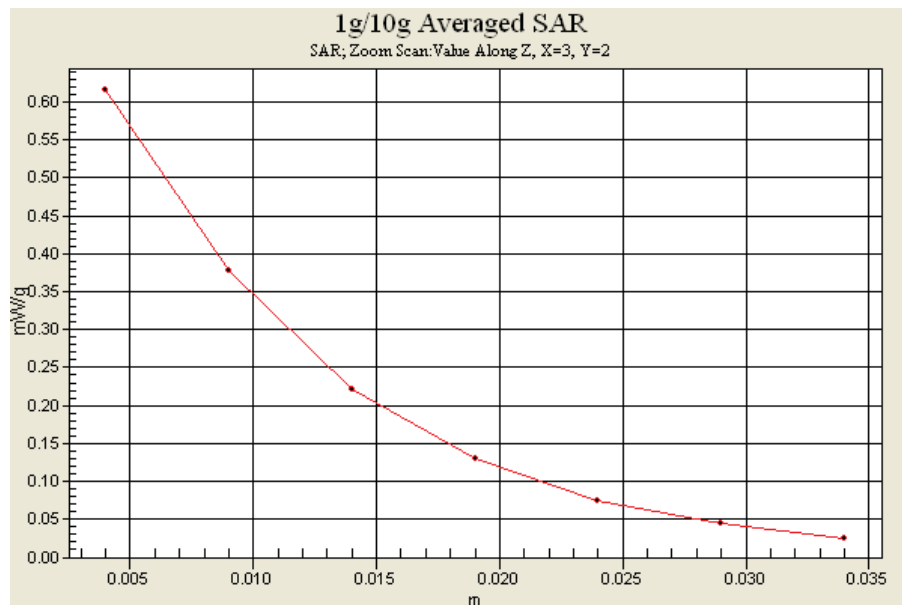

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS1900 Body (Job No. : FI-280)

Procedure Name: Body, Ch.661, Ant.Intenna, Bat.Standard Back_2Tx

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.6;Test Date-28/Nov/2011

Communication System: Body GPRS ; Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.661, Ant.Intenna, Bat.Standard Back_2Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.760 mW/g

Body, Ch.661, Ant.Intenna, Bat.Standard Back_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = 0.091 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.675 mW/g; SAR(10 g) = 0.376 mW/g

Maximum value of SAR (measured) = 0.744 mW/g

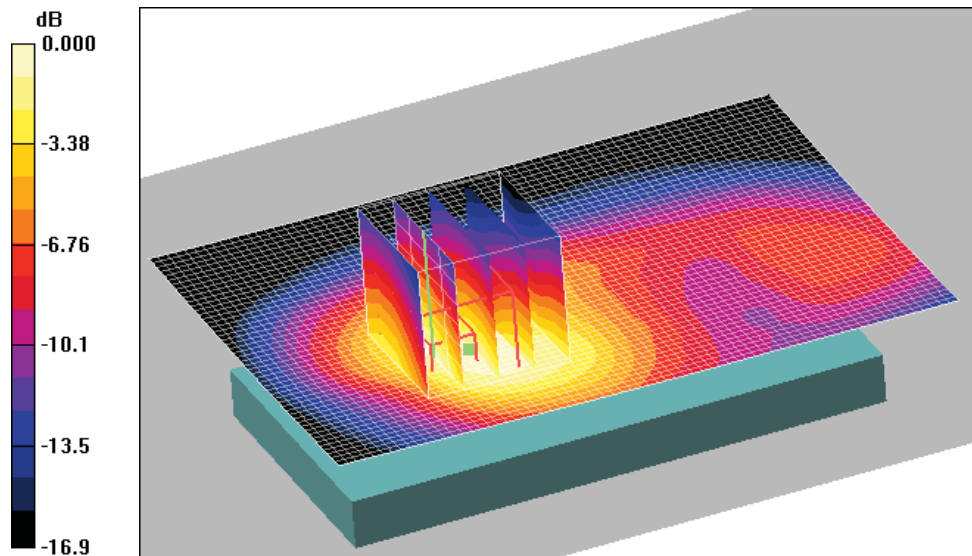

0 dB = 0.744mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS1900 Body (Job No. : FI-280)

Procedure Name: Body, Ch.661, Ant.Intenna, Bat.Standard Back_3Tx

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.6;Test Date-28/Nov/2011

Communication System: Body GPRS ; Frequency: 1880 MHz;Duty Cycle: 1:2.767
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.661, Ant.Intenna, Bat.Standard Back_3Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.725 mW/g

Body, Ch.661, Ant.Intenna, Bat.Standard Back_3Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.9 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.641 mW/g; SAR(10 g) = 0.357 mW/g

Maximum value of SAR (measured) = 0.701 mW/g

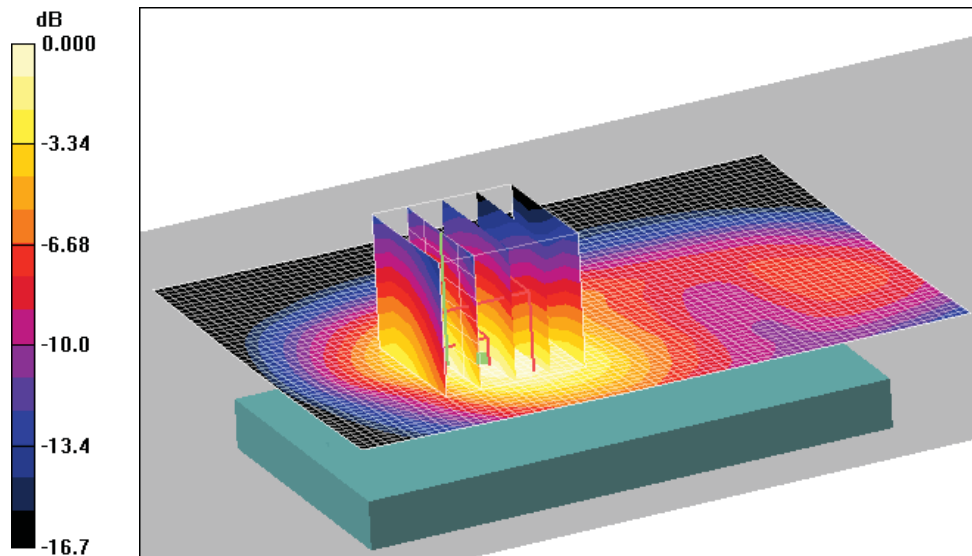

0 dB = 0.701mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS1900 Body (Job No. : FI-280)

Procedure Name: Body, Ch.661, Ant.Intenna, Bat.Standard Back_4Tx

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.6;Test Date-28/Nov/2011

Communication System: Body GPRS ; Frequency: 1880 MHz;Duty Cycle: 1:2.075
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.661, Ant.Intenna, Bat.Standard Back_4Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.612 mW/g

Body, Ch.661, Ant.Intenna, Bat.Standard Back_4Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 0.883 W/kg

SAR(1 g) = 0.537 mW/g; SAR(10 g) = 0.299 mW/g

Maximum value of SAR (measured) = 0.584 mW/g

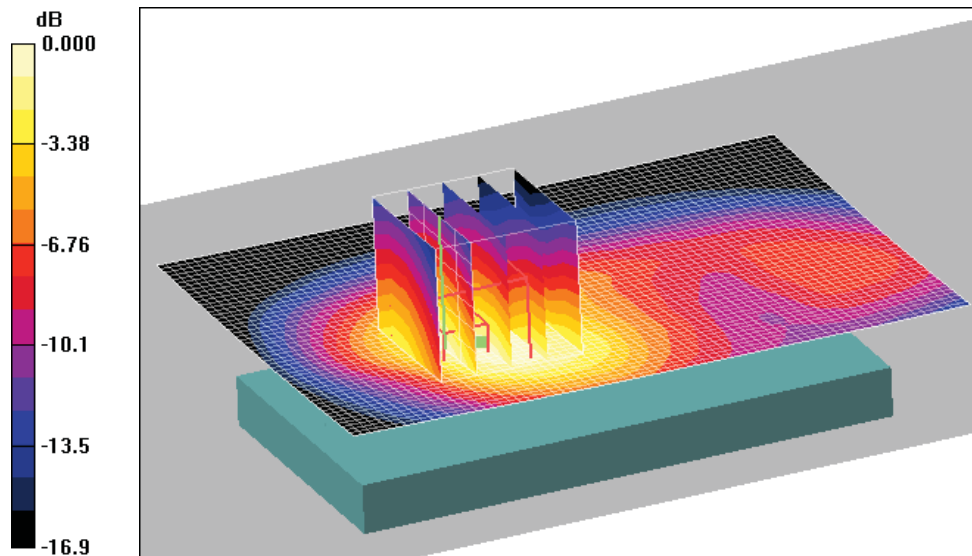

0 dB = 0.584mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS1900 Body (Job No. : FI-280)

Procedure Name: Body, Ch.661, Ant.Intenna, Bat.Standard Front_2Tx

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.6;Test Date-28/Nov/2011

Communication System: Body GPRS ; Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn724; Calibrated: 2011-03-17

- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.661, Ant.Intenna, Bat.Standard Front_2Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.494 mW/g

Body, Ch.661, Ant.Intenna, Bat.Standard Front_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.728 W/kg

SAR(1 g) = 0.459 mW/g; SAR(10 g) = 0.278 mW/g

Maximum value of SAR (measured) = 0.492 mW/g

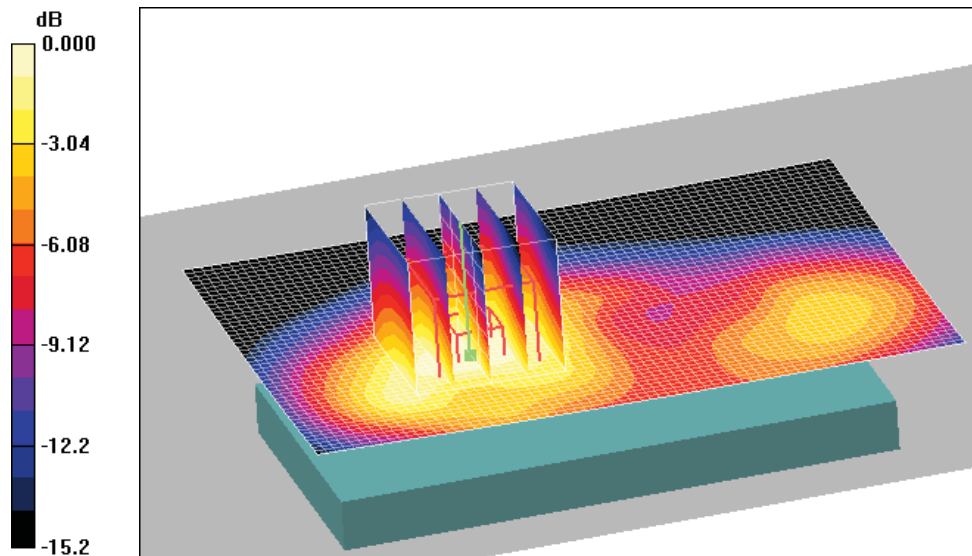

0 dB = 0.492mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS1900 Body (Job No. : FI-280)

Procedure Name: Body, Ch.661, Ant.Intenna, Bat.Standard Left_2Tx

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.6;Test Date-28/Nov/2011

Communication System: Body GPRS ; Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn724; Calibrated: 2011-03-17

- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.661, Ant.Intenna, Bat.Standard Left_2Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.067 mW/g

Body, Ch.661, Ant.Intenna, Bat.Standard Left_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.11 V/m; Power Drift = 0.114 dB

Peak SAR (extrapolated) = 0.086 W/kg

SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.063 mW/g

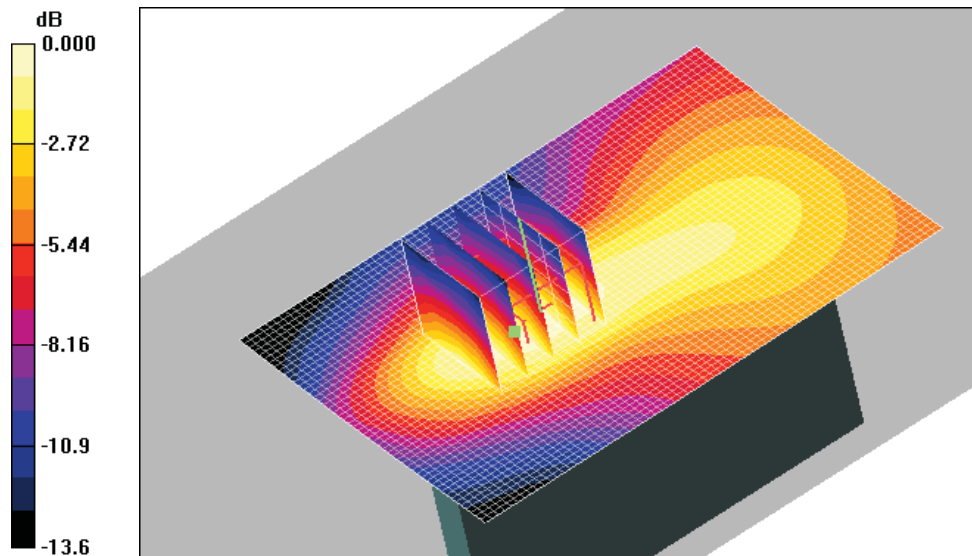

0 dB = 0.063mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS1900 Body (Job No. : FI-280)

Procedure Name: Body, Ch.661, Ant.Intenna, Bat.Standard Right_2Tx

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.6;Test Date-28/Nov/2011

Communication System: Body GPRS ; Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.661, Ant.Intenna, Bat.Standard Right_2Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.173 mW/g

Body, Ch.661, Ant.Intenna, Bat.Standard Right_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = 0.087 dB

Peak SAR (extrapolated) = 0.259 W/kg

SAR(1 g) = 0.162 mW/g; SAR(10 g) = 0.096 mW/g

Maximum value of SAR (measured) = 0.179 mW/g

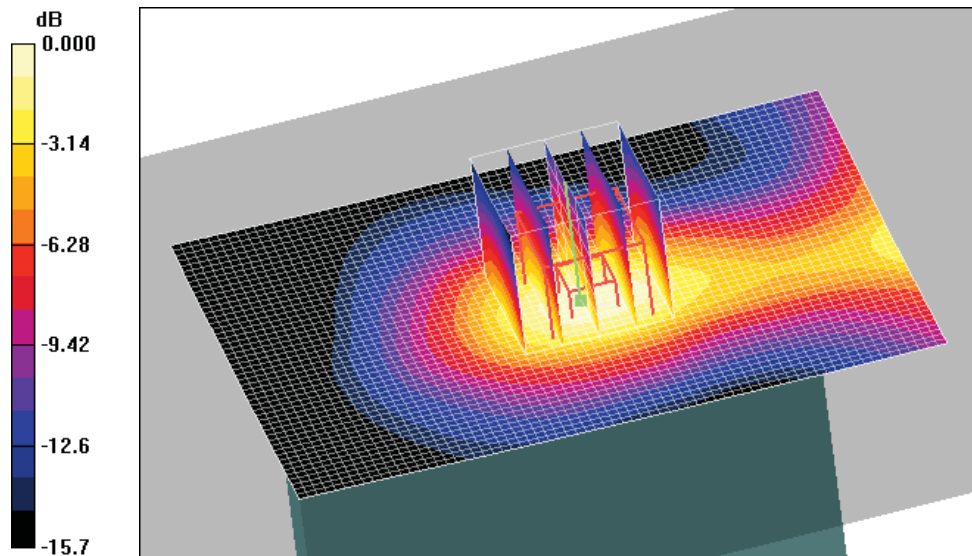

0 dB = 0.179mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS1900 Body (Job No. : FI-280)

Procedure Name: Body, Ch.661, Ant.Intenna, Bat.Standard Bottom_2Tx

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.6;Test Date-28/Nov/2011

Communication System: Body GPRS ; Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.661, Ant.Intenna, Bat.Standard Bottom_2Tx/Area Scan (51x71x1):

Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.612 mW/g

Body, Ch.661, Ant.Intenna, Bat.Standard Bottom_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.584 mW/g; SAR(10 g) = 0.334 mW/g

Maximum value of SAR (measured) = 0.633 mW/g

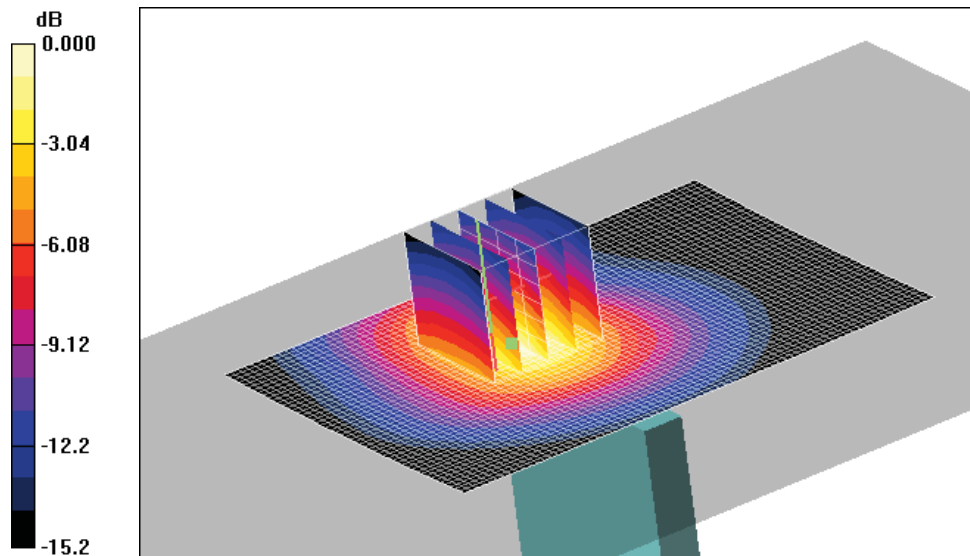

0 dB = 0.633mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 GPRS1900 Body (Job No. : FI-280)

Procedure Name: Body, Ch.661, Ant.Intenna, Bat.Standard Back_2Tx

Meas. Ambient Temp(celsius)-22.0,Tissue Temp(celsius)-21.6;Test Date-28/Nov/2011

Communication System: Body GPRS ; Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(8.33, 8.33, 8.33); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn724; Calibrated: 2011-03-17

- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.661, Ant.Intenna, Bat.Standard Back_2Tx/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.760 mW/g

Body, Ch.661, Ant.Intenna, Bat.Standard Back_2Tx/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = 0.091 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.675 mW/g; SAR(10 g) = 0.376 mW/g

Maximum value of SAR (measured) = 0.744 mW/g

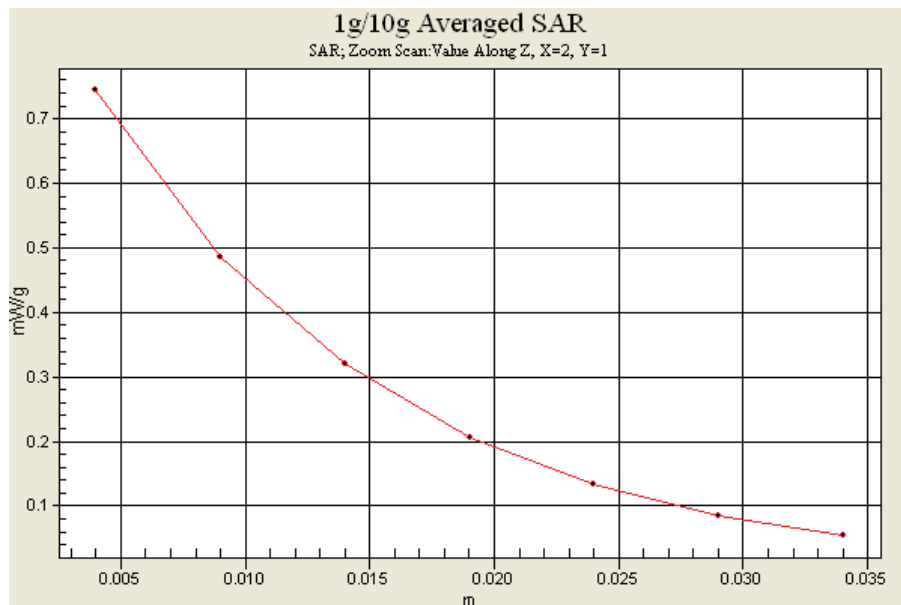

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 WLAN Right(Job No. : FI-280)

Procedure Name: Cheek, Ch.11, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.4;Test Date-01/Dec/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek, Ch.11, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.117 mW/g

Cheek, Ch.11, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.04 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.282 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.049 mW/g

Maximum value of SAR (measured) = 0.133 mW/g

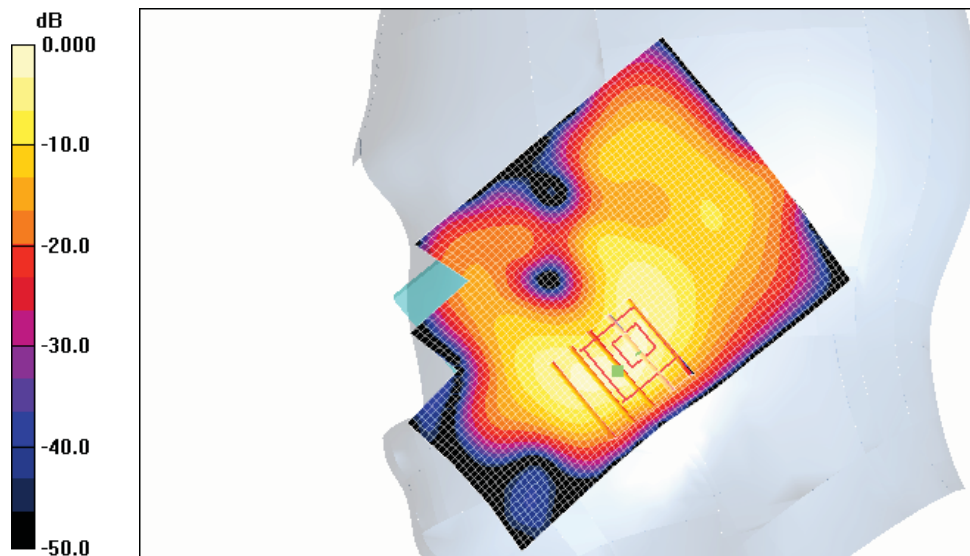

0 dB = 0.133mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 WLAN Right(Job No. : FI-280)

Procedure Name: Tilted, Ch.11, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.4;Test Date-01/Dec/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilted, Ch.11, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.022 mW/g

Tilted, Ch.11, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.76 V/m; Power Drift = 0.101 dB

Peak SAR (extrapolated) = 0.023 W/kg

SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.0065 mW/g

Maximum value of SAR (measured) = 0.016 mW/g

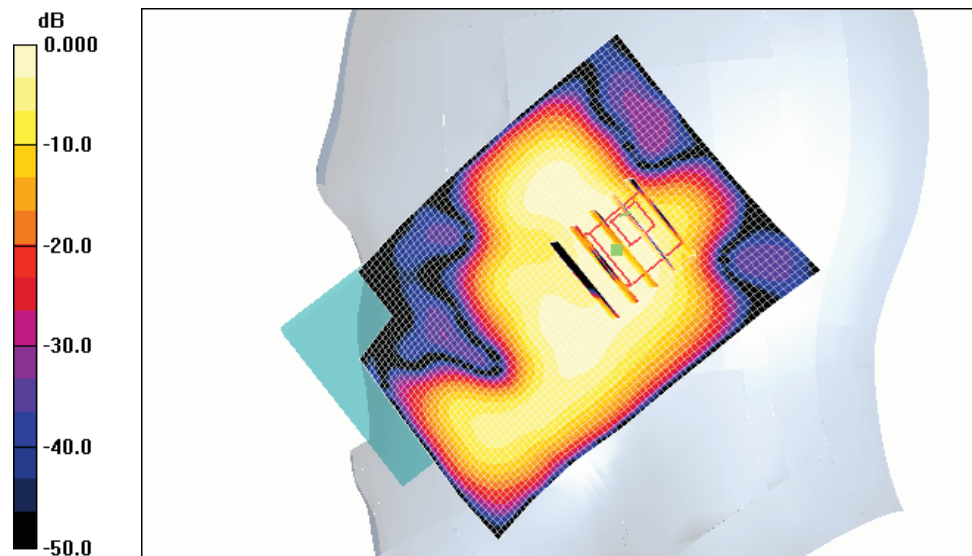

0 dB = 0.016mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 WLAN Left(Job No. : FI-280)

Procedure Name: Cheek, Ch.11, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.4;Test Date-01/Dec/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek, Ch.11, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.083 mW/g

Cheek, Ch.11, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.07 V/m; Power Drift = 0.179 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.073 mW/g; SAR(10 g) = 0.035 mW/g

Maximum value of SAR (measured) = 0.081 mW/g

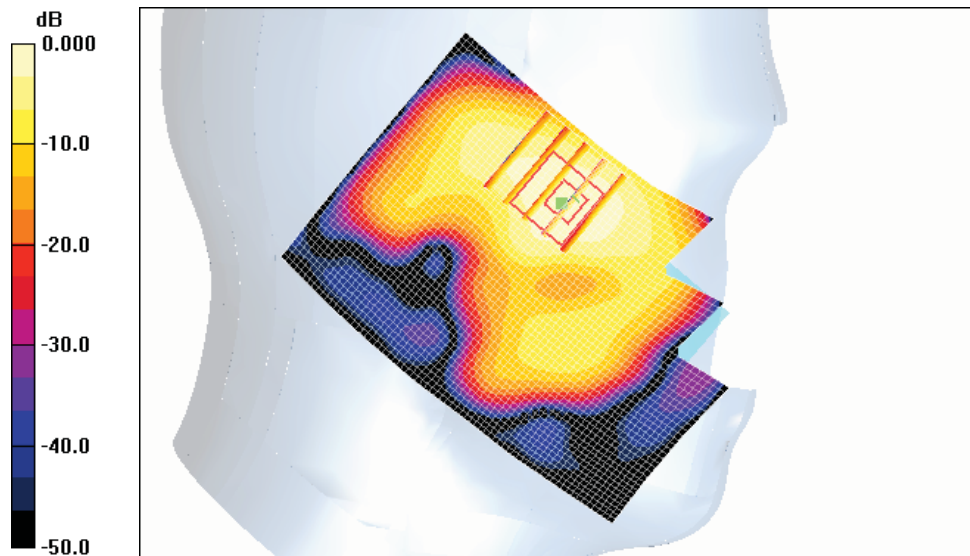

0 dB = 0.081mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 WLAN Left(Job No. : FI-280)

Procedure Name: Tilted, Ch.11, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.4;Test Date-01/Dec/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn724; Calibrated: 2011-03-17
- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilted, Ch.11, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.038 mW/g

Tilted, Ch.11, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.48 V/m; Power Drift = 0.154 dB

Peak SAR (extrapolated) = 0.031 W/kg

SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.010 mW/g

Maximum value of SAR (measured) = 0.024 mW/g

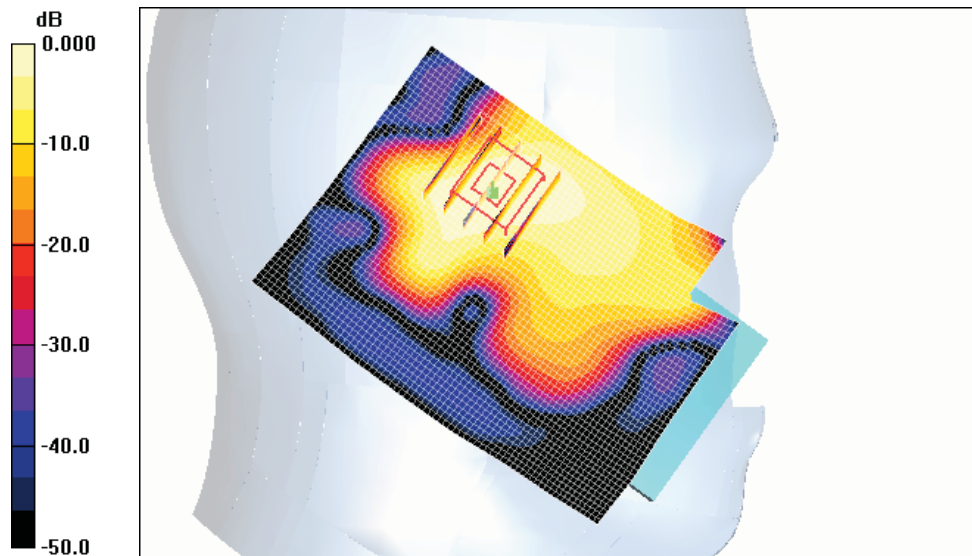

0 dB = 0.024mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 WLAN Right(Job No. : FI-280)

Procedure Name: Cheek, Ch.11, Ant.Intenna, Bat.Standard

Meas. Ambient Temp(celsius)-22.5,Tissue Temp(celsius)-22.4;Test Date-1/Dec/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.25, 7.25, 7.25); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn724; Calibrated: 2011-03-17

- Phantom: PHANTOM #2; Type: SAM; Serial: TP-1604

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek, Ch.11, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.117 mW/g

Cheek, Ch.11, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.04 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.282 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.049 mW/g

Maximum value of SAR (measured) = 0.133 mW/g

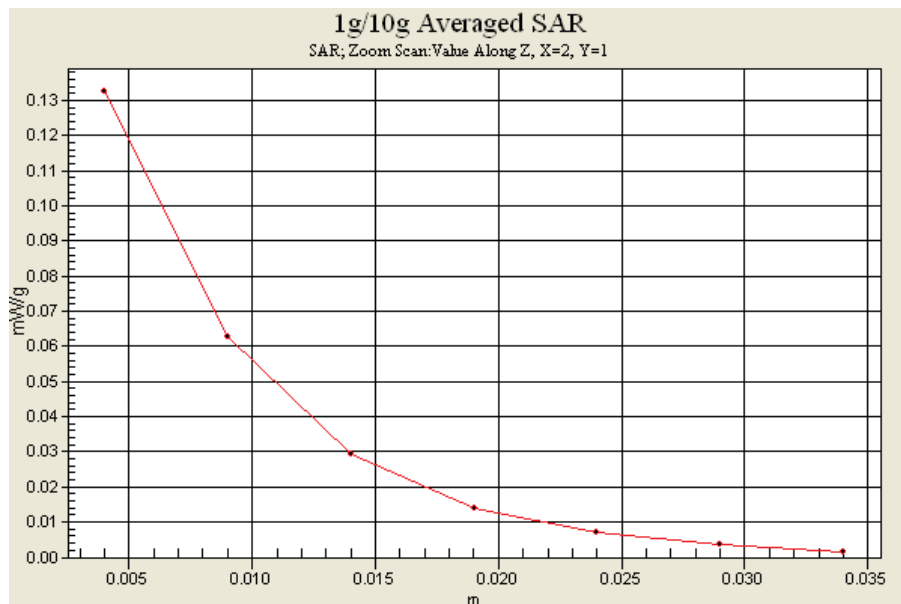

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 WLAN Body (Job No. : FI-280)

Procedure Name: Body, Ch.11, Ant.Intenna, Bat.Standard Back 1Mbps

Meas. Ambient Temp(celsius)-22.2,Tissue Temp(celsius)-21.7;Test Date-01/Dec/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.43, 7.43, 7.43); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn724; Calibrated: 2011-03-17

- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.11, Ant.Intenna, Bat.Standard Back 1Mbps/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.016 mW/g

Body, Ch.11, Ant.Intenna, Bat.Standard Back 1Mbps/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.03 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 0.022 W/kg

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00776 mW/g

Maximum value of SAR (measured) = 0.018 mW/g

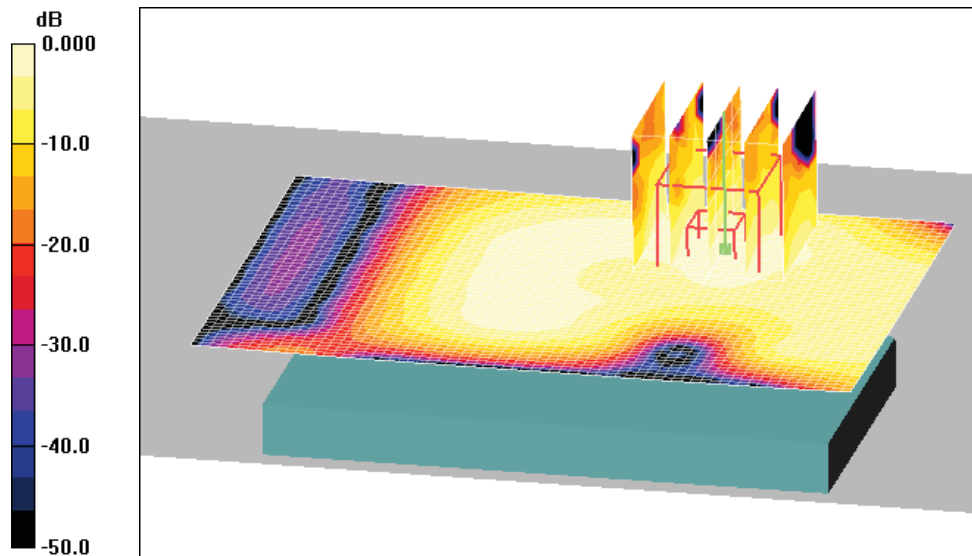

0 dB = 0.018mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 WLAN Body (Job No. : FI-280)

Procedure Name: Body, Ch.11, Ant.Intenna, Bat.Standard Front 1Mbps

Meas. Ambient Temp(celsius)-22.2,Tissue Temp(celsius)-21.7;Test Date-01/Dec/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.43, 7.43, 7.43); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn724; Calibrated: 2011-03-17

- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.11, Ant.Intenna, Bat.Standard Front 1Mbps/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.024 mW/g

Body, Ch.11, Ant.Intenna, Bat.Standard Front 1Mbps/Zoom Scan 2 2 (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.34 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.038 W/kg

SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.010 mW/g

Maximum value of SAR (measured) = 0.022 mW/g

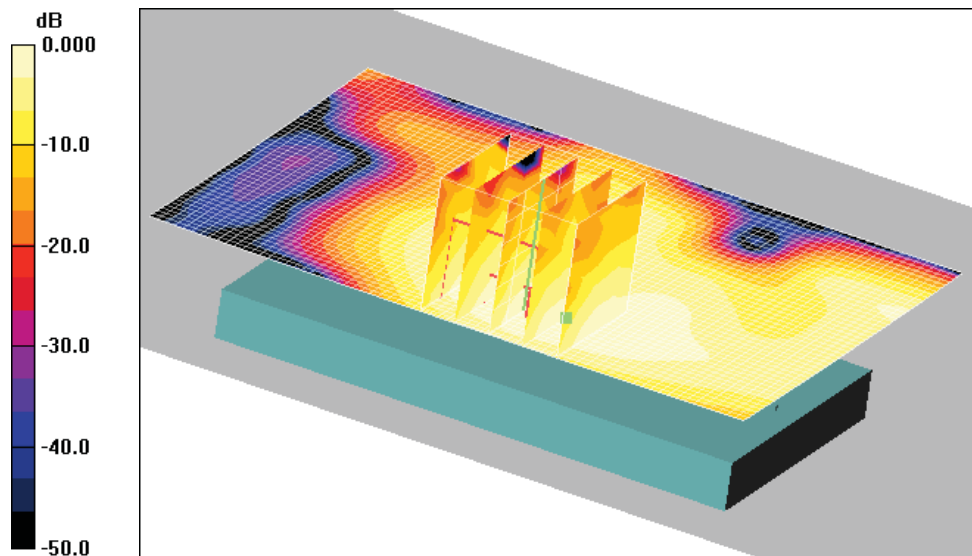

0 dB = 0.022mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 WLAN Body (Job No. : FI-280)

Procedure Name: Body, Ch.11, Ant.Intenna, Bat.Standard Left 1Mbps

Meas. Ambient Temp(celsius)-22.2,Tissue Temp(celsius)-21.7;Test Date-01/Dec/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.43, 7.43, 7.43); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn724; Calibrated: 2011-03-17

- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.11, Ant.Intenna, Bat.Standard Left 1Mbps/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.008 mW/g

Body, Ch.11, Ant.Intenna, Bat.Standard Left 1Mbps/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.36 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.010 W/kg

SAR(1 g) = 0.00681 mW/g; SAR(10 g) = 0.00296 mW/g

Maximum value of SAR (measured) = 0.008 mW/g

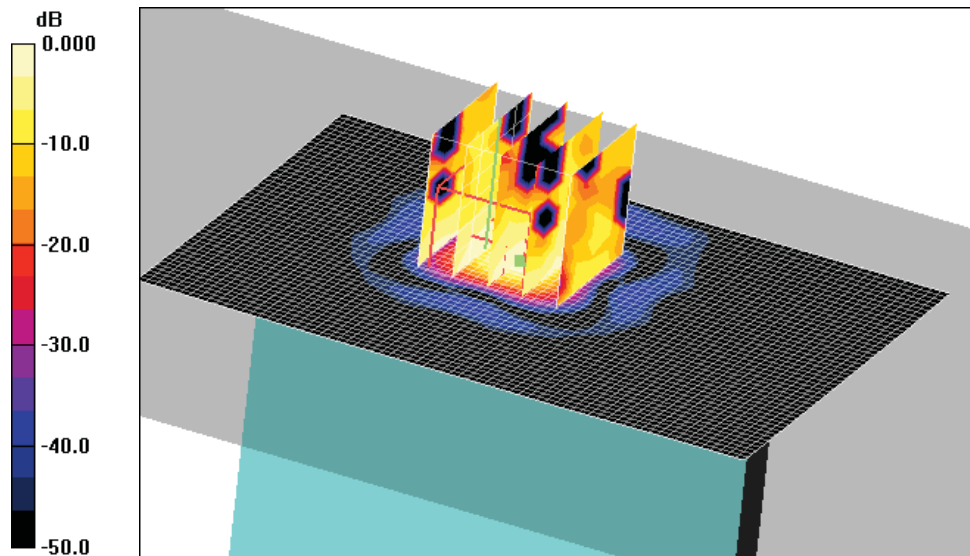

0 dB = 0.008mW/g

DUT: GT-B5512; Serial: FI-280-A

Program Name: GT-B5512 WLAN Body (Job No. : FI-280)

Procedure Name: Body, Ch.11, Ant.Intenna, Bat.Standard Front 1Mbps

Meas. Ambient Temp(celsius)-22.2,Tissue Temp(celsius)-21.7;Test Date-1/Dec/2011

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3520; ConvF(7.43, 7.43, 7.43); Calibrated: 2011-03-22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn724; Calibrated: 2011-03-17

- Phantom: Triple Flat Phantom 5.1; Type: Triple Flat Phantom 5.1; Serial: MP-1010

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body, Ch.11, Ant.Intenna, Bat.Standard Front 1Mbps/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.024 mW/g

Body, Ch.11, Ant.Intenna, Bat.Standard Front 1Mbps/Zoom Scan 2 2 (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.34 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.038 W/kg

SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.010 mW/g

Maximum value of SAR (measured) = 0.022 mW/g

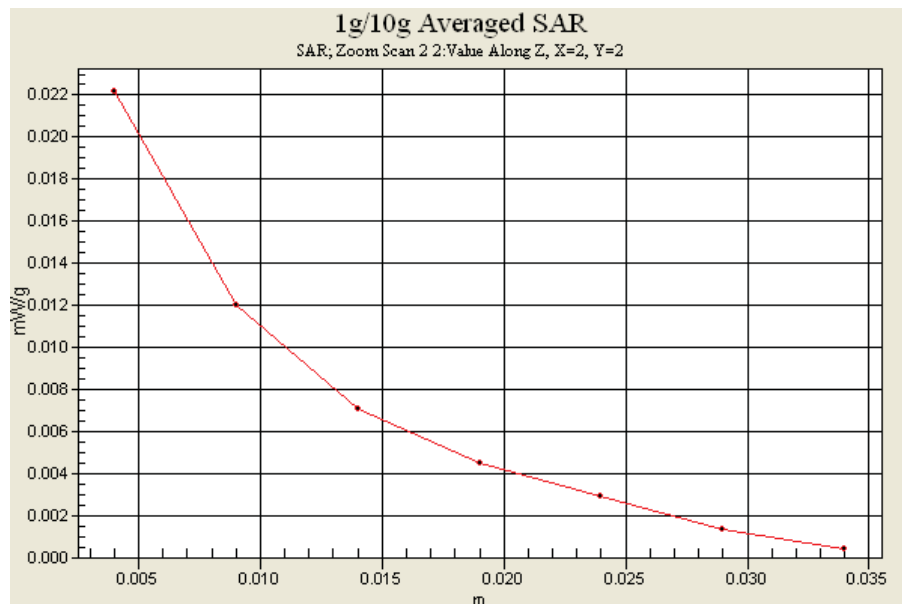

APPENDIX F

Probe Calibration



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Samsung (Dymstec)**

Certificate No: **EX3-3520_Mar11**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3520**

Calibration procedure(s) **QA CAL-01.v7, QA CAL-23.v4, QA CAL-25.v3**
 Calibration procedure for dosimetric E-field probes

Calibration date: **March 22, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	01-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	23-Apr-10 (No. DAE4-654_Apr10)	Apr-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name	Function	Signature
	Jeton Kastrati	Laboratory Technician	
Approved by:	Name	Function	Signature
	Katja Pokovic	Technical Manager	

Issued: March 23, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}** are numerical linearization parameters in dB assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media.
- VR**: VR is the validity range of the calibration related to the average diode voltage or DAE voltage in mV.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe EX3DV4

SN:3520

Manufactured: March 8, 2004
Calibrated: March 22, 2011

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3520

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.73	0.68	0.66	$\pm 10.1 \%$
DCP (mV) ^B	98.0	101.4	100.7	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	107.7	$\pm 2.2 \%$
			Y	0.00	0.00	1.00	136.8	
			Z	0.00	0.00	1.00	108.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3520

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
850	41.5	0.92	9.52	9.52	9.52	0.63	0.71	± 12.0 %
1750	40.1	1.37	8.25	8.25	8.25	0.78	0.58	± 12.0 %
1900	40.0	1.40	8.07	8.07	8.07	0.80	0.56	± 12.0 %
2300	39.5	1.67	7.61	7.61	7.61	0.75	0.56	± 12.0 %
2450	39.2	1.80	7.25	7.25	7.25	0.80	0.55	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: EX3DV4- SN:3520

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
850	55.2	0.99	9.49	9.49	9.49	0.67	0.72	± 12.0 %
1750	53.4	1.49	8.75	8.75	8.75	0.61	0.76	± 12.0 %
1900	53.3	1.52	8.33	8.33	8.33	0.62	0.72	± 12.0 %
2300	52.9	1.81	7.91	7.91	7.91	0.66	0.66	± 12.0 %
2450	52.7	1.95	7.43	7.43	7.43	0.80	0.56	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

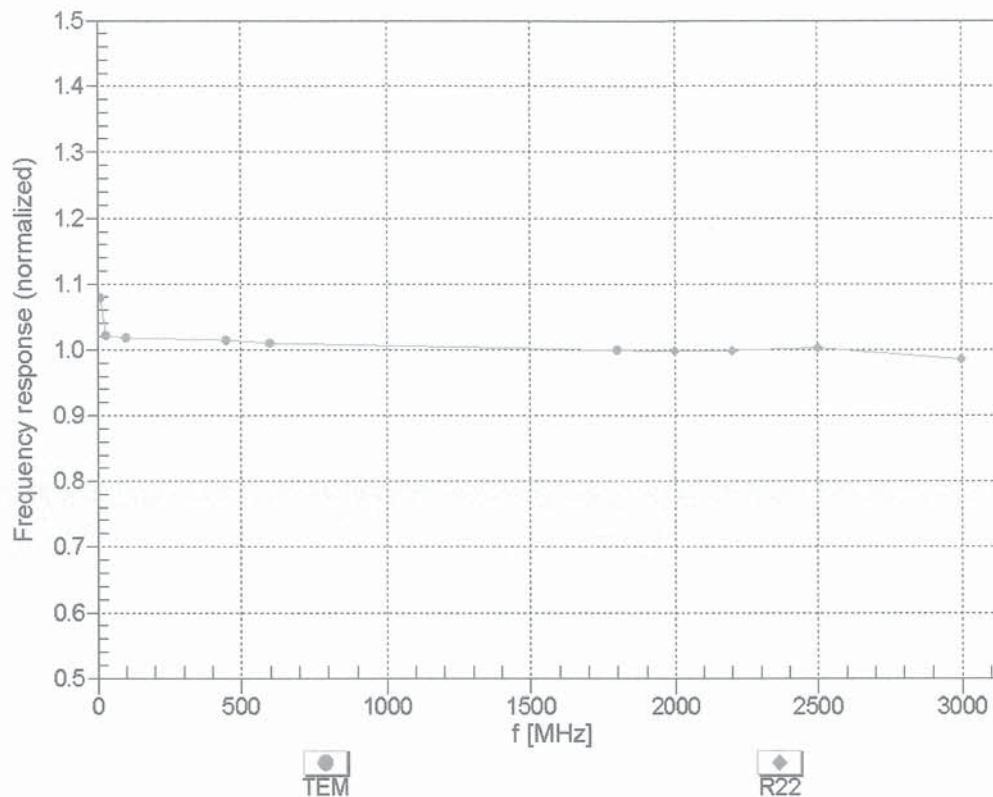



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz, TEM


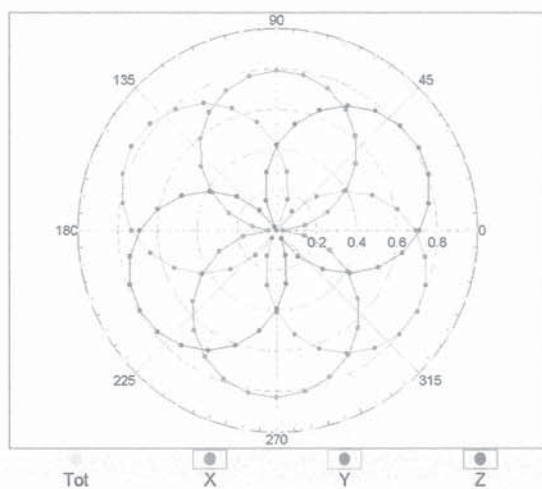


f=1800 MHz, R22

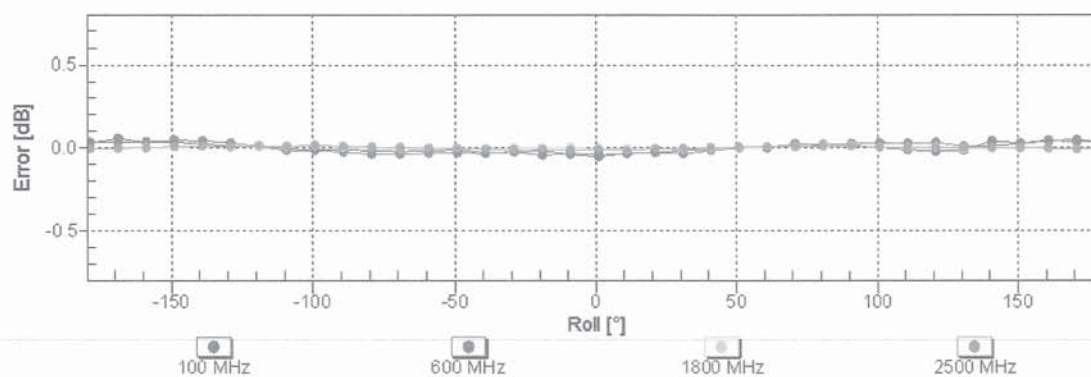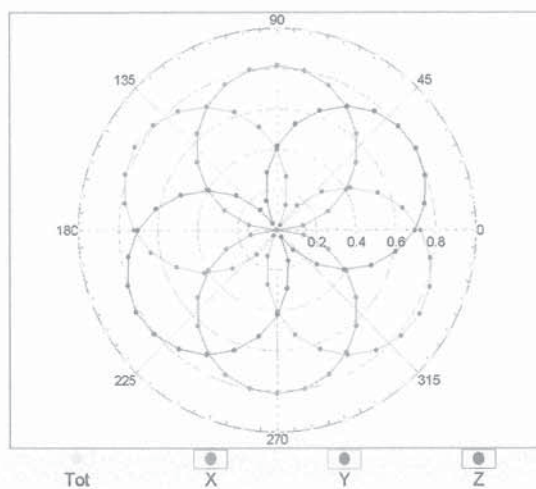


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$)

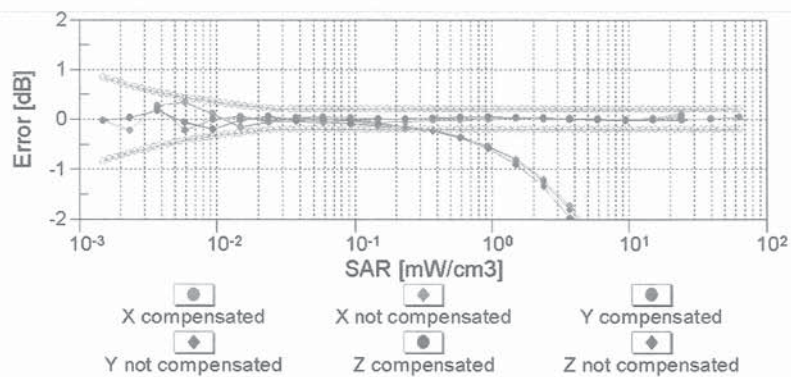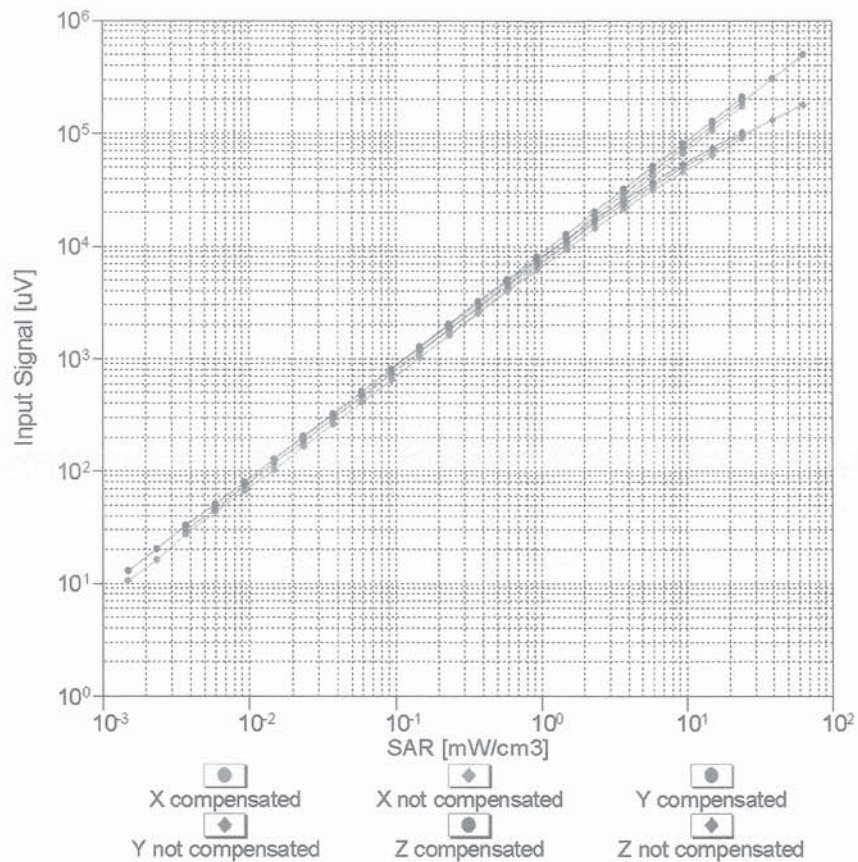



Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

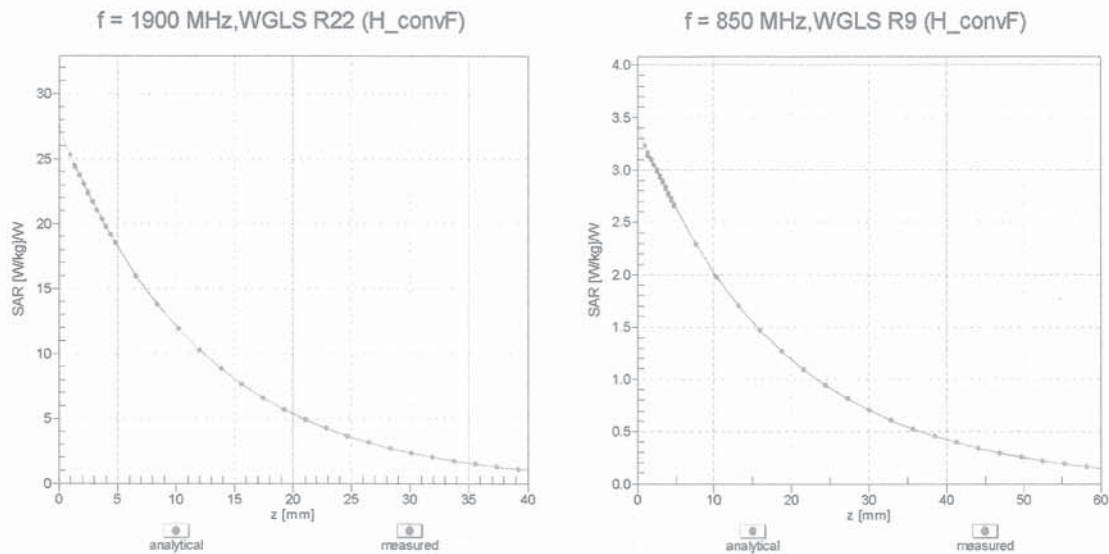

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

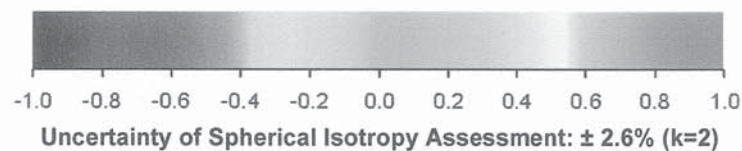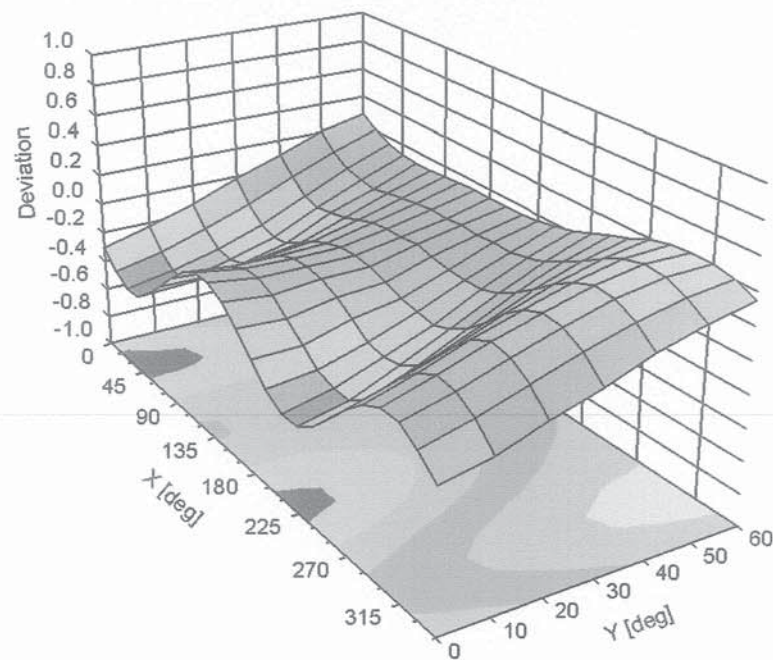

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3520

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm