FCC SAR Test Report

APPLICANT	:	SAMSUNG Electronics Co., LTD.
EQUIPMENT	:	Mobile Phone
BRAND NAME	:	Samsung
MODEL NAME	:	GT-I8190L
MARKETING NAME	:	GOLDEN
FCC ID	:	A3LGTI8190L
STANDARD	:	FCC 47 CFR Part 2 (2.1093) ANSI/IEEE C95.1-1992 IEEE 1528-2003 FCC OET Bulletin 65 Supplement C (Edition 01-01)

The product was completely tested on Nov. 10, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai

Jones Tsai / Manager

Testing Laboratory
1190

SPORTON INTERNATIONAL INC.
No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

Table of Contents

1. Statement of Compliance 4
2. Administration Data 5
2.1 Testing Laboratory....5
2.2 Applicant 5
2.3 Manufacturer....5
2.4 Application Details....5
3. General Information 6
3.1 Description of Equipment Under Test (EUT) 6
3.2 Applied Standard....7
3.3 Device Category and SAR Limits....7
3.4 Test Conditions....7
4. Specific Absorption Rate (SAR)....8
4.1 Introduction 8
4.2 SAR Definition....8
5. SAR Measurement System....9
5.1 E-Field Probe 10
5.2 Data Acquisition Electronics (DAE) 11
5.3 Robot 11
5.4 Measurement Server....11
5.5 Phantom....12
5.6 Device Holder 13
5.7 Data Storage and Evaluation 14
5.8 Test Equipment List....16
5.9 Justification Procedure of Dipole Calibration....17
6. Tissue Simulating Liquids....18
7. SAR Measurement Evaluation 20
7.1 Purpose of System Performance check 20
7.2 System Setup....20
7.3 SAR System Verification Results 21
8. EUT Testing Position 22
8.1 Define two imaginary lines on the handset....22
8.2 Cheek Position....23
8.3 Tilted Position....23
8.4 Body Position 24
9. Measurement Procedures 25
9.1 Spatial Peak SAR Evaluation....25
9.2 Area & Zoom Scan Procedures....25
9.3 Volume Scan Procedures....26
9.4 SAR Averaged Methods....26
9.5 Power Drift Monitoring....26
10. SAR Test Configurations....27
10.1 Exposure Positions Consideration 27
10.2 Conducted RF Output Power (Unit: dBm) 29
11. SAR Test Results 37
11.1 Test Records for Head SAR Test....37
11.2 Test Records for Hotspot SAR Test 39
11.3 Test Records for Body-worn SAR Test 40
11.4 Simultaneous Multi-band Transmission Analysis....42
11.5 Scaled SAR Value to Maximum Tune-up Tolerances 45
12. Uncertainty Assessment 46
13. References....49

Appendix A. Plots of System Performance Check
Appendix B. Plots of SAR Measurement
Appendix C. DASY Calibration Certificate

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA2O1604	Rev. 01	Initial issue of report	Oct. 26, 2012
FA2O1604	Rev. 02	1. Include simultaneous SAR maximum value in section 1. 2. Clarify the dipole justification procedure in section 5.9. 3. Revise the antenna distance in section 10.1. 4. Add power drift data in section 11.4 5. Update WIFI SAR plot #34.	Nov. 02, 2012
FA2O1604	Rev. 03	1. Update WIFI SAR plot #18, #28~31, #34, #35. 2. Revise GSM 850 voice tune-up limit, also update GSM 850 Head scaled SAR value in section 1. 3. Revise footnote 5 on page 33 for E-MPR clarification. 4. Revise WWAN antenna length in setup photo	Nov. 05, 2012
FA2O1604	Rev. 04	Remove scale SAR data, and add section 11.5 to analyze SAR compliance accounting for tune-up tolerance for worst SAR of each frequency band	Nov. 08, 2012
FA2O1604	Rev. 05	1. Repeat system verification of 5GHz of original deviation >5%, using the KDB 865664 for 3-6GHz. 2. In section 11.5, stating scaled-SAR is for information only, not for reporting purpose	Nov. 09, 2012
FA2O1604	Rev. 06	1. Remove 5GHz SAR data in mobile hotspot mode 2. Add 2G/3G hotspot SAR test data at left-edge 3. Repeat 5GHz SAR test cases of which the system verification deviation was >5% 4. Re-test WCDMA band II worst case SAR	Nov. 10, 2012

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **SAMSUNG Electronics Co., LTD. Mobile Phone, Samsung, GT-I8190L, GOLDEN,** are as follows.

<Standalone SAR>

Band	Position	SAR_{1g} (W/kg)
GSM850	Head	0.252
GSM1900	Head	0.473
WCDMA Band V	Head	0.283
WCDMA Band II	Head	0.863
WLAN 2.4G	Head	0.019
WLAN 5G	Head	0.026
GSM850	Hotspot (1 cm Gap)	0.566
GSM1900	Hotspot (1 cm Gap)	0.505
WCDMA Band V	Hotspot (1 cm Gap)	0.493
WCDMA Band II	Hotspot (1 cm Gap)	0.84
WLAN 2.4G	Hotspot (1 cm Gap)	0.036
GSM850	Body-worn (1 cm Gap)	0.566
GSM1900	Body-worn (1 cm Gap)	0.505
WCDMA Band V	Body-worn (1 cm Gap)	0.493
WCDMA Band II	Body-worn (1 cm Gap)	0.84
WLAN 2.4G	Body-worn (1 cm Gap)	0.036
WLAN 5G	Body-worn (1 cm Gap)	0.083

<Highest Simultaneous transmission SAR>

Band	Position	Multi-Band SAR_{1g} (W/kg)
WCDMA Band II	Body-worn (1 cm Gap)	0.92
WLAN 5G		

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC OET Bulletin 65 Supplement C (Edition 01-01).

2. Administration Data

2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

2.2 Applicant

Company Name	SAMSUNG Electronics Co., LTD.
Address	IT center, 416, Maetan-3dong, Yeongtong-gu, Suwon-city, Gyeonggi-do, Korea

2.3 Manufacturer

Company Name	SAMSUNG Electronics Co., LTD.
Address	IT center, 416, Maetan-3dong, Yeongtong-gu, Suwon-city, Gyeonggi-do, Korea

2.4 Application Details

Date of Start during the Test	Oct. 18, 2012
Date of End during the Test	Nov. 10, 2012

3. General Information

3.1 Description of Equipment Under Test (EUT)

Product Feature & Specification	
EUT	Mobile Phone
Brand Name	Samsung
Model Name	GT-I8190L
Marketing Name	GOLDEN
FCC ID	A3LGTI8190L
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WLAN2.4G: 2412 MHz ~ 2462 MHz WLAN5G: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5700 MHz; 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Measure Maximum Average Output Power to Antenna	GSM850: 32.21 dBm GSM1900: 29.76 dBm WCDMA Band V: 21.80 dBm WCDMA Band II: 22.10 dBm 802.11b: 16.29 dBm 802.11g: 14.05 dBm 802.11n-HT20 (2.4GHz) : 11.91 dBm 802.11a : 12.30 dBm 802.11n-HT20 (5GHz) : 12.39 dBm Bluetooth: 12.05 dBm
Antenna Type	WWAN: PIFA Antenna WLAN: FPCB Antenna Bluetooth: FPCB Antenna
HW Version	REV1.0
SW Version	I8190L.010
Uplink Modulations	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA (Rel 99): QPSK HSDPA (Rel 6): QPSK HSUPA (Rel 6): QPSK 802.11b: DSSS (BPSK / QPSK / CCK) 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth 4.0 LE: GFSK
Dual Transfer Mode (DTM) Category	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: 1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description. 2. 5600 MHz ~ 5650 MHz is notched.	

3.2 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC OET Bulletin 65 Supplement C (Edition 01-01)
- FCC KDB 447498 D01 v04
- FCC KDB 648474 D01 v01r05
- FCC KDB 941225 D01 v02
- FCC KDB 941225 D03 v01
- FCC KDB 941225 D06 v01
- FCC KDB 248227 D01 v01r02

3.3 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3.4 Test Conditions

3.4.1 Ambient Condition

Ambient Temperature	20 to 24 ℃
Humidity	< 60 %

3.4.2 Test Configuration

The device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during all tests.

For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

4. Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\mathbf{SAR} = \frac{\mathbf{d}}{\mathbf{dt}}\left(\frac{\mathbf{dW}}{\mathbf{dm}}\right) = \frac{\mathbf{d}}{\mathbf{dt}}\left(\frac{\mathbf{dW}}{\boldsymbol{\rho}\mathbf{dv}}\right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\mathbf{SAR} = \mathbf{C}\left(\frac{\boldsymbol{\delta}\mathbf{T}}{\boldsymbol{\delta}\mathbf{t}}\right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\mathbf{SAR} = \frac{\boldsymbol{\sigma}|\mathbf{E}|^2}{\boldsymbol{\rho}}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5. SAR Measurement System

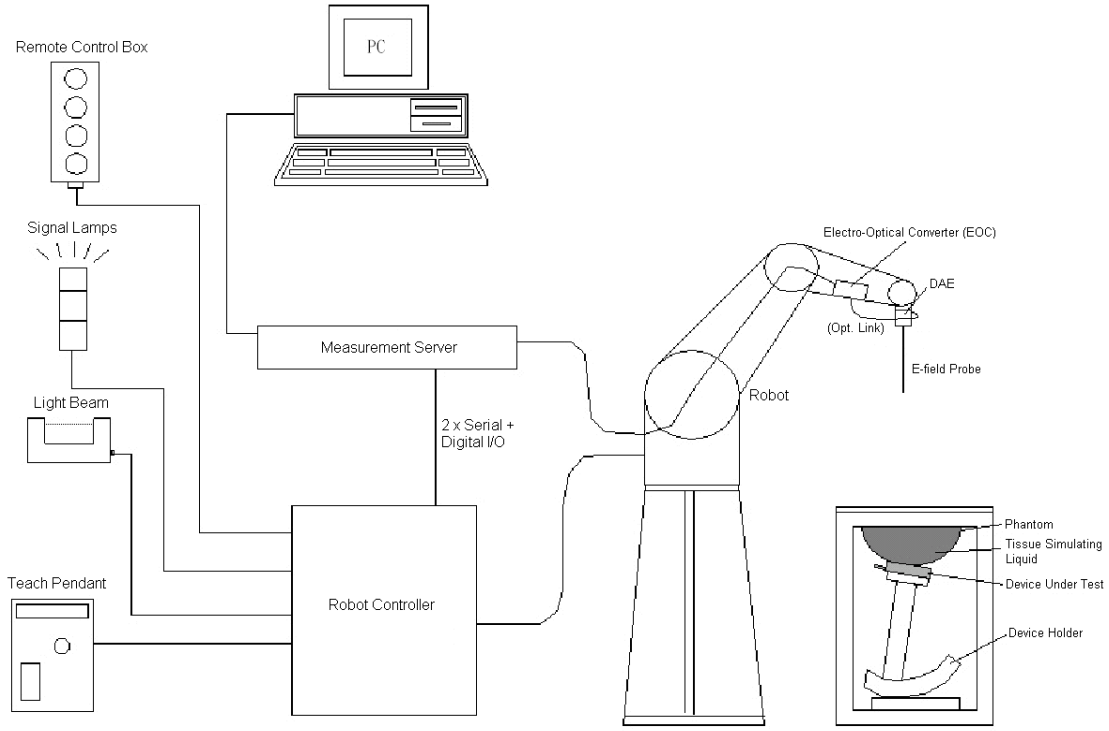

Fig 5.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remove control with teach pendant and additional circuitry for robot safety such as warming lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in in the following sub-sections.

5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

5.1.1 E-Field Probe Specification

<ET3DV6 Probe >

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz to 3 GHz; Linearity: ± 0.2 dB
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 µW/g to 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm

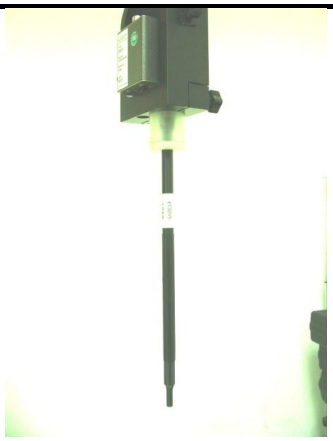

Fig 5.2 Photo of ET3DV6

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 µW/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 µW/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm

Fig 5.3 Photo of EX3DV4

5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than ± 10%. The spherical isotropy shall be evaluated and within ± 0.25dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.
The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

Fig 5.4 Photo of DAE

5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ±0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

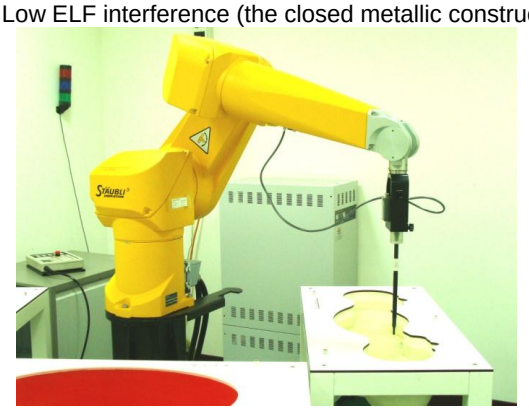

Fig 5.5 Photo of DASY4

Fig 5.6 Photo of DASY5

5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.

Fig 5.7 Photo of Server for DASY4

Fig 5.8 Photo of Server for DASY5

5.5 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	 **Fig 5.9 Photo of SAM Phantom**
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	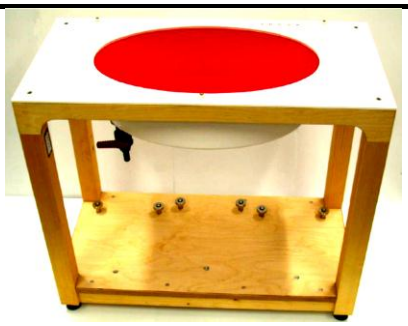 **Fig 5.10 Photo of ELI4 Phantom**
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

5.6 Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity ε = 3 and loss tangent δ = 0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

Fig 5.11 Device Holder

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

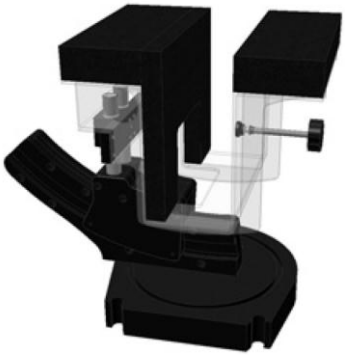

Fig 5.12 Laptop Extension Kit

5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software：

Probe parameters：	- Sensitivity	$Norm_i$, a_{i0}, a_{i1}, a_{i2}
	- Conversion factor	$ConvF_i$
	- Diode compression point	dcp_i
Device parameters：	- Frequency	f
	- Crest factor	cf
Media parameters：	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as：

$$\mathbf{V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}}$$

with V_i = compensated signal of channel i, (i = x, y, z)
U_i = input signal of channel i, (i = x, y, z)
cf = crest factor of exciting field (DASY parameter)
dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated：

E-field Probes：$\mathbf{E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}}$

H-field Probes：$\mathbf{H_i = \sqrt{V_i} \cdot \frac{a_{i0}+a_{i1}f+a_{i2}f^2}{f}}$

with V_i = compensated signal of channel i, (i = x, y, z)
$Norm_i$ = sensor sensitivity of channel i, (i = x, y, z), μV/(V/m)^2 for E-field Probes
ConvF = sensitivity enhancement in solution
a_{ij} = sensor sensitivity factors for H-field probes
f = carrier frequency [GHz]
E_i = electric field strength of channel i in V/m
H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude)：

$$\mathbf{E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}}$$

The primary field data are used to calculate the derived field units.

$$\mathbf{SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}}$$

with SAR = local specific absorption rate in mW/g
E_{tot} = total field strength in V/m
σ = conductivity in [mho/m] or [Siemens/m]
ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

5.8 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 22, 2010	Mar. 21, 2013
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 23, 2010	Mar. 22, 2013
SPEAG	2450MHz System Validation Kit	D2450V2	736	Jul. 25, 2011	Jul. 24, 2013
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Jan. 18, 2012	Jan. 17, 2013
SPEAG	Data Acquisition Electronics	DAE3	577	Jun. 06, 2012	Jun. 05, 2013
SPEAG	Data Acquisition Electronics	DAE4	778	Aug. 27, 2012	Aug. 26, 2013
SPEAG	Data Acquisition Electronics	DAE4	1338	Jun. 12, 2012	Jun. 11, 2013
SPEAG	Dosimetric E-Field Probe	ET3DV6	1787	May 29, 2012	May 28, 2013
SPEAG	Dosimetric E-Field Probe	EX3DV4	3792	Jun. 21, 2012	Jun. 20, 2013
SPEAG	Dosimetric E-Field Probe	EX3DV4	3697	Sep. 28, 2012	Sep. 27, 2013
Wisewind	Thermometer	ETP-101	TM560	Nov. 16, 2011	Nov. 15, 2012
Wisewind	Thermometer	HTC-1	TM685	Nov. 16, 2011	Nov. 15, 2012
Wisewind	Thermometer	HTC-1	TM659	Nov. 16, 2011	Nov. 15, 2012
H.M.IRIS	Thermometer	TH-08	TM658	Nov. 16, 2011	Nov. 15, 2012
SPEAG	Device Holder	N/A	N/A	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1303	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1383	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1477	NCR	NCR
SPEAG	SAM Phantom	QD 000 P41 C	TP-1150	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 CD	TP-1718	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 CD	TP-1644	NCR	NCR
SPEAG	SAM Phantom	SM 000 T01 DA	TP-1542	NCR	NCR
Agilent	Network Analyzer	E5071C	MY46101588	May 11, 2012	May 10, 2013
Agilent	ESG Vector Series Signal Generator	E4438C	MY49070755	Oct. 02, 2012	Oct. 01, 2013
Anritsu	Power Meter	ML2495A	1132003	Aug. 14, 2012	Aug. 13, 2013
Agilent	Wireless Communication Test Set	E5515C	MY48360820	Jan. 05, 2012	Jan. 04, 2014
Agilent	Wireless Communication Test Set	E5515C	GB46311322	Mar. 23, 2011	Mar. 22, 2013
Agilent	Wireless Communication Test Set	E5515C	MY50264370	Apr. 19, 2011	Apr. 18, 2013
Agilent	Wireless Communication Test Set	E5515C	MY50266977	Nov. 13, 2011	Nov. 12, 2013
Agilent	Dual Directional Coupler	778D	50422	NCR	NCR
Woken	Attenuator	WK0602-XX	N/A	NCR	NCR
AR	Power Amplifier	5S1G4M2	0328767	NCR	NCR
R&S	Spectrum Analyzer	FSP	101131	Jul. 23, 2012	Jul. 22, 2013

Table 5.1 Test Equipment List

Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. Referring to KDB 450824 D02, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D835V2, SN: 499, D1900V2, SN: 5d041, and D2450V2, SN: 736 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

5.9 Justification Procedure of Dipole Calibration

1. Setup a Network Analyzer (Agilent N5230A) and set the start frequency and stop frequency to Network Analyzer according to the dipole frequency, at least +/- 200MHz around the calibration point.
2. Using calibration kit to perform Network Analyzer Open, Short and Load calibration.
3. Connect the dipole with the calibrated Network Analyzer.
4. Set the Network Analyzer frequency by the dipole calibration frequency. Monitor the return-loss and impedance results with Log Magnitude format and Smith Chart, respectively.
5. Record the result and compare with the prior calibration. Please check the Appendix C for detail records.

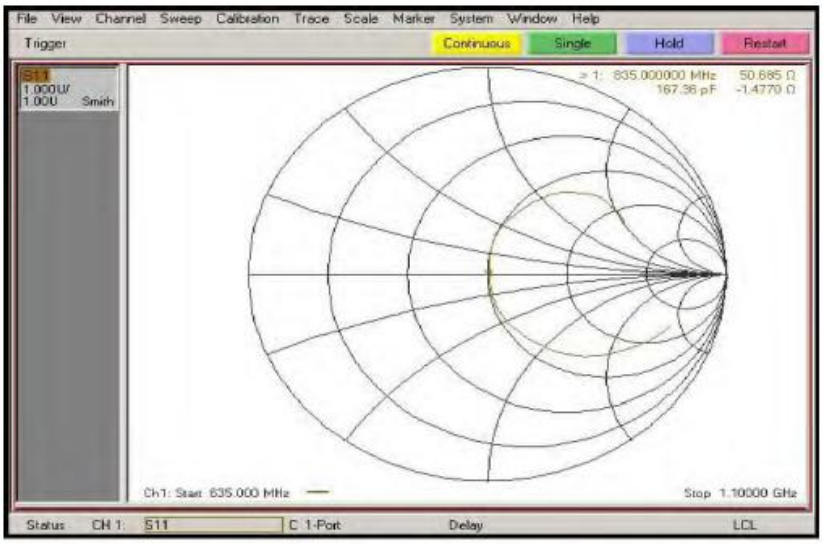

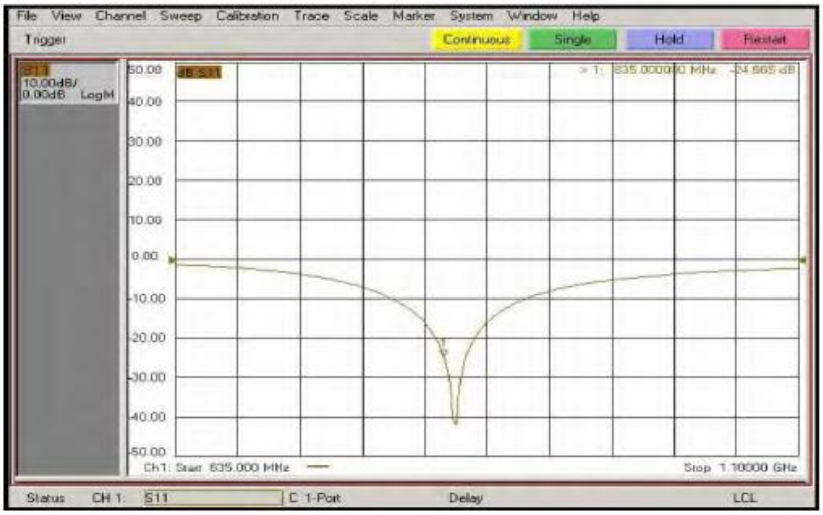

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.

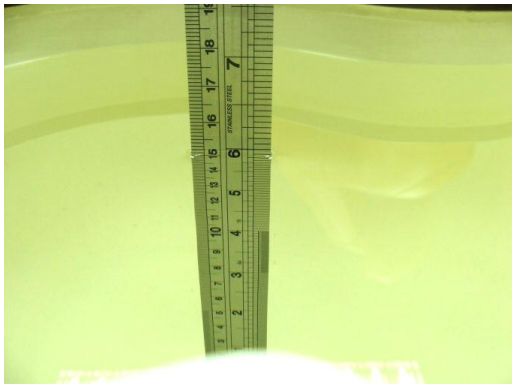

Fig 6.1 Photo of Liquid Height for Head SAR

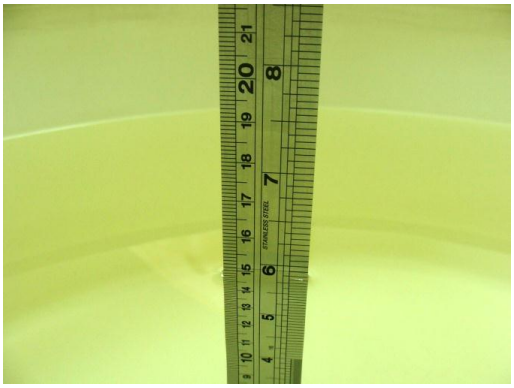

Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ε_r)
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

Table 6.1 Recipes of Tissue Simulating Liquid

Simulating Liquid for 5G, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Freq. (MHz)	Liquid Type	Temp. (℃)	Conductivity (σ)	Permittivity (ε_r)	Conductivity Target (σ)	Permittivity Target (ε_r)	Delta (σ) (%)	Delta (ε_r) (%)	Limit (%)	Date
835	Head	21.4	0.916	41.7	0.90	41.5	1.78	0.48	±5	2012/10/23
835	Body	21.5	0.956	52.6	0.97	55.2	-1.44	-4.71	±5	2012/10/24
1900	Head	21.5	1.44	38.1	1.40	40.0	2.86	-4.75	±5	2012/10/23
1900	Body	21.4	1.54	50.7	1.52	53.3	1.32	-4.88	±5	2012/10/23
1900	Head	21.5	1.449	38.532	1.40	40.0	3.50	-3.67	±5	2012/11/10
1900	Body	21.5	1.526	52.813	1.52	53.3	0.39	-0.91	±5	2012/11/10
2450	Head	21.3	1.845	38.606	1.8	39.2	2.50	-1.52	±5	2012/10/22
2450	Body	21.3	2.02	53.936	1.95	52.7	3.59	2.35	±5	2012/10/22
5200	Head	21.4	4.786	35.42	4.66	36	2.70	-1.61	±5	2012/10/19
5200	Head	21.5	4.793	35.493	4.66	36	2.85	-1.41	±5	2012/11/2
5200	Body	21.8	5.373	48.526	5.3	49	1.38	-0.97	±5	2012/10/18
5500	Head	21.4	5.098	34.948	4.96	35.6	2.78	-1.83	±5	2012/10/19
5500	Head	21.7	5.087	34.853	4.96	35.6	2.56	-2.10	±5	2012/10/23
5500	Head	21.5	5.11	35.014	4.96	35.6	3.02	-1.65	±5	2012/11/2
5500	Body	21.8	5.806	47.837	5.65	48.6	2.76	-1.57	±5	2012/10/18
5800	Head	21.4	5.393	34.361	5.27	35.3	2.33	-2.66	±5	2012/10/19
5800	Head	21.7	5.368	34.272	5.27	35.3	1.86	-2.91	±5	2012/10/23
5800	Head	21.5	5.395	34.416	5.27	35.3	2.37	-2.50	±5	2012/11/2
5800	Body	21.8	6.219	47.128	6	48.2	3.65	-2.22	±5	2012/10/18
5500	Body	21.8	5.717	47.955	5.65	48.6	1.19	-1.33	±5	2012/11/9
5800	Head	21.7	5.42	34.321	5.27	35.3	2.85	-2.77	±5	2012/11/9
5800	Body	21.6	6.113	47.156	6	48.2	1.88	-2.17	±5	2012/11/9
5800	Body	21.7	6.217	46.407	6	48.2	3.62	-3.72	±5	2012/11/10
5500	Body	21.7	5.712	46.963	5.65	48.6	1.10	-3.37	±5	2012/11/10
5800	Head	21.5	5.423	34.346	5.27	35.3	2.90	-2.70	±5	2012/11/10

Table 6.2 Measuring Results for Simulating Liquid

7. SAR Measurement Evaluation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

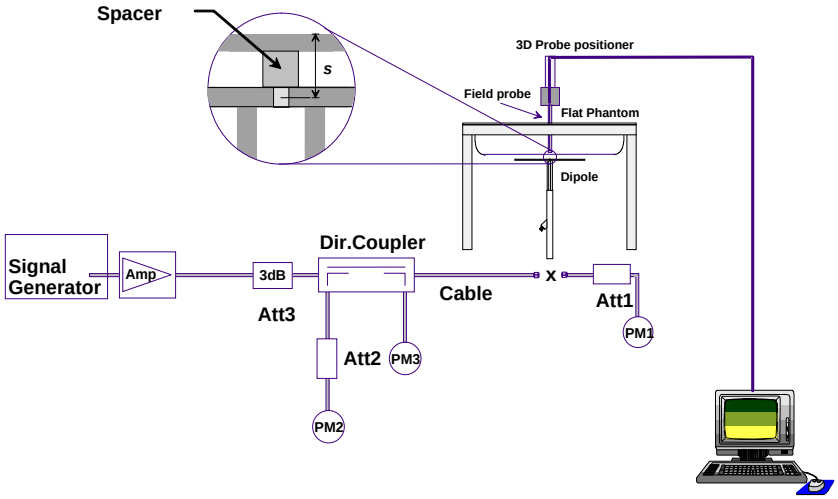

Fig 7.1 System Setup for System Evaluation **Fig 7.2 Photo of Dipole Setup**

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected.

7.3 SAR System Verification Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the verification criterion and the plots can be referred to Appendix A of this report.

Measurement Date	Frequency (MHz)	Liquid Type	Targeted SAR_{1g} (W/kg)	Measured SAR_{1g} (W/kg)	Normalized SAR_{1g} (W/kg)	Deviation (%)
2012/10/23	835	Head	9.71	2.35	9.40	-3.19
2012/10/24	835	Body	9.82	2.61	10.44	6.31
2012/10/23	1900	Head	39.8	9.36	37.44	-5.93
2012/10/23	1900	Body	40	10.6	42.40	6.00
2012/11/10	1900	Head	39.8	9.87	39.48	-0.80
2012/11/10	1900	Body	40	9.74	38.96	-2.60
2012/10/22	2450	Head	54.8	13.7	54.80	0.00
2012/10/22	2450	Body	52.3	13.9	55.60	6.31
2012/10/19	5200	Head	79.2	20.6	82.40	4.04
2012/11/2	5200	Head	79.2	19.9	79.60	0.51
2012/10/18	5200	Body	72.6	18.2	72.80	0.28
2012/10/19	5500	Head	85.2	21.6	86.40	1.41
2012/10/23	5500	Head	85.2	21.4	85.60	0.47
2012/11/2	5500	Head	85.2	20.9	83.60	-1.88
2012/10/18	5500	Body	78.8	21	84.00	6.60
2012/11/9	5500	Body	78.8	19.5	78.00	-1.02
2012/11/10	5500	Body	78.8	19.7	78.80	0.00
2012/10/19	5800	Head	79	19.8	79.20	0.25
2012/10/23	5800	Head	79	20.8	83.20	5.32
2012/11/9	5800	Head	79	19.2	76.80	-2.78
2012/11/10	5800	Head	79	19	76.00	-3.80
2012/11/2	5800	Head	79	19.8	79.20	0.25
2012/10/18	5800	Body	73.1	19.3	77.20	5.61
2012/11/9	5800	Body	73.1	19	76.00	3.97
2012/11/10	5800	Body	73.1	19.1	76.40	4.51

Table 7.1 Target and Measurement SAR after Normalized

Note:

5GHz system verification was done with slightly larger zoom scan resolution than that in KDB 865664 rev 1.1 for 3-6GHz SAR procedure. 5GHz system verification data deviation of >5% was repeated according to KDB 865664 rev 1.1 for 3-6GHz SAR procedure, per one-time exception confirmed by FCC.

8. EUT Testing Position

8.1 Define two imaginary lines on the handset

(a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.

(b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.

(c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

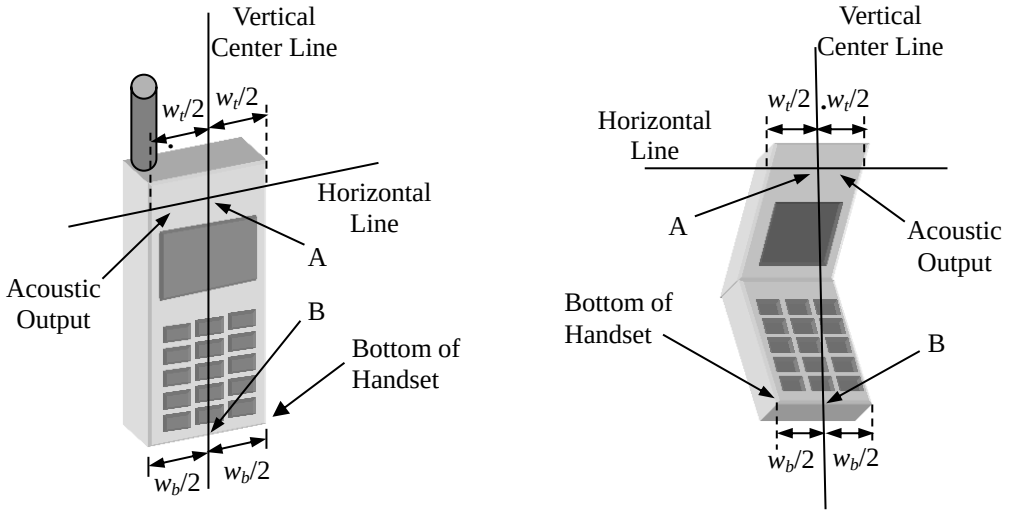

Fig 8.1 Illustration for Handset Vertical and Horizontal Reference Lines

8.2 Cheek Position

(a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

(b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 8.2).

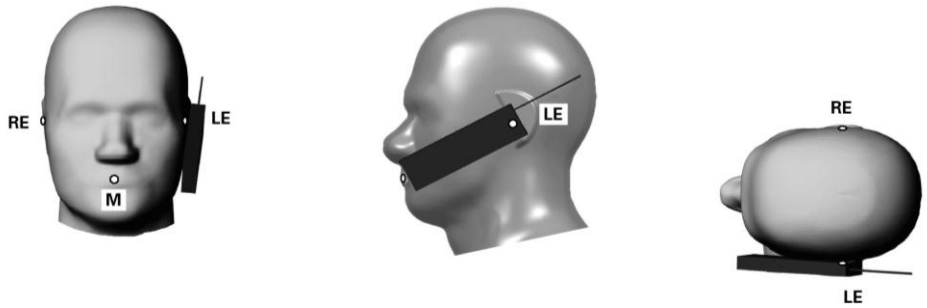

Fig 8.2 Illustration for Cheek Position

8.3 Tilted Position

(a) To position the device in the “cheek” position described above.

(b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 8.3).

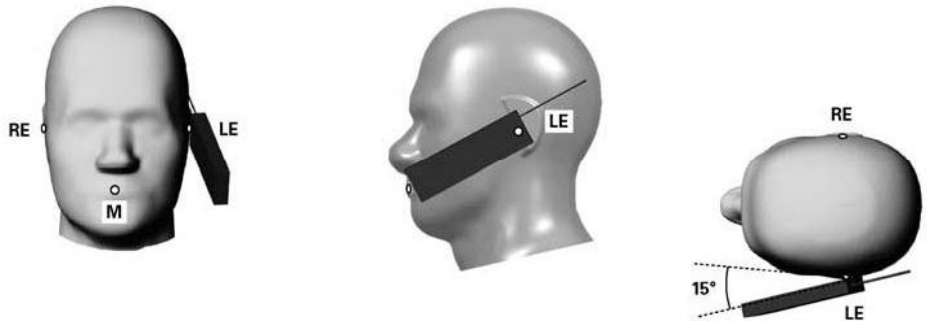

Fig 8.3 Illustration for Tilted Position

8.4 Body Position

1. To position the device parallel to the phantom all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
2. To adjust the distance between the device surface and all sides that the flat phantom to 1 cm.

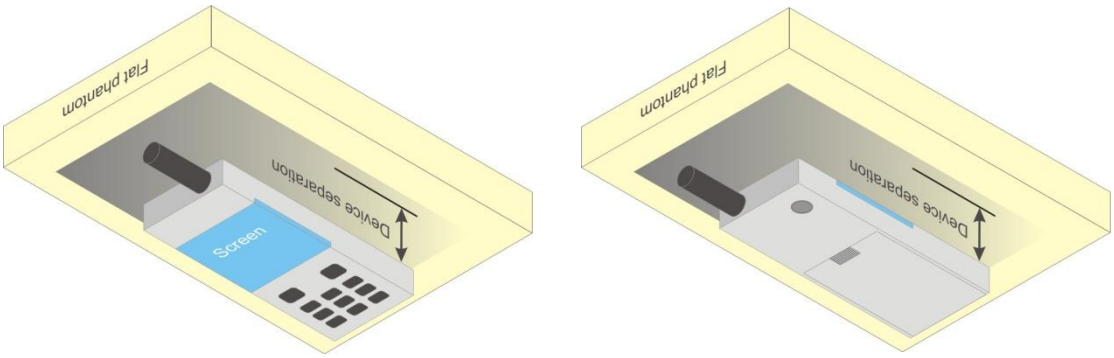

Fig 8.4 Illustration for Body Worn Position

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

(a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
(b) Read the WWAN RF power level from the base station simulator.
(c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
(d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

(a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
(b) Place the EUT in the positions as Appendix E demonstrates.
(c) Set scan area, grid size and other setting on the DASY software.
(d) Measure SAR results for the highest power channel on each testing position.
(e) Find out the largest SAR result on these testing positions of each band
(f) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

(a) Power reference measurement
(b) Area scan
(c) Zoom scan
(d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

(a) Extraction of the measured data (grid and values) from the Zoom Scan
(b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
(c) Generation of a high-resolution mesh within the measured volume
(d) Interpolation of all measured values form the measurement grid to the high-resolution grid
(e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
(f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

9.3 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.4 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

9.5 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. SAR Test Configurations

10.1 Exposure Positions Consideration

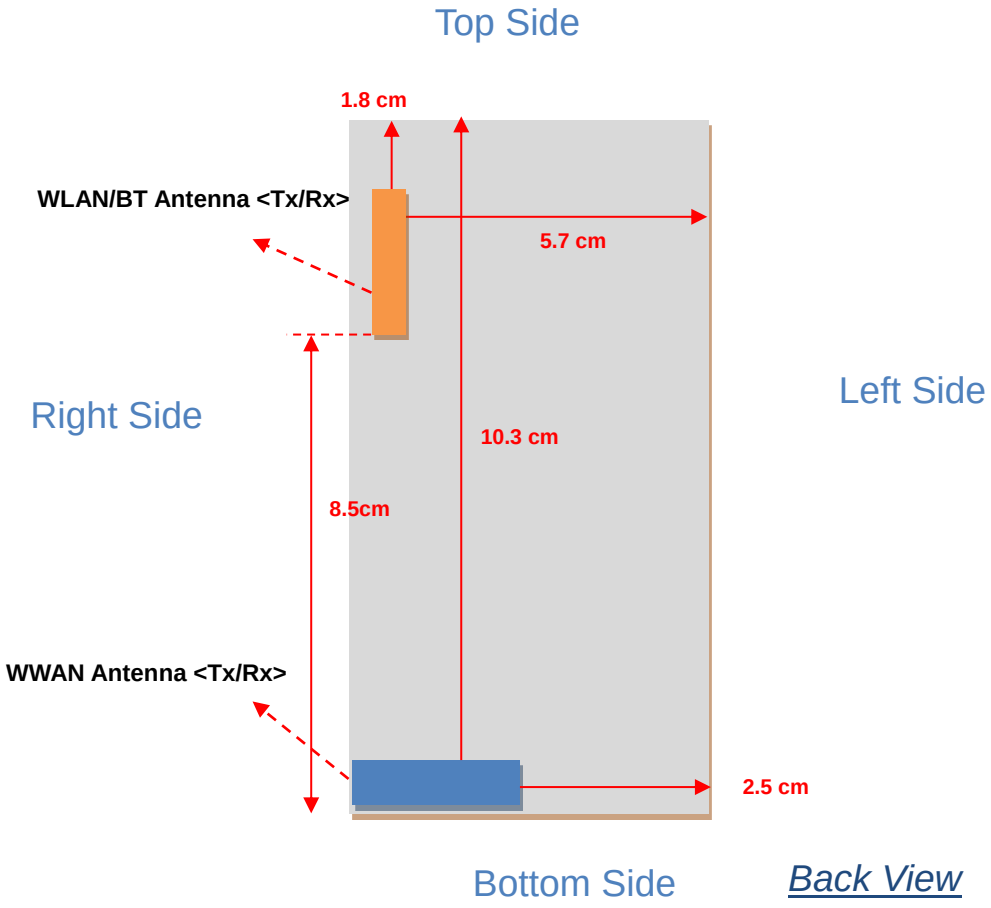

Antennas	Wireless Interface
WWAN Antenna (Tx / Rx)	GSM850 GSM1900 WCDMA Band V WCDMA Band II
BT&WLAN Antenna (Tx / Rx)	WLAN 2.4GHz WLAN 5GHz Bluetooth

Sides for SAR tests; Hotspot mode Test distance: 10 mm						
Antennas	**Back**	**Front**	**Top Side**	**Bottom Side**	**Right Side**	**Left Side**
WWAN	YES	YES	NO	YES	YES	YES
BT&WLAN	YES	YES	YES	NO	YES	NO

Note:

1. Head/Body-worn/Hotspot mode SAR assessments are required.
2. Referring to KDB 941225 D06, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
3. For WWAN antenna, SAR measurements at Top sides are not required since the distance between the transmitting antenna and surface of device is > 25mm.
4. For BT&WLAN antenna, SAR measurements Bottom/Left sides are not required since the distance between the transmitting antenna and surface of device is > 25mm.
5. Per KDB 648474 D01, Bluetooth output power ≤ $2*P_{Ref}$ and the distance to WWAN antenna ≥ 5cm, therefore, stand-alone SAR is not required.
6. Mobile hotspot only supports 2.4GHz WLAN operation; mobile hotspot of 5GHz WLAN operation is disabled.

10.2 Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

Band: GSM850	Burst Average Power (dBm)			Frame-Average Power (dBm)		
Channel	128	189	251	128	189	251
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
GSM (GMSK, 1 Tx slot)	32.21	32.11	32.16	23.21	23.11	23.16
GPRS (GMSK, 1 Tx slot) – CS1	32.20	32.12	32.15	23.20	23.12	23.15
GPRS (GMSK, 2 Tx slots) – CS1	29.95	29.87	29.93	23.95	23.87	23.93
GPRS (GMSK, 3 Tx slots) – CS1	28.01	27.96	28.07	23.75	23.70	23.81
GPRS (GMSK, 4 Tx slots) – CS1	26.90	26.84	26.92	23.90	23.84	23.92
EDGE (GMSK, 1 Tx slot) – MCS1	32.12	32.12	32.16	23.12	23.12	23.16
EDGE (GMSK, 2 Tx slots) – MCS1	29.93	29.87	29.93	23.93	23.87	23.93
EDGE (GMSK, 3 Tx slots) – MCS1	28.01	27.95	28.05	23.75	23.69	23.79
EDGE (GMSK, 4 Tx slots) – MCS1	26.89	26.84	26.91	23.89	23.84	23.91
EDGE (8PSK, 1 Tx slot) – MCS5	26.49	26.45	26.50	17.49	17.45	17.50
EDGE (8PSK, 2 Tx slots) – MCS5	23.98	23.91	23.97	17.98	17.91	17.97
EDGE (8PSK, 3 Tx slots) – MCS5	22.02	21.94	21.99	17.76	17.68	17.73
EDGE (8PSK, 4 Tx slots) – MCS5	20.78	20.71	20.76	17.78	17.71	17.76

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:
Frame-averaged power = Maximum burst averaged power (1 Tx slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx slot) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx slot) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx slot) - 3 dB

Band: GSM1900	Burst Average Power (dBm)			Frame-Average Power (dBm)		
Channel	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8
GSM (GMSK, 1 Tx slot)	29.76	29.70	29.68	20.76	20.70	20.68
GPRS (GMSK, 1 Tx slot) – CS1	29.75	29.67	29.65	20.75	20.67	20.65
GPRS (GMSK, 2 Tx slots) – CS1	27.47	27.40	27.40	21.47	21.40	21.40
GPRS (GMSK, 3 Tx slots) – CS1	25.73	25.65	25.65	21.47	21.39	21.39
GPRS (GMSK, 4 Tx slots) – CS1	24.69	24.62	24.61	21.69	21.62	21.61
EDGE (GMSK, 1 Tx slot) – MCS1	29.75	29.69	29.68	20.75	20.69	20.68
EDGE (GMSK, 2 Tx slots) – MCS1	27.47	27.40	27.39	21.47	21.40	21.39
EDGE (GMSK, 3 Tx slots) – MCS1	25.72	25.65	25.64	21.46	21.39	21.38
EDGE (GMSK, 4 Tx slots) – MCS1	24.68	24.63	24.62	21.68	21.63	21.62
EDGE (8PSK, 1 Tx slot) – MCS5	26.03	26.01	25.95	17.03	17.01	16.95
EDGE (8PSK, 2 Tx slots) – MCS5	24.80	24.87	24.76	18.80	18.87	18.76
EDGE (8PSK, 3 Tx slots) – MCS5	23.79	23.82	23.79	19.53	19.56	19.53
EDGE (8PSK, 4 Tx slots) – MCS5	22.68	22.76	22.71	19.68	19.76	19.71

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:
Frame-averaged power = Maximum burst averaged power (1 Tx slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx slot) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx slot) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx slot) - 3 dB

Note:

1. For Head SAR testing, GSM should be evaluated, therefore the EUT was set in GSM Voice.
2. For Body SAR testing, GSM, GPRS, and EDGE should be evaluated, therefore the EUT was set in GSM Voice and GPRS 3 Tx slotsfor GSM850 and set in GSM Voice and GPRS 4 Tx slotsfor GSM1900 due to its highest frame-average power.
3. Per KDB 447498, the maximum output power channel is used for SAR testing and for further SAR test reduction.
4. The EUT does not support DTM function.

<WCDMA Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
b. The RF path losses were compensated into the measurements.
c. A call was established between EUT and Base Station with following setting:
   i. Set Gain Factors (β_c and β_d) and parameters were set according to each
   ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
   iii. Set RMC 12.2Kbps + HSDPA mode.
   iv. Set Cell Power = -86 dBm
   v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
   vi. Select HSDPA Uplink Parameters
   vii. Set Delta ACK, Delta NACK and Delta CQI = 8
   viii. Set Ack-Nack Repetition Factor to 3
   ix. Set CQI Feedback Cycle (k) to 4 ms
   x. Set CQI Repetition Factor to 2
   xi. Power Ctrl Mode = All Up bits
d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d *(SF)*	β_c/β_d	β_{HS} *(Note1, Note 2)*	CM (dB) *(Note 3)*	MPR (dB) *(Note 3)*
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 *(Note 4)*	15/15 *(Note 4)*	64	12/15 *(Note 4)*	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK}, Δ_{NACK} and Δ_{CQI} = 30/15 with β_{hs} = 30/15 * β_c .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and Δ_{NACK} = 30/15 with β_{hs} = 30/15 * β_c , and Δ_{CQI} = 24/15 with β_{hs} = 24/15 * β_c .

Note 3: CM = 1 for β_c/β_d =12/15, β_{hs}/β_c=24/15. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to β_c = 11/15 and β_d = 15/15.

Setup Configuration

HSUPA Setup Configuration:

a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
b. The RF path losses were compensated into the measurements.
c. A call was established between EUT and Base Station with following setting * :
   i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
   ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
   iii. Set Cell Power = -86 dBm
   iv. Set Channel Type = 12.2k + HSPA
   v. Set UE Target Power
   vi. Power Ctrl Mode= Alternating bits
   vii. Set and observe the E-TFCI
   viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed}1$: 47/15 $\beta_{ed}2$: 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK}, Δ_{NACK} and Δ_{CQI} = 30/15 with β_{hs} = 30/15 * β_c .
Note 2: CM = 1 for β_c/β_d =12/15, β_{hs}/β_c=24/15. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to β_c = 10/15 and β_d = 15/15.
Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to β_c = 14/15 and β_d = 15/15.
Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.
Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

WCDMA Average power (dBm)						
Band	**WCDMA Band V**			**WCDMA Band II**		
Channel	**4132**	**4182**	**4233**	**9262**	**9400**	**9538**
Frequency (MHz)	**826.4**	**836.4**	**846.6**	**1852.4**	**1880.0**	**1907.6**
RMC 12.2K	21.65	**21.80**	21.39	**22.10**	21.86	21.96
HSDPA Subtest-1	21.22	21.60	20.97	22.00	21.84	21.22
HSDPA Subtest-2	21.20	21.60	20.94	21.97	21.80	21.81
HSDPA Subtest-3	21.18	21.57	20.93	21.94	21.82	21.81
HSDPA Subtest-4	21.14	21.51	20.92	21.96	21.82	21.78
HSUPA Subtest-1	19.52	19.90	19.32	20.62	20.50	20.29
HSUPA Subtest-2	19.15	19.47	18.89	19.74	19.56	19.61
HSUPA Subtest-3	19.77	20.18	19.62	20.65	20.45	20.33
HSUPA Subtest-4	19.18	19.39	19.03	20.15	19.90	19.80
HSUPA Subtest-5	20.01	20.31	19.88	20.90	20.85	20.64

MPR (dB)							
3GPP MPR	**Subtest**	**WCDMA Band V**			**WCDMA Band II**		
0	**HSDPA Subtest-1**	0.00	0.00	0.00	0.00	0.00	0.00
0	**HSDPA Subtest-2**	0.02	0.00	0.03	0.03	0.04	-0.59
≤ 0.5	**HSDPA Subtest-3**	0.04	0.03	0.04	0.06	0.02	-0.59
≤ 0.5	**HSDPA Subtest-4**	0.08	0.09	0.05	0.04	0.02	-0.56
0	**HSUPA Subtest-1**	0.49	0.41	0.56	0.28	0.35	0.35
≤ 2	**HSUPA Subtest-2**	0.86	0.84	0.99	1.16	1.29	1.03
≤ 1	**HSUPA Subtest-3**	0.24	0.13	0.26	0.25	0.40	0.31
≤ 2	**HSUPA Subtest-4**	0.83	0.92	0.85	0.75	0.95	0.84
0	**HSUPA Subtest-5**	0.00	0.00	0.00	0.00	0.00	0.00

Note:

1. Applying the subtest setup in Table C.11.1.3 of 3GPP TS 34.121-1 V9.1.0 to Rel. 6 HSPA.
2. For Head SAR, per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2kbps can be excluded.
3. For Body SAR, per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA output power is < 0.25dB higher than RMC, or SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA/HSUPA SAR evaluation can be excluded.
4. By design, AMR, HSDPA/HSUPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.
5. Regardless of legacy or E-MPR software, by design the HSPA transmitter power will not exceed the R99 maximum transmit power in device; detailed description is included in HSPA MPR explanation exhibit.

<WLAN 2.4GHz Conducted Power>

WLAN 2.4G 802.11b Average Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate (bps)	Channel	Data Rate (bps)		
		1M		2M	5.5M	11M
CH 01	2412	16.17	CH 6	16.26	16.27	16.25
CH 06	2437	16.29				
CH 11	2462	16.28				

WLAN 2.4G 802.11g Average Power (dBm)											
Power vs. Channel			Power vs. Data Rate								
Channel	Frequency (MHz)	Data Rate (bps)	Channel	Data Rate (bps)							
		6M		9M	12M	18M	24M	36M	48M	54M	
CH 01	2412	13.82	CH 6	13.93	14.02	14.02	13.99	14.00	14.04	13.98	
CH 06	2437	14.05									
CH 11	2462	13.96									

WLAN 2.4G 802.11n (BW 20MHz) Average Power (dBm)											
Power vs. Channel			Power vs. Data Rate								
Channel	Frequency (MHz)	MCS Index	Channel	MCS Index							
		MCS0		MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	
CH 01	2412	11.68	CH 6	11.90	11.87	11.81	11.89	11.89	11.88	11.80	
CH 06	2437	11.91									
CH 11	2462	11.87									

Note:

1. Per KDB 248227, choose the highest output power channel to test SAR and determine further SAR exclusion
2. Per KDB 248227, 11g and 11n-HT20 output power is less than 0.25dB higher than 11b mode, thus the SAR can be excluded.
3. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 0.25dB higher than those measured at the lowest data rate.

<Bluetooth Conducted Power>

Channel	Frequency (MHz)	Average power (dBm)		
		Mode		
		GFSK	π/4-DQPSK	8-DPSK
CH 0	2402	12.05	9.65	9.65
CH 39	2441	11.84	9.39	9.49
CH 78	2480	11.33	8.60	8.62

Channel	Frequency (MHz)	Average power (dBm)
		Mode
		BT v4.0 LE, GFSK
CH 0	2402	8.87
CH 19	2440	9.24
CH 39	2480	8.72

<WLAN 5GHz Conducted Power>

WLAN 5G 802.11a Average Power (dBm)											
Power vs. Channel			Power vs. Data Rate								
Channel	Frequency (MHz)	Data Rate (bps)	Channel	Data Rate (bps)							
		6M		9M	12M	18M	24M	36M	48M	54M
CH 36	5180	11.54	CH 48	11.64	11.62	11.59	11.62	11.60	11.61	11.62
CH 40	5200	11.56								
CH 44	5220	11.62								
CH 48	5240	**11.65**								
CH 52	5260	11.70	CH 64	11.83	11.81	11.82	11.81	11.82	11.82	11.79
CH 56	5280	11.60								
CH 60	5300	11.80								
CH 64	5320	**11.84**								
CH 100	5500	12.24	CH 140	12.25	12.26	12.26	12.25	12.27	12.29	12.28
CH 104	5520	12.13								
CH 108	5540	12.07								
CH 112	5560	12.08								
CH 116	5580	12.11								
CH 132	5660	11.84								
CH 136	5680	11.73								
CH 140	5700	**12.30**								
CH 149	5745	12.07	CH 157	12.11	12.05	12.09	12.10	12.14	12.13	12.15
CH 153	5765	12.27								
CH 157	5785	**12.16**								
CH 161	5805	12.11								
CH 165	5825	12.10								

WLAN 5G 802.11n (BW 20M) Average Power (dBm)											
Power vs. Channel			Power vs. Data Rate								
Channel	Frequency (MHz)	MCS Index	Channel	MCS Index							
		MCS0		MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 36	5180	11.64	CH 40	12.28	12.23	11.84	11.91	12.04	11.94	11.82
CH 40	5200	**12.39**								
CH 44	5220	11.56								
CH 48	5240	11.59								
CH 52	5260	11.67	CH 56	12.34	12.31	12.23	12.26	12.18	12.14	12.05
CH 56	5280	**12.37**								
CH 60	5300	11.72								
CH 64	5320	11.80								
CH 100	5500	12.18	CH 140	12.30	12.33	12.35	12.33	12.35	12.34	12.34
CH 104	5520	12.17								
CH 108	5540	12.07								
CH 112	5560	12.17								
CH 116	5580	12.05								
CH 132	5660	11.81								
CH 136	5680	11.66								
CH 140	5700	**12.37**								
CH 149	5745	12.12	CH 157	12.21	12.14	12.22	12.22	12.21	12.24	12.23
CH 153	5765	12.21								
CH 157	5785	**12.25**								
CH 161	5805	12.05								
CH 165	5825	12.21								

Note:

1. Per KDB 248227, choose the highest output power channel to test SAR and determine further SAR exclusion
2. Since 11n(20M) 5180 MHz ~ 5240MHz power is 1/4dB higher than 11a 5180 MHz ~ 5240MHz, 11n SAR will be verified.
3. Since 11n(20M) 5260 MHz ~ 5320MHz power is 1/4dB higher than 11a 5260 MHz ~ 5320MHz, 11n SAR will be verified
4. Per KDB 248227, 11n(20M) 5500 MHz ~ 5700MHz output power is less than 1/4 dB higher than 11a 5500 MHz ~ 5700 MHz, thus the SAR can be excluded.
5. Per KDB 248227, 11n(20M) 5745 MHz ~ 5825MHz output power is less than 1/4 dB higher than 11a 5500 MHz ~ 5700 MHz, thus the SAR can be excluded.
6. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 0.25dB higher than those measured at the lowest data rate.

11. SAR Test Results

11.1 Test Records for Head SAR Test

<GSM SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Power Drift (dB)	SAR_{1g} (W/kg)
60	**GSM850**	**GSM Voice**	**Right Cheek**	**128**	**824.2**	**32.21**	**-0.061**	**0.252**
61	GSM850	GSM Voice	Right Tilted	128	824.2	32.21	0.015	0.171
62	GSM850	GSM Voice	Left Cheek	128	824.2	32.21	0.066	0.2
63	GSM850	GSM Voice	Left Tilted	128	824.2	32.21	-0.056	0.132
68	**GSM1900**	**GSM Voice**	**Right Cheek**	**512**	**1850.2**	**29.76**	**0.125**	**0.473**
69	GSM1900	GSM Voice	Right Tilted	512	1850.2	29.76	-0.019	0.162
70	GSM1900	GSM Voice	Left Cheek	512	1850.2	29.76	0.01	0.214
71	GSM1900	GSM Voice	Left Tilted	512	1850.2	29.76	-0.027	0.157

Note: Per KDB 648474 and KDB 447498, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Power Drift (dB)	SAR_{1g} (W/kg)
64	**WCDMA V**	**RMC12.2K**	**Right Cheek**	**4182**	**836.4**	**21.8**	**0.086**	**0.283**
65	WCDMA V	RMC12.2K	Right Tilted	4182	836.4	21.8	0.027	0.198
66	WCDMA V	RMC12.2K	Left Cheek	4182	836.4	21.8	-0.048	0.233
67	WCDMA V	RMC12.2K	Left Tilted	4182	836.4	21.8	-0.019	0.152
72	WCDMA II	RMC12.2K	Right Cheek	9262	1852.4	22.1	0.08	0.857
76	WCDMA II	RMC12.2K	Right Cheek	9400	1880	21.86	0.18	0.835
77	**WCDMA II**	**RMC12.2K**	**Right Cheek**	**9538**	**1907.6**	**21.96**	**0.01**	**0.863**
73	WCDMA II	RMC12.2K	Right Tilted	9262	1852.4	22.1	-0.138	0.321
74	WCDMA II	RMC12.2K	Left Cheek	9262	1852.4	22.1	0.101	0.412
75	WCDMA II	RMC12.2K	Left Tilted	9262	1852.4	22.1	-0.029	0.271

Note: Per KDB 648474 and KDB 447498, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Duty Cycle %	Duty Cycle Compensate Factor	Power Drift (dB)	SAR_{1g} (W/kg)	Duty Cycle Compensated 1g SAR
36	WLAN2.4G	802.11b	Right Cheek	6	2437	16.29	99.08	1.009	0.063	0.00843	0.009
37	WLAN2.4G	802.11b	Right Tilted	6	2437	16.29	99.08	1.009	0.065	0.00193	0.002
38	**WLAN2.4G**	**802.11b**	**Left Cheek**	**6**	**2437**	**16.29**	**99.08**	**1.009**	**0.055**	**0.019**	**0.019**
39	WLAN2.4G	802.11b	Left Tilted	6	2437	16.29	99.08	1.009	0.096	0.00883	0.009
18	WLAN5G	802.11a	Right Cheek	48	5240	11.65	93.46	1.070	-0.016	0.0014	0.0015
19	WLAN5G	802.11a	Right Tilted	48	5240	11.65	93.46	1.070	-0.15	0.0000207	0.000022
20	WLAN5G	802.11a	Left Cheek	48	5240	11.65	93.46	1.070	0.18	0.00372	0.004
21	WLAN5G	802.11a	Left Tilted	48	5240	11.65	93.46	1.070	0.14	0.00014	0.00015
22	WLAN5G	802.11n-HT20	Left Cheek	40	5200	12.39	92.78	1.078	-0.06	0.00315	0.0033
23	WLAN5G	802.11a	Right Cheek	64	5320	11.84	93.46	1.070	0.01	0.0025	0.003
24	WLAN5G	802.11a	Right Tilted	64	5320	11.84	93.46	1.070	0.11	0.0002	0.00002
25	WLAN5G	802.11a	Left Cheek	64	5320	11.84	93.46	1.070	-0.06	0.000977	0.001
26	WLAN5G	802.11a	Left Tilted	64	5320	11.84	93.46	1.070	-0.15	0.00000821	0.000009
27	WLAN5G	802.11n-HT20	Right Cheek	56	5280	12.37	92.78	1.078	-0.12	0.0014	0.002
28	WLAN5G	802.11a	Right Cheek	140	5700	12.30	93.46	1.070	-0.129	0.0190	0.020
29	WLAN5G	802.11a	Right Tilted	140	5700	12.30	93.46	1.070	0.159	0.0170	0.018
30	WLAN5G	802.11a	Left Cheek	140	5700	12.30	93.46	1.070	-0.147	0.0220	0.024
31	**WLAN5G**	**802.11a**	**Left Tilted**	**140**	**5700**	**12.30**	**93.46**	**1.070**	-0.119	0.0012	**0.0013**
32	WLAN5G	802.11a	Right Cheek	153	5765	12.27	93.46	1.070	0.009	0.02	0.021
33	WLAN5G	802.11a	Right Tilted	153	5765	12.27	93.46	1.070	-0.008	0.000	0.000
34	**WLAN5G**	**802.11a**	**Left Cheek**	**153**	**5765**	**12.27**	**93.46**	**1.070**	**0.106**	**0.024**	**0.026**
35	WLAN5G	802.11a	Left Tilted	153	5765	12.27	93.46	1.070	0.15	0.00657	0.007

Note: Per KDB 648474 and KDB 248227, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

11.2 Test Records for Hotspot SAR Test

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Power Drift (dB)	SAR_{1g} (W/kg)
95	GSM850	GPRS (2 Tx slot)	Front	1	128	824.2	29.95	0.017	0.276
96	**GSM850**	**GPRS (2 Tx slot)**	**Back**	**1**	**128**	**824.2**	**29.95**	**-0.023**	**0.566**
97	GSM850	GPRS (2 Tx slot)	Left Side	1	128	824.2	29.95	0.026	0.199
98	GSM850	GPRS (2 Tx slot)	Right Side	1	128	824.2	29.95	0	0.375
99	GSM850	GPRS (2 Tx slot)	Bottom Side	1	128	824.2	29.95	0.025	0.13
78	GSM1900	GPRS (4 Tx slot)	Front	1	512	1850.2	24.69	-0.024	0.385
79	**GSM1900**	**GPRS (4 Tx slot)**	**Back**	**1**	**512**	**1850.2**	**24.69**	**-0.019**	**0.505**
80	GSM1900	GPRS (4 Tx slot)	Left Side	1	512	1850.2	24.69	0.029	0.052
81	GSM1900	GPRS (4 Tx slot)	Right Side	1	512	1850.2	24.69	0.094	0.173
82	GSM1900	GPRS (4 Tx slot)	Bottom Side	1	512	1850.2	24.69	0.128	0.367

Note:

1. Per KDB 941225 D06, for EUT dimension ≥ 9cm*5cm, the test distance is 1cm. SAR must be measured for all surfaces and sides with a transmitting antenna located within 2.5cm from that surface or edge.
2. As in (1) and information in section 10.1, SAR for Front / Back / Bottom Side / Right Side is necessary.
3. Per KDB 648474 and KDB 447498 if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Power Drift (dB)	SAR_{1g} (W/kg)
101	WCDMA V	RMC12.2K	Front	1	4182	836.4	21.8	-0.01	0.269
102	**WCDMA V**	**RMC12.2K**	**Back**	**1**	**4182**	**836.4**	**21.8**	**0.052**	**0.493**
103	WCDMA V	RMC12.2K	Left Side	1	4182	836.4	21.8	0.056	0.2
104	WCDMA V	RMC12.2K	Right Side	1	4182	836.4	21.8	0.088	0.325
105	WCDMA V	RMC12.2K	Bottom Side	1	4182	836.4	21.8	0.008	0.1
85	WCDMA II	RMC12.2K	Front	1	9262	1852.4	22.1	-0.064	0.621
86	**WCDMA II**	**RMC12.2K**	**Back**	**1**	**9262**	**1852.4**	**22.1**	**-0.121**	**0.84**
91	WCDMA II	RMC12.2K	Back	1	9400	1880	21.86	-0.048	0.779
92	WCDMA II	RMC12.2K	Back	1	9538	1907.6	21.96	-0.102	0.741
87	WCDMA II	RMC12.2K	Left Side	1	9262	1852.4	22.1	0.065	0.086
88	WCDMA II	RMC12.2K	Right Side	1	9262	1852.4	22.1	0.134	0.289
89	WCDMA II	RMC12.2K	Bottom Side	1	9262	1852.4	22.1	0.073	0.595

Note:

1. Per KDB 941225 D06, for EUT dimension ≥ 9cm*5cm, the test distance is 1cm. SAR must be measured for all surfaces and sides with a transmitting antenna located within 2.5cm from that surface or edge.
2. As in (1) and information in section 10.1, SAR for Front / Back / Bottom Side / Right Side/Left Side is necessary.
3. Per KDB 648474 and KDB 447498, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Duty Cycle %	Duty Cycle Compensate Factor	Power Drift (dB)	SAR_{1g} (W/kg)	Duty Cycle Compensated 1g SAR
40	WLAN2.4G	802.11b	Front	1	6	2437	16.29	99.08	1.009	0.012	0.00322	0.00325
41	**WLAN2.4G**	**802.11b**	**Back**	**1**	**6**	**2437**	**16.29**	**99.08**	**1.009**	**0.042**	**0.036**	**0.036**
44	WLAN2.4G	802.11b	Right Side	1	6	2437	16.29	99.08	1.009	0.032	0.024	0.024
45	WLAN2.4G	802.11b	Top Side	1	6	2437	16.29	99.08	1.009	-0.11	0.019	0.019

Note:

1. Per KDB 941225 D06, for EUT dimension ≥ 9cm*5cm, the test distance is 1cm. SAR must be measured for all surfaces and sides with a transmitting antenna located within 2.5cm from that surface or edge.
2. As in (1) and information in section 10.1, SAR for Front / Back / Top Side / Right Side is necessary.
3. Per KDB 648474 and KDB 248227, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

11.3 Test Records for Body-worn SAR Test

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Headset	Power Drift (dB)	SAR_{1g} (W/kg)
95	GSM850	GPRS (2 Tx slot)	Front	1	128	824.2	29.95	-	0.017	0.276
96	**GSM850**	**GPRS (2 Tx slot)**	**Back**	**1**	**128**	**824.2**	**29.95**	**-**	**-0.023**	**0.566**
100	GSM850	GSM Voice	Back	1	128	824.2	32.21	v	0.078	0.502
78	GSM1900	GPRS (4 Tx slot)	Front	1	512	1850.2	24.69	-	-0.024	0.385
79	**GSM1900**	**GPRS (4 Tx slot)**	**Back**	**1**	**512**	**1850.2**	**24.69**	**-**	**-0.019**	**0.505**
84	GSM1900	GSM Voice	Back	1	512	1850.2	29.76	v	0.046	0.473

Note:

1. Per KDB 648474 and KDB 447498, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.
2. Per KDB 941225 D06, hotspot SAR data in front/back positions can be considered as body-worn accessory SAR test data. GSM voice mode body-worn SAR was repeated at the worst position of hotspot SAR data, back position of this device
3. "V" in the Headset column means the Headset is plugged during SAR testing.

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Headset	Power Drift (dB)	SAR_{1g} (W/kg)
101	WCDMA V	RMC12.2K	Front	1	4182	836.4	21.8	-	-0.01	0.269
102	**WCDMA V**	**RMC12.2K**	**Back**	**1**	**4182**	**836.4**	**21.8**	**-**	**0.052**	**0.493**
106	WCDMA V	RMC12.2K	Back	1	4182	836.4	21.8	v	0.107	0.443
85	WCDMA II	RMC12.2K	Front	1	9262	1852.4	22.1	-	-0.064	0.621
86	**WCDMA II**	**RMC12.2K**	**Back**	**1**	**9262**	**1852.4**	**22.1**	**-**	**-0.121**	**0.84**
91	WCDMA II	RMC12.2K	Back	1	9400	1880	21.86	-	-0.048	0.779
92	WCDMA II	RMC12.2K	Back	1	9538	1907.6	21.96	-	-0.102	0.741
90	WCDMA II	RMC12.2K	Back	1	9262	1852.4	22.1	v	0.05	0.799
93	WCDMA II	RMC12.2K	Back	1	9400	1880	21.86	v	-0.015	0.783
94	WCDMA II	RMC12.2K	Back	1	9538	1907.6	21.96	v	-0.011	0.719

Note:

1. Per KDB 648474 and KDB 447498, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.
2. "V" in the Headset column means the Headset is plugged during SAR testing.

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Duty Cycle %	Duty Cycle Compensate Factor	Headset	Power Drift (dB)	SAR_{1g} (W/kg)	Duty Cycle Compensated 1g SAR
40	WLAN2.4G	802.11b	Front	1	6	2437	16.29	99.08	1.009	-	0.012	0.00322	0.00325
41	**WLAN2.4G**	**802.11b**	**Back**	**1**	**6**	**2437**	**16.29**	**99.08**	**1.009**	**-**	**0.042**	**0.036**	**0.036**
42	WLAN2.4G	802.11b	Back	1	6	2437	16.29	99.08	1.009	v	0.044	0.035	0.035
1	WLAN5G	802.11a	Front	1	48	5240	11.65	93.46	1.070	-	0	0.00151	0.002
2	WLAN5G	802.11a	Back	1	48	5240	11.65	93.46	1.070	-	-0.12	0.055	0.059
3	**WLAN5G**	**802.11n-HT20**	**Back**	**1**	**40**	**5200**	**12.39**	**92.78**	**1.078**	**-**	**-0.13**	**0.073**	**0.079**
4	WLAN5G	802.11n-HT20	Back	1	40	5200	12.39	92.78	1.078	v	0	0.072	0.078
5	WLAN5G	802.11a	Front	1	64	5320	11.84	93.46	1.070	-	-0.196	0.000292	0.0003
6	WLAN5G	802.11a	Back	1	64	5320	11.84	93.46	1.070	-	-0.144	0.064	0.068
7	WLAN5G	802.11n-HT20	Back	1	56	5280	12.37	92.78	1.078	-	-0.01	0.072	0.078
8	WLAN5G	802.11n-HT20	Back	1	56	5280	12.37	92.78	1.078	v	-0.07	0.072	0.078
9	WLAN5G	802.11a	Front	1	140	5700	12.30	93.46	1.070	-	0.126	0.000622	0.0007
10	WLAN5G	802.11a	Back	1	140	5700	12.30	93.46	1.070	-	0.139	0.078	0.083
11	WLAN5G	802.11a	Back	1	140	5700	12.30	93.46	1.070	v	0.15	0.078	0.083
12	WLAN5G	802.11a	Front	1	153	5765	12.27	93.46	1.070	-	-0.188	0.0000527	0.00006
13	WLAN5G	802.11a	Back	1	153	5765	12.27	93.46	1.070	-	-0.11	0.046	0.049
17	WLAN5G	802.11a	Back	1	153	5765	12.27	93.46	1.070	v	0.06	0.053	0.057

Note:

1. Per KDB 648474 and KDB 248227, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.
2. "V" in the Headset column means the Headset is plugged during SAR testing.

11.4 Simultaneous Multi-band Transmission Analysis

No.	Applicable Simultaneous Transmission Combination
1.	WWAN + BT
2.	WWAN + WLAN

Note:

1. WLAN and BT share the same antenna in time-switched way and cannot transmit simultaneously.
2. GSM and WCDMA share the same antenna, and cannot transmit simultaneously.
3. EUT will choose either WLAN2.4G or WLAN5G according to the network signal condition; therefore, they will not transmit simultaneously.
4. EUT will choose either GSM or WCDMA according to the network signal condition; therefore, they will not transmit simultaneously.
5. Mobile hotspot only supports 2.4GHz WLAN operation; mobile hotspot of 5GHz WLAN operation is disabled.
6. The maximum SAR summation is calculated based on the same configuration and test position.
7. If 1g-SAR scalar summation < 1.6W/kg, simultaneous SAR measurement is not necessary.

<Head SAR>

Position	WWAN				WLAN2.4G			WWAN + WLAN
	WWAN Band	Plot No	Power Drift (dB)	Max. WWAN SAR (W/kg)	Plot No	Power Drift (dB)	Max. WLAN SAR (W/kg)	
Right Cheek	GSM850	60	-0.061	0.252	36	0.063	0.009	**0.26**
	GSM1900	68	0.125	0.473	36	0.063	0.009	**0.48**
	WCDMA V	64	0.086	0.283	36	0.063	0.009	**0.29**
	WCDMA II	77	0.01	0.863	36	0.063	0.009	**0.87**
Right Tilted	GSM850	61	0.015	0.171	37	0.065	0.002	**0.17**
	GSM1900	69	-0.019	0.162	37	0.065	0.002	**0.16**
	WCDMA V	65	0.027	0.198	37	0.065	0.002	**0.20**
	WCDMA II	73	-0.138	0.321	37	0.065	0.002	**0.32**
Left Cheek	GSM850	62	0.066	0.2	38	0.055	0.019	**0.22**
	GSM1900	70	0.01	0.214	38	0.055	0.019	**0.23**
	WCDMA V	66	-0.048	0.233	38	0.055	0.019	**0.25**
	WCDMA II	74	0.101	0.412	38	0.055	0.019	**0.43**
Left Tilted	GSM850	63	-0.056	0.132	39	0.096	0.009	**0.14**
	GSM1900	71	-0.027	0.157	39	0.096	0.009	**0.17**
	WCDMA V	67	-0.019	0.152	39	0.096	0.009	**0.16**
	WCDMA II	75	-0.029	0.271	39	0.096	0.009	**0.28**

Position	WWAN				WLAN5G			WWAN + WLAN
	WWAN Band	Plot No	Power Drift (dB)	Max. WWAN SAR (W/kg)	Plot No	Power Drift (dB)	Max. WLAN SAR (W/kg)	
Right Cheek	GSM850	60	-0.061	0.252	32	0.009	0.021	**0.27**
	GSM1900	68	0.125	0.473	32	0.009	0.021	**0.49**
	WCDMA V	64	0.086	0.283	32	0.009	0.021	**0.30**
	WCDMA II	77	0.01	0.863	32	0.009	0.021	**0.88**
Right Tilted	GSM850	61	0.015	0.171	29	0.159	0.018	**0.19**
	GSM1900	69	-0.019	0.162	29	0.159	0.018	**0.18**
	WCDMA V	65	0.027	0.198	29	0.159	0.018	**0.22**
	WCDMA II	73	-0.138	0.321	29	0.159	0.018	**0.34**
Left Cheek	GSM850	62	0.066	0.2	34	0.106	0.026	**0.23**
	GSM1900	70	0.01	0.214	34	0.106	0.026	**0.24**
	WCDMA V	66	-0.048	0.233	34	0.106	0.026	**0.26**
	WCDMA II	74	0.101	0.412	34	0.106	0.026	**0.44**
Left Tilted	GSM850	63	-0.056	0.132	35	0.15	0.007	**0.14**
	GSM1900	71	-0.027	0.157	35	0.15	0.007	**0.16**
	WCDMA V	67	-0.019	0.152	35	0.15	0.007	**0.16**
	WCDMA II	75	-0.029	0.271	35	0.15	0.007	**0.28**

<Hotspot SAR>

	WWAN				WLAN2.4G			WWAN + WLAN
Position	WWAN Band	Plot No	Power Drift (dB)	Max. WWAN SAR (W/kg)	Plot No	Power Drift (dB)	Max. WLAN SAR (W/kg)	
Front	GSM850	95	0.017	0.276	40	0.012	0.003	**0.28**
	GSM1900	78	-0.024	0.385	40	0.012	0.003	**0.39**
	WCDMA V	101	-0.01	0.269	40	0.012	0.003	**0.27**
	WCDMA II	85	-0.064	0.621	40	0.012	0.003	**0.62**
Back	GSM850	96	-0.023	0.566	41	0.042	0.036	**0.60**
	GSM1900	79	-0.019	0.505	41	0.042	0.036	**0.54**
	WCDMA V	102	0.052	0.493	41	0.042	0.036	**0.53**
	WCDMA II	86	-0.121	0.84	41	0.042	0.036	**0.88**
Left Side	GSM850	97	0.026	0.199	-			**0.20**
	GSM1900	80	0.029	0.052	-			**0.05**
	WCDMA V	103	0.056	0.2	-			**0.20**
	WCDMA II	87	0.065	0.086	-			**0.09**
Right Side	GSM850	98	0	0.375	44	0.032	0.024	**0.40**
	GSM1900	81	0.094	0.173	44	0.032	0.024	**0.20**
	WCDMA V	104	0.088	0.325	44	0.032	0.024	**0.35**
	WCDMA II	88	0.134	0.289	44	0.032	0.024	**0.31**
Top Side	GSM850	-			45	-0.11	0.019	**0.02**
	GSM1900	-			45	-0.11	0.019	**0.02**
	WCDMA V	-			45	-0.11	0.019	**0.02**
	WCDMA II	-			45	-0.11	0.019	**0.02**
Bottom Side	GSM850	99	0.025	0.13	-			**0.13**
	GSM1900	82	0.128	0.367	-			**0.37**
	WCDMA V	105	0.008	0.1	-			**0.10**
	WCDMA II	89	0.073	0.595	-			**0.60**

<Body-worn SAR>

Position	WWAN				WLAN2.4G			WWAN + WLAN
	WWAN Band	Plot No	Power Drift	Max. WWAN SAR (W/kg)	Plot No	Power Drift	Max. WLAN SAR (W/kg)	
Front	GSM850	95	0.017	0.276	40	0.012	0.003	**0.28**
	GSM1900	78	-0.024	0.385	40	0.012	0.003	**0.39**
	WCDMA V	101	-0.01	0.269	40	0.012	0.003	**0.27**
	WCDMA II	85	-0.064	0.621	40	0.012	0.003	**0.62**
Back	GSM850	96	-0.023	0.566	41	0.042	0.036	**0.60**
	GSM1900	79	-0.019	0.505	41	0.042	0.036	**0.54**
	WCDMA V	102	0.052	0.493	41	0.042	0.036	**0.53**
	WCDMA II	86	-0.121	0.84	41	0.042	0.036	**0.88**
Back (w/ Headset)	GSM850	100	0.078	0.502	42	0.044	0.035	**0.54**
	GSM1900	84	0.046	0.473	42	0.044	0.035	**0.51**
	WCDMA V	106	0.107	0.443	42	0.044	0.035	**0.48**
	WCDMA II	90	0.05	0.799	42	0.044	0.035	**0.83**

Position	WWAN				WLAN5G			WWAN + WLAN
	WWAN Band	Plot No	Power Drift	Max. WWAN SAR (W/kg)	Plot No	Power Drift	Max. WLAN SAR (W/kg)	
Front	GSM850	95	0.017	0.276	1	0.00	0.002	**0.28**
	GSM1900	78	-0.024	0.385	1	0.00	0.002	**0.39**
	WCDMA V	101	-0.01	0.269	1	0.00	0.002	**0.27**
	WCDMA II	85	-0.064	0.621	1	0.00	0.002	**0.62**
Back	GSM850	96	-0.023	0.566	10	0.139	0.083	**0.65**
	GSM1900	79	-0.019	0.505	10	0.139	0.083	**0.59**
	WCDMA V	102	0.052	0.493	10	0.139	0.083	**0.58**
	WCDMA II	86	-0.121	0.84	10	0.139	0.083	**0.92**
Back (w/ Headset)	GSM850	100	0.078	0.502	10	0.139	0.083	**0.59**
	GSM1900	84	0.046	0.473	10	0.139	0.083	**0.56**
	WCDMA V	106	0.107	0.443	10	0.139	0.083	**0.53**
	WCDMA II	90	0.05	0.799	10	0.139	0.083	**0.88**

11.5 Scaled SAR Value to Maximum Tune-up Tolerances

The following measured results were scaled to the maximum tune-up tolerance, according to the output power of the channel tested for the highest measured results in each frequency band.

Test Configuration		Mode	CH	Freq. (MHz)	Power (dBm)		SAR (W/kg)	
					MAX tune up limit	Measured	Measured	Scaled
Body-Worn & Hotspot	Back	GSM 850 (GPRS class 10)	128	824.2	30.5	29.95	0.566	0.642
Body-Worn & Hotspot	Back	GSM 1900 (GPRS class 12)	512	1850.2	25	24.69	0.505	0.542
Body-Worn & Hotspot	Back	WCDMA V	4182	836.4	22.5	21.8	0.493	0.579
Head	Right Cheek	WCDMA II	9538	1907.6	22.5	21.96	0.863	0.977
Body-Worn & Hotspot	Back	WLAN2.4G	6	2437	16.5	16.29	0.036	0.038
Body-Worn	Back	WLAN5G	40	5200	12.5	12.39	0.073	0.081
Body-Worn	Back	WLAN5G	56	5280	12.5	12.37	0.072	0.080
Body-Worn	Back	WLAN5G	140	5700	12.5	12.30	0.078	0.087
Body-Worn	Back	WLAN5G	153	5765	12.5	12.27	0.053	0.060

Note: Scaled-SAR is for information only to show compliance when scaled to the maximum rated power, not for reporting purpose

Test Engineer： Michael Yang, Angelo Chang, Aaron Chen, Bevis Chang, San Lin, Nick Yu, Vic Yang, Ken Li, and Jack Wu

12. Uncertainty Assessment

The component of uncertainly may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainly by the statistical analysis of a series of observations is termed a Type An evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 12.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor[(a)]	1/k[(b)]	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 12.1 Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						**± 22.0 %**	**± 21.5 %**

Table 12.2 Uncertainty Budget of DASY for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.55	Normal	1	1	1	± 6.55 %	± 6.55 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	2.0	Rectangular	√3	1	1	± 1.2 %	± 1.2 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Probe Positioning	9.9	Rectangular	√3	1	1	± 5.7 %	± 5.7 %
Max. SAR Eval.	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 12.8 %	± 12.6 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						**± 25.6 %**	**± 25.2 %**

Table 12.3 Uncertainty Budget of DASY for frequency range 3 GHz to 6 GHz

13. References

[1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”

[2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992

[3] IEEE Std. 1528-2003, “Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, December 2003

[4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), “Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields”, June 2001

[5] SPEAG DASY System Handbook

[6] FCC KDB 248227 D01 v01r02, “SAR Measurement Procedures for 802.11 a/b/g Transmitters”, May 2007

[7] FCC KDB 447498 D01 v04, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, November 2009

[8] FCC KDB 648474 D01 v01r05, “SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas”, September 2008

[9] FCC KDB 941225 D01 v02, “SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA”, October 2007

[10] FCC KDB 941225 D02 v02 "3GPP R6 HSPA and R7 HSPA+ SAR Guidance", December 2009.

[11] FCC KDB 941225 D03 v01, “Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE”, December 2008

[12] FCC KDB 941225 D06 v01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", April 2011