


2. Sample Label

	1	2	3	4	5	6	7	8		
A			Rev. No							
B	C2.0		36		36					
C			1:1 dxf파일		30					
D			7.0		30					
E			4.0		10					
F			10		30					
G	Technical Description 1. Use 'FILM' provided by 'SAMSUNG' for letter and contents 2. Background color is 'WHITE', letter color is 'BLACK' (reverse for SAMSUNG LOGO) 3. Put 'release paper' on the back side after the adhesive. 4. No blur and spread for letter 5. Proceed with manufacturing process after the approval of R&D Group 6. The spec. of product must be based on approved limit samples. 7. Stock on as a ROLL 8. Follow drawing instruction above for CE or WEEE mark 9. Unify material and color as one color (blue) for glassine paper									
H										
I										
J										
K	MAT.		White polypropylene 80 μ			FIN.		Semitransparency OPP Lamination + UVP Coating		
L	TITLE		GT-I9108 LABEL (R)-MAIN-EU							
	UNIT		mm		DESIGNED		CHECKED		APPROVED	
	TOLERANCE		+0.0 -0.1		AN DAE GEUN		kyeonghwan jo		junesop kim	
	SCALE		N/S		110315		110315		110315	
	Manufacture		HANSUNG P&I		110315		110315		110315	
	SAMSUNG ELECTRONICS		Doc. CODE		GH68-I					

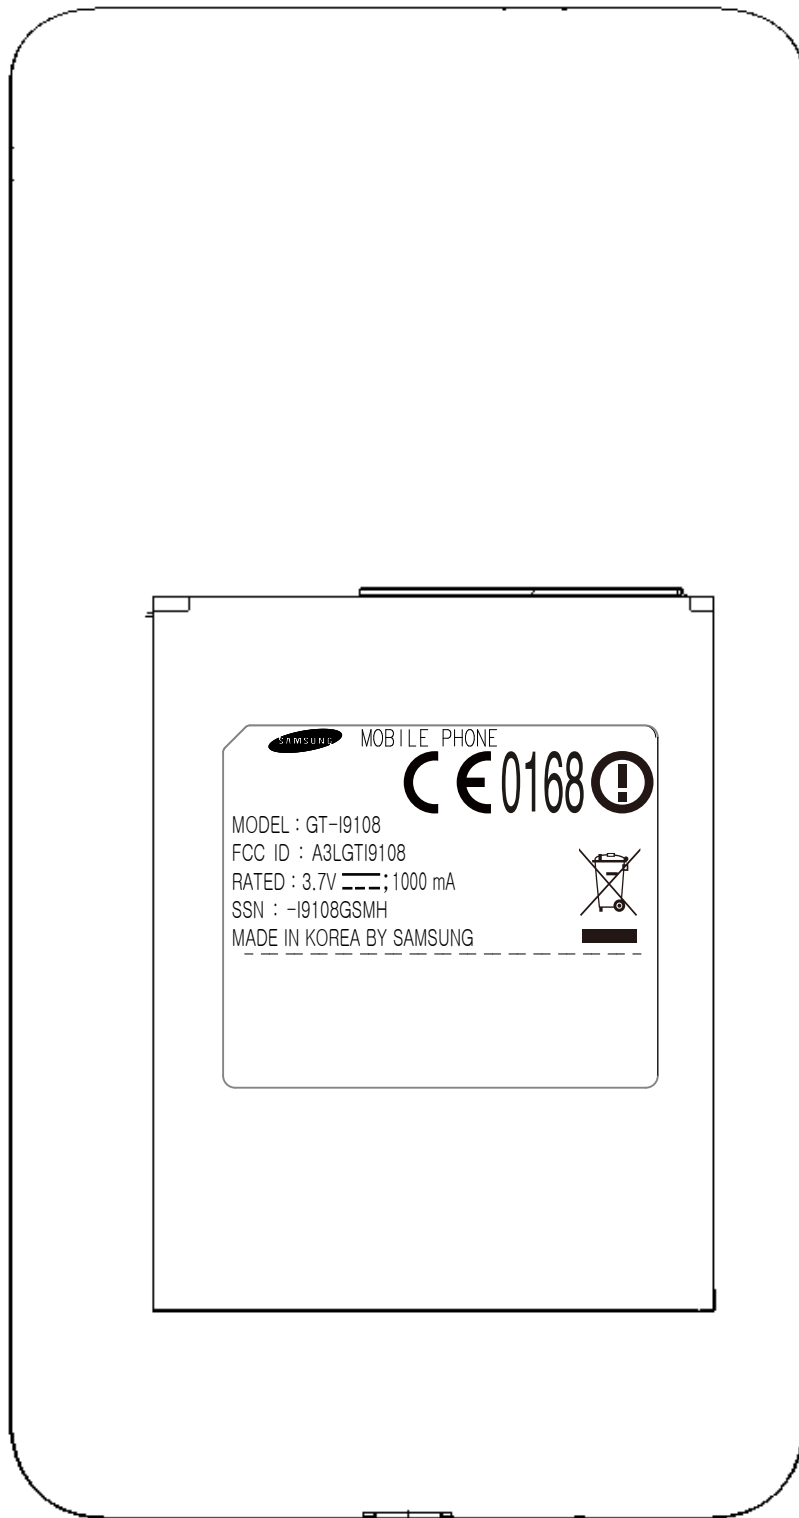

The label is placed inside the battery compartment