PCTEST ENGINEERING LABORATORY, INC.
6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. +1.410.290.6652 / Fax +1.410.290.6654
http://www.pctestlab.com

SAR EVALUATION REPORT

Applicant Name:
Samsung Electronics, Co. Ltd.
416, Maetan 3-dong, Yeongtong-gu, Suwon-si
Gyeonggi-do, 443-742
Republic of Korea

Date of Testing:
04/16/12 - 04/19/12
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Document Serial No.:
0Y1204170484.A3L

FCC ID: **A3LGTI9300T**

APPLICANT: **SAMSUNG ELECTRONICS, CO. LTD.**

DUT Type: Portable Handset
Application Type: Certification
FCC Rule Part(s): CFR §2.1093
Model(s): GT-I9300T
Test Device Serial No.: Pre-Production [S/N: R31C40A37SK, R31C40A37QT]

Band & Mode	Tx Frequency	Conducted Power [dBm]	SAR		
			1 gm Head (W/kg)	1 gm Body-Worn (W/kg)	1 gm Hotspot (W/kg)
GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	32.65	0.18	1.03	1.03
WCDMA/HSPA 850	826.40 - 846.60 MHz	22.65	0.17	0.49	0.49
GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	30.20	0.25	0.95	0.95
WCDMA/HSPA 1900	1852.4 - 1907.6 MHz	23.06	0.41	0.59	0.62
2.4 GHz WLAN	2412 - 2462 MHz	13.79	0.15	0.46	0.46
5.8 GHz WLAN	5745 - 5825 MHz	14.48	0.03	0.40	
5.2 GHz WLAN	5180 - 5240 MHz	13.48	0.01	0.22	
5.3 GHz WLAN	5260 - 5320 MHz	14.07	0.07	0.87	
5.5 GHz WLAN	5500 - 5700 MHz	14.90	0.03	0.54	
Bluetooth	2402 - 2480 MHz	8.65	N/A		
Simultaneous SAR per KDB 690783 D01:			0.55	1.46	1.49

Note: Powers in the above table represent output powers for the SAR test configurations and may not represent the highest output powers for all configurations for each mode.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in FCC/OET Bulletin 65 Supplement C (2001), IEEE 1528-2003 and in applicable Industry Canada Radio Standards Specifications (RSS); for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

Randy Ortanez
President

ACCREDITED
TESTING LABORATORY
CERTIFICATE #2041.01

© 2012 PCTEST Engineering Laboratory, Inc.

TABLE OF CONTENTS

1 DEVICE UNDER TEST 3

2 INTRODUCTION 6

3 SAR MEASUREMENT SETUP 7

4 DOSIMETRIC ASSESSMENT 8

5 DEFINITION OF REFERENCE POINTS 9

6 TEST CONFIGURATION POSITIONS FOR HANDSETS 10

7 FCC RF EXPOSURE LIMITS 13

8 FCC MEASUREMENT PROCEDURES 14

9 RF CONDUCTED POWERS 17

10 SYSTEM VERIFICATION 22

11 SAR DATA SUMMARY 25

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS 33

13 EQUIPMENT LIST 36

14 MEASUREMENT UNCERTAINTIES 37

15 CONCLUSION 39

16 REFERENCES 40

© 2012 PCTEST Engineering Laboratory, Inc.

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Tx Frequency
GSM/GPRS/EDGE 850	824.20 - 848.80 MHz
WCDMA/HSPA 850	826.40 - 846.60 MHz
GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz
WCDMA/HSPA 1900	1852.4 - 1907.6 MHz
2.4 GHz WLAN	2412 - 2462 MHz
5.8 GHz WLAN	5745 - 5825 MHz
5.2 GHz WLAN	5180 - 5240 MHz
5.3 GHz WLAN	5260 - 5320 MHz
5.5 GHz WLAN	5500 - 5700 MHz
Bluetooth	2402 - 2480 MHz
NFC	13.56 MHz

1.2 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the standard battery and will be the only battery available from the manufacturer for this model. Therefore all SAR tests were performed with the standard battery which already integrates the NFC antenna. The device restricts the battery used to battery model: **EB-L1G6LLU**.

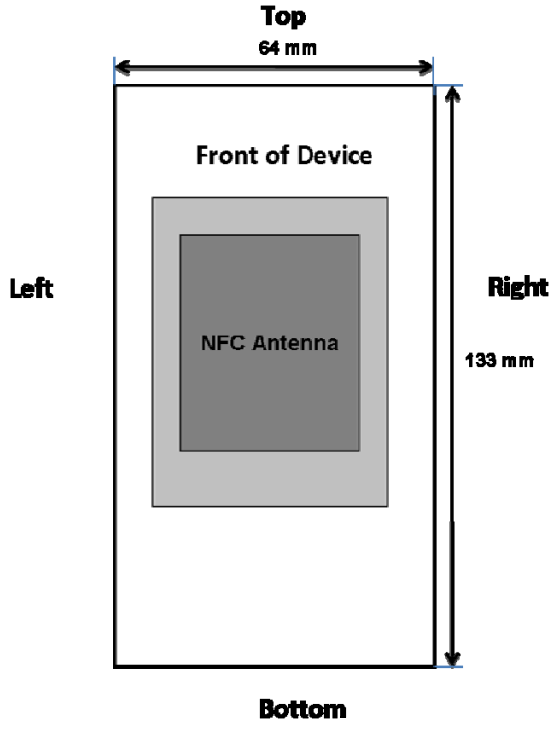

Figure 1-1
NFC Antenna Locations

© 2012 PCTEST Engineering Laboratory, Inc.

1.3 DUT Antenna Locations

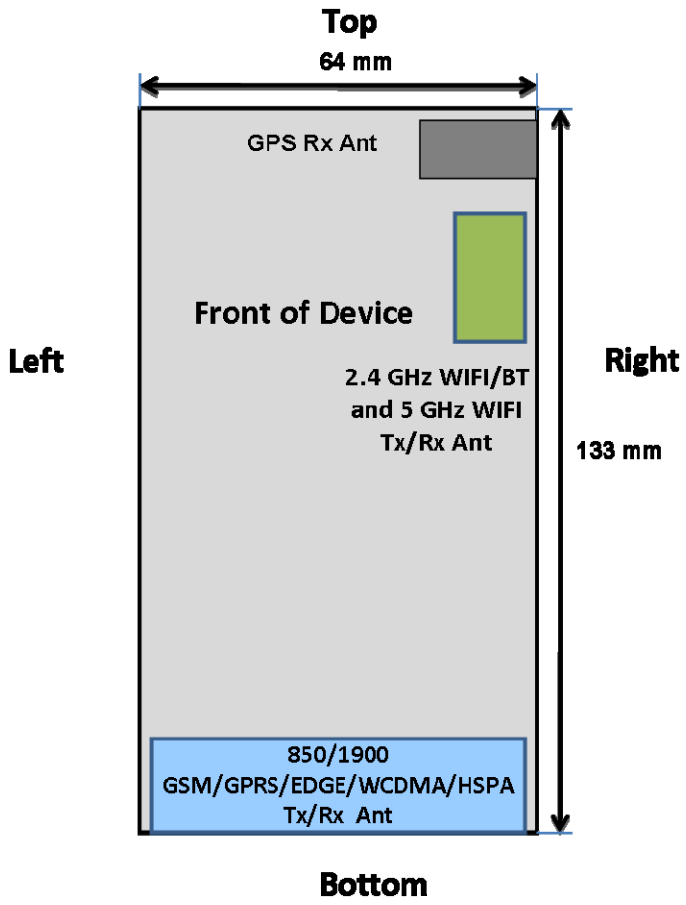

Figure 1-2
DUT Antenna Locations

Table 1-1
Mobile Hotspot Sides for SAR Testing

Mobile Hotspot Sides for SAR Testing						
Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
WCDMA 850	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes	Yes
WCDMA 1900	Yes	Yes	No	Yes	Yes	Yes
2.4 GHz WLAN	Yes	Yes	Yes	No	Yes	No

Note: Particular DUT edges were not required to be evaluated for Wireless Router SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06 guidance, page 2. The antenna document shows the distances between the transmit antennas and the edges of the device. When the wireless router mode is enabled, all 5 GHz bands are disabled. Therefore 5 GHz WIFI is not considered in this section.

© 2012 PCTEST Engineering Laboratory, Inc.

1.4 SAR Test Exclusions Applied

(A) WIFI/BT

Since Wireless Router operations are not allowed by the chipset firmware using 5 GHz WIFI, only 2.4 GHz WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations in KDB 941225 D06.

The separation between the main antenna and the Bluetooth/WLAN antennas is 81 mm. Maximum RF Conducted Power of Bluetooth Tx is 7.328 mW (Please refer to DSS EMC Report for complete Bluetooth Conducted Power). Maximum RF Conducted Power of 2.4 GHz WLAN is 47.863 mW. Maximum RF Conducted Power of 5GHz WLAN is 32.509 mW.

2.4 GHz and 5 GHz WIFI and Bluetooth share the same antenna path and cannot transmit simultaneously.

Per KDB Publication 648474, **Bluetooth SAR was not required** based on the maximum conducted power, the Bluetooth/WLAN to main antenna separation distance and Body-SAR of the main antenna.

This device supports 20MHz and 40MHz Bandwidths for IEEE 802.11n for 5 GHz WIFI only. 802.11n was not evaluated since the average output power of each bandwidth was not more than 0.25 dB higher than the average output power of 802.11a mode.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported. Therefore GSM Voice cannot transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01.

When the user utilizes multiple services in WCDMA 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the WCDMA+WLAN scenario also represents the WCDMA Voice/DATA + WLAN Hotspot scenario.

1.5 Power Reduction for SAR

There is no power reduction for any band/mode implemented in this device for SAR purposes.

1.6 Guidance Applied

- FCC OET Bulletin 65 Supplement C [June 2001]
- IEEE 1528-2003
- FCC KDB 941225 (2G/3G and Hotspot)
- FCC KDB 248227 (802.11)
- FCC KDB 648474 (Simultaneous)
- FCC KDB 865664 (5 GHz)

© 2012 PCTEST Engineering Laboratory, Inc.

2 INTRODUCTION

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [24]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

2.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 2-1).

Equation 2-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt}\left(\frac{dU}{dm}\right) = \frac{d}{dt}\left(\frac{dU}{\rho\, dv}\right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

σ = conductivity of the tissue-simulating material (S/m)
ρ = mass density of the tissue-simulating material (kg/m^3)
E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

© 2012 PCTEST Engineering Laboratory, Inc.

3 SAR MEASUREMENT SETUP

3.1 Automated SAR Measurement System

Measurements are performed using the DASY automated dosimetric SAR assessment system. The DASY is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of a high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the SAM phantom containing the head or body equivalent material. The robot is a six-axis industrial robot, performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). See www.speag.com for more information about the specification of the SAR assessment system.

Figure 3-1
SAR Measurement System

Figure 3-2
Near-Field Probe

Table 3-1
Composition of the Tissue Equivalent Matter

Frequency (MHz)	835	835	1900	1900	2450	2450	5200-5800	5200-5800
Tissue	Head	Body	Head	Body	Head	Body	Head	Body
Ingredients (% by weight)								
Bactericide	0.1	0.1						
DGBE			44.92	29.44	7.99	26.7		
HEC	1	1						
NaCl	1.45	0.94	0.18	0.39	0.16	0.1		
Sucrose	57	44.9						
Triton X-100					19.97		17.24	
Diethylenglycol monohexylether							17.24	
Polysorbate (Tween) 80								20
Water	40.45	53.06	54.9	70.17	71.88	73.2	65.52	80

© 2012 PCTEST Engineering Laboratory, Inc.

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure:



Figure 4-1
Sample SAR Area Scan

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head interface and the horizontal grid resolution was 15mm and 15mm for frequencies < 3 GHz in the x and y directions respectively. When applicable, for frequencies above 3 GHz, a 10 mm by 10 mm resolution was used.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1 gram cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak area of the maximum absorption was determined by spline interpolation. Around this point, a volume of 32mm x 32mm x 30mm (fine resolution volume scan, zoom scan) was assessed by measuring at least 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):

   a. The data was extrapolated to the surface of the outer-shell of the phantom. The combined distance extrapolated was the combined distance from the center of the dipoles 2.7mm away from the tip of the probe housing plus the 1.2 mm distance between the surface and the lowest measuring point. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).

   b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.

   c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.
5. For testing 5 GHz devices, finer resolution zoom scans were performed as specified by FCC SAR Measurement Requirements for 3 – 6 GHz, KDB 865664 publication. The 5 GHz zoom scan requires a minimum volume of 24mm x 24mm x 20mm and 7 x 7 x 11 points.

© 2012 PCTEST Engineering Laboratory, Inc.

5 DEFINITION OF REFERENCE POINTS

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point "M" is the reference point for the center of the mouth, "LE" is the left ear reference point (ERP), and "RE" is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 5-2). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].



Figure 5-1
Close-Up Side view of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point" (See Figure 5-3). The "test device reference point" was than located at the same level as the center of the ear reference point. The test device was positioned so that the "vertical centerline" was bisecting the front surface of the handset at it's top and bottom edges, positioning the "ear reference point" on the outer surface of the both the left and right head phantoms on the ear reference point.

Figure 5-2
Front, back and side view of SAM Twin Phantom

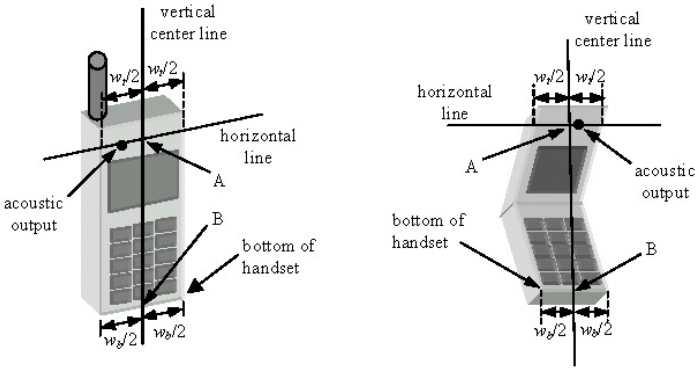

Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

© 2012 PCTEST Engineering Laboratory, Inc.

6 TEST CONFIGURATION POSITIONS FOR HANDSETS

6.1 Device Holder

The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity ε = 3 and loss tangent δ = 0.02.

6.2 Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

Figure 6-1 Front, Side and Top View of Cheek/Touch Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical was respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15º Tilt

With the test device aligned in the “Cheek/Touch Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15degree.
2. The phone was then rotated around the horizontal line by 15 degree.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

© 2012 PCTEST Engineering Laboratory, Inc.

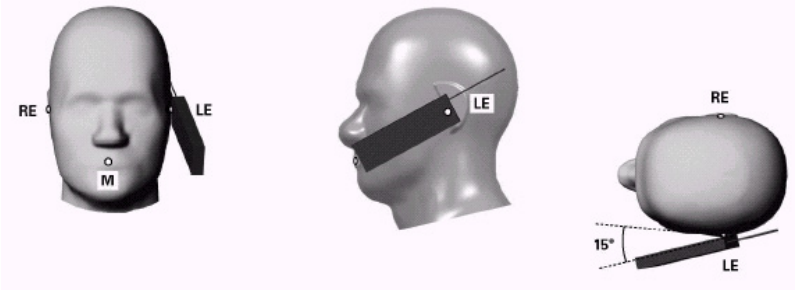

Figure 6-2 Front, Side and Top View of Ear/15º Tilt Position



Figure 6-3
Side view w/ relevant markings

Figure 6-4 Body SAR Sample Photo
(Not Actual EUT)

6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document publication 648474. The SAR required in these regions of SAM should be measured using a flat phantom. **Rectangular shaped phones** should be positioned with its bottom edge positioned from the flat phantom with the same distance provided by the cheek touching position using SAM. The ear reference point (ERP, as defined for SAM) of the phone should be positioned ½ cm from the flat phantom shell. **Clam-shell phones** should be positioned with the hinge against a smooth edge of the flat phantom where the upper half of the phone is unfolded and extended beyond the phantom side wall. The lower half of the phone is secured in the test device holder at a fixed distance below the flat phantom determined by the minimum separation along the lower edge of the phone in the cheek touching position using SAM. Any case with substantial variation in separation distance along the lower edge of a clam shell is discussed with the FCC for best-to-use methodology.

The latest IEEE 1528 committee developments propose the usage of a tilted phantom when the antenna of the phone is mounted at the bottom or in all cases the peak absorption is in the chin region. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed individually from the table for emptying and cleaning.



Figure 6-5 Twin SAM Chin20

6.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). A device with a headset output is tested with a headset connected to the device.

© 2012 PCTEST Engineering Laboratory, Inc.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.6 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive internet connectivity through simultaneous transmission of WIFI in conjunction with a separate licensed transmitter. The FCC has provided guidance in KDB Publication 941225 D06 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. Therefore, SAR must be evaluated for each frequency transmission and mode separately and summed with the WIFI transmitter according to KDB 648474 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.

© 2012 PCTEST Engineering Laboratory, Inc.

7 FCC RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT *General Population* (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT *Occupational* (W/kg) or (mW/g)
SPATIAL PEAK SAR Brain	1.6	8.0
SPATIAL AVERAGE SAR Whole Body	0.08	0.4
SPATIAL PEAK SAR Hands, Feet, Ankles, Wrists	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

© 2012 PCTEST Engineering Laboratory, Inc.

8 FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

8.1 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01 “SAR Measurement Procedures for 3G Devices” v02, October 2007.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

8.2 SAR Measurement Conditions for WCDMA

8.2.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1s”.

8.2.2 Head SAR Measurements for Handsets

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

8.2.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”.

8.2.4 SAR Measurements for Handsets with Rel 5 HSDPA

Body SAR for HSDPA is not required for handsets with HSDPA capabilities when the maximum average output power of each RF channel with HSDPA active is less than 0.25 dB higher than that measured without HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is $\leq$ 75% of the SAR limit. Otherwise, SAR is measured for HSDPA, using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration measured in 12.2 kbps RMC without HSDPA, on the maximum output channel with the body exposure configuration that resulted in the highest SAR in 12.2 kbps RMC mode for that RF channel.

© 2012 PCTEST Engineering Laboratory, Inc.

The H-set used in FRC for HSDPA should be configured according to the UE category of a test device. The number of HS-DSCH/HSPDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the applicable H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the FRC for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 2 ms to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors of βc=9 and βd=15, and power offset parameters of ΔACK= ΔNACK =5 and ΔCQI=2 is used. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the FRC.

8.2.5 SAR Measurements for Handsets with Rel 6 HSUPA

Body SAR for HSUPA is not required when the maximum average output of each RF channel with HSUPA/HSDPA active is less than 0.25 dB higher than as measured without HSUPA/HSDPA using 12.2 kbps RMC and maximum SAR for 12.2 kbps RMC is ≤ 75 % of the SAR limit. Otherwise SAR is measured on the maximum output channel for the body exposure configuration produced highest SAR in 12.2 kbps RMC for that RF channel, using the additional procedures under "Release 6 HSPA data devices"

Head SAR for VOIP operations under HSPA is not required when maximum average output of each RF channel with HSPA is less than 0.25 dB higher than as measured using 12.2 kbps RMC. Otherwise SAR is measured using same HSPA configuration as used for body SAR.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (1)	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (2) (dB)	MPR (dB)	AG (4) Index	E-TFCI
1	11/15 (3)	15/15 (3)	64	11/15 (3)	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1}: 47/15 β_{ed2}: 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (4)	15/15 (4)	64	15/15 (4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.
Note 2: CM = 1 for β_c/β_d =12/15, β_{hs}/β_c=24/15. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to β_c = 10/15 and β_d = 15/15.
Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to β_c = 14/15 and β_d = 15/15.
Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.
Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

8.3 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 for more details.

8.3.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement,

© 2012 PCTEST Engineering Laboratory, Inc.

according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

8.3.2 Frequency Channel Configurations [27]

For 2.4 GHz, the highest average RF output power channel between the low, mid and high channel at the lowest data rate was selected for SAR evaluation in 802.11b mode. 802.11g/n modes and higher data rates for 802.11b were additionally evaluated for SAR if the output power of the respective mode was 0.25 dB or higher than the powers of the SAR configurations tested in the 802.11b mode.

For 5 GHz, the highest average RF output power channel across the default test channels at the lowest data rate was selected for SAR evaluation in 802.11a. When the adjacent channels are higher in power then the default channels, these “required channels” were considered instead of the default channels for SAR testing. 802.11n modes and higher data rates for 802.11a/n were evaluated only if the respective mode was 0.25 dB or higher than the 802.11a mode.

If the maximum extrapolated peak SAR of the zoom scan for the highest output channel was less than 1.6 W/kg or if the 1g averaged SAR was less than 0.8 W/kg, SAR testing was not required for the other test channels in the band.

© 2012 PCTEST Engineering Laboratory, Inc.

9 RF CONDUCTED POWERS

9.1 Licensed Transmitter RF Conducted Powers

9.1.1 GSM Conducted Powers

		Maximum Burst-Averaged Output Power								
		Voice	*GPRS/EDGE Data (GMSK)*				*EDGE Data (8-PSK)*			
Band	**Channel**	**GSM [dBm] CS (1 Slot)**	**GPRS [dBm] 1 Tx Slot**	**GPRS [dBm] 2 Tx Slot**	**GPRS [dBm] 3 Tx Slot**	**GPRS [dBm] 4 Tx Slot**	**EDGE [dBm] 1 Tx Slot**	**EDGE [dBm] 2 Tx Slot**	**EDGE [dBm] 3 Tx Slot**	**EDGE [dBm] 4 Tx Slot**
Cellular	128	32.60	32.58	29.66	28.60	**29.66**	27.10	27.08	27.07	24.11
	190	32.65	32.66	29.75	28.71	**29.75**	27.15	27.18	27.19	24.14
	251	32.65	32.67	29.75	28.71	**29.75**	27.16	27.20	27.13	24.15
PCS	512	30.28	30.30	27.97	26.56	**27.97**	26.71	26.70	26.62	23.92
	661	30.20	30.22	27.97	26.55	**27.97**	26.68	26.66	26.59	23.87
	810	30.01	30.03	27.90	26.47	**27.90**	26.60	26.67	26.55	23.81
		Calculated Maximum Frame-Averaged Output Power								
		Voice	*GPRS/EDGE Data (GMSK)*				*EDGE Data (8-PSK)*			
Band	**Channel**	**GSM [dBm] CS (1 Slot)**	**GPRS [dBm] 1 Tx Slot**	**GPRS [dBm] 2 Tx Slot**	**GPRS [dBm] 3 Tx Slot**	**GPRS [dBm] 4 Tx Slot**	**EDGE [dBm] 1 Tx Slot**	**EDGE [dBm] 2 Tx Slot**	**EDGE [dBm] 3 Tx Slot**	**EDGE [dBm] 4 Tx Slot**
Cellular	128	23.57	23.55	23.64	24.34	**26.65**	18.07	21.06	22.81	21.10
	190	23.62	23.63	23.73	24.45	**26.74**	18.12	21.16	22.93	21.13
	251	23.62	23.64	23.73	24.45	**26.74**	18.13	21.18	22.87	21.14
PCS	512	21.25	21.27	21.95	22.30	**24.96**	17.68	20.68	22.36	20.91
	661	21.17	21.19	21.95	22.29	**24.96**	17.65	20.64	22.33	20.86
	810	20.98	21.00	21.88	22.21	**24.89**	17.57	20.65	22.29	20.80

Note:

1. Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
2. The bolded GPRS modes were selected for SAR Testing according to the highest frame-averaged output power table according to KDB 941225 D03.
3. CS1 coding scheme was used in GPRS output power measurements and SAR Testing, as a condition where GMSK modulation was ensured. It was investigated that CS1 - CS4 settings do not have any impact on the output levels in the GPRS modes.
4. MCS7 coding scheme was used to measure the output powers for EDGE, as a condition where 8PSK modulation was ensured. It was investigated that MCS settings producing 8PSK Modulation do not impact on the output powers in EDGE mode.

GSM Class: B
GPRS Multislot class: 33 (max 4 Tx Uplink slots)
EDGE Multislot class: 33 (max 4 Tx Uplink slots)
DTM Multislot Class: N/A

© 2012 PCTEST Engineering Laboratory, Inc.

9.1.2 HSPA Conducted Powers

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			PCS Band [dBm]			MPR [dB]
			4132	4183	4233	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	22.73	22.65	22.59	23.31	23.06	23.18	-
99		12.2 kbps AMR	22.72	22.67	22.59	23.26	23.04	23.10	-
6	HSDPA	Subtest 1	22.72	22.68	22.58	23.33	23.04	23.10	0
6		Subtest 2	22.48	22.41	22.32	23.09	22.82	22.95	0
6		Subtest 3	22.21	22.18	22.06	22.78	22.55	22.60	0.5
6		Subtest 4	21.94	21.94	21.86	22.58	22.31	22.40	0.5
6	HSUPA	Subtest 1	21.72	21.67	21.60	22.35	22.03	22.17	0
6		Subtest 2	20.34	20.39	20.20	21.12	20.85	20.90	2
6		Subtest 3	21.42	21.39	21.27	22.10	21.87	21.92	1
6		Subtest 4	20.93	20.88	20.77	21.63	21.11	21.45	2
6		Subtest 5	22.05	21.72	21.64	22.61	22.10	22.20	0

WCDMA SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

It is expected by the manufacturer that MPR for some HSUPA subtests may be as low as 0 dB according to the chipset implementation in this model. Detailed information is included in the operational description explaining how the MPR is applied for this model.

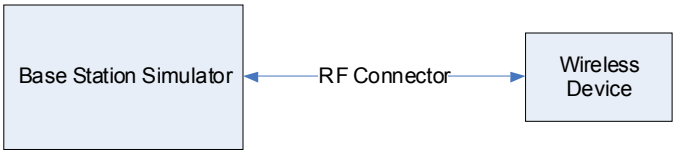

Figure 9-1
Power Measurement Setup

9.2 WLAN Conducted Powers

Table 9-1
IEEE 802.11b Average RF Power

Mode	Freq [MHz]	Channel	Conducted Power [dBm] Data Rate [Mbps]			
			1	2	5.5	11
802.11b	2412	1	13.22	13.32	13.34	13.33
802.11b	2437	6	13.52	13.63	13.59	13.52
802.11b	2462	**11**	**13.79**	13.84	13.76	13.73

Table 9-2
IEEE 802.11g Average RF Power

Mode	Freq [MHz]	Channel	Conducted Power [dBm] Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
802.11g	2412	1	12.29	12.31	12.26	12.28	12.21	12.23	12.28	12.28
802.11g	2437	6	12.54	12.53	12.54	12.54	12.43	12.52	12.45	12.49
802.11g	2462	11	12.71	12.73	12.74	12.66	12.70	12.65	12.67	12.68

© 2012 PCTEST Engineering Laboratory, Inc.

Table 9-3
IEEE 802.11n Average RF Power

Mode	Freq [MHz]	Channel	Conducted Power [dBm] Data Rate [Mbps]							
			6.5/7.2	**13/14.4**	**19.5/21.7**	**26/28.9**	**39/43.4**	**52/57.8**	**58.5/65**	**65/72.2**
802.11n	2412	1	12.23	12.15	12.12	12.24	12.09	12.15	12.22	12.24
802.11n	2437	6	12.43	12.40	12.45	12.39	12.38	12.40	12.41	12.46
802.11n	2462	11	12.57	12.58	12.59	12.55	12.59	12.53	12.63	12.61

Table 9-4
IEEE 802.11a Average RF Power

Mode	Freq [MHz]	Channel	Conducted Power [dBm] Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
802.11a	5180	**36***	**13.48**	13.45	13.33	13.43	13.35	13.43	13.38	13.40
802.11a	5200	40	13.29	13.22	13.22	13.28	13.37	13.27	13.33	13.28
802.11a	5220	44	13.10	13.14	13.14	13.09	13.19	13.17	13.23	13.11
802.11a	5240	48*	13.00	13.04	13.11	13.01	13.13	13.12	13.17	13.07
802.11a	5260	**52***	**14.07**	14.12	14.03	14.03	13.98	13.96	14.07	13.98
802.11a	5280	56	13.93	13.99	13.99	13.94	13.90	13.97	13.93	13.92
802.11a	5300	**60**	**13.87**	13.83	13.80	13.81	13.82	13.91	13.92	13.93
802.11a	5320	64*	13.73	13.78	13.84	13.73	13.79	13.75	13.90	13.80
802.11a	5500	100	14.20	14.23	14.24	14.14	14.21	14.37	14.23	14.34
802.11a	5520	**104***	**14.29**	14.27	14.08	14.29	14.38	14.35	14.38	14.34
802.11a	5540	108	14.29	14.39	14.29	14.42	14.43	14.39	14.49	14.45
802.11a	5560	112	14.38	14.31	14.29	14.45	14.44	14.49	14.46	14.45
802.11a	5580	**116***	**14.45**	14.39	14.47	14.41	14.45	14.54	14.56	14.59
802.11a	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5620	124*	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5660	132	14.74	14.78	14.81	14.79	14.83	14.94	14.92	14.98
802.11a	5680	136*	14.81	14.86	14.95	14.93	14.96	14.94	15.02	14.88
802.11a	5700	**140**	**14.90**	14.91	14.97	14.90	15.04	15.12	15.10	15.12
802.11a	5745	149*	14.00	13.95	14.09	14.06	14.03	14.16	14.16	14.18
802.11a	5765	153	14.09	14.07	14.13	14.13	14.16	14.26	14.25	14.24
802.11a	5785	157*	14.18	14.20	14.21	14.17	14.27	14.29	14.27	14.33
802.11a	5805	161*	14.30	14.32	14.26	14.39	14.29	14.31	14.37	14.41
802.11a	5825	**165**	**14.48**	14.33	14.36	14.35	14.48	14.43	14.49	14.46

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band. (*) – indicates default channels per KDB Publication 248227. When the adjacent channels are higher in power then the default channels, these “required channels” are considered instead of the default channels for SAR testing.

© 2012 PCTEST Engineering Laboratory, Inc.

Table 9-5
IEEE 802.11n Average RF Power

Mode	Freq [MHz]	Channel	Conducted Power [dBm] Data Rate [Mbps] 6.5	13	20	26	39	52	58	65
802.11n	5180	36*	13.18	13.22	13.18	13.14	13.26	13.26	13.20	13.22
802.11n	5200	40	13.06	13.05	13.18	13.09	13.18	13.20	13.12	13.17
802.11n	5220	44	12.85	13.00	12.94	12.94	12.94	12.97	13.05	12.99
802.11n	5240	48*	12.81	12.83	12.82	12.79	12.79	12.90	12.85	12.82
802.11n	5260	52*	13.73	13.84	13.86	13.80	13.83	13.81	13.80	13.84
802.11n	5280	56	13.68	13.74	13.77	13.71	13.78	13.71	13.75	13.82
802.11n	5300	60	13.64	13.68	13.64	13.70	13.73	13.72	13.75	13.73
802.11n	5320	64*	13.60	13.55	13.58	13.62	13.62	13.68	13.58	13.71
802.11n	5500	100	13.17	13.15	13.15	13.12	13.16	13.22	13.21	13.18
802.11n	5520	104*	13.10	12.97	13.24	13.15	13.26	13.22	13.20	13.24
802.11n	5540	108	13.22	13.17	13.22	13.30	13.30	13.34	13.31	13.38
802.11n	5560	112	13.32	13.34	13.25	13.34	13.37	13.40	13.34	13.46
802.11n	5580	116*	13.38	13.40	13.34	13.44	13.51	13.51	13.54	13.52
802.11n	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5620	124*	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5660	132	13.76	13.81	13.75	13.72	13.75	13.84	13.78	13.91
802.11n	5680	136*	13.80	13.82	13.81	13.83	13.92	13.92	13.93	14.00
802.11n	5700	140	13.98	13.92	14.02	13.93	13.93	14.06	14.03	14.03
802.11n	5745	149*	14.03	13.99	14.05	14.06	14.07	14.13	14.16	14.14
802.11n	5765	153	14.06	14.07	14.13	14.14	14.05	14.25	14.18	14.14
802.11n	5785	157*	14.15	14.21	14.13	14.16	14.33	14.32	14.35	14.29
802.11n	5805	161*	14.30	14.17	14.34	14.22	14.27	14.40	14.35	14.37
802.11n	5825	165	14.22	14.34	14.40	14.36	14.39	14.48	14.45	14.50

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Bands. (*) – indicates default channels per KDB Publication 248227. When the adjacent channels are higher in power then the default channels, these "required channels" are considered instead of the default channels for SAR testing.

Table 9-6
IEEE 802.11n Average RF Power

Mode	Freq [MHz]	Channel	40MHz BW 802.11n (5GHz) Conducted Power [dBm] Data Rate [Mbps] 7.2	14.4	21.7	28.9	43.3	57.8	65.0	72.2
802.11n	5190	38*	11.75	11.71	11.83	11.81	11.75	11.76	11.74	11.80
802.11n	5230	46	11.29	11.31	11.31	11.30	11.33	11.47	11.36	11.35
802.11n	5270	54	11.46	11.45	11.57	11.53	11.49	11.51	11.52	11.48
802.11n	5310	62*	11.20	11.22	11.28	11.31	11.18	11.25	11.30	11.29
802.11n	5510	102*	11.81	11.86	11.91	11.95	11.88	11.99	11.98	11.98
802.11n	5550	110	11.51	11.64	11.66	11.60	11.64	11.67	11.78	11.75
802.11n	5630	126	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5670	134	12.24	12.31	12.30	12.26	12.40	12.36	12.40	12.43
Mode	**Freq [MHz]**	**Channel**	**40MHz BW 802.11n (5GHz) Conducted Power [dBm] Data Rate [Mbps] 13.5/15**	**27/30**	**40.5/45**	**54/60**	**81/90**	**108/120**	**121.5/135**	**135/150**
802.11n	5755	151	13.67	13.69	13.68	13.69	13.76	13.72	13.80	13.85
802.11n	5795	159	13.52	13.58	13.57	13.60	13.68	13.66	13.74	13.67

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Bands. (*) – indicates default channels per KDB Publication 248227. When the adjacent channels are higher in power then the default channels, these "required channels" are considered instead of the default channels for SAR testing.

© 2012 PCTEST Engineering Laboratory, Inc.

Justification for reduced test configurations for WIFI channels per KDB Publication 248227:

- For 2.4 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11b were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
- For 5 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11a were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. The other default (or corresponding required) test channels were additionally tested using the lowest data rate since the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is greater than 1.6 W/kg.
- The bolded data rate and channel above were tested for SAR.

Figure 9-2
Power Measurement Setup

© 2012 PCTEST Engineering Laboratory, Inc.

10 SYSTEM VERIFICATION

10.1 Tissue Verification

Table 10-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C˚)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ε	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ε	% dev σ	% dev ε
04/18/2012	835H	22.8	820	0.901	40.97	0.898	41.571	0.33%	-1.45%
			835	0.914	40.83	0.900	41.500	1.56%	-1.61%
			850	0.924	40.59	0.916	41.500	0.87%	-2.19%
04/17/2012	1900H	23.4	1850	1.347	39.15	1.400	40.000	-3.79%	-2.13%
			1880	1.377	39.02	1.400	40.000	-1.64%	-2.45%
			1910	1.406	38.90	1.400	40.000	0.43%	-2.75%
04/18/2012	2450H	22.8	2401	1.828	38.05	1.758	39.298	3.98%	-3.18%
			2450	1.887	37.85	1.800	39.200	4.83%	-3.44%
			2499	1.942	37.64	1.852	39.135	4.86%	-3.82%
04/18/2012	5200-5800H	23.0	5180	4.724	35.68	4.639	36.020	1.83%	-0.94%
			5200	4.711	35.32	4.660	36.000	1.09%	-1.89%
			5260	4.679	35.42	4.720	35.940	-0.87%	-1.45%
			5500	4.872	35.20	4.965	35.650	-1.87%	-1.26%
			5700	5.045	34.87	5.170	35.400	-2.42%	-1.50%
			5800	5.195	34.49	5.270	35.300	-1.42%	-2.29%
			5825	5.141	34.14	5.296	35.275	-2.93%	-3.22%
04/18/2012	835B	23.2	820	0.990	54.12	0.969	55.284	2.17%	-2.11%
			835	1.007	54.01	0.970	55.200	3.81%	-2.16%
			850	1.023	53.87	0.988	55.154	3.54%	-2.33%
04/16/2012	1900B	23.7	1850	1.447	53.72	1.520	53.300	-4.80%	0.79%
			1880	1.482	53.67	1.520	53.300	-2.50%	0.69%
			1910	1.515	53.56	1.520	53.300	-0.33%	0.49%
04/19/2012	2450B	21.9	2401	1.989	50.94	1.903	52.765	4.52%	-3.46%
			2450	2.047	50.76	1.950	52.700	4.97%	-3.68%
			2499	2.119	50.59	2.019	52.638	4.95%	-3.89%
04/19/2012	5200-5800B	23.8	5180	5.292	47.96	5.276	49.041	0.30%	-2.20%
			5200	5.321	47.95	5.299	49.014	0.42%	-2.17%
			5260	5.400	47.80	5.369	48.906	0.58%	-2.26%
			5300	5.468	47.67	5.416	48.851	0.96%	-2.42%
			5500	5.762	47.21	5.650	48.580	1.98%	-2.82%
			5520	5.785	47.13	5.673	48.553	1.97%	-2.93%
			5580	5.889	46.98	5.743	48.471	2.54%	-3.08%
			5700	6.074	46.68	5.880	48.275	3.30%	-3.30%
			5800	6.223	46.41	6.000	48.200	3.72%	-3.71%
			5825	6.282	46.41	6.029	48.132	4.20%	-3.58%

Note: KDB Publication 450824 was ensured to be applied for probe calibration frequencies greater than or equal to 50 MHz of the DUT frequencies.

The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies (per IEEE 1528 6.6.1.2). The SAR test plots may slightly differ from the table above since the DASY software rounds to three significant digits.

Probe calibration used within ±100 MHz of the test frequency in either 5.725 - 5.85 or 5.47-5.725 GHz is acceptable per KDB Publication 865664 since the design of the SAR probe supports the extended frequency, provided the DASY software version recommended is used for the tests, and the expanded calibration uncertainty (k=2) is less than or equal to 15% (See SAR probe calibration certificate for this information). The dielectric and conductivities measured are within 10% and 5% respectively of the target parameters specified in Supplement C 01-01.

© 2012 PCTEST Engineering Laboratory, Inc.

10.2 Measurement Procedure for Tissue verification

1) The network analyzer and probe system was configured and calibrated.
2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
3) The complex admittance with respect to the probe aperture was measured
4) The complex relative permittivity , for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\varepsilon_r\varepsilon_0}{\left[\ln(b/a)\right]^2}\int_a^b\int_a^b\int_0^\pi \cos\phi' \frac{\exp\left[-j\omega r(\mu_0\varepsilon_r^{'}\varepsilon_0)^{1/2}\right]}{r} d\phi' d\rho' d\rho$$

where *Y* is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

© 2012 PCTEST Engineering Laboratory, Inc.

10.3 Test System Verification

Prior to assessment, the system is verified to ±10% of the manufacturer SAR measurement on the reference dipole at the time of calibration.

Table 10-2
System Verification Results

System Verification TARGET & MEASURED											
Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR_{1g} (W/kg)	1 W Target SAR_{1g} (W/kg)	1 W Normalized SAR_{1g} (W/kg)	Deviation (%)
835	Head	04/18/2012	24.9	22.6	0.100	4d047	3263	0.952	9.410	9.520	1.17%
1900	Head	04/17/2012	23.1	21.4	0.100	5d149	3288	3.95	39.300	39.500	0.51%
2450	Head	04/18/2012	23.7	22.4	0.100	719	3209	5.51	53.800	55.100	2.42%
5200	Head	04/18/2012	24.7	22.8	0.025	1057	3589	2.06	79.100	82.400	4.17%
5500	Head	04/18/2012	24.9	23.1	0.025	1057	3589	1.98	84.900	79.200	-6.71%
5800	Head	04/18/2012	24.5	22.7	0.025	1057	3589	1.84	79.500	73.600	-7.42%
835	Body	04/18/2012	24.3	22.8	0.100	4d047	3263	1.01	9.410	10.100	7.33%
1900	Body	04/16/2012	24.3	23.9	0.100	5d080	3263	3.98	40.900	39.800	-2.69%
2450	Body	04/19/2012	23.4	22.3	0.100	719	3209	5.52	51.300	55.200	7.60%
5200	Body	04/19/2012	23.6	22.0	0.100	1057	3561	7.43	73.400	74.300	1.23%
5500	Body	04/19/2012	23.8	22.0	0.100	1057	3561	8.07	78.900	80.700	2.28%
5800	Body	04/19/2012	24.0	22.1	0.100	1057	3561	7.52	74.300	75.200	1.21%

Note: Per KDB Publication 865664, when a reference dipole is not defined within ±100MHz of the test frequency, the system verification may be conducted within ± 200 MHz of the center frequency of the measurement frequencies if the SAR probe calibration is valid and the same tissue-equivalent matter is used for verification and test measurements.

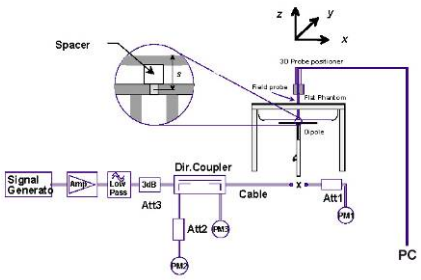

Figure 10-1
System Verification Setup Diagram

Figure 10-2
System Verification Setup Photo

© 2012 PCTEST Engineering Laboratory, Inc.

11 SAR DATA SUMMARY

11.1 Standalone Head SAR Data

Table 11-1
GSM 850 Head SAR Results

MEASUREMENT RESULTS								
FREQUENCY		Mode/Band	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	SAR (1g)
MHz	Ch.							(W/kg)
836.60	190	GSM 850	32.65	0.02	Right	Touch	R31C40A37SK	**0.184**
836.60	190	GSM 850	32.65	0.03	Right	Tilt	R31C40A37SK	0.119
836.60	190	GSM 850	32.65	0.01	Left	Touch	R31C40A37SK	0.164
836.60	190	GSM 850	32.65	0.03	Left	Tilt	R31C40A37SK	0.112
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					**Head 1.6 W/kg (mW/g)** averaged over 1 gram			

Table 11-2
WCDMA 850 Head SAR Results

MEASUREMENT RESULTS								
FREQUENCY		Mode/Band	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	SAR (1g)
MHz	Ch.							(W/kg)
836.60	4183	WCDMA 850	22.65	-0.04	Right	Touch	R31C40A37SK	**0.172**
836.60	4183	WCDMA 850	22.65	0.10	Right	Tilt	R31C40A37SK	0.117
836.60	4183	WCDMA 850	22.65	0.02	Left	Touch	R31C40A37SK	0.156
836.60	4183	WCDMA 850	22.65	0.02	Left	Tilt	R31C40A37SK	0.124
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					**Head 1.6 W/kg (mW/g)** averaged over 1 gram			

© 2012 PCTEST Engineering Laboratory, Inc.

Table 11-3
GSM 1900 Head SAR Results

MEASUREMENT RESULTS								
FREQUENCY		Mode/Band	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	SAR (1g)
MHz	Ch.							(W/kg)
1880.00	661	GSM 1900	30.20	0.03	Right	Touch	R31C40A37SK	0.236
1880.00	661	GSM 1900	30.20	0.06	Right	Tilt	R31C40A37SK	0.151
1880.00	661	GSM 1900	30.20	-0.02	Left	Touch	R31C40A37SK	**0.252**
1880.00	661	GSM 1900	30.20	0.10	Left	Tilt	R31C40A37SK	0.147
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					**Head 1.6 W/kg (mW/g)** averaged over 1 gram			

Table 11-4
WCDMA 1900 Head SAR Results

MEASUREMENT RESULTS								
FREQUENCY		Mode	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	SAR (1g)
MHz	Ch.							(W/kg)
1880.00	9400	WCDMA 1900	23.06	-0.07	Right	Touch	R31C40A37SK	0.301
1880.00	9400	WCDMA 1900	23.06	0.04	Right	Tilt	R31C40A37SK	0.202
1880.00	9400	WCDMA 1900	23.06	-0.01	Left	Touch	R31C40A37SK	**0.405**
1880.00	9400	WCDMA 1900	23.06	0.00	Left	Tilt	R31C40A37SK	0.197
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					**Head 1.6 W/kg (mW/g)** averaged over 1 gram			

Table 11-5
2.4 GHz WLAN Head SAR Results

MEASUREMENT RESULTS										
FREQUENCY		Mode	Service	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	SAR (1g)
MHz	Ch.									(W/kg)
2462	11	IEEE 802.11b	DSSS	13.79	0.05	Right	Touch	R31C40A37QT	1	0.083
2462	11	IEEE 802.11b	DSSS	13.79	-0.01	Right	Tilt	R31C40A37QT	1	0.077
2462	11	IEEE 802.11b	DSSS	13.79	0.01	Left	Touch	R31C40A37QT	1	**0.148**
2462	11	IEEE 802.11b	DSSS	13.79	0.02	Left	Tilt	R31C40A37QT	1	0.092
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						**Head 1.6 W/kg (mW/g)** averaged over 1 gram				

© 2012 PCTEST Engineering Laboratory, Inc.

Table 11-6
5.8 GHz WLAN Head SAR Results

MEASUREMENT RESULTS										
FREQUENCY		Mode	Service	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	SAR (1g)
MHz	Ch.									(W/kg)
5825	165	IEEE 802.11a	OFDM	14.48	0.10	Right	Touch	R31C40A37QT	6	0.017
5825	165	IEEE 802.11a	OFDM	14.48	0.06	Right	Tilt	R31C40A37QT	6	0.015
5825	165	IEEE 802.11a	OFDM	14.48	0.14	Left	Touch	R31C40A37QT	6	**0.031**
5825	165	IEEE 802.11a	OFDM	14.48	-0.19	Left	Tilt	R31C40A37QT	6	0.011
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						**Head 1.6 W/kg (mW/g)** averaged over 1 gram				

Table 11-7
5.2 GHz WLAN Head SAR Results

MEASUREMENT RESULTS										
FREQUENCY		Mode	Service	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	SAR (1g)
MHz	Ch.									(W/kg)
5180	36	IEEE 802.11a	OFDM	13.48	0.10	Right	Touch	R31C40A37QT	6	0.001
5180	36	IEEE 802.11a	OFDM	13.48	-0.11	Right	Tilt	R31C40A37QT	6	0.005
5180	36	IEEE 802.11a	OFDM	13.48	0.14	Left	Touch	R31C40A37QT	6	0.000
5180	36	IEEE 802.11a	OFDM	13.48	0.20	Left	Tilt	R31C40A37QT	6	**0.014**
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						**Head 1.6 W/kg (mW/g)** averaged over 1 gram				

Table 11-8
5.3 GHz WLAN Head SAR Results

MEASUREMENT RESULTS										
FREQUENCY		Mode	Service	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	SAR (1g)
MHz	Ch.									(W/kg)
5260	52	IEEE 802.11a	OFDM	14.07	0.03	Right	Touch	R31C40A37QT	6	0.026
5260	52	IEEE 802.11a	OFDM	14.07	0.04	Right	Tilt	R31C40A37QT	6	0.034
5260	52	IEEE 802.11a	OFDM	14.07	0.11	Left	Touch	R31C40A37QT	6	0.026
5260	52	IEEE 802.11a	OFDM	14.07	0.10	Left	Tilt	R31C40A37QT	6	**0.072**
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						**Head 1.6 W/kg (mW/g)** averaged over 1 gram				

© 2012 PCTEST Engineering Laboratory, Inc.

Table 11-9
5.5 - 5.7 GHz WLAN Head SAR Results

MEASUREMENT RESULTS										
FREQUENCY		Mode	Service	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	SAR (1g)
MHz	Ch.									(W/kg)
5700	140	IEEE 802.11a	OFDM	14.90	0.04	Right	Touch	R31C40A37QT	6	0.025
5700	140	IEEE 802.11a	OFDM	14.90	0.03	Right	Tilt	R31C40A37QT	6	**0.031**
5700	140	IEEE 802.11a	OFDM	14.90	0.20	Left	Touch	R31C40A37QT	6	0.015
5700	140	IEEE 802.11a	OFDM	14.90	0.03	Left	Tilt	R31C40A37QT	6	0.026
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						**Head 1.6 W/kg (mW/g)** averaged over 1 gram				

11.2 Standalone Body-Worn SAR Data

Table 11-10
Licensed Transmitter Body-Worn SAR Results

MEASUREMENT RESULTS										
FREQUENCY		Mode	Service	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Side	SAR (1g)
MHz	Ch.									(W/kg)
836.60	190	GSM 850	GSM	32.65	0.01	1.0 cm	R31C40A37SK	1	back	0.389
824.20	128	GSM 850	GPRS	29.66	-0.05	1.0 cm	R31C40A37SK	4	back	0.977
836.60	190	GSM 850	GPRS	29.75	-0.01	1.0 cm	R31C40A37SK	4	back	1.020
848.80	251	GSM 850	GPRS	29.75	-0.01	1.0 cm	R31C40A37SK	4	back	**1.030**
836.60	4183	WCDMA 850	RMC	22.65	0.00	1.0 cm	R31C40A37SK	N/A	back	**0.493**
1880.00	661	GSM 1900	GSM	30.20	0.05	1.0 cm	R31C40A37SK	1	back	0.388
1850.20	512	GSM 1900	GPRS	27.97	-0.07	1.0 cm	R31C40A37SK	4	back	**0.948**
1880.00	661	GSM 1900	GPRS	27.97	-0.01	1.0 cm	R31C40A37SK	4	back	0.853
1909.80	810	GSM 1900	GPRS	27.90	-0.01	1.0 cm	R31C40A37SK	4	back	0.753
1880.00	9400	WCDMA 1900	RMC	23.06	-0.01	1.0 cm	R31C40A37SK	N/A	back	**0.591**
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						**Body 1.6 W/kg (mW/g)** averaged over 1 gram				

Note: For GPRS and WCDMA test cases, back side hotspot SAR data was considered as body-worn accessory SAR test data per KDB Publication 941225 D06.

© 2012 PCTEST Engineering Laboratory, Inc.

Table 11-11
WLAN Body-Worn SAR Results

MEASUREMENT RESULTS										
FREQUENCY		Mode	Service	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	SAR (1g)
MHz	Ch.									(W/kg)
2462	11	IEEE 802.11b	DSSS	13.79	0.10	1.0 cm	R31C40A37SK	1	back	**0.455**
5825	165	IEEE 802.11a	OFDM	14.48	0.13	1.0 cm	R31C40A37SK	6	back	0.402
5180	36	IEEE 802.11a	OFDM	13.48	-0.08	1.0 cm	R31C40A37SK	6	back	0.219
5260	52	IEEE 802.11a	OFDM	14.07	0.17	1.0 cm	R31C40A37SK	6	back	0.653
5300	60	IEEE 802.11a	OFDM	13.87	0.08	1.0 cm	R31C40A37SK	6	back	**0.872**
5520	104	IEEE 802.11a	OFDM	14.29	0.00	1.0 cm	R31C40A37SK	6	back	0.541
5580	116	IEEE 802.11a	OFDM	14.45	0.12	1.0 cm	R31C40A37SK	6	back	0.460
5700	140	IEEE 802.11a	OFDM	14.90	0.12	1.0 cm	R31C40A37SK	6	back	0.371
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						**Body 1.6 W/kg (mW/g)** averaged over 1 gram				

Note: For 2.4 GHz WLAN test cases, back side hotspot SAR data was considered as body-worn SAR accessory compliance per KDB Publication 941225 D06.

© 2012 PCTEST Engineering Laboratory, Inc.

11.3 Standalone Wireless Router SAR Data

Table 11-12
Licensed Transmitter Hotspot SAR Data

MEASUREMENT RESULTS										
FREQUENCY		Mode	Service	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Side	SAR (1g)
MHz	Ch.									(W/kg)
824.20	128	GSM 850	GPRS	29.66	-0.05	1.0 cm	R31C40A37SK	4	back	0.977
836.60	190	GSM 850	GPRS	29.75	-0.01	1.0 cm	R31C40A37SK	4	back	1.020
848.80	251	GSM 850	GPRS	29.75	-0.01	1.0 cm	R31C40A37SK	4	back	**1.030**
836.60	190	GSM 850	GPRS	29.75	0.10	1.0 cm	R31C40A37SK	4	front	0.525
836.60	190	GSM 850	GPRS	29.75	-0.03	1.0 cm	R31C40A37SK	4	bottom	0.132
836.60	190	GSM 850	GPRS	29.75	0.04	1.0 cm	R31C40A37SK	4	right	0.722
836.60	190	GSM 850	GPRS	29.75	0.00	1.0 cm	R31C40A37SK	4	left	0.580
836.60	4183	WCDMA 850	RMC	22.65	0.00	1.0 cm	R31C40A37SK	N/A	back	**0.493**
836.60	4183	WCDMA 850	RMC	22.65	0.01	1.0 cm	R31C40A37SK	N/A	front	0.246
836.60	4183	WCDMA 850	RMC	22.65	-0.03	1.0 cm	R31C40A37SK	N/A	bottom	0.063
836.60	4183	WCDMA 850	RMC	22.65	0.00	1.0 cm	R31C40A37SK	N/A	right	0.358
836.60	4183	WCDMA 850	RMC	22.65	-0.03	1.0 cm	R31C40A37SK	N/A	left	0.275
1850.20	512	GSM 1900	GPRS	27.97	-0.07	1.0 cm	R31C40A37SK	4	back	**0.948**
1880.00	661	GSM 1900	GPRS	27.97	-0.01	1.0 cm	R31C40A37SK	4	back	0.853
1909.80	810	GSM 1900	GPRS	27.90	-0.01	1.0 cm	R31C40A37SK	4	back	0.753
1850.20	512	GSM 1900	GPRS	27.97	0.01	1.0 cm	R31C40A37SK	4	front	0.857
1880.00	661	GSM 1900	GPRS	27.97	-0.07	1.0 cm	R31C40A37SK	4	front	0.904
1909.80	810	GSM 1900	GPRS	27.90	0.01	1.0 cm	R31C40A37SK	4	front	0.812
1880.00	661	GSM 1900	GPRS	27.97	0.02	1.0 cm	R31C40A37SK	4	bottom	0.387
1880.00	661	GSM 1900	GPRS	27.97	-0.02	1.0 cm	R31C40A37SK	4	right	0.197
1880.00	661	GSM 1900	GPRS	27.97	0.07	1.0 cm	R31C40A37SK	4	left	0.429
1880.00	9400	WCDMA 1900	RMC	23.06	-0.01	1.0 cm	R31C40A37SK	N/A	back	0.591
1880.00	9400	WCDMA 1900	RMC	23.06	0.00	1.0 cm	R31C40A37SK	N/A	front	**0.623**
1880.00	9400	WCDMA 1900	RMC	23.06	0.01	1.0 cm	R31C40A37SK	N/A	bottom	0.250
1880.00	9400	WCDMA 1900	RMC	23.06	0.04	1.0 cm	R31C40A37SK	N/A	right	0.129
1880.00	9400	WCDMA 1900	RMC	23.06	0.03	1.0 cm	R31C40A37SK	N/A	left	0.285
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						**Body 1.6 W/kg (mW/g)** averaged over 1 gram				

© 2012 PCTEST Engineering Laboratory, Inc.

Table 11-13
WLAN Hotspot SAR Data

MEASUREMENT RESULTS										
FREQUENCY		Mode	Service	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	SAR (1g)
MHz	Ch.									(W/kg)
2462	11	IEEE 802.11b	DSSS	13.79	0.10	1.0 cm	R31C40A37SK	1	back	**0.455**
2462	11	IEEE 802.11b	DSSS	13.79	0.16	1.0 cm	R31C40A37SK	1	front	0.041
2462	11	IEEE 802.11b	DSSS	13.79	0.15	1.0 cm	R31C40A37SK	1	top	0.041
2462	11	IEEE 802.11b	DSSS	13.79	-0.04	1.0 cm	R31C40A37SK	1	right	0.173
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						**Body 1.6 W/kg (mW/g)** averaged over 1 gram				

11.4 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used were according to FCC/OET Bulletin 65, Supplement C [June 2001].
2. Batteries are fully charged for all readings. The standard battery was used.
3. Tissue parameters and temperatures are listed on the SAR plots.
4. Liquid tissue depth was at least 15.0 cm. To confirm the proper SAR liquid depth, the z-axis plots from the system verifications were included since the system verifications were performed using the same liquid, probe and DAE as the SAR tests in the same time period.
5. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
6. Per FCC/OET Bulletin 65 Supplement C and Public Notice DA-02-1438, if the 2G/3G SAR measured at the middle channel for each test configuration is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
7. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was tested because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.

GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR using headphone.
2. Per FCC guidance, GPRS Data Mode is additionally required for body-worn configuration. When the same wireless modes and device transmission configurations are required for body-worn accessories and hotspot mode (GPRS), it is not necessary to additionally test body-worn accessory SAR for the same device orientation. Therefore, the hotspot data for the back and front side configurations additionally shows body-worn compliance at the same distance.
3. Justification for reduced test configurations per KDB Publication 941225 D03: The source-based time-averaged output power was evaluated for all multi-slot operations. In addition to the worst-case reported, all source-based time-averaged powers within 10% of the worst-case were additionally included in the evaluation for data modes.

© 2012 PCTEST Engineering Laboratory, Inc.

WCDMA Notes:

1. WCDMA mode in Body SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 941225 D06, when the same wireless modes and device transmission configurations are required for body-worn accessories and hotspot mode, it is not necessary to additionally test body-worn accessory SAR for the same device orientation. Therefore, the hotspot data for the back side configuration additionally shows body-worn compliance at the same distance.

WLAN Notes:

1. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 and April 2010 FCC/TCB Meeting Notes for 2.4 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11b. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
2. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 and April 2010 FCC/TCB Meeting Notes for 5 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11a. Other IEEE 802.11 modes (including 802.11n 20 MHz Bandwidth and 802.11n 40 MHz Bandwidth) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
3. When Hotspot is enabled, all 5 GHz bands are disabled.
4. WLAN transmission was verified using an uncalibrated spectrum analyzer.
5. When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. The other default (or corresponding required) test channels were additionally tested using the lowest data rate since the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is greater than 1.6 W/kg.
6. Per FCC KDB Publication 941225 D06, when the same wireless modes and device transmission configurations are required for body-worn accessories and hotspot mode (2.4 GHz WLAN), it is not necessary to additionally test body-worn accessory SAR for the same device orientation. Therefore, the hotspot data for the back side configuration additionally shows body-worn compliance at the same distance.
7. Device was tested using a fixed spacing for 5GHz WLAN body-worn accessory testing. A separation distance of 10 mm was tested because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.

Hotspot Notes:

1. Top Edge for the licensed transmitter was not tested since the antenna distance from the edge was greater than 2.5 cm per FCC KDB Publication 941225 D06 guidance (see Section 1.3).
2. Bottom and Left Edges for the WLAN transmitter were not tested since the antenna distance from the edge was greater than 2.5 cm per FCC KDB Publication 941225 D06 (see Section 1.3).
3. During SAR Testing for the Wireless Router conditions per KDB 941225 D06, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.6.)

© 2012 PCTEST Engineering Laboratory, Inc.

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from "FCC SAR Considerations for Cell Phones with Multiple Transmitters" FCC KDB Publication 648474 are applicable to handsets with built-in unlicensed transmitters such as 802.11a/b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 FCC Power Tables & Conditions

	2.45	5.15 - 5.35	5.47 - 5.85	GHz
P_{Ref}	12	6	5	mW
Device output power should be rounded to the nearest mW to compare with values specified in this table.				

Figure 12-1
Output Power Thresholds for Unlicensed Transmitters

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	Routine evaluation required	SAR not required: Unlicensed only ○ when stand-alone 1-g SAR is not required and antenna is ≥ 5 cm from other antennas Licensed & Unlicensed ○ when the sum of the 1-g SAR is < 1.6 W/kg for all simultaneous transmitting antennas ○ when SAR to peak location separation ratio of simultaneous transmitting antenna pair is < 0.3 SAR required: Licensed & Unlicensed antenna pairs with SAR to peak location separation ratio ≥ 0.3; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply
Unlicensed Transmitters	When there is no simultaneous transmission – ○ output ≤ 60/f: SAR not required ○ output > 60/f: stand-alone SAR required When there is simultaneous transmission – Stand-alone SAR not required when ○ output ≤ 2·P_{Ref} and antenna is ≥ 5.0 cm from other antennas ○ output ≤ P_{Ref} and antenna is ≥ 2.5 cm from other antennas ○ output ≤ P_{Ref} and antenna is < 2.5 cm from other antennas, each with either output power ≤ P_{Ref} or 1-g SAR < 1.2 W/kg Otherwise stand-alone SAR is required When stand-alone SAR is required ○ test SAR on highest output channel for each wireless mode and exposure condition ○ if SAR for highest output channel is > 50% of SAR limit, evaluate all channels according to normal procedures	

Figure 12-2
SAR Evaluation Requirements for Multiple Transmitter Handsets

According to Figure 12-1 and Figure 12-2, simultaneous transmission analysis of SAR may be required for this device for the licensed and unlicensed transmitters. Possible simultaneous transmissions for this device were numerically summed using stand-alone SAR data and are shown in the following tables.

Per KDB Publication 648474, standalone Bluetooth SAR tests were not required. Standalone SAR tests for WLAN were required. See Section 1.4(A) for more information.

© 2012 PCTEST Engineering Laboratory, Inc.

12.3 Head SAR Simultaneous Transmission Analysis

Table 12-1
Simultaneous Transmission Scenario (Held to Ear)

Simult Tx	Configuration	GSM 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.184	0.083	0.267
	Right Tilt	0.119	0.077	0.196
	Left Cheek	0.164	0.148	**0.312**
	Left Tilt	0.112	0.092	0.204

Simult Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.172	0.083	0.255
	Right Tilt	0.117	0.077	0.194
	Left Cheek	0.156	0.148	**0.304**
	Left Tilt	0.124	0.092	0.216

Simult Tx	Configuration	GSM 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.236	0.083	0.319
	Right Tilt	0.151	0.077	0.228
	Left Cheek	0.252	0.148	**0.400**
	Left Tilt	0.147	0.092	0.239

Simult Tx	Configuration	WCDMA 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.301	0.083	0.384
	Right Tilt	0.202	0.077	0.279
	Left Cheek	0.405	0.148	**0.553**
	Left Tilt	0.197	0.092	0.289

The above tables represent a held to ear voice call potentially simultaneously operating with 2.4 GHz WLAN.

Table 12-2
Simultaneous Transmission Scenario (Held to Ear)

Simult Tx	Configuration	GSM 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.184	0.026	**0.210**
	Right Tilt	0.119	0.034	0.153
	Left Cheek	0.164	0.031	0.195
	Left Tilt	0.112	0.072	0.184

Simult Tx	Configuration	WCDMA 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.172	0.026	**0.198**
	Right Tilt	0.117	0.034	0.151
	Left Cheek	0.156	0.031	0.187
	Left Tilt	0.124	0.072	0.196

Simult Tx	Configuration	GSM 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.236	0.026	0.262
	Right Tilt	0.151	0.034	0.185
	Left Cheek	0.252	0.031	**0.283**
	Left Tilt	0.147	0.072	0.219

Simult Tx	Configuration	WCDMA 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.301	0.026	0.327
	Right Tilt	0.202	0.034	0.236
	Left Cheek	0.405	0.031	**0.436**
	Left Tilt	0.197	0.072	0.269

The above tables represent a held to ear voice call potentially simultaneously operating with 5 GHz WLAN.

12.4 Body-Worn Simultaneous Transmission Analysis

Table 12-3
Simultaneous Transmission Scenario (Body-Worn at 1.0 cm)

Configuration	Mode	2G/3G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Back Side	GSM 850	0.389	0.455	0.844
Back Side	WCDMA 850	0.493	0.455	0.948
Back Side	GSM 1900	0.388	0.455	0.843
Back Side	WCDMA 1900	0.591	0.455	**1.046**

The above tables represent a body-worn voice call potentially simultaneously operating with 2.4 GHz WLAN.

© 2012 PCTEST Engineering Laboratory, Inc.

Table 12-4
Simultaneous Transmission Scenario (Body-Worn at 1.0 cm)

Configuration	Mode	2G/3G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Back Side	GSM 850	0.389	0.872	1.261
Back Side	WCDMA 850	0.493	0.872	1.365
Back Side	GSM 1900	0.388	0.872	1.260
Back Side	WCDMA 1900	0.591	0.872	**1.463**

The above tables represent a body-worn voice call potentially simultaneously operating with 5 GHz WLAN.

12.5 Hotspot SAR Simultaneous Transmission Analysis

Table 12-5
Simultaneous Transmission Scenario (Hotspot at 1.0 cm)

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	1.030	0.455	**1.485**
	Front	0.525	0.041	0.566
	Top	-	0.041	0.041
	Bottom	0.132	-	0.132
	Right	0.722	0.173	0.895
	Left	0.580	-	0.580

Simult Tx	Configuration	WCDMA 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.493	0.455	**0.948**
	Front	0.246	0.041	0.287
	Top	-	0.041	0.041
	Bottom	0.063	-	0.063
	Right	0.358	0.173	0.531
	Left	0.275	-	0.275

Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.948	0.455	**1.403**
	Front	0.904	0.041	0.945
	Top	-	0.041	0.041
	Bottom	0.387	-	0.387
	Right	0.197	0.173	0.370
	Left	0.429	-	0.429

Simult Tx	Configuration	WCDMA 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.591	0.455	**1.046**
	Front	0.623	0.041	0.664
	Top	-	0.041	0.041
	Bottom	0.250	-	0.250
	Right	0.129	0.173	0.302
	Left	0.285	-	0.285

Note: Per FCC KDB Publication 941225 D06, the edges with antennas more than 2.5 cm are not required to be evaluated for SAR ("-"). The above tables represent a portable hotspot condition.

12.6 Simultaneous Transmission Conclusion

The above numerical summed SAR was below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit. No volumetric SAR summation is required per FCC KDB Publication 648474.

© 2012 PCTEST Engineering Laboratory, Inc.

13 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A		N/A	3051A00187
Agilent	8648D	(9kHz-4GHz) Signal Generator	10/10/2011	Annual	10/10/2012	3613A00315
Agilent	8753E	(30kHz-6GHz) Network Analyzer	4/4/2012	Annual	4/5/2013	JP38020182
Agilent	E5515C	Wireless Communications Test Set	10/10/2011	Annual	10/10/2012	GB46110872
Agilent	E5515C	Wireless Communications Test Set	10/20/2011	Annual	10/20/2012	GB46310798
Agilent	E5515C	Wireless Communications Test Set	10/14/2011	Annual	10/14/2012	GB41450275
Agilent	E5515C	Wireless Communications Test Set	2/14/2012	Annual	2/14/2013	GB43304447
Agilent	85070E	Dielectric Probe Kit	3/8/2012	Annual	3/8/2013	MY44300633
Agilent	E5515C	Wireless Communications Test Set	2/9/2012	Annual	2/9/2013	GB43460554
Amplifier Research	5S1G4	5W, 800MHz-4.2GHz	CBT		CBT	21910
Anritsu	ML2438A	Power Meter	2/14/2012	Annual	2/14/2013	98150041
Anritsu	ML2438A	Power Meter	10/13/2011	Annual	10/13/2012	1070030
Anritsu	MA2481A	Power Sensor	2/14/2012	Annual	2/14/2013	5821
Anritsu	MA2481A	Power Sensor	2/14/2012	Annual	2/14/2013	8013
Anritsu	MA2481A	Power Sensor	2/14/2012	Annual	2/14/2013	2400
Anritsu	MA2411B	Pulse Sensor	10/13/2011	Annual	10/13/2012	1027293
Anritsu	ML2495A	Power Meter	10/13/2011	Annual	10/13/2012	1039008
Anritsu	MT8820C	Radio Communication Tester	11/11/2011	Annual	11/11/2012	6200901190
Control Company	61220-416	Long-Stem Thermometer	10/12/2011	Biennial	10/12/2013	111860820
Control Company	61220-416	Long-Stem Thermometer	10/12/2011	Biennial	10/12/2013	111860775
Control Company	61220-416	Long-Stem Thermometer	10/12/2011	Biennial	10/12/2013	111860844
Gigatronics	80701A	(0.05-18GHz) Power Sensor	10/12/2011	Annual	10/12/2012	1833460
Gigatronics	8651A	Universal Power Meter	10/12/2011	Annual	10/12/2012	8650319
Intelligent Weigh	PD-3000	Electronic Balance	3/27/2012	Annual	3/27/2013	11081534
MCL	BW-N6W5+	6dB Attenuator	CBT		CBT	1139
MiniCircuits	SLP-2400+	Low Pass Filter	CBT		CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT		CBT	N/A
MiniCircuits	VLF-6000+	Low Pass Filter	CBT		CBT	N/A
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT		CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT		CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT		CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT		CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT		CBT	120
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT		CBT	N/A
Pasternack	PE2208-6	Bidirectional Coupler	6/3/2011	Annual	6/3/2012	N/A
Pasternack	PE2209-10	Bidirectional Coupler	6/3/2011	Annual	6/3/2012	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	6/1/2011	Annual	6/1/2012	833855/0010
Rohde & Schwarz	NRVD	Dual Channel Power Meter	4/8/2011	Biennial	4/8/2013	101695
Seekonk	NC-100	Torque Wrench (8" lb)	11/29/2011	Triennial	11/29/2014	21053
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
SPEAG	D1900V2	1900 MHz SAR Dipole	7/22/2011	Annual	7/22/2012	5d080
SPEAG	D2450V2	2450 MHz SAR Dipole	8/19/2011	Annual	8/19/2012	719
SPEAG	D5GHzV2	5 GHz SAR Dipole	1/19/2012	Annual	1/19/2013	1057
SPEAG	D835V2	835 MHz SAR Dipole	1/25/2012	Annual	1/25/2013	4d047
SPEAG	DAE3	Dasy Data Acquisition Electronics	11/9/2011	Annual	11/9/2012	455
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/20/2012	Annual	2/20/2013	649
SPEAG	EX3DV4	SAR Probe	1/27/2012	Annual	1/27/2013	3589
SPEAG	EX3DV4	SAR Probe	7/27/2011	Annual	7/27/2012	3561
SPEAG	ES3DV3	SAR Probe	3/16/2012	Annual	3/16/2013	3209
SPEAG	ES3DV3	SAR Probe	11/18/2011	Annual	11/18/2012	3263
Speag	DAK-3.5	Dielectric Assessment Kit	12/1/2011	Annual	12/1/2012	1031
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/15/2012	Annual	2/15/2013	1323
SPEAG	ES3DV3	SAR Probe	2/7/2012	Annual	2/7/2013	3288
SPEAG	D1900V2	1900 MHz SAR Dipole	2/22/2012	Annual	2/22/2013	5d149
VWR	36934-158	Wall-Mounted Thermometer	1/21/2011	Biennial	1/21/2013	111286445
VWR	36934-158	Wall-Mounted Thermometer	1/21/2011	Biennial	1/21/2013	111286460
VWR	36934-158	Wall-Mounted Thermometer	5/26/2010	Biennial	5/26/2012	101718589

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing an amplifier, cable, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

© 2012 PCTEST Engineering Laboratory, Inc.

14 MEASUREMENT UNCERTAINTIES

Applicable for frequencies less than 3000 MHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	**IEEE 1528 Sec.**	**Tol. (± %)**	**Prob. Dist.**	**Div.**	**c_i 1gm**	**c_i 10 gms**	**1gm u_i (± %)**	**10gms u_i (± %)**	**v_i**
Measurement System									
Probe Calibration	E.2.1	6.0	N	1	1.0	1.0	6.0	6.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)			RSS				12.1	11.7	299
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k=2				24.2	23.5	

The above measurement uncertainties are according to IEEE Std. 1528-2003

© 2012 PCTEST Engineering Laboratory, Inc.

Applicable for frequencies up to 6 GHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	**IEEE 1528 Sec.**	**Tol. (± %)**	**Prob. Dist.**	**Div.**	**c_i 1gm**	**c_i 10 gms**	**1gm u_i (± %)**	**10gms u_i (± %)**	**v_i**
Measurement System									
Probe Calibration	E.2.1	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)			RSS				12.4	12.0	299
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k=2				24.7	24.0	

The above measurement uncertainties are according to IEEE Std. 1528-2003

© 2012 PCTEST Engineering Laboratory, Inc.

15 CONCLUSION

15.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

© 2012 PCTEST Engineering Laboratory, Inc.

16 REFERENCES

[1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.

[2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.

[3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.

[4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.

[5] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, June 2001.

[6] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.

[7] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.

[8] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.

[9] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.

[10] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.

[11] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.

[12] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.

[13] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.

[14] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.

[15] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.

[16] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.

[17] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

© 2012 PCTEST Engineering Laboratory, Inc.

[18] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.

[19] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

[20] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.

[21] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hoschschule Zürich, Dosimetric Evaluation of the Cellular Phone.

[22] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.

[23] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.

[24] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009

[25] FCC Public Notice DA-02-1438. Office of Engineering and Technology Announces a Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65, June 19, 2002

[26] FCC SAR Measurement Procedures for 3G Devices KDB Publication 941225

[27] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227

[28] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publication 648474

[29] FCC Application Note for SAR Probe Calibration and System Verification Consideration for Measurements at 150 MHz – 3 GHz, KDB Publication 450824

[30] FCC SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens, KDB Publication 616217

[31] FCC SAR Measurement Requirements for 3 – 6 GHz, KDB Publication 865664

[32] FCC Mobile Portable RF Exposure Procedure, KDB Publication 447498

[33] FCC SAR Procedures for Dongle Transmitters, KDB Publication 447498

[34] Anexo à Resolução No. 533, de 10 de Septembro de 2009.

[35] FCC SAR Test Considerations for LTE Handsets and Data Modems, KDB Publication 941225.

[36] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

[37] FCC Hot Spot SAR v01, KDB Publication 941225 D06.

© 2012 PCTEST Engineering Laboratory, Inc.

APPENDIX A: SAR TEST DATA

© 2012 PCTEST Engineering Laboratory, Inc.

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium: 835 Head; Medium parameters used (interpolated):
f = 836.6 MHz; σ = 0.915 mho/m; ε_r = 40.804; ρ = 1000 kg/m^3
Phantom section: Right Section

Test Date: 04-18-2012; Ambient Temp: 24.9°C; Tissue Temp: 22.6°C

Probe: ES3DV3 - SN3263; ConvF(6.28, 6.28, 6.28); Calibrated: 7/11/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 Left; Type: SAM v5.0; Serial: TP: 1687
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GSM 850, Right Head, Touch, Mid.ch

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.273 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.2250 W/kg
SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.141 mW/g

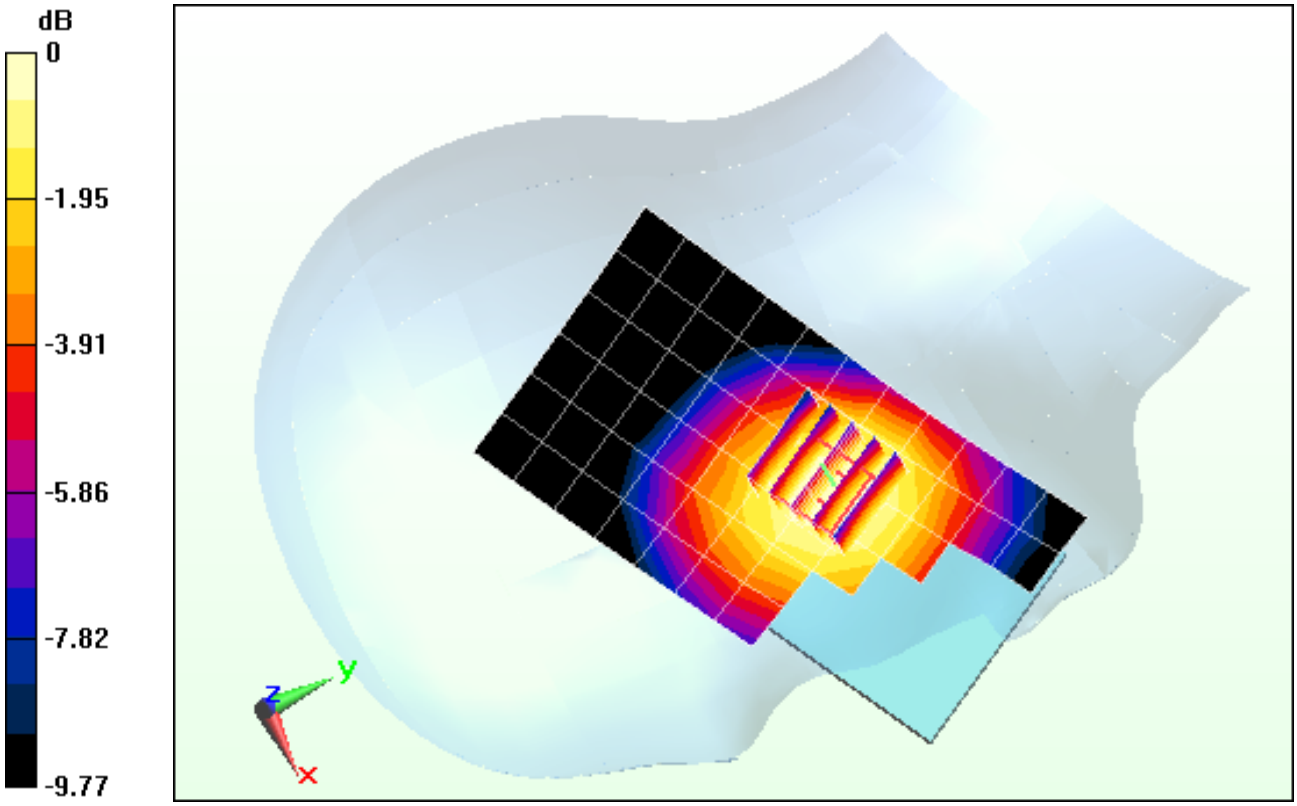

0 dB = 0.190mW/g = -14.42 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium: 835 Head; Medium parameters used (interpolated):
f = 836.6 MHz; σ = 0.915 mho/m; ε_r = 40.804; ρ = 1000 kg/m^3
Phantom section: Right Section

Test Date: 04-18-2012; Ambient Temp: 24.9°C; Tissue Temp: 22.6°C

Probe: ES3DV3 - SN3263; ConvF(6.28, 6.28, 6.28); Calibrated: 7/11/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 Left; Type: SAM v5.0; Serial: TP: 1687
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GSM 850, Right Head, Tilt, Mid.ch

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.794 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.1430 W/kg
SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.094 mW/g

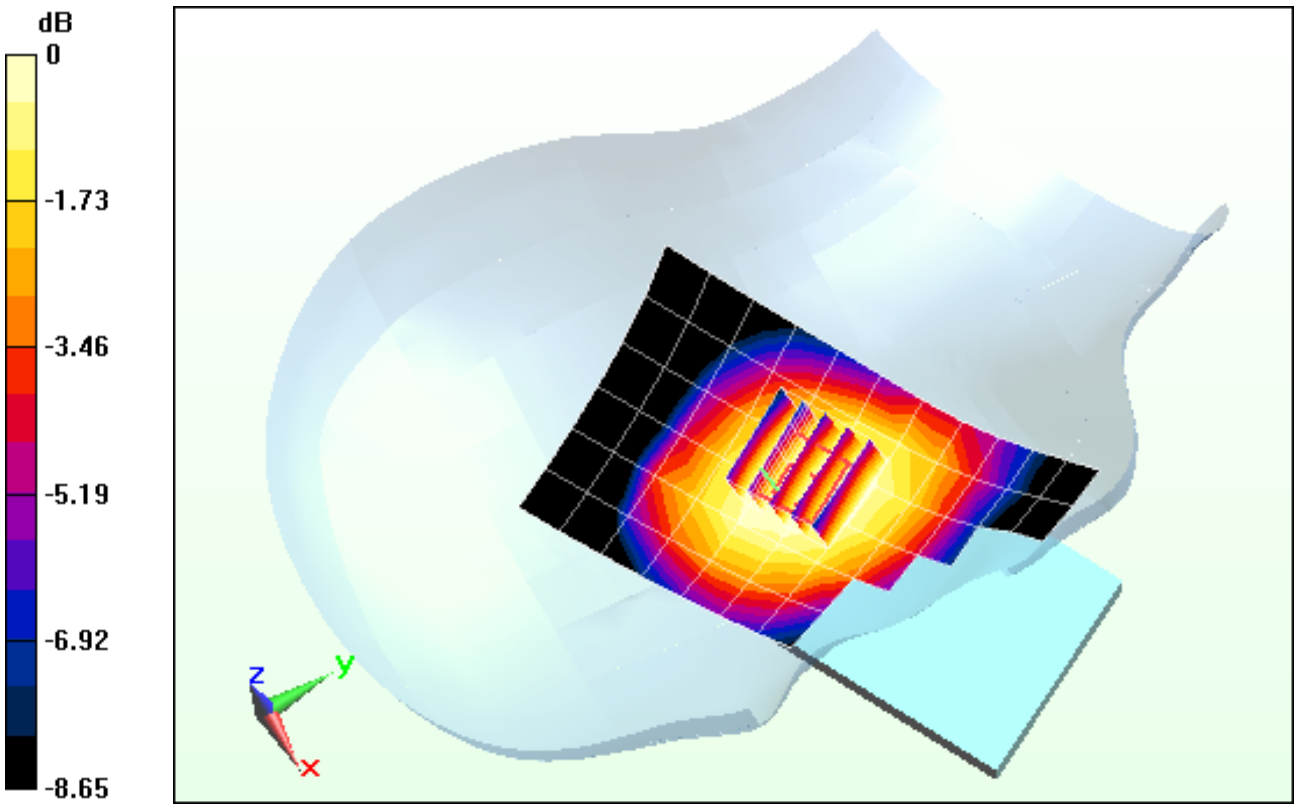

0 dB = 0.120mW/g = -18.42 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium: 835 Head; Medium parameters used (interpolated):
f = 836.6 MHz; σ = 0.915 mho/m; ε_r = 40.804; ρ = 1000 kg/m^3
Phantom section: Left Section

Test Date: 04-18-2012; Ambient Temp: 24.9°C; Tissue Temp: 22.6°C

Probe: ES3DV3 - SN3263; ConvF(6.28, 6.28, 6.28); Calibrated: 7/11/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 Left; Type: SAM v5.0; Serial: TP: 1687
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GSM 850, Left Head, Touch, Mid.ch

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.914 V/m; Power Drift = 0.0084 dB
Peak SAR (extrapolated) = 0.2000 W/kg
SAR(1 g) = 0.164 mW/g; SAR(10 g) = 0.126 mW/g

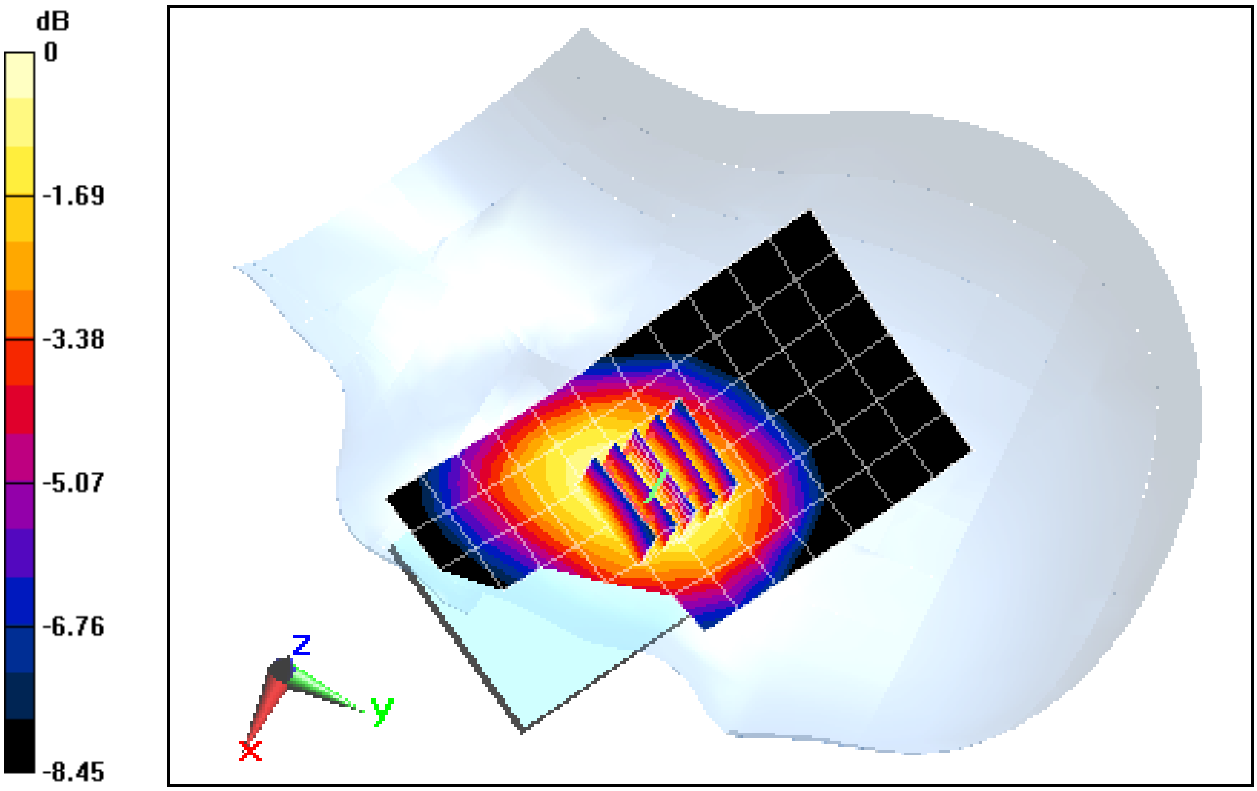

0 dB = 0.170mW/g = -15.39 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium: 835 Head; Medium parameters used (interpolated):
f = 836.6 MHz; σ = 0.915 mho/m; ε_r = 40.804; ρ = 1000 kg/m^3
Phantom section: Left Section

Test Date: 04-18-2012; Ambient Temp: 24.9°C; Tissue Temp: 22.6°C

Probe: ES3DV3 - SN3263; ConvF(6.28, 6.28, 6.28); Calibrated: 7/11/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 Left; Type: SAM v5.0; Serial: TP: 1687
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GSM 850, Left Head, Tilt, Mid.ch

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.405 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.1370 W/kg
SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.088 mW/g

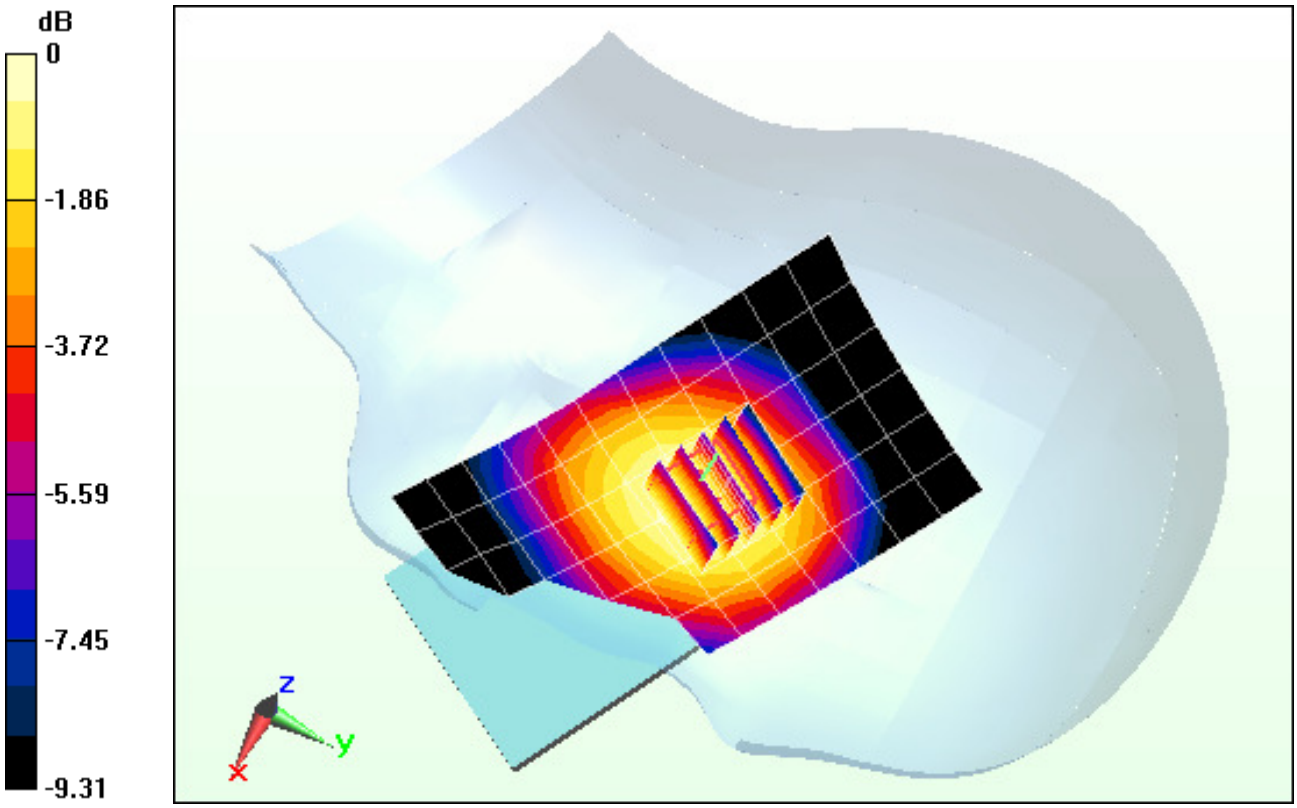

0 dB = 0.120mW/g = -18.42 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used (interpolated):
f = 836.6 MHz; σ = 0.915 mho/m; ε_r = 40.804; ρ = 1000 kg/m^3
Phantom section: Right Section

Test Date: 04-18-2012; Ambient Temp: 24.9°C; Tissue Temp: 22.6°C

Probe: ES3DV3 - SN3263; ConvF(6.28, 6.28, 6.28); Calibrated: 7/11/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 Left; Type: SAM v5.0; Serial: TP: 1687
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 850, Right Head, Touch, Mid.ch

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.165 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.2050 W/kg
SAR(1 g) = 0.172 mW/g; SAR(10 g) = 0.136 mW/g

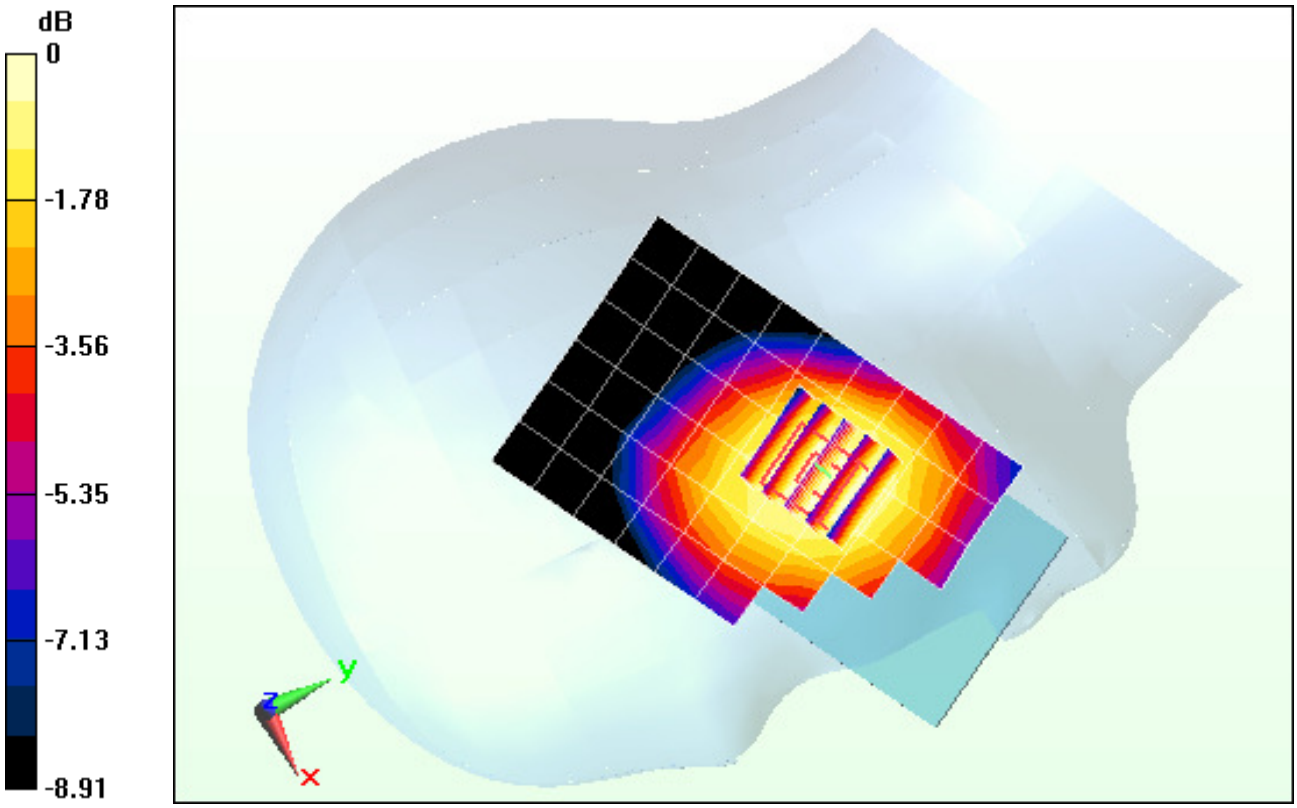

0 dB = 0.180mW/g = -14.89 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used (interpolated):
f = 836.6 MHz; σ = 0.915 mho/m; ε_r = 40.804; ρ = 1000 kg/m^3
Phantom section: Right Section

Test Date: 04-18-2012; Ambient Temp: 24.9°C; Tissue Temp: 22.6°C

Probe: ES3DV3 - SN3263; ConvF(6.28, 6.28, 6.28); Calibrated: 7/11/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 Left; Type: SAM v5.0; Serial: TP: 1687
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 850, Right Head, Tilt, Mid.ch

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.616 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.1430 W/kg
SAR(1 g) = 0.117 mW/g; SAR(10 g) = 0.091 mW/g

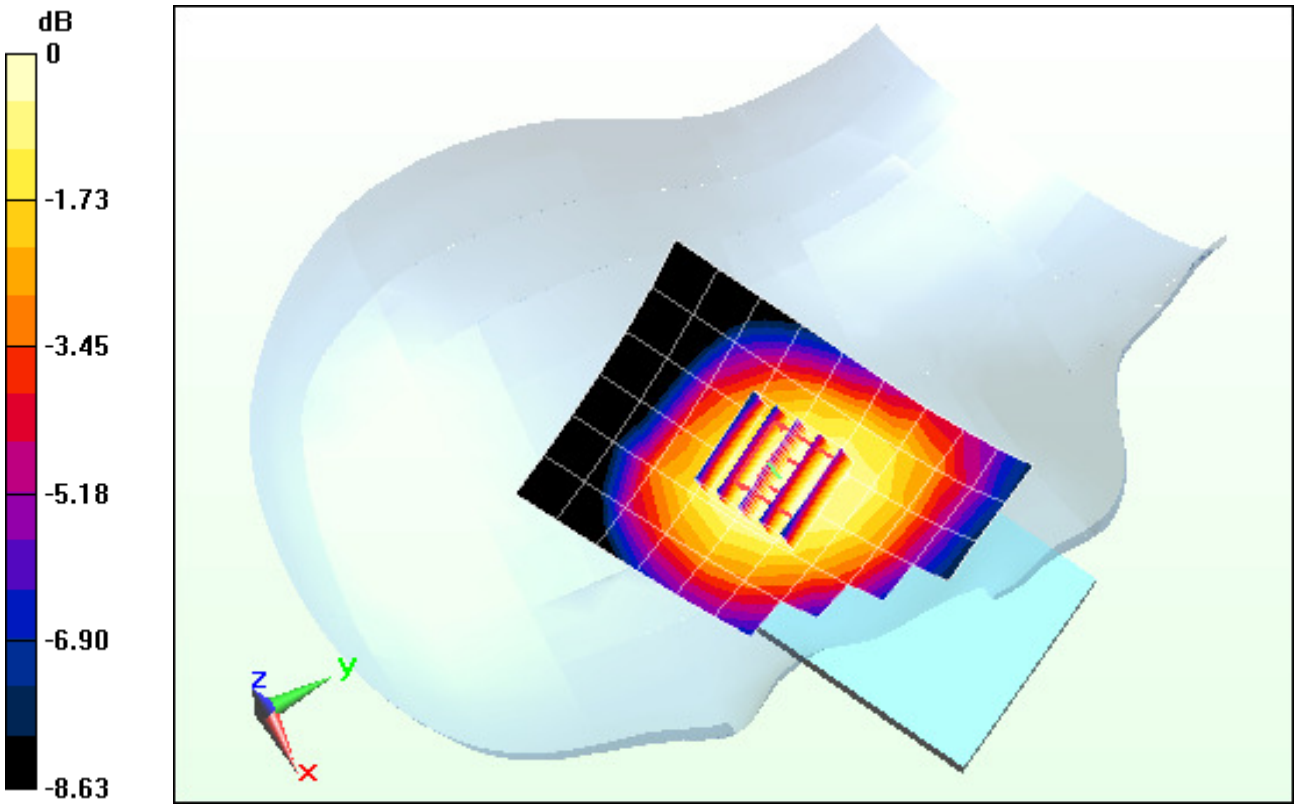

0 dB = 0.120mW/g = -18.42 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used (interpolated):
f = 836.6 MHz; σ = 0.915 mho/m; ε_r = 40.804; ρ = 1000 kg/m^3
Phantom section: Left Section

Test Date: 04-18-2012; Ambient Temp: 24.9°C; Tissue Temp: 22.6°C

Probe: ES3DV3 - SN3263; ConvF(6.28, 6.28, 6.28); Calibrated: 7/11/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 Left; Type: SAM v5.0; Serial: TP: 1687
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 850, Left Head, Touch, Mid.ch

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.147 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.1920 W/kg
SAR(1 g) = 0.156 mW/g; SAR(10 g) = 0.119 mW/g

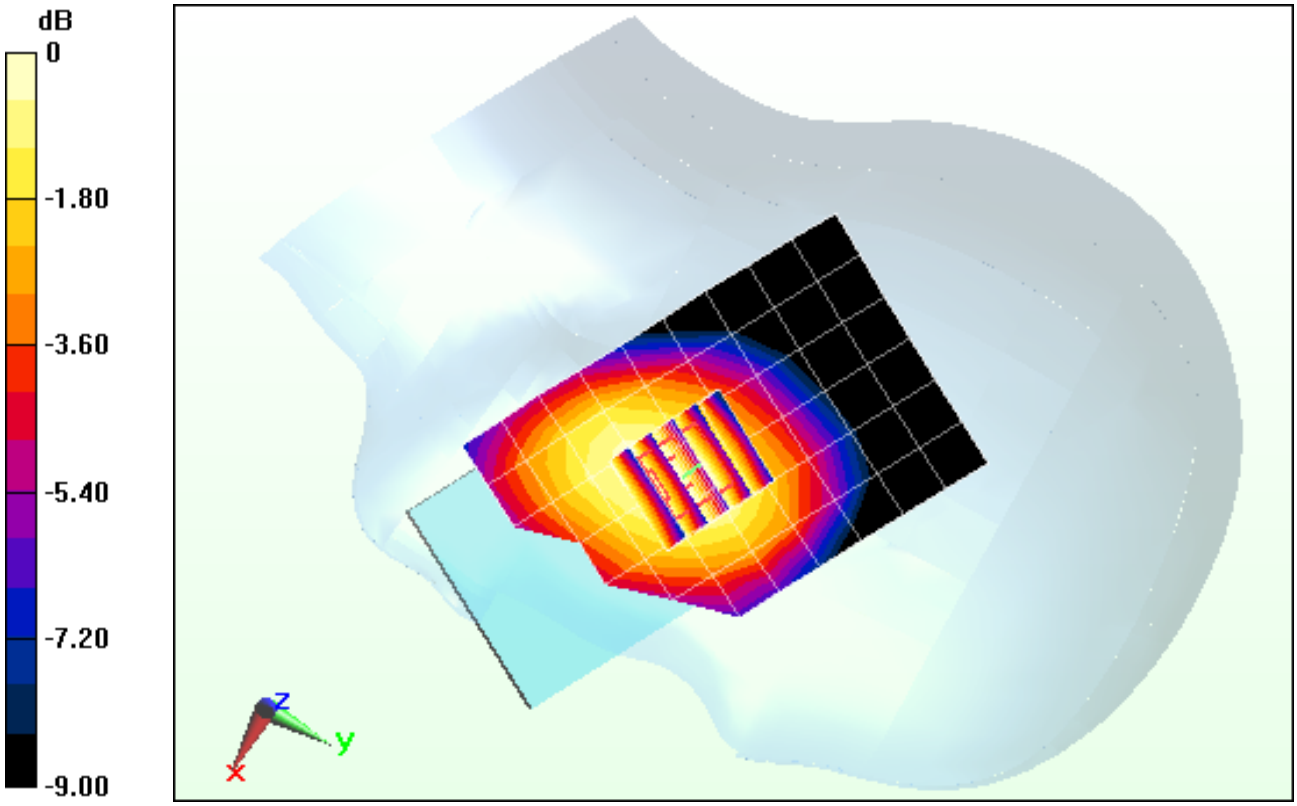

0 dB = 0.160mW/g = -15.92 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used (interpolated):
f = 836.6 MHz; σ = 0.915 mho/m; ε_r = 40.804; ρ = 1000 kg/m^3
Phantom section: Left Section

Test Date: 04-18-2012; Ambient Temp: 24.9°C; Tissue Temp: 22.6°C

Probe: ES3DV3 - SN3263; ConvF(6.28, 6.28, 6.28); Calibrated: 7/11/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 Left; Type: SAM v5.0; Serial: TP: 1687
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 850, Left Head, Tilt, Mid.ch

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.048 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.1530 W/kg
SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.095 mW/g

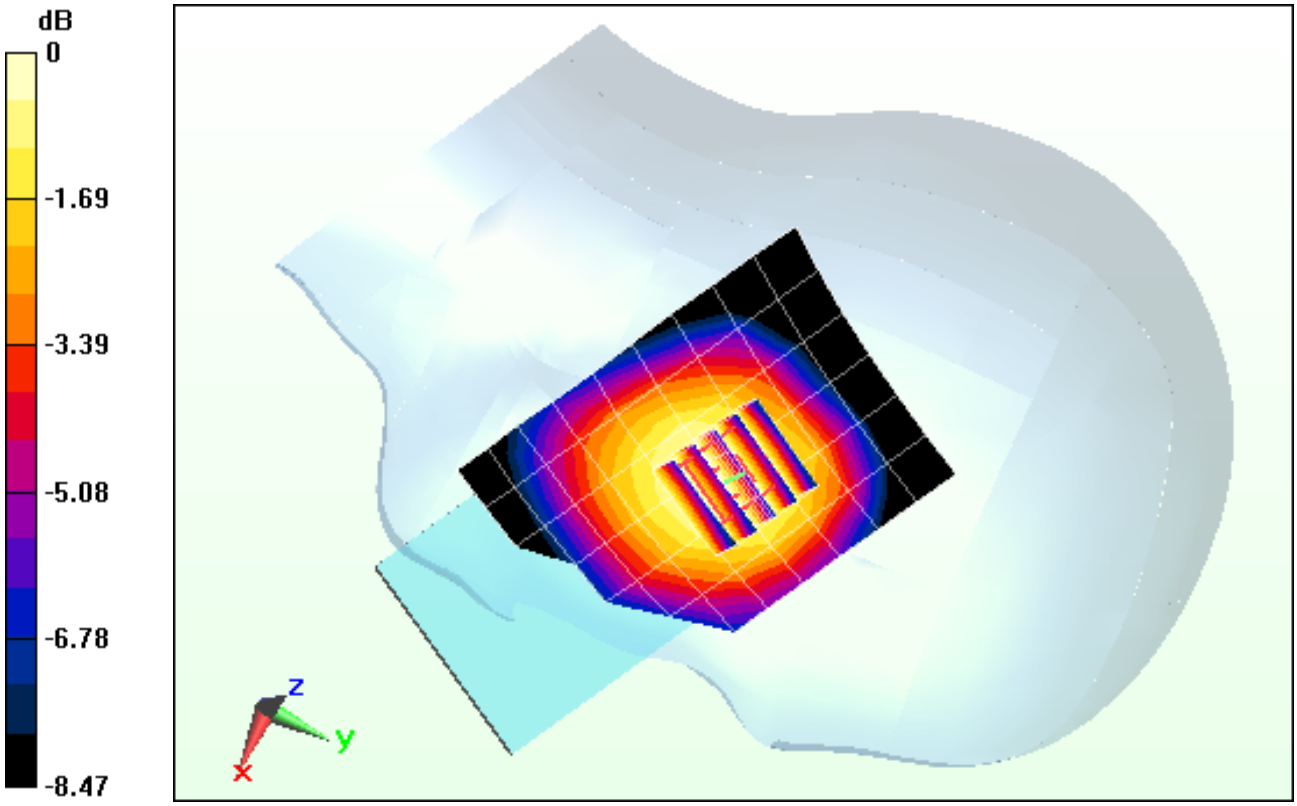

0 dB = 0.130mW/g = -17.72 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: 1900 Head; Medium parameters used:
f = 1880 MHz; σ = 1.377 mho/m; ε_r = 39.02; ρ = 1000 kg/m^3
Phantom section: Right Section

Test Date: 04-17-2012; Ambient Temp: 23.1°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3288; ConvF(5.16, 5.16, 5.16); Calibrated: 2/7/2012
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM V5.0 Right; Type: SAM v5.0; Serial: 1647
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GSM 1900, Right Head, Touch, Mid.ch

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.633 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.3520 W/kg
SAR(1 g) = 0.236 mW/g; SAR(10 g) = 0.151 mW/g

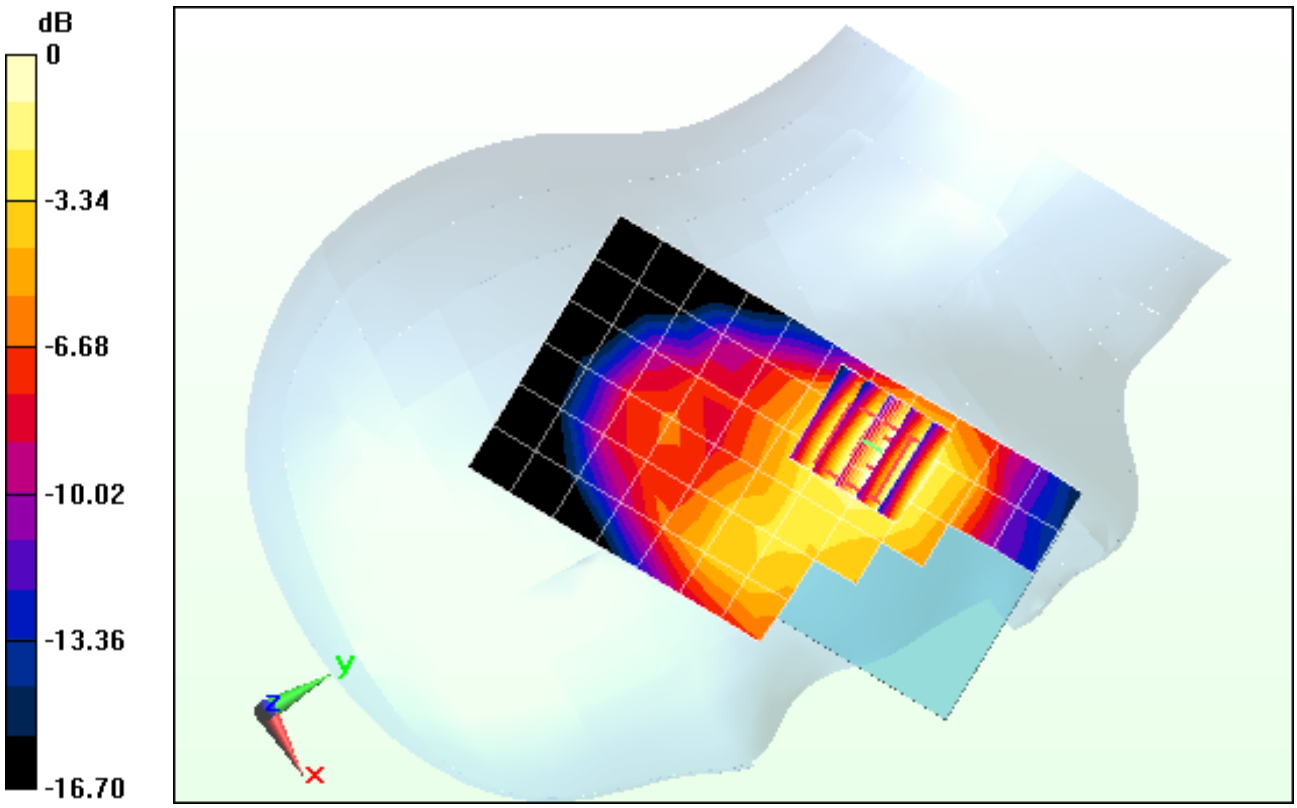

0 dB = 0.260mW/g = -11.70 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: 1900 Head; Medium parameters used:
f = 1880 MHz; σ = 1.377 mho/m; ε_r = 39.02; ρ = 1000 kg/m^3
Phantom section: Right Section

Test Date: 04-17-2012; Ambient Temp: 23.1°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3288; ConvF(5.16, 5.16, 5.16); Calibrated: 2/7/2012
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM V5.0 Right; Type: SAM v5.0; Serial: 1647
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GSM 1900, Right Head, Tilt, Mid.ch

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.260 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.2430 W/kg
SAR(1 g) = 0.151 mW/g; SAR(10 g) = 0.088 mW/g

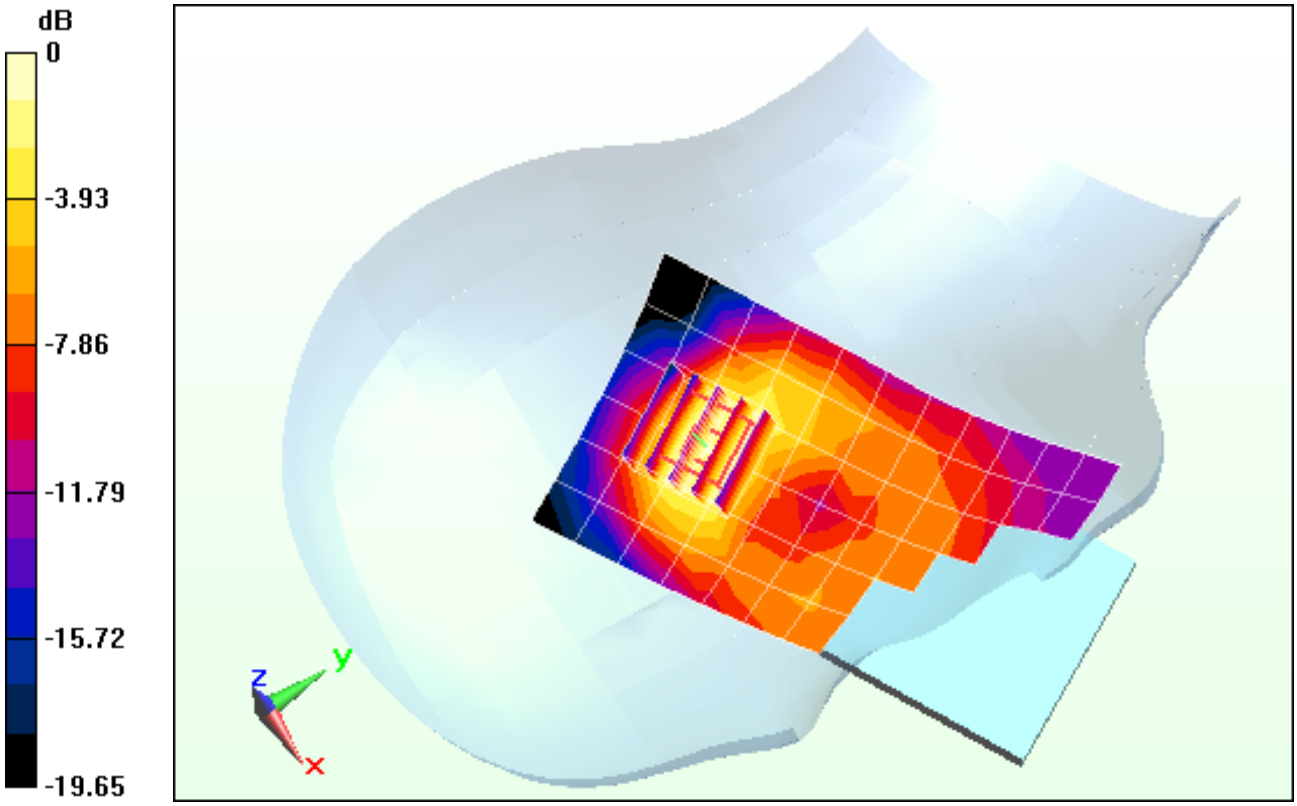

0 dB = 0.170mW/g = -15.39 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM; Frequency: 1880 MHz;Duty Cycle: 1:8.3
Medium: 1900 Head; Medium parameters used:
f = 1880 MHz; σ = 1.377 mho/m; ε_r = 39.02; ρ = 1000 kg/m^3
Phantom section: Left Section

Test Date: 04-17-2012; Ambient Temp: 23.1°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3288; ConvF(5.16, 5.16, 5.16); Calibrated: 2/7/2012
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM V5.0 Right; Type: SAM v5.0; Serial: 1647
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GSM 1900, Left Head, Touch, Mid.ch

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.662 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.3860 W/kg
SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.162 mW/g

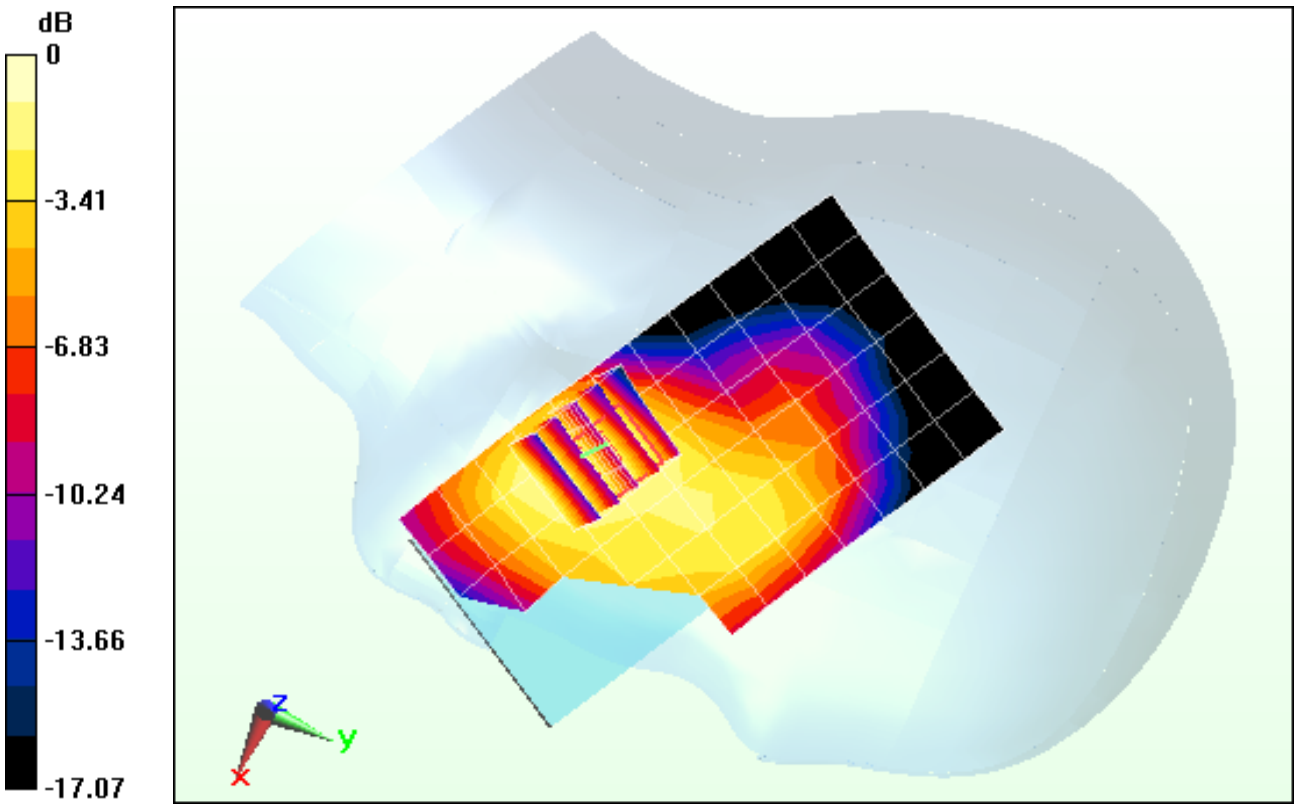

0 dB = 0.270mW/g = -11.37 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: 1900 Head; Medium parameters used:
f = 1880 MHz; σ = 1.377 mho/m; ε_r = 39.02; ρ = 1000 kg/m^3
Phantom section: Left Section

Test Date: 04-17-2012; Ambient Temp: 23.1°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3288; ConvF(5.16, 5.16, 5.16); Calibrated: 2/7/2012
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM V5.0 Right; Type: SAM v5.0; Serial: 1647
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GSM 1900, Left Head, Tilt, Mid.ch

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.698 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.2230 W/kg
SAR(1 g) = 0.147 mW/g; SAR(10 g) = 0.092 mW/g

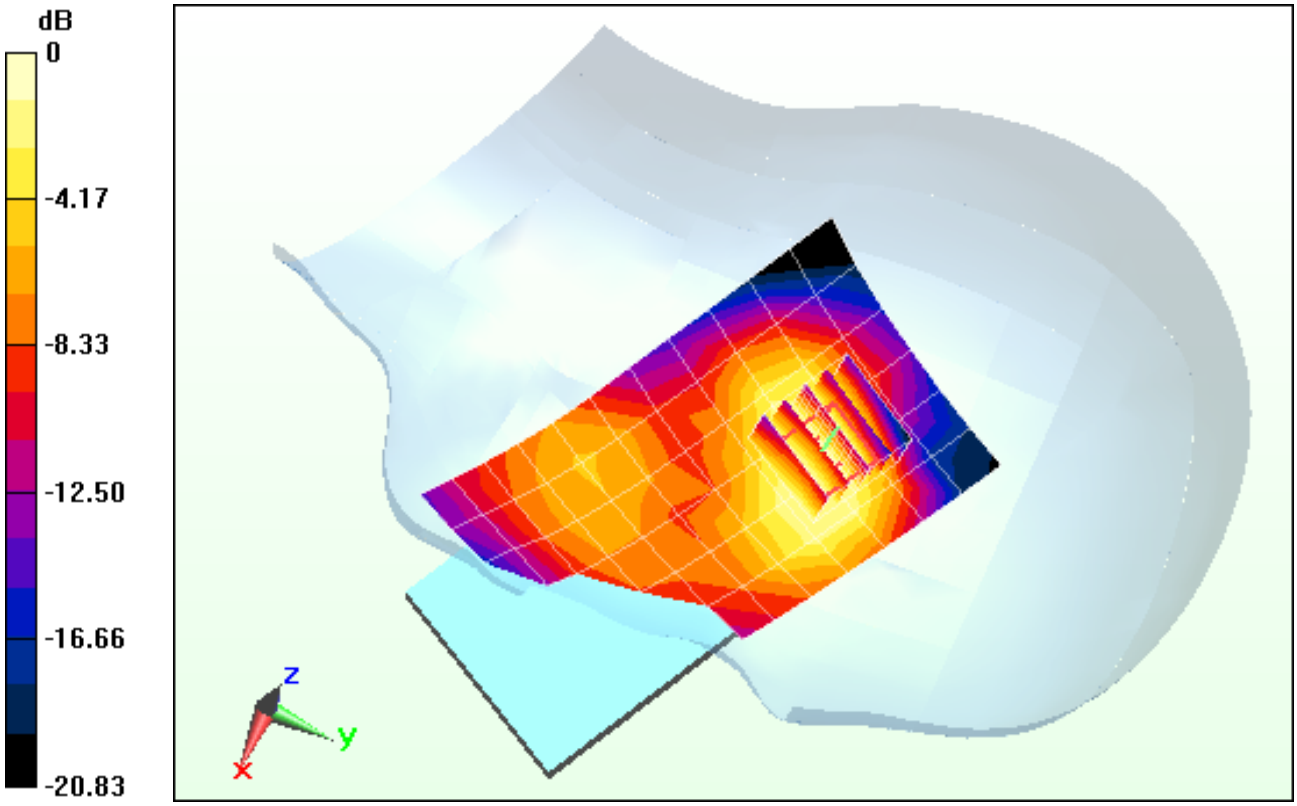

0 dB = 0.160mW/g = -15.92 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Head; Medium parameters used:
f = 1880 MHz; σ = 1.377 mho/m; ε_r = 39.02; ρ = 1000 kg/m^3
Phantom section: Right Section

Test Date: 04-17-2012; Ambient Temp: 23.1°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3288; ConvF(5.16, 5.16, 5.16); Calibrated: 2/7/2012
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM V5.0 Right; Type: SAM v5.0; Serial: 1647
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 1900, Right Head, Touch, Mid.ch

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.167 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.4430 W/kg
SAR(1 g) = 0.301 mW/g; SAR(10 g) = 0.196 mW/g

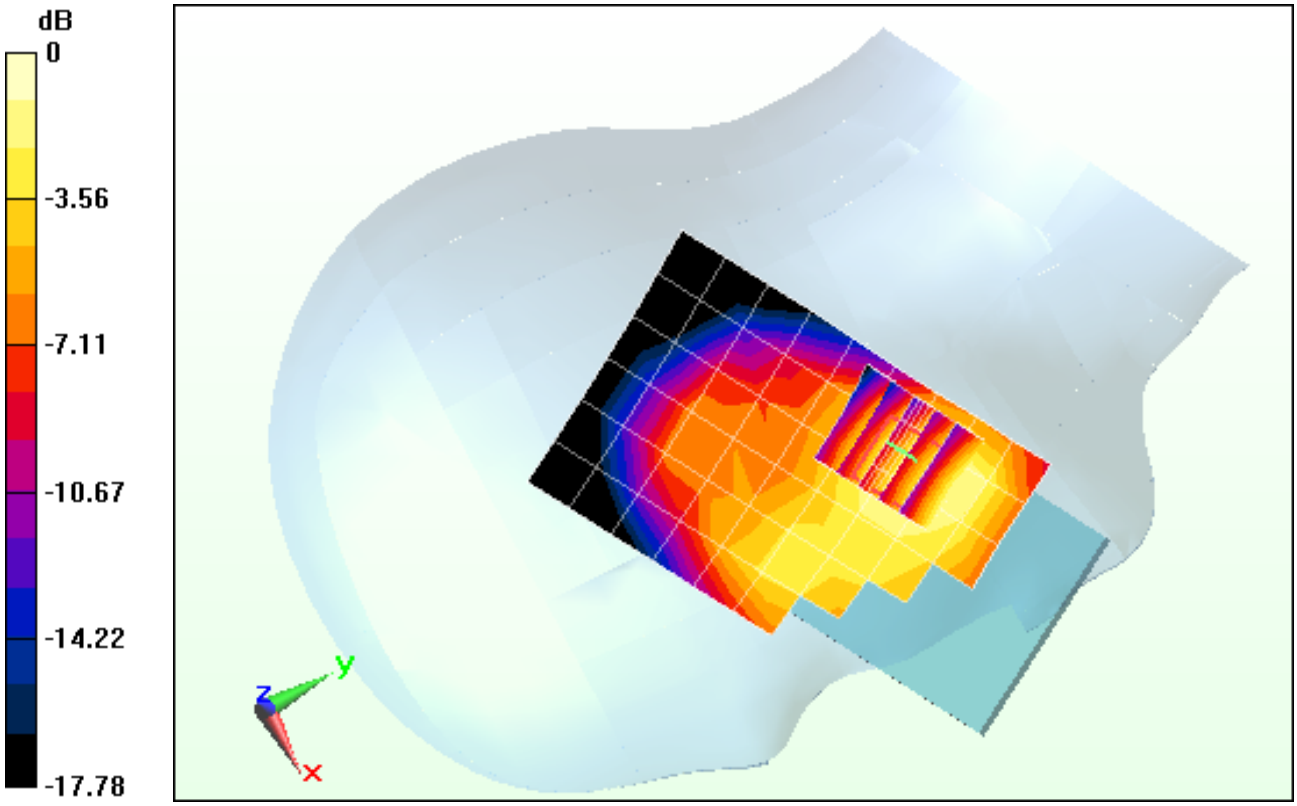

0 dB = 0.330mW/g = -9.63 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Head; Medium parameters used:
f = 1880 MHz; σ = 1.377 mho/m; ε_r = 39.02; ρ = 1000 kg/m^3
Phantom section: Right Section

Test Date: 04-17-2012; Ambient Temp: 23.1°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3288; ConvF(5.16, 5.16, 5.16); Calibrated: 2/7/2012
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM V5.0 Right; Type: SAM v5.0; Serial: 1647
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 1900, Right Head, Tilt, Mid.ch

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.793 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.3240 W/kg
SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.118 mW/g

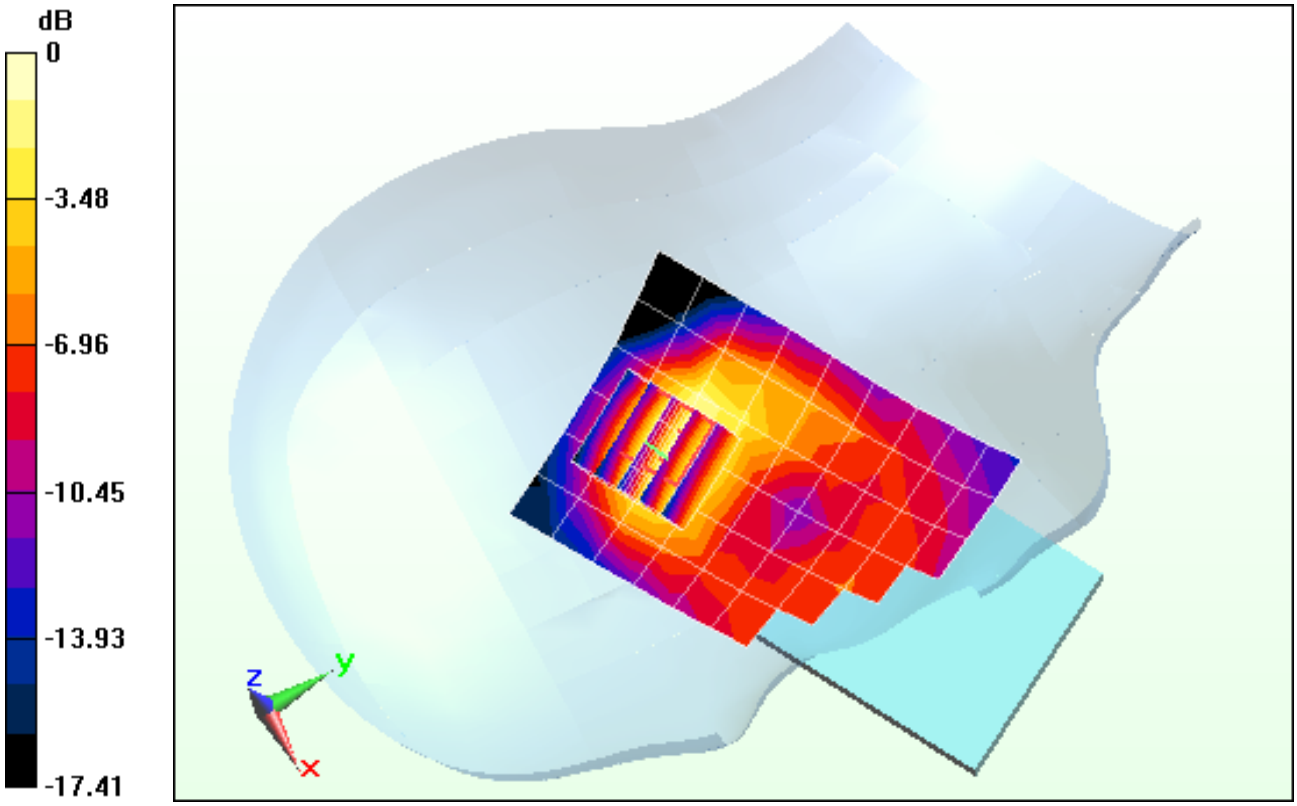

0 dB = 0.220mW/g = -13.15 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Head; Medium parameters used:
f = 1880 MHz; σ = 1.377 mho/m; ε_r = 39.02; ρ = 1000 kg/m^3
Phantom section: Left Section

Test Date: 04-17-2012; Ambient Temp: 23.1°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3288; ConvF(5.16, 5.16, 5.16); Calibrated: 2/7/2012
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM V5.0 Right; Type: SAM v5.0; Serial: 1647
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 1900, Left Head, Touch, Mid.ch

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.396 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.6280 W/kg
SAR(1 g) = 0.405 mW/g; SAR(10 g) = 0.257 mW/g

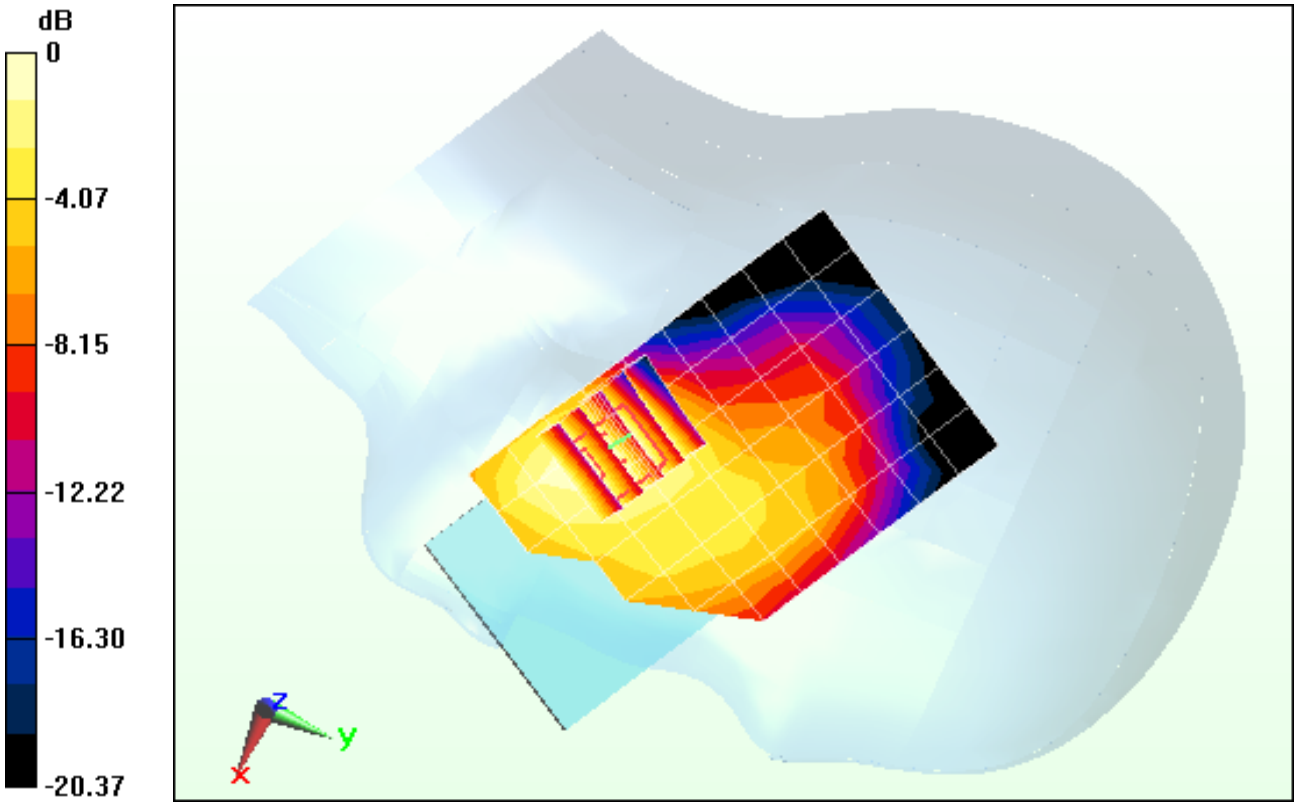

0 dB = 0.440mW/g = -7.13 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Head; Medium parameters used:
f = 1880 MHz; σ = 1.377 mho/m; ε_r = 39.02; ρ = 1000 kg/m^3
Phantom section: Left Section

Test Date: 04-17-2012; Ambient Temp: 23.1°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3288; ConvF(5.16, 5.16, 5.16); Calibrated: 2/7/2012
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM V5.0 Right; Type: SAM v5.0D; Serial: 1647
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 1900, Left Head, Tilt, Mid.ch

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.835 V/m; Power Drift = 0.0013 dB
Peak SAR (extrapolated) = 0.2990 W/kg
SAR(1 g) = 0.197 mW/g; SAR(10 g) = 0.125 mW/g

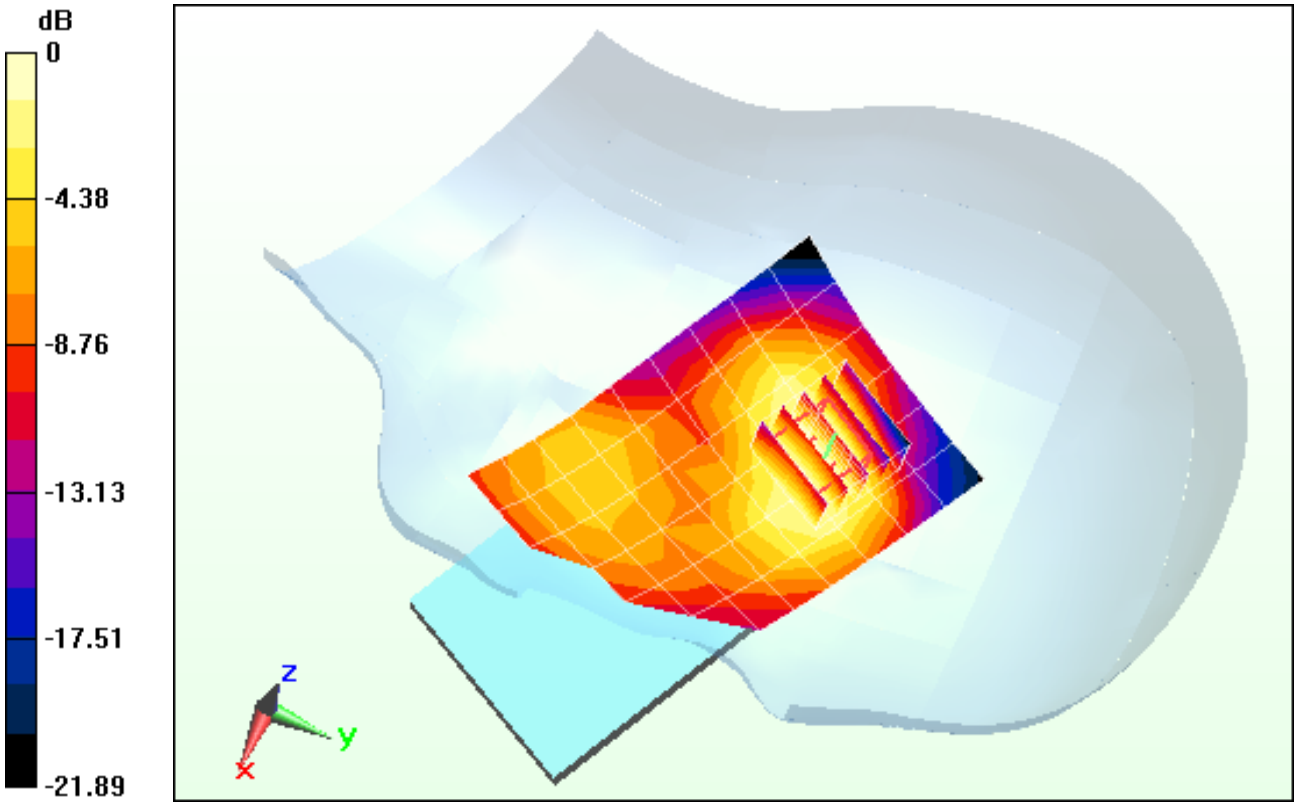

0 dB = 0.210mW/g = -13.56 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37QT

Communication System: IEEE 802.11b; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: 2450 Head; Medium parameters used (interpolated):
f = 2462 MHz; σ = 1.9 mho/m; ε_r = 37.8; ρ = 1000 kg/m^3
Phantom section: Right Section

Test Date: 04-18-2012; Ambient Temp: 23.7 °C; Tissue Temp: 22.4 °C

Probe: ES3DV3 - SN3209; ConvF(4.46, 4.46, 4.46); Calibrated: 3/16/2012
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 2/15/2012
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mode: IEEE 802.11b, Right Head, Touch, Ch 11, 1 Mbps

Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.92 V/m; Power Drift = 0.045 dB
Peak SAR (extrapolated) = 0.153 W/kg
SAR(1 g) = 0.083 mW/g; SAR(10 g) = 0.045 mW/g

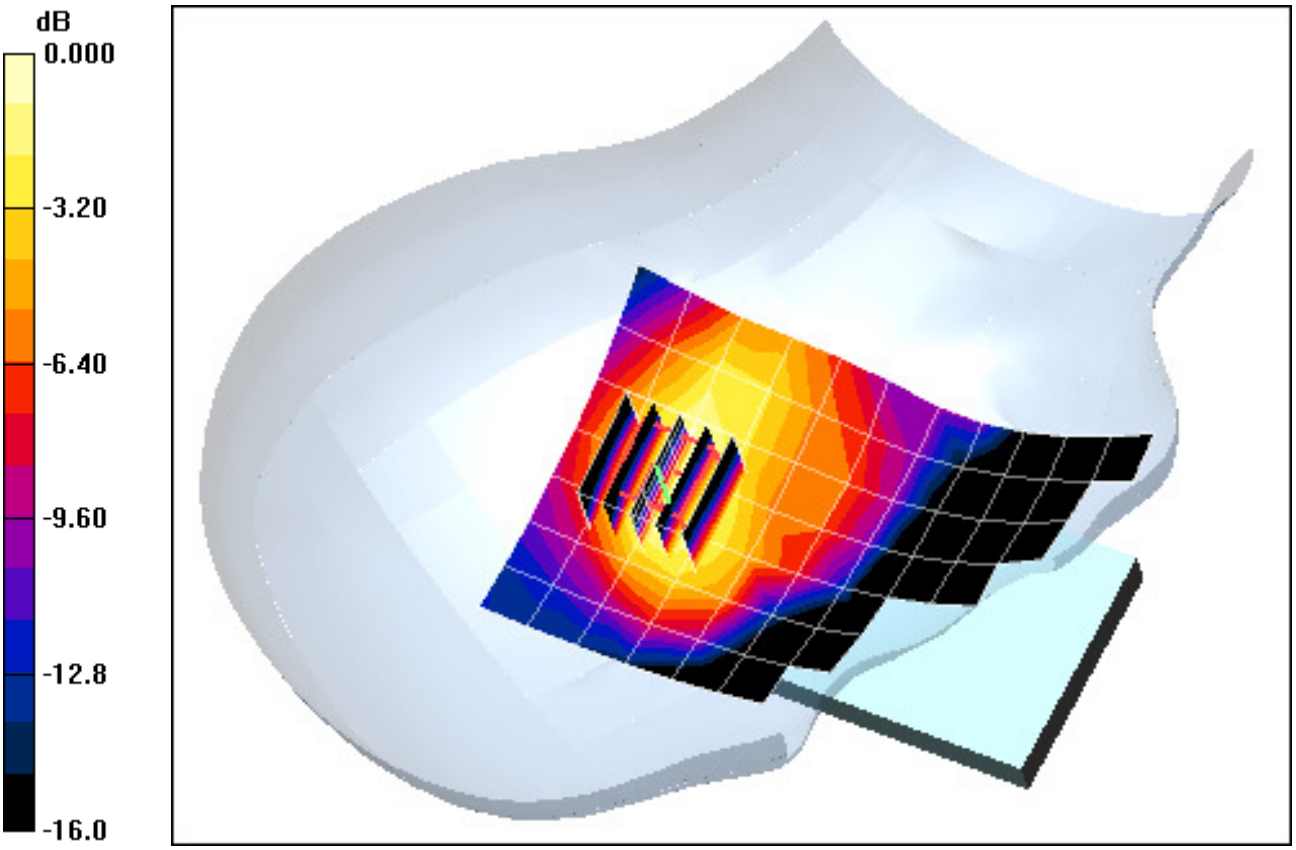

0 dB = 0.101mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37QT

Communication System: IEEE 802.11b; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: 2450 Head; Medium parameters used (interpolated):
f = 2462 MHz; σ = 1.9 mho/m; ε_r = 37.8; ρ = 1000 kg/m^3
Phantom section: Right Section

Test Date: 04-18-2012; Ambient Temp: 23.7 °C; Tissue Temp: 22.4 °C

Probe: ES3DV3 - SN3209; ConvF(4.46, 4.46, 4.46); Calibrated: 3/16/2012
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 2/15/2012
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mode: IEEE 802.11b, Right Head, Tilt, Ch 11, 1 Mbps

Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.63 V/m; Power Drift = -0.011 dB
Peak SAR (extrapolated) = 0.148 W/kg
SAR(1 g) = 0.077 mW/g; SAR(10 g) = 0.039 mW/g

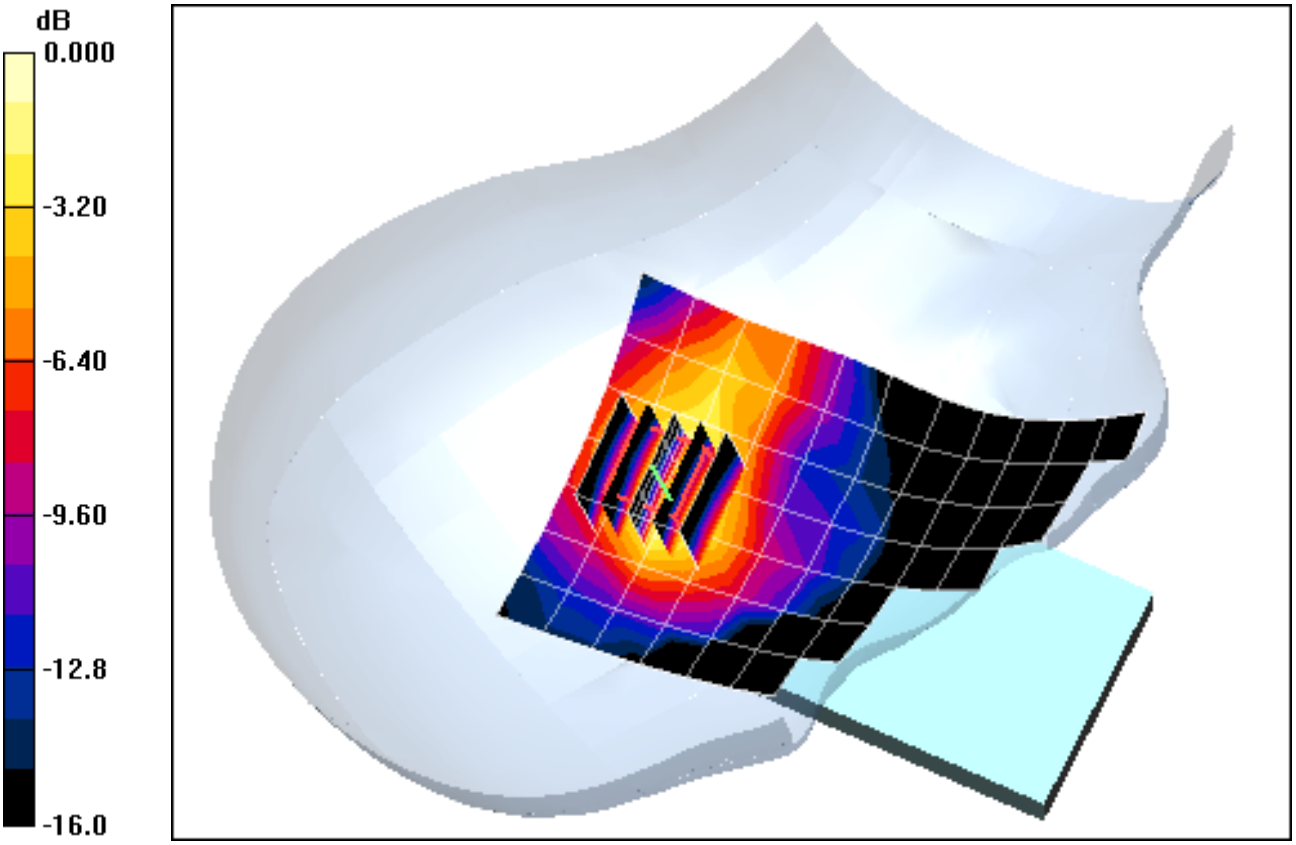

0 dB = 0.097mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37QT

Communication System: IEEE 802.11b; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: 2450 Head; Medium parameters used (interpolated):
f = 2462 MHz; σ = 1.9 mho/m; ε_r = 37.8; ρ = 1000 kg/m^3
Phantom section: Left Section

Test Date: 04-18-2012; Ambient Temp: 23.7 °C; Tissue Temp: 22.4 °C

Probe: ES3DV3 - SN3209; ConvF(4.46, 4.46, 4.46); Calibrated: 3/16/2012
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 2/15/2012
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mode: IEEE 802.11b, Left Head, Touch, Ch 11, 1 Mbps

Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.84 V/m; Power Drift = 0.011 dB
Peak SAR (extrapolated) = 0.313 W/kg
SAR(1 g) = 0.148 mW/g; SAR(10 g) = 0.072 mW/g

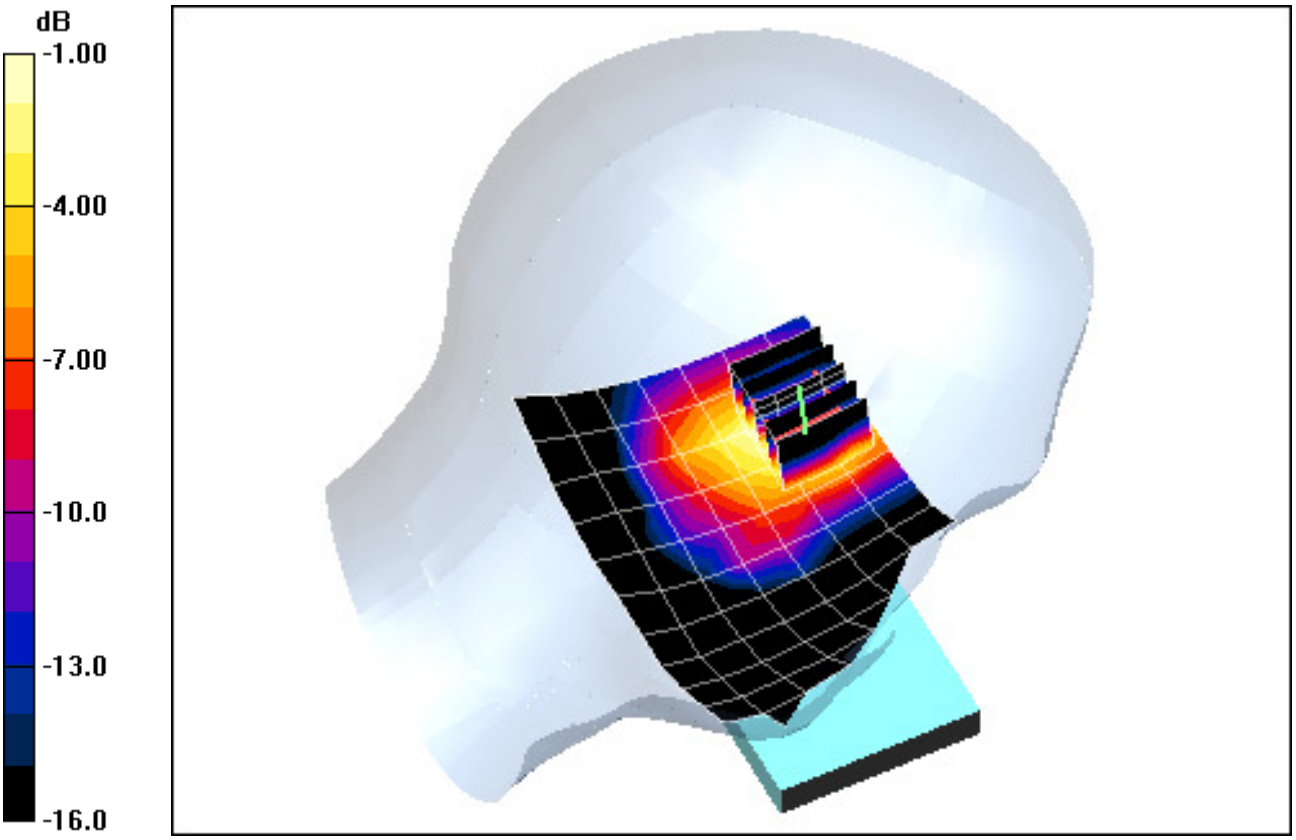

0 dB = 0.188mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37QT

Communication System: IEEE 802.11b; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: 2450 Head; Medium parameters used (interpolated):
f = 2462 MHz; σ = 1.9 mho/m; ε_r = 37.8; ρ = 1000 kg/m^3
Phantom section: Left Section

Test Date: 04-18-2012; Ambient Temp: 23.7 °C; Tissue Temp: 22.4 °C

Probe: ES3DV3 - SN3209; ConvF(4.46, 4.46, 4.46); Calibrated: 3/16/2012
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 2/15/2012
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mode: IEEE 802.11b, Left Head, Tilt, Ch 11, 1 Mbps

Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.18 V/m; Power Drift = 0.015 dB
Peak SAR (extrapolated) = 0.188 W/kg
SAR(1 g) = 0.092 mW/g; SAR(10 g) = 0.046 mW/g

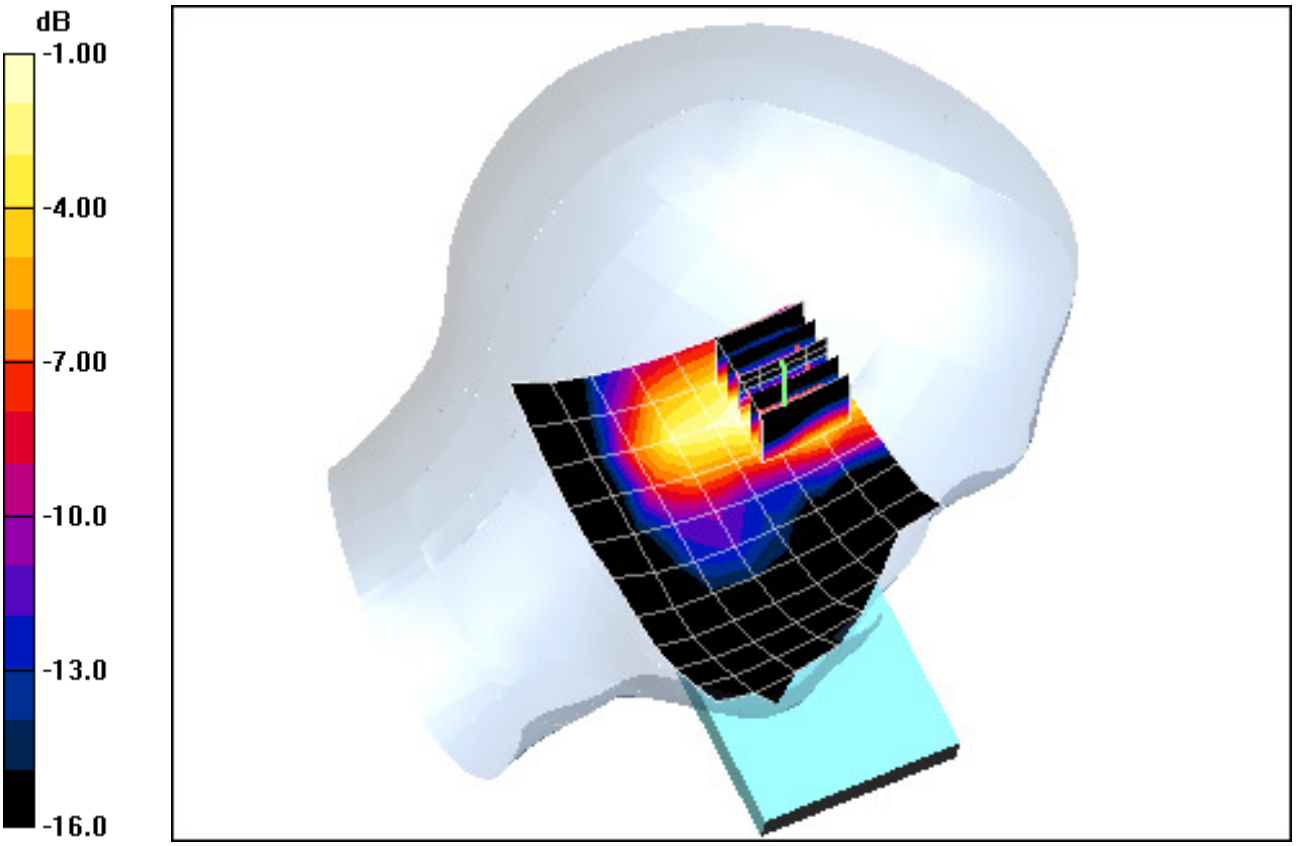

0 dB = 0.118mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37QT

Communication System: IEEE 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1
Medium: 5 GHz Head; Medium parameters used:
f = 5260 MHz; σ = 4.679 mho/m; ε_r = 35.42; ρ = 1000 kg/m^3
Phantom section: Right Section

Test Date: 04-18-2012; Ambient Temp: 24.7°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3589; ConvF(4.36, 4.36, 4.36); Calibrated: 1/27/2012
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM 5.0 front; Type: SAM v5.0; Serial: TP:-1648
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: IEEE 802.11a, 5.3 GHz, Right Head, Touch, Ch 52, 6 Mbps

Area Scan (11x21x1): Measurement grid: dx=10mm, dy=10mm
Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.603 V/m; Power Drift = 0.0289 dB
Peak SAR (extrapolated) = 0.2500 W/kg
SAR(1 g) = 0.026 mW/g; SAR(10 g) = 0.00634 mW/g

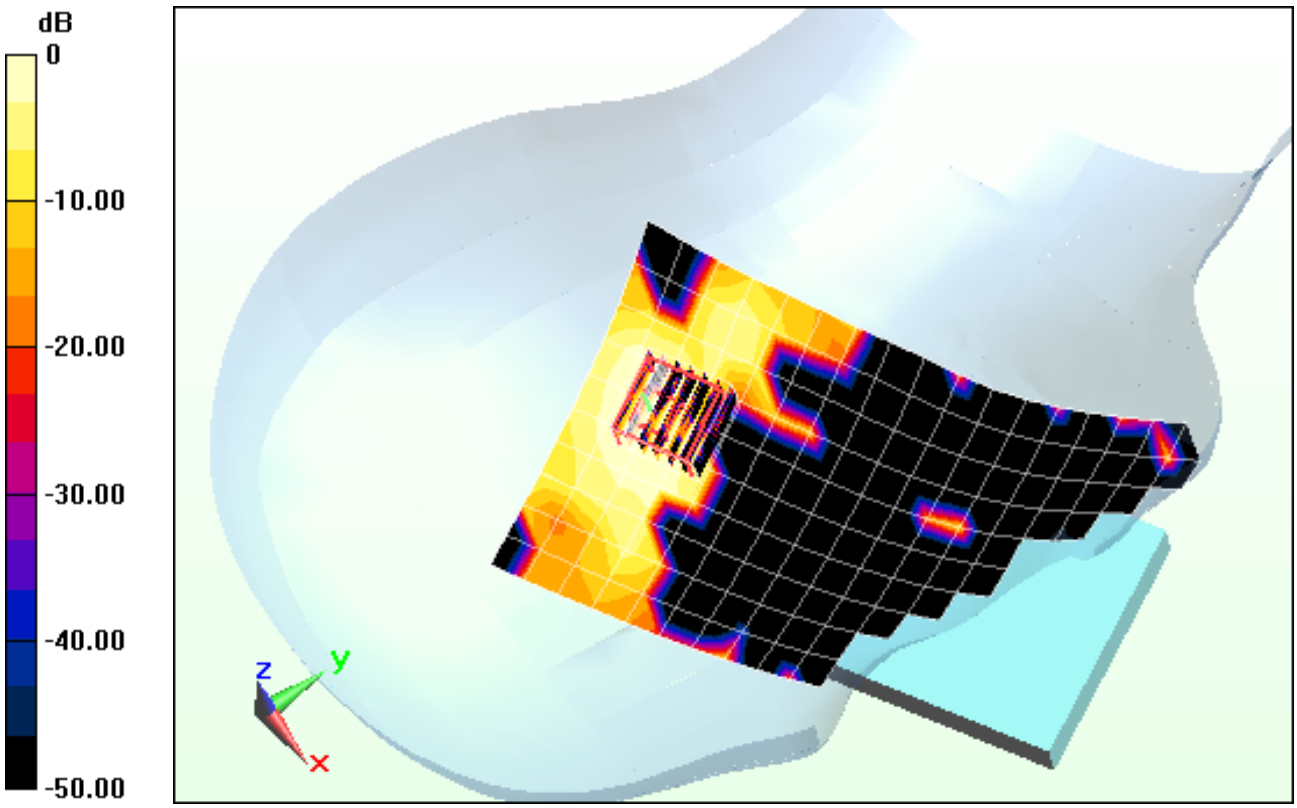

0 dB = 0.050mW/g = -26.02 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37QT

Communication System: IEEE 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1
Medium: 5 GHz Head; Medium parameters used:
f = 5260 MHz; σ = 4.679 mho/m; ε_r = 35.42; ρ = 1000 kg/m^3
Phantom section: Right Section

Test Date: 04-18-2012; Ambient Temp: 24.7°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3589; ConvF(4.36, 4.36, 4.36); Calibrated: 1/27/2012
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM 5.0 front; Type: SAM v5.0; Serial: TP:-1648
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: IEEE 802.11a, 5.3 GHz, Right Head, Tilt, Ch 52, 6 Mbps

Area Scan (11x21x1): Measurement grid: dx=10mm, dy=10mm
Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.446 V/m; Power Drift = 0.0383 dB
Peak SAR (extrapolated) = 0.2490 W/kg
SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.010 mW/g

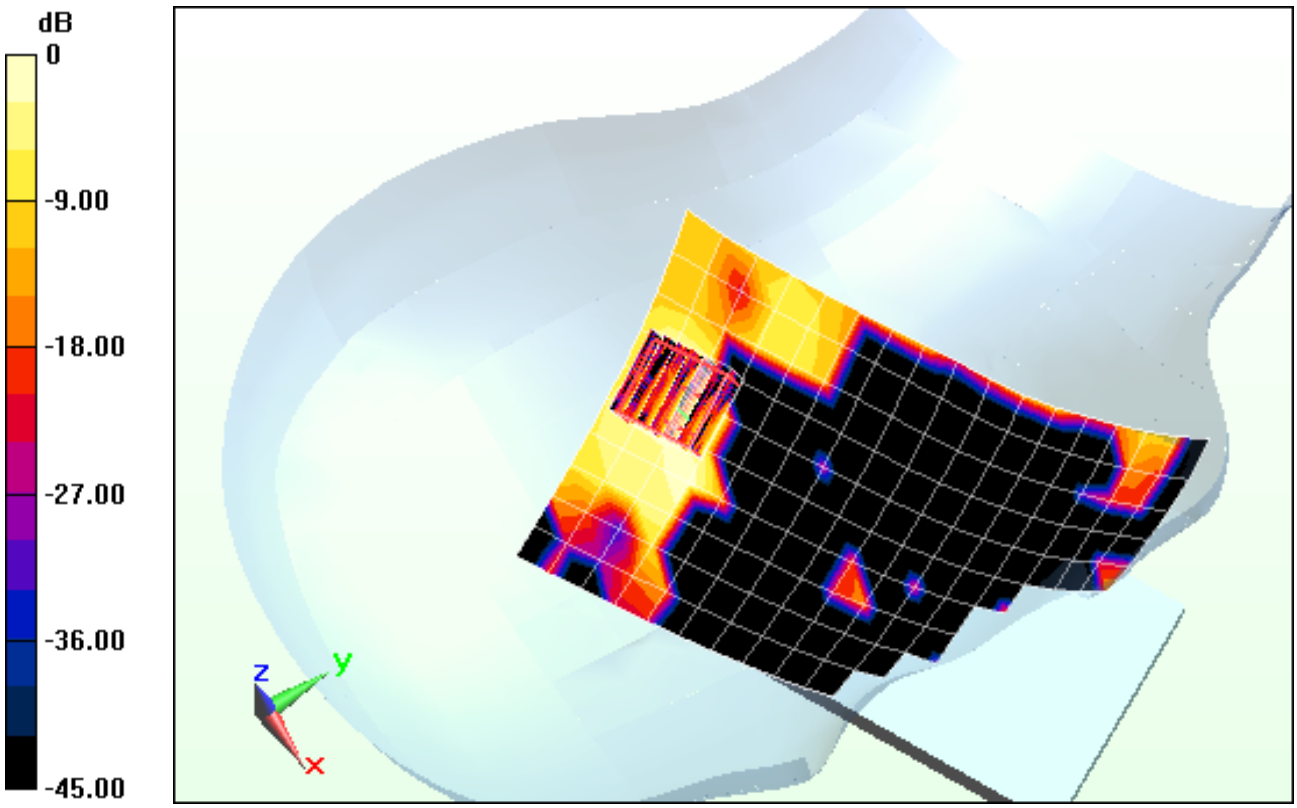

0 dB = 0.070mW/g = -23.10 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37QT

Communication System: IEEE 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1
Medium: 5 GHz Head; Medium parameters used:
f = 5825 MHz; σ = 5.141 mho/m; ε_r = 34.14; ρ = 1000 kg/m^3
Phantom section: Left Section

Test Date: 04-18-2012; Ambient Temp: 24.5°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN3589; ConvF(4.05, 4.05, 4.05); Calibrated: 1/27/2012
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM 5.0 front; Type: SAM v5.0; Serial: TP:-1648
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: IEEE 802.11a, 5.8 GHz, Left Head, Touch, Ch 165, 6 Mbps

Area Scan (11x21x1): Measurement grid: dx=10mm, dy=10mm
Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 2.316 V/m; Power Drift = 0.137 dB
Peak SAR (extrapolated) = 0.3160 W/kg
SAR(1 g) = 0.031 mW/g; SAR(10 g) = 0.00874 mW/g

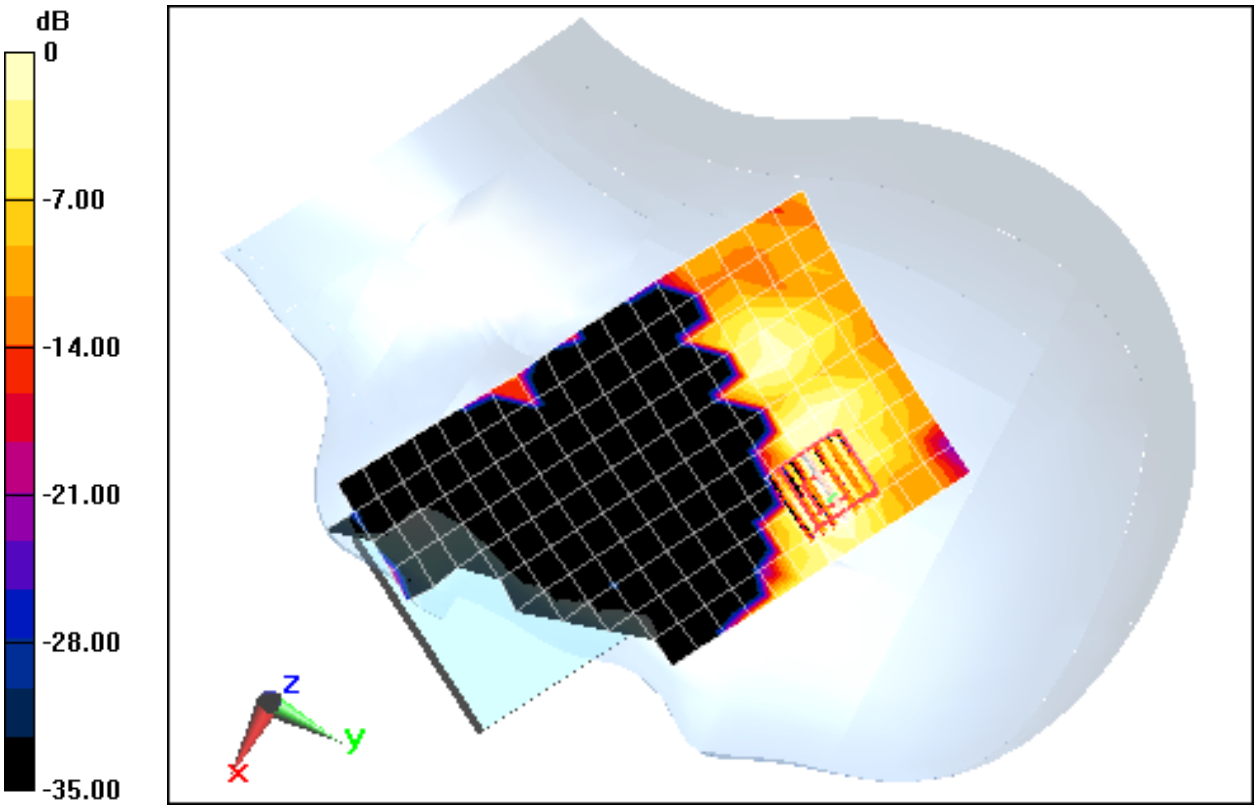

0 dB = 0.060mW/g = -24.44 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37QT

Communication System: IEEE 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1
Medium: 5 GHz Head; Medium parameters used:
f = 5260 MHz; σ = 4.679 mho/m; ε_r = 35.42; ρ = 1000 kg/m^3
Phantom section: Left Section

Test Date: 04-18-2012; Ambient Temp: 24.7°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3589; ConvF(4.36, 4.36, 4.36); Calibrated: 1/27/2012
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM 5.0 front; Type: SAM v5.0; Serial: TP:-1648
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: IEEE 802.11a, 5.3 GHz, Left Head, Tilt, Ch 52, 6 Mbps

Area Scan (11x21x1): Measurement grid: dx=10mm, dy=10mm
Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 3.576 V/m; Power Drift = 0.100 dB
Peak SAR (extrapolated) = 0.3330 W/kg
SAR(1 g) = 0.072 mW/g; SAR(10 g) = 0.021 mW/g

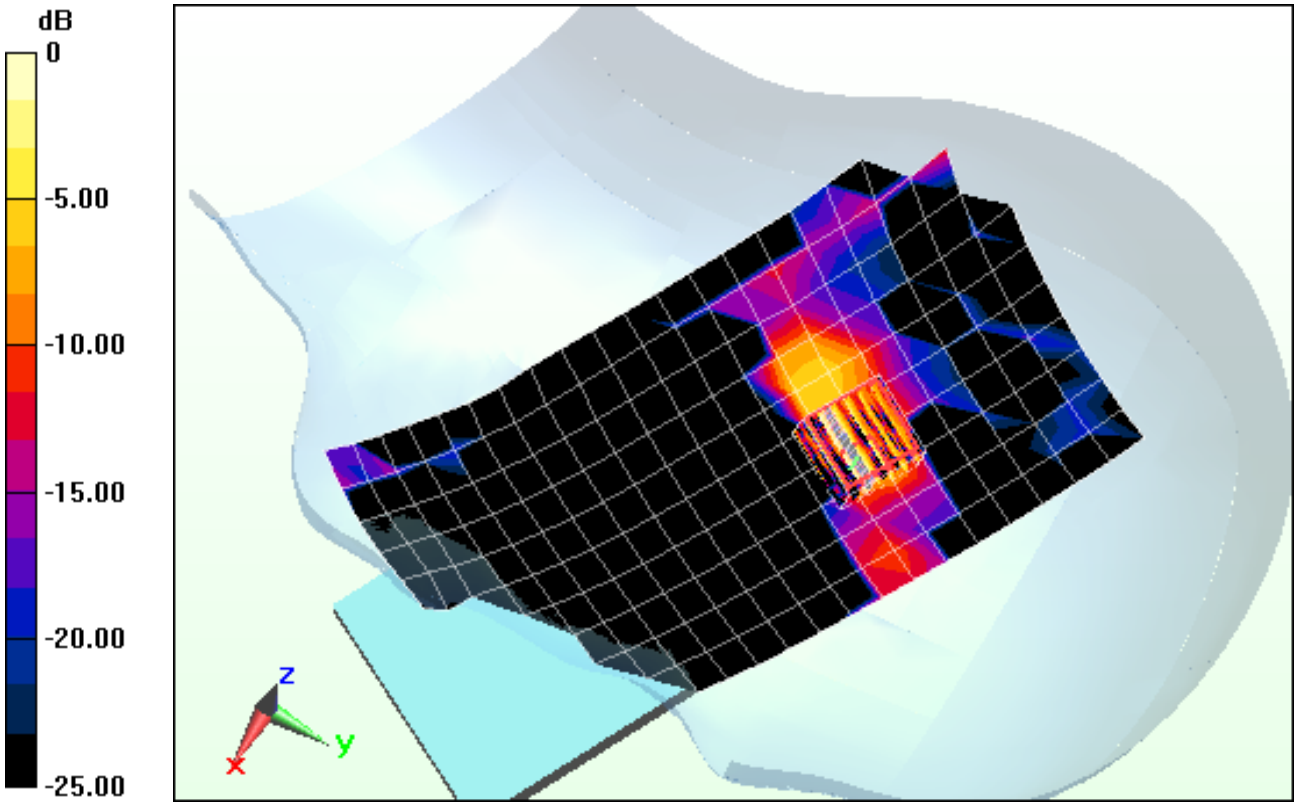

0 dB = 0.160mW/g = -15.92 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM GPRS; 4 Tx slots; Frequency: 848.8 MHz; Duty Cycle: 1:2.076
Medium: 835 Body; Medium parameters used (interpolated):
f = 848.8 MHz; σ = 1.022 mho/m; ε_r = 53.881; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 24.3°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3263; ConvF(6.22, 6.22, 6.22); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GPRS 850, Body SAR, Back side, High.ch, 4 Tx Slots

Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 31.886 V/m; Power Drift = -0.0088 dB
Peak SAR (extrapolated) = 1.3410 W/kg
SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.774 mW/g

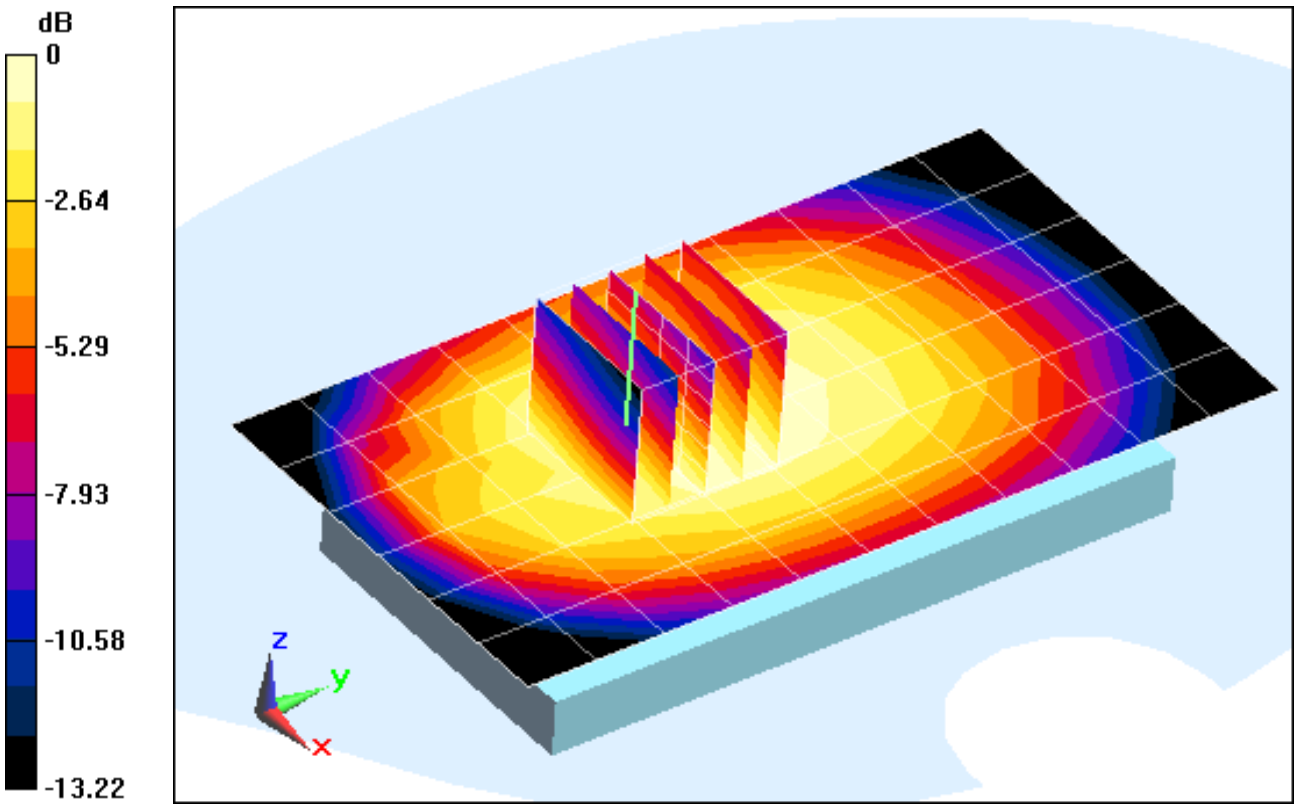

0 dB = 1.080mW/g = 0.67 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM GPRS; 4 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.076
Medium: 835 Body; Medium parameters used (interpolated):
f = 836.6 MHz; σ = 1.009 mho/m; ε_r = 53.995; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 24.3°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3263; ConvF(6.22, 6.22, 6.22); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GPRS 850, Body SAR, Front side, Mid.ch, 4 Tx Slots

Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 23.292 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.6730 W/kg
SAR(1 g) = 0.525 mW/g; SAR(10 g) = 0.404 mW/g

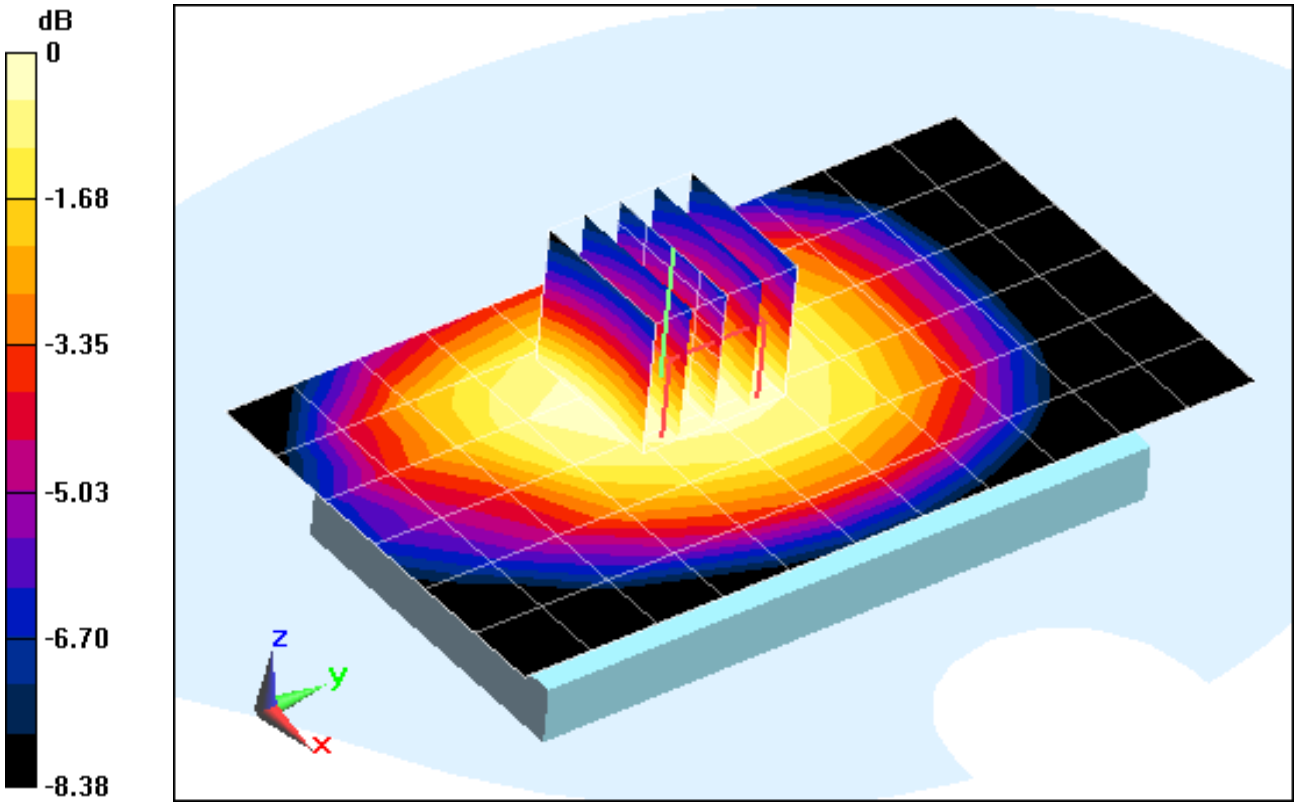

0 dB = 0.550mW/g = -5.19 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM GPRS; 4 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.076
Medium: 835 Body Medium parameters used (interpolated):
f = 836.6 MHz; σ = 1.009 mho/m; ε_r = 53.995; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 24.3°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3263; ConvF(6.22, 6.22, 6.22); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GPRS 850, Body SAR, Bottom Edge, Mid.ch, 4 Tx Slots

Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.966 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.2270 W/kg
SAR(1 g) = 0.132 mW/g; SAR(10 g) = 0.075 mW/g

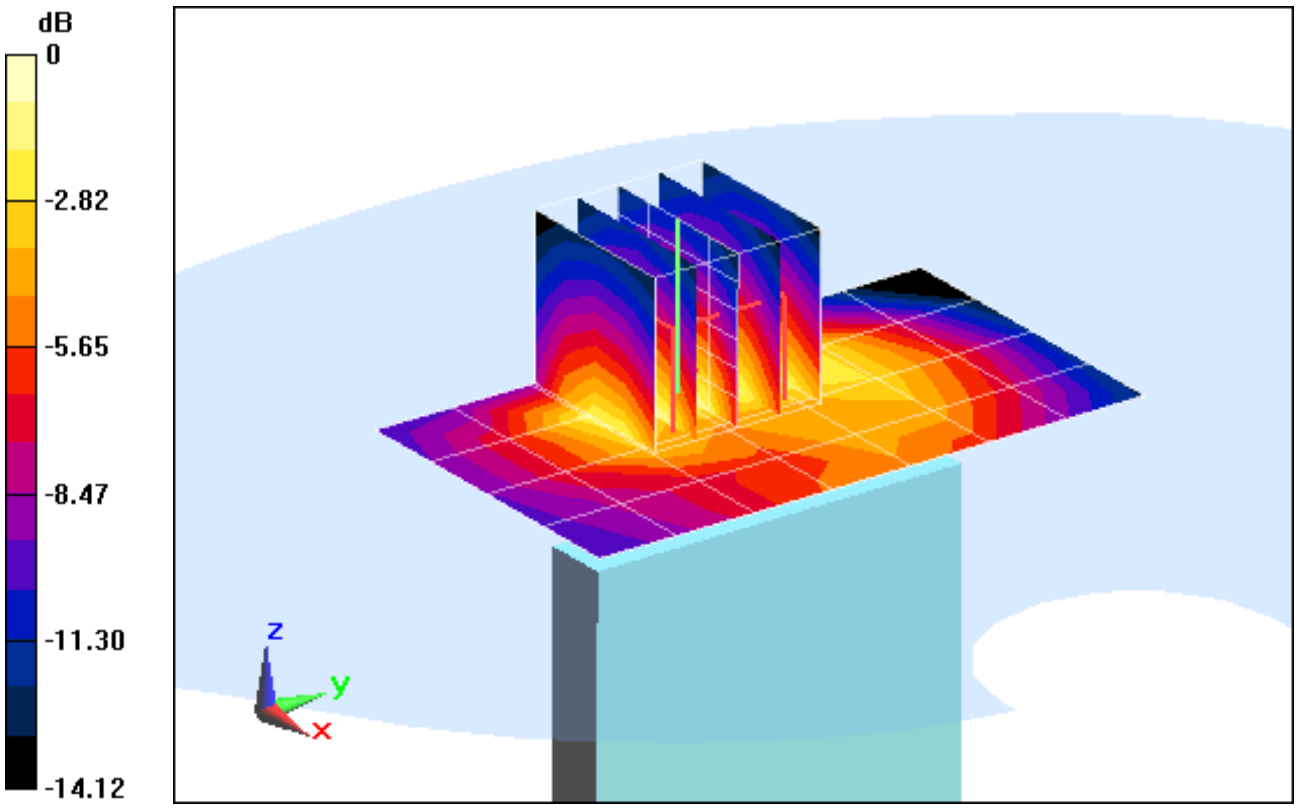

0 dB = 0.150mW/g = -16.48 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM GPRS; 4 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.076
Medium: 835 Body; Medium parameters used (interpolated):
f = 836.6 MHz; σ = 1.009 mho/m; ε_r = 53.995; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 24.3°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3263; ConvF(6.22, 6.22, 6.22); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GPRS 850, Body SAR, Right Edge, Mid.ch, 4 Tx Slots

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 27.175 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.0440 W/kg
SAR(1 g) = 0.722 mW/g; SAR(10 g) = 0.494 mW/g

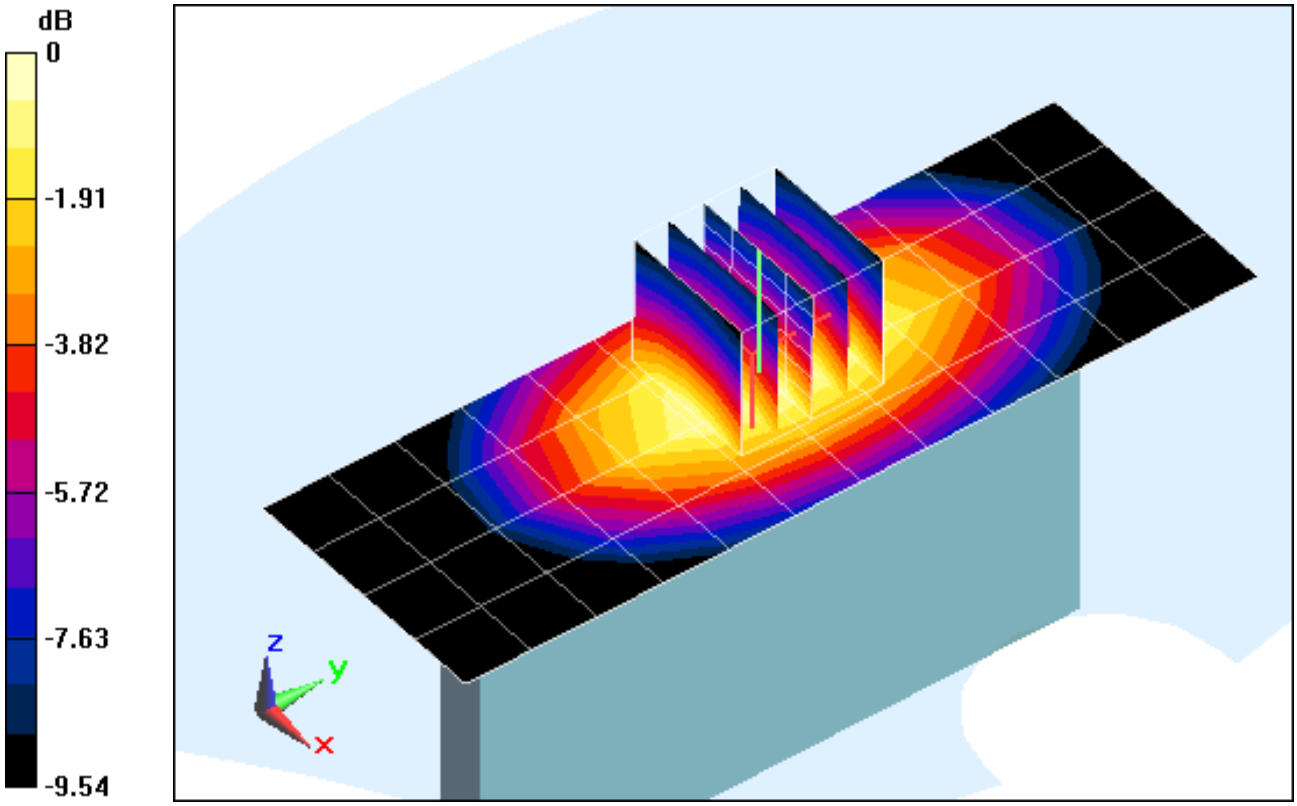

0 dB = 0.770mW/g = -2.27 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM GPRS; 4 Tx slots; Frequency: 836.6 MHz;Duty Cycle: 1:2.076
Medium: 835 Body; Medium parameters used (interpolated):
f = 836.6 MHz; σ = 1.009 mho/m; ε_r = 53.995; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 24.3°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3263; ConvF(6.22, 6.22, 6.22); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GPRS 850, Body SAR, Left Edge, Mid.ch, 4 Tx Slots

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 24.437 V/m; Power Drift = -0.0023 dB
Peak SAR (extrapolated) = 0.8460 W/kg
SAR(1 g) = 0.580 mW/g; SAR(10 g) = 0.392 mW/g

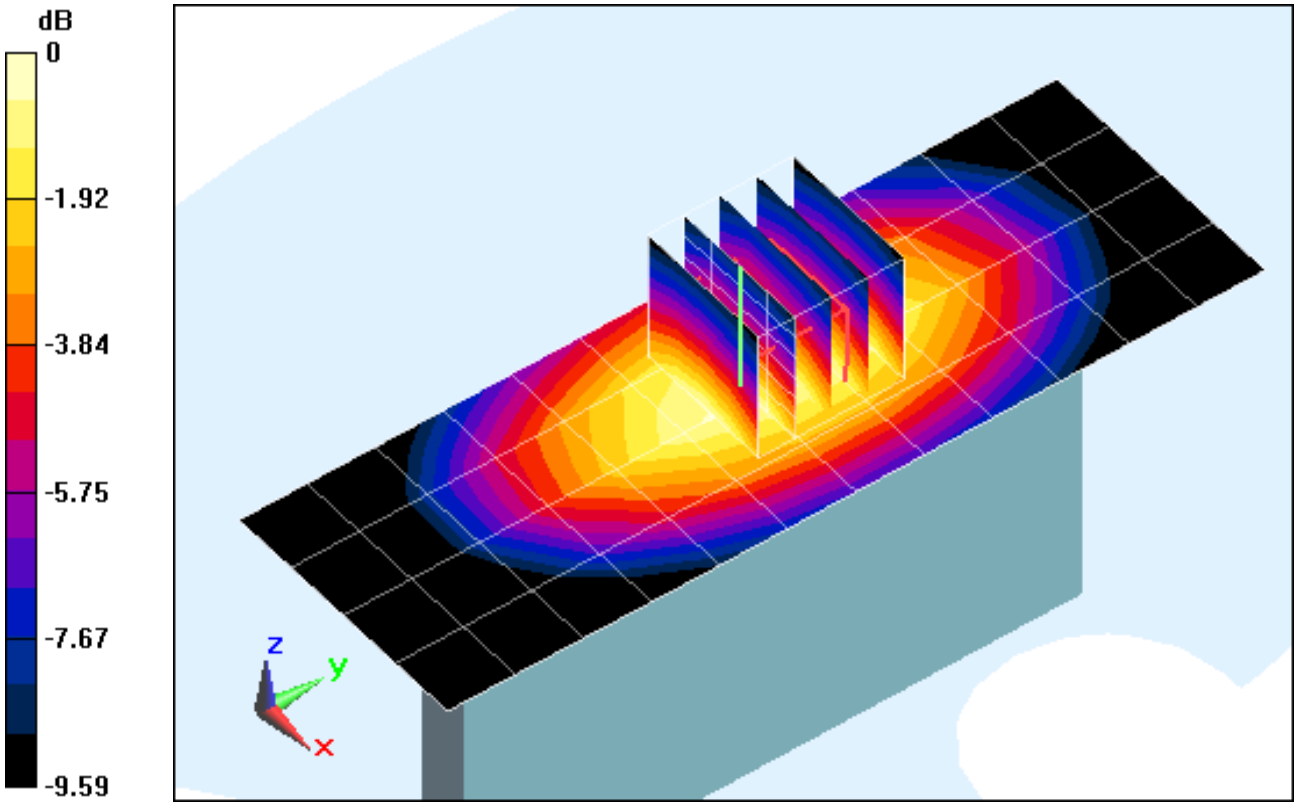

0 dB = 0.610mW/g = -4.29 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Body; Medium parameters used (interpolated):
f = 836.6 MHz; σ = 1.009 mho/m; ε_r = 53.995; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 24.3°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3263; ConvF(6.22, 6.22, 6.22); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0D; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 850, Body SAR, Back side, Mid.ch

Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 22.570 V/m; Power Drift = -0.00064 dB
Peak SAR (extrapolated) = 0.6310 W/kg
SAR(1 g) = 0.493 mW/g; SAR(10 g) = 0.375 mW/g

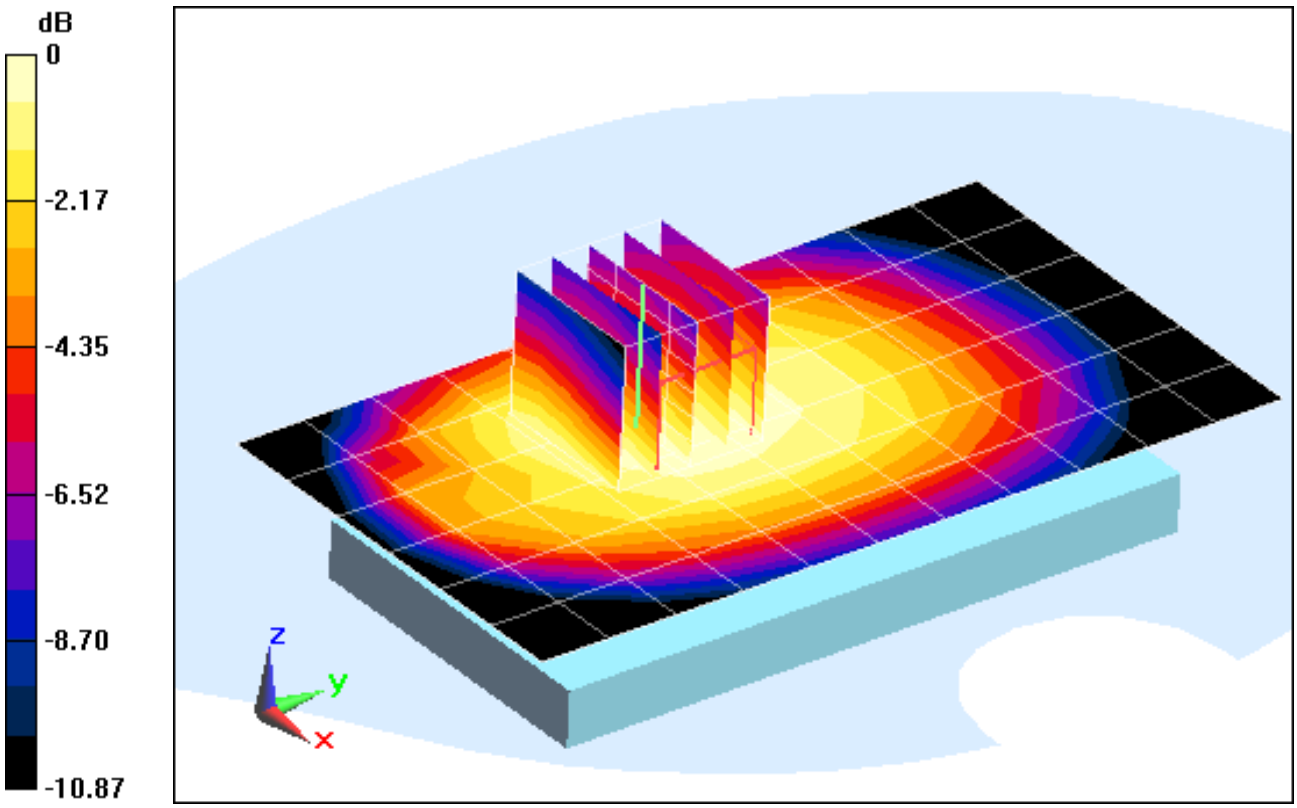

0 dB = 0.520mW/g = -5.68 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Body Medium parameters used (interpolated):
f = 836.6 MHz; σ = 1.009 mho/m; ε_r = 53.995; ρ = 1000 kg/m^3
Phantom section: Flat Section ; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 24.3°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3263; ConvF(6.22, 6.22, 6.22); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0D; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 850, Body SAR, Front side, Mid.ch

Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.002 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.3140 W/kg
SAR(1 g) = 0.246 mW/g; SAR(10 g) = 0.189 mW/g

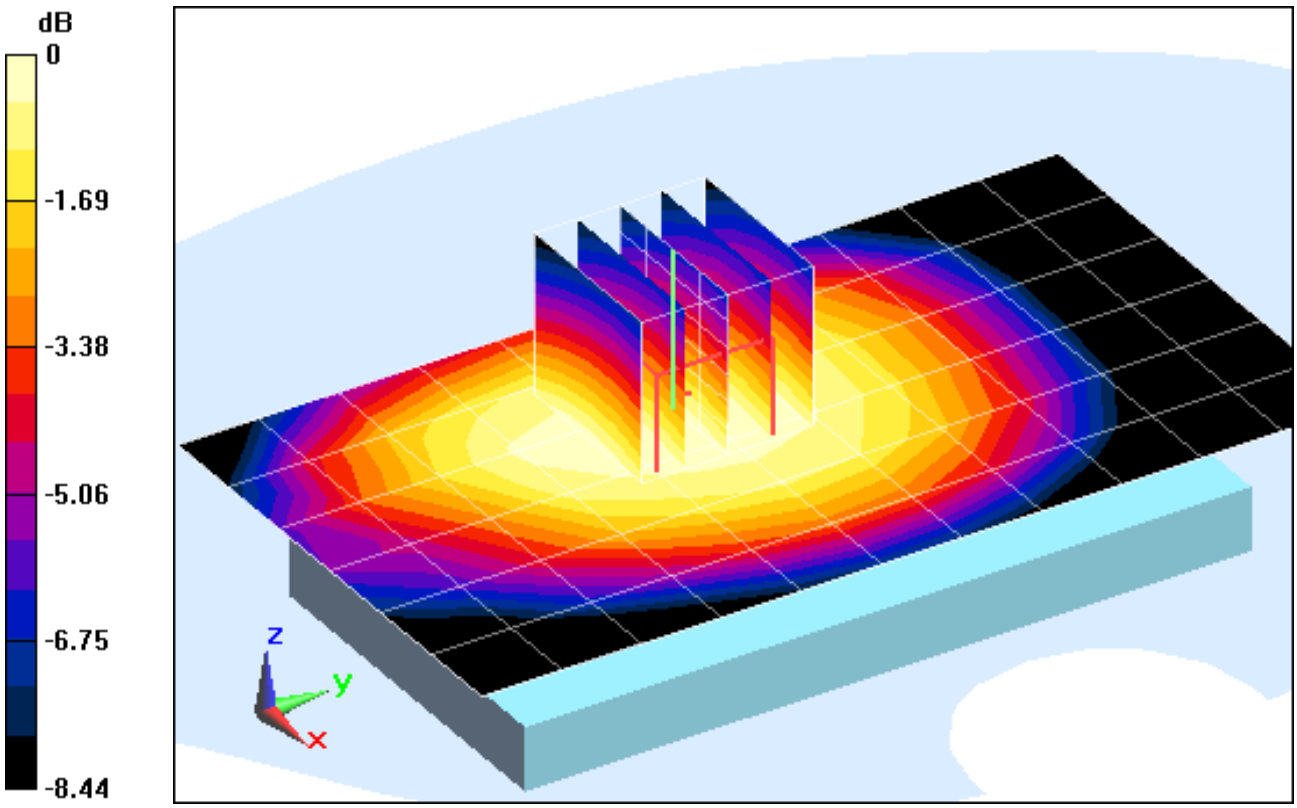

0 dB = 0.260mW/g = -11.70 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Body; Medium parameters used (interpolated):
f = 836.6 MHz; σ = 1.009 mho/m; ε_r = 53.995; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 24.3°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3263; ConvF(6.22, 6.22, 6.22); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 850, Body SAR, Bottom Edge, Mid.ch

Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.176 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.1080 W/kg
SAR(1 g) = 0.063 mW/g; SAR(10 g) = 0.035 mW/g

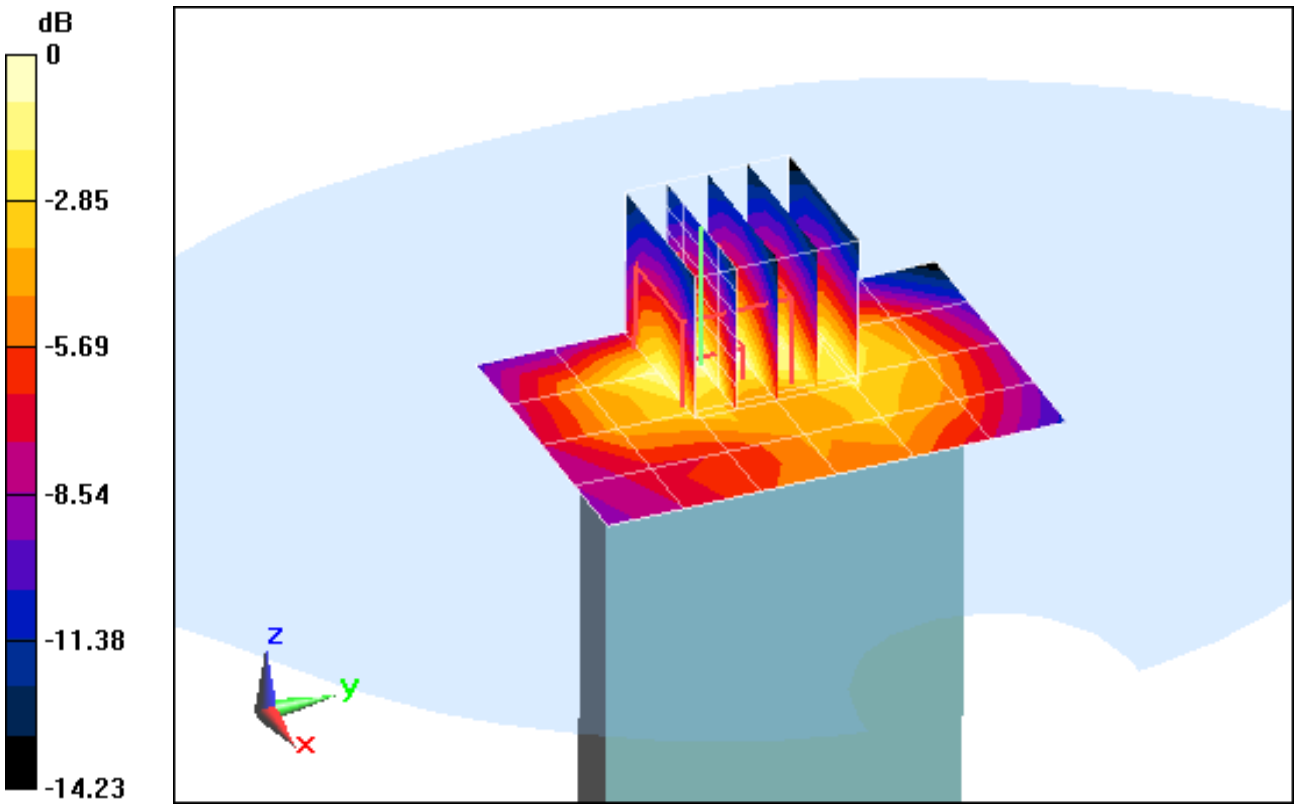

0 dB = 0.070mW/g = -23.10 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Body; Medium parameters used (interpolated):
f = 836.6 MHz; σ = 1.009 mho/m; ε_r = 53.995; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 24.3°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3263; ConvF(6.22, 6.22, 6.22); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 850, Body SAR, Right Edge, Mid.ch

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.205 V/m; Power Drift = -0.0008 dB
Peak SAR (extrapolated) = 0.5170 W/kg
SAR(1 g) = 0.358 mW/g; SAR(10 g) = 0.244 mW/g

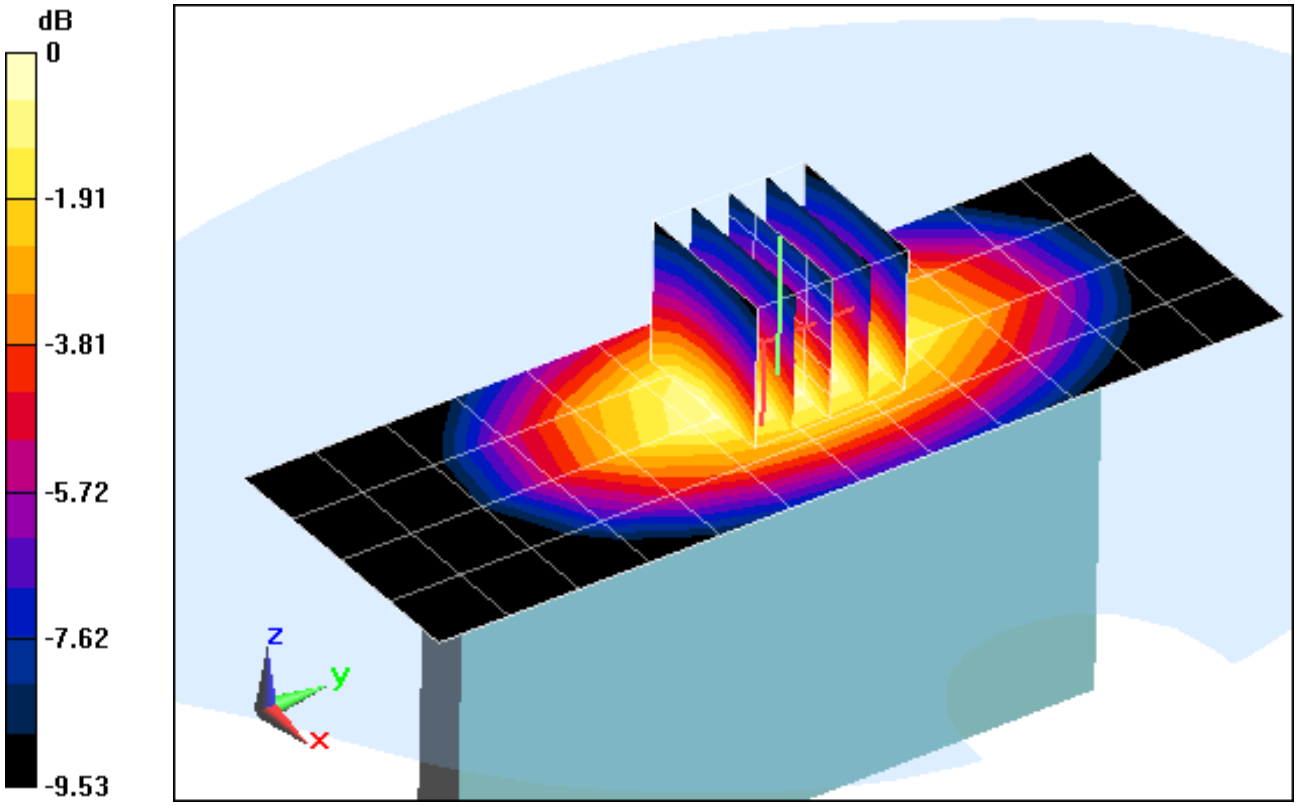

0 dB = 0.380mW/g = -8.40 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Body; Medium parameters used (interpolated):
f = 836.6 MHz; σ = 1.009 mho/m; ε_r = 53.995; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 24.3°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3263; ConvF(6.22, 6.22, 6.22); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 850, Body SAR, Left Edge, Mid.ch

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.062 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.3980 W/kg
SAR(1 g) = 0.275 mW/g; SAR(10 g) = 0.187 mW/g

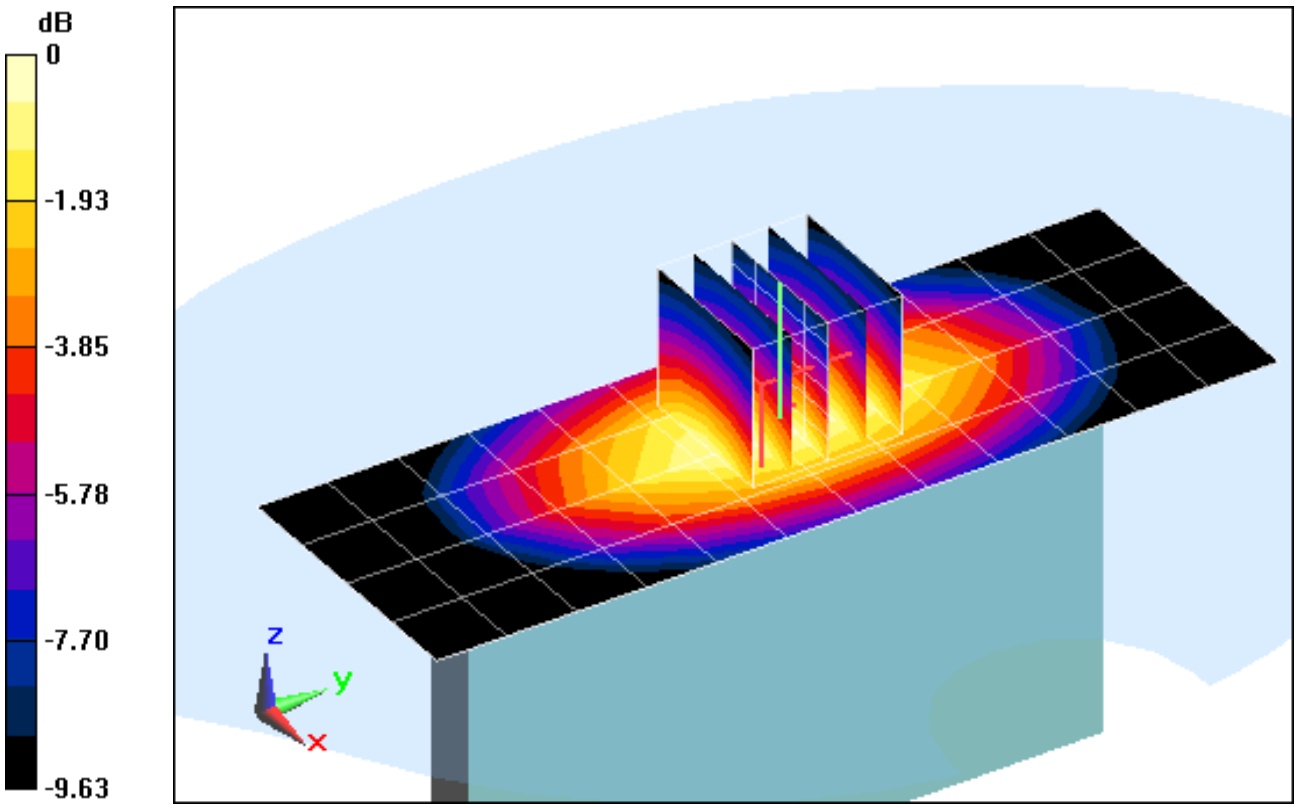

0 dB = 0.300mW/g = -10.46 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM1900 GPRS; 4 Tx slots; Frequency: 1850.2 MHz;Duty Cycle: 1:2.076
Medium: 1900 Body; Medium parameters used:
f = 1850.2 MHz; σ = 1.447 mho/m; ε_r = 53.72; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2012; Ambient Temp: 24.3°C; Tissue Temp: 23.9°C

Probe: ES3DV3 - SN3263; ConvF(4.81, 4.81, 4.81); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GPRS 1900, Body SAR, Back side, Low.ch, 4 Tx Slots

Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 26.039 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.4200 W/kg
SAR(1 g) = 0.948 mW/g; SAR(10 g) = 0.600 mW/g

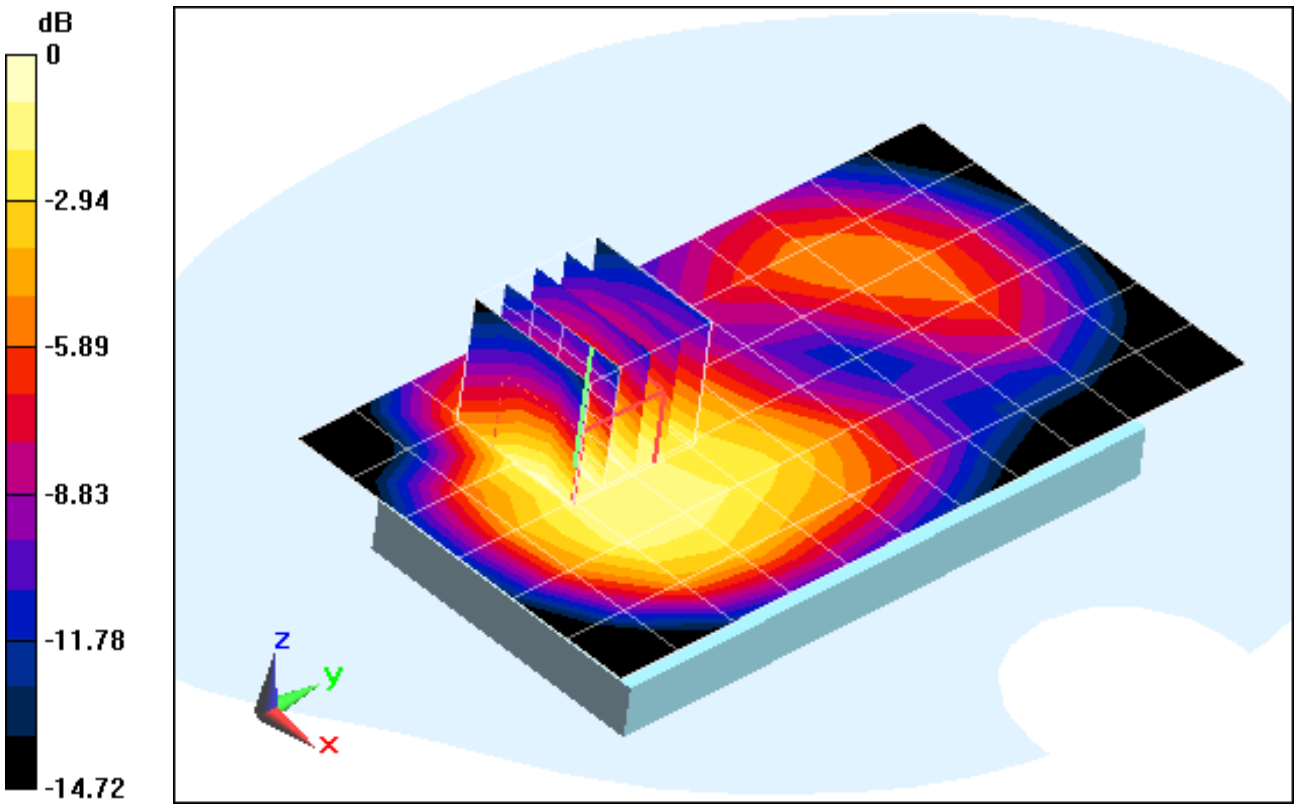

0 dB = 1.010mW/g = 0.09 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM GPRS 1900; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.076
Medium: 1900 Body; Medium parameters used:
f = 1880 MHz; σ = 1.482 mho/m; ε_r = 53.67; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2012; Ambient Temp: 24.3°C; Tissue Temp: 23.9°C

Probe: ES3DV3 - SN3263; ConvF(4.81, 4.81, 4.81); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GPRS 1900, Body SAR, Front side, Mid.ch, 4 Tx Slots

Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 25.154 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.3770 W/kg
SAR(1 g) = 0.904 mW/g; SAR(10 g) = 0.568 mW/g

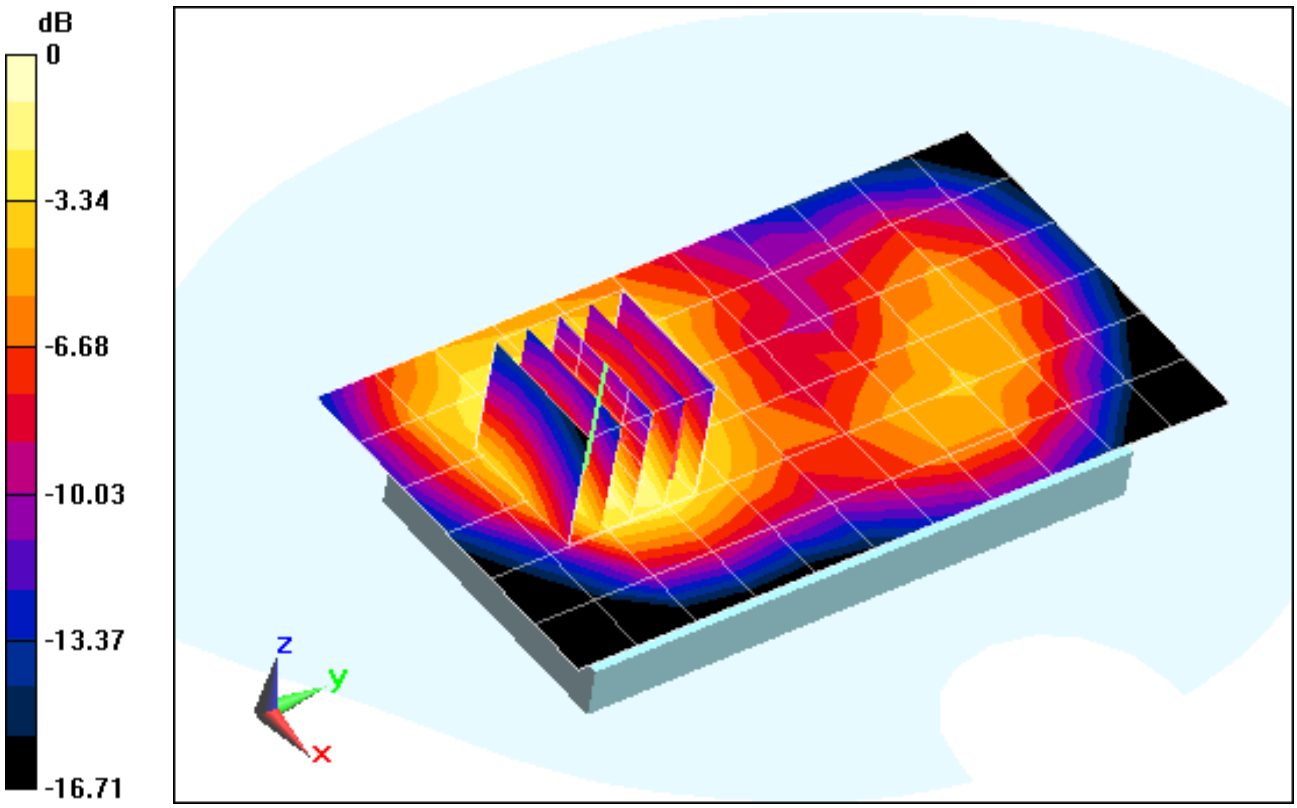

0 dB = 0.980mW/g = -0.18 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM GPRS 1900; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.076
Medium: 1900 Body; Medium parameters used:
f = 1880 MHz; σ = 1.482 mho/m; ε_r = 53.67; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2012; Ambient Temp: 24.3°C; Tissue Temp: 23.9°C

Probe: ES3DV3 - SN3263; ConvF(4.81, 4.81, 4.81); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GPRS 1900, Body SAR, Bottom Edge, Mid.ch, 4 Tx Slots

Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.505 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.6600 W/kg
SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.220 mW/g

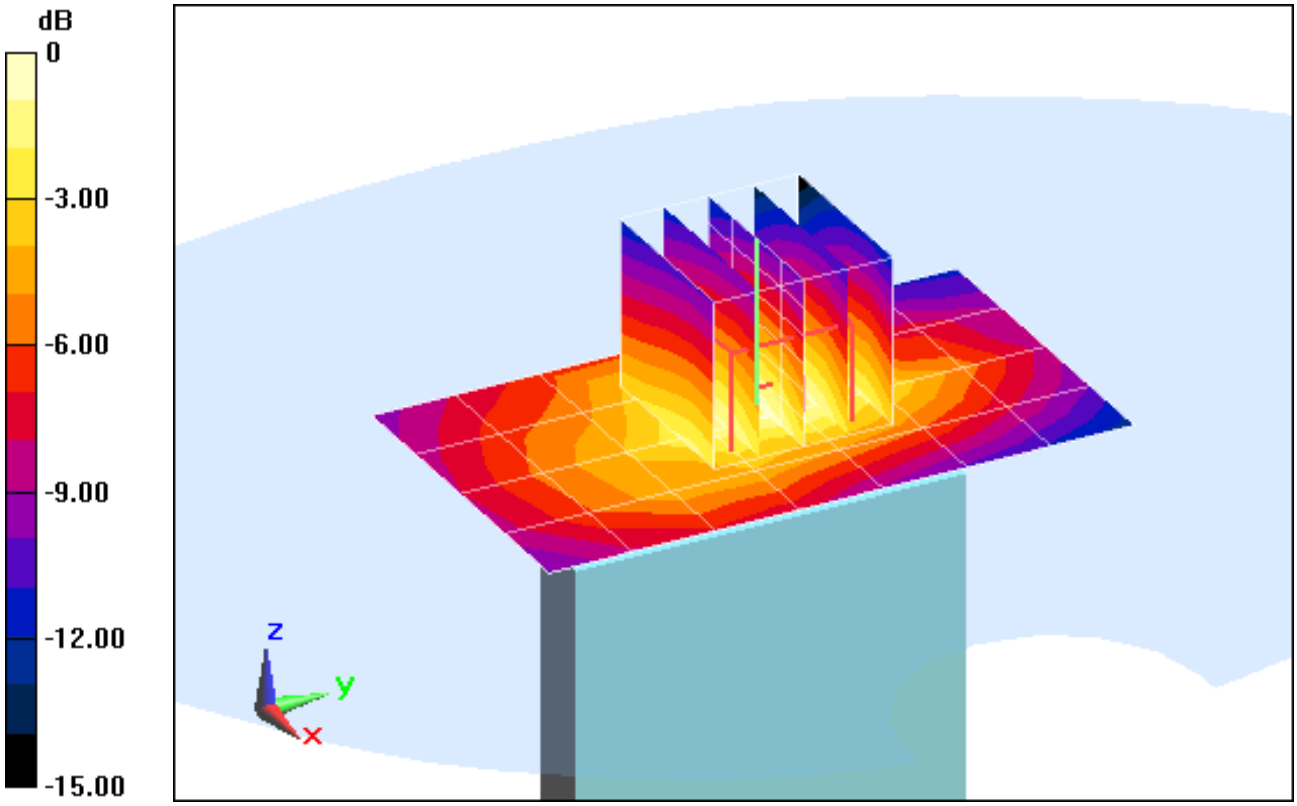

0 dB = 0.430mW/g = -7.33 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM GPRS 1900; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.076
Medium: 1900 Body Medium parameters used:
f = 1880 MHz; σ = 1.482 mho/m; ε_r = 53.67; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2012; Ambient Temp: 24.3°C; Tissue Temp: 23.9°C

Probe: ES3DV3 - SN3263; ConvF(4.81, 4.81, 4.81); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GPRS 1900, Body SAR, Right Edge, Mid.ch, 4 Tx Slots

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.710 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.3110 W/kg
SAR(1 g) = 0.197 mW/g; SAR(10 g) = 0.118 mW/g

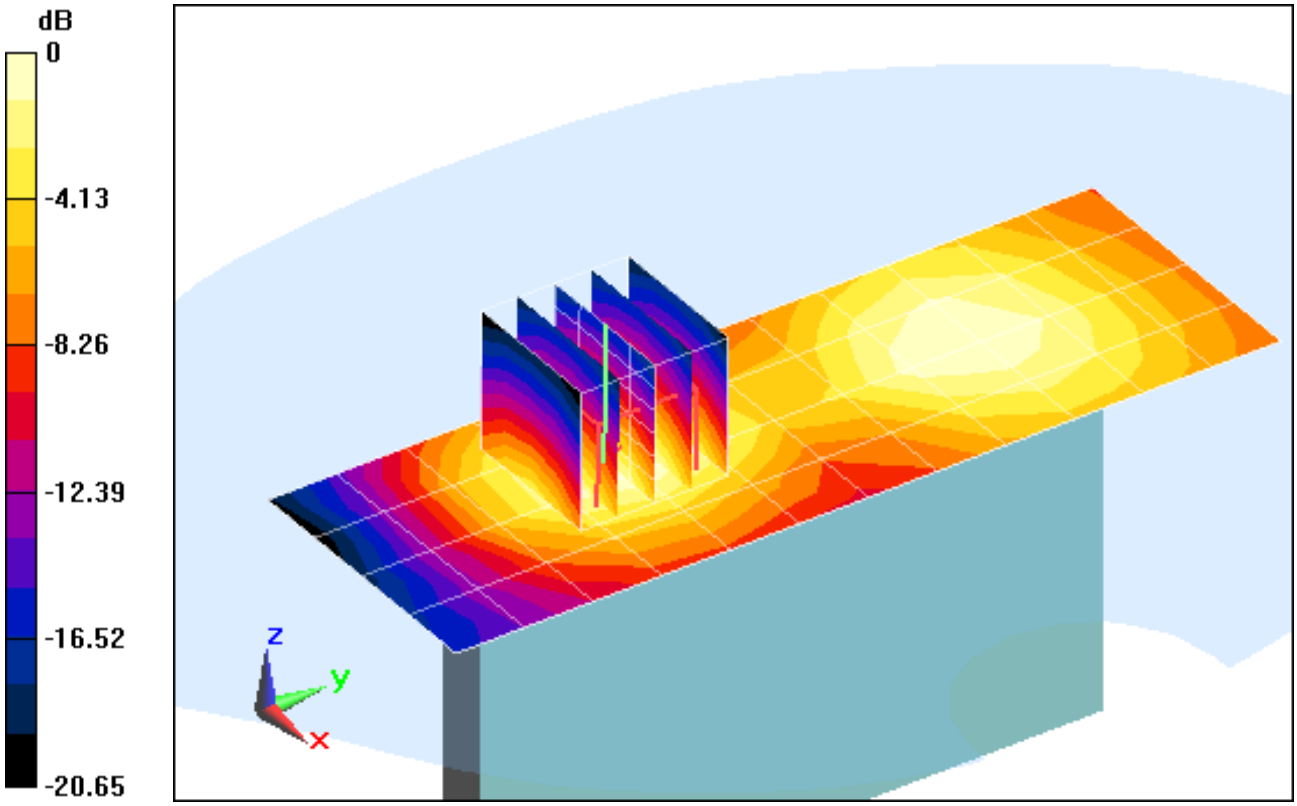

0 dB = 0.190mW/g = -14.42 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: GSM GPRS 1900; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.076
Medium: 1900 Body Medium parameters used:
f = 1880 MHz; σ = 1.482 mho/m; ε_r = 53.67; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2012; Ambient Temp: 24.3°C; Tissue Temp: 23.9°C

Probe: ES3DV3 - SN3263; ConvF(4.81, 4.81, 4.81); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: GPRS 1900, Body SAR, Left Edge, Mid.ch, 4 Tx Slots

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.761 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.6920 W/kg
SAR(1 g) = 0.429 mW/g; SAR(10 g) = 0.250 mW/g

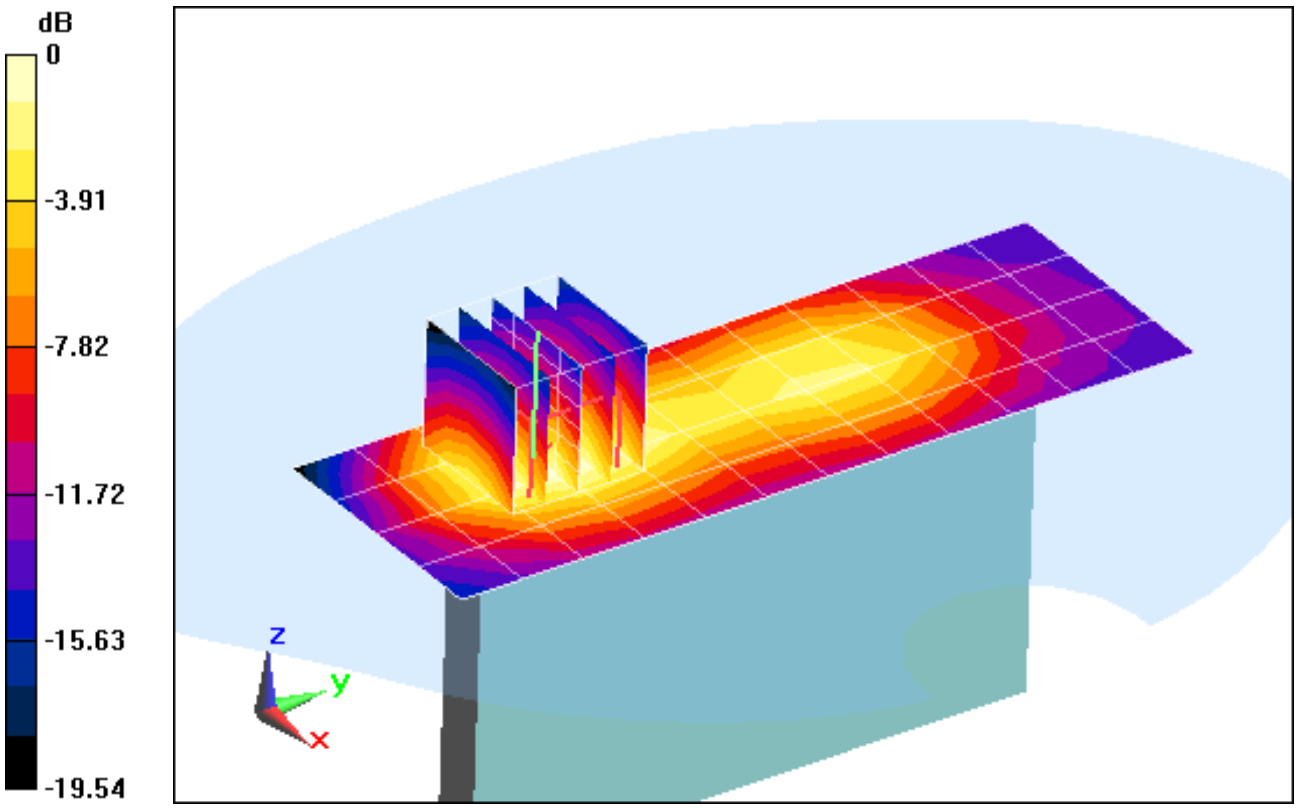

0 dB = 0.400mW/g = -7.96 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Body; Medium parameters used:
f = 1880 MHz; σ = 1.482 mho/m; ε_r = 53.67; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2012; Ambient Temp: 24.3°C; Tissue Temp: 23.9°C

Probe: ES3DV3 - SN3263; ConvF(4.81, 4.81, 4.81); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 1900, Body SAR, Back side, Mid.ch

Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.718 V/m; Power Drift = -0.0062 dB
Peak SAR (extrapolated) = 0.8890 W/kg
SAR(1 g) = 0.591 mW/g; SAR(10 g) = 0.371 mW/g

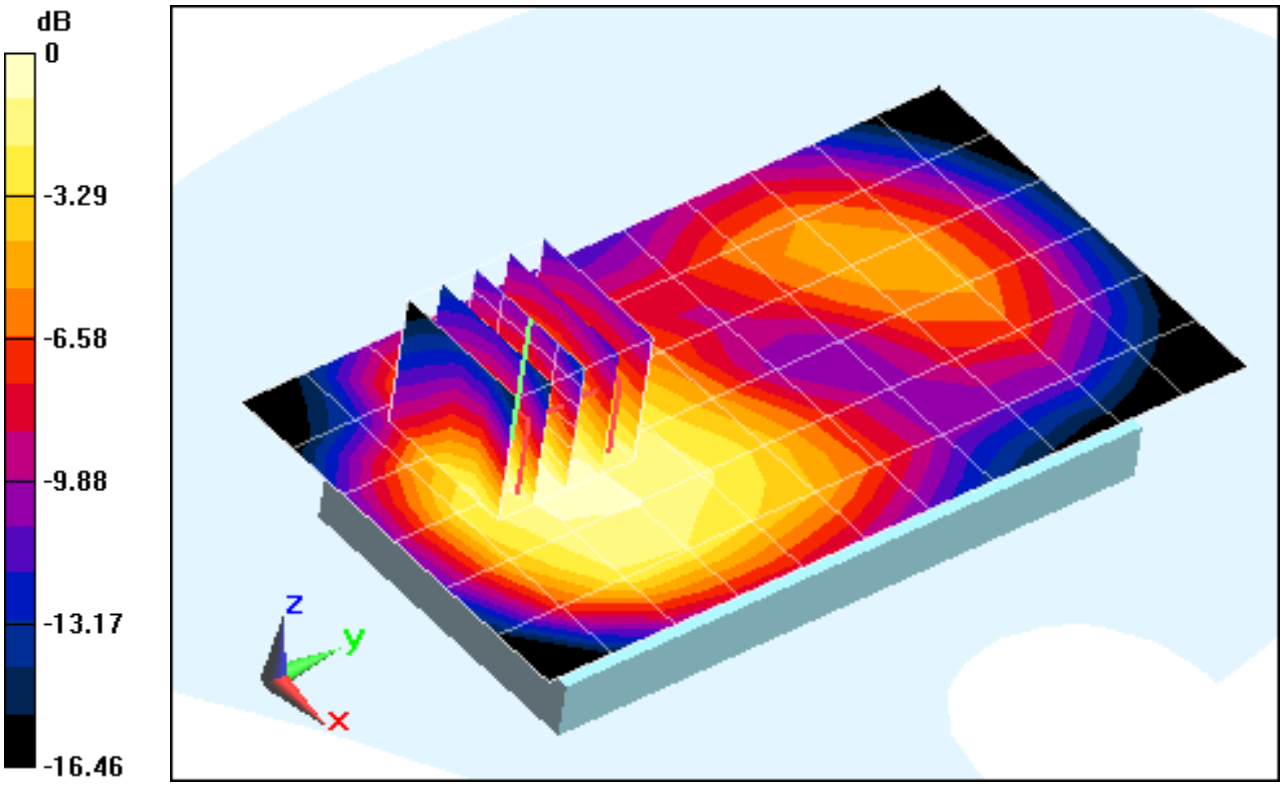

0 dB = 0.650mW/g = -3.74 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used:
f = 1880 MHz; σ = 1.482 mho/m; ε_r = 53.67; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2012; Ambient Temp: 24.3°C; Tissue Temp: 23.9°C

Probe: ES3DV3 - SN3263; ConvF(4.81, 4.81, 4.81); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 1900, Body SAR, Front side, Mid.ch

Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.785 V/m; Power Drift = 0.00083 dB
Peak SAR (extrapolated) = 0.9460 W/kg
SAR(1 g) = 0.623 mW/g; SAR(10 g) = 0.392 mW/g

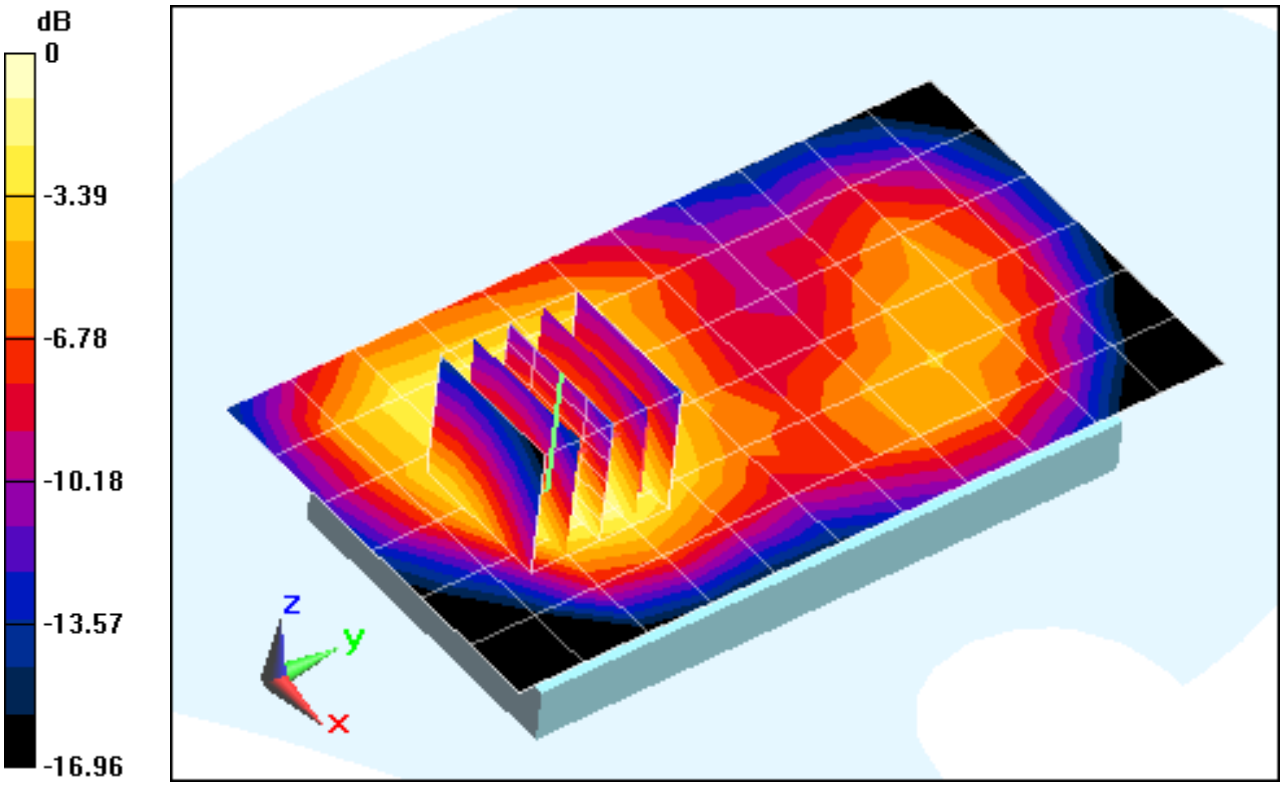

0 dB = 0.680mW/g = -3.35 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Body; Medium parameters used:
f = 1880 MHz; σ = 1.482 mho/m; ε_r = 53.67; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2012; Ambient Temp: 24.3°C; Tissue Temp: 23.9°C

Probe: ES3DV3 - SN3263; ConvF(4.81, 4.81, 4.81); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 1900, Body SAR, Bottom Edge, Mid.ch

Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.278 V/m; Power Drift = 0.0081 dB
Peak SAR (extrapolated) = 0.4260 W/kg
SAR(1 g) = 0.250 mW/g; SAR(10 g) = 0.140 mW/g

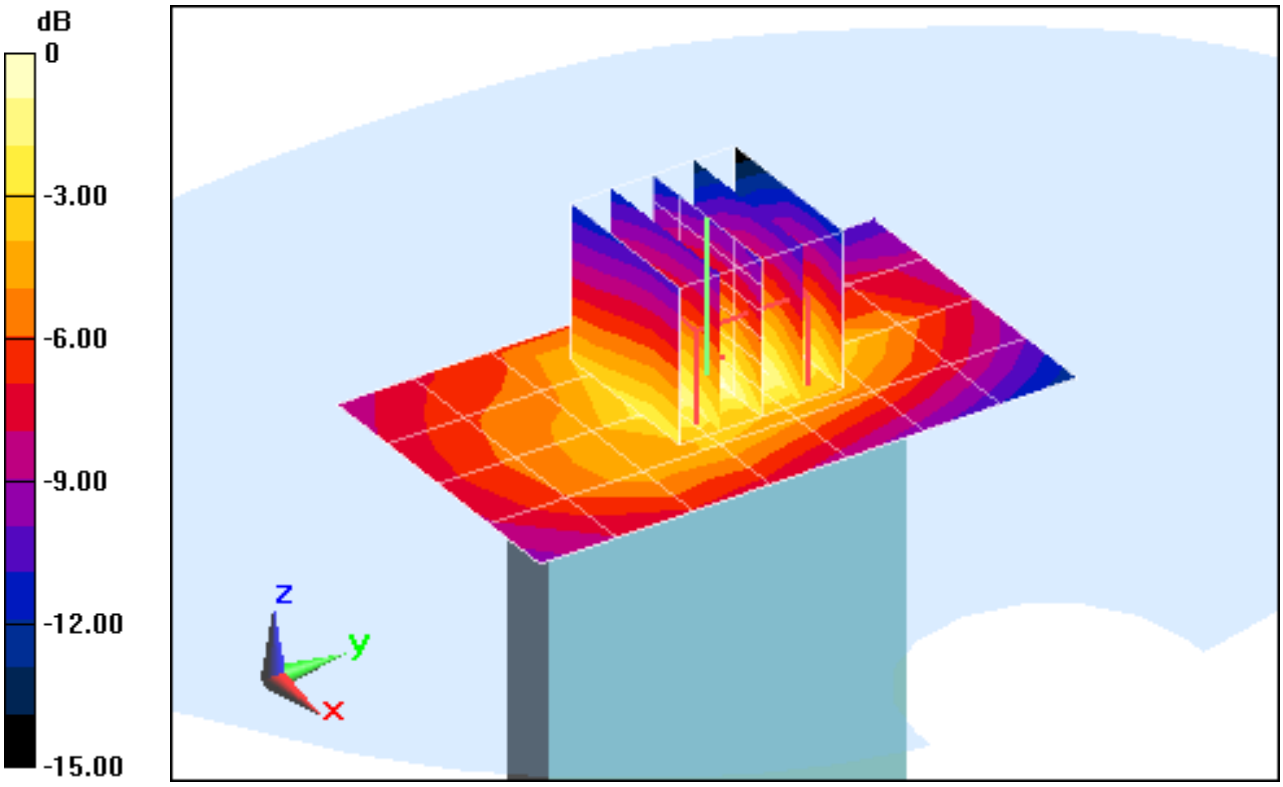

0 dB = 0.280mW/g = -11.06 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Body; Medium parameters used:
f = 1880 MHz; σ = 1.482 mho/m; ε_r = 53.67; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2012; Ambient Temp: 24.3°C; Tissue Temp: 23.9°C

Probe: ES3DV3 - SN3263; ConvF(4.81, 4.81, 4.81); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 1900, Body SAR, Right Edge, Mid.ch

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.688 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.2010 W/kg
SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.078 mW/g

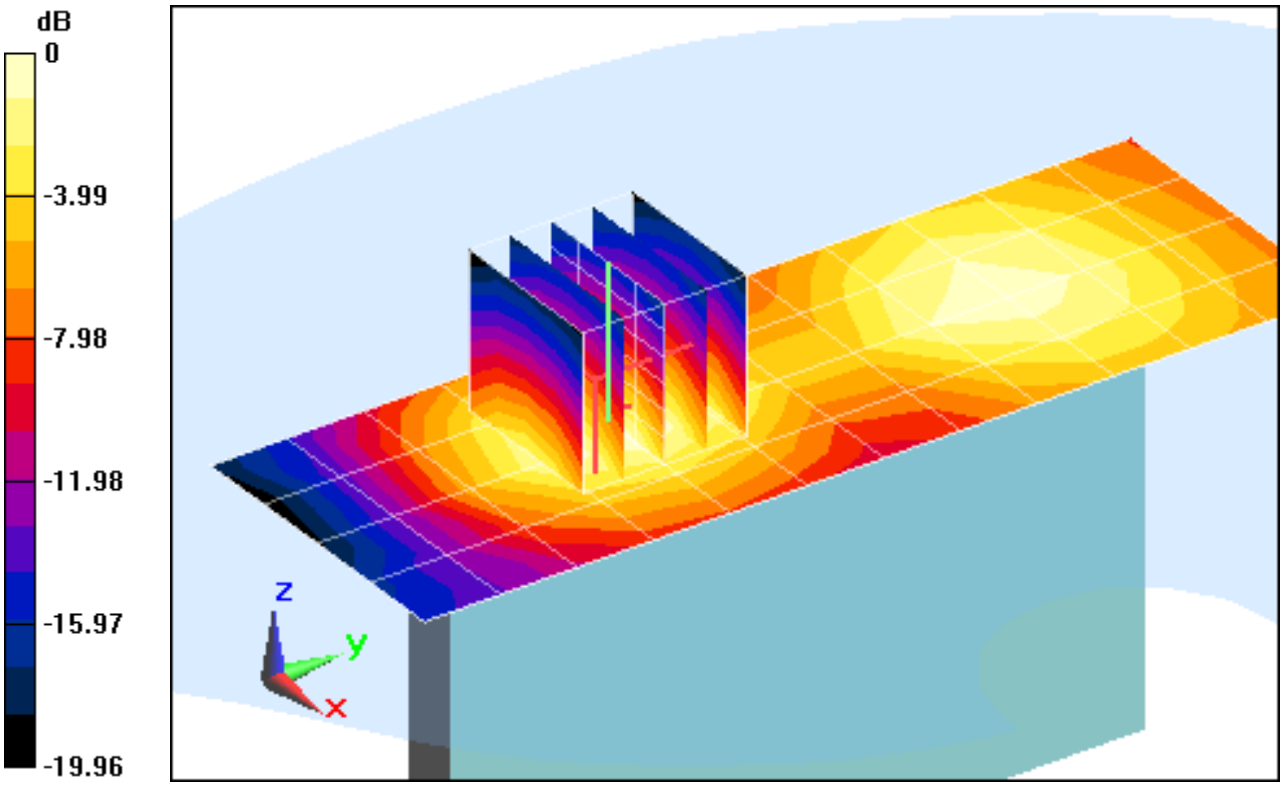

0 dB = 0.130mW/g = -17.72 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Body; Medium parameters used:
f = 1880 MHz; σ = 1.482 mho/m; ε_r = 53.67; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2012; Ambient Temp: 24.3°C; Tissue Temp: 23.9°C

Probe: ES3DV3 - SN3263; ConvF(4.81, 4.81, 4.81); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: WCDMA 1900, Body SAR, Left Edge, Mid.ch

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.750 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.4590 W/kg
SAR(1 g) = 0.285 mW/g; SAR(10 g) = 0.167 mW/g

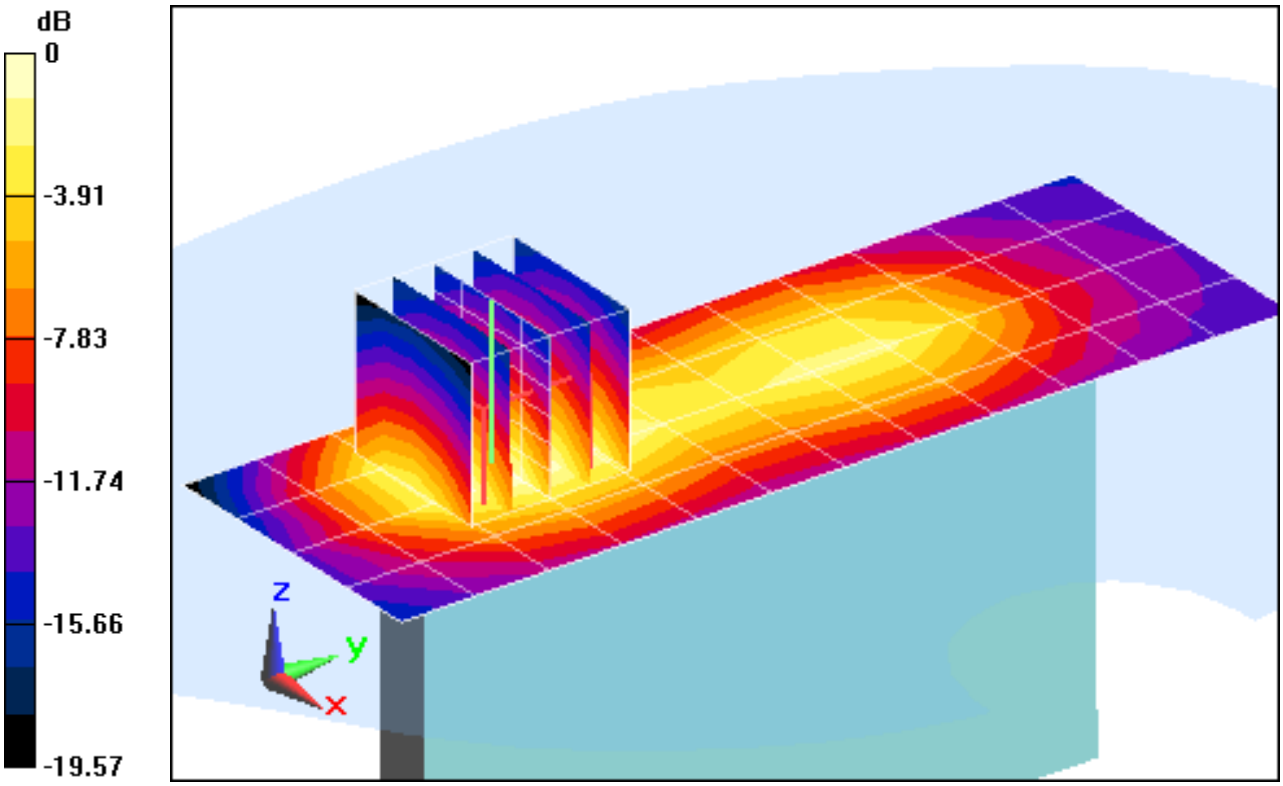

0 dB = 0.270mW/g = -11.37 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: IEEE 802.11b; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: 2450 Body; Medium parameters used (interpolated):
f = 2462 MHz; σ = 2.06 mho/m; ε_r = 50.7; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2012; Ambient Temp: 23.4 °C; Tissue Temp: 22.3 °C

Probe: ES3DV3 - SN3209; ConvF(4.23, 4.23, 4.23); Calibrated: 3/16/2012
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 2/15/2012
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mode: IEEE 802.11b, Body SAR, Ch 11, 1 Mbps, Back Side

Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.2 V/m; Power Drift = 0.097 dB
Peak SAR (extrapolated) = 1.06 W/kg
SAR(1 g) = 0.455 mW/g; SAR(10 g) = 0.197 mW/g

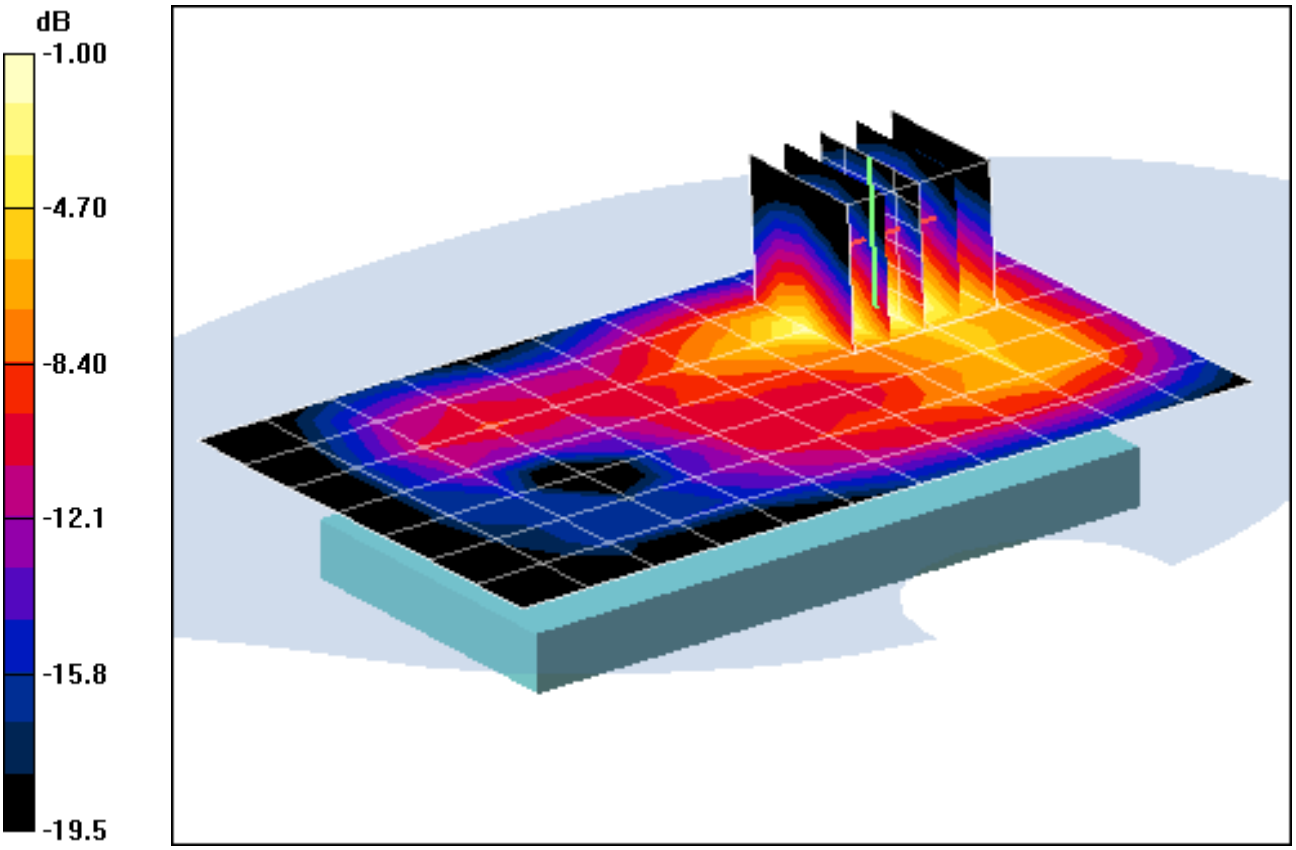

0 dB = 0.611mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: IEEE 802.11b; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: 2450 Body; Medium parameters used (interpolated):
f = 2462 MHz; σ = 2.06 mho/m; ε_r = 50.7; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2012; Ambient Temp: 23.4 °C; Tissue Temp: 22.3 °C

Probe: ES3DV3 - SN3209; ConvF(4.23, 4.23, 4.23); Calibrated: 3/16/2012
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 2/15/2012
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mode: IEEE 802.11b, Body SAR, Ch 11, 1 Mbps, Front Side

Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.72 V/m; Power Drift = 0.164 dB
Peak SAR (extrapolated) = 0.084 W/kg
SAR(1 g) = 0.041 mW/g; SAR(10 g) = 0.022 mW/g

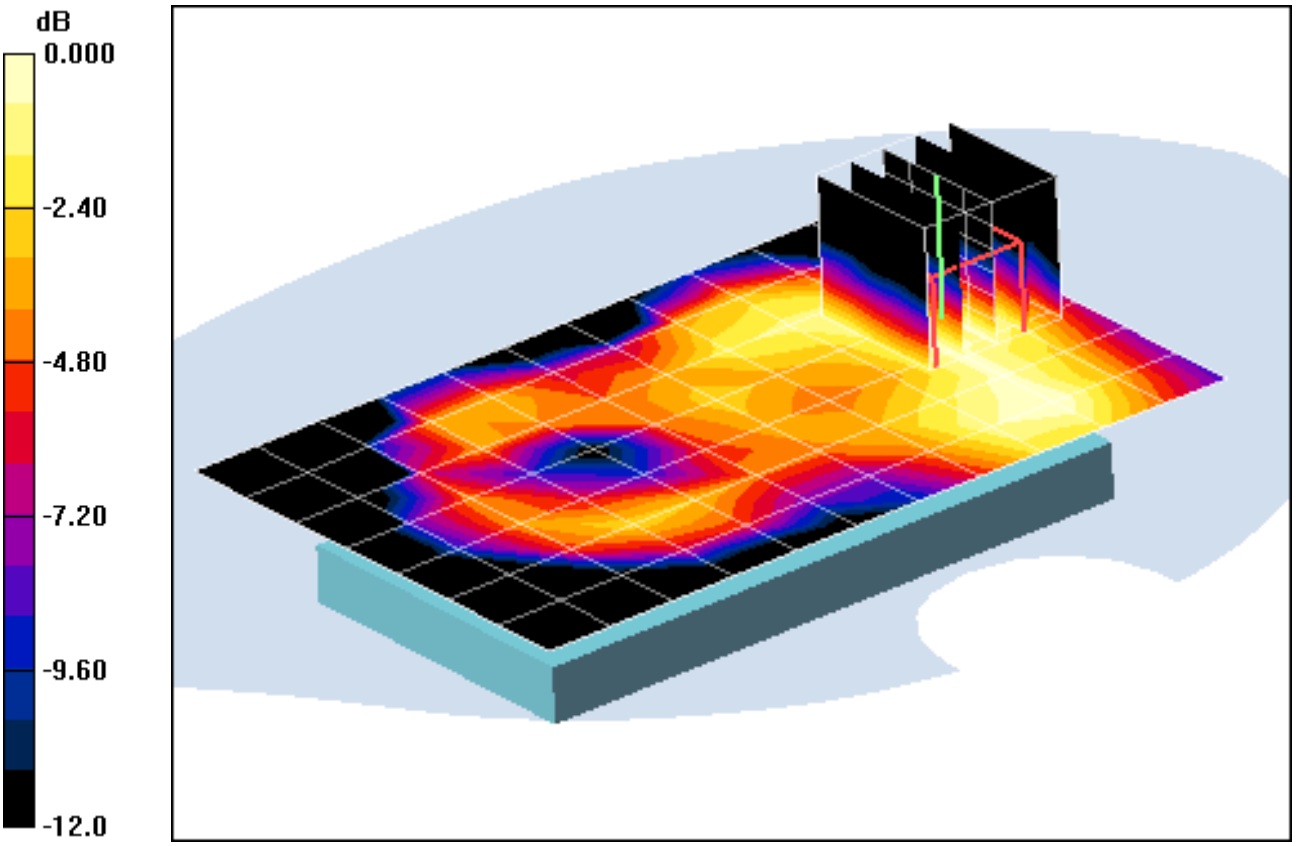

0 dB = 0.050mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: IEEE 802.11b; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: 2450 Body; Medium parameters used (interpolated):
f = 2462 MHz; σ = 2.06 mho/m; ε_r = 50.7; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2012; Ambient Temp: 23.4 °C; Tissue Temp: 22.3 °C

Probe: ES3DV3 - SN3209; ConvF(4.23, 4.23, 4.23); Calibrated: 3/16/2012
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 2/15/2012
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mode: IEEE 802.11b, Body SAR, Ch 11, 1 Mbps, Top Edge

Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.56 V/m; Power Drift = 0.151 dB
Peak SAR (extrapolated) = 0.085 W/kg
SAR(1 g) = 0.041 mW/g; SAR(10 g) = 0.022 mW/g

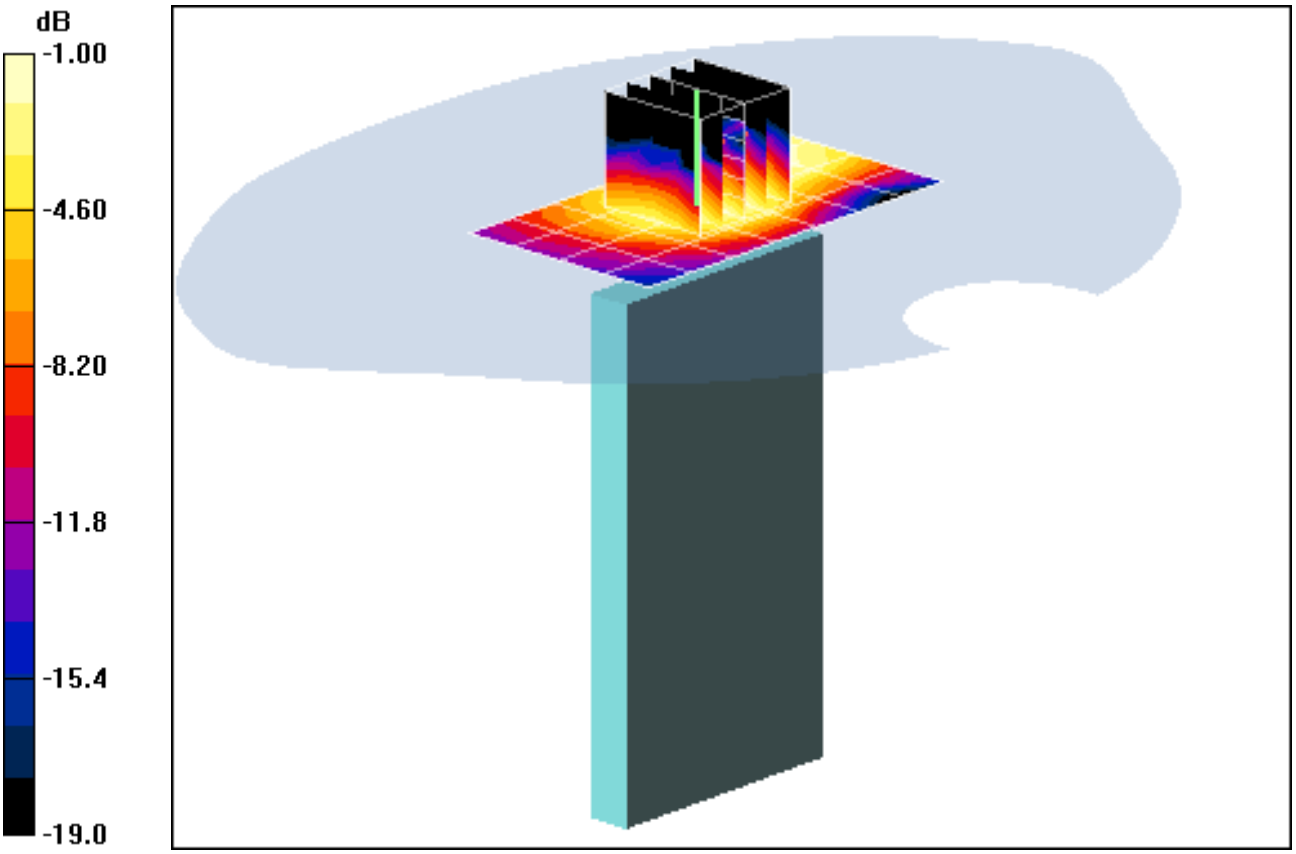

0 dB = 0.052mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: IEEE 802.11b; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: 2450 Body; Medium parameters used (interpolated):
f = 2462 MHz; σ = 2.06 mho/m; ε_r = 50.7; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2012; Ambient Temp: 23.4 °C; Tissue Temp: 22.3 °C

Probe: ES3DV3 - SN3209; ConvF(4.23, 4.23, 4.23); Calibrated: 3/16/2012
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 2/15/2012
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mode: IEEE 802.11b, Body SAR, Ch 11, 1 Mbps, Right Edge

Area Scan (5x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.95 V/m; Power Drift = -0.042 dB
Peak SAR (extrapolated) = 0.369 W/kg
SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.081 mW/g

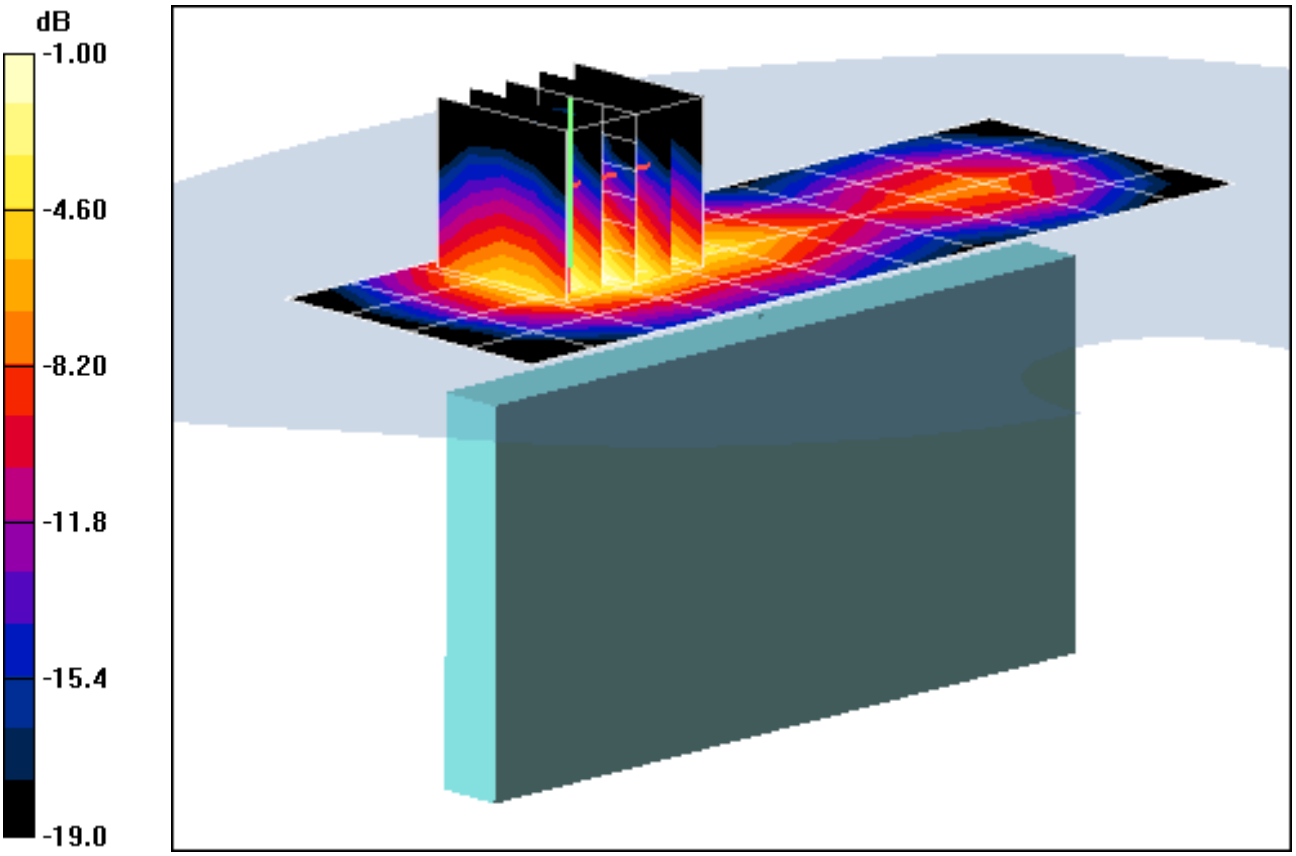

0 dB = 0.230mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LGTI9300T; Type: Portable Handset; Serial: R31C40A37SK

Communication System: IEEE 802.11a; Frequency: 5300 MHz;Duty Cycle: 1:1
Medium: 5 GHz Body; Medium parameters used:
f = 5300 MHz; σ = 5.468 mho/m; ε_r = 47.67; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2012; Ambient Temp: 23.6°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3561; ConvF(3.49, 3.49, 3.49); Calibrated: 7/27/2011
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: IEEE 802.11a, 5.3 GHz, Body SAR, Ch 60, 6 Mbps, Back Side

Area Scan (11x17x1): Measurement grid: dx=10mm, dy=10mm
Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 14.354 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 3.1850 W/kg
SAR(1 g) = 0.872 mW/g; SAR(10 g) = 0.244 mW/g

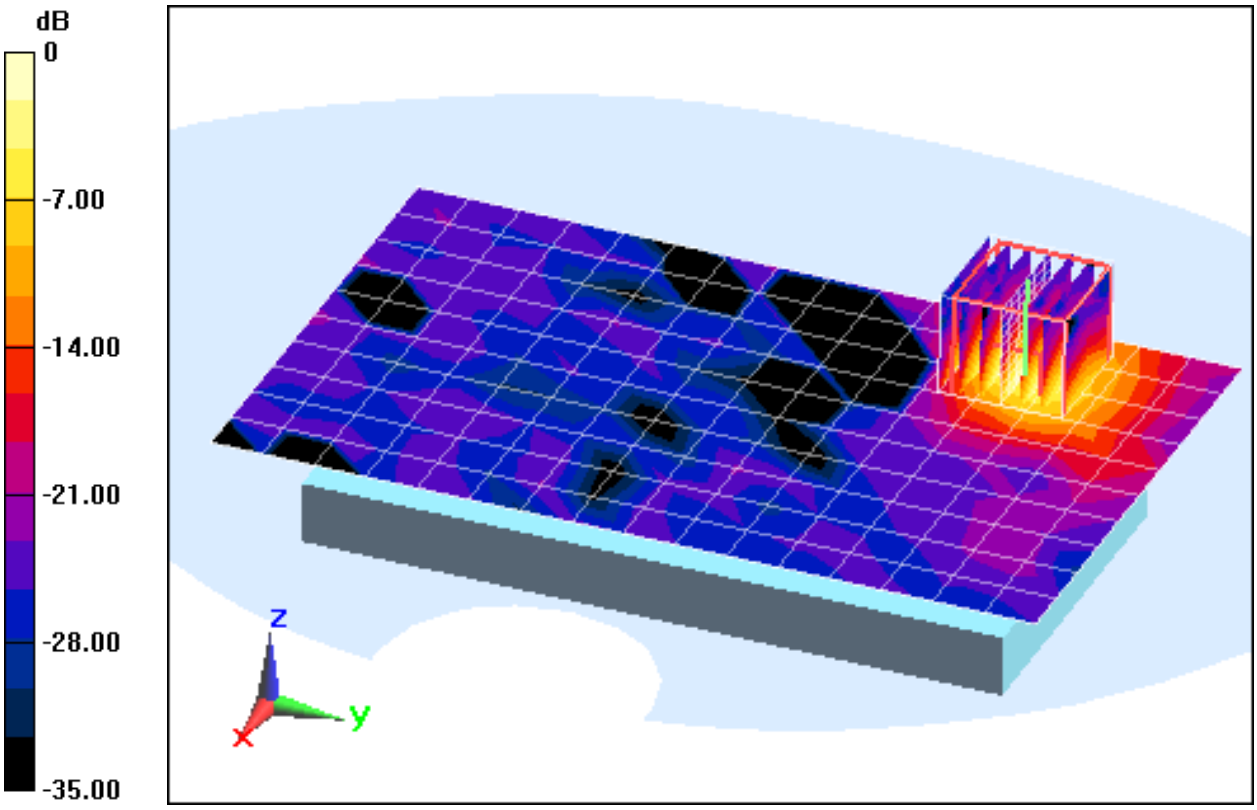

0 dB = 1.790mW/g = 5.06 dB mW/g

APPENDIX B: SYSTEM VERIFICATION

© 2012 PCTEST Engineering Laboratory, Inc.

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 835 MHz; Type: D835V2; Serial: 4d047

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used:
f = 835 MHz; σ = 0.914 mho/m; ε_r = 40.83; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-18-2012; Ambient Temp: 24.9°C; Tissue Temp: 22.6°C

Probe: ES3DV3 - SN3263; ConvF(6.28, 6.28, 6.28); Calibrated: 7/11/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 Left; Type: SAM v5.0; Serial: TP: 1687
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Input Power = 20.0 dBm (100mW)
SAR(1 g) = 0.952 mW/g; SAR(10 g) = 0.618 mW/g
Deviation = 1.17%

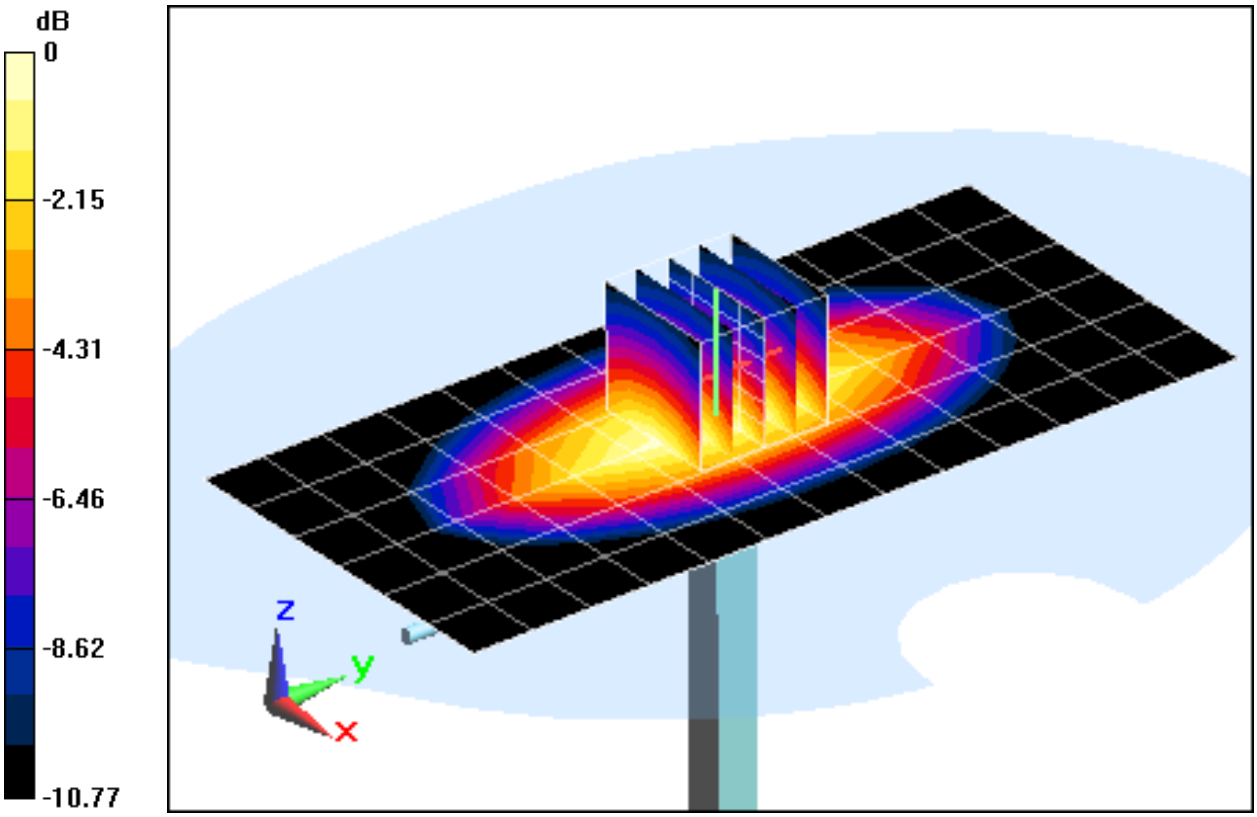

0 dB = 1.030mW/g = 0.26 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 835 MHz; Type: D835V2; Serial: 4d047

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used:
f = 835 MHz; σ = 0.914 mho/m; ε_r = 40.83; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-18-2012; Ambient Temp: 24.9°C; Tissue Temp: 22.6°C

Probe: ES3DV3 - SN3263; ConvF(6.28, 6.28, 6.28); Calibrated: 7/11/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 Left; Type: SAM v5.0; Serial: TP: 1687
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Input Power = 20.0 dBm (100mW)
SAR(1 g) = 0.952 mW/g; SAR(10 g) = 0.618 mW/g
Deviation = 1.17%

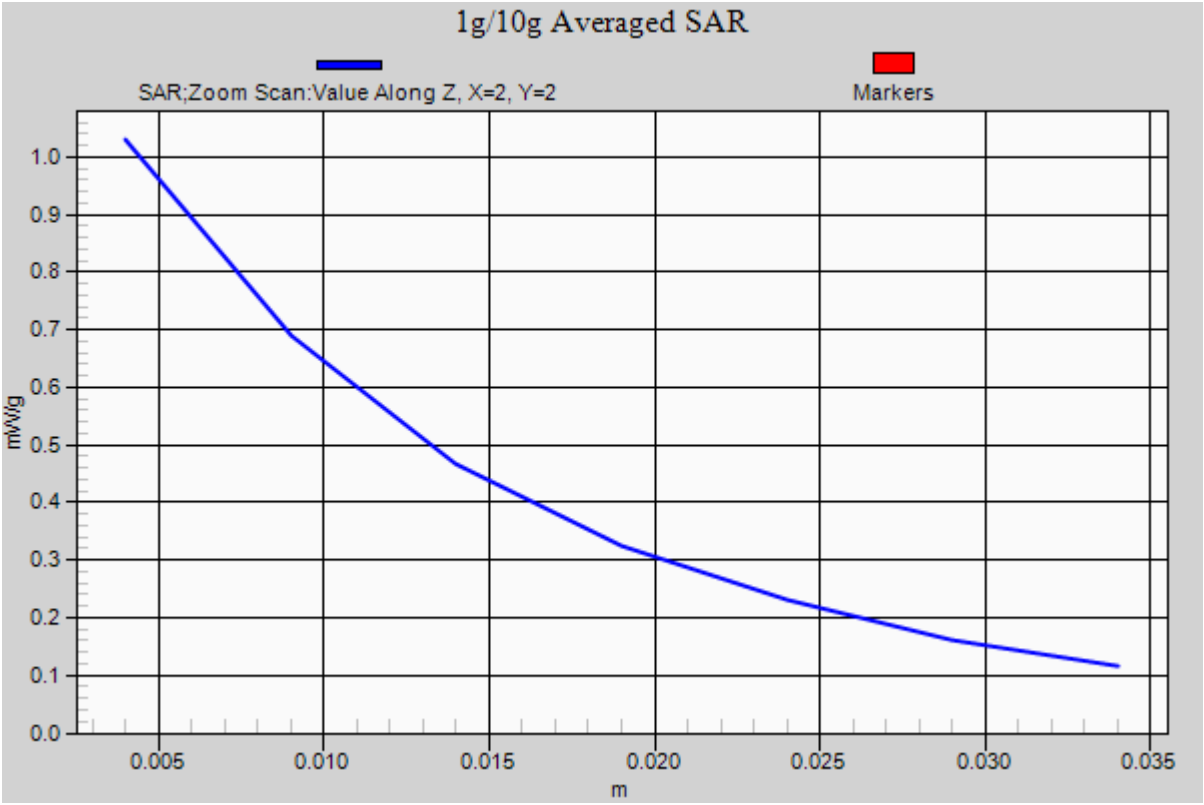

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 Head; Medium parameters used (interpolated):
f = 1900 MHz; σ = 1.396 mho/m; ε_r = 38.94; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-17-2012; Ambient Temp: 23.1°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3288; ConvF(5.16, 5.16, 5.16); Calibrated: 2/7/2012
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM V5.0 Right; Type: SAM v5.0; Serial: 1647
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: 1900 MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Input Power = 20.0 dBm (100 mW)
SAR(1 g) = 3.95 mW/g; SAR(10 g) = 2.07 mW/g
Deviation = 0.51%

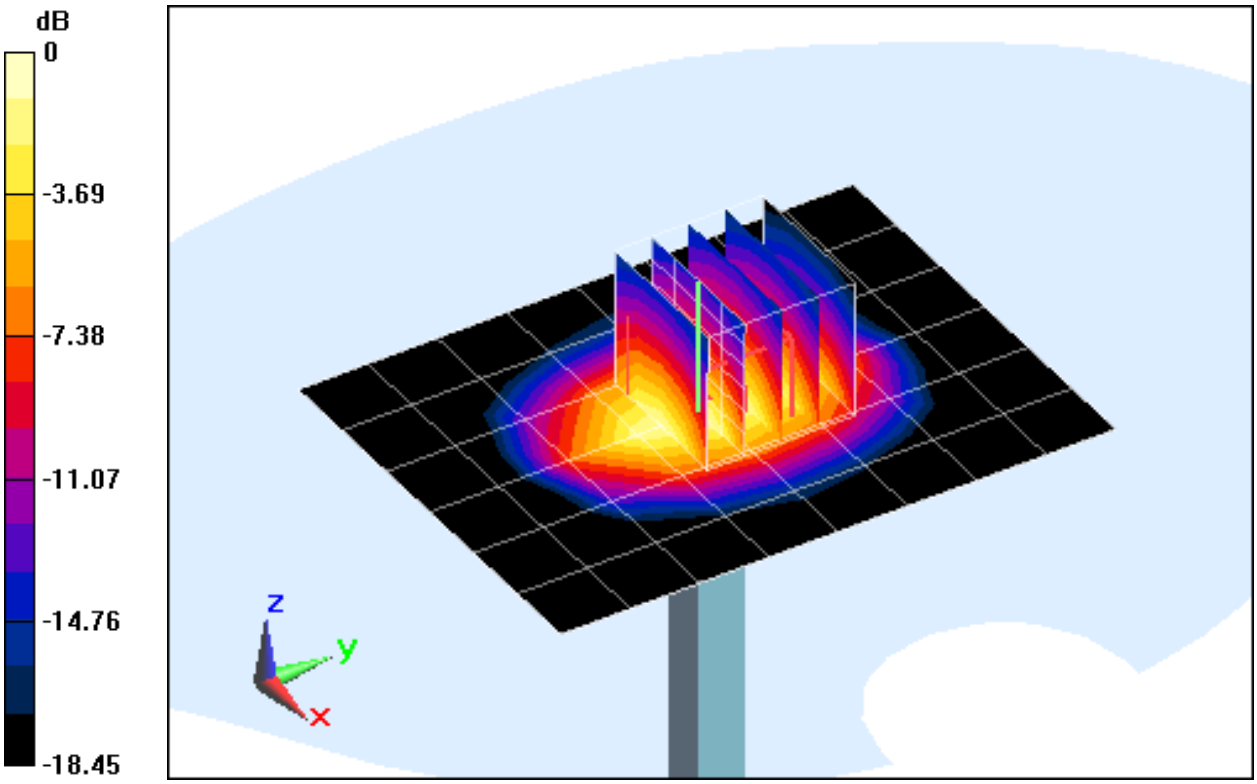

0 dB = 4.380mW/g = 12.83 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 Head; Medium parameters used (interpolated):
f = 1900 MHz; σ = 1.396 mho/m; ε_r = 38.94; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-17-2012; Ambient Temp: 23.1°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3288; ConvF(5.16, 5.16, 5.16); Calibrated: 2/7/2012
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM V5.0 Right; Type: SAM v5.0; Serial: 1647
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Mode: 1900 MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Input Power = 20.0 dBm (100 mW)
SAR(1 g) = 3.95 mW/g; SAR(10 g) = 2.07 mW/g
Deviation = 0.51%

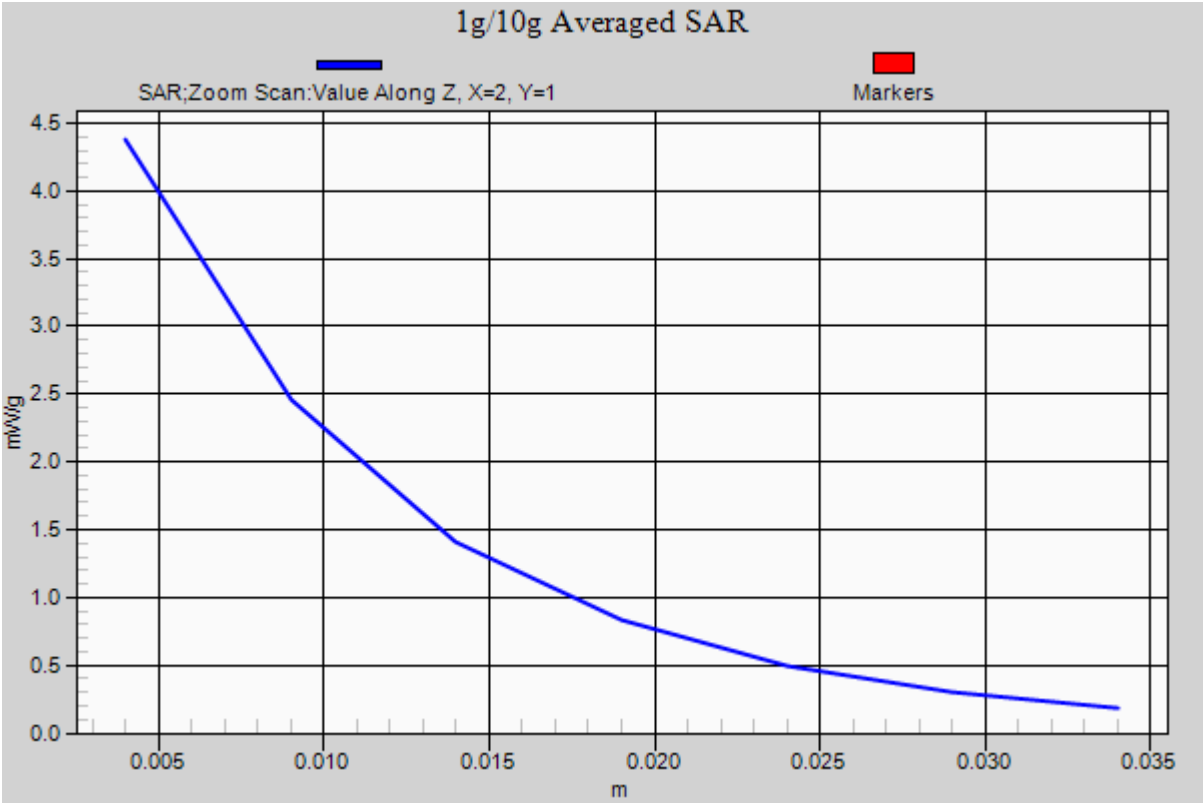

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: 2450 Head; Medium parameters used:
f = 2450 MHz; σ = 1.887 mho/m; ε_r = 37.85; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 23.7°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3209; ConvF(4.46, 4.46, 4.46); Calibrated: 3/16/2012
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 2/15/2012
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114
Measurement SW: DASY4, Version 4.7 (80);SEMCAD X Version 14.6.4 (4989)

2450MHz System Verification

Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Input Power = 20.0 dBm (100 mW)
SAR(1 g) = 5.51 mW/g; SAR(10 g) = 2.52 mW/g
Deviation = 2.42%

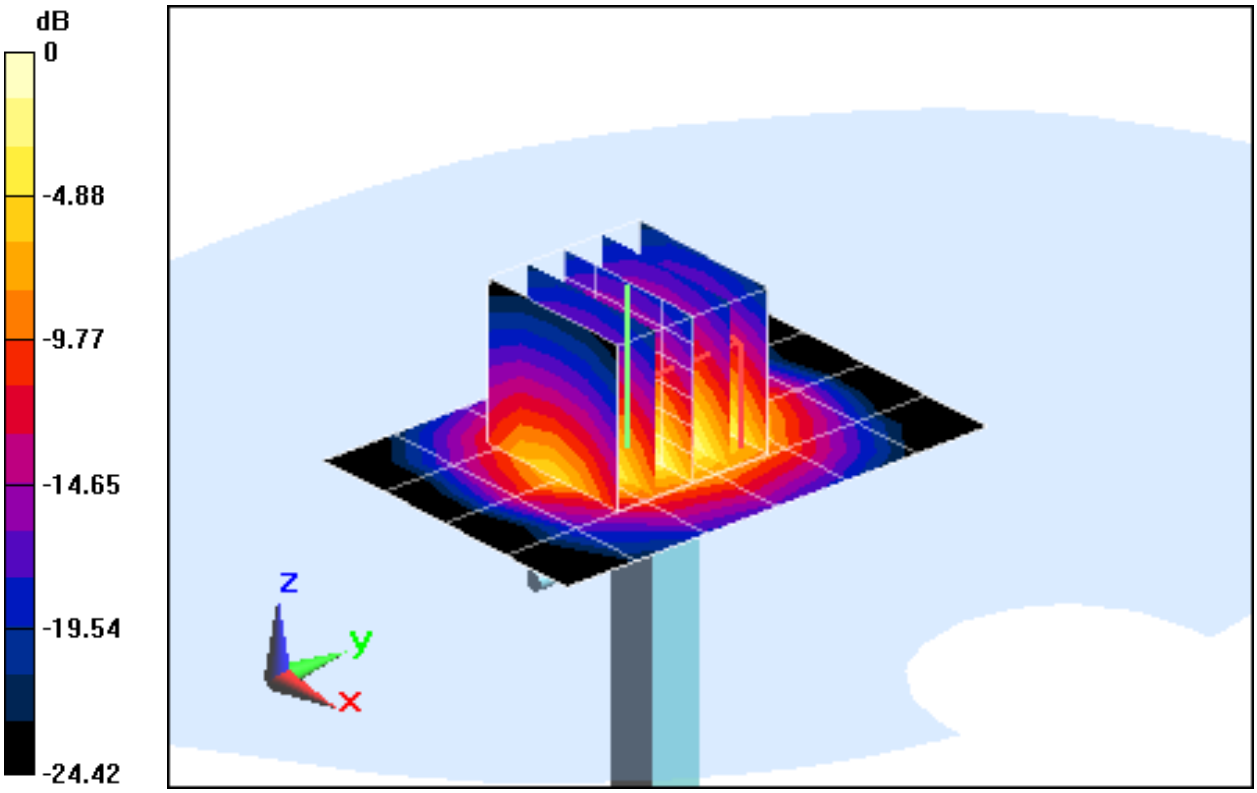

0 dB = 7.150mW/g = 17.09 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: 2450 Head; Medium parameters used:
f = 2450 MHz; σ = 1.887 mho/m; ε_r = 37.85; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 23.7°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3209; ConvF(4.46, 4.46, 4.46); Calibrated: 3/16/2012
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 2/15/2012
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114
Measurement SW: DASY4, Version 4.7 (80);SEMCAD X Version 14.6.4 (4989)

2450MHz System Verification

Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Input Power = 20.0 dBm (100 mW)
SAR(1 g) = 5.51 mW/g; SAR(10 g) = 2.52 mW/g
Deviation = 2.42%

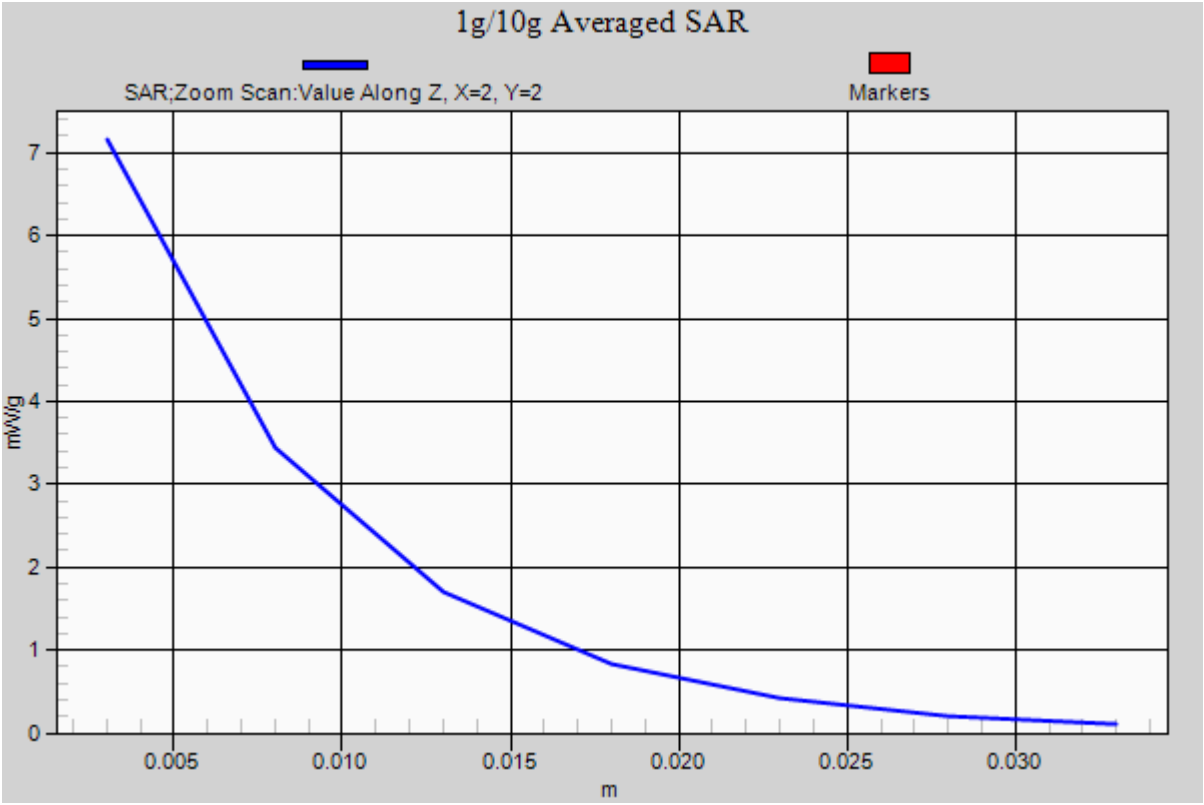

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5200 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: 5 GHz Head Medium parameters used:
f = 5200 MHz; σ = 4.711 mho/m; ε_r = 35.32; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 24.7°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3589; ConvF(4.59, 4.59, 4.59); Calibrated: 1/27/2012
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

5200 MHz System Verification

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Input Power = 14.0 dBm (25 mW)
SAR(1 g) = 2.06 mW/g; SAR(10 g) = 0.598 mW/g
Deviation = 4.17 %

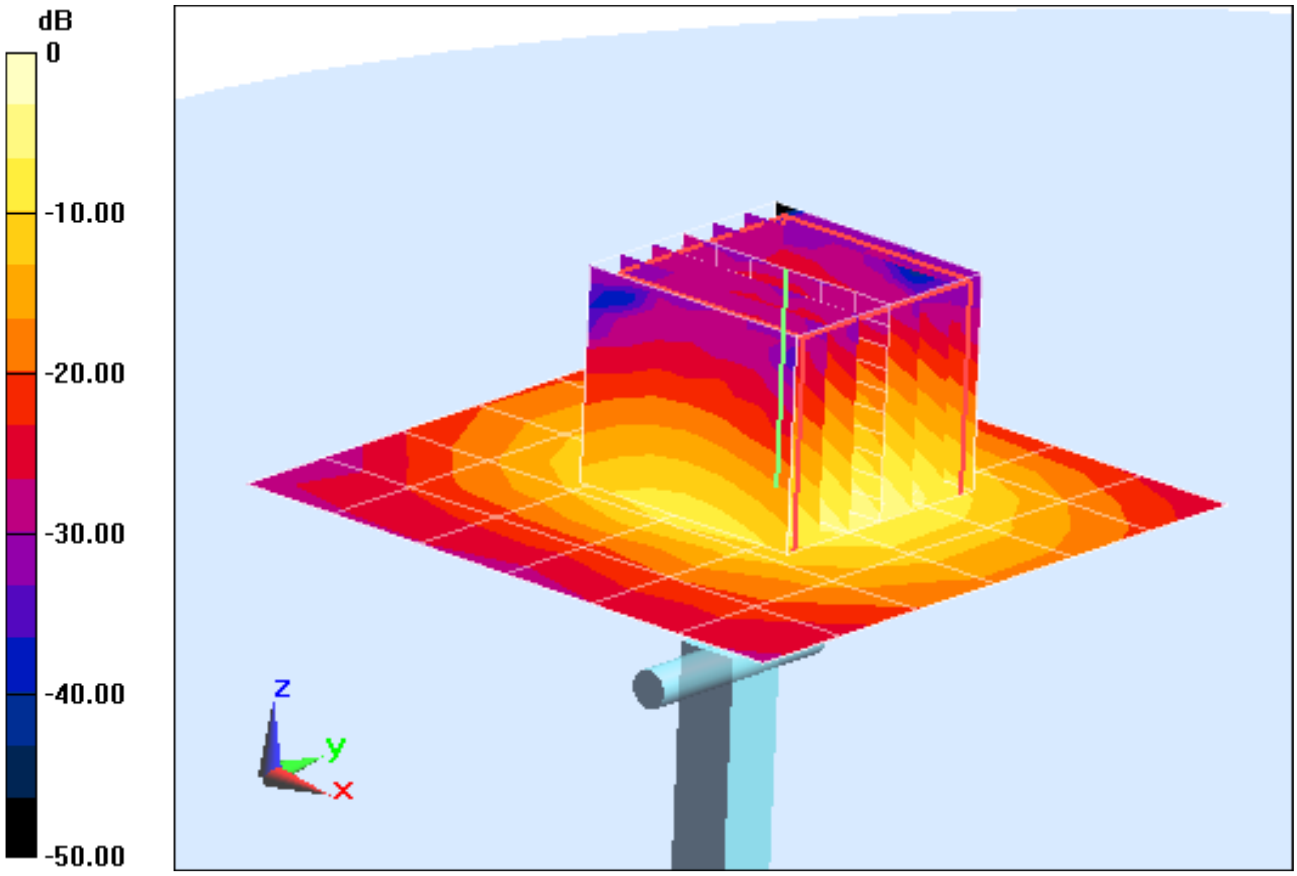

0 dB = 4.220mW/g = 12.51 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5200 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: 5 GHz Head Medium parameters used:
f = 5200 MHz; σ = 4.711 mho/m; ε_r = 35.32; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 24.7°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3589; ConvF(4.59, 4.59, 4.59); Calibrated: 1/27/2012
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

5200 MHz System Verification

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Input Power = 14.0 dBm (25 mW)
SAR(1 g) = 2.06 mW/g; SAR(10 g) = 0.598 mW/g
Deviation = 4.17 %

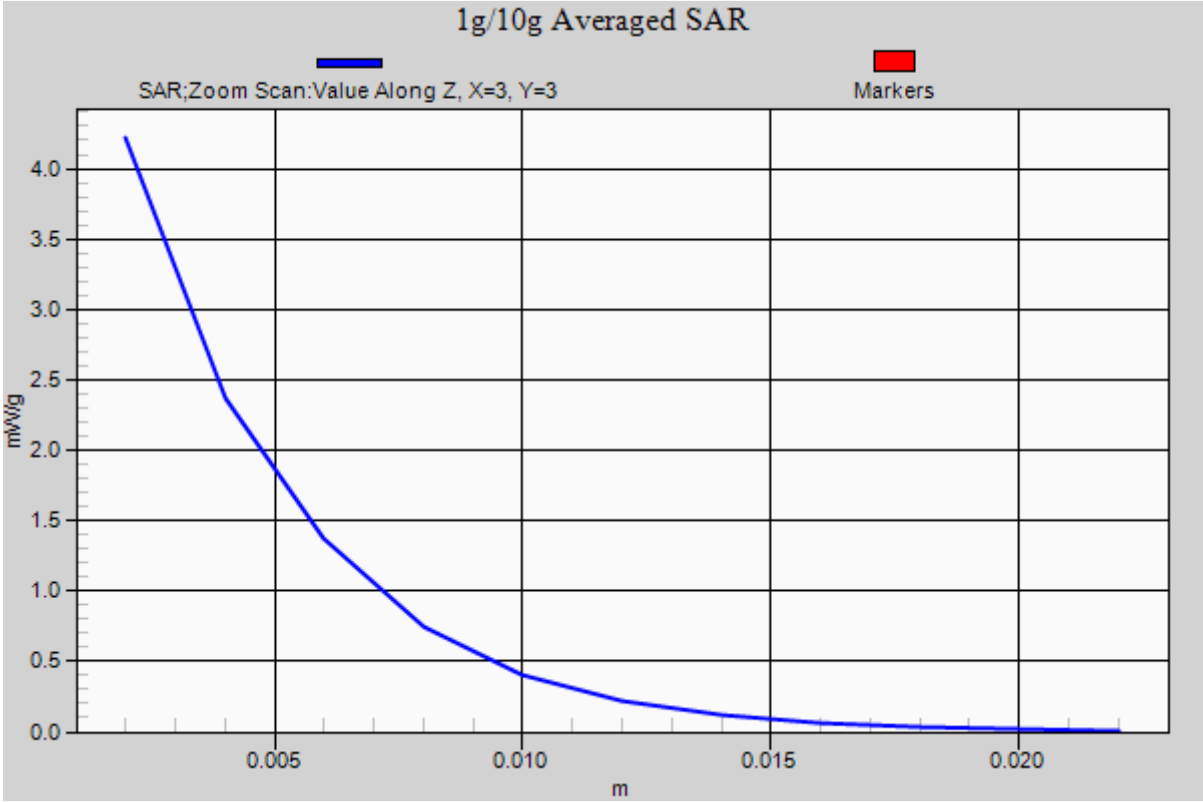

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5500 MHz;Duty Cycle: 1:1
Medium: 5 GHz Head Medium parameters used:
f = 5500 MHz; σ = 4.872 mho/m; ε_r = 35.2; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 24.9°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN3589; ConvF(4.33, 4.33, 4.33); Calibrated: 1/27/2012
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

5500 MHz System Verification

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Input Power = 14.0 dBm (25 mW)
SAR(1 g) = 1.98 mW/g; SAR(10 g) = 0.565 mW/g
Deviation = -6.71 %

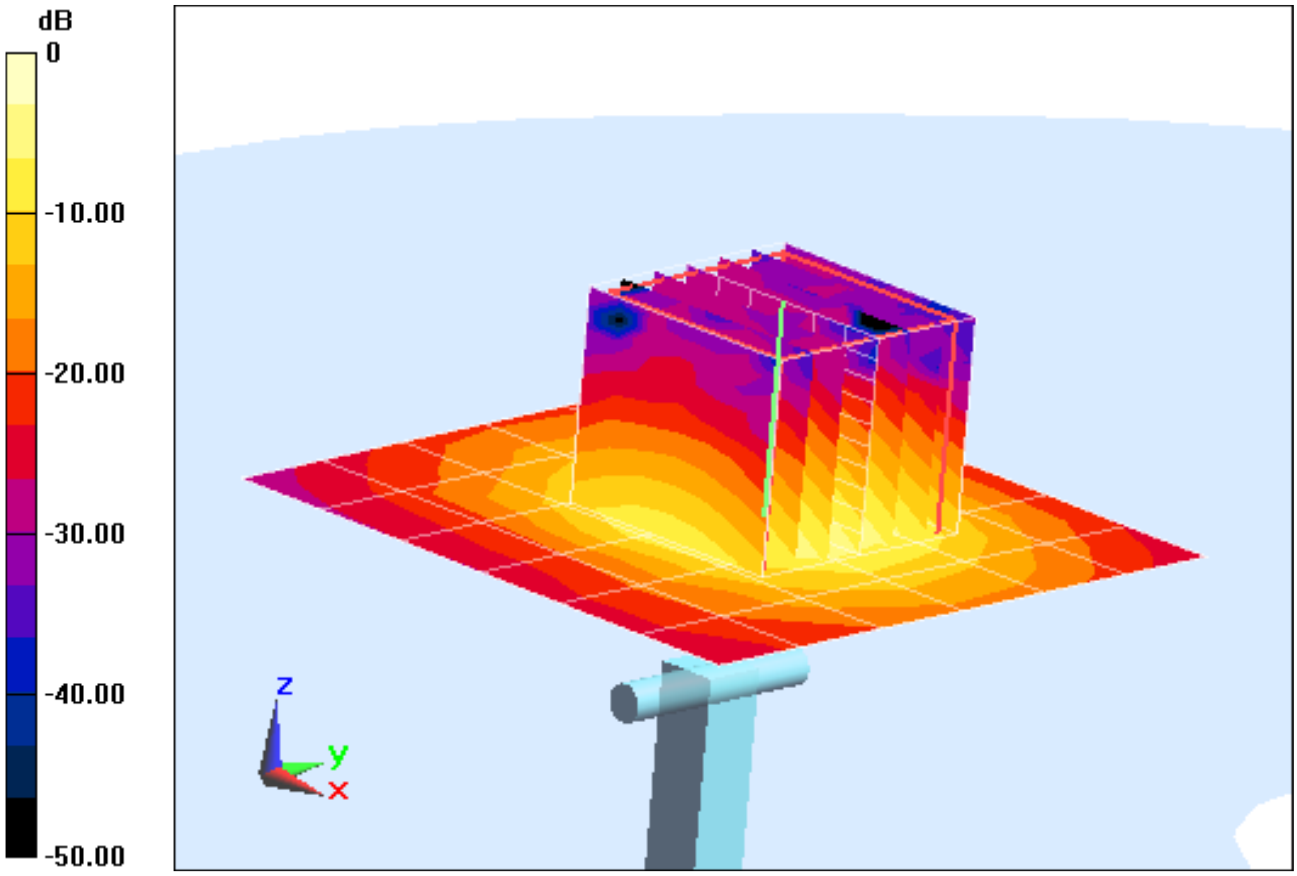

0 dB = 4.110mW/g = 12.28 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5500 MHz;Duty Cycle: 1:1
Medium: 5 GHz Head Medium parameters used:
f = 5500 MHz; σ = 4.872 mho/m; ε_r = 35.2; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 24.9°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN3589; ConvF(4.33, 4.33, 4.33); Calibrated: 1/27/2012
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

5500 MHz System Verification

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Input Power = 14.0 dBm (25 mW)
SAR(1 g) = 1.98 mW/g; SAR(10 g) = 0.565 mW/g
Deviation = -6.71 %

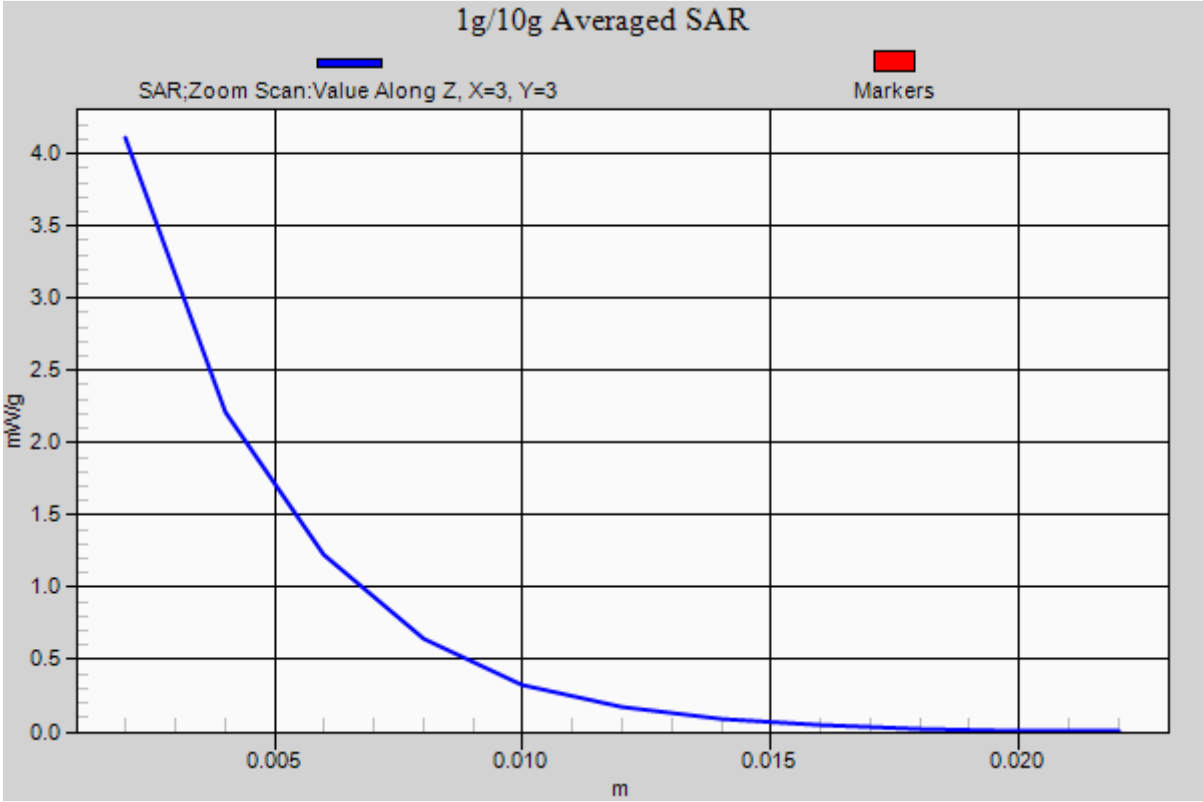

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5800 MHz;Duty Cycle: 1:1
Medium: 5 GHz Head Medium parameters used:
f = 5800 MHz; σ = 5.195 mho/m; ε_r = 34.49; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 24.5°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN3589; ConvF(4.05, 4.05, 4.05); Calibrated: 1/27/2012
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

5800 MHz System Verification

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Input Power = 14.0 dBm (25 mW)
SAR(1 g) = 1.84 mW/g; SAR(10 g) = 0.525 mW/g
Deviation = -7.42 %

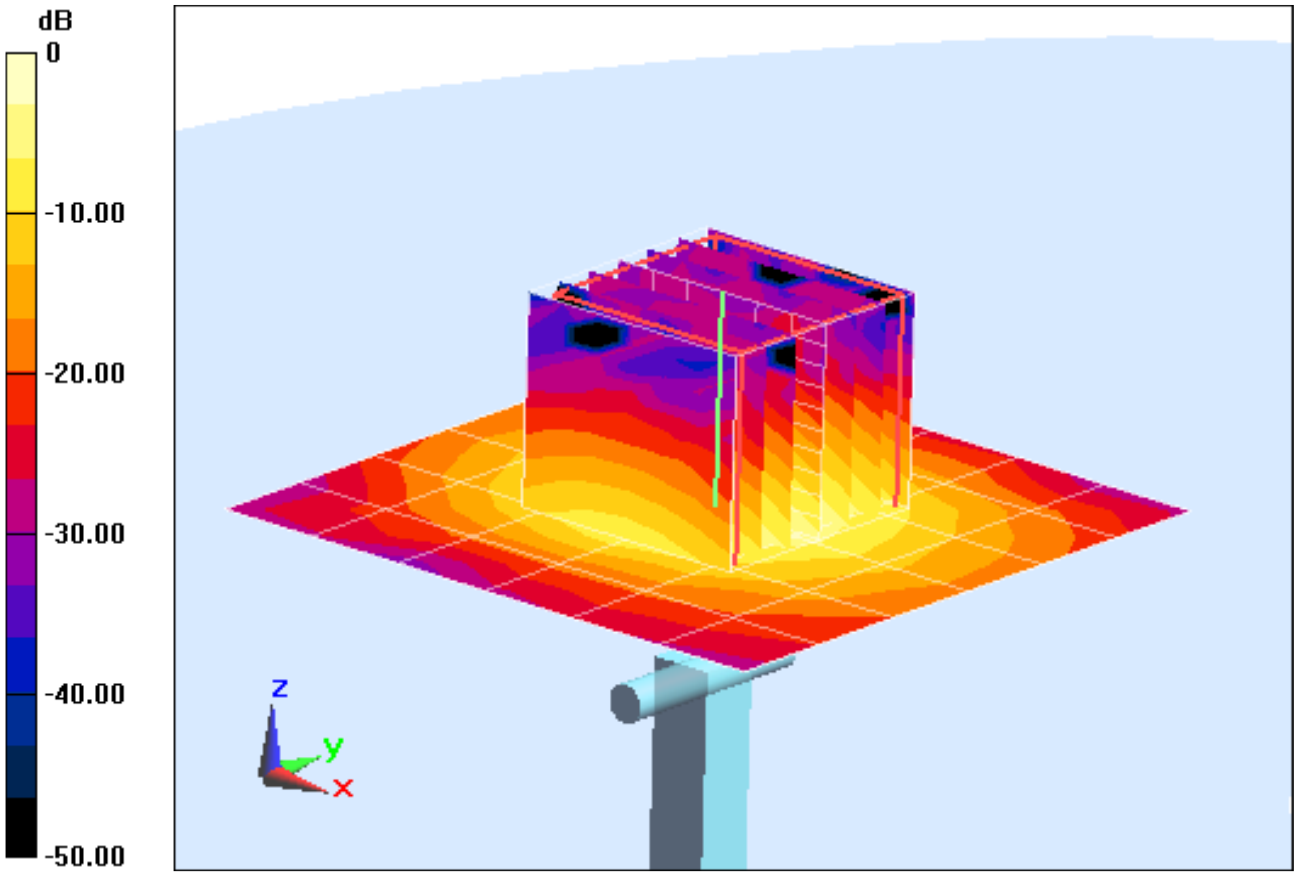

0 dB = 3.860mW/g = 11.73 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5800 MHz;Duty Cycle: 1:1
Medium: 5 GHz Head Medium parameters used:
f = 5800 MHz; σ = 5.195 mho/m; ε_r = 34.49; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2012; Ambient Temp: 24.5°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN3589; ConvF(4.05, 4.05, 4.05); Calibrated: 1/27/2012
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 11/9/2011
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

5800 MHz System Verification

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Input Power = 14.0 dBm (25 mW)
SAR(1 g) = 1.84 mW/g; SAR(10 g) = 0.525 mW/g
Deviation = -7.42 %

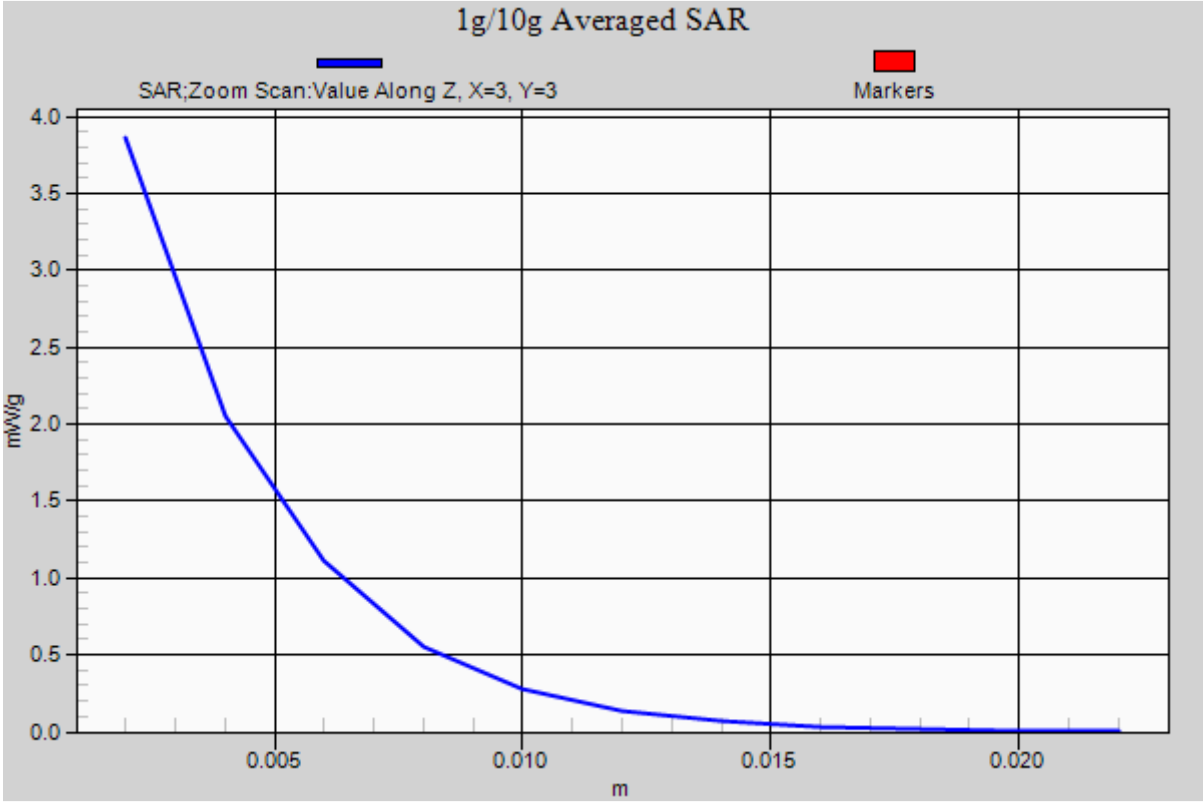

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 835 MHz; Type: D835V2; Serial: 4d047

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: 835 Body; Medium parameters used:
f = 835 MHz; σ = 1.007 mho/m; ε_r = 54.01; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-18-2012; Ambient Temp: 24.3°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3263; ConvF(6.22, 6.22, 6.22); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Input Power = 20.0 dBm (100 mW)
SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.658 mW/g
Deviation = 7.33%

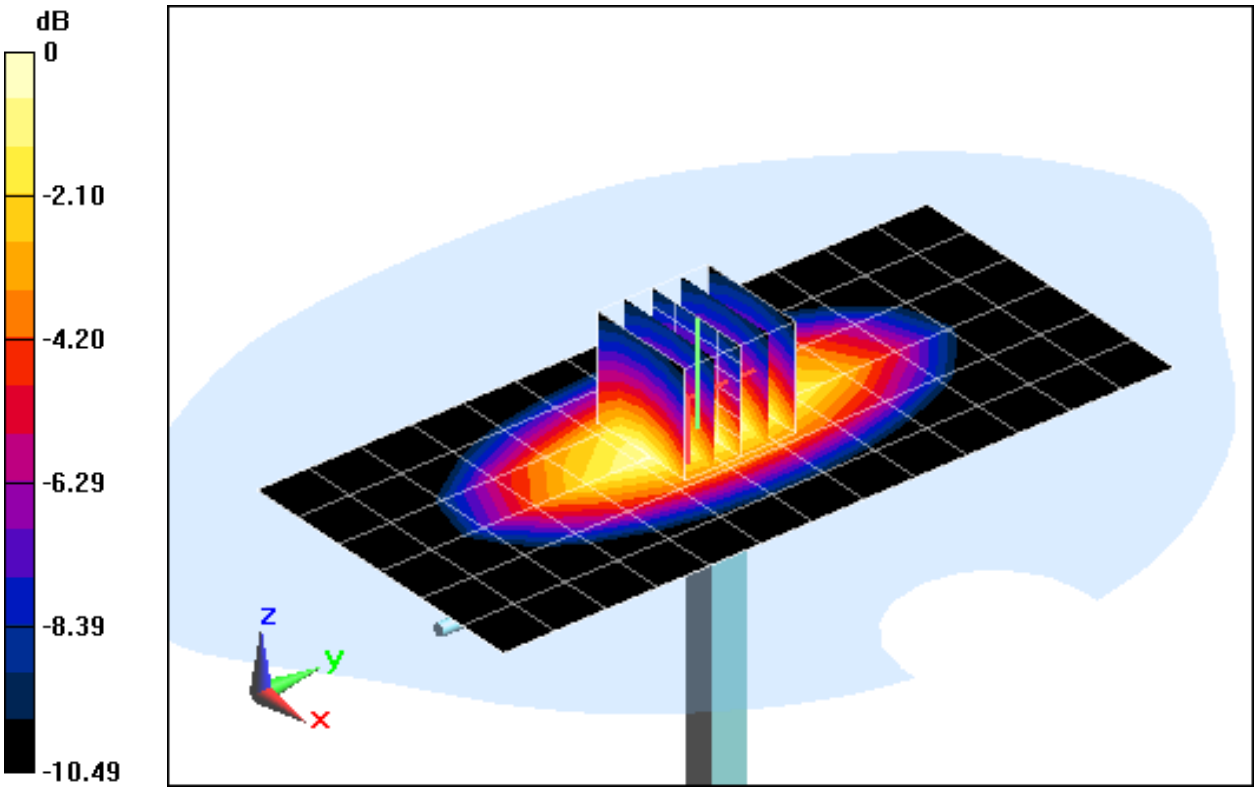

0 dB = 1.090mW/g = 0.75 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 835 MHz; Type: D835V2; Serial: 4d047

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: 835 Body; Medium parameters used:
f = 835 MHz; σ = 1.007 mho/m; ε_r = 54.01; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-18-2012; Ambient Temp: 24.3°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3263; ConvF(6.22, 6.22, 6.22); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Input Power = 20.0 dBm (100 mW)
SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.658 mW/g
Deviation = 7.33%

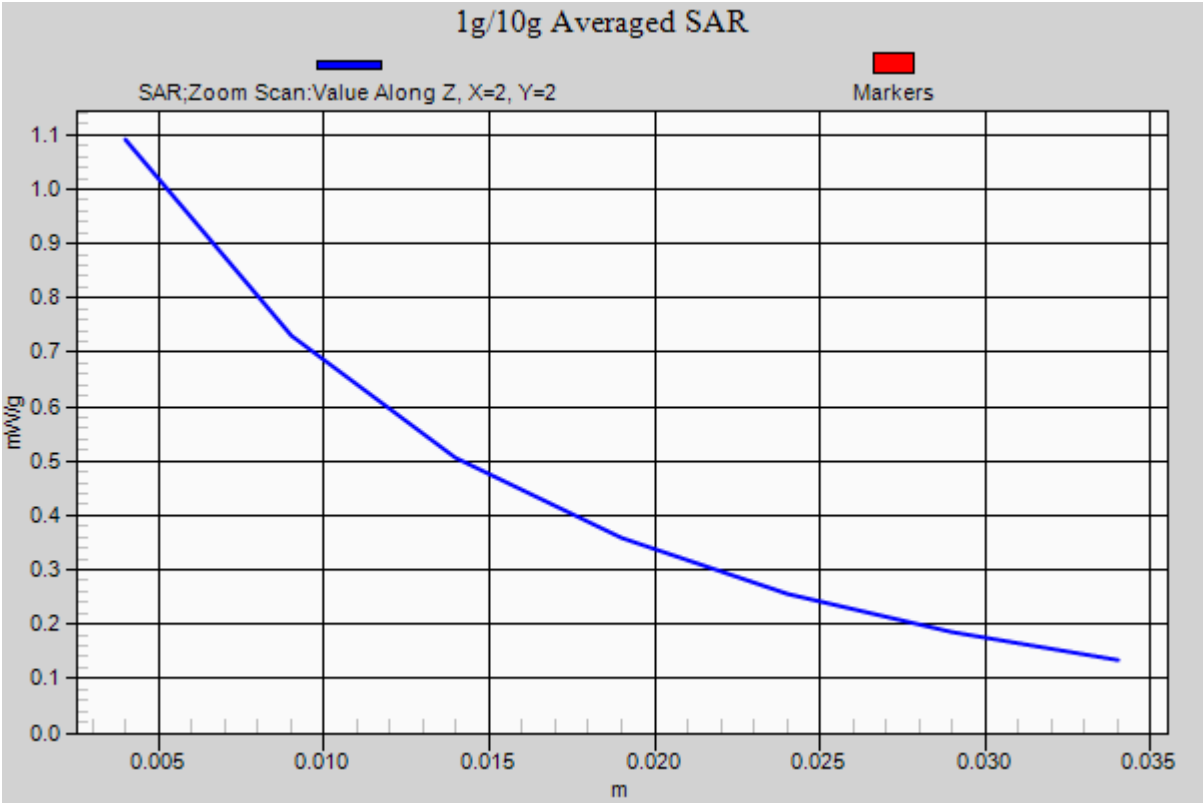

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 Body; Medium parameters used (interpolated):
f = 1900 MHz; σ = 1.504 mho/m; ε_r = 53.597; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2012; Ambient Temp: 24.3°C; Tissue Temp: 23.9°C

Probe: ES3DV3 - SN3263; ConvF(4.81, 4.81, 4.81); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

1900 MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Input Power = 20.0 dBm (100 mW)
SAR(1 g) = 3.98 mW/g; SAR(10 g) = 2.1 mW/g
Deviation = -2.69%

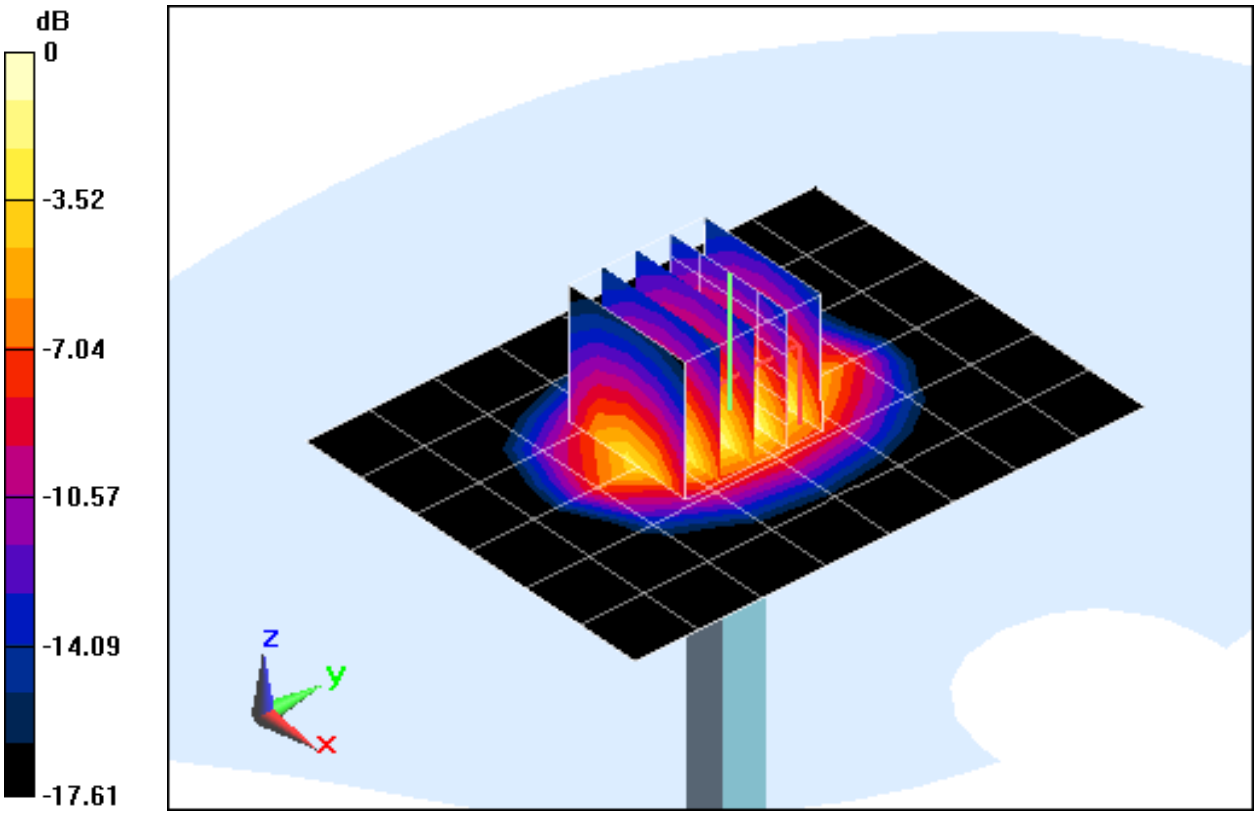

0 dB = 4.360mW/g = 12.79 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 Body; Medium parameters used (interpolated):
f = 1900 MHz; σ = 1.504 mho/m; ε_r = 53.597; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2012; Ambient Temp: 24.3°C; Tissue Temp: 23.9°C

Probe: ES3DV3 - SN3263; ConvF(4.81, 4.81, 4.81); Calibrated: 11/18/2011
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: SAM v5.0; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

1900 MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Input Power = 20.0 dBm (100 mW)
SAR(1 g) = 3.98 mW/g; SAR(10 g) = 2.1 mW/g
Deviation = -2.69%

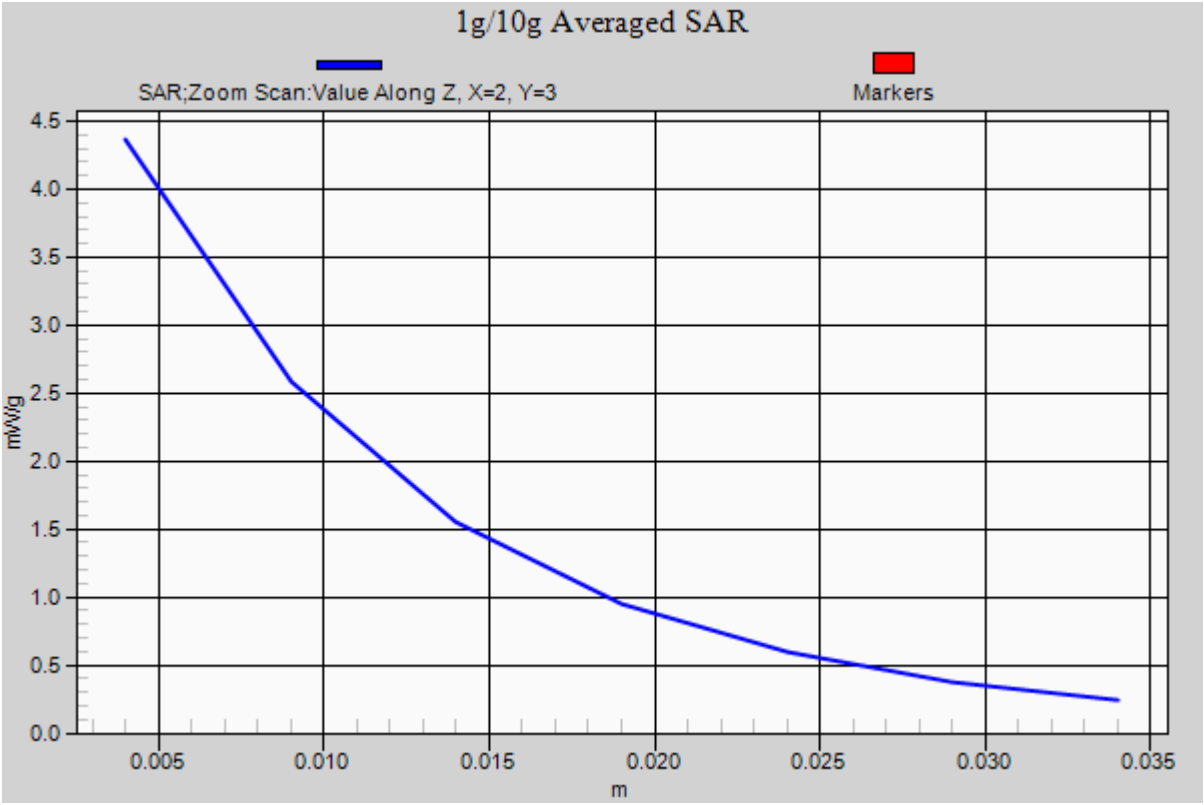

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1
Medium: 2450 Body; Medium parameters used:
f = 2450 MHz; σ = 2.05 mho/m; ε_r = 50.8; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2012; Ambient Temp: 23.4 °C; Tissue Temp: 22. 3°C

Probe: ES3DV3 - SN3209; ConvF(4.23, 4.23, 4.23); Calibrated: 3/16/2012
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 2/15/2012
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

2450MHz System Verification

Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Input Power = 20.0 dBm (100 mW)
SAR(1 g) = 5.52 mW/g; SAR(10 g) = 2.51 mW/g
Deviation = 7.60 %

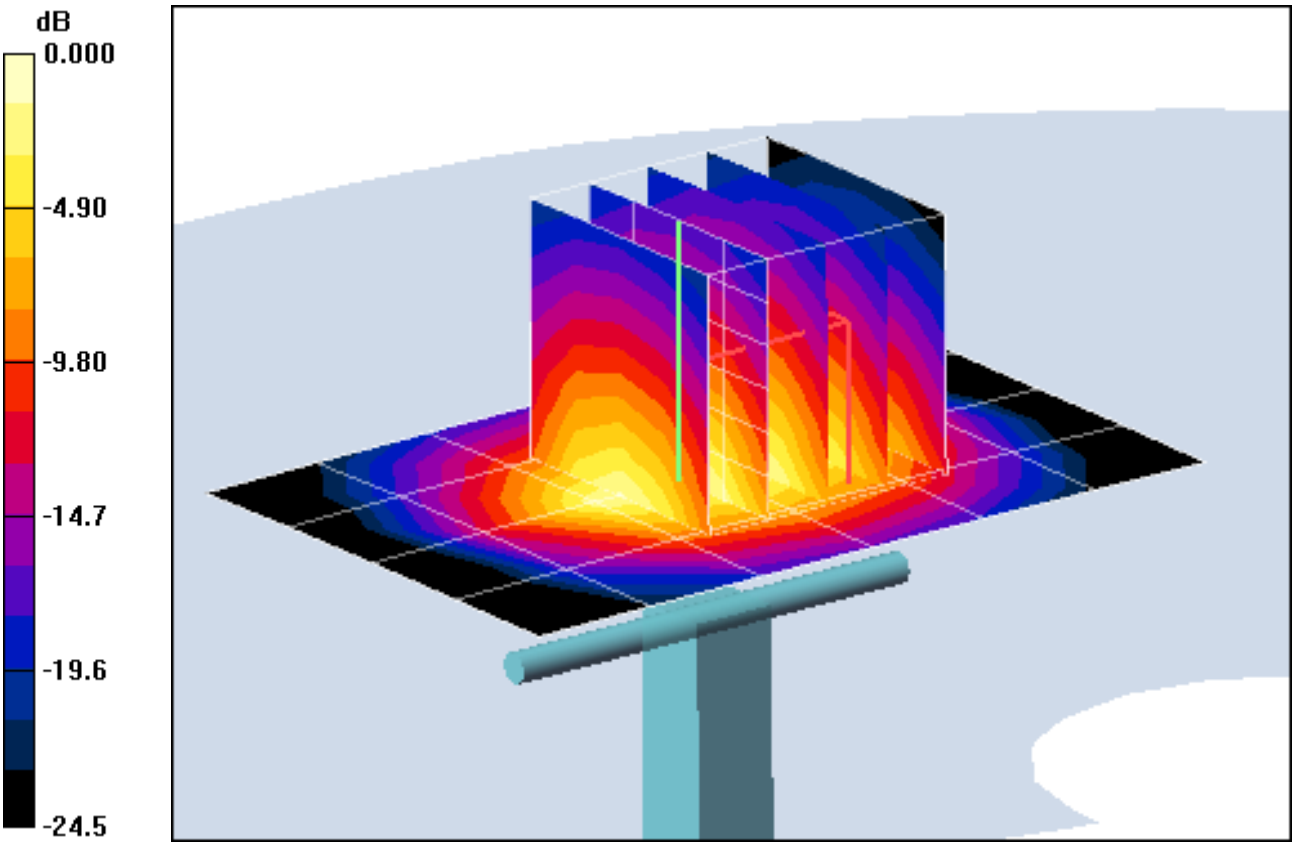

0 dB = 7.15mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1
Medium: 2450 Body; Medium parameters used:
f = 2450 MHz; σ = 2.05 mho/m; ε_r = 50.8; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2012; Ambient Temp: 23.4 °C; Tissue Temp: 22 3°C

Probe: ES3DV3 - SN3209; ConvF(4.23, 4.23, 4.23); Calibrated: 3/16/2012
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 2/15/2012
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

2450MHz System Verification

Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Input Power = 20.0 dBm (100 mW)
SAR(1 g) = 5.52 mW/g; SAR(10 g) = 2.51 mW/g
Deviation = 7.60 %

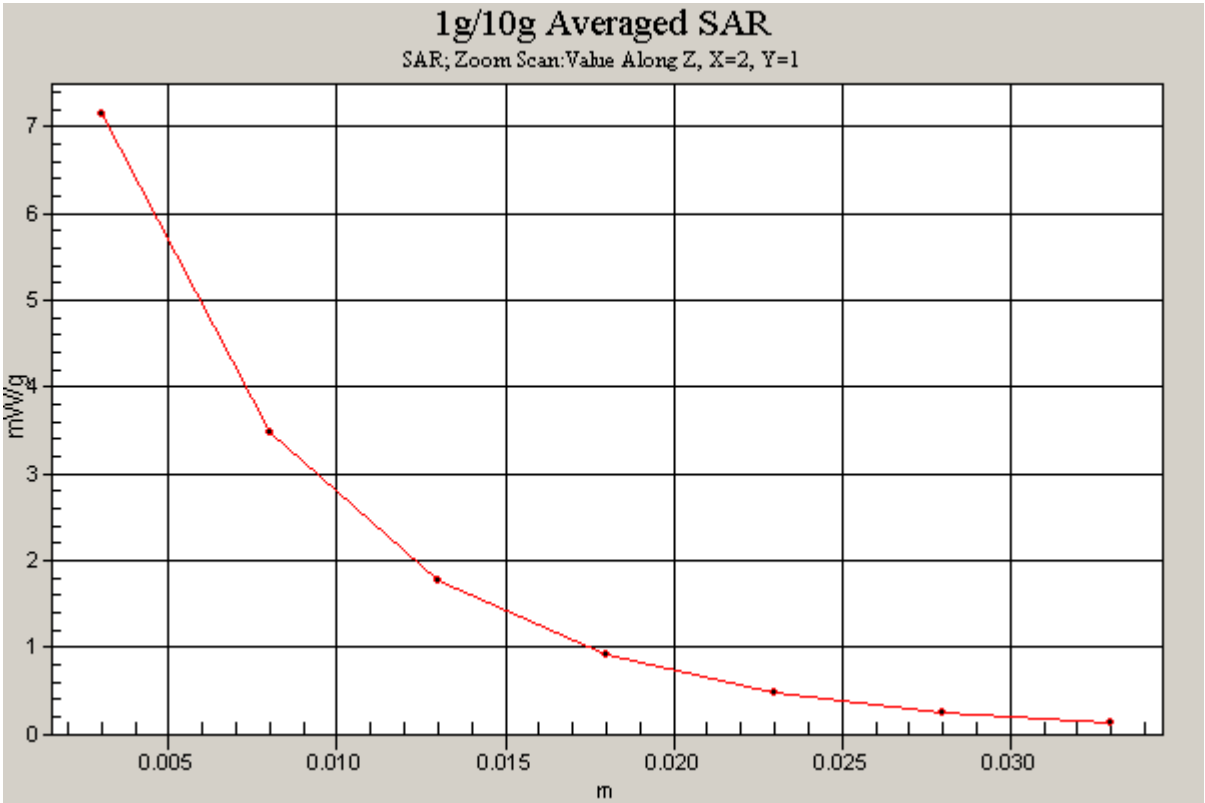

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5200 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: 5 GHz Body Medium parameters used:
f = 5200 MHz; σ = 5.321 mho/m; ε_r = 47.95; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2012; Ambient Temp: 23.6°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3561; ConvF(3.7, 3.7, 3.7); Calibrated: 7/27/2011
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

5200 MHz System Verification

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Input Power = 20.0 dBm (100 mW)
SAR(1 g) = 7.43 mW/g; SAR(10 g) = 2.12 mW/g
Deviation = 1.23 %

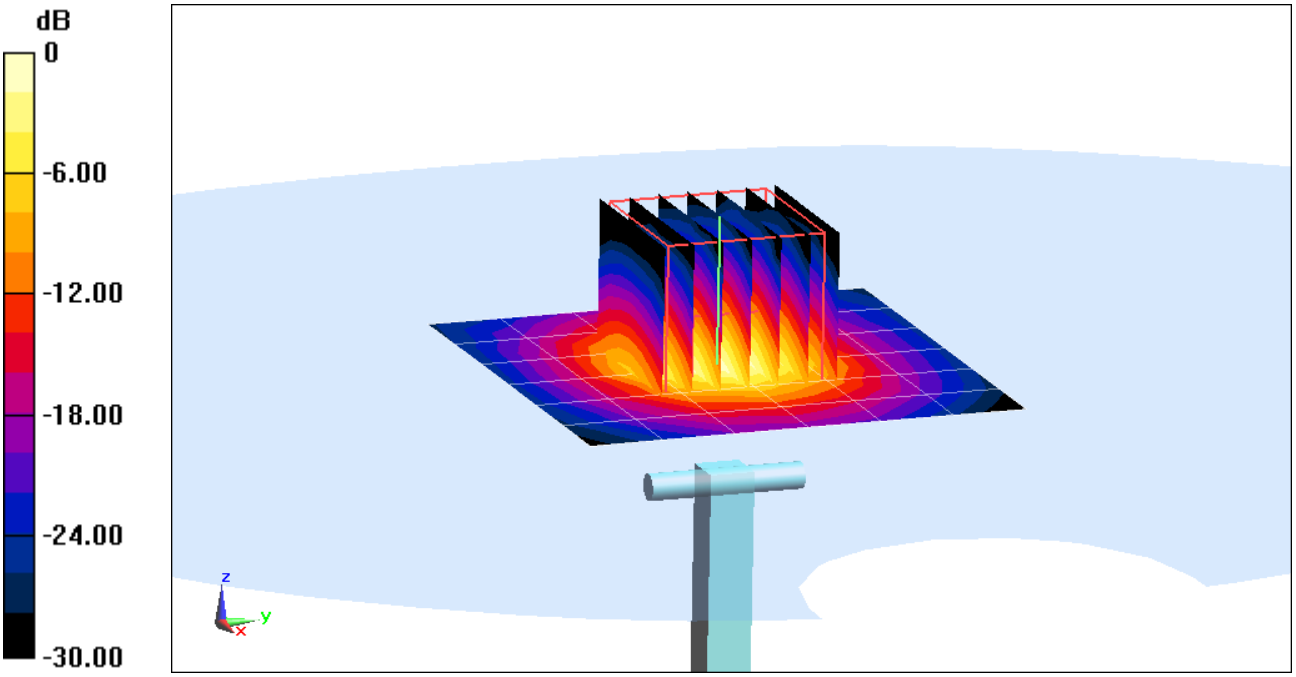

0 dB = 15.370mW/g = 23.73 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5200 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: 5 GHz Body Medium parameters used:
f = 5200 MHz; σ = 5.321 mho/m; ε_r = 47.95; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2012; Ambient Temp: 23.6°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3561; ConvF(3.7, 3.7, 3.7); Calibrated: 7/27/2011
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

5200 MHz System Verification

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Input Power = 20.0 dBm (100 mW)
SAR(1 g) = 7.43 mW/g; SAR(10 g) = 2.12 mW/g
Deviation = 1.23 %

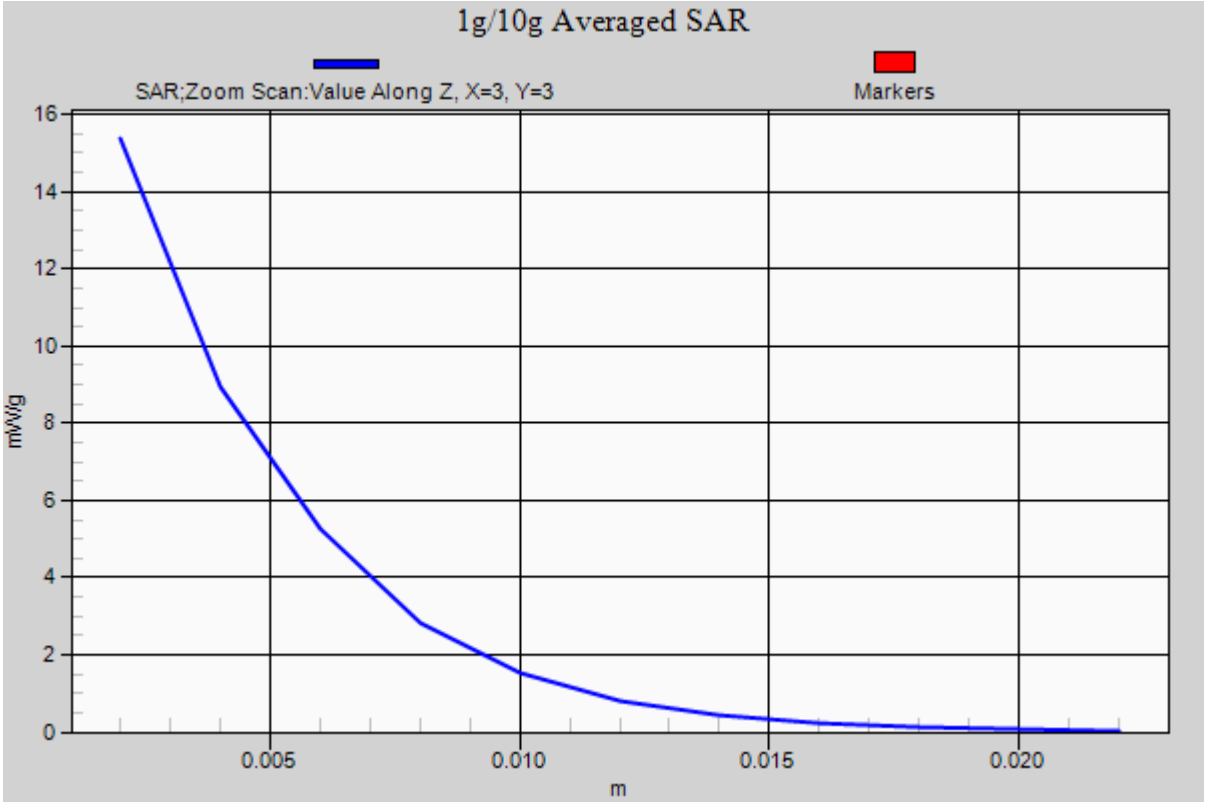

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5500 MHz;Duty Cycle: 1:1
Medium: 5 GHz Body Medium parameters used:
f = 5500 MHz; σ = 5.762 mho/m; ε_r = 47.21; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2012; Ambient Temp: 23.8°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3561; ConvF(3.28, 3.28, 3.28); Calibrated: 7/27/2011
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

5500 MHz System Verification

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Input Power = 20.0 dBm (100 mW)
SAR(1 g) = 8.07 mW/g; SAR(10 g) = 2.27 mW/g
Deviation = 2.28 %

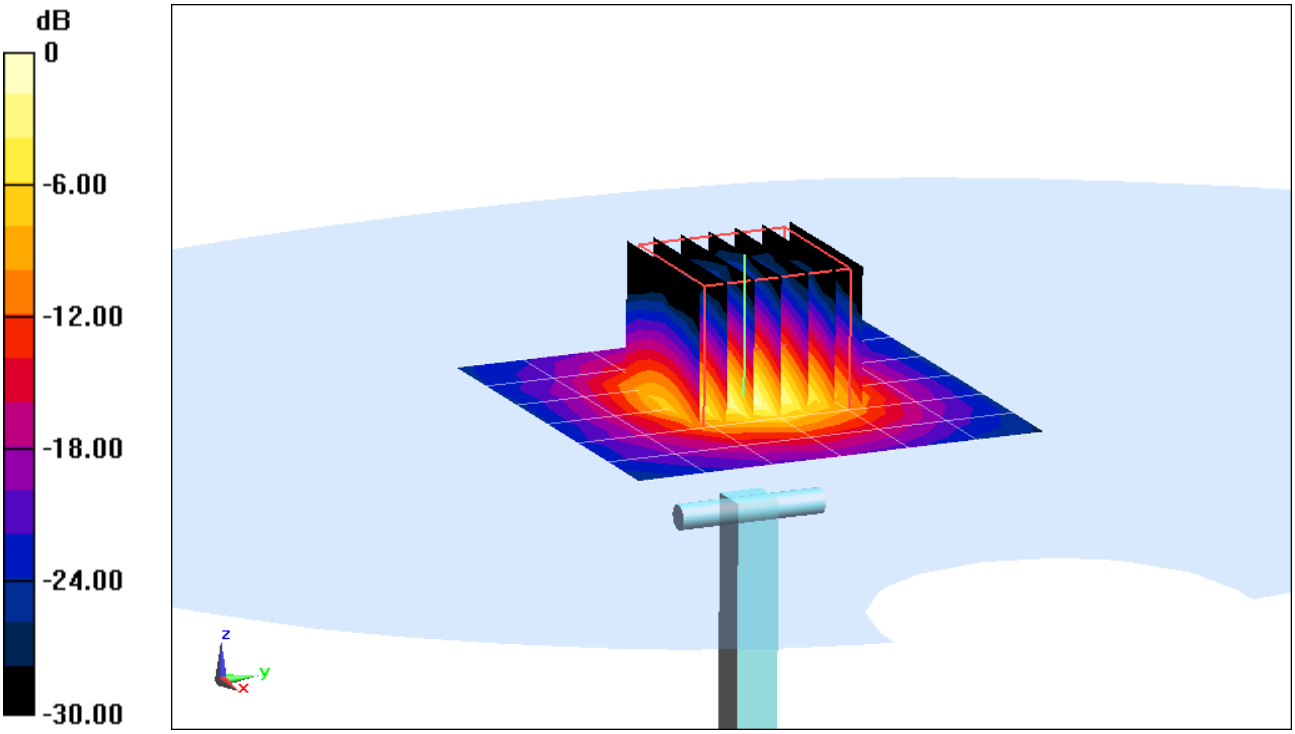

0 dB = 16.940mW/g = 24.58 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5500 MHz;Duty Cycle: 1:1
Medium: 5 GHz Body Medium parameters used:
f = 5500 MHz; σ = 5.762 mho/m; ε_r = 47.21; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2012; Ambient Temp: 23.8°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3561; ConvF(3.28, 3.28, 3.28); Calibrated: 7/27/2011
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

5500 MHz System Verification

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Input Power = 20.0 dBm (100 mW)
SAR(1 g) = 8.07 mW/g; SAR(10 g) = 2.27 mW/g
Deviation = 2.28 %

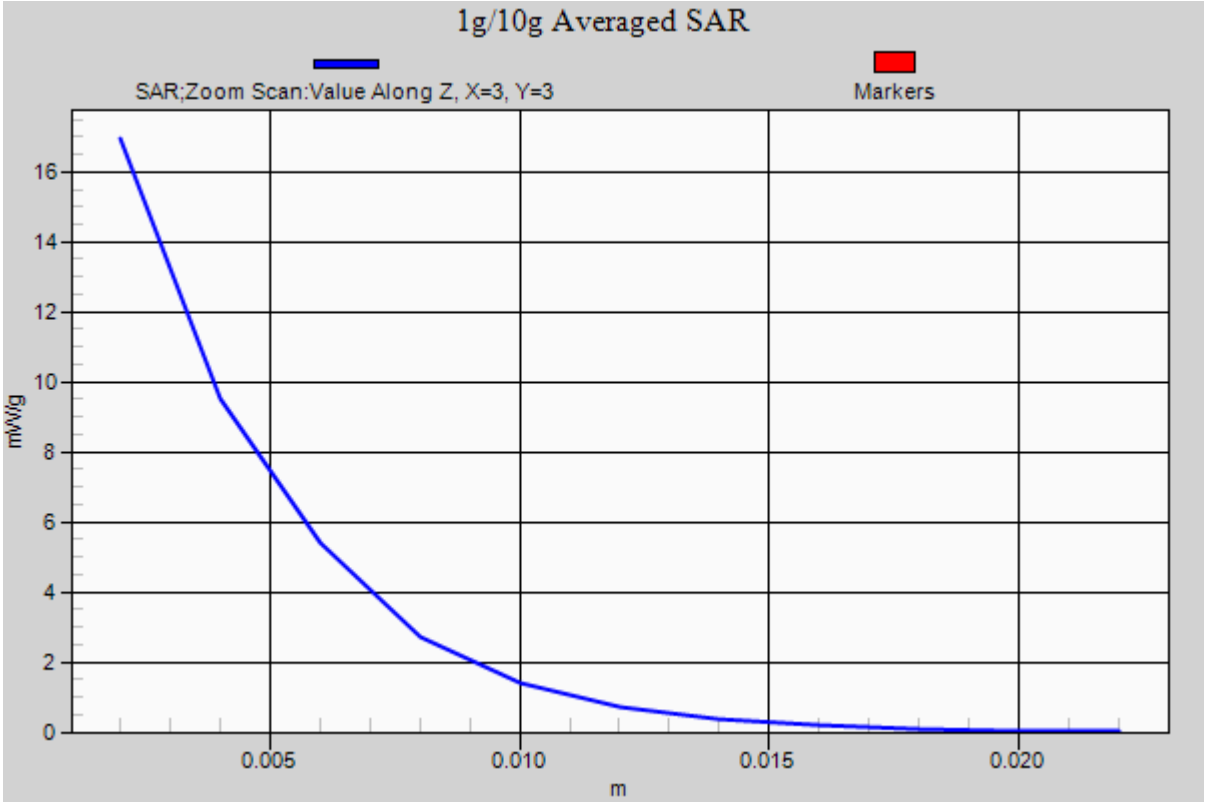

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5800 MHz;Duty Cycle: 1:1
Medium: 5 GHz Body Medium parameters used:
f = 5800 MHz; σ = 6.223 mho/m; ε_r = 46.41; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2012; Ambient Temp: 24.0°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3561; ConvF(3.34, 3.34, 3.34); Calibrated: 7/27/2011
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

5800 MHz System Verification

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Input Power = 20.0 dBm (100 mW)
SAR(1 g) = 7.52 mW/g; SAR(10 g) = 2.11 mW/g
Deviation = 1.21 %

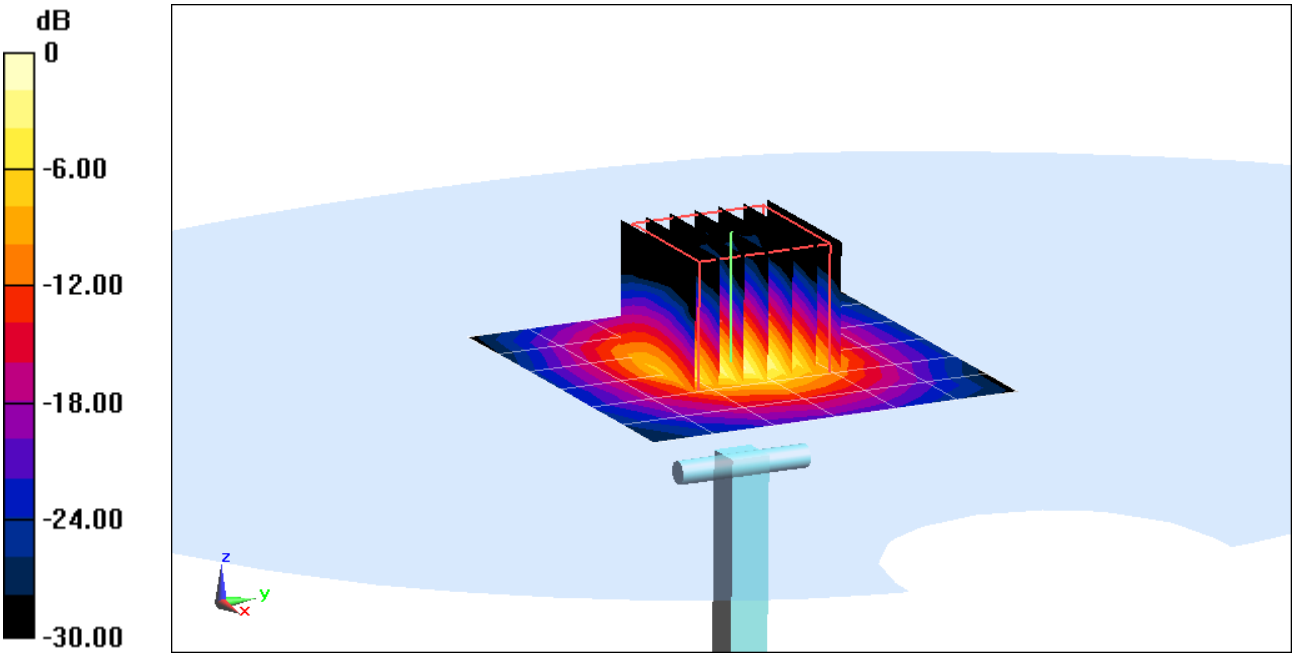

0 dB = 16.110mW/g = 24.14 dB mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5800 MHz;Duty Cycle: 1:1
Medium: 5 GHz Body Medium parameters used:
f = 5800 MHz; σ = 6.223 mho/m; ε_r = 46.41; ρ = 1000 kg/m^3
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2012; Ambient Temp: 24.0°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3561; ConvF(3.34, 3.34, 3.34); Calibrated: 7/27/2011
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 2/20/2012
Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

5800 MHz System Verification

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Input Power = 20.0 dBm (100 mW)
SAR(1 g) = 7.52 mW/g; SAR(10 g) = 2.11 mW/g
Deviation = 1.21 %

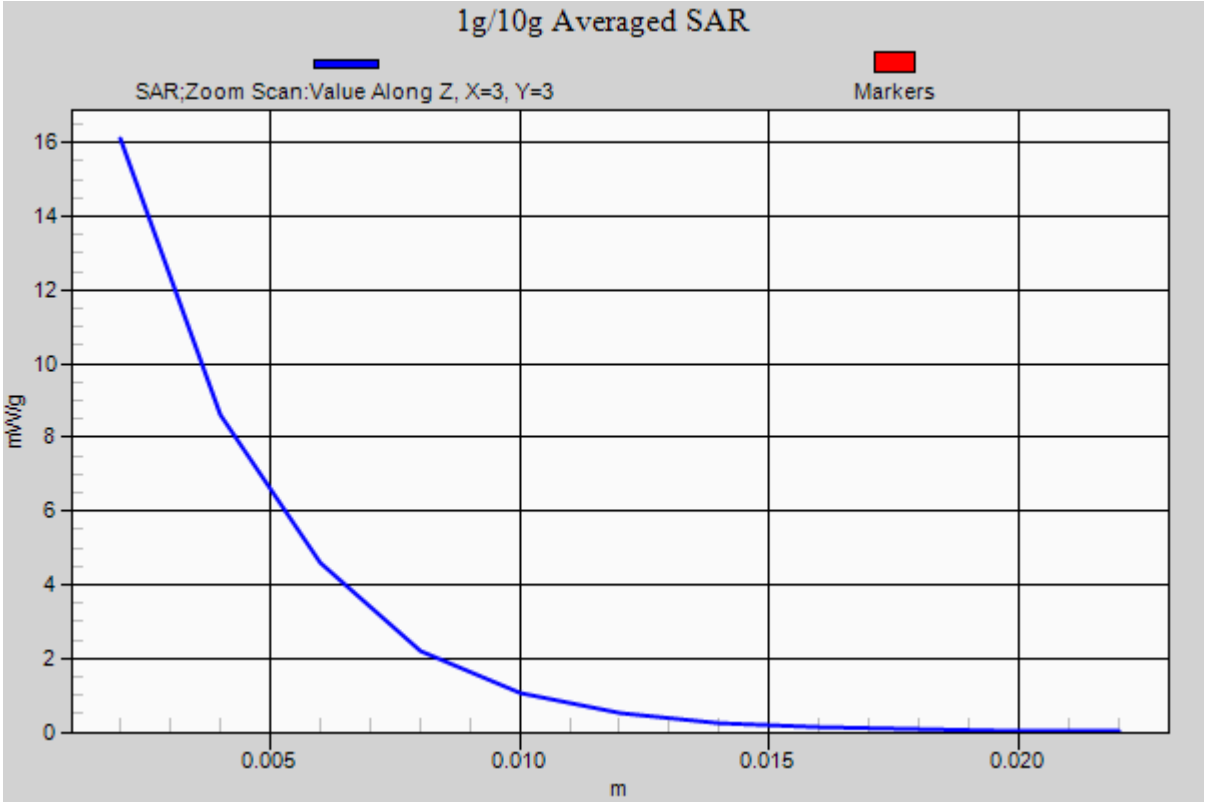

APPENDIX C: PROBE CALIBRATION

© 2012 PCTEST Engineering Laboratory, Inc.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS) **Accreditation No.: SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client **PC Test** **Certificate No: D1900V2-5d080_Jul11**

CALIBRATION CERTIFICATE

Object	D1900V2 - SN: 5d080
Calibration procedure(s)	QA CAL-05.v8 Calibration procedure for dipole validation kits above 700 MHz
Calibration date:	July 22, 2011

✓KOK
9/6/11

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Type-N mismatch combination	SN: 5047.2 / 06327	29-Mar-11 (No. 217-01371)	Apr-12
Reference Probe ES3DV3	SN: 3205	29-Apr-11 (No. ES3-3205_Apr11)	Apr-12
DAE4	SN: 601	04-Jul-11 (No. DAE4-601_Jul11)	Jul-12

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Dimce Iliev	Laboratory Technician	D. Iliev
Approved by:	Katja Pokovic	Technical Manager	

Issued: July 22, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	**Permittivity**	**Conductivity**
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.1 ± 6 %	1.42 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm^3 (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.1 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	**39.9 mW /g ± 17.0 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.26 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	**20.9 mW /g ± 16.5 % (k=2)**

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	**Permittivity**	**Conductivity**
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.3 ± 6 %	1.53 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm^3 (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.3 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	**40.9 mW / g ± 17.0 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.38 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	**21.4 mW / g ± 16.5 % (k=2)**

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.5 Ω + 8.0 jΩ
Return Loss	- 21.8 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.7 Ω + 7.1 jΩ
Return Loss	- 21.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.192 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 28, 2006

DASY5 Validation Report for Head TSL

Date: 20.07.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d080

Communication System: CW; Frequency: 1900 MHz
Medium parameters used: f = 1900 MHz; σ = 1.42 mho/m; ε_r = 39.1; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.01, 5.01, 5.01); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 98.443 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 18.442 W/kg
SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.26 mW/g
Maximum value of SAR (measured) = 12.731 mW/g

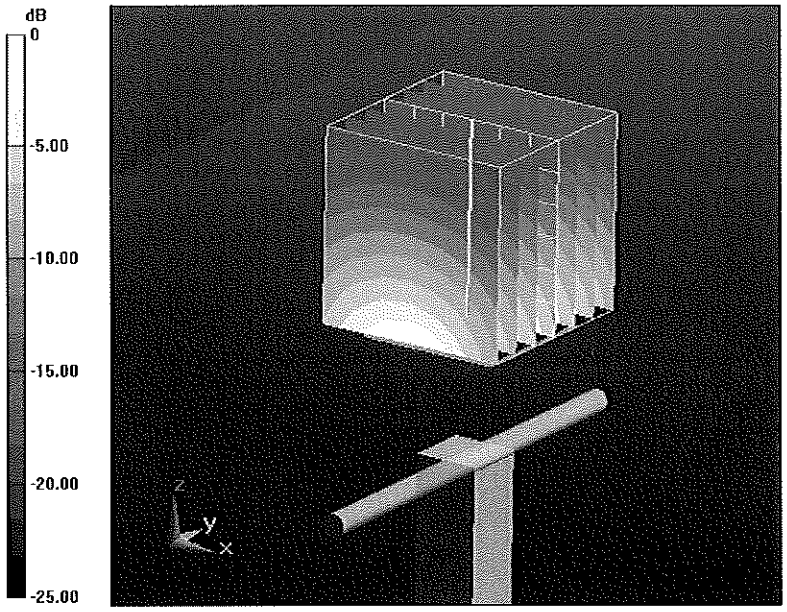

0 dB = 12.730mW/g

Impedance Measurement Plot for Head TSL

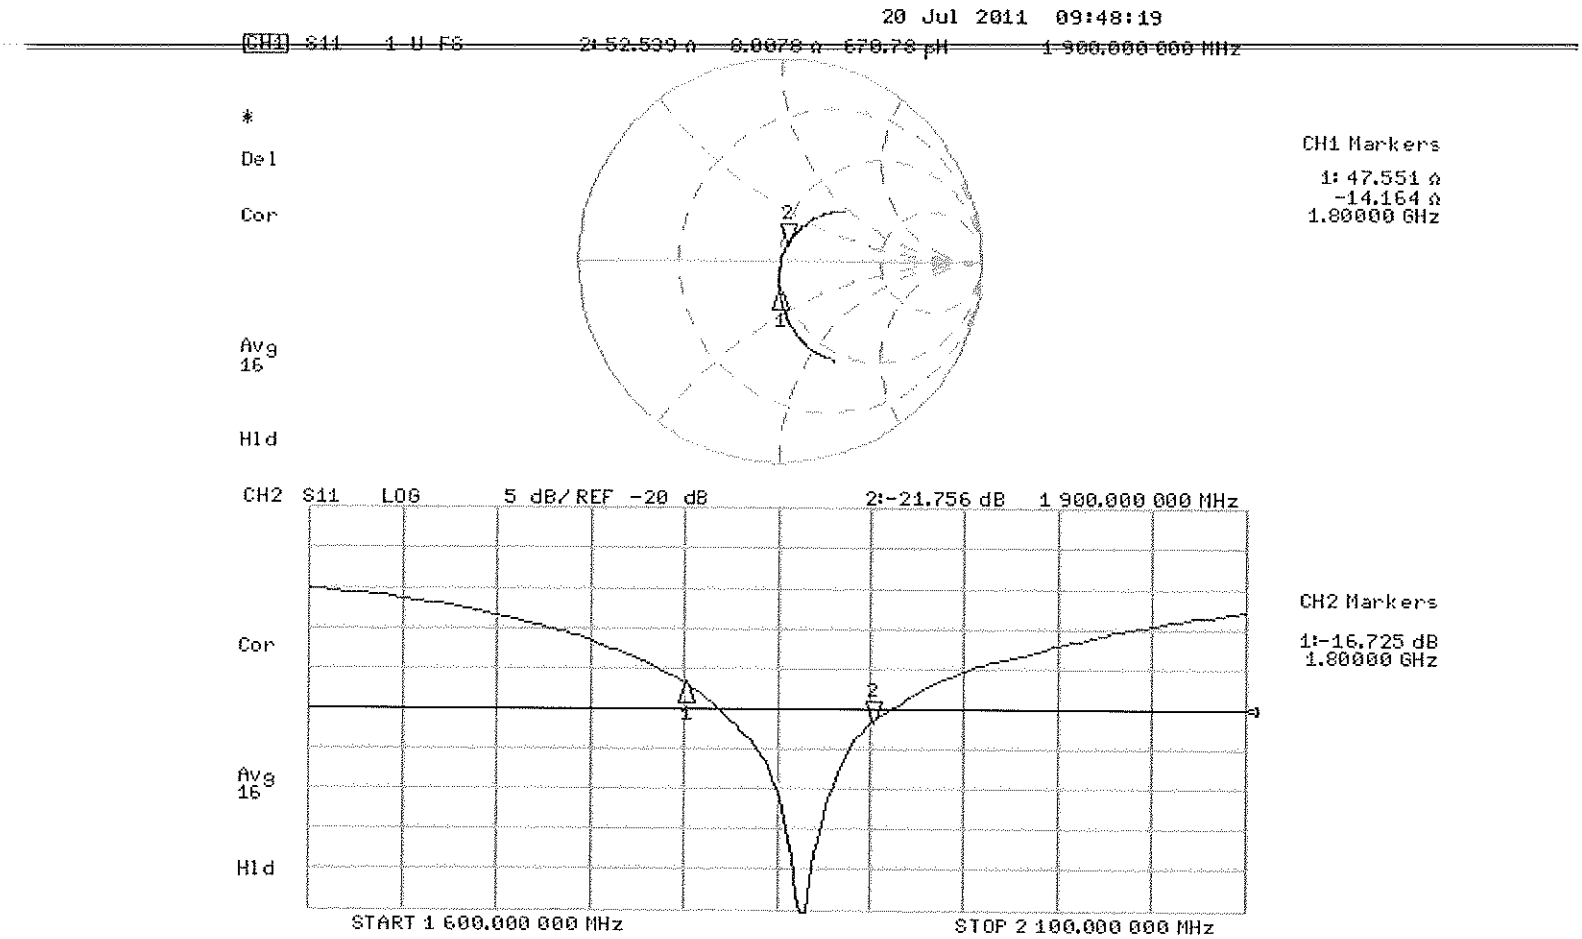

DASY5 Validation Report for Body TSL

Date: 22.07.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d080

Communication System: CW; Frequency: 1900 MHz
Medium parameters used: f = 1900 MHz; σ = 1.53 mho/m; ε_r = 52.3; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.62, 4.62, 4.62); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 96.049 V/m; Power Drift = 0.0018 dB
Peak SAR (extrapolated) = 18.160 W/kg
SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.38 mW/g
Maximum value of SAR (measured) = 13.017 mW/g

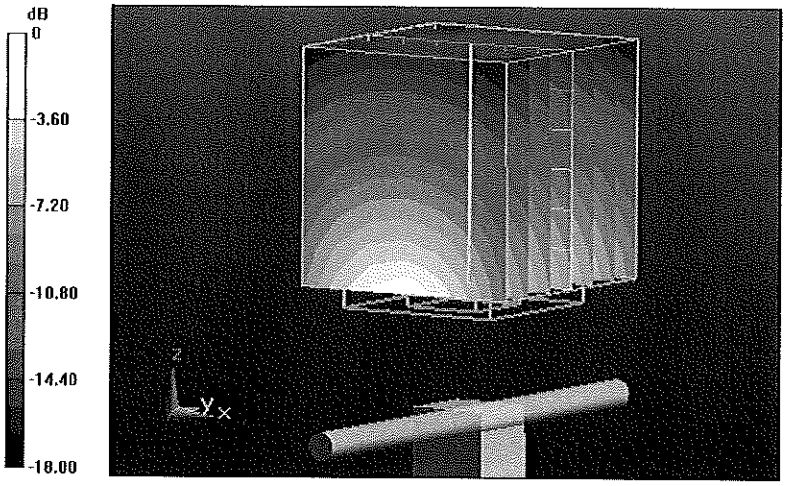

0 dB = 13.020mW/g

Impedance Measurement Plot for Body TSL

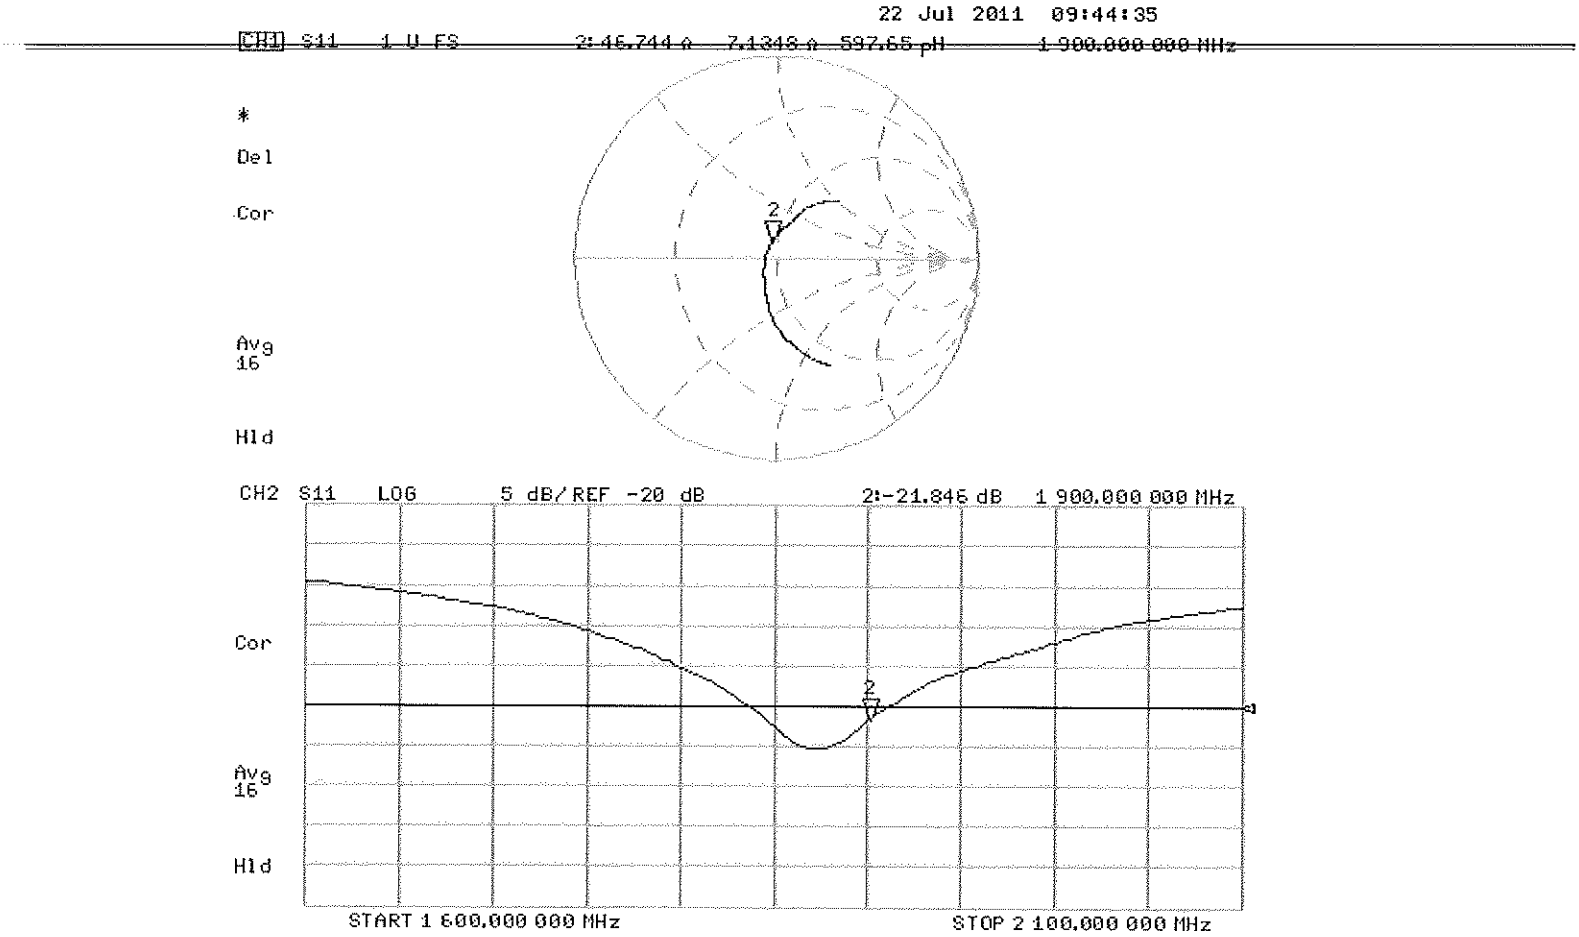

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS) **Accreditation No.: SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client **PC Test** **Certificate No: D2450V2-719_Aug11**

CALIBRATION CERTIFICATE

Object	D2450V2 - SN: 719
Calibration procedure(s)	QA CAL-05.v8 Calibration procedure for dipole validation kits above 700 MHz
Calibration date:	August 19, 2011

✓KOK 9/6/11

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Type-N mismatch combination	SN: 5047.2 / 06327	29-Mar-11 (No. 217-01371)	Apr-12
Reference Probe ES3DV3	SN: 3205	29-Apr-11 (No. ES3-3205_Apr11)	Apr-12
DAE4	SN: 601	04-Jul-11 (No. DAE4-601_Jul11)	Jul-12

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Claudio Leubler	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: August 22, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	**Permittivity**	**Conductivity**
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.4 ± 6 %	1.85 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm^3 (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.7 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	**53.8 mW /g ± 17.0 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.35 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	**25.2 mW /g ± 16.5 % (k=2)**

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	**Permittivity**	**Conductivity**
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.8 ± 6 %	2.02 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm^3 (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.1 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	**51.3 mW / g ± 17.0 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.07 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	**24.1 mW / g ± 16.5 % (k=2)**

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.2 Ω + 3.6 jΩ
Return Loss	- 26.6 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.6 Ω + 4.3 jΩ
Return Loss	- 27.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.149 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 10, 2002

DASY5 Validation Report for Head TSL

Date: 18.08.2011

Test Laboratory: SPEAG, Zurich, Switzerland

~~DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 719~~

Communication System: CW; Frequency: 2450 MHz
Medium parameters used: f = 2450 MHz; σ = 1.85 mho/m; ε_r = 38.4; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.45, 4.45, 4.45); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 101.4 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 28.234 W/kg
SAR(1 g) = 13.7 mW/g; SAR(10 g) = 6.35 mW/g
Maximum value of SAR (measured) = 17.657 mW/g

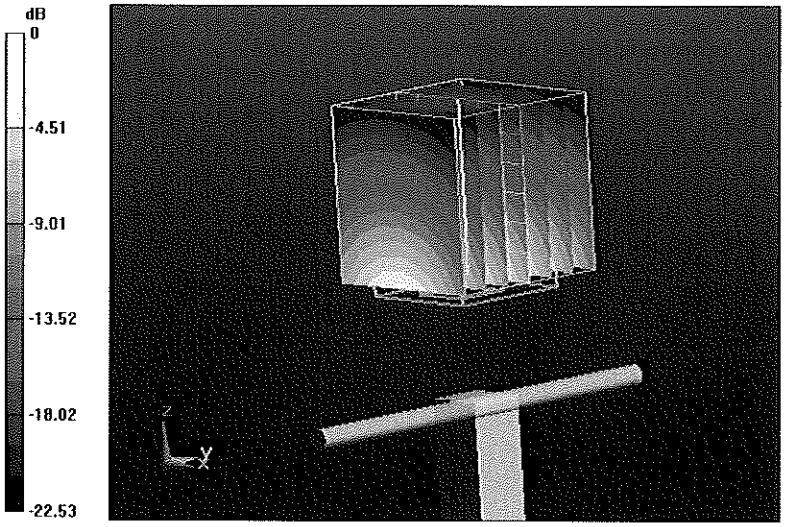

0 dB = 17.660mW/g

Impedance Measurement Plot for Head TSL

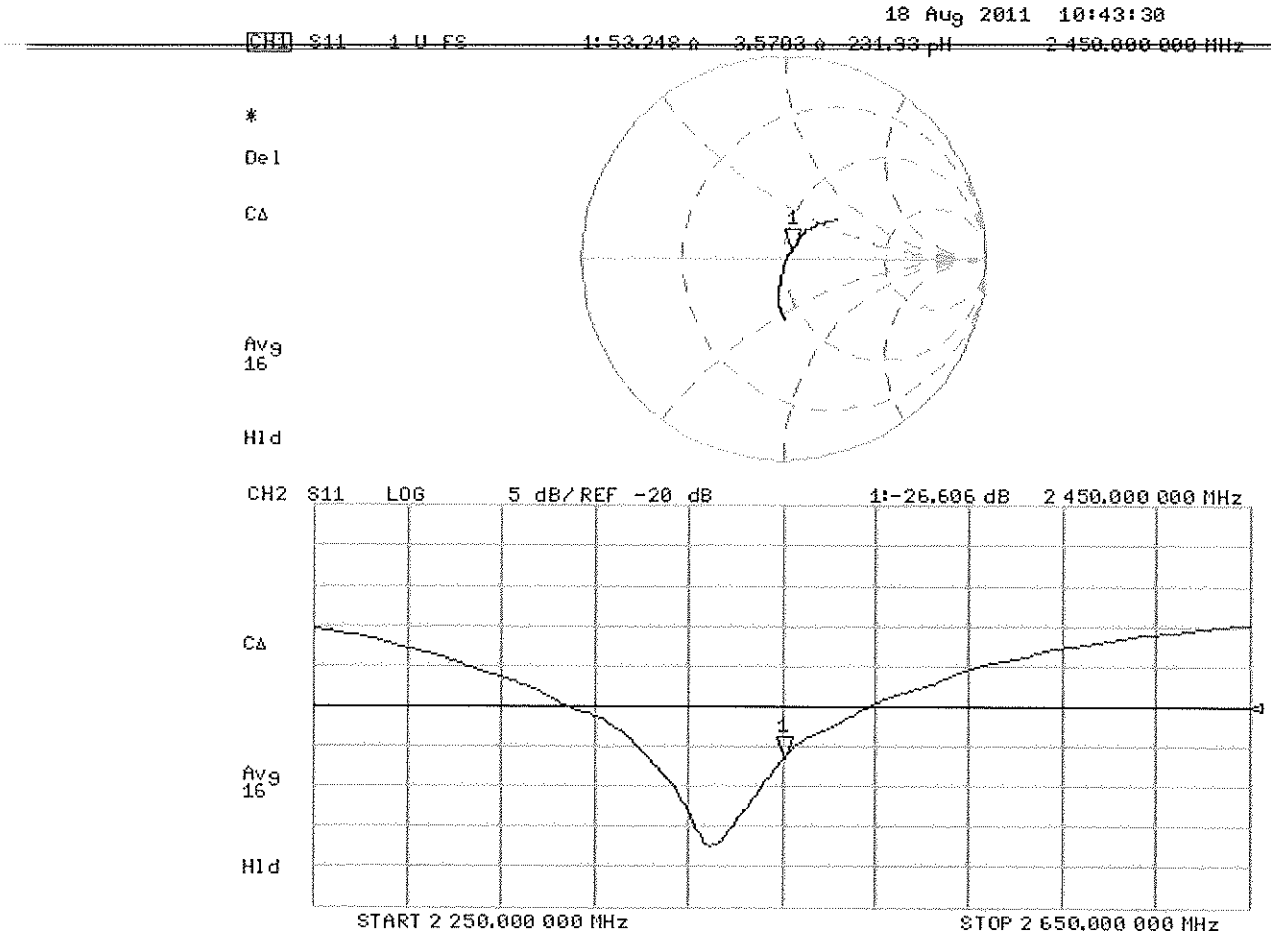

DASY5 Validation Report for Body TSL

Date: 19.08.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 719

Communication System: CW; Frequency: 2450 MHz
Medium parameters used: f = 2450 MHz; σ = 2.02 mho/m; ε_r = 51.8; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.26, 4.26, 4.26); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 95.948 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 26.876 W/kg
SAR(1 g) = 13.1 mW/g; SAR(10 g) = 6.07 mW/g
Maximum value of SAR (measured) = 17.309 mW/g

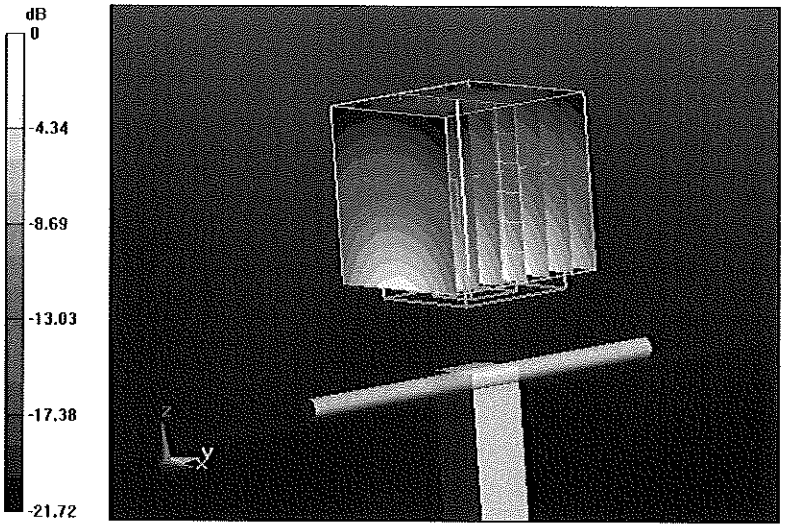

0 dB = 17.310mW/g

Impedance Measurement Plot for Body TSL

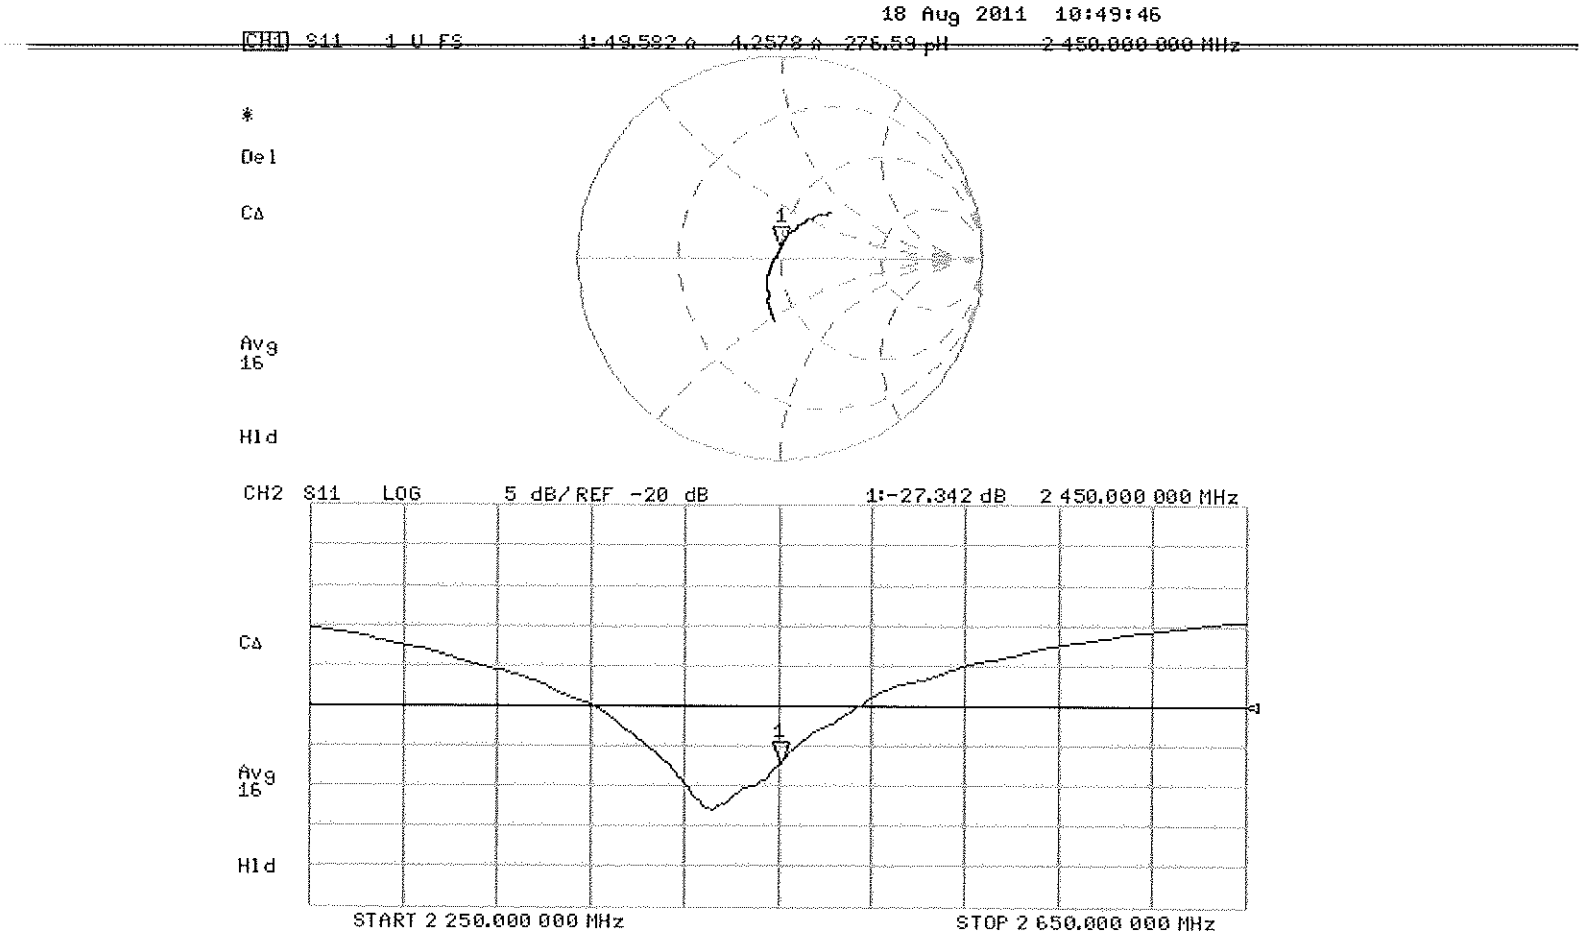

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS) **Accreditation No.: SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client **PC Test** **Certificate No: D5GHzV2-1057_Jan12**

CALIBRATION CERTIFICATE

Object	D5GHzV2 - SN: 1057
Calibration procedure(s)	QA CAL-22.v1 Calibration procedure for dipole validation kits between 3-6 GHz
Calibration date:	January 19, 2012

✓ LOK 2/6/12

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	05-Oct-11 (No. 217-01451)	Oct-12
Power sensor HP 8481A	US37292783	05-Oct-11 (No. 217-01451)	Oct-12
Reference 20 dB Attenuator	SN: 5086 (20g)	29-Mar-11 (No. 217-01368)	Apr-12
Type-N mismatch combination	SN: 5047.2 / 06327	29-Mar-11 (No. 217-01371)	Apr-12
Reference Probe EX3DV4	SN: 3503	30-Dec-11 (No. EX3-3503_Dec11)	Dec-12
DAE4	SN: 601	04-Jul-11 (No. DAE4-601_Jul11)	Jul-12

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

	Name	Function	Signature
Calibrated by:	Dimce Iliev	Laboratory Technician	D. Iliev
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 19, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5500 MHz ± 1 MHz 5800 MHz ± 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	**Permittivity**	**Conductivity**
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.3 ± 6 %	4.60 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm^3 (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.90 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	**79.1 mW /g ± 17.0 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.26 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	**22.6 mW /g ± 16.5 % (k=2)**

Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	**Permittivity**	**Conductivity**
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.8 ± 6 %	4.90 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm^3 (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.49 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	**84.9 mW / g ± 17.0 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.42 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	**24.2 mW / g ± 16.5 % (k=2)**

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.3 ± 6 %	5.22 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm^3 (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.95 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	**79.5 mW / g ± 17.0 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.26 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	**22.6 mW / g ± 16.5 % (k=2)**

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	49.2 ± 6 %	5.46 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm^3 (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.33 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	**73.4 mW / g ± 18.1 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.05 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	**20.6 mW / g ± 17.6 % (k=2)**

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.7 ± 6 %	5.86 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm^3 (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.87 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	**78.9 mW / g ± 18.1 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.19 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	**21.9 mW / g ± 17.6 % (k=2)**

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.2 ± 6 %	6.28 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm^3 (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.42 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	**74.3 mW / g ± 18.1 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.06 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	**20.6 mW / g ± 17.6 % (k=2)**

Appendix

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	49.6 Ω - 8.0 jΩ
Return Loss	- 21.9 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	51.5 Ω - 3.8 jΩ
Return Loss	- 27.8 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	52.4 Ω - 3.9 jΩ
Return Loss	- 27.0 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	50.6 Ω - 5.7 jΩ
Return Loss	- 24.9 dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	49.9 Ω - 2.7 jΩ
Return Loss	- 31.4 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	48.1 Ω - 3.3 jΩ
Return Loss	- 28.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.202 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 27, 2006

DASY5 Validation Report for Head TSL

Date: 19.01.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1057

Communication System: CW; Frequency: 5200 MHz, Frequency: 5500 MHz, Frequency: 5800 MHz
Medium parameters used: f = 5200 MHz; σ = 4.6 mho/m; ε_r = 36.3; ρ = 1000 kg/m^3 , Medium parameters used: f = 5500 MHz; σ = 4.9 mho/m; ε_r = 35.8; ρ = 1000 kg/m^3 , Medium parameters used: f = 5800 MHz; σ = 5.22 mho/m; ε_r = 35.3; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.41, 5.41, 5.41), ConvF(4.91, 4.91, 4.91), ConvF(4.81, 4.81, 4.81); Calibrated: 30.12.2011
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 63.590 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 29.4530
SAR(1 g) = 7.9 mW/g; SAR(10 g) = 2.26 mW/g
Maximum value of SAR (measured) = 18.158 mW/g

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 64.129 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 33.6870
SAR(1 g) = 8.49 mW/g; SAR(10 g) = 2.42 mW/g
Maximum value of SAR (measured) = 20.088 mW/g

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 60.728 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 33.3080
SAR(1 g) = 7.95 mW/g; SAR(10 g) = 2.26 mW/g
Maximum value of SAR (measured) = 19.277 mW/g

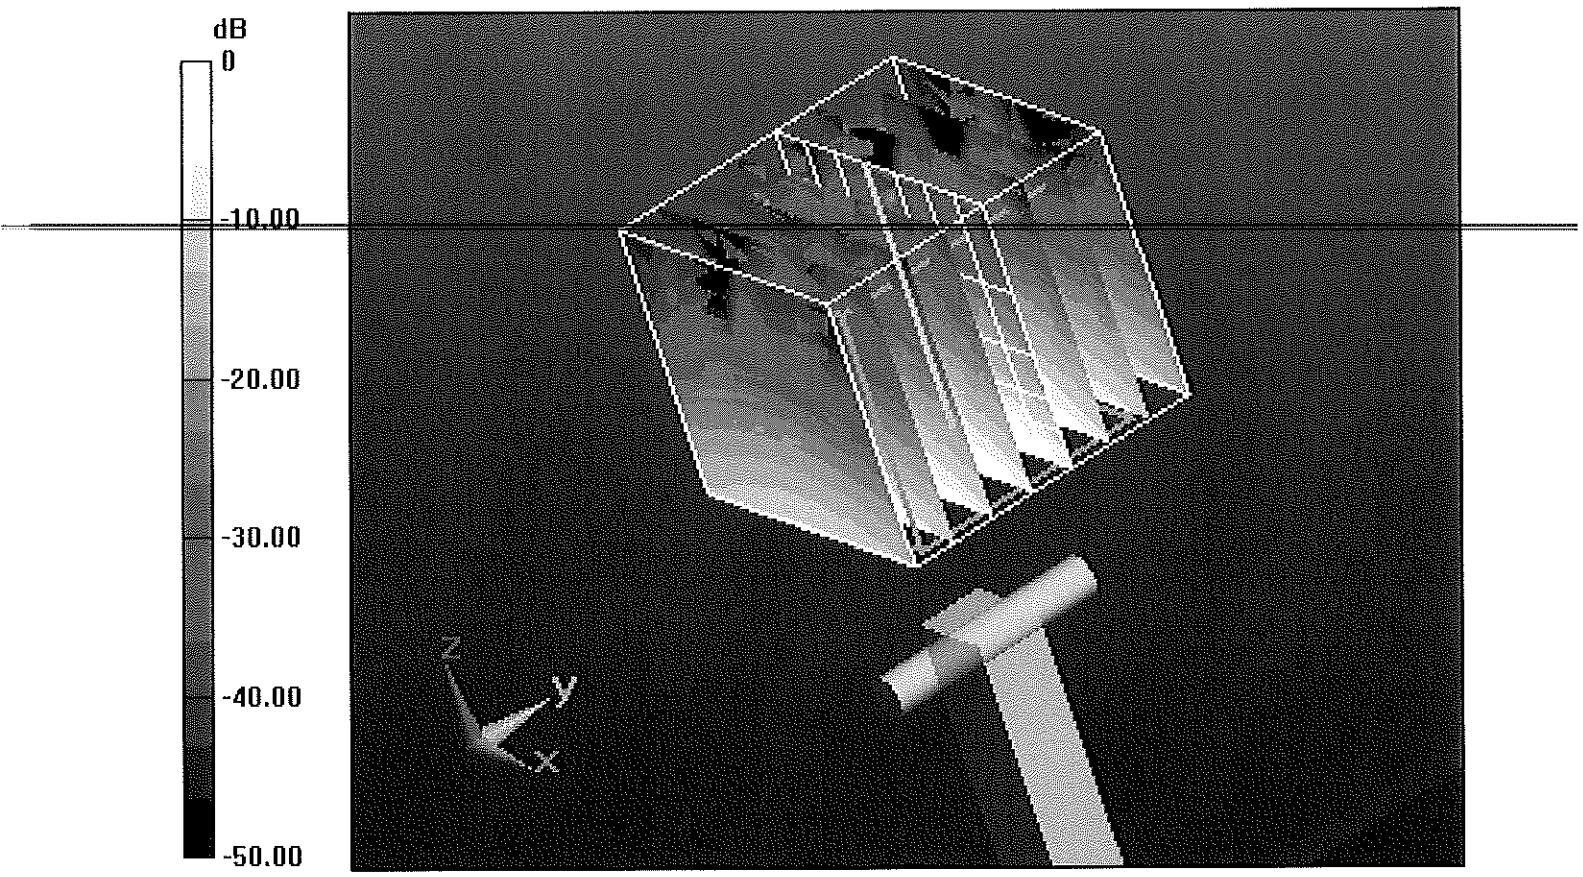

0 dB = 19.280mW/g = 25.70 dB mW/g

Impedance Measurement Plot for Head TSL

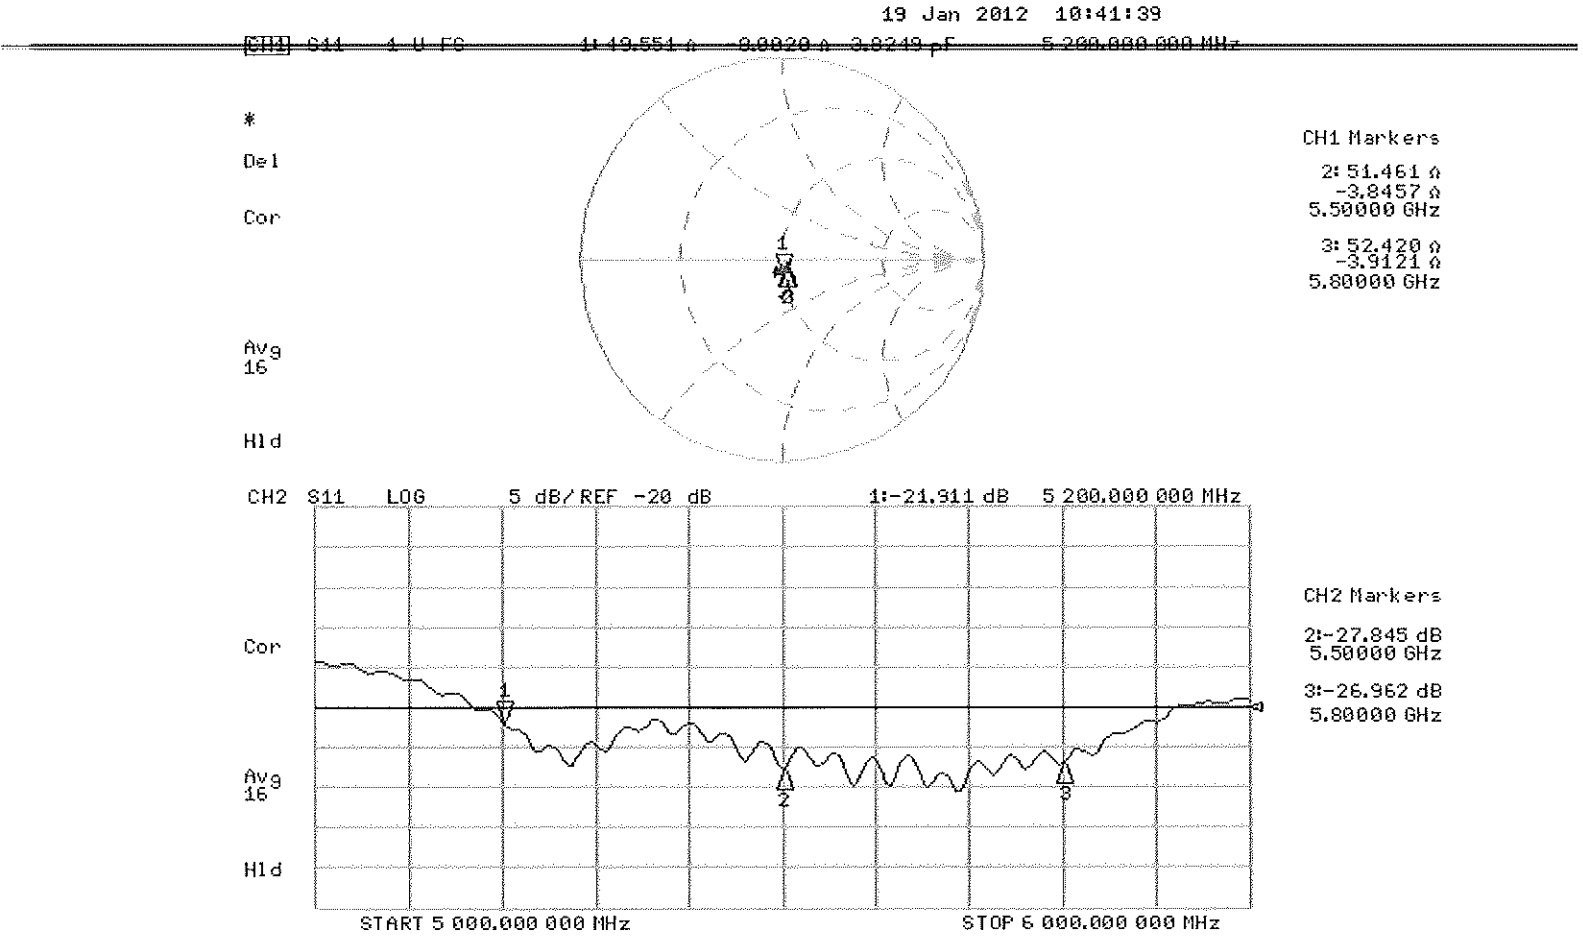

DASY5 Validation Report for Body TSL

Date: 18.01.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1057

Communication System: CW; Frequency: 5200 MHz, Frequency: 5500 MHz, Frequency: 5800 MHz
Medium parameters used: f = 5200 MHz; σ = 5.46 mho/m; ε_r = 49.2; ρ = 1000 kg/m^3 , Medium parameters used: f = 5500 MHz; σ = 5.86 mho/m; ε_r = 48.7; ρ = 1000 kg/m^3 , Medium parameters used: f = 5800 MHz; σ = 6.28 mho/m; ε_r = 48.2; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.91, 4.91, 4.91), ConvF(4.43, 4.43, 4.43), ConvF(4.38, 4.38, 4.38); Calibrated: 30.12.2011
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 57.280 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 28.9110
SAR(1 g) = 7.33 mW/g; SAR(10 g) = 2.05 mW/g
Maximum value of SAR (measured) = 17.276 mW/g

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 57.884 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 33.5680
SAR(1 g) = 7.87 mW/g; SAR(10 g) = 2.19 mW/g
Maximum value of SAR (measured) = 19.055 mW/g

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 54.430 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 34.4850
SAR(1 g) = 7.42 mW/g; SAR(10 g) = 2.06 mW/g
Maximum value of SAR (measured) = 18.495 mW/g

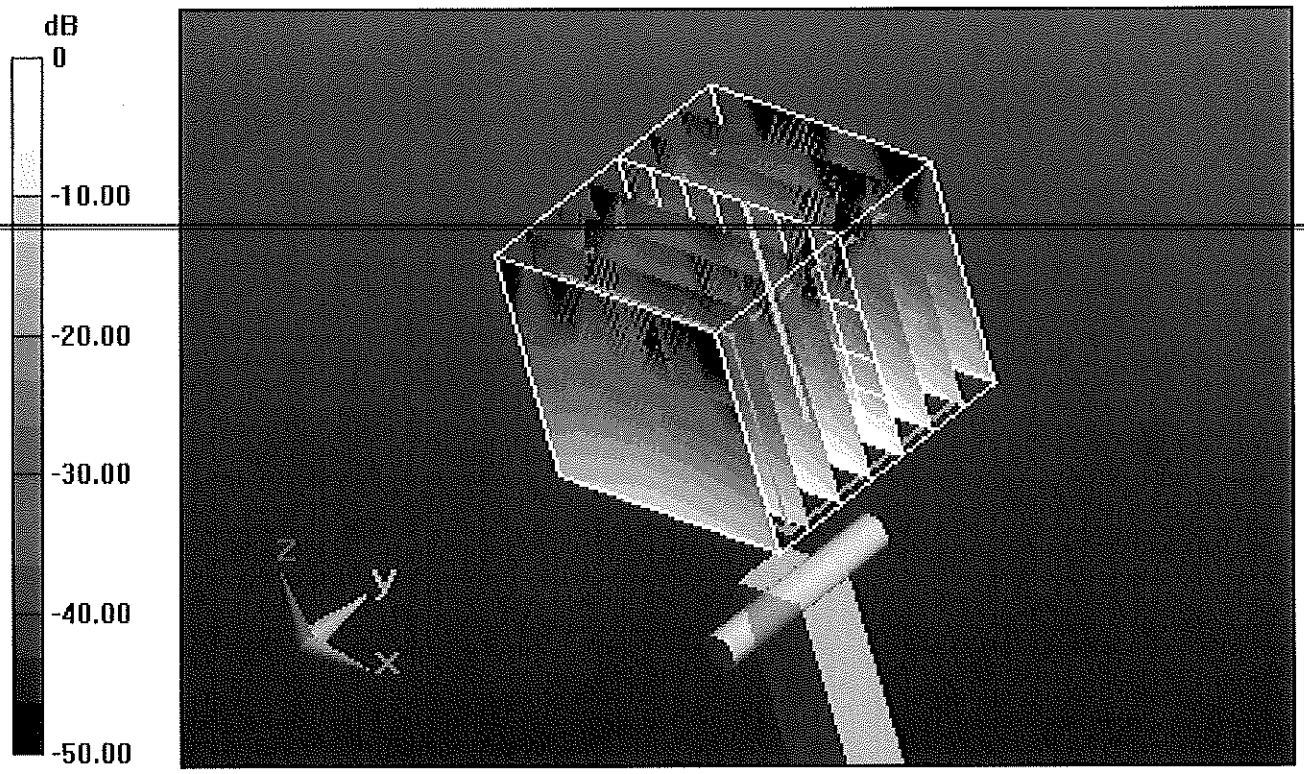

0 dB = 18.500mW/g = 25.34 dB mW/g

Impedance Measurement Plot for Body TSL

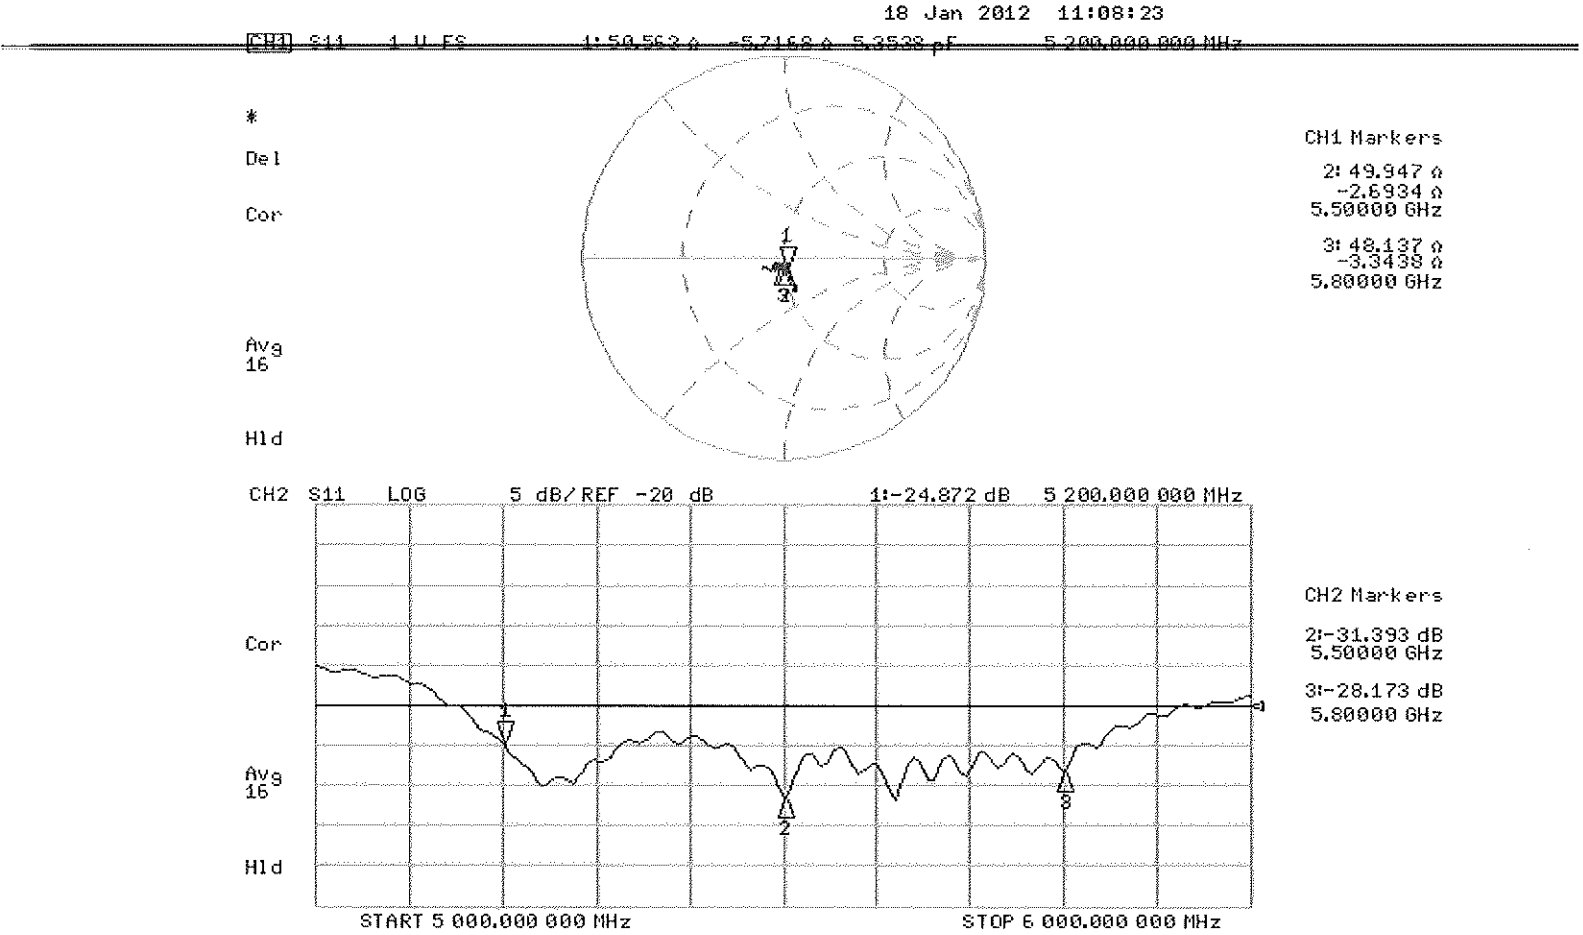

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS) **Accreditation No.: SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client **PC Test** **Certificate No: D835V2-4d047_Jan12**

CALIBRATION CERTIFICATE

Object	D835V2 - SN: 4d047
Calibration procedure(s)	QA CAL-05.v8 Calibration procedure for dipole validation kits above 700 MHz
Calibration date:	January 25, 2012

✓ KOK 2/6/12

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	05-Oct-11 (No. 217-01451)	Oct-12
Power sensor HP 8481A	US37292783	05-Oct-11 (No. 217-01451)	Oct-12
Reference 20 dB Attenuator	SN: 5086 (20g)	29-Mar-11 (No. 217-01368)	Apr-12
Type-N mismatch combination	SN: 5047.2 / 06327	29-Mar-11 (No. 217-01371)	Apr-12
Reference Probe ES3DV3	SN: 3205	30-Dec-11 (No. ES3-3205_Dec11)	Dec-12
DAE4	SN: 601	04-Jul-11 (No. DAE4-601_Jul11)	Jul-12

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

	Name	Function	Signature
Calibrated by:	Israe El-Naouq	Laboratory Technician	Israe El-Naouq
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 25, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	**Permittivity**	**Conductivity**
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.8 ± 6 %	0.89 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm^3 (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.33 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	**9.41 mW /g ± 17.0 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.53 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	**6.17 mW /g ± 16.5 % (k=2)**

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	**Permittivity**	**Conductivity**
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.3 ± 6 %	0.98 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm^3 (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.39 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	**9.41 mW / g ± 17.0 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.57 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	**6.21 mW / g ± 16.5 % (k=2)**

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.7 Ω - 3.0 jΩ
Return Loss	- 29.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.8 Ω - 5.0 jΩ
Return Loss	- 25.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.386 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 16, 2006