

Mode	Channel	Channel Frequency (MHz)	Data Rate (Mbps)	Attenuator + Cable offset (dB)	Average power Result (dBm)	Peak Power Result (dBm)
OFDM (802.11n_HT20)	Low	5 745	MCS0	21.35	12.56	23.49
			MCS1		12.23	23.44
			MCS2		12.10	23.40
			MCS3		11.78	23.39
			MCS4		11.46	23.41
			MCS5		11.21	23.40
			MCS6		11.00	23.33
			MCS7		10.95	23.37
	Middle	5 785	MCS0	21.43	12.75	23.68
			MCS1		12.36	23.56
			MCS2		12.21	23.55
			MCS3		11.99	23.43
			MCS4		11.85	23.47
			MCS5		11.43	23.52
			MCS6		11.25	23.51
			MCS7		11.10	23.50
	High	5 825	MCS0	21.43	12.71	23.44
			MCS1		12.60	23.38
			MCS2		12.53	23.22
			MCS3		12.22	23.18
			MCS4		11.93	23.15
			MCS5		11.74	23.22
			MCS6		11.43	23.33
			MCS7		11.07	23.27


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Mode	Channel	Channel Frequency (MHz)	Data Rate (Mbps)	Attenuator + Cable offset (dB)	Average power Result (dB m)	Peak Power Result (dB m)
OFDM (802.11n_HT40)	Low	5 755	MCS0	21.37	10.62	22.56
			MCS1		10.23	22.43
			MCS2		10.11	22.51
			MCS3		9.74	22.43
			MCS4		9.41	22.41
			MCS5		9.11	22.23
			MCS6		8.88	22.25
			MCS7		8.24	22.29
	High	5 795	MCS0	21.43	10.67	22.64
			MCS1		10.56	22.45
			MCS2		10.23	22.44
			MCS3		9.65	22.31
			MCS4		9.23	22.35
			MCS5		9.11	22.37
			MCS6		8.56	22.38
			MCS7		8.33	22.34

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5. Power Spectral Density Measurement

5.1. Test Setup



5.2. Limit

§15.247(e) For digitally modulated system, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.3. Test Procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

The measurements are recorded using the AVGPDS measurement procedure in section 5.3 of KDB 558074.

1. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
2. Set the analyzer span to 5 – 30 % greater than the EBW.
3. Set the RBW = 100 kHz
4. Set the VBW $\geq$ 300 kHz
5. Detector = power average (RMS).
6. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
7. Manually set the sweep time to : $\geq 10 \times (\text{number of measurement points in sweep}) \times (\text{transmission symbol period})$. (symbol period: 11b/g = 4 μ s, 11n_HT20, 40 = 3.6 μ s)
8. Perform the measurement over a single sweep.
9. Use the peak marker function to determine the maximum level in any 100 kHz band segment within the fundamental EBW.
10. Scale the observed power level to an equivalent level in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where : $\text{BWCF} = 10\log(3 \text{ kHz}/100 \text{ kHz}) = -15.2 \text{ dB}$.
11. The resulting PSD level must be $\leq 8 \text{ dBm}$.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5.4. Test Results

Ambient temperature : (24 ± 2) °C
Relative humidity : 47 % R.H.

Operation Mode	Data Rate (Mbps)	Channel	Frequency	Measured PSD (dB m)	Bandwidth Correction Factor (dB)	Corrected PSD (dB m)	Maximum Limit (dB m)
DSSS (802.11b)	1	Low	2 412 MHz	-0.295	-15.2	-15.495	8
		Middle	2 437 MHz	-0.041	-15.2	-15.241	8
		High	2 462 MHz	0.421	-15.2	-14.779	8
OFDM (802.11g)	6	Low	2 412 MHz	-8.381	-15.2	-23.581	8
		Middle	2 437 MHz	-8.122	-15.2	-23.322	8
		High	2 462 MHz	-7.897	-15.2	-23.097	8
OFDM (802.11n_HT20)	MCS0	Low	2 412 MHz	-9.525	-15.2	-24.725	8
		Middle	2 437 MHz	-9.028	-15.2	-24.228	8
		High	2 462 MHz	-8.971	-15.2	-24.171	8
OFDM (802.11a)	6	Low	5 745 MHz	-3.394	-15.2	-18.594	8
		Middle	5 785 MHz	-3.223	-15.2	-18.423	8
		High	5 805 MHz	-3.209	-15.2	-18.409	8
OFDM (802.11n_HT20)	MCS0	Low	5 745 MHz	-4.485	-15.2	-19.685	8
		Middle	5 785 MHz	-4.385	-15.2	-19.585	8
		High	5 805 MHz	-4.513	-15.2	-19.713	8
OFDM (802.11n_HT40)	MCS0	Low	5 755 MHz	-10.927	-15.2	-26.127	8
		High	5 795 MHz	-11.013	-15.2	-26.213	8

Note;

Corrected Power Spectral Density (dB m) = Measured Power Spectral Density (dB m) + Bandwidth Correction Factor (dB)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

DSSS : 802.11b Low Channel



Middle Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel



OFDM : 802.11g

Low Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel




High Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11n_HT20

Low Channel

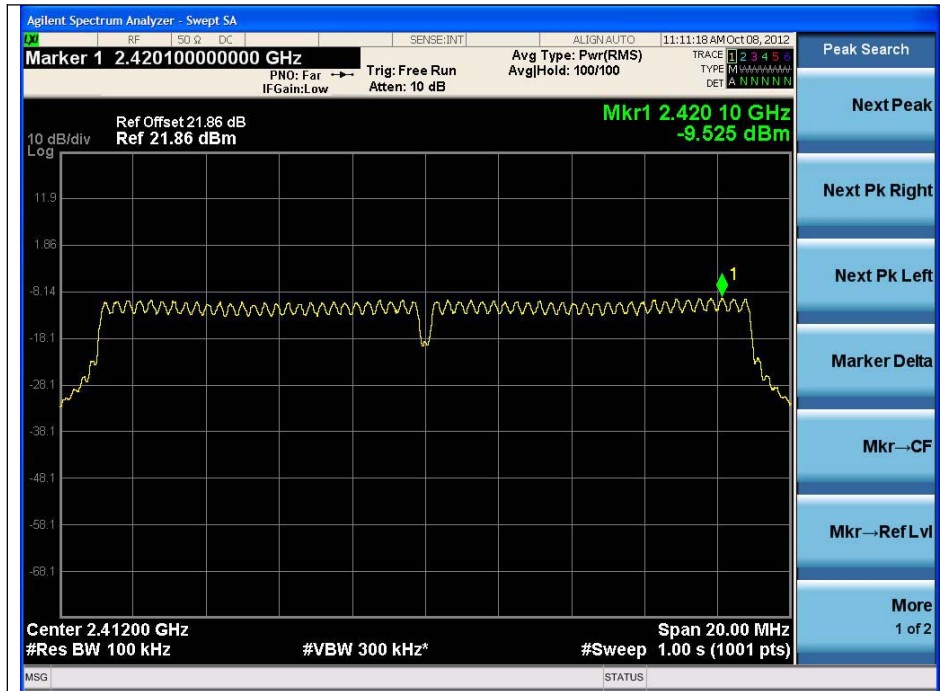

Middle Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel




OFDM : 802.11a

Low Channel




The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

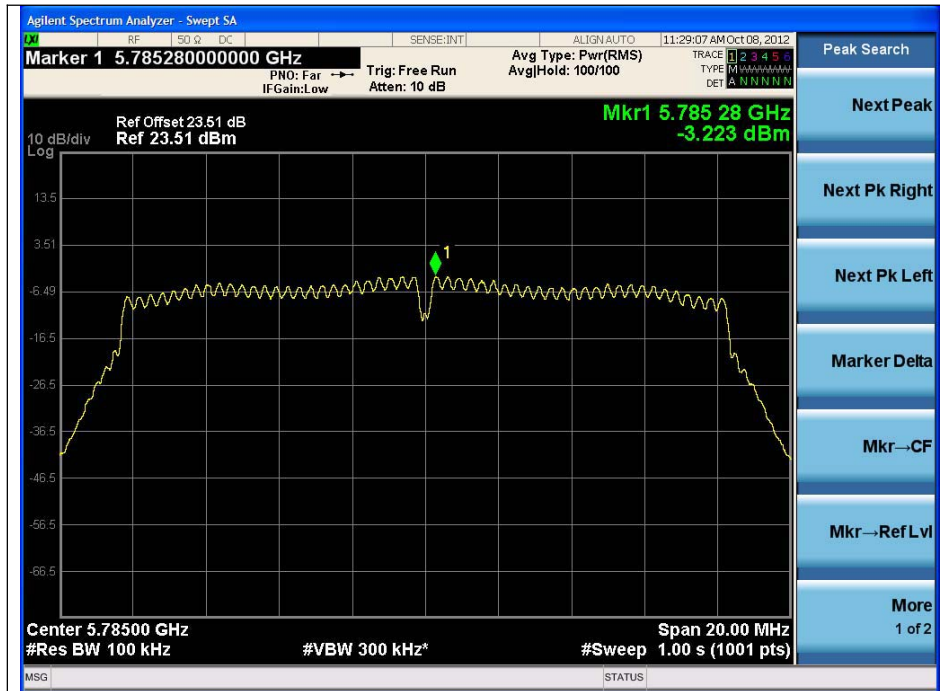


High Channel

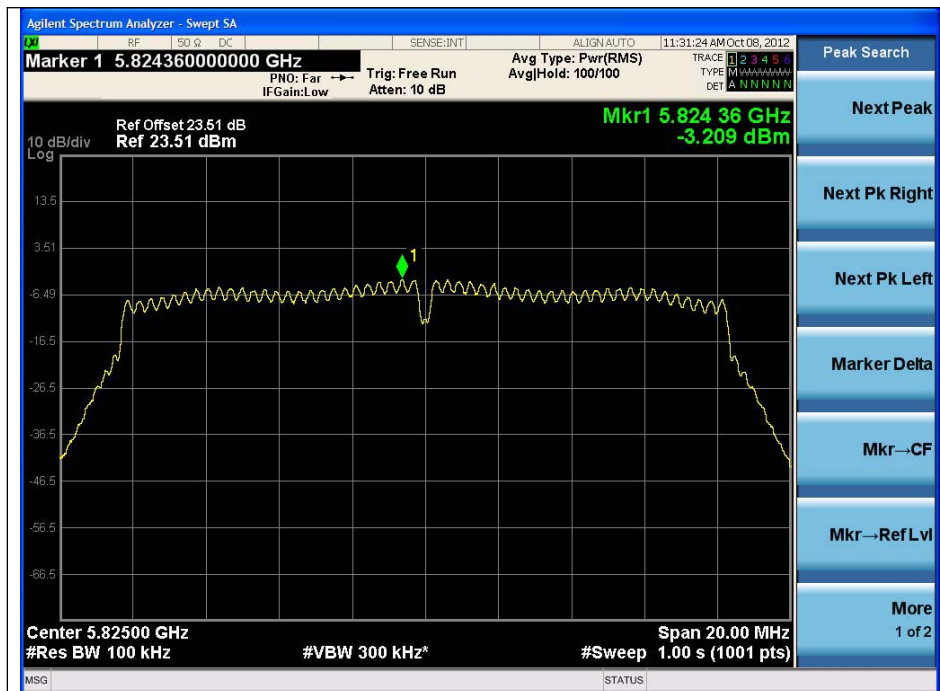

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11n_HT20

Low Channel

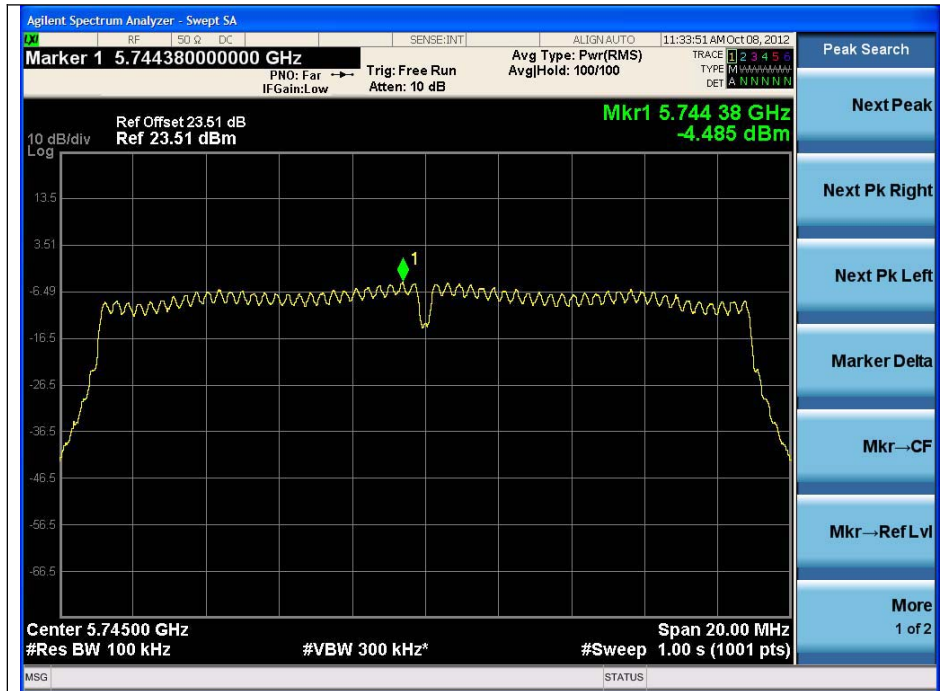

Middle Channel




The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel




OFDM : 802.11n_HT40

Low Channel

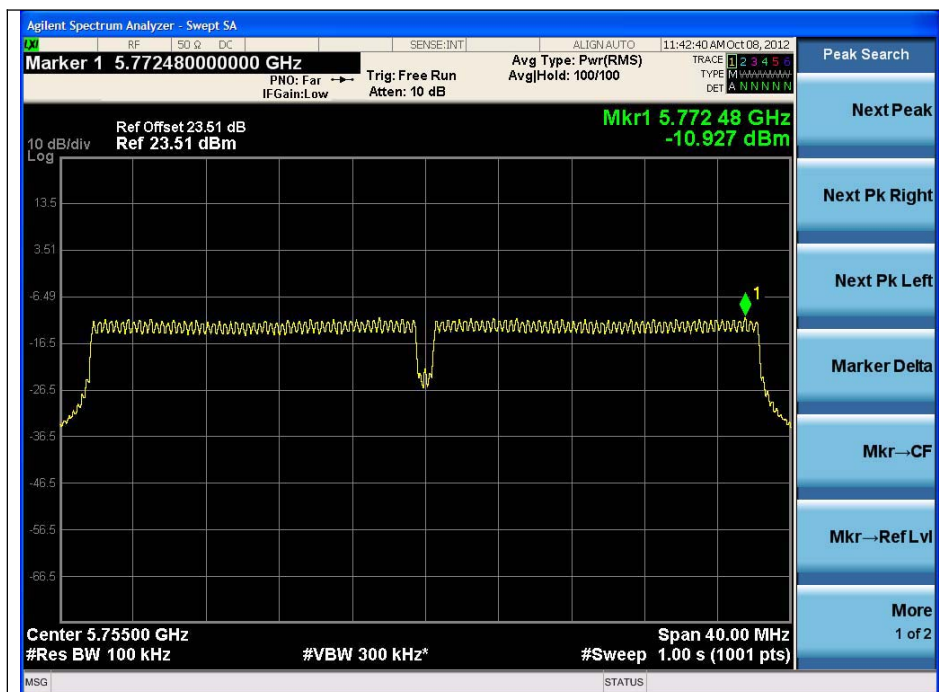

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel

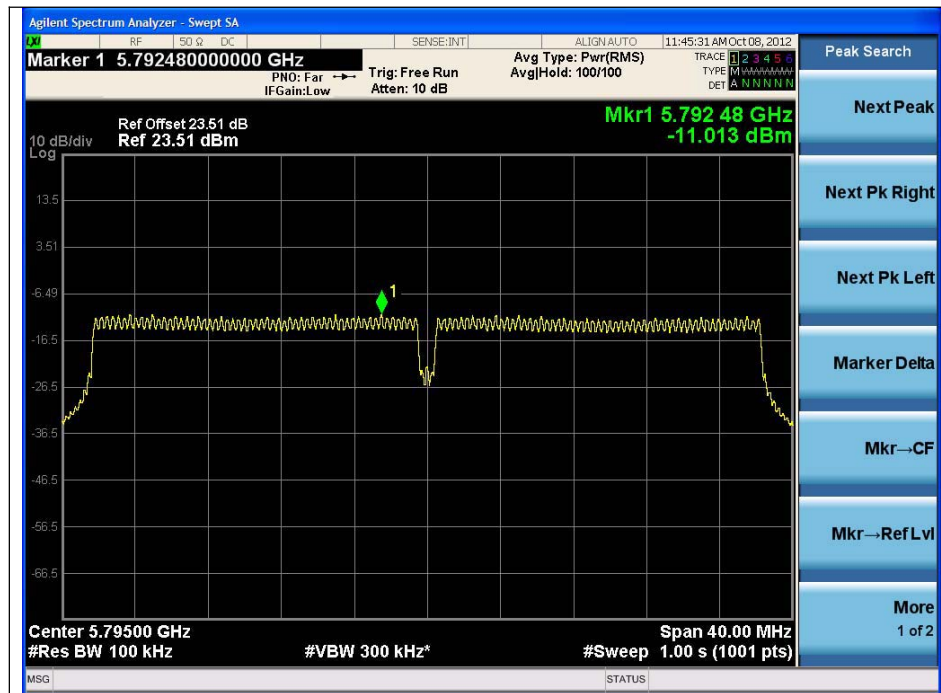

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6. Transmitter AC Power Line Conducted Emission

6.1. Test Setup

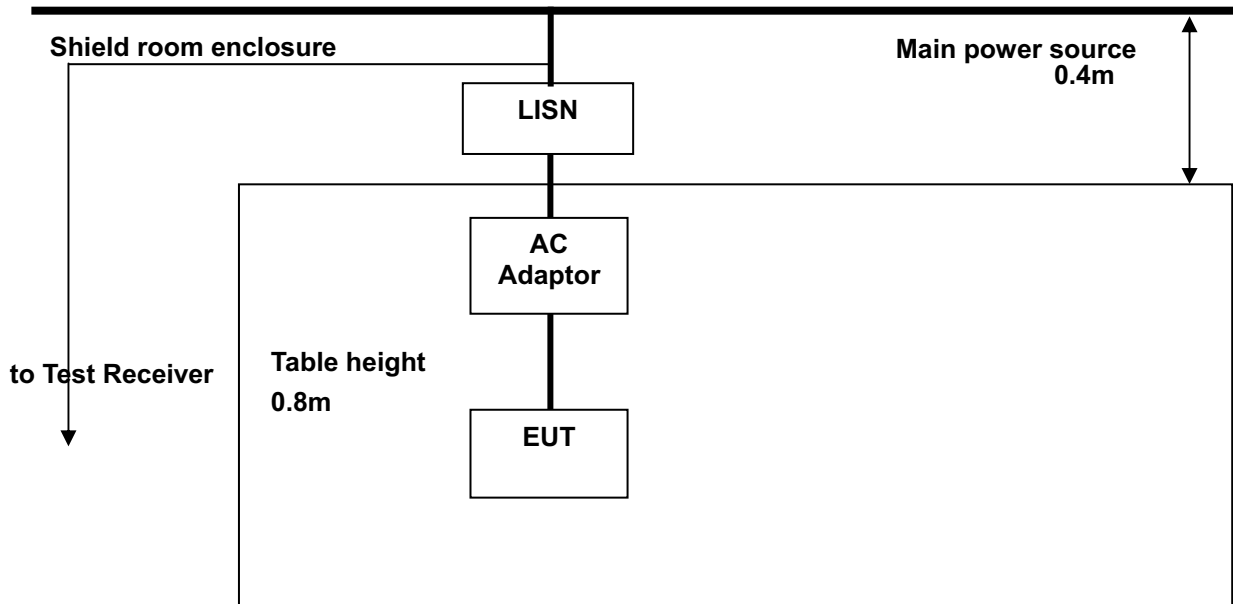

6.2. Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

* Decreases with the logarithm of the frequency.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.3. Test Procedures

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

AC line conducted emissions from the EUT were measured according to the dictates of ANSI C63.4-2003

1. The test procedure is performed in a 6.5m × 3.6m × 3.6m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m(W) × 1.5 m(L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. The excess power cable between the EUT and the LISN was bundled. All connecting cables of EUT were moved to find the maximum emission.

6.4. Test Results (Worst case configuration_11a mode, 6Mbps, Middle channel)

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Ambient temperature : (24 ± 2) °C

Relative humidity : 47 % R.H.

Frequency range : 0.15 MHz – 30 MHz

Measured Bandwidth : 9 kHz

FREQ. (MHz)	LEVEL(dB μ V)		LINE	LIMIT(dB μ V)		MARGIN(dB)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.15	31.57	15.47	H	66.00	56.00	34.43	40.53
0.18	32.72	15.72	H	64.72	54.72	32.00	39.00
0.61	26.37	17.07	H	56.00	46.00	29.63	28.93
3.56	32.88	23.28	H	56.00	46.00	23.12	22.72
8.35	34.78	24.68	H	60.00	50.00	25.22	25.32
12.81	31.54	22.54	H	60.00	50.00	28.46	27.46
0.15	42.45	25.15	N	66.00	56.00	23.55	30.85
0.18	32.70	15.60	N	64.72	54.72	32.02	39.12
3.24	26.65	18.25	N	56.00	46.00	29.35	27.75
7.84	32.29	22.89	N	60.00	50.00	27.71	27.11
13.07	23.85	18.75	N	60.00	50.00	36.15	31.25
25.13	24.55	15.15	N	60.00	50.00	35.45	34.85


Note ;

- Line (H): Hot, Line (N): Neutral
- All modes of operation were investigated and the worst-case emissions are reported using 11g_6 Mbps.
- The limit for Class B device(s) from 150 kHz to 30 MHz are specified in Section of the Title 47 CFR.
- Traces shown in plot mad using a peak detector and average detector
- Deviations to the Specifications: None.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


Plots of Conducted Power line

Test mode : (Hot)

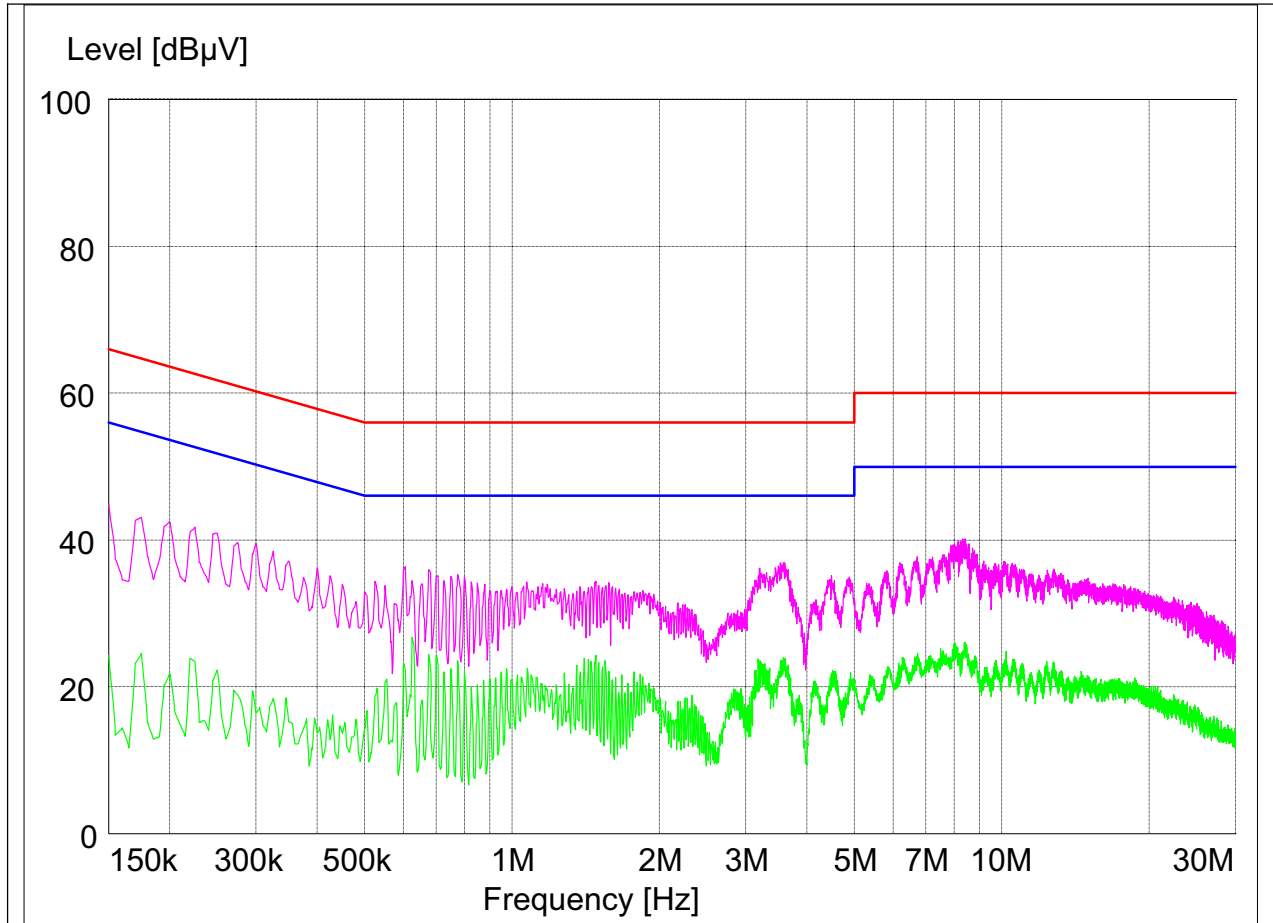

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Test mode : (Neutral)

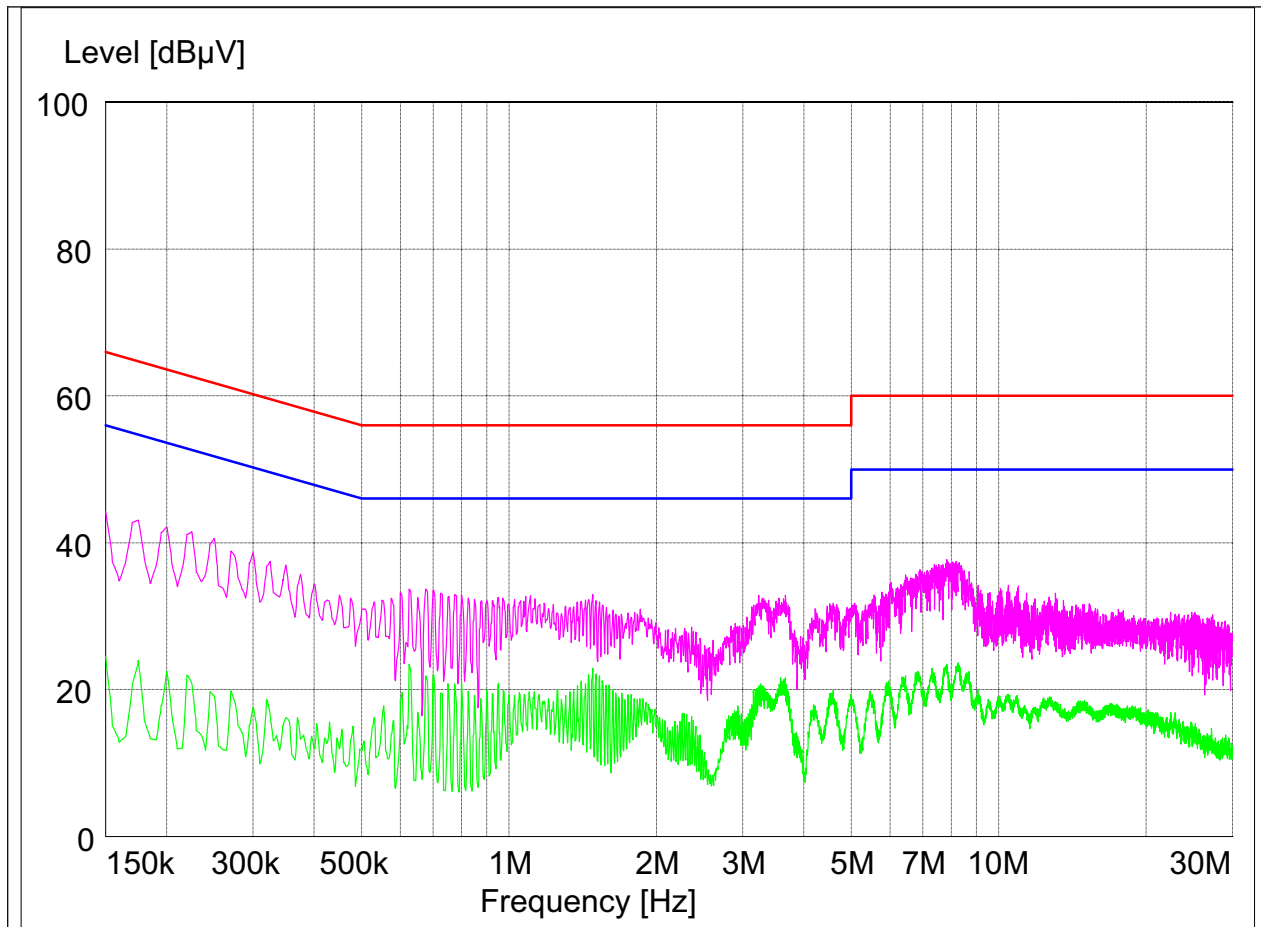

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

7. Antenna Requirement

7.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the gain of the antenna exceeds 6 dBi.

7.2. Antenna Connected Construction

The antenna used of this product is the internal antenna and peak max gain of each antenna as below.

2 412 MHz ~ 2 472 MHz	5 180 MHz ~ 5 320 MHz	5 500 MHz ~ 5 700 MHz	5 745 MHz ~ 5 805 MHz
0.37 dBi	2.83 dBi	1.95 dBi	1.95 dBi

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.