



## HCT CO., LTD.

### CERTIFICATE OF COMPLIANCE

#### FCC Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Address:**  
416, Maetan 3-dong, Yeongtong-gu, Suwon-si,  
Gyeonggi-do 443-742, Korea

**Date of Issue:**

March 06, 2012

**Test Site/Location:**

HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon,  
Icheon-si, Kyunggi-Do, Korea

**Report No.:** HCTR1202FR18-1

**HCT FRN:** 0005866421

**FCC ID : A3LGTS5300**

**APPLICANT : SAMSUNG Electronics Co., Ltd.**

**FCC Model(s):** GT-S5300

**EUT Type:** 850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx Only

**Max. RF Output Power:** Wi-Fi 802.11b(23.02 dBm) / Wi-Fi 802.11g (22.83 dBm)  
/ Wi-Fi 802.11n (20.79 dBm)

**Frequency Range:** 2412 MHz -2462 MHz

**Modulation type** CCK/DSSS/OFDM

**FCC Classification:** Digital Transmission System(DTS)

**FCC Rule Part(s):** Part 15.247

#### Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

**Report prepared by**

**: Jong Seok Lee**

**Test engineer of RF Team**

**Approved by**

**: Sang Jun Lee**

**Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

|                                   |                                  |                                                                            |                       |                                                  |
|-----------------------------------|----------------------------------|----------------------------------------------------------------------------|-----------------------|--------------------------------------------------|
| FCC PT.15.247<br>TEST REPORT      | FCC CERTIFICATION REPORT         |                                                                            |                       | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCTR1202FR18-1 | Date of Issue:<br>March 06, 2012 | EUT Type:<br>850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx Only | FCC ID:<br>A3LGTS5300 |                                                  |

# Version

| TEST REPORT NO. | DATE              | DESCRIPTION                                                        |
|-----------------|-------------------|--------------------------------------------------------------------|
| HCTR1202FR18    | February 23, 2012 | - First Approval Report                                            |
| HCTR1202FR18-1  | March 06, 2012    | -Insert worst case information of conducted emission (Section 8.6) |
|                 |                   |                                                                    |
|                 |                   |                                                                    |

# Table of Contents

|                                                                              |       |
|------------------------------------------------------------------------------|-------|
| 1. GENERAL INFORMATION .....                                                 | 4     |
| 2. EUT DESCRIPTION .....                                                     | 4     |
| 3. TEST METHODOLOGY .....                                                    | 5     |
| 3.1 EUT CONFIGURATION .....                                                  | 5     |
| 3.2 EUT EXERCISE .....                                                       | 5     |
| 3.3 GENERAL TEST PROCEDURES .....                                            | 5     |
| 3.4 DESCRIPTION OF TEST MODES .....                                          | 5     |
| 4. INSTRUMENT CALIBRATION.....                                               | 6     |
| 5. FACILITIES AND ACCREDITATIONS .....                                       | 6     |
| 5.1 FACILITIES .....                                                         | 6     |
| 5.2 EQUIPMENT .....                                                          | 6     |
| 6. ANTENNA REQUIREMENTS .....                                                | 7     |
| 7. SUMMARY TEST OF RESULTS .....                                             | 8     |
| 8. TEST RESULT .....                                                         | 9     |
| 8.1 6dB BANDWIDTH MEASUREMENT (802.11b/g/n).....                             | 9     |
| 8.2 OUTPUT POWER MEASUREMENT (802.11b/g/n).....                              | 1 6   |
| 8.3 POWER SPECTRAL DENSITY (802.11b/g/n).....                                | 8 3   |
| 8.4 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS ... | 9 0   |
| 8.5 RADIATED MEASUREMENT.....                                                | 1 0 4 |
| 8.5.1 RADIATED SPURIOUS EMISSIONS.....                                       | 1 0 4 |
| 8.5.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS .....                       | 1 1 2 |
| 8.6 POWERLINE CONDUCTED EMISSIONS .....                                      | 1 1 3 |
| 9. LIST OF TEST EQUIPMENT .....                                              | 1 1 8 |

|                                   |                                  |                                                                            |                                                  |
|-----------------------------------|----------------------------------|----------------------------------------------------------------------------|--------------------------------------------------|
| FCC PT.15.247<br>TEST REPORT      | FCC CERTIFICATION REPORT         |                                                                            | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCTR1202FR18-1 | Date of Issue:<br>March 06, 2012 | EUT Type:<br>850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx Only | FCC ID:<br>A3LGT5300                             |

## 1. GENERAL INFORMATION

**Applicant:** SAMSUNG Electronics Co., Ltd.  
**Address:** 416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-742, Korea  
**FCC ID:** A3LGTS5300  
**EUT Type:** 850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx Only  
**Model name(s):** GT-S5300  
**Date(s) of Tests:** February 20, 2012~ February 21, 2012  
**Contact Person:** Name: Sung Ryunl Kim  
Phone #: +82-31-301-5879  
  
**Place of Tests:** HCT Co., Ltd.  
105-1, Jangam-ri , Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, KOREA.  
(IC Recognition No. : 5944A-3)

## 2. EUT DESCRIPTION

|                              |                                                                         |                                                                                     |
|------------------------------|-------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>EUT Type</b>              | 850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx Only           |                                                                                     |
| <b>FCC Model Name</b>        | GT-S5300                                                                |                                                                                     |
| <b>Version</b>               | Hardware : REV1.1/ Software : S5300.002                                 |                                                                                     |
| <b>Power Supply</b>          | DC 3.7 V                                                                |                                                                                     |
| <b>Battery type</b>          | Li-ion Battery(Standard)                                                |                                                                                     |
| <b>Frequency Range</b>       | TX: 2412 MHz ~ 2462 MHz<br>RX: 2412 MHz ~ 2462 MHz                      |                                                                                     |
| <b>Max. RF Output Power</b>  | Peak                                                                    | Wi-Fi 802.11b(23.02 dBm) / Wi-Fi 802.11g (22.83 dBm)<br>/ Wi-Fi 802.11n (20.79 dBm) |
|                              | Average                                                                 | Wi-Fi 802.11b(16.37 dBm) / Wi-Fi 802.11g (14.19 dBm)<br>/ Wi-Fi 802.11n (12.05 dBm) |
| <b>Modulation Type</b>       | DSSS/CCK(802.11b), OFDM(802.11g, 802.11n)                               |                                                                                     |
| <b>Antenna Specification</b> | Manufacturer: DAP<br>Antenna type: CAP Antenna<br>Peak Gain : -0.39 dBi |                                                                                     |

### 3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz(ANSI C63.4-2003)

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### 3.3 GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

#### 3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

|                                          |                                         |                                                                                   |                                                  |
|------------------------------------------|-----------------------------------------|-----------------------------------------------------------------------------------|--------------------------------------------------|
| <b>FCC PT.15.247<br/>TEST REPORT</b>     | <b>FCC CERTIFICATION REPORT</b>         |                                                                                   | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| <b>Test Report No.</b><br>HCTR1202FR18-1 | <b>Date of Issue:</b><br>March 06, 2012 | <b>EUT Type:</b><br>850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx Only | <b>FCC ID:</b><br>A3LGT5300                      |

## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

|                                          |                                         |                                                                                   |                                                  |
|------------------------------------------|-----------------------------------------|-----------------------------------------------------------------------------------|--------------------------------------------------|
| <b>FCC PT.15.247<br/>TEST REPORT</b>     | <b>FCC CERTIFICATION REPORT</b>         |                                                                                   | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| <b>Test Report No.</b><br>HCTR1202FR18-1 | <b>Date of Issue:</b><br>March 06, 2012 | <b>EUT Type:</b><br>850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx Only | <b>FCC ID:</b><br>A3LGT5300                      |

## 6. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

\* The antennas of this E.U.T are permanently attached.

\*The E.U.T Complies with the requirement of §15.203

|                                          |                                         |                                                                                   |                                                  |
|------------------------------------------|-----------------------------------------|-----------------------------------------------------------------------------------|--------------------------------------------------|
| <b>FCC PT.15.247<br/>TEST REPORT</b>     | <b>FCC CERTIFICATION REPORT</b>         |                                                                                   | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| <b>Test Report No.</b><br>HCTR1202FR18-1 | <b>Date of Issue:</b><br>March 06, 2012 | <b>EUT Type:</b><br>850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx Only | <b>FCC ID:</b><br>A3LGT5300                      |

## 7. SUMMARY TEST OF RESULTS

| Test Description                    | FCC Part Section(s)        | Test Limit           | Test Condition | Test Result |
|-------------------------------------|----------------------------|----------------------|----------------|-------------|
| 6 dB Bandwidth                      | §15.247(a)(2)              | > 500 kHz            | CONDUCTED      | PASS        |
| Conducted Maximum Peak Output Power | §15.247(b)(3)              | < 1 Watt             |                | PASS        |
| Power Spectral Density              | §15.247(e)                 | < 8 dBm / 3 kHz Band |                | PASS        |
| Band Edge(Out of Band Emissions)    | §15.247(d)                 | Conducted < 20 dBc   |                | PASS        |
| AC Power line Conducted Emissions   | §15.207                    | cf. Section 8.6      |                | PASS        |
| Radiated Spurious Emissions         | §15.205, 15.209            | cf. Section 8.5.1    | RADIATED       | PASS        |
| Radiated Restricted Band Edge       | §15.247(d), 15.205, 15.209 | cf. Section 8.5.2    |                | PASS        |

## 8. TEST RESULT


### 8.1 6dB BANDWIDTH MEASUREMENT (802.11b/g/n)

#### Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

**The minimum permissible 6dB bandwidth is 500 kHz.**

#### ■ TEST CONFIGURATION



#### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

RBW: 430 kHz

VBW: 1.3 MHz

SPAN: 40 MHz

#### ■ TEST RESULTS

Conducted 6dB Bandwidth Measurements for 802.11b

| 802.11b Mode    |             | Measured Bandwidth<br>[MHz] | Minimum Bandwidth<br>[MHz] | Pass / Fail |
|-----------------|-------------|-----------------------------|----------------------------|-------------|
| Frequency [MHz] | Channel No. |                             |                            |             |
| 2412            | 1           | 8.453                       | 0.500                      | Pass        |
| 2437            | 6           | 8.383                       | 0.500                      | Pass        |
| 2462            | 11          | 8.295                       | 0.500                      | Pass        |

Conducted 6dB Bandwidth Measurements for 802.11g


| 802.11g Mode    |             | Measured Bandwidth<br>[MHz] | Minimum Bandwidth<br>[MHz] | Pass / Fail |
|-----------------|-------------|-----------------------------|----------------------------|-------------|
| Frequency [MHz] | Channel No. |                             |                            |             |
| 2412            | 1           | 15.853                      | 0.500                      | Pass        |
| 2437            | 6           | 16.213                      | 0.500                      | Pass        |
| 2462            | 11          | 16.010                      | 0.500                      | Pass        |

Conducted 6dB Bandwidth Measurements for 802.11n


| 802.11n Mode    |                | Measured Bandwidth<br>[MHz] | Minimum Bandwidth<br>[MHz] | Pass / Fail |
|-----------------|----------------|-----------------------------|----------------------------|-------------|
| Frequency [MHz] | Channel<br>No. |                             |                            |             |
| 2412            | 1              | 17.253                      | 0.500                      | Pass        |
| 2437            | 6              | 17.246                      | 0.500                      | Pass        |
| 2462            | 11             | 17.229                      | 0.500                      | Pass        |

■ RESULT PLOTS


6dB Bandwidth plot (802.11b-CH 1)

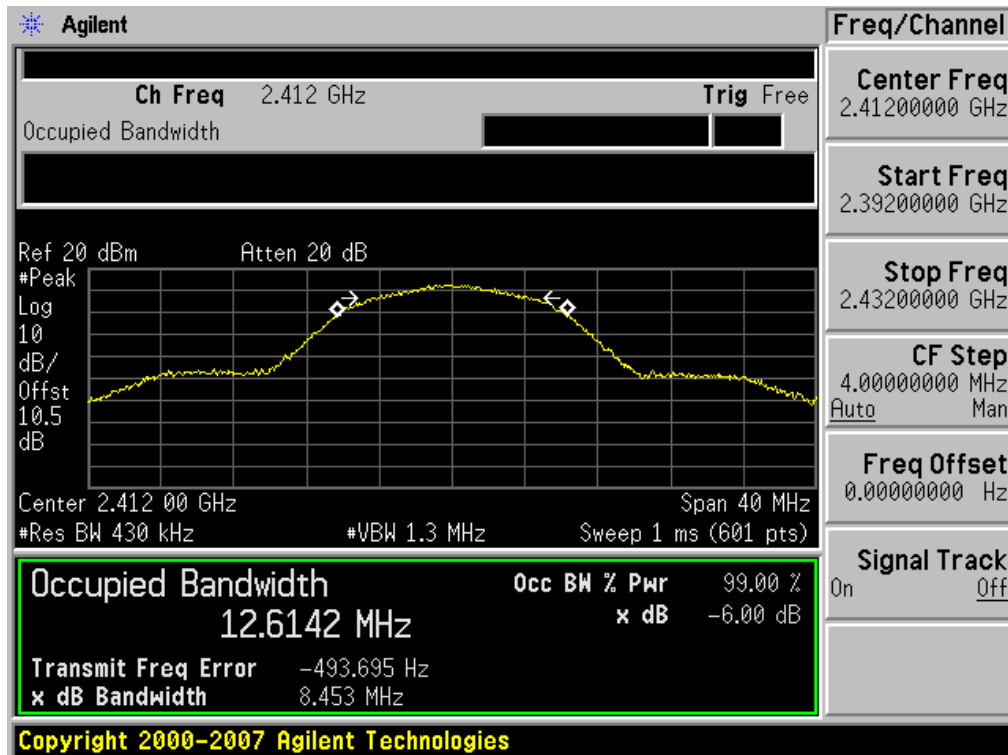


6dB Bandwidth plot (802.11b-CH 6)

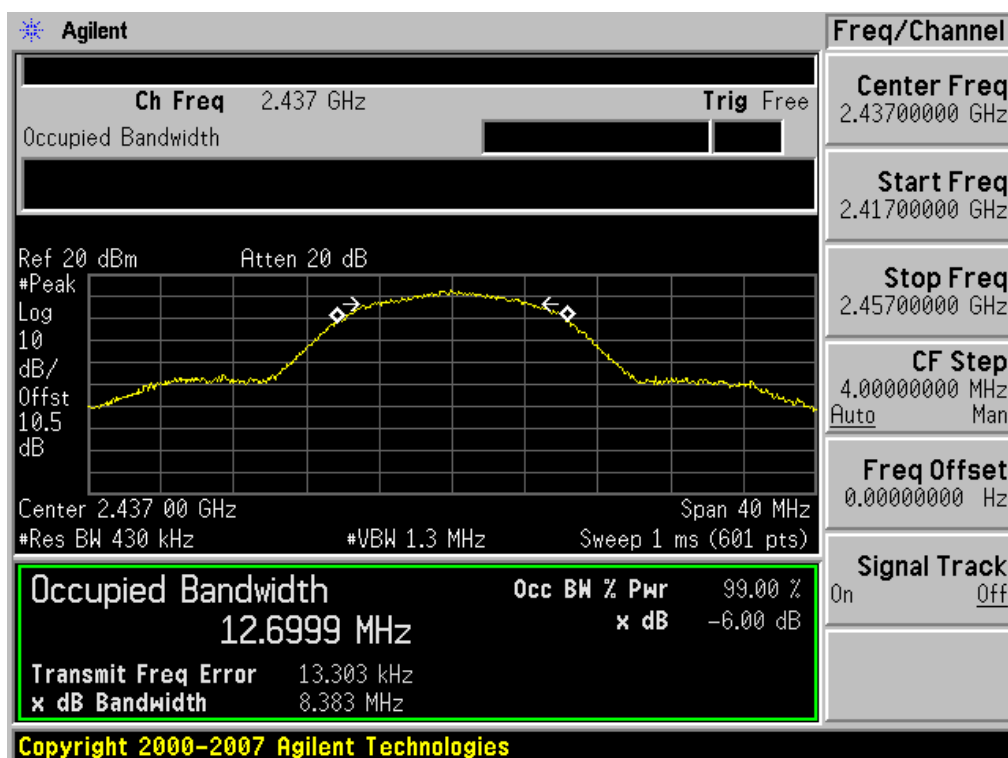


### 6dB Bandwidth plot (802.11b-CH 11)

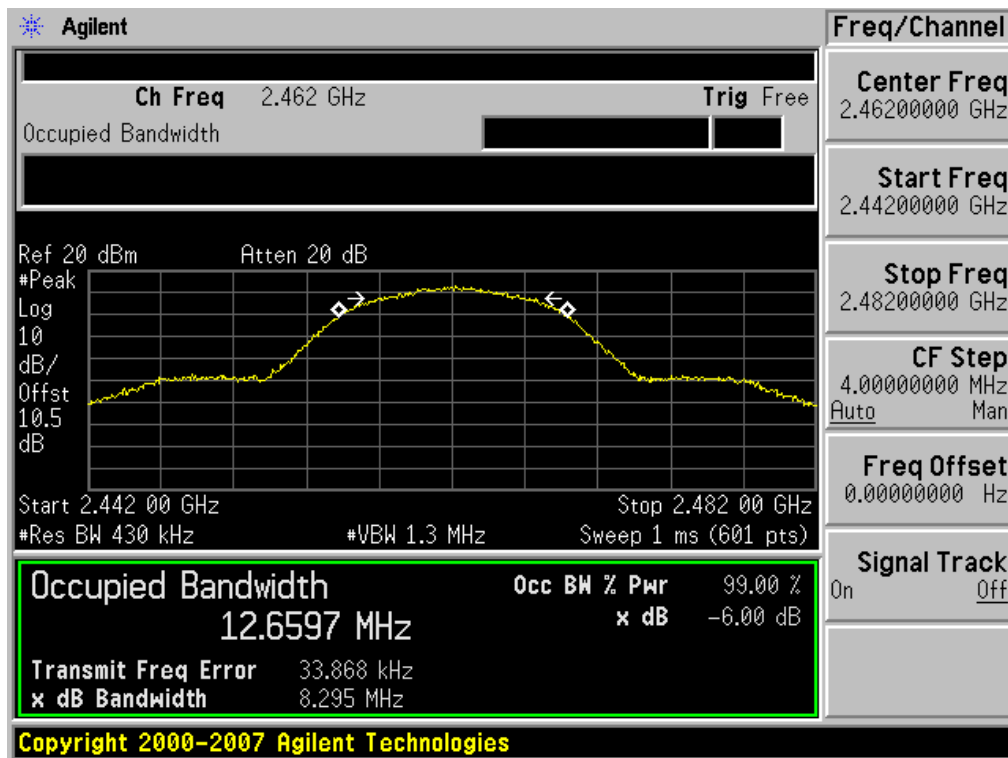


### 6dB Bandwidth plot (802.11g-CH 1)

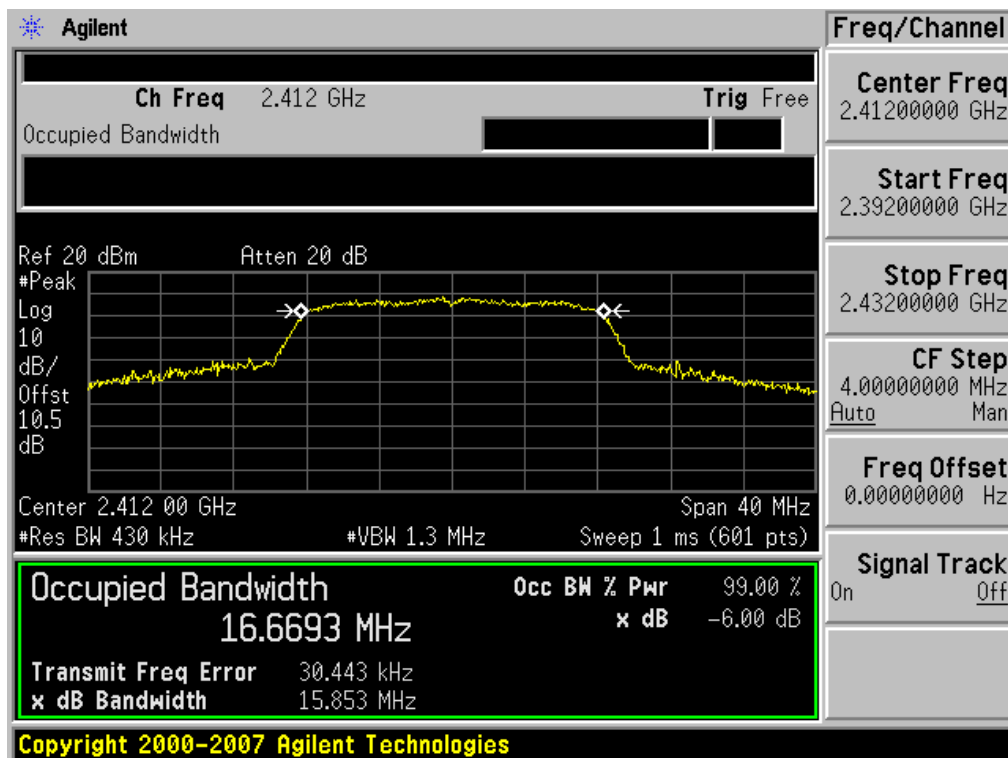


### 6dB Bandwidth plot (802.11g-CH 6)

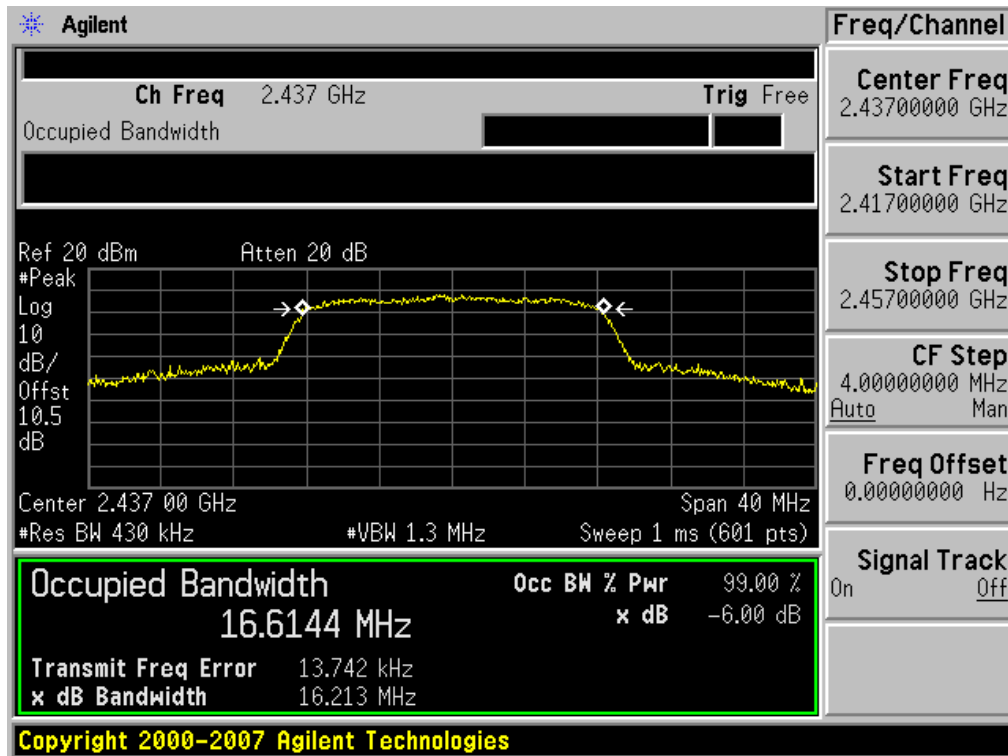


### 6dB Bandwidth plot (802.11g-CH 11)

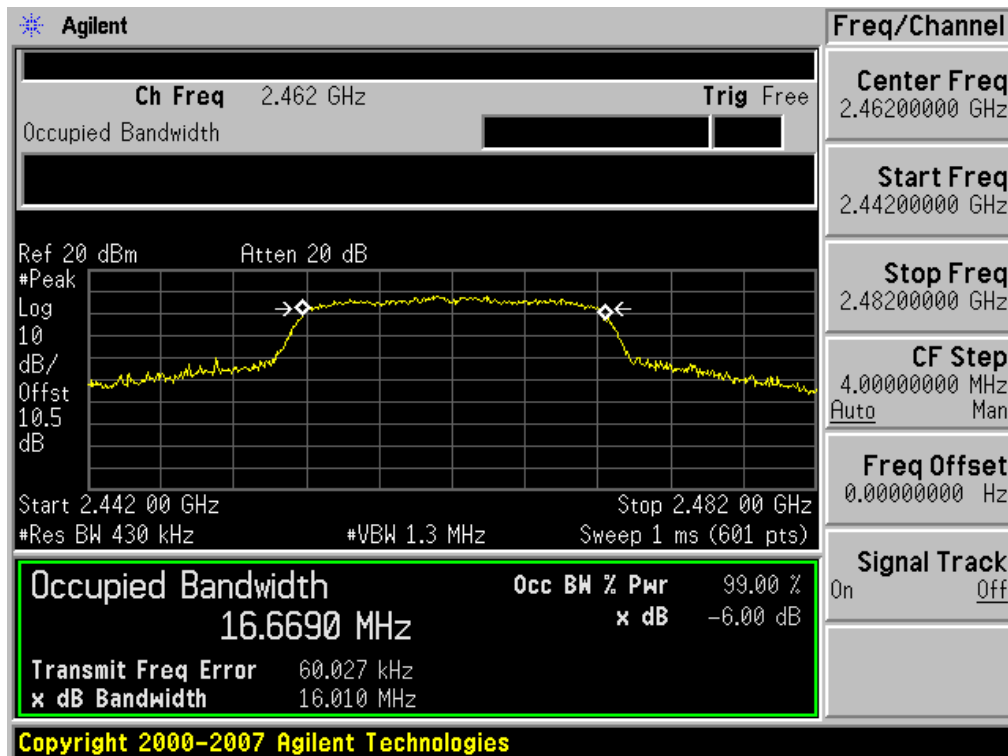


### 6dB Bandwidth plot (802.11n-CH 1)

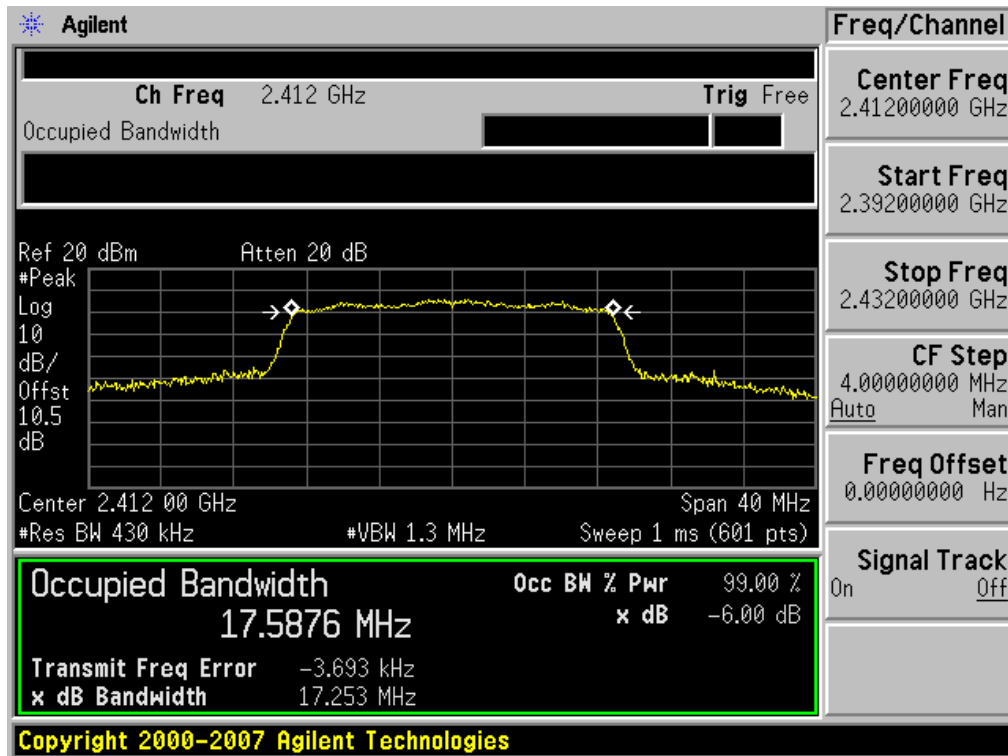

### 6dB Bandwidth plot (802.11n-CH 6)

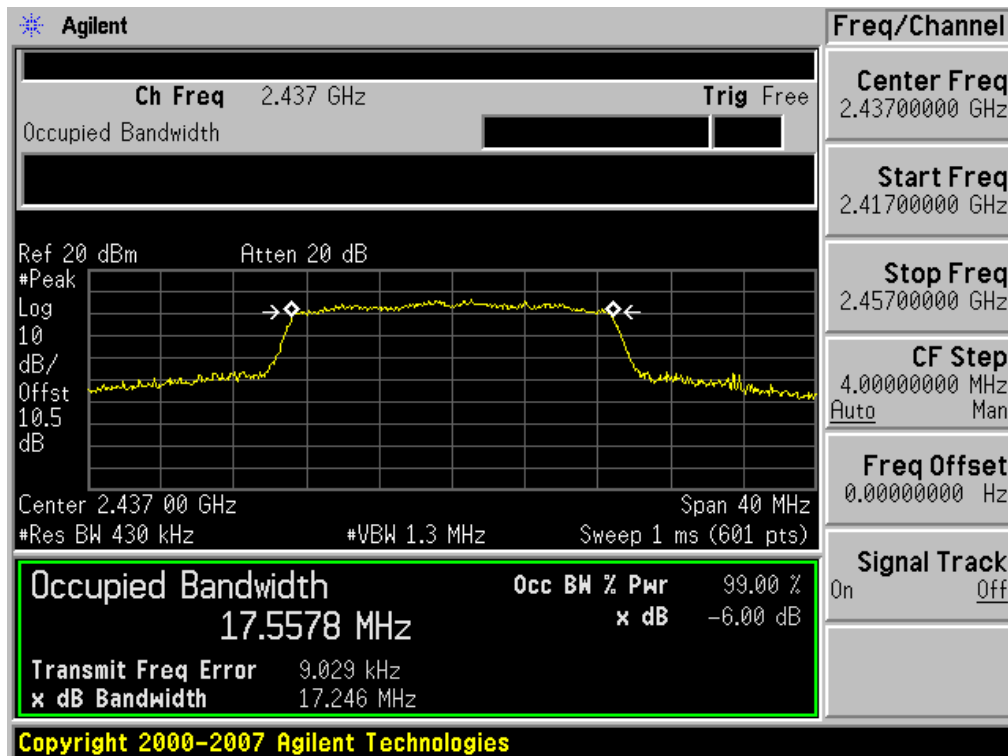

6dB Bandwidth plot (802.11n-CH 11)

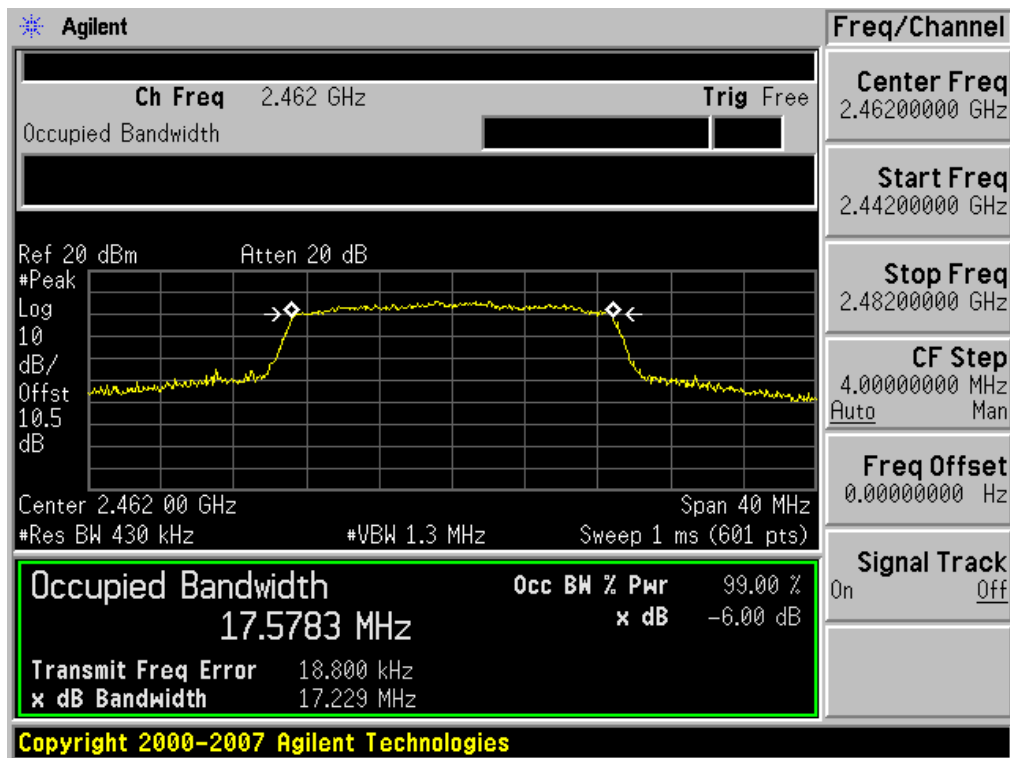

|                                   |                                  |                                                                            |                                                  |
|-----------------------------------|----------------------------------|----------------------------------------------------------------------------|--------------------------------------------------|
| FCC PT.15.247<br>TEST REPORT      | FCC CERTIFICATION REPORT         |                                                                            | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCTR1202FR18-1 | Date of Issue:<br>March 06, 2012 | EUT Type:<br>850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx Only | FCC ID:<br>A3LGT5300                             |


## 8.2 OUTPUT POWER MEASUREMENT (802.11b/g/n)

### Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

**The maximum permissible conducted output power is 1 Watt.**

#### ■ TEST CONFIGURATION



#### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function. We tested according to 718828 DTS Measurement Guidance DR01.

This EUT TX condition is actual operating mode(not near 100 % duty cycle) by WLAN test program.

The Spectrum Analyzer is set to

- Peak Power

RBW = 1 MHz

VBW = 3 MHz

SPAN = 5 – 30 % greater than the EBW

Detector Mode = Peak

Integrated bandwidth = EBW

- Average Power

RBW = 1 MHz

VBW = 3 MHz

SPAN = 5 – 30 % greater than the EBW

Detector Mode = Average

Integrated bandwidth = EBW

#### ■ Sample Calculation

Output Power = Reading Value + ATT loss + Cable loss(1 ea)  
 = 10 dBm + 10 dB + 0.8 dB = 20.8 dBm

Where) Spectrum offset = ATT loss + Cable loss(1 ea)

Note: Power values in plot are applied offset.

|                                   |                                  |                                                                            |                                                  |
|-----------------------------------|----------------------------------|----------------------------------------------------------------------------|--------------------------------------------------|
| FCC PT.15.247<br>TEST REPORT      | FCC CERTIFICATION REPORT         |                                                                            | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCTR1202FR18-1 | Date of Issue:<br>March 06, 2012 | EUT Type:<br>850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx Only | FCC ID:<br>A3LGTS5300                            |

■ TEST RESULTS-Peak

Conducted Output Power Measurements (802.11b Mode)

| 802.11b Mode   |             | Rate<br>(Mbps) | Measured<br>Power(dBm) | Limit<br>(dBm) |
|----------------|-------------|----------------|------------------------|----------------|
| Frequency[MHz] | Channel No. |                |                        |                |
| 2412           | 1           | 1 Mbps         | 19.23                  | 30             |
|                |             | 2 Mbps         | 19.56                  | 30             |
|                |             | 5.5 Mbps       | 21.28                  | 30             |
|                |             | 11 Mbps        | 22.97                  | 30             |
| 2437           | 6           | 1 Mbps         | 19.23                  | 30             |
|                |             | 2 Mbps         | 19.58                  | 30             |
|                |             | 5.5 Mbps       | 21.29                  | 30             |
|                |             | 11 Mbps        | 22.98                  | 30             |
| 2462           | 11          | 1 Mbps         | 19.32                  | 30             |
|                |             | 2 Mbps         | 19.67                  | 30             |
|                |             | 5.5 Mbps       | 21.37                  | 30             |
|                |             | 11 Mbps        | 23.02                  | 30             |

### Conducted Output Power Measurements (802.11g Mode)

| 802.11g Mode   |             | Rate<br>(Mbps) | Measured<br>Power(dBm) | Limit<br>(dBm) |
|----------------|-------------|----------------|------------------------|----------------|
| Frequency[MHz] | Channel No. |                |                        |                |
| 2412           | 1           | 6 Mbps         | 22.26                  | 30             |
|                |             | 9 Mbps         | 22.24                  | 30             |
|                |             | 12 Mbps        | 22.30                  | 30             |
|                |             | 18 Mbps        | 22.21                  | 30             |
|                |             | 24 Mbps        | 22.69                  | 30             |
|                |             | 36 Mbps        | 22.68                  | 30             |
|                |             | 48 Mbps        | 22.67                  | 30             |
|                |             | 54 Mbps        | 22.62                  | 30             |
| 2437           | 6           | 6 Mbps         | 22.42                  | 30             |
|                |             | 9 Mbps         | 22.34                  | 30             |
|                |             | 12 Mbps        | 22.38                  | 30             |
|                |             | 18 Mbps        | 22.33                  | 30             |
|                |             | 24 Mbps        | 22.75                  | 30             |
|                |             | 36 Mbps        | 22.71                  | 30             |
|                |             | 48 Mbps        | 22.81                  | 30             |
|                |             | 54 Mbps        | 22.80                  | 30             |
| 2462           | 11          | 6 Mbps         | 22.42                  | 30             |
|                |             | 9 Mbps         | 22.38                  | 30             |
|                |             | 12 Mbps        | 22.39                  | 30             |
|                |             | 18 Mbps        | 22.35                  | 30             |
|                |             | 24 Mbps        | 22.83                  | 30             |
|                |             | 36 Mbps        | 22.77                  | 30             |
|                |             | 48 Mbps        | 22.80                  | 30             |
|                |             | 54 Mbps        | 22.80                  | 30             |

### Conducted Output Power Measurements (802.11n Mode)

| 802.11n Mode   |             | Rate<br>(Mbps) | Measured<br>Power(dBm) | Limit<br>(dBm) |
|----------------|-------------|----------------|------------------------|----------------|
| Frequency[MHz] | Channel No. |                |                        |                |
| 2412           | 1           | 6.5 Mbps       | 20.19                  | 30             |
|                |             | 13 Mbps        | 20.28                  | 30             |
|                |             | 19.5 Mbps      | 20.17                  | 30             |
|                |             | 26 Mbps        | 20.73                  | 30             |
|                |             | 39 Mbps        | 20.64                  | 30             |
|                |             | 52 Mbps        | 20.61                  | 30             |
|                |             | 58.5 Mbps      | 20.66                  | 30             |
|                |             | 65 Mbps        | 20.65                  | 30             |
| 2437           | 6           | 6.5 Mbps       | 20.34                  | 30             |
|                |             | 13 Mbps        | 20.27                  | 30             |
|                |             | 19.5 Mbps      | 20.18                  | 30             |
|                |             | 26 Mbps        | 20.69                  | 30             |
|                |             | 39 Mbps        | 20.74                  | 30             |
|                |             | 52 Mbps        | 20.70                  | 30             |
|                |             | 58.5 Mbps      | 20.67                  | 30             |
|                |             | 65 Mbps        | 20.65                  | 30             |
| 2462           | 11          | 6.5 Mbps       | 20.29                  | 30             |
|                |             | 13 Mbps        | 20.37                  | 30             |
|                |             | 19.5 Mbps      | 20.29                  | 30             |
|                |             | 26 Mbps        | 20.79                  | 30             |
|                |             | 39 Mbps        | 20.72                  | 30             |
|                |             | 52 Mbps        | 20.65                  | 30             |
|                |             | 58.5 Mbps      | 20.71                  | 30             |
|                |             | 65 Mbps        | 20.70                  | 30             |

■ TEST RESULTS-Average

Conducted Output Power Measurements (802.11b Mode)

| 802.11b Mode   |             | Rate<br>(Mbps) | Measured<br>Power(dBm) | Limit<br>(dBm) |
|----------------|-------------|----------------|------------------------|----------------|
| Frequency[MHz] | Channel No. |                |                        |                |
| 2412           | 1           | 1 Mbps         | 16.22                  | 30             |
|                |             | 2 Mbps         | 16.21                  | 30             |
|                |             | 5.5 Mbps       | 16.30                  | 30             |
|                |             | 11 Mbps        | 16.05                  | 30             |
| 2437           | 6           | 1 Mbps         | 16.36                  | 30             |
|                |             | 2 Mbps         | 16.33                  | 30             |
|                |             | 5.5 Mbps       | 16.37                  | 30             |
|                |             | 11 Mbps        | 16.09                  | 30             |
| 2462           | 11          | 1 Mbps         | 16.36                  | 30             |
|                |             | 2 Mbps         | 16.31                  | 30             |
|                |             | 5.5 Mbps       | 16.33                  | 30             |
|                |             | 11 Mbps        | 16.06                  | 30             |

**Conducted Output Power Measurements (802.11g Mode)**


| 802.11g Mode   |             | Rate<br>(Mbps) | Measured<br>Power(dBm) | Limit<br>(dBm) |
|----------------|-------------|----------------|------------------------|----------------|
| Frequency[MHz] | Channel No. |                |                        |                |
| 2412           | 1           | 6 Mbps         | 13.99                  | 30             |
|                |             | 9 Mbps         | 13.86                  | 30             |
|                |             | 12 Mbps        | 13.73                  | 30             |
|                |             | 18 Mbps        | 13.47                  | 30             |
|                |             | 24 Mbps        | 13.23                  | 30             |
|                |             | 36 Mbps        | 12.82                  | 30             |
|                |             | 48 Mbps        | 12.46                  | 30             |
|                |             | 54 Mbps        | 12.30                  | 30             |
| 2437           | 6           | 6 Mbps         | 14.15                  | 30             |
|                |             | 9 Mbps         | 14.00                  | 30             |
|                |             | 12 Mbps        | 13.84                  | 30             |
|                |             | 18 Mbps        | 13.60                  | 30             |
|                |             | 24 Mbps        | 13.29                  | 30             |
|                |             | 36 Mbps        | 12.92                  | 30             |
|                |             | 48 Mbps        | 12.51                  | 30             |
|                |             | 54 Mbps        | 12.43                  | 30             |
| 2462           | 11          | 6 Mbps         | 14.19                  | 30             |
|                |             | 9 Mbps         | 14.04                  | 30             |
|                |             | 12 Mbps        | 13.96                  | 30             |
|                |             | 18 Mbps        | 13.61                  | 30             |
|                |             | 24 Mbps        | 13.40                  | 30             |
|                |             | 36 Mbps        | 12.94                  | 30             |
|                |             | 48 Mbps        | 12.63                  | 30             |
|                |             | 54 Mbps        | 12.51                  | 30             |

### Conducted Output Power Measurements (802.11n Mode)


| 802.11n Mode   |             | Rate<br>(Mbps) | Measured<br>Power(dBm) | Limit<br>(dBm) |
|----------------|-------------|----------------|------------------------|----------------|
| Frequency[MHz] | Channel No. |                |                        |                |
| 2412           | 1           | 6.5 Mbps       | 11.95                  | 30             |
|                |             | 13 Mbps        | 11.73                  | 30             |
|                |             | 19.5 Mbps      | 11.50                  | 30             |
|                |             | 26 Mbps        | 11.28                  | 30             |
|                |             | 39 Mbps        | 10.80                  | 30             |
|                |             | 52 Mbps        | 10.50                  | 30             |
|                |             | 58.5 Mbps      | 10.41                  | 30             |
|                |             | 65 Mbps        | 10.26                  | 30             |
| 2437           | 6           | 6.5 Mbps       | 12.00                  | 30             |
|                |             | 13 Mbps        | 11.74                  | 30             |
|                |             | 19.5 Mbps      | 11.52                  | 30             |
|                |             | 26 Mbps        | 11.31                  | 30             |
|                |             | 39 Mbps        | 10.94                  | 30             |
|                |             | 52 Mbps        | 10.51                  | 30             |
|                |             | 58.5 Mbps      | 10.42                  | 30             |
|                |             | 65 Mbps        | 10.26                  | 30             |
| 2462           | 11          | 6.5 Mbps       | 12.05                  | 30             |
|                |             | 13 Mbps        | 11.80                  | 30             |
|                |             | 19.5 Mbps      | 11.58                  | 30             |
|                |             | 26 Mbps        | 11.39                  | 30             |
|                |             | 39 Mbps        | 10.93                  | 30             |
|                |             | 52 Mbps        | 10.56                  | 30             |
|                |             | 58.5 Mbps      | 10.45                  | 30             |
|                |             | 65 Mbps        | 10.29                  | 30             |

■ **RESULT PLOTS-Peak**


**Conducted Output Power (802.11b-CH 1) 1Mbps**

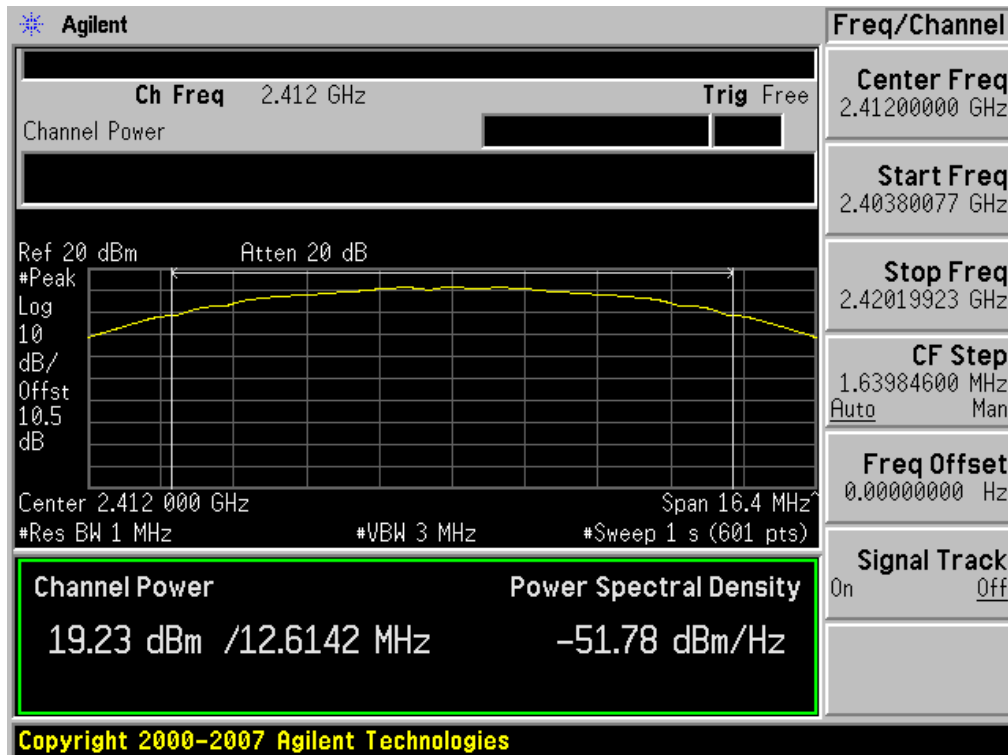


**Conducted Output Power (802.11b-CH 1) 2Mbps**

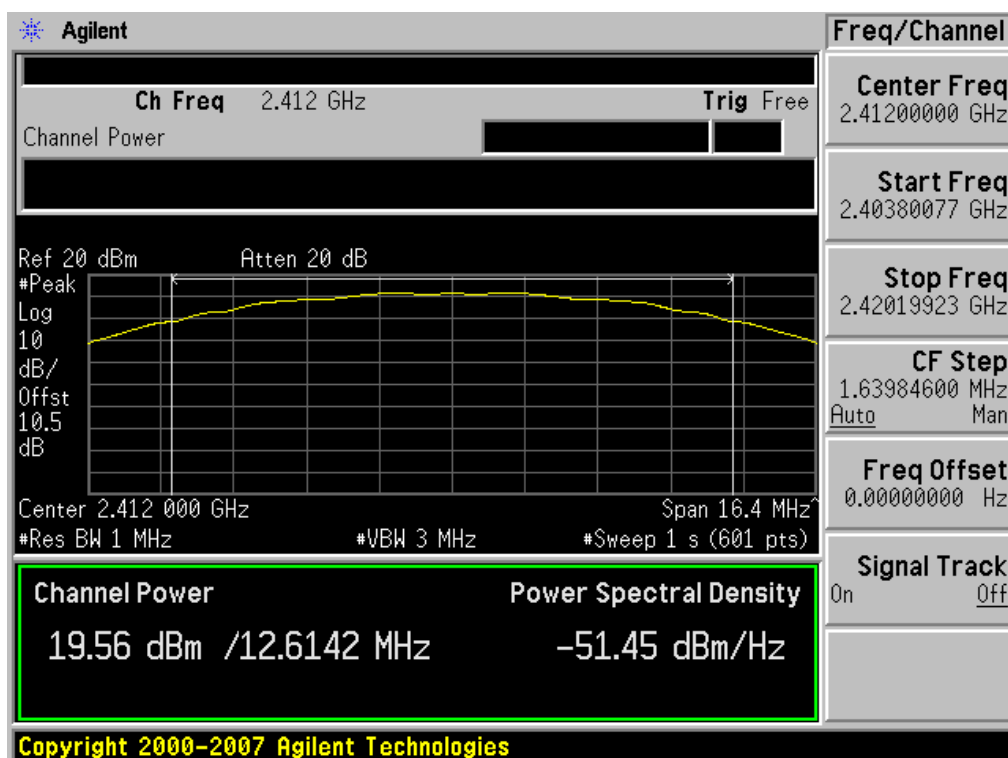


### Conducted Output Power (802.11b-CH 1) 5.5Mbps

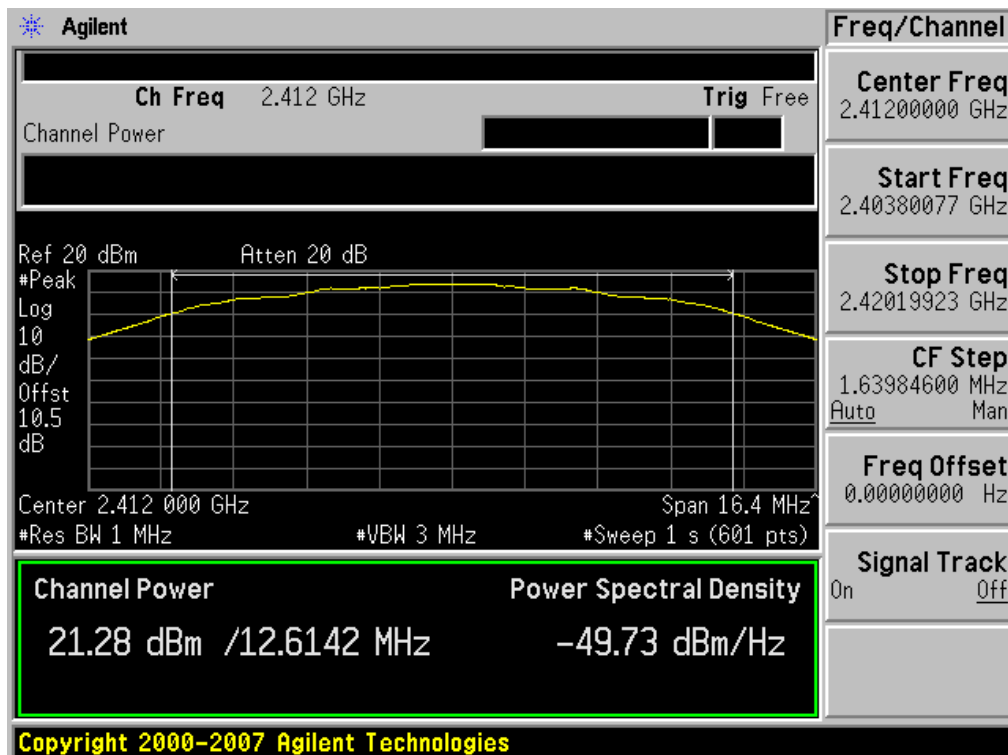


### Conducted Output Power (802.11b-CH 1) 11Mbps

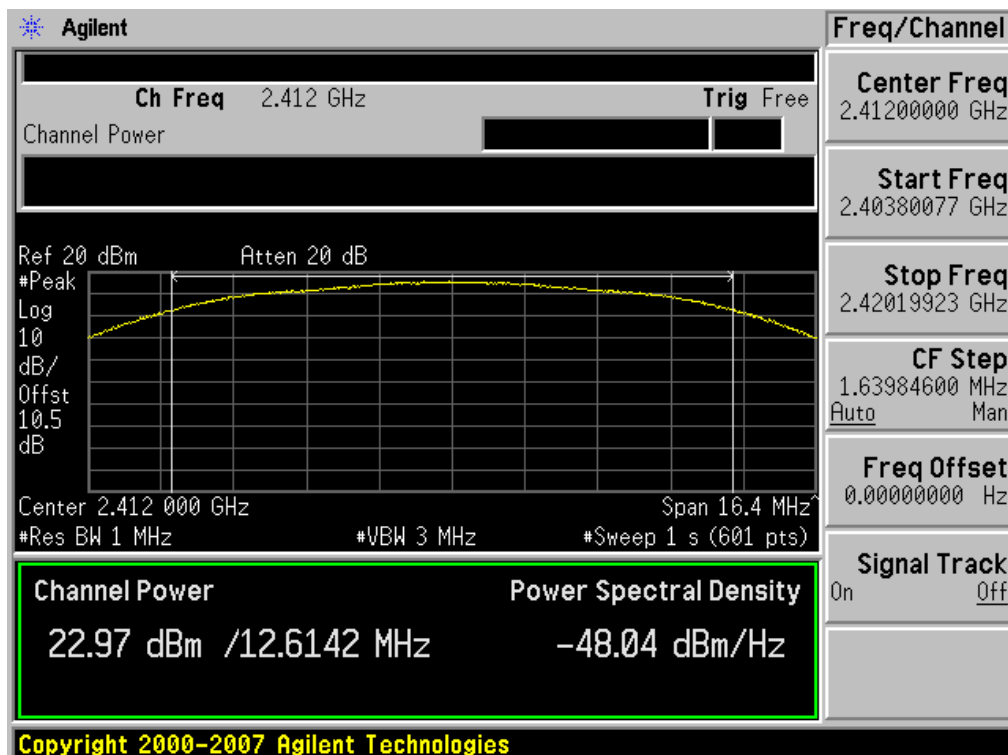


### Conducted Output Power (802.11b-CH 6) 1Mbps

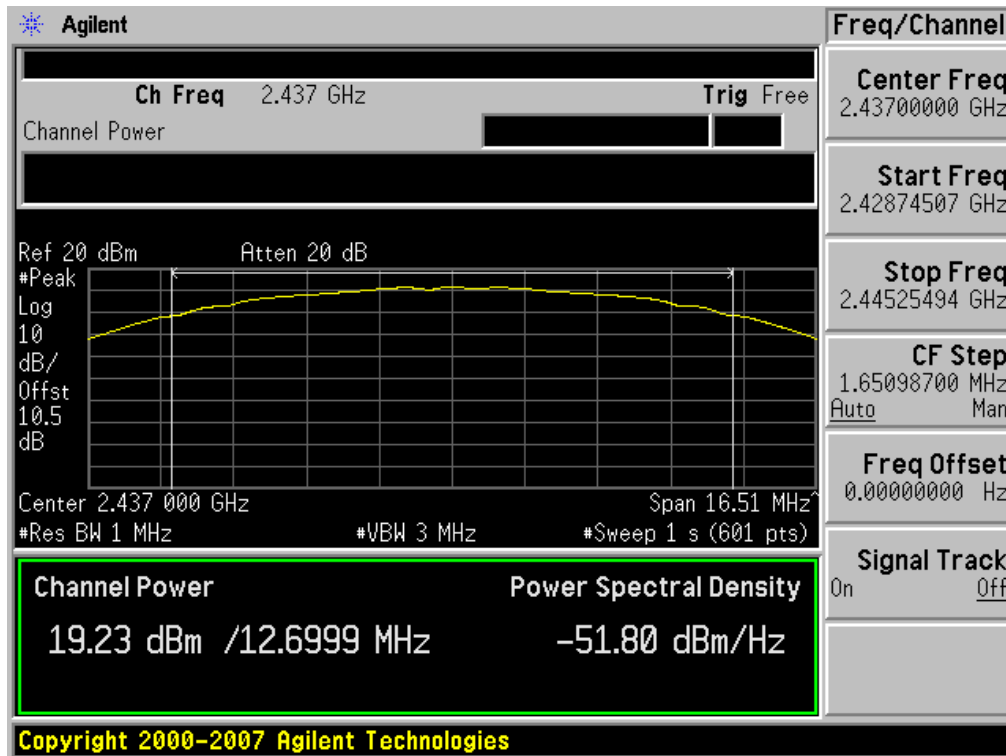


### Conducted Output Power (802.11b-CH 6) 2Mbps

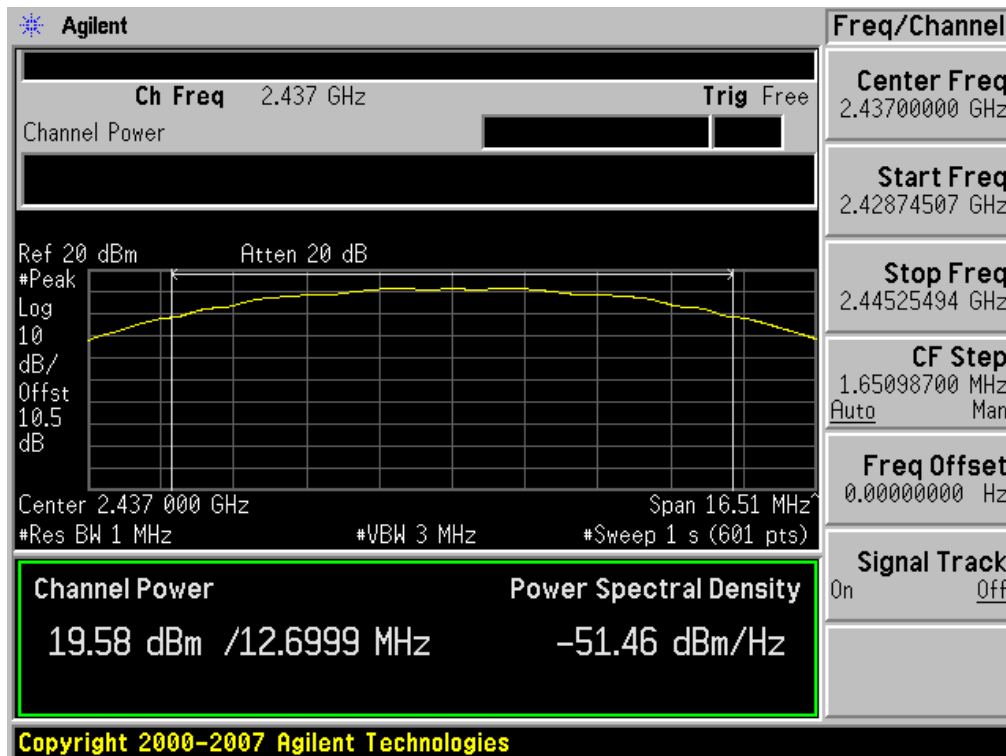


### Conducted Output Power (802.11b-CH 6) 5.5Mbps

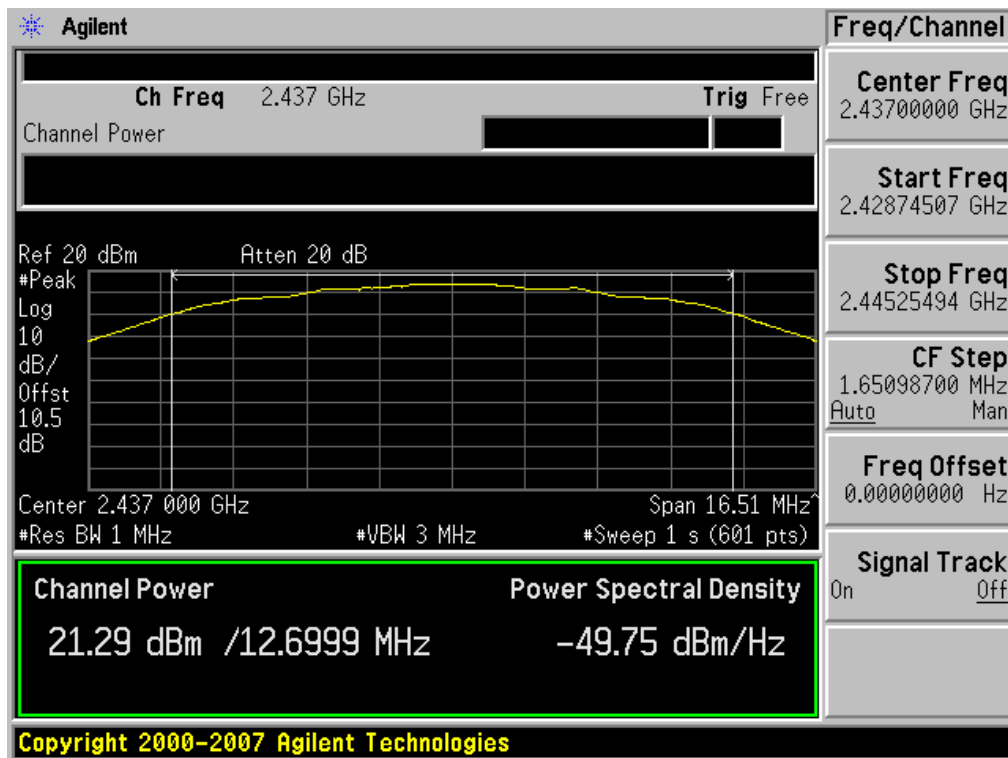


### Conducted Output Power (802.11b-CH 6) 11Mbps

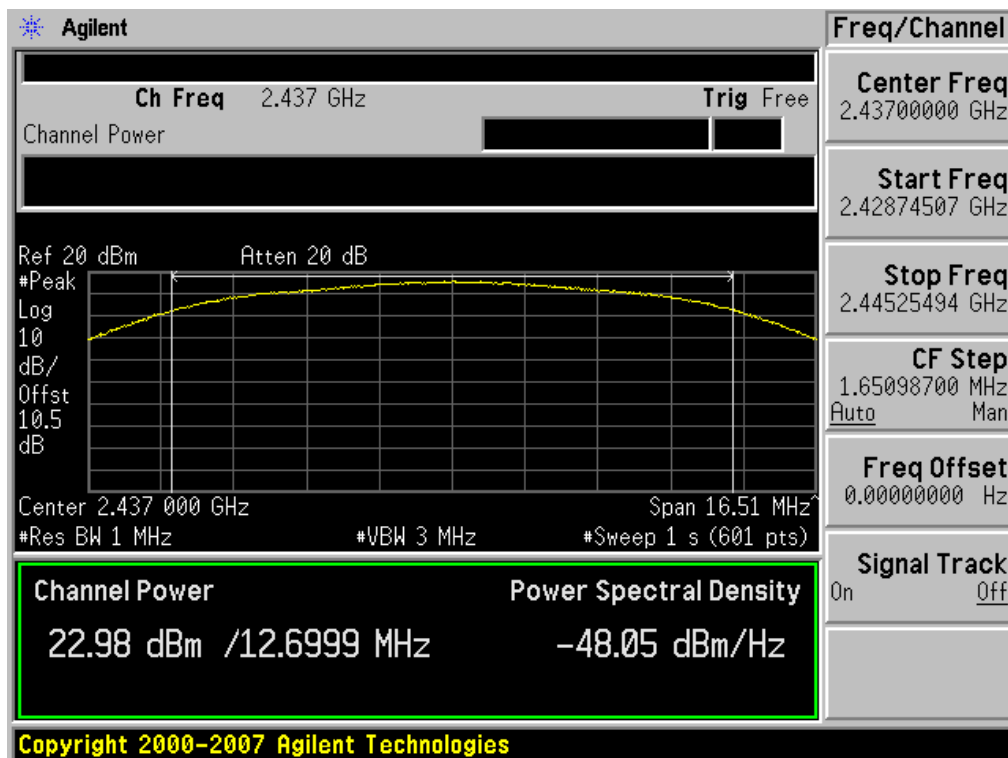


### Conducted Output Power (802.11b-CH 11) 1Mbps

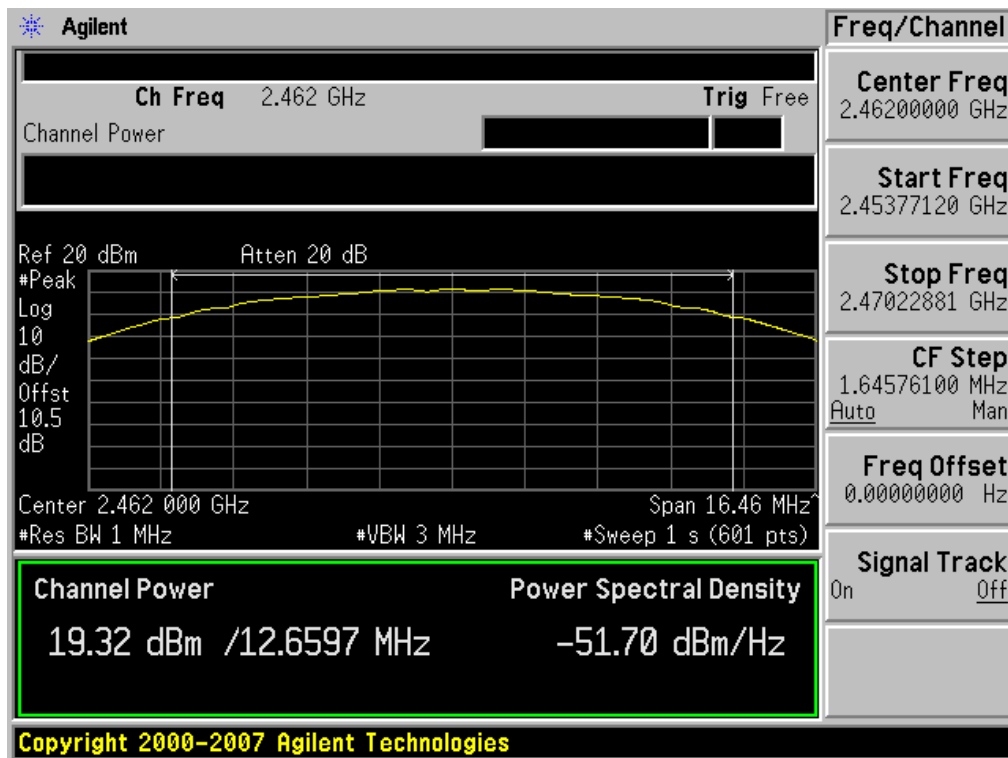


### Conducted Output Power (802.11b-CH 11) 2Mbps

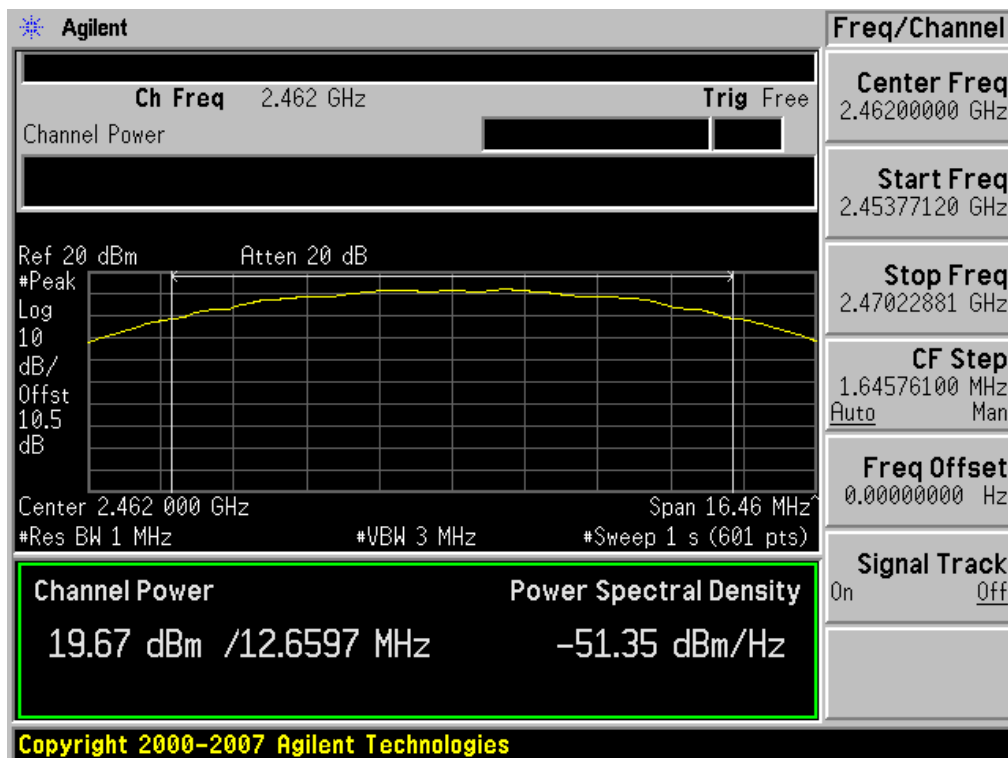


### Conducted Output Power (802.11b-CH 11) 5.5Mbps

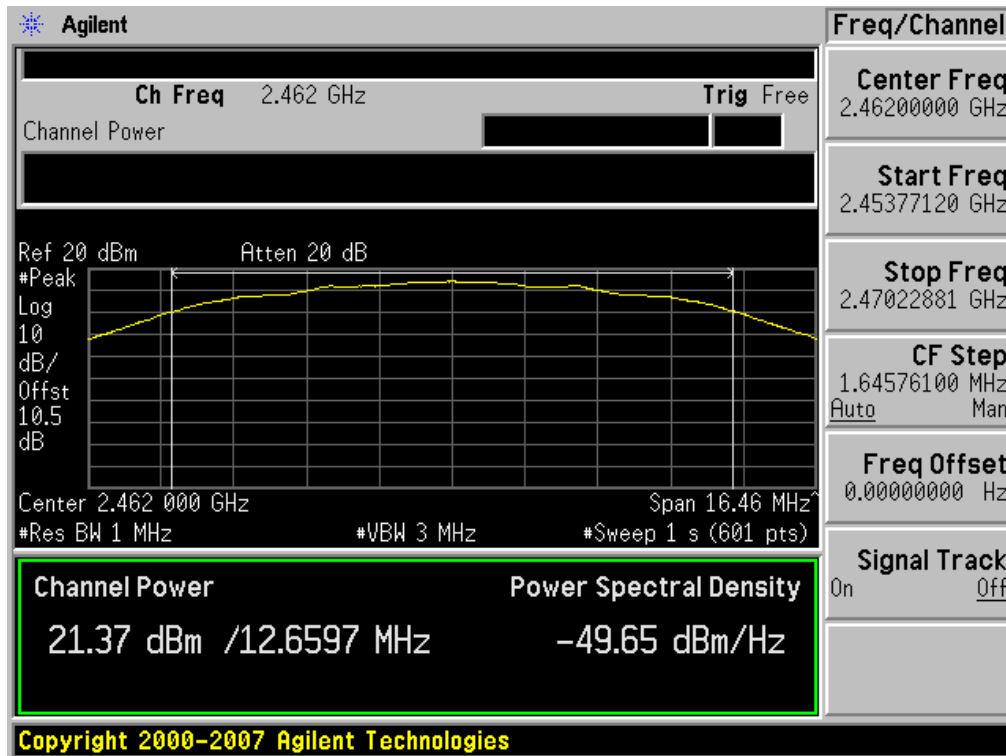


### Conducted Output Power (802.11b-CH 11) 11Mbps

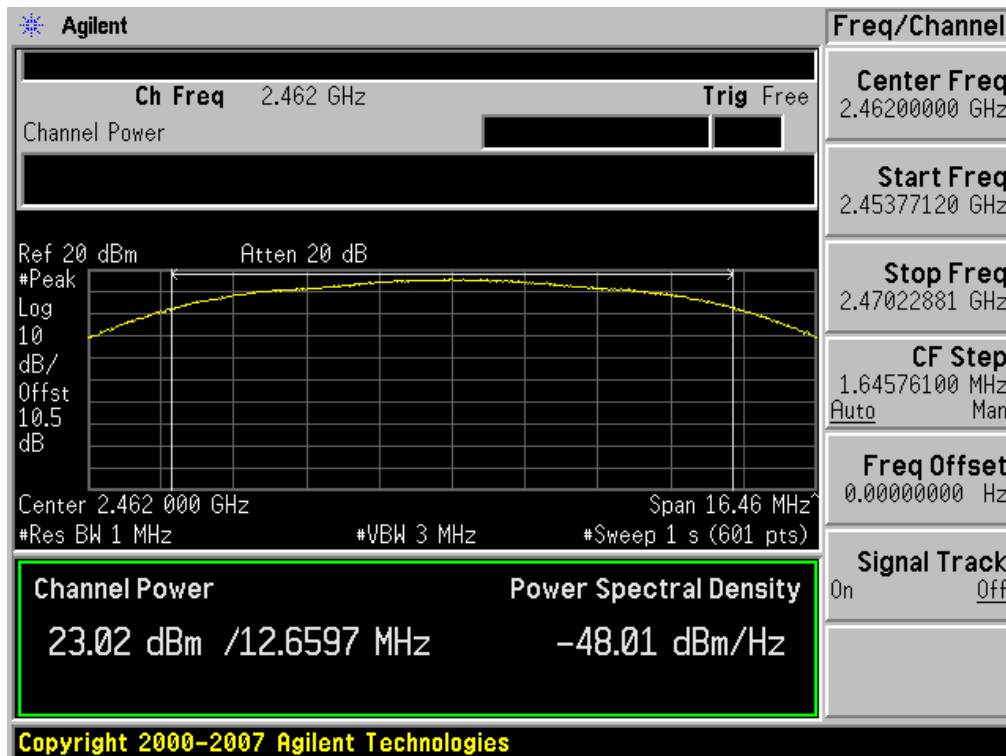


### Conducted Output Power (802.11g-CH 1) 6Mbps

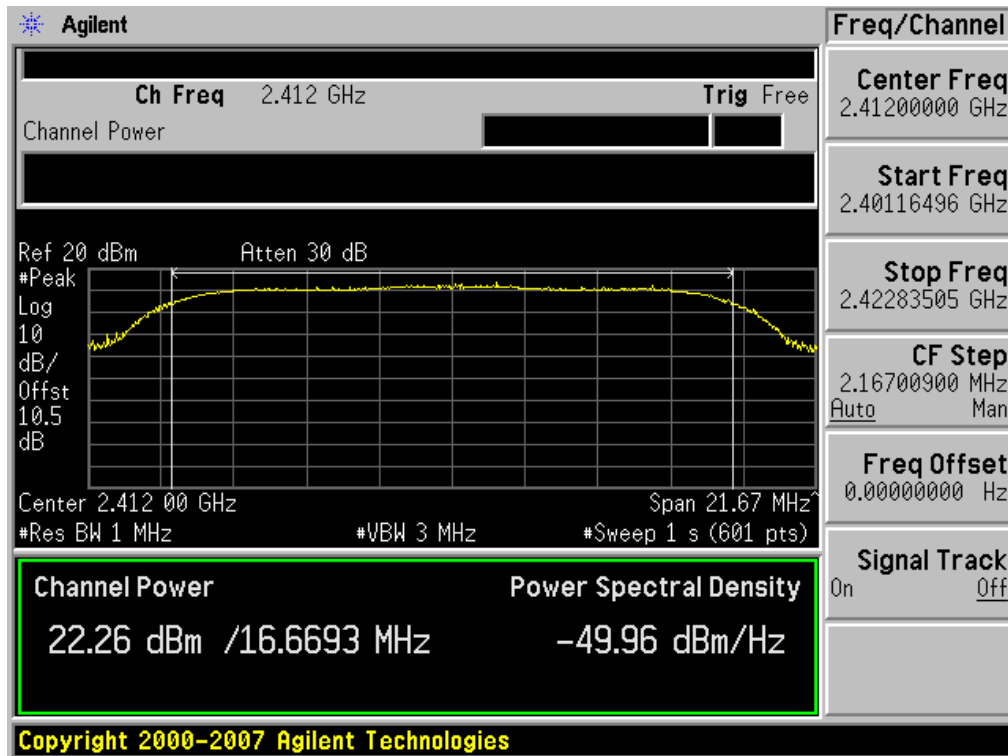


### Conducted Output Power (802.11g-CH 1) 9Mbps

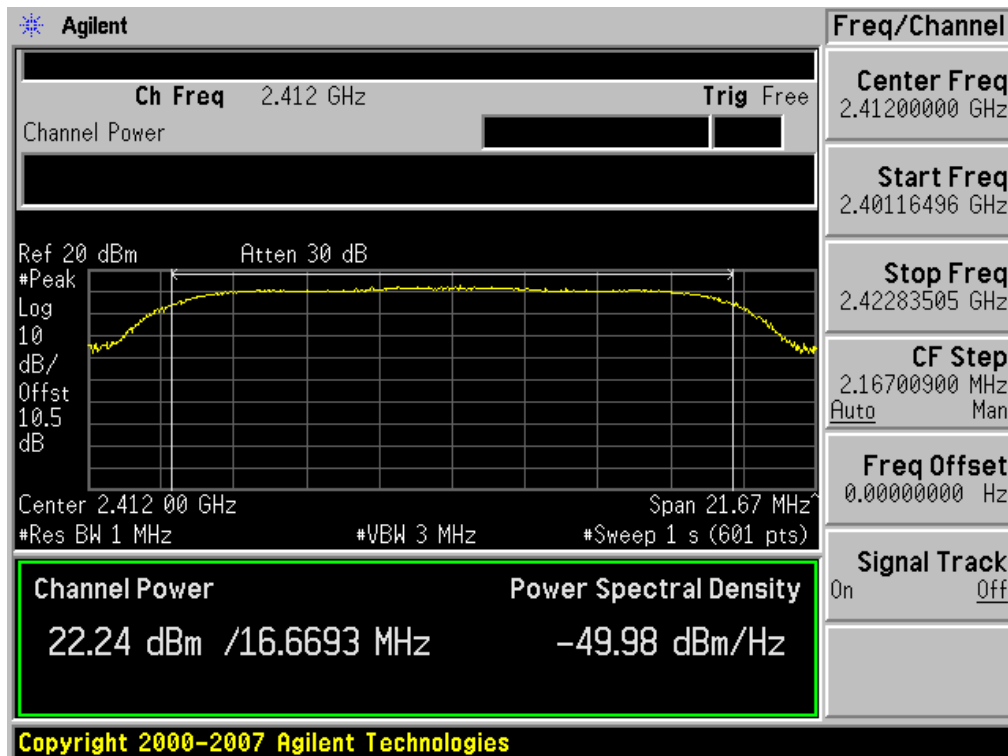


### Conducted Output Power (802.11g-CH 1) 12Mbps

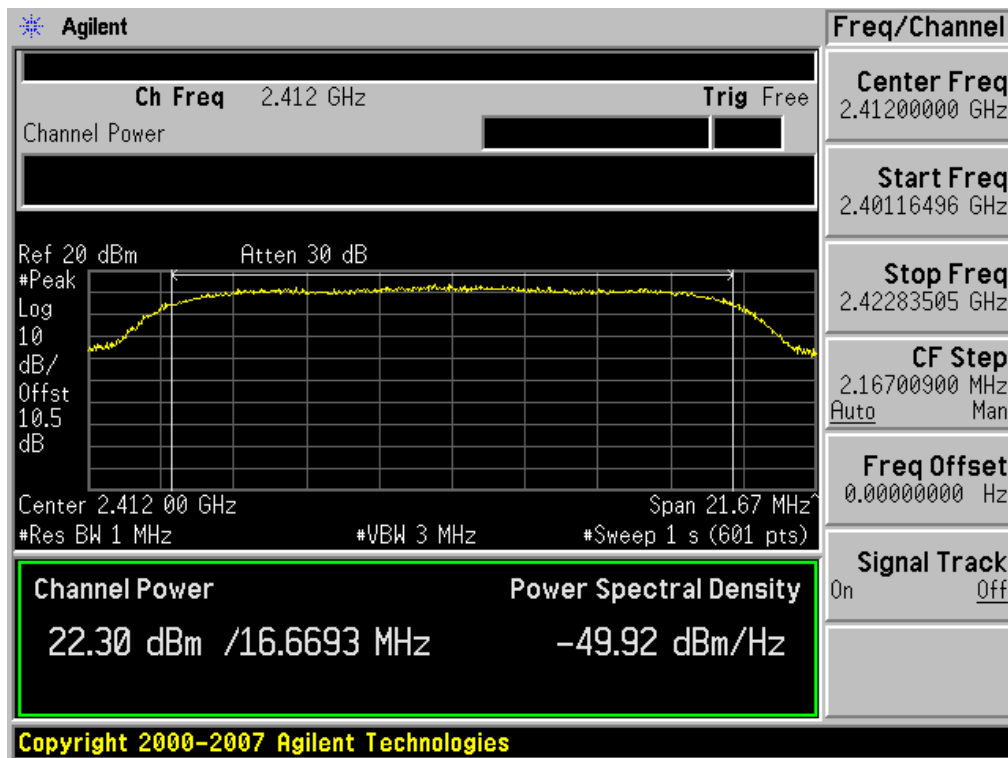


### Conducted Output Power (802.11g-CH 1) 18Mbps

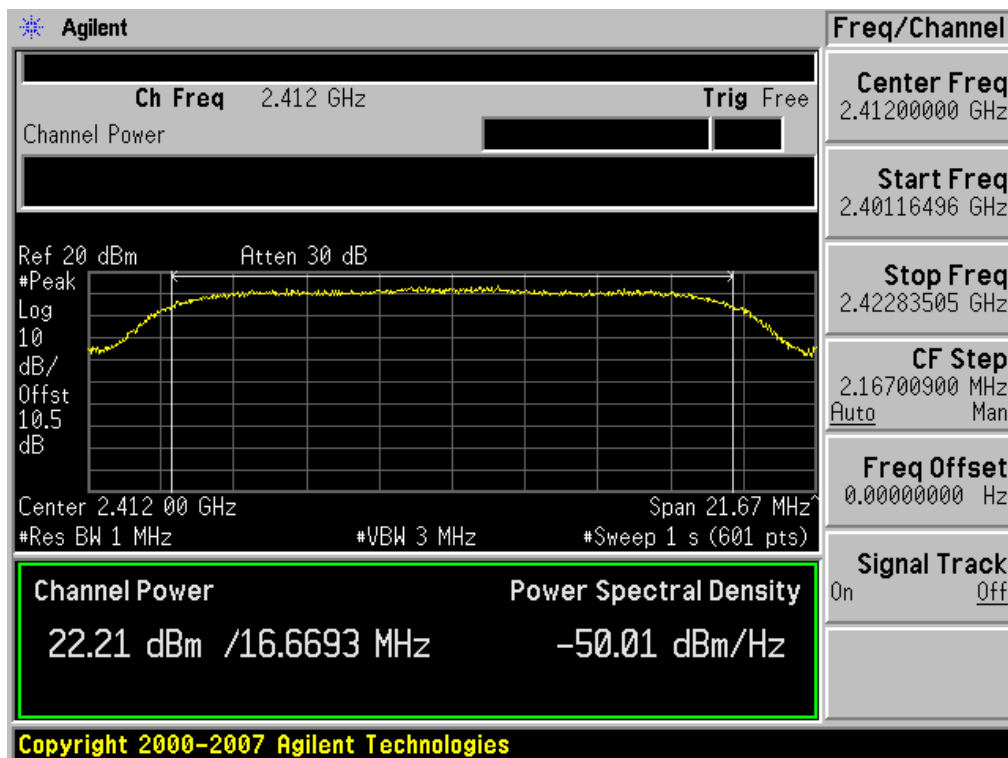


### Conducted Output Power (802.11g-CH 1) 24Mbps

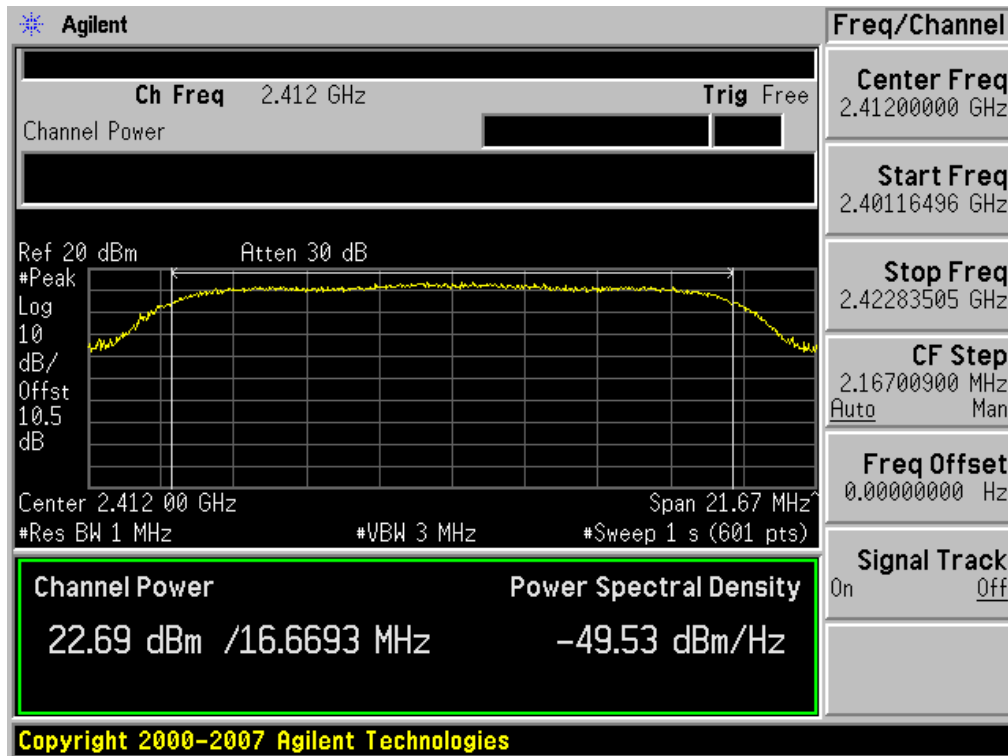


### Conducted Output Power (802.11g-CH 1) 36Mbps

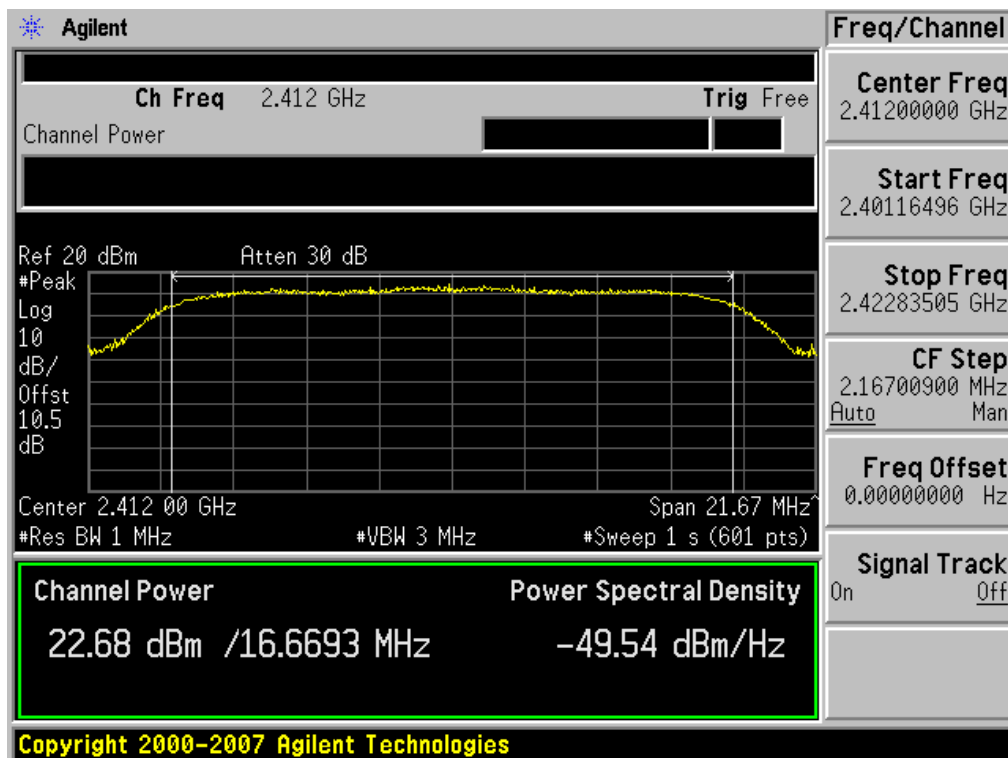


### Conducted Output Power (802.11g-CH 1) 48Mbps

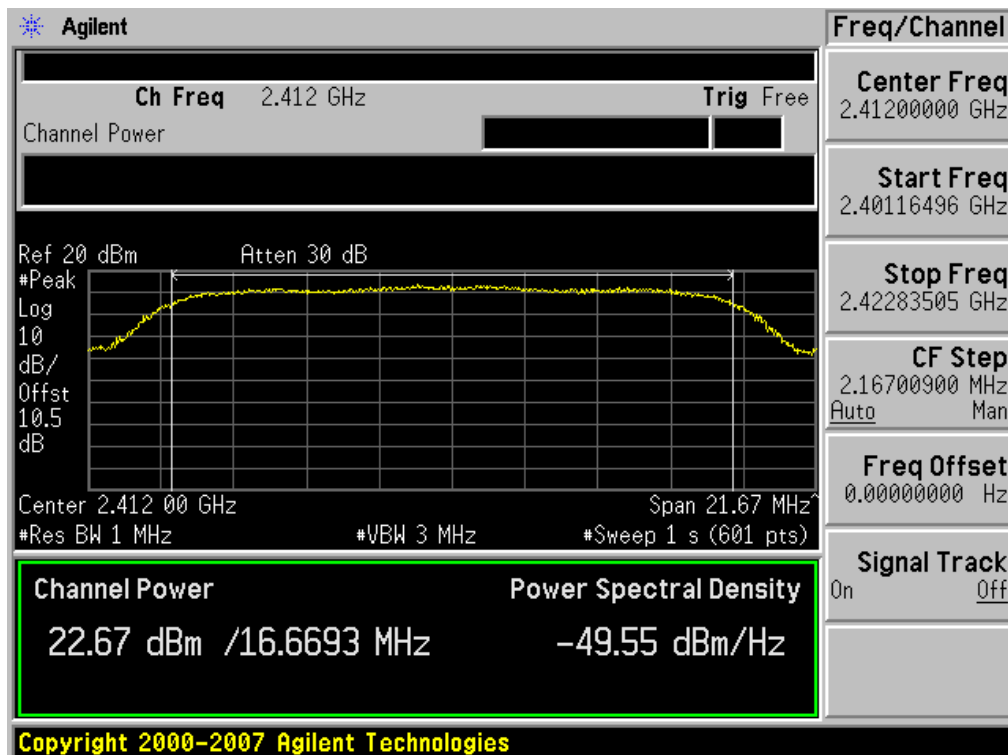


### Conducted Output Power (802.11g-CH 1) 54Mbps

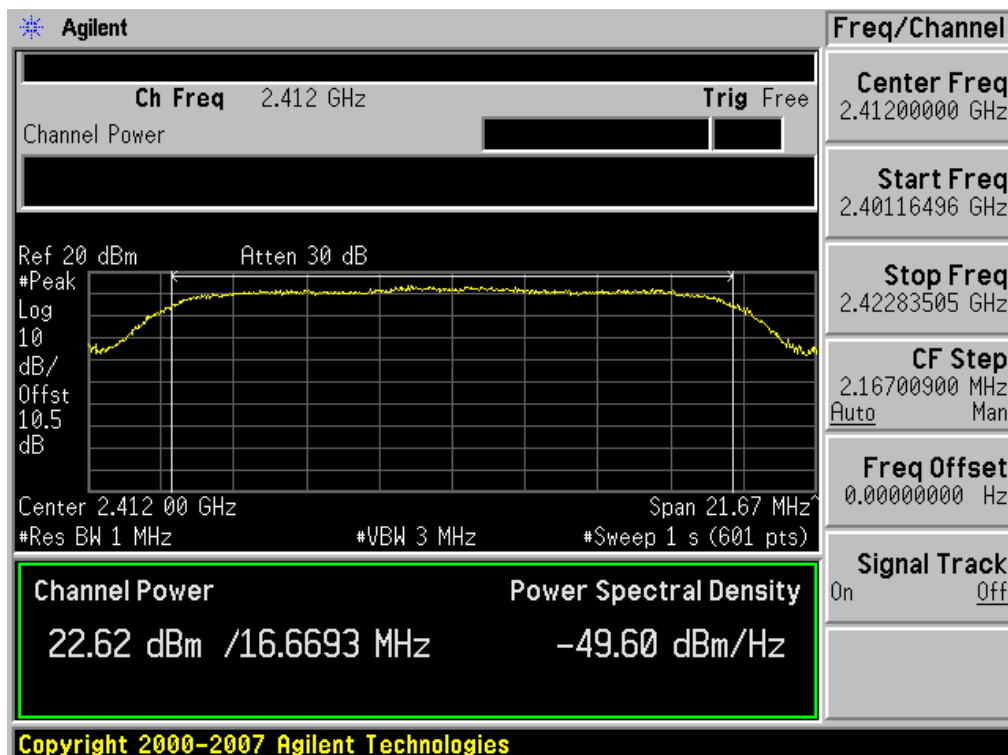


### Conducted Output Power (802.11g-CH 6) 6Mbps

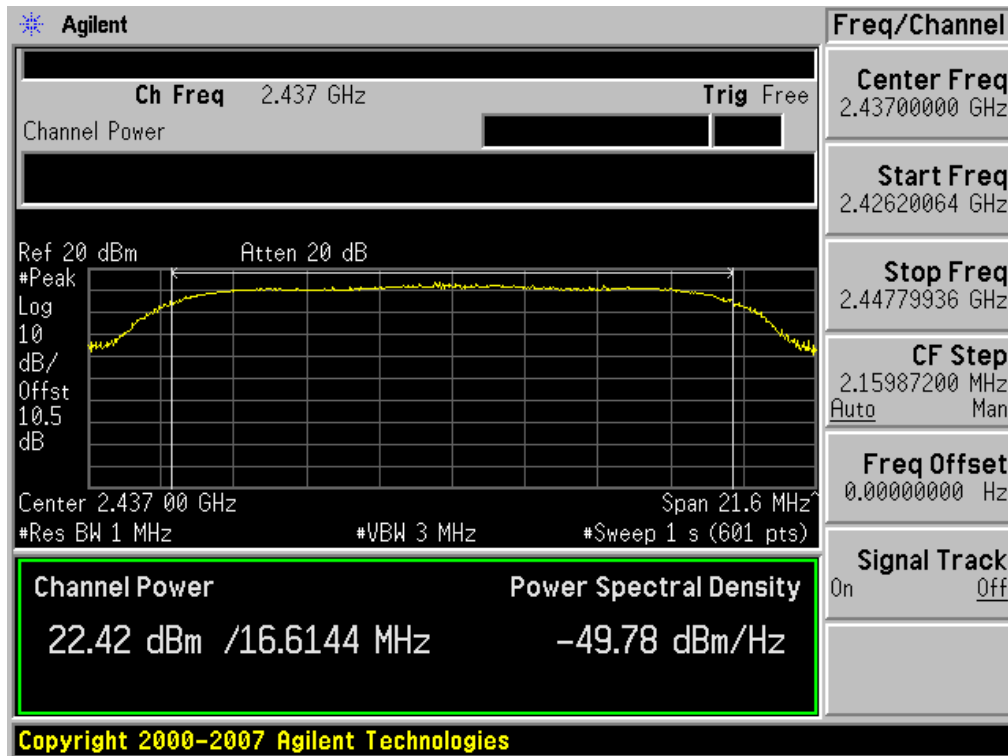


### Conducted Output Power (802.11g-CH 6) 9Mbps

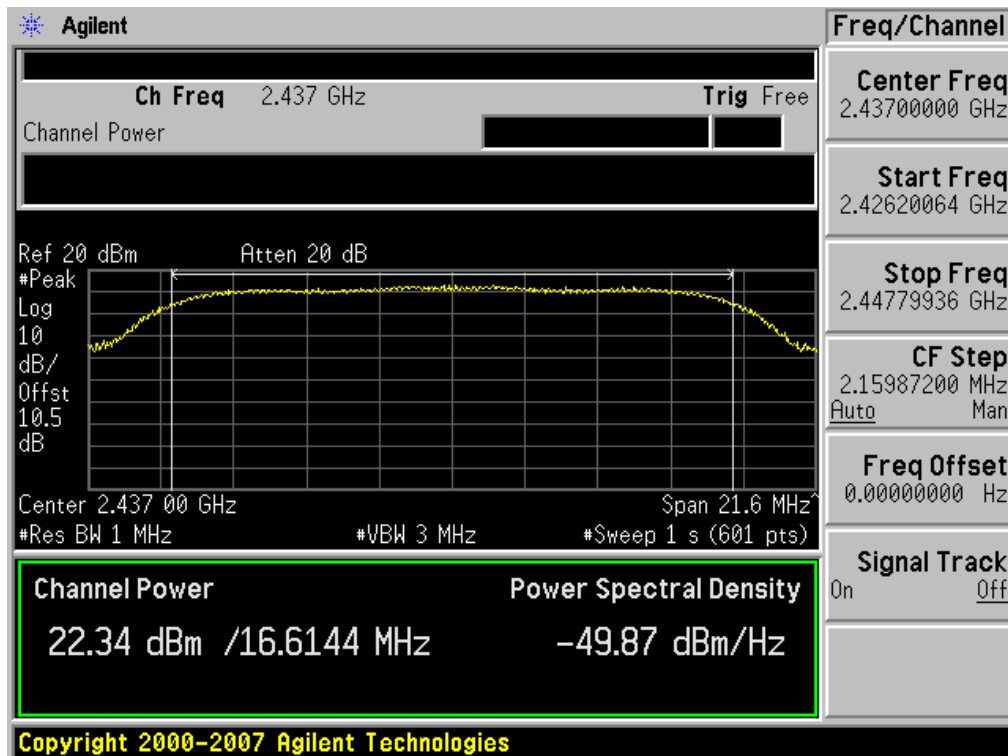


### Conducted Output Power (802.11g-CH 6) 12Mbps

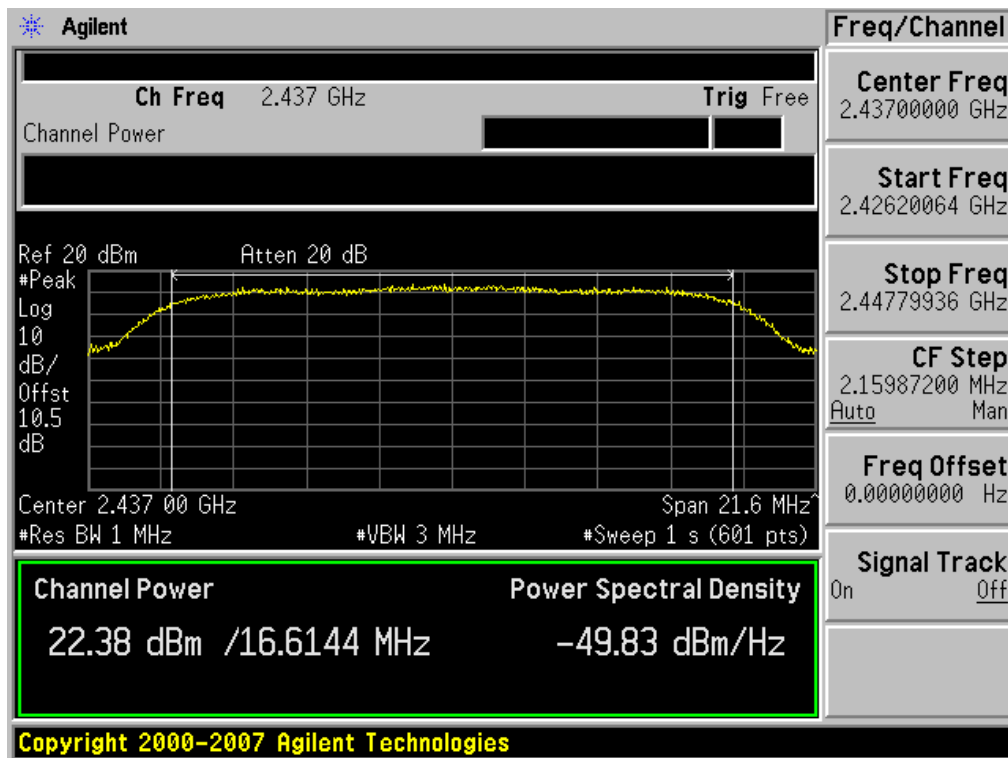


### Conducted Output Power (802.11g-CH 6) 18Mbps

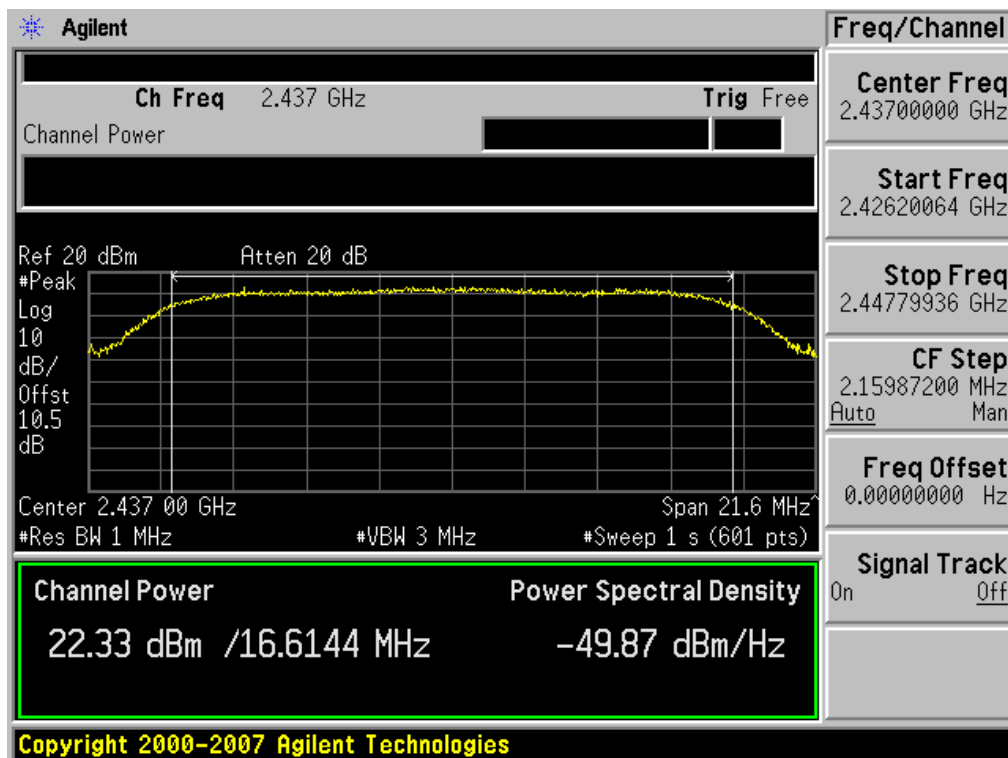


### Conducted Output Power (802.11g-CH 6) 24Mbps

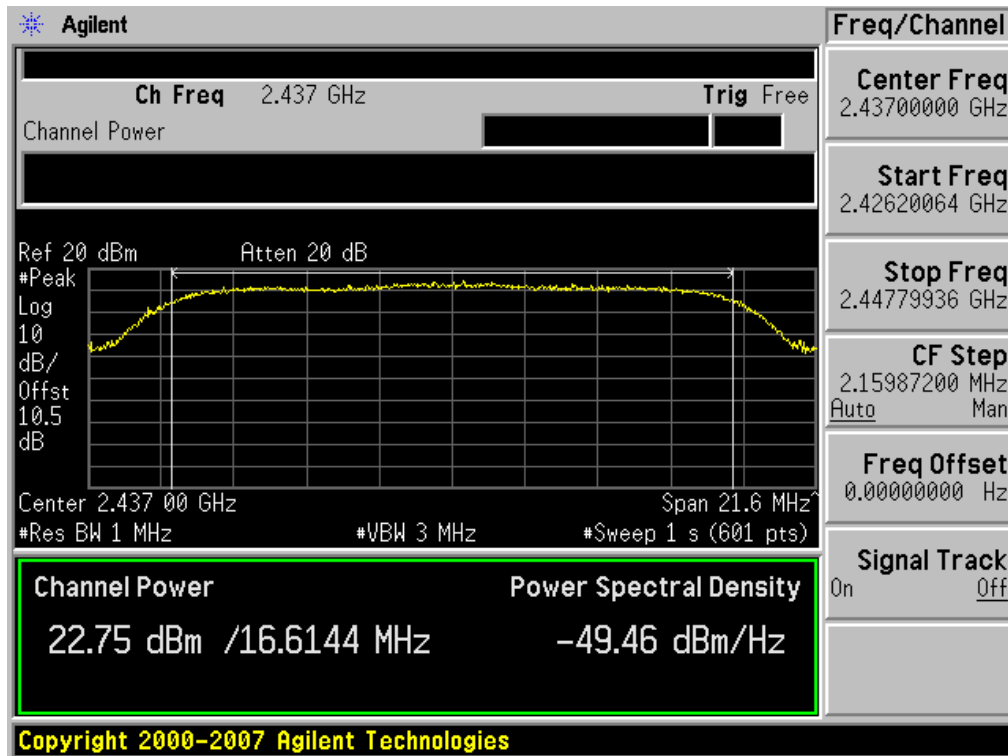

### Conducted Output Power (802.11g-CH 6) 36Mbps

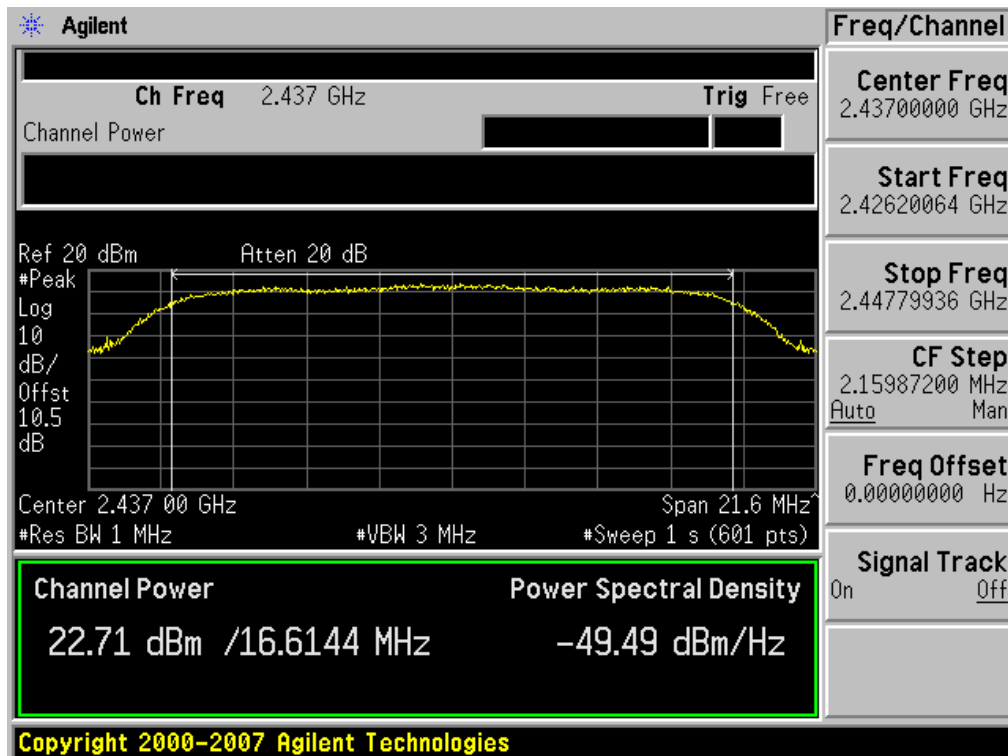


### Conducted Output Power (802.11g-CH 6) 48Mbps

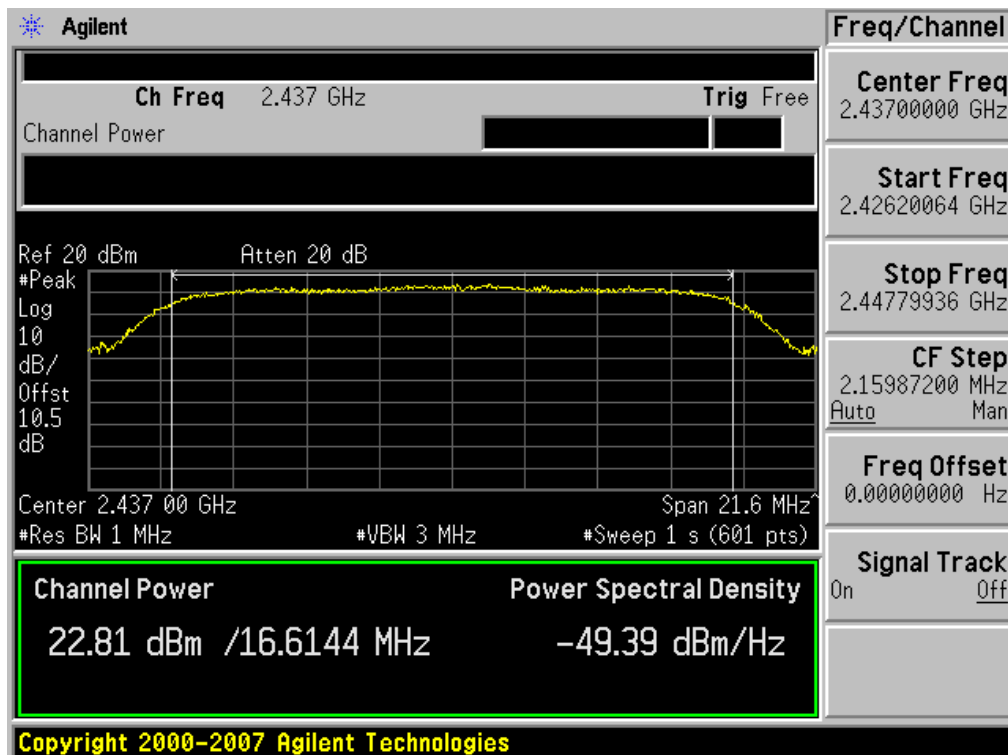


### Conducted Output Power (802.11g-CH 6) 54Mbps




### Conducted Output Power (802.11g-CH 11) 6Mbps

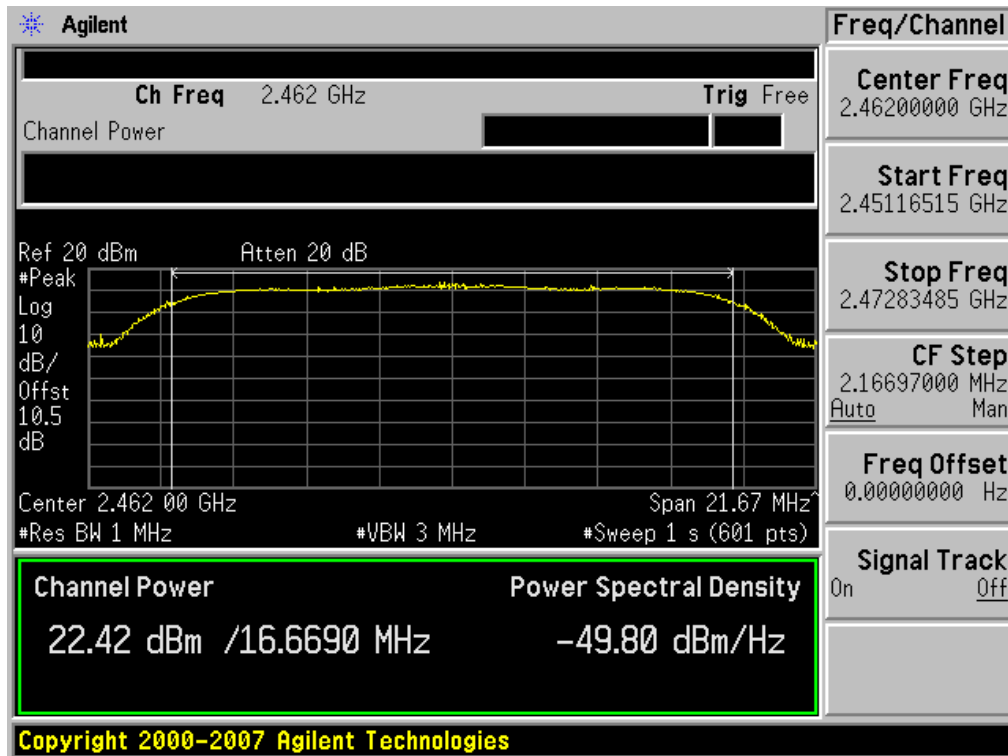


### Conducted Output Power (802.11g-CH 11) 9Mbps

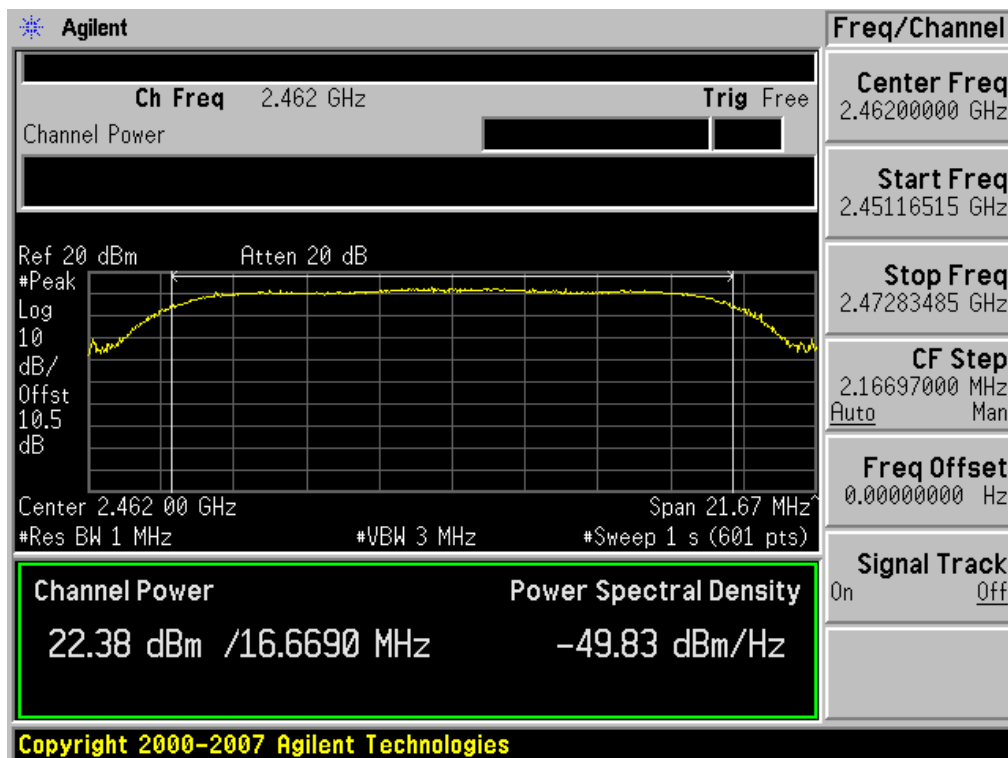


### Conducted Output Power (802.11g-CH 11) 12Mbps

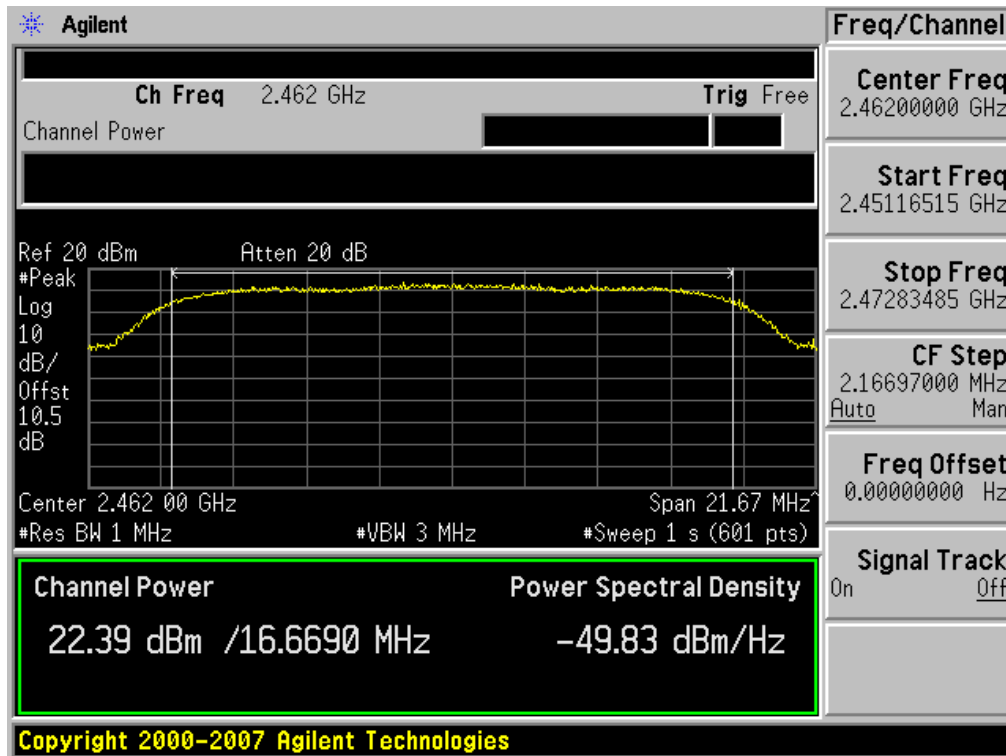


### Conducted Output Power (802.11g-CH 11) 18Mbps

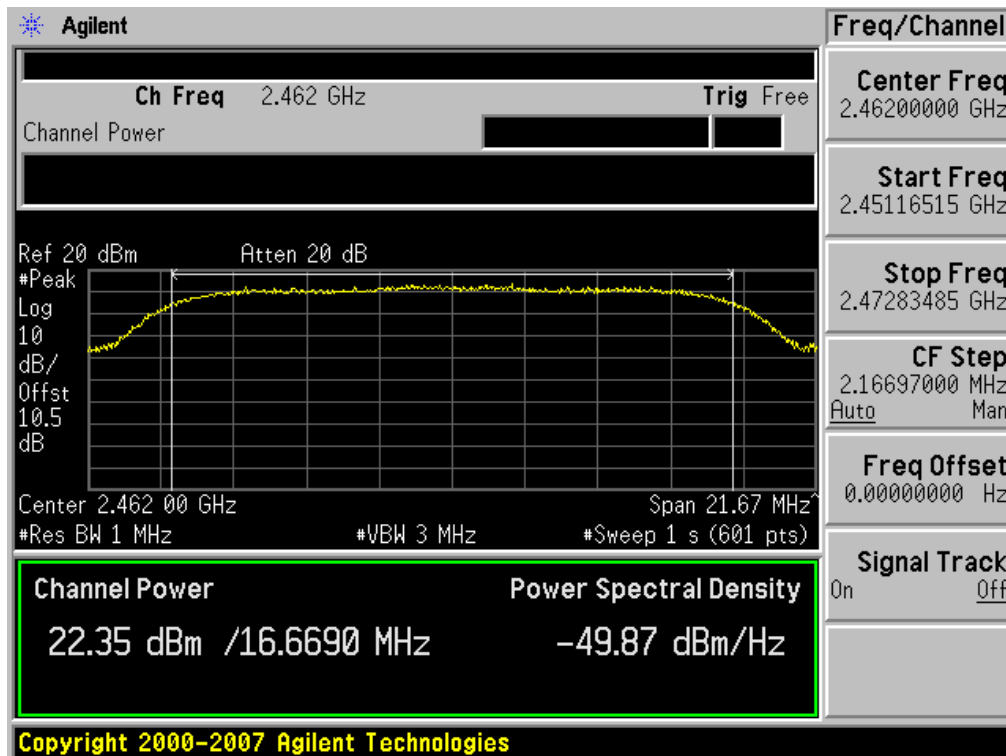


### Conducted Output Power (802.11g-CH 11) 24Mbps

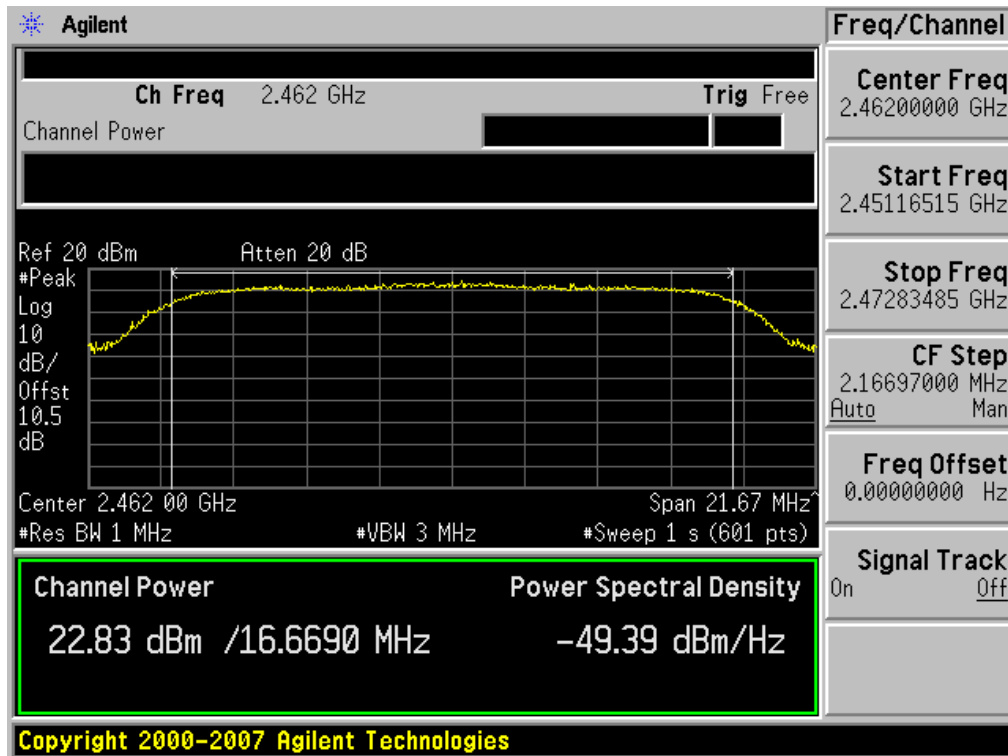


### Conducted Output Power (802.11g-CH 11) 36Mbps

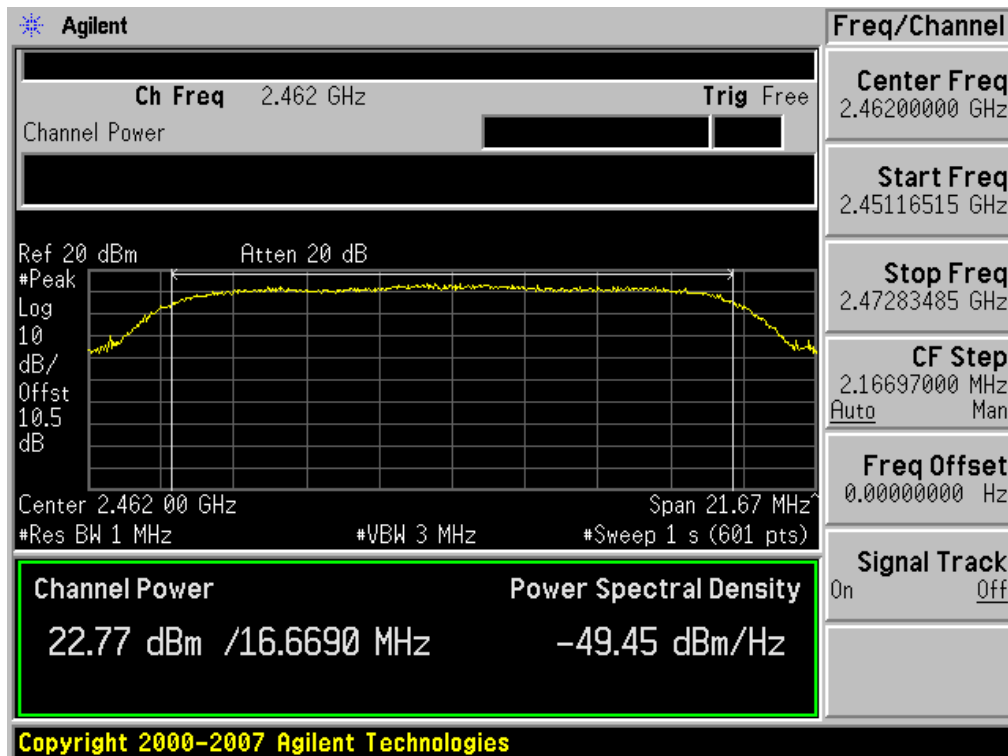


### Conducted Output Power (802.11g-CH 11) 48Mbps

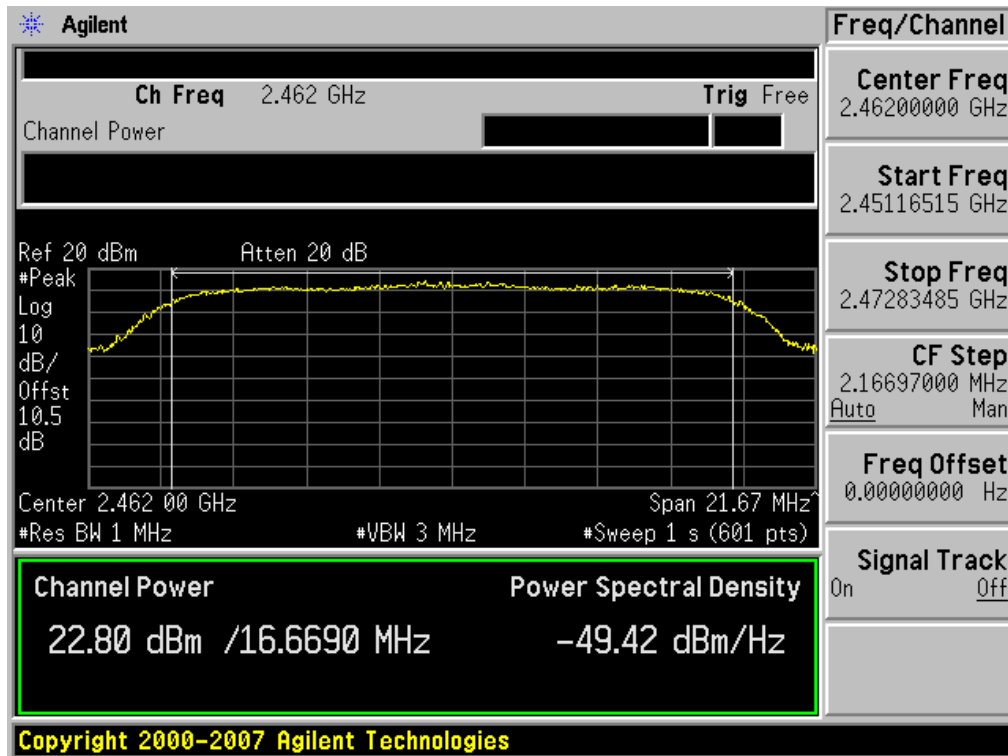


### Conducted Output Power (802.11g-CH 11) 54Mbps

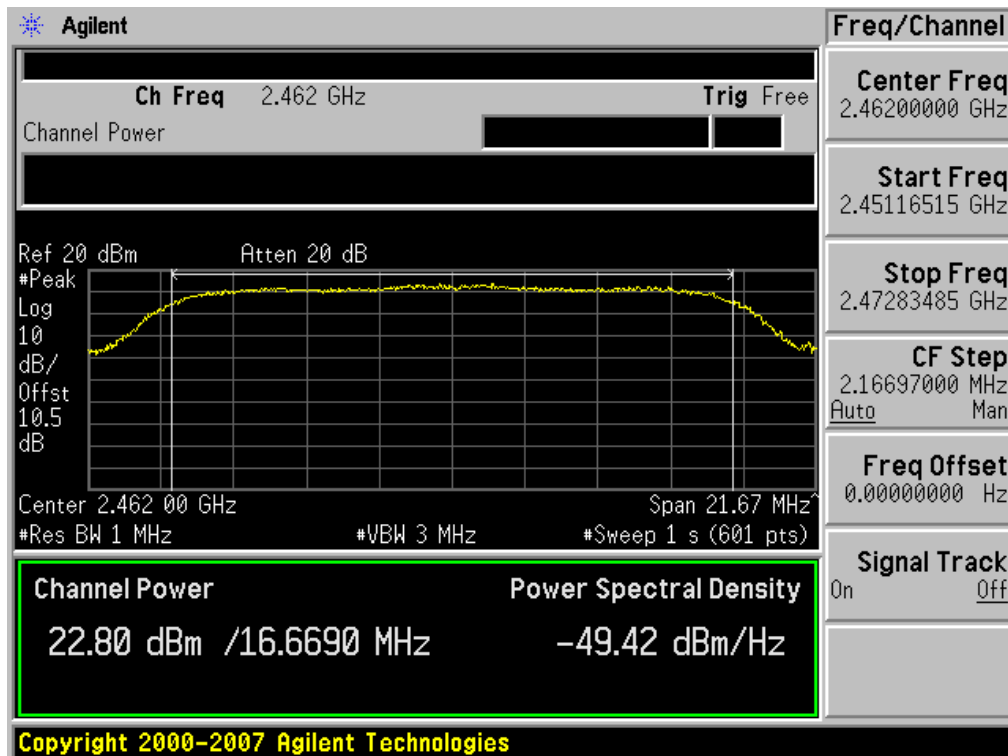


### Conducted Output Power (802.11n-CH 1) 6.5Mbps

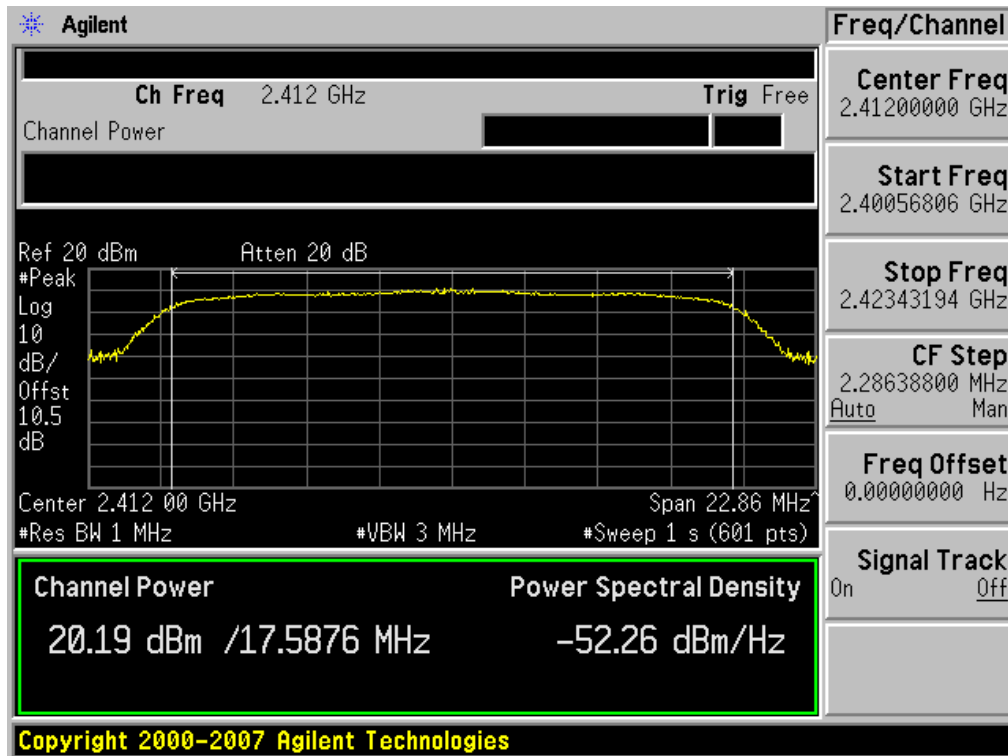


### Conducted Output Power (802.11n-CH 1) 13Mbps

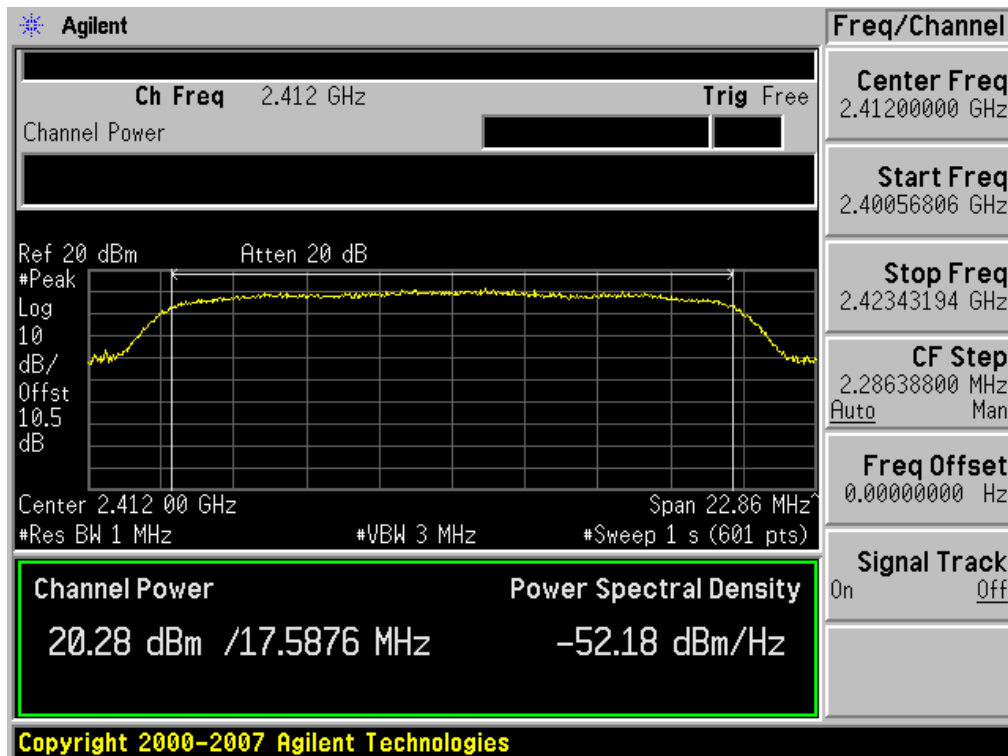


### Conducted Output Power (802.11n-CH 1) 19.5Mbps

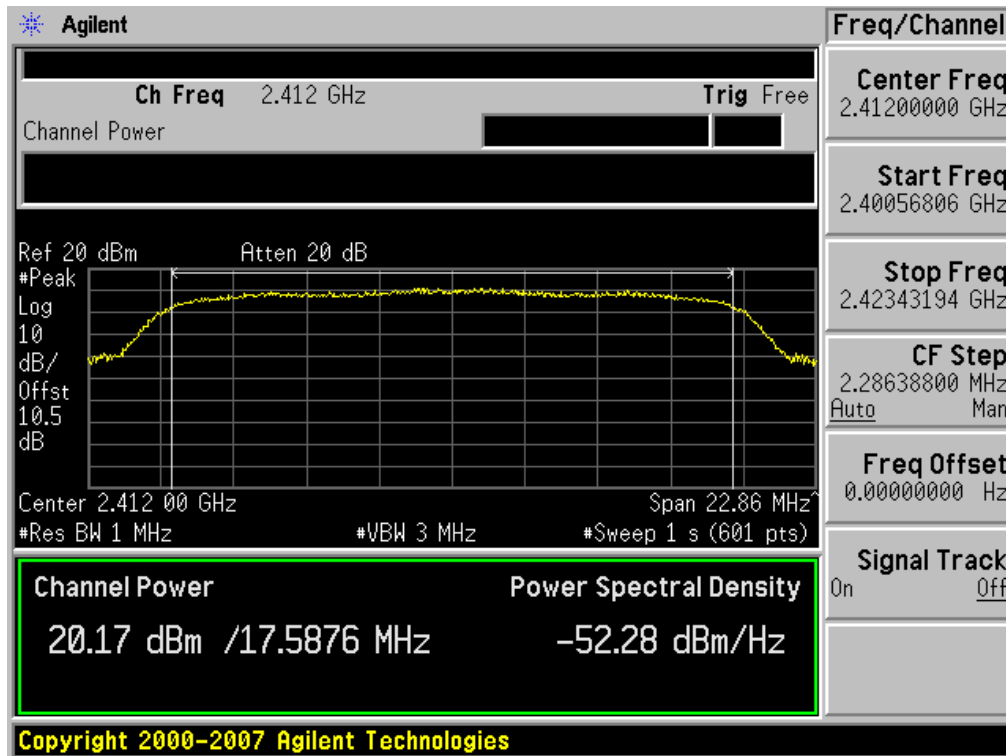


### Conducted Output Power (802.11n-CH 1) 26Mbps

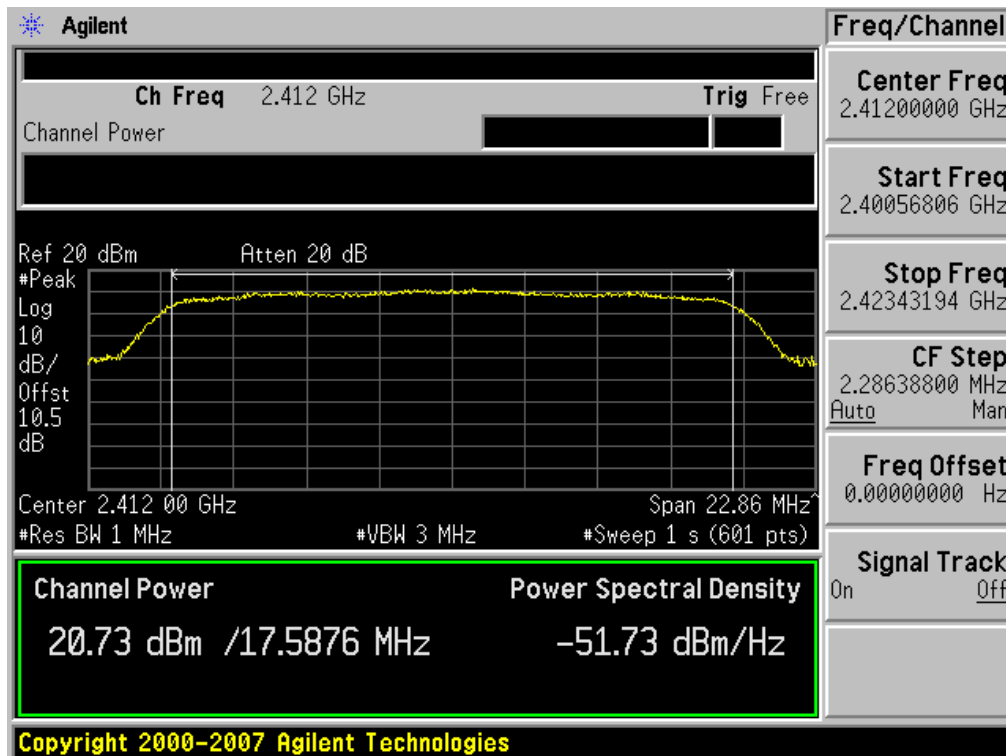


### Conducted Output Power (802.11n-CH 1) 39Mbps

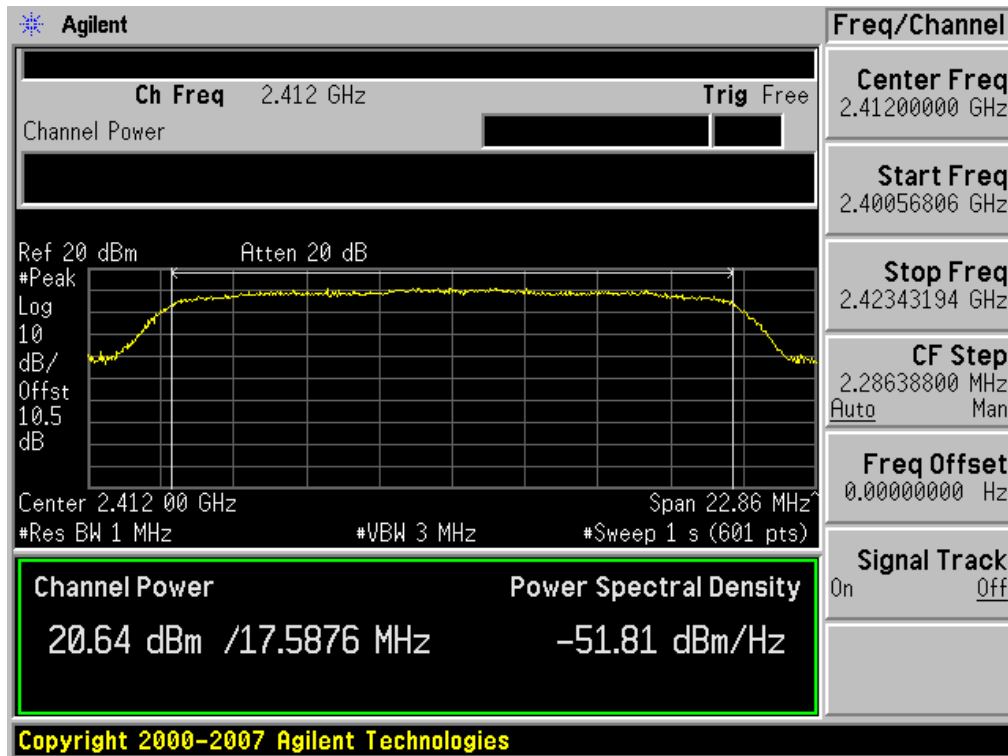


### Conducted Output Power (802.11n-CH 1) 52Mbps

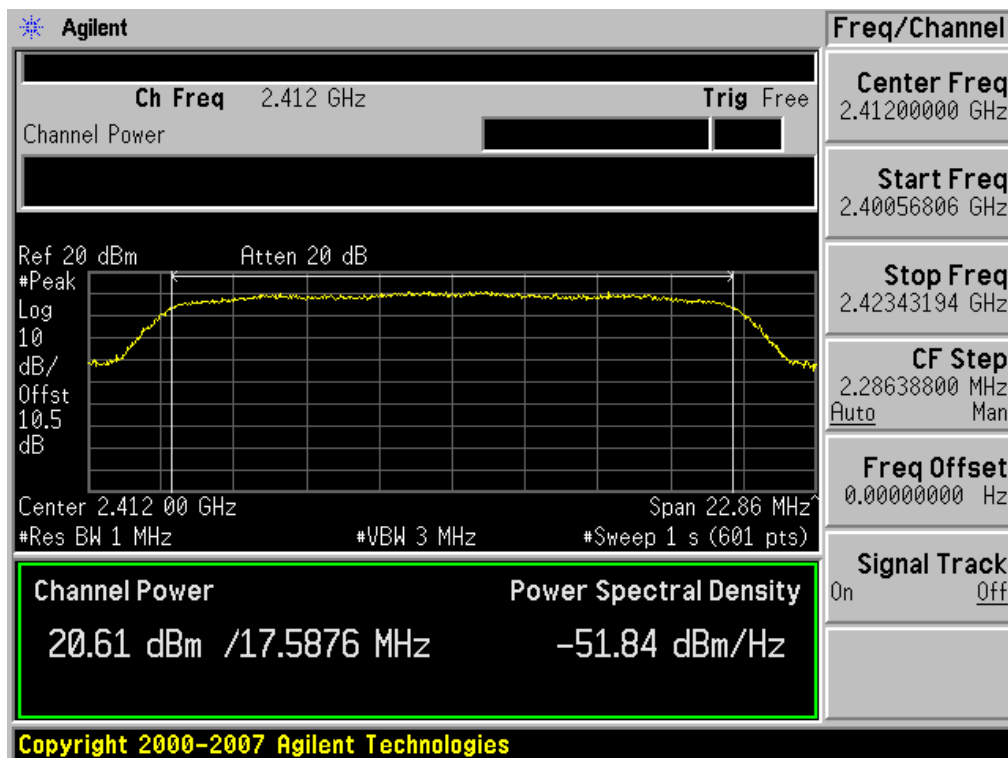


### Conducted Output Power (802.11n-CH 1) 58.5Mbps

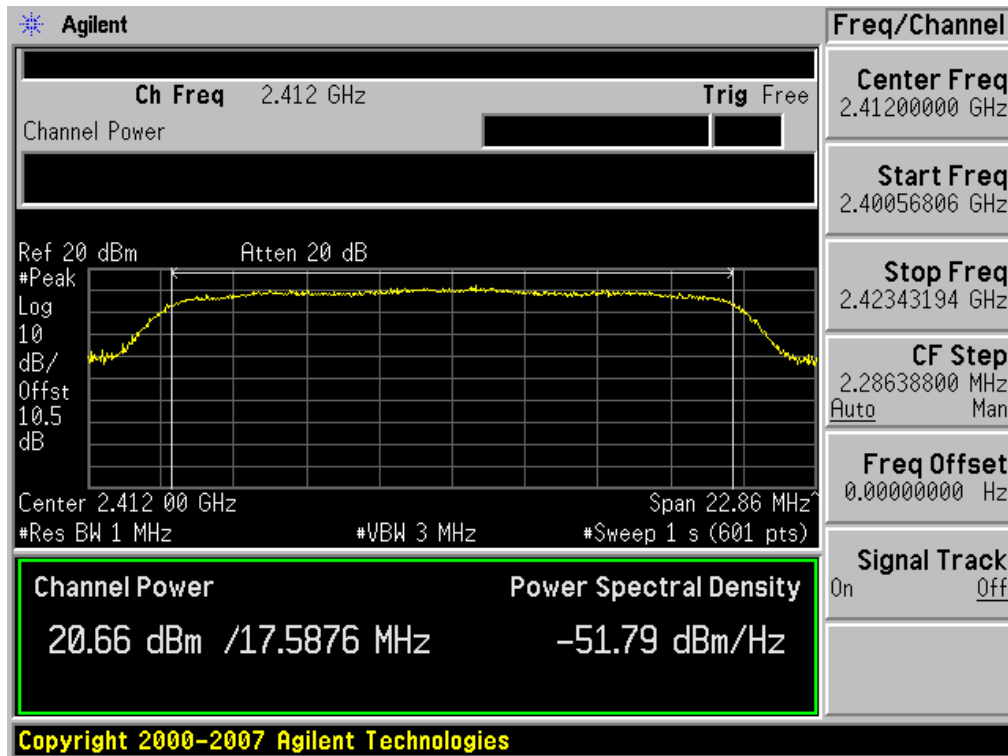


### Conducted Output Power (802.11n-CH 1) 65Mbps

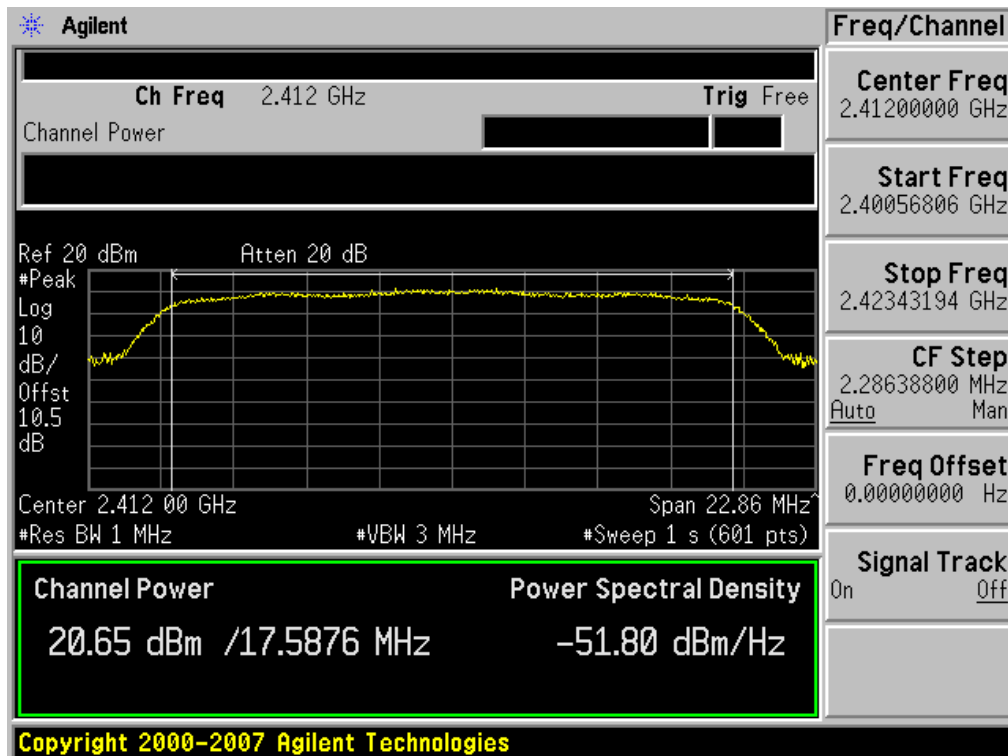


### Conducted Output Power (802.11n-CH 6) 6.5Mbps

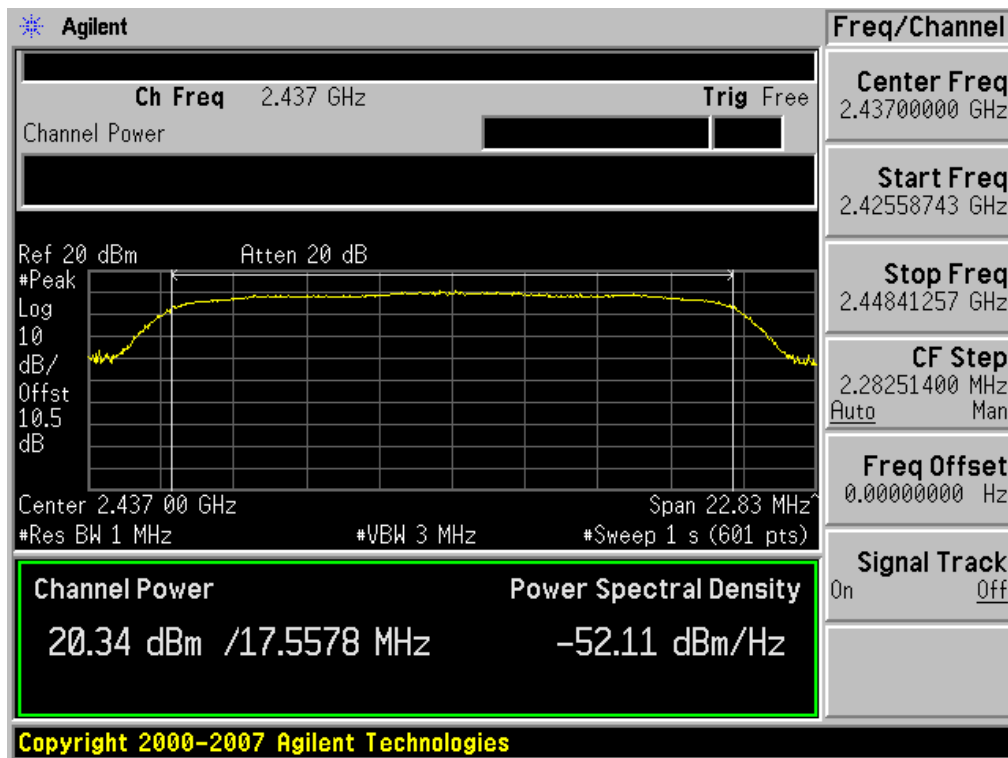


### Conducted Output Power (802.11n-CH 6) 13Mbps

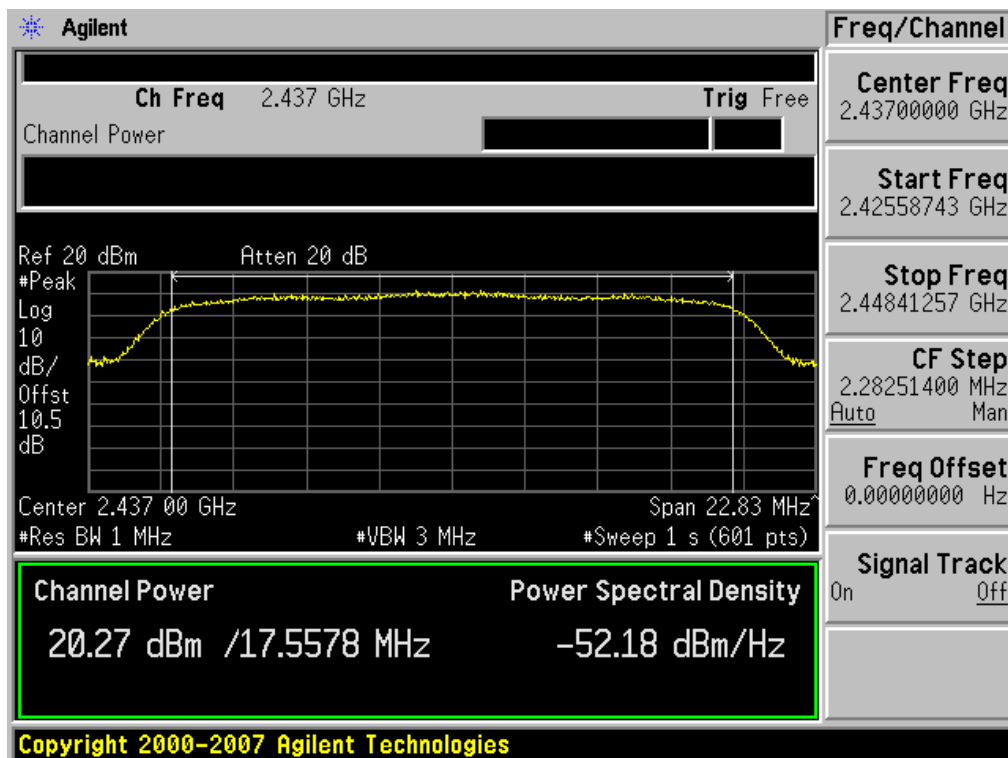


### Conducted Output Power (802.11n-CH 6) 19.5Mbps

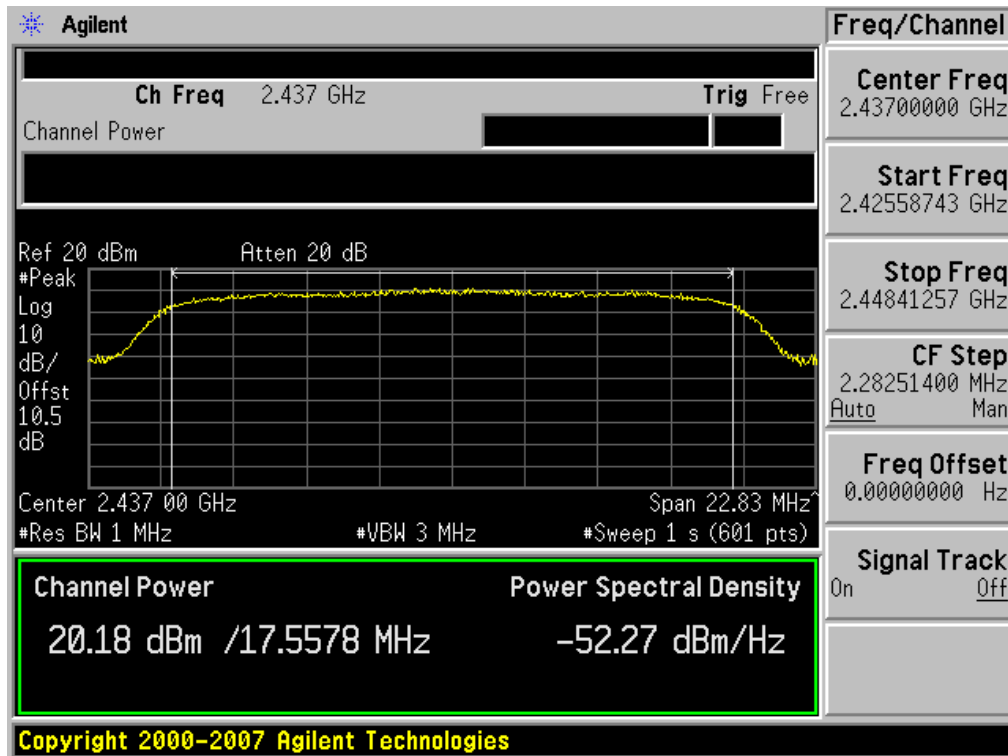


### Conducted Output Power (802.11n-CH 6) 26Mbps

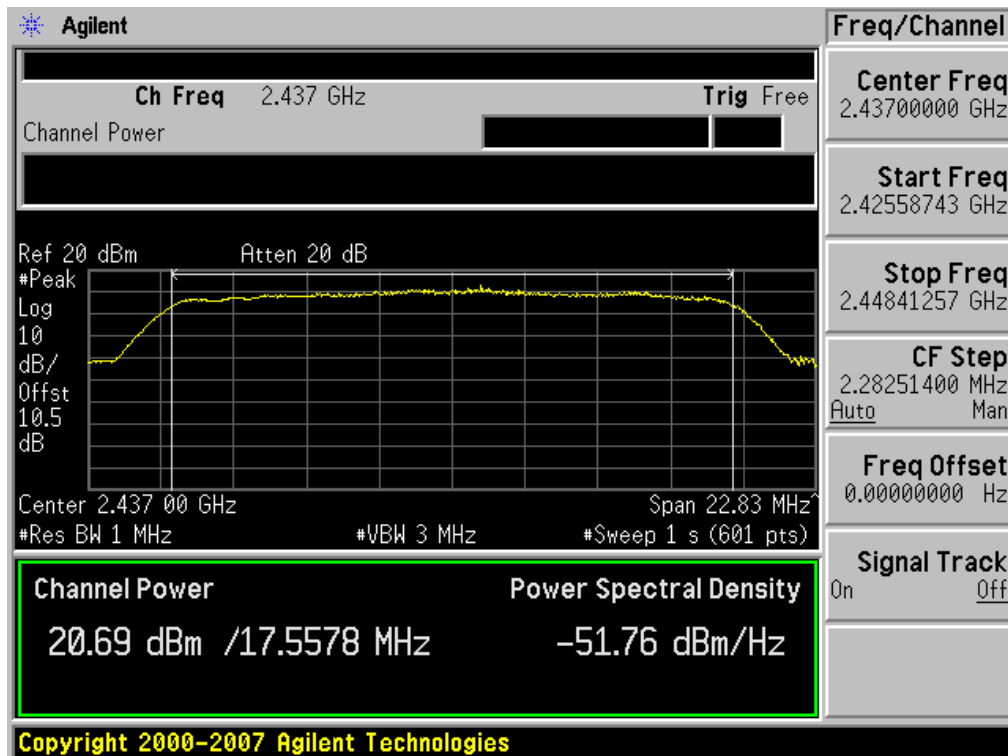


### Conducted Output Power (802.11n-CH 6) 39Mbps

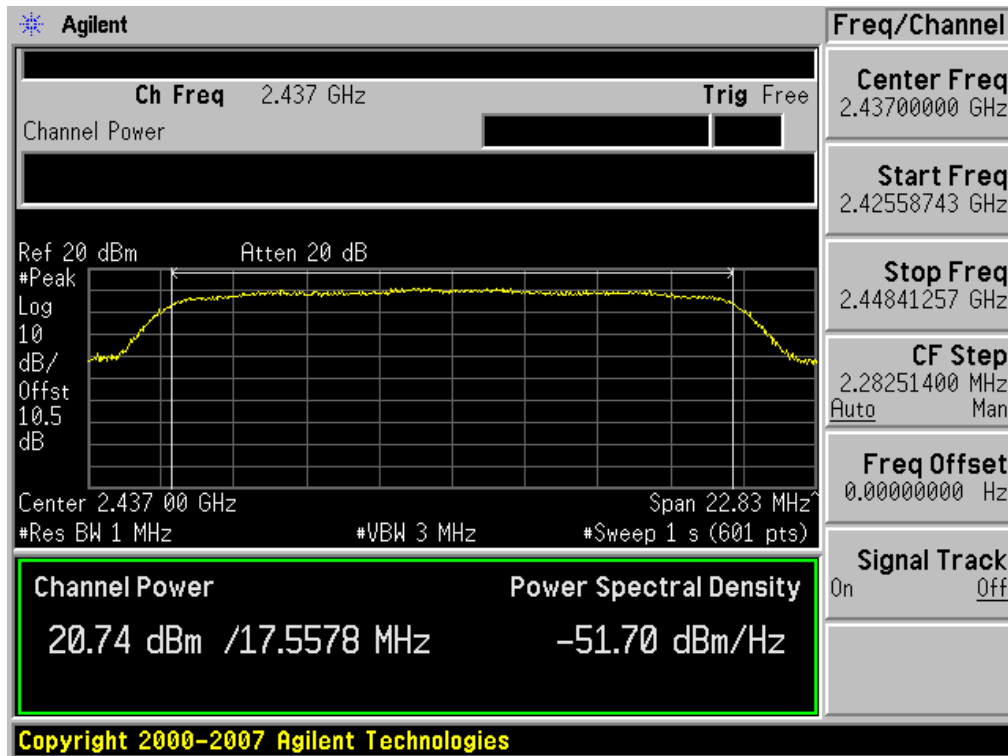


### Conducted Output Power (802.11n-CH 6) 52Mbps

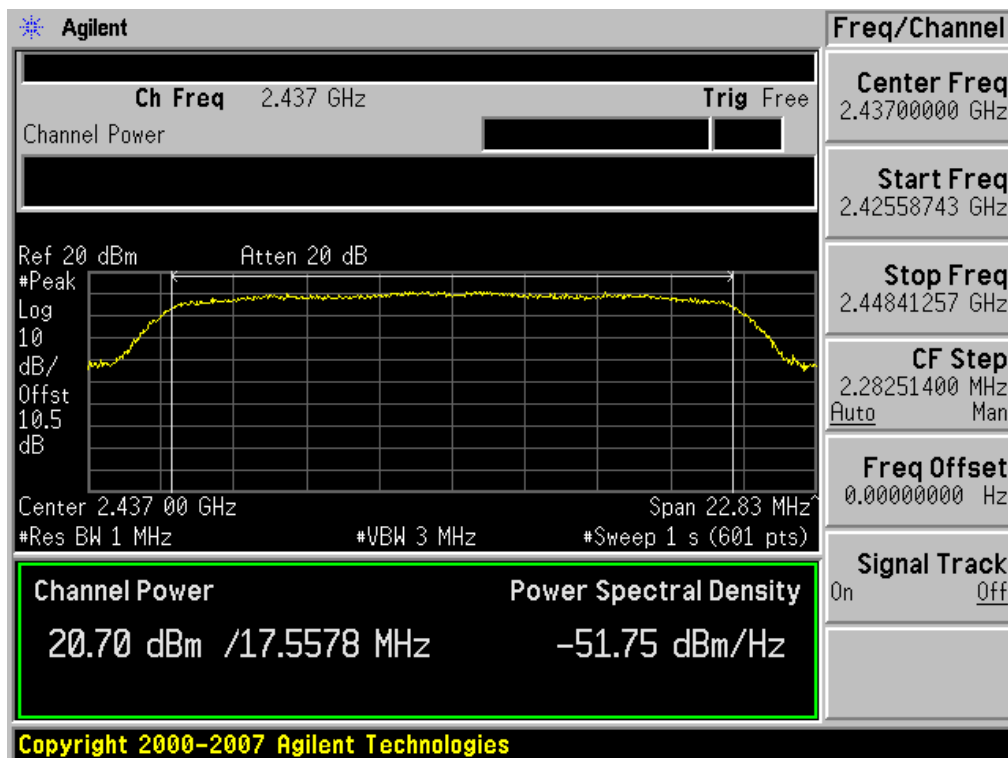


### Conducted Output Power (802.11n-CH 6) 58.5Mbps

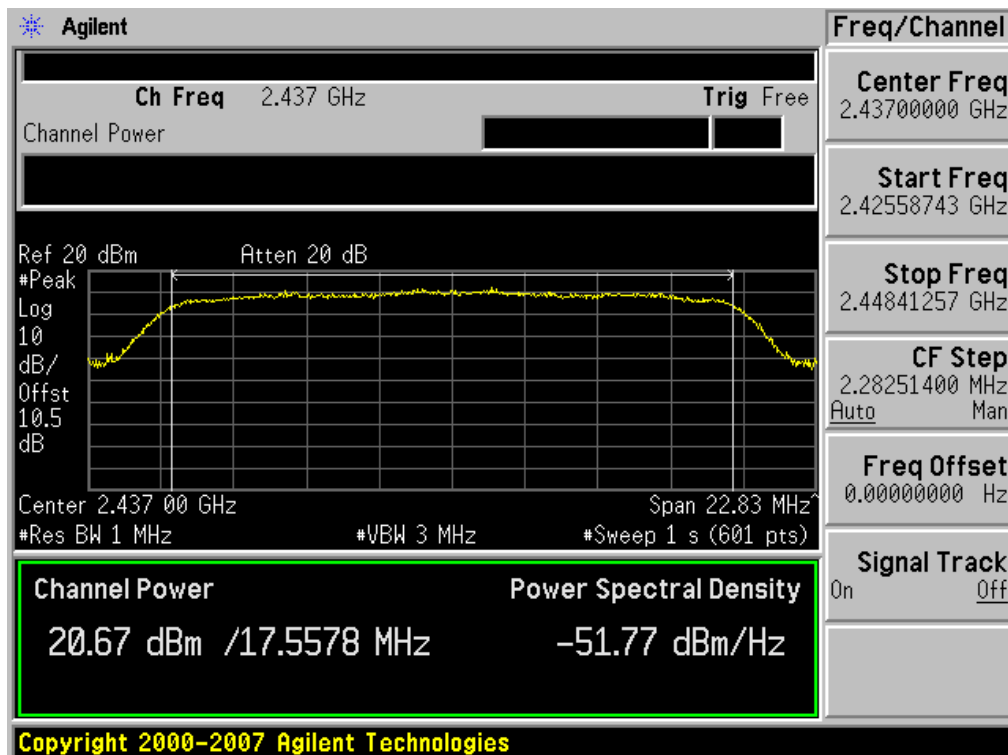


### Conducted Output Power (802.11n-CH 6) 65Mbps

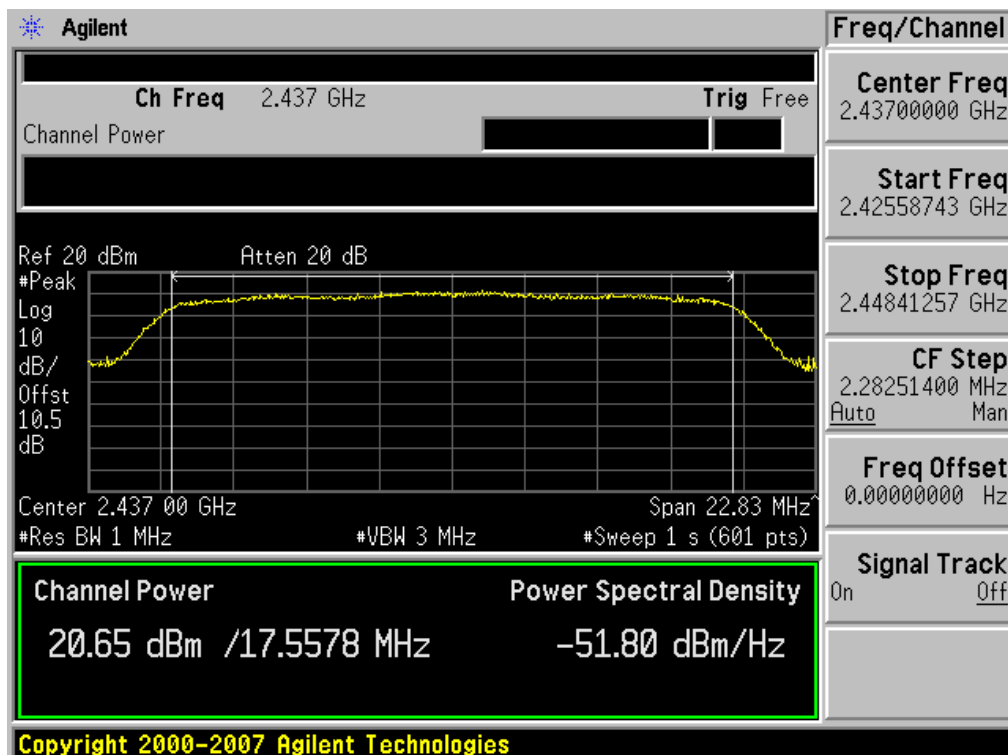


### Conducted Output Power (802.11n-CH 11) 6.5Mbps

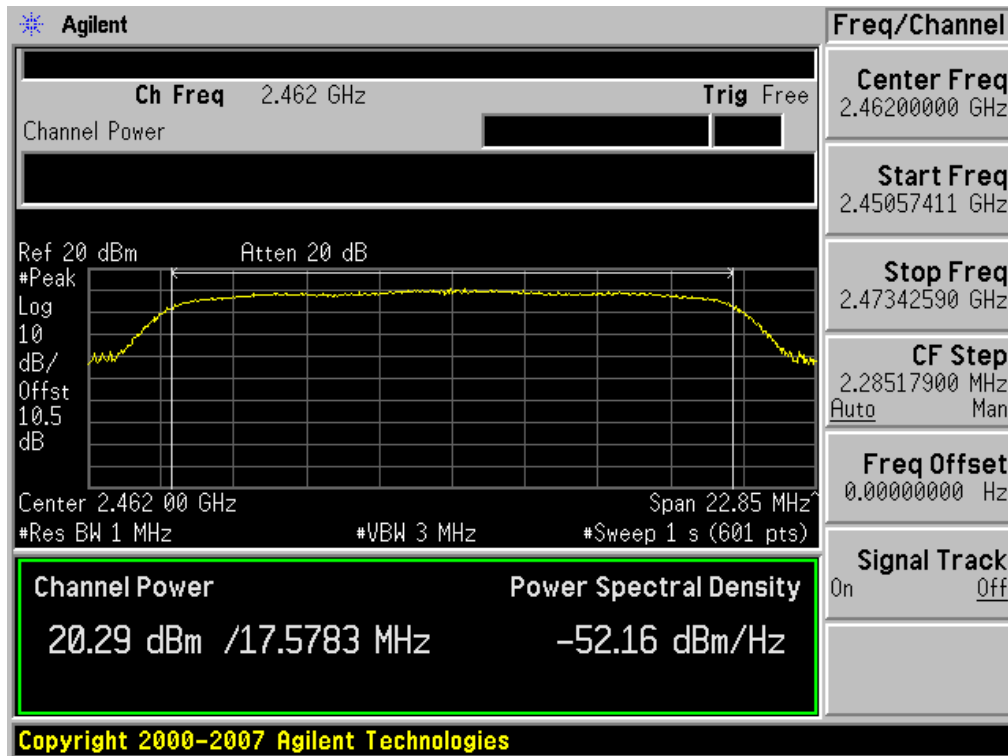


### Conducted Output Power (802.11n-CH 11) 13Mbps

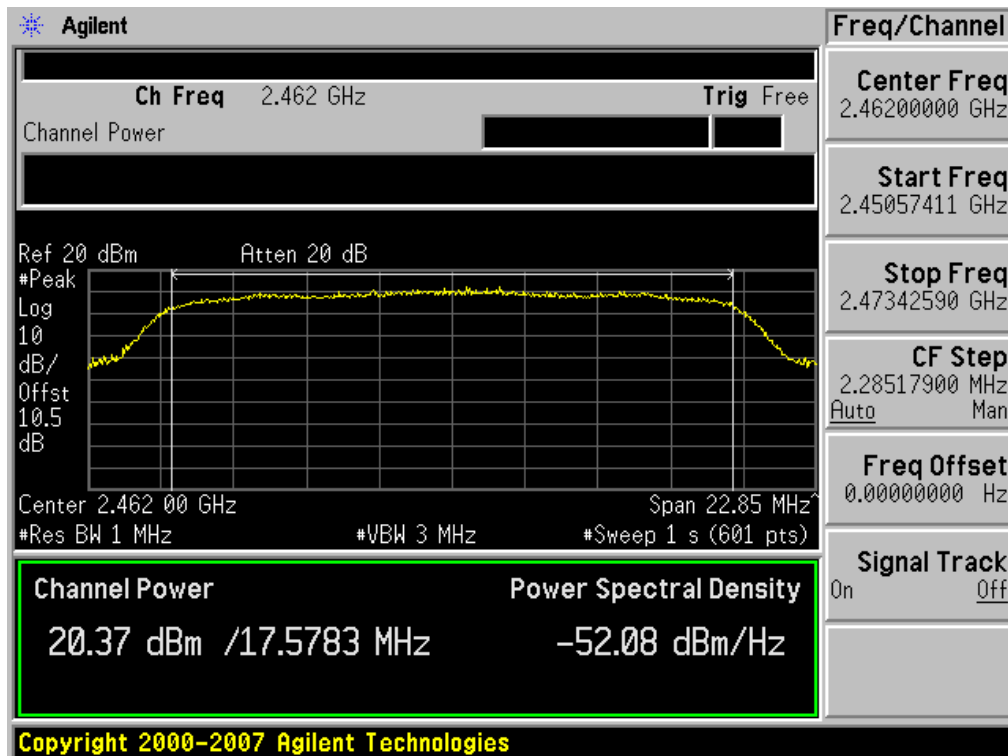


### Conducted Output Power (802.11n-CH 11) 19.5Mbps

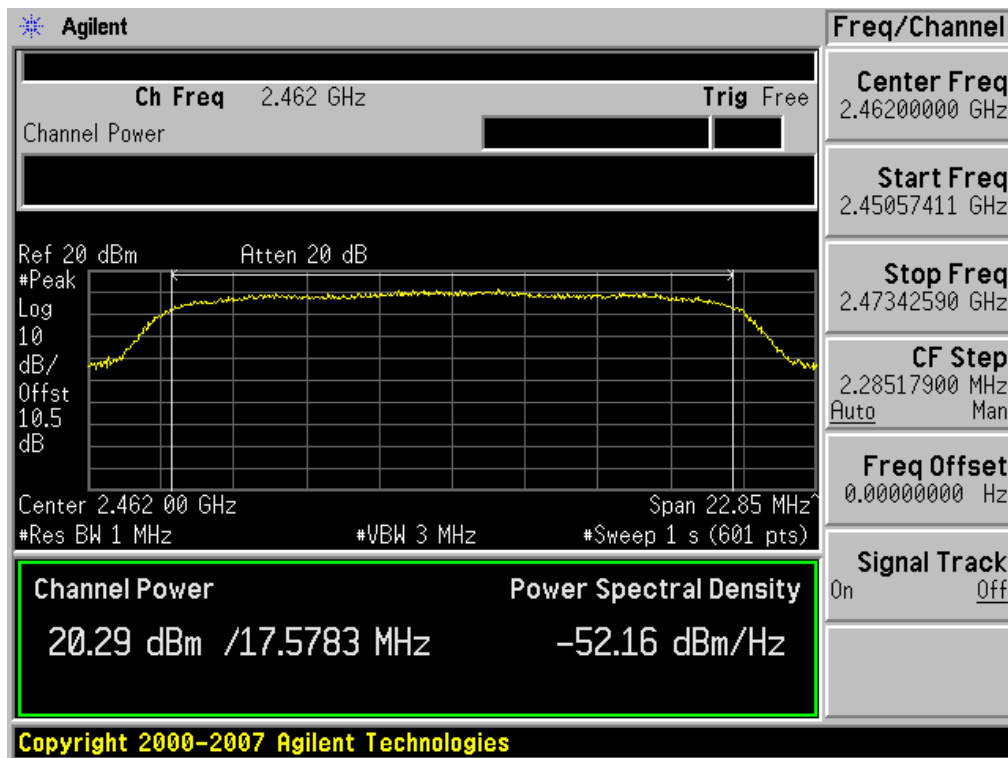


### Conducted Output Power (802.11n-CH 11) 26Mbps

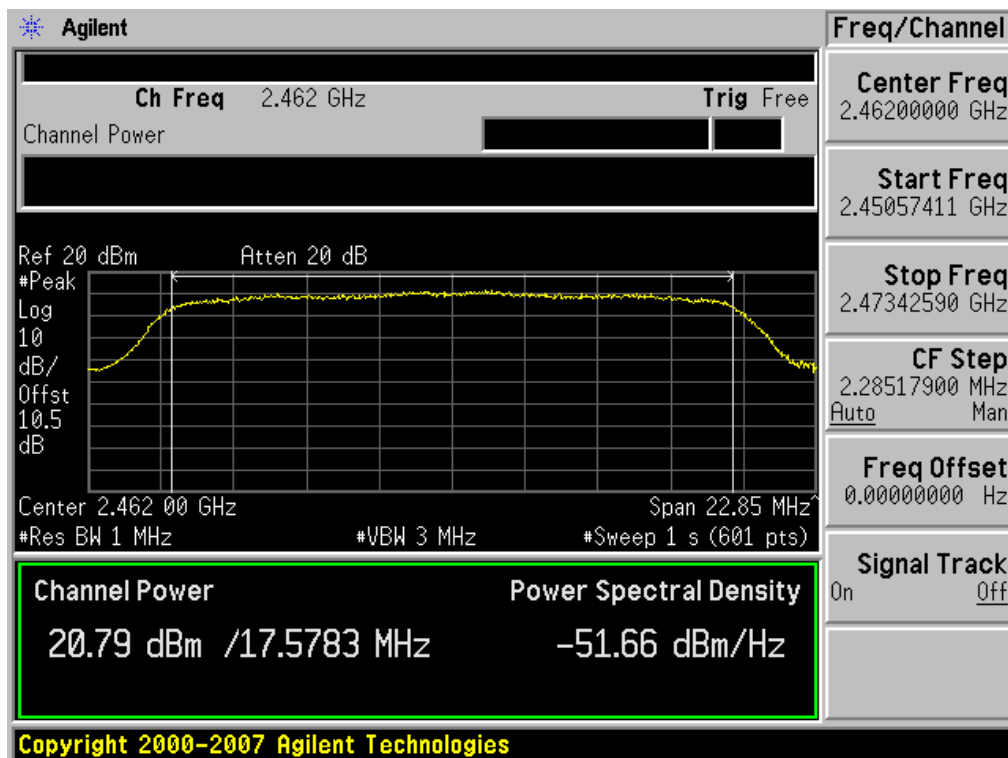


### Conducted Output Power (802.11n-CH 11) 39Mbps

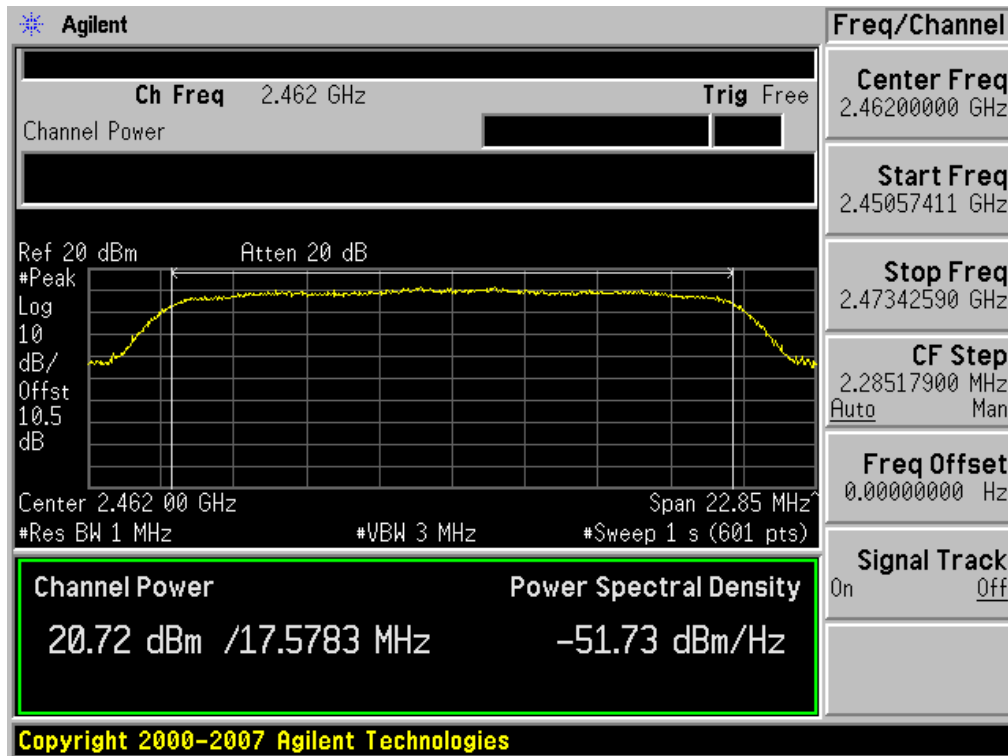


### Conducted Output Power (802.11n-CH 11) 52Mbps

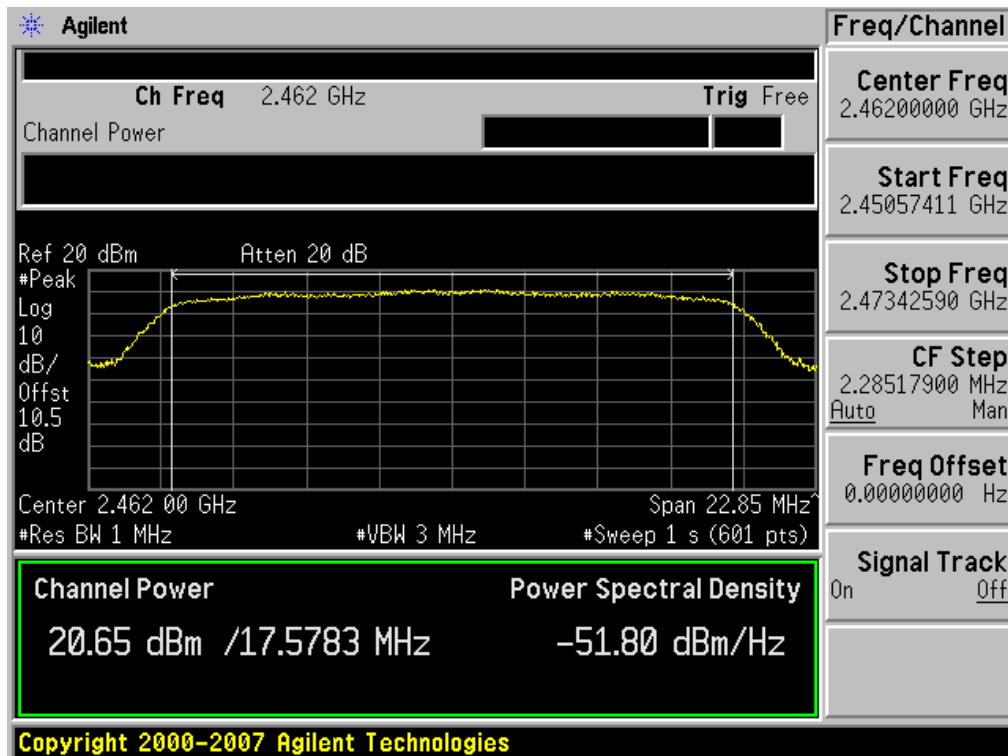

### Conducted Output Power (802.11n-CH 11) 58.5Mbps

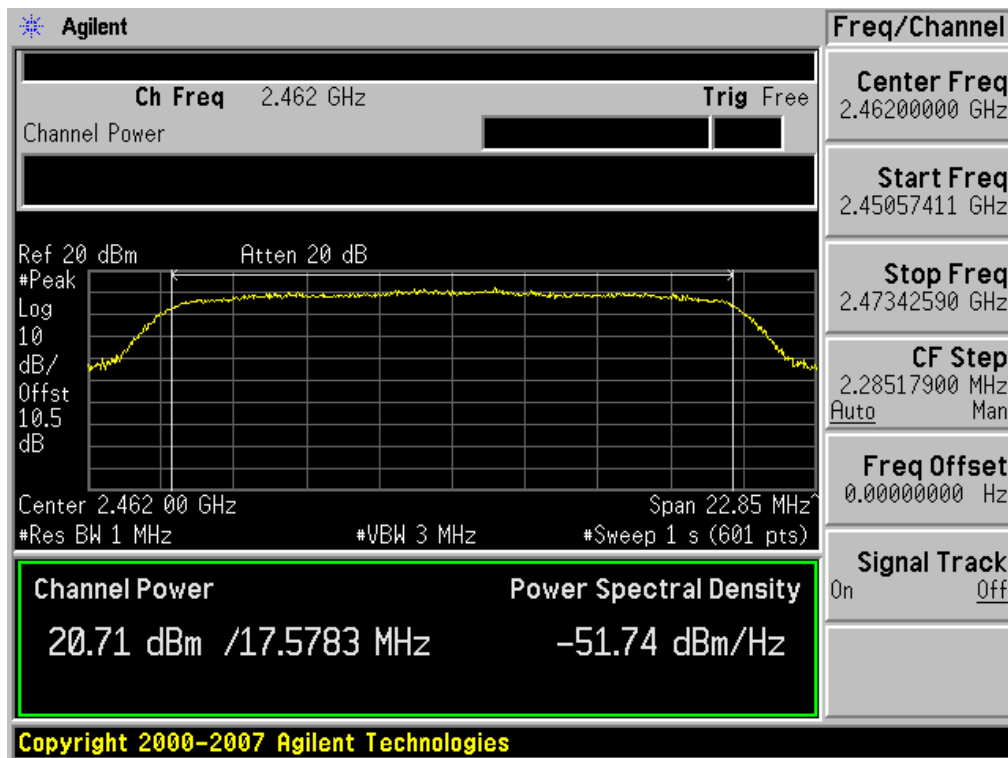


### Conducted Output Power (802.11n-CH 11) 65Mbps

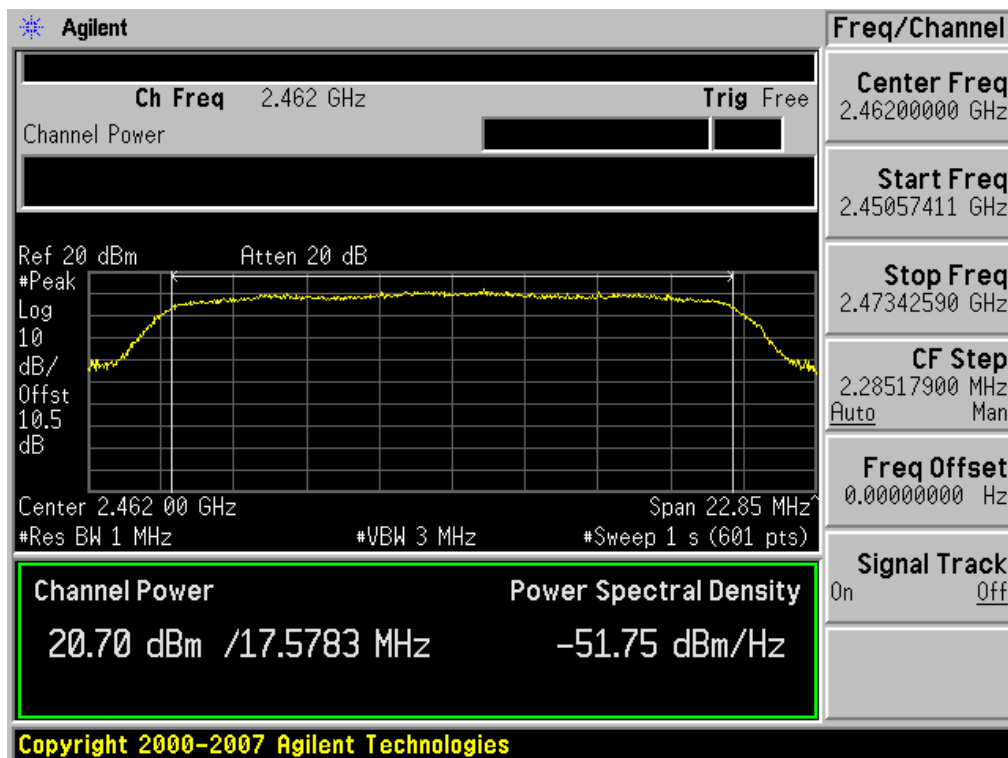


■ **RESULT PLOTS-Average**


**Conducted Output Power (802.11b-CH 1) 1Mbps**

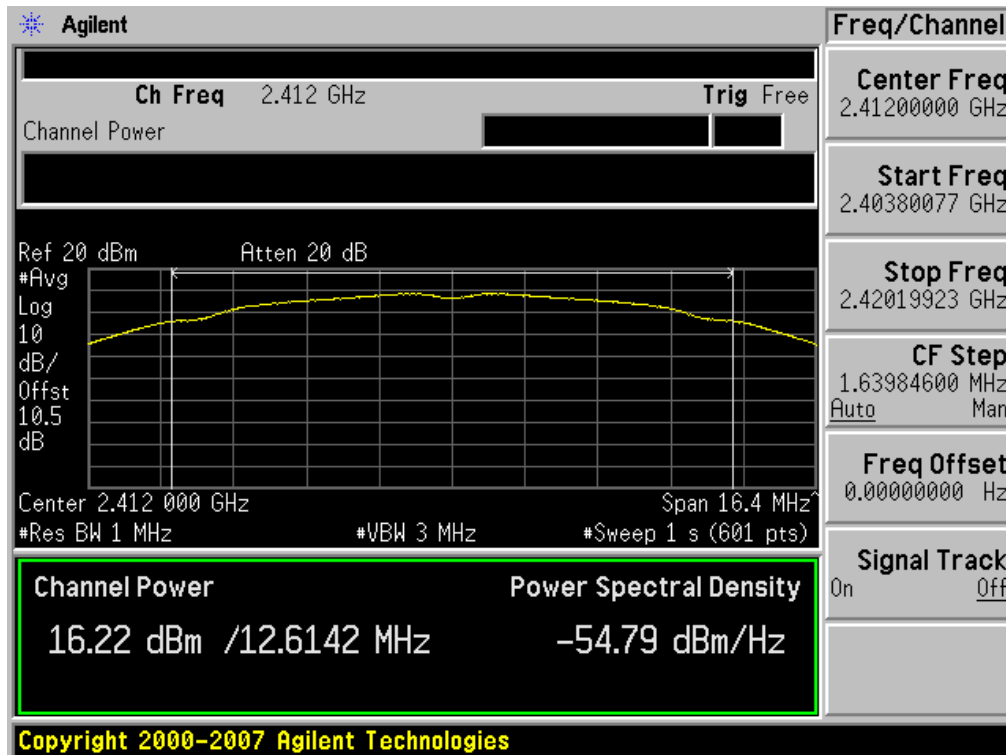


**Conducted Output Power (802.11b-CH 1) 2Mbps**

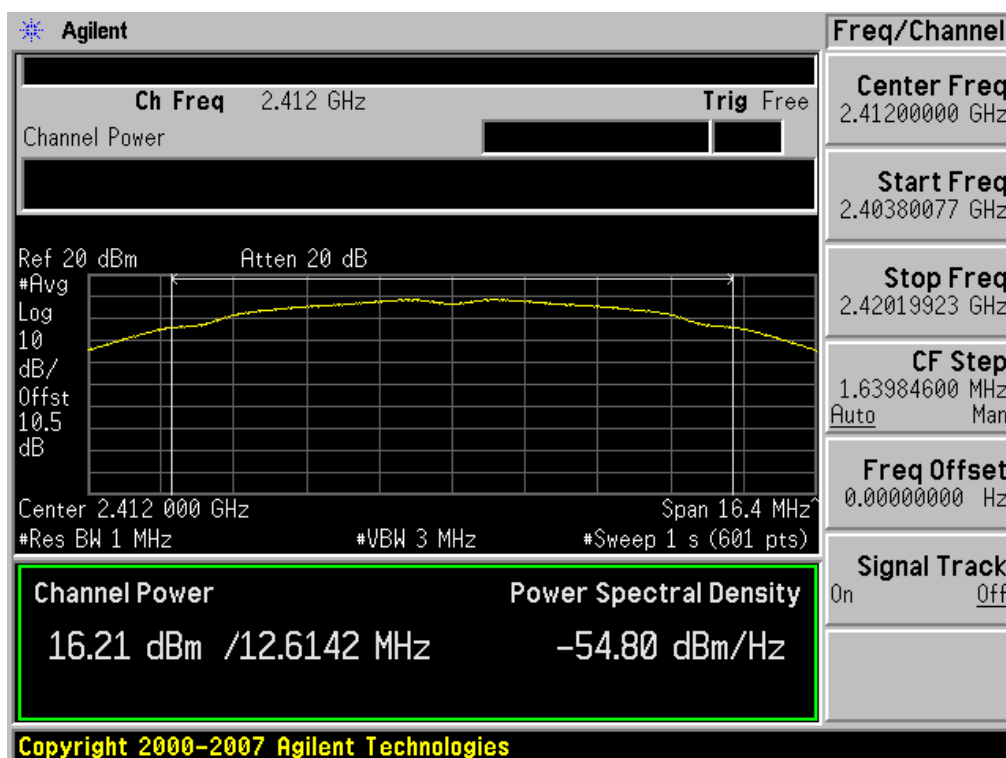


### Conducted Output Power (802.11b-CH 1) 5.5Mbps

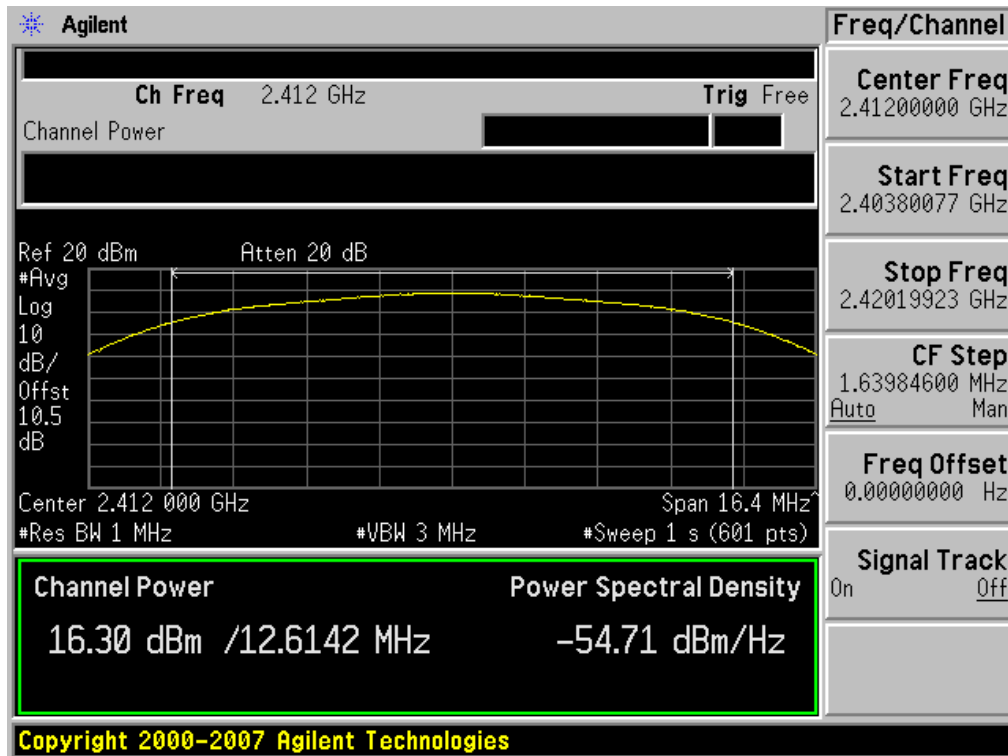


### Conducted Output Power (802.11b-CH 1) 11Mbps

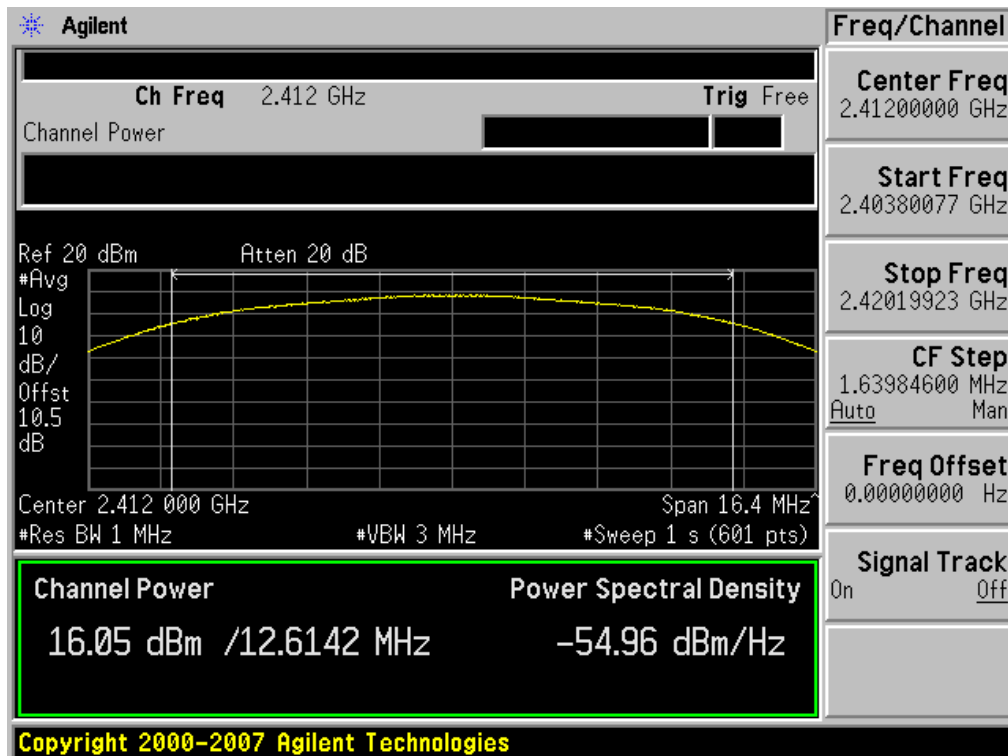


### Conducted Output Power (802.11b-CH 6) 1Mbps

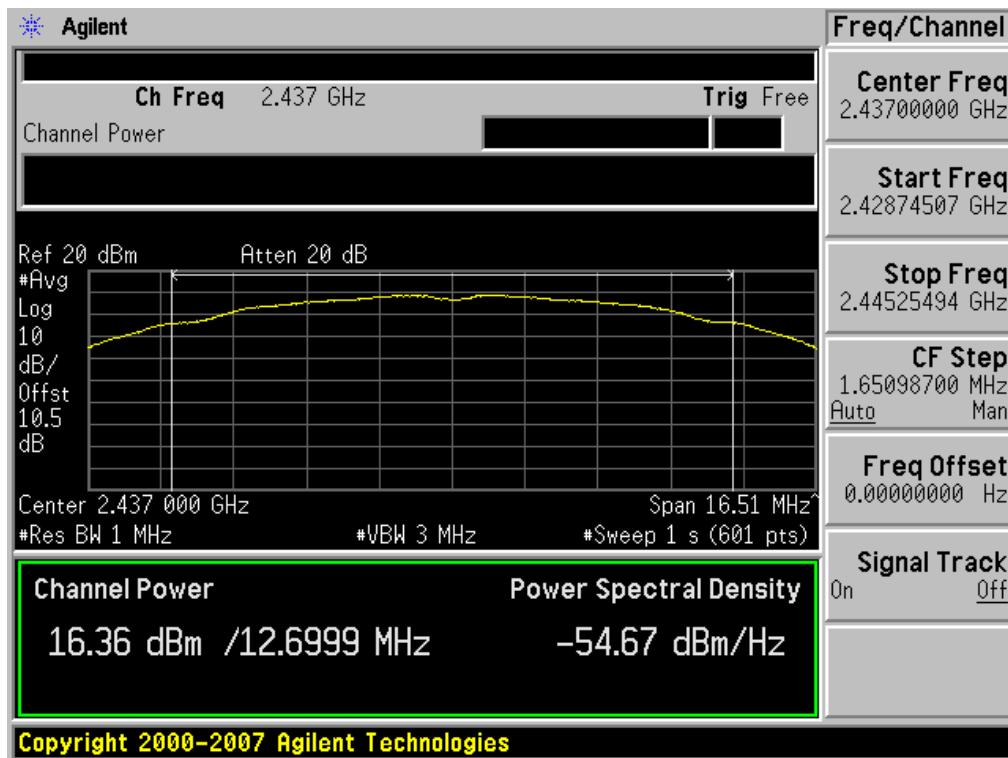


### Conducted Output Power (802.11b-CH 6) 2Mbps

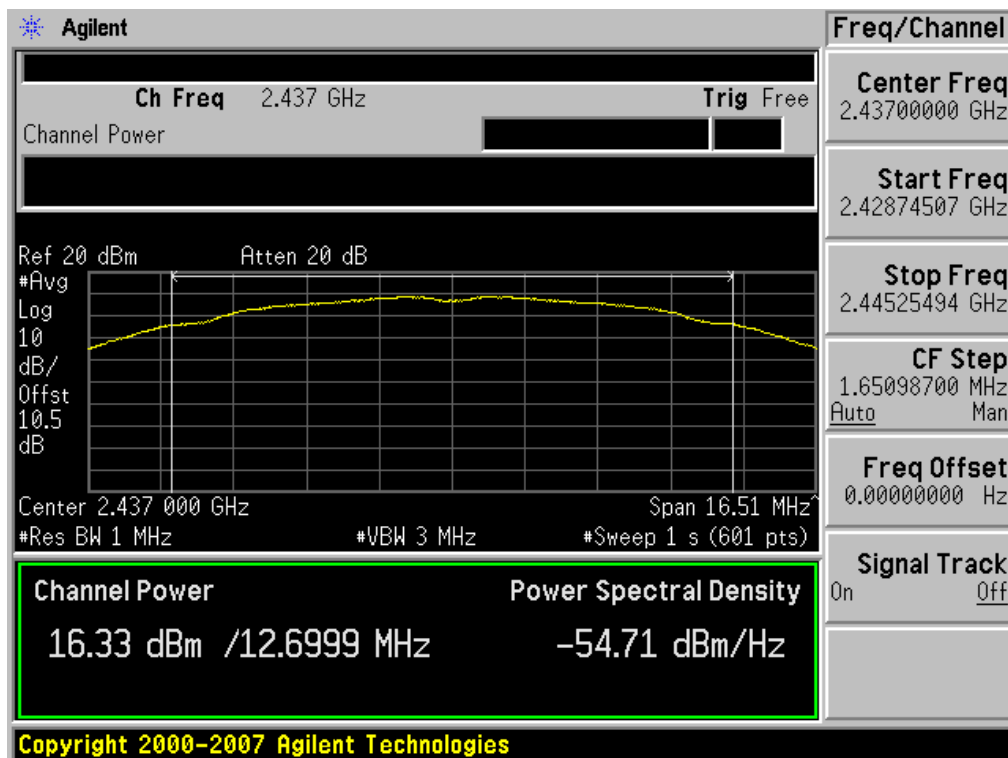


### Conducted Output Power (802.11b-CH 6) 5.5Mbps

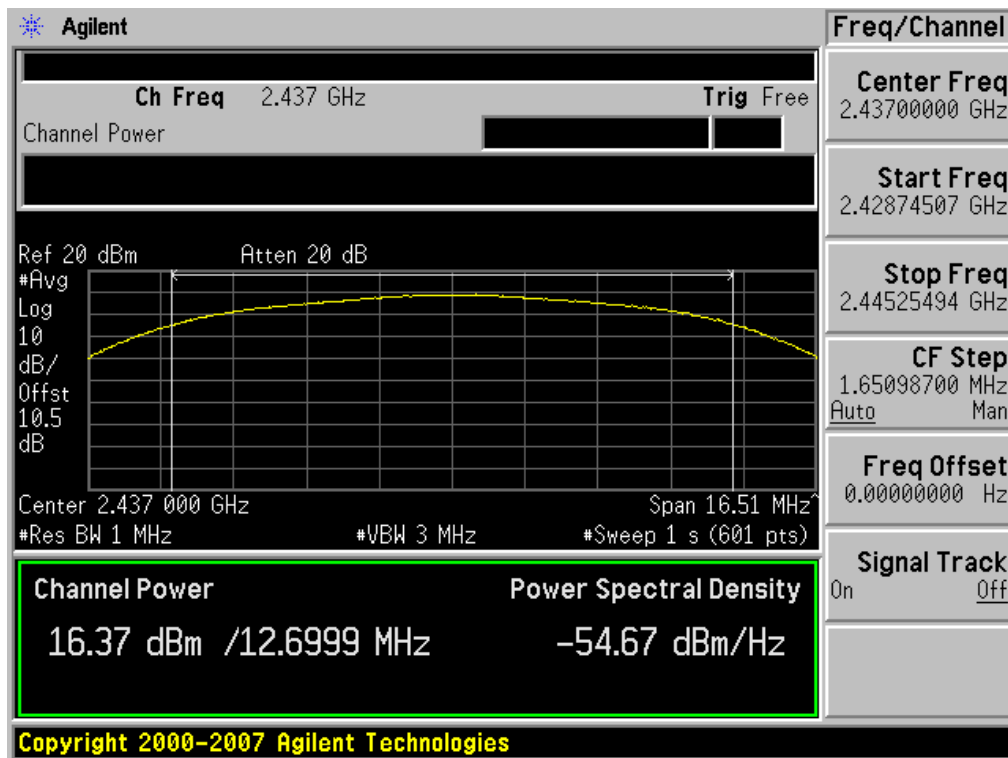


### Conducted Output Power (802.11b-CH 6) 11Mbps

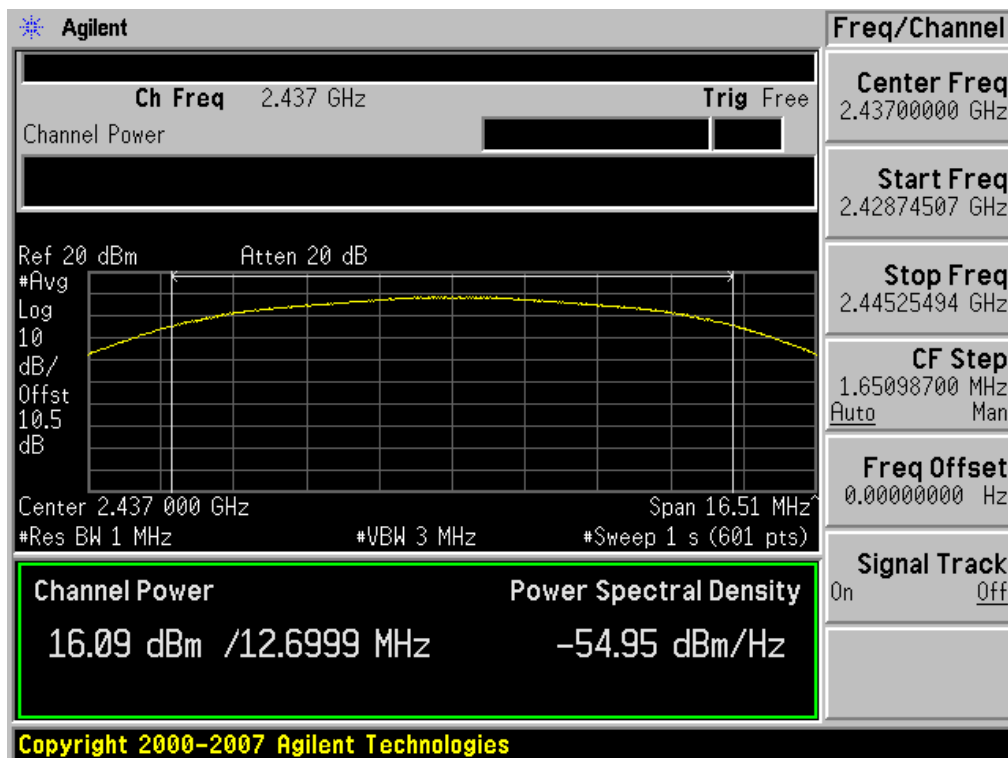


### Conducted Output Power (802.11b-CH 11) 1Mbps

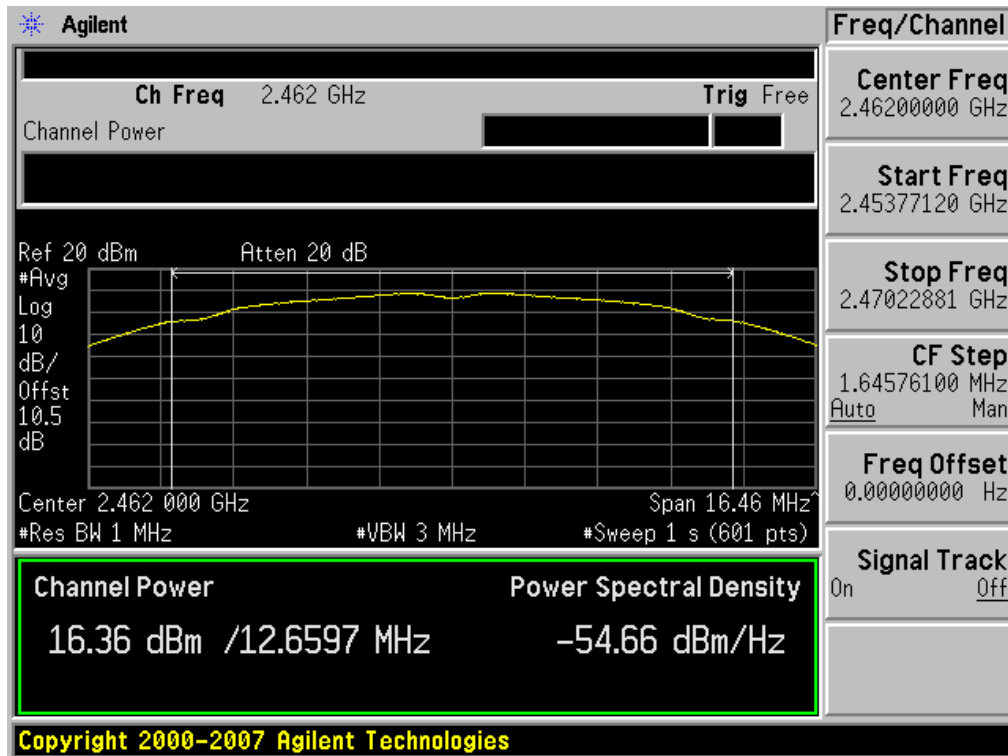


### Conducted Output Power (802.11b-CH 11) 2Mbps

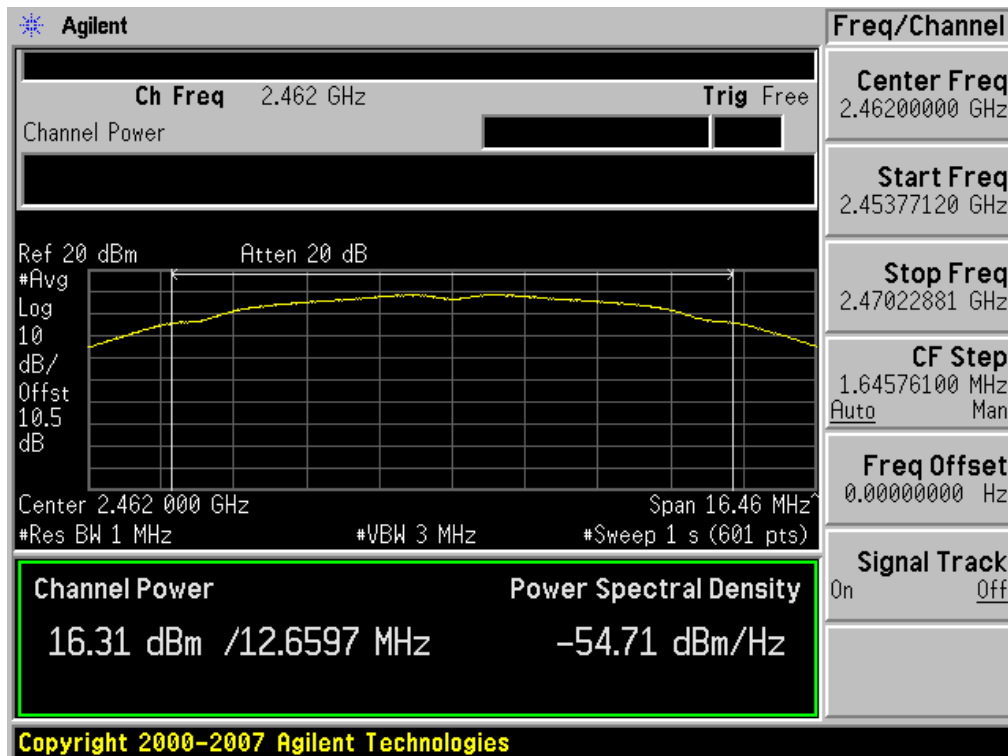


### Conducted Output Power (802.11b-CH 11) 5.5Mbps

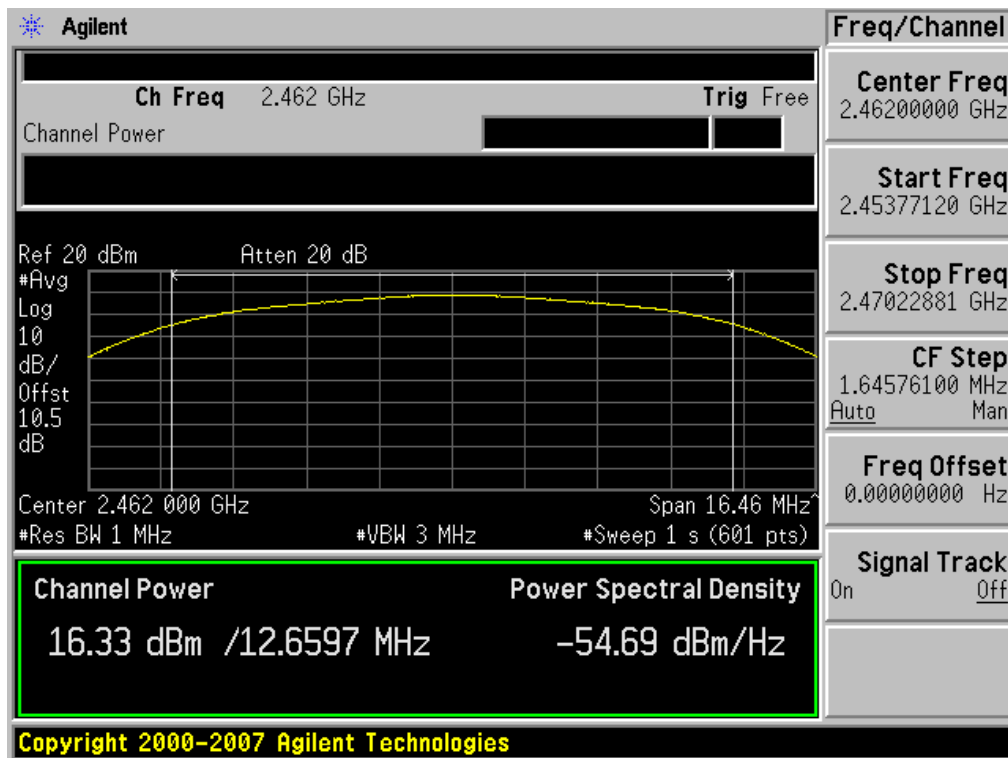


### Conducted Output Power (802.11b-CH 11) 11Mbps

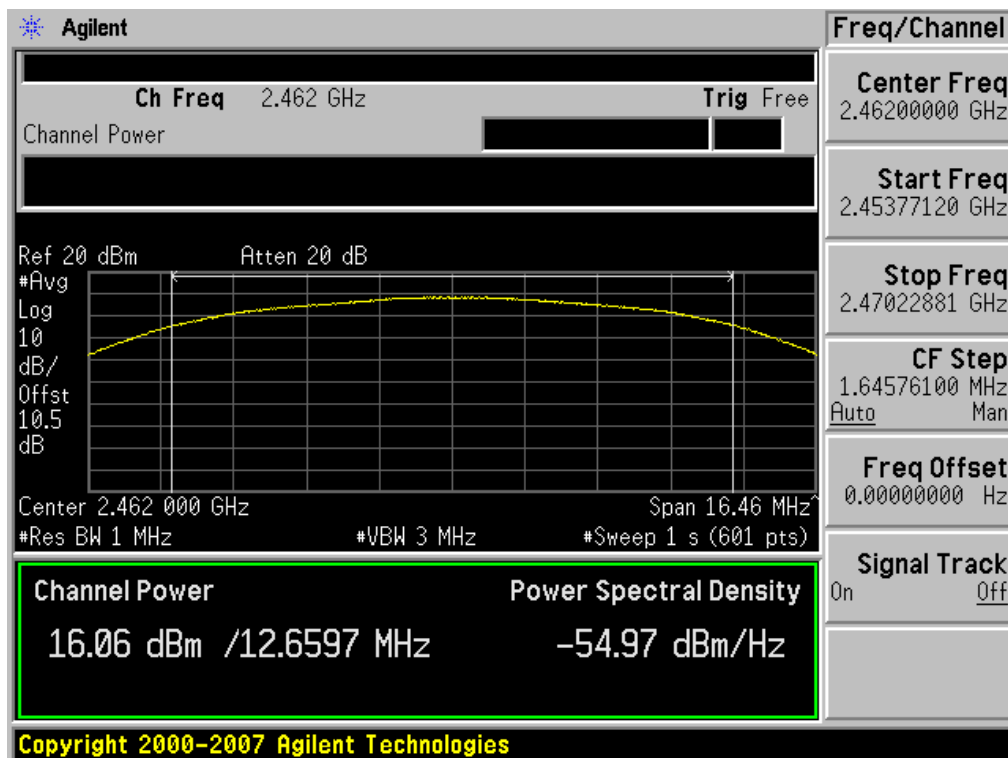


### Conducted Output Power (802.11g-CH 1) 6Mbps

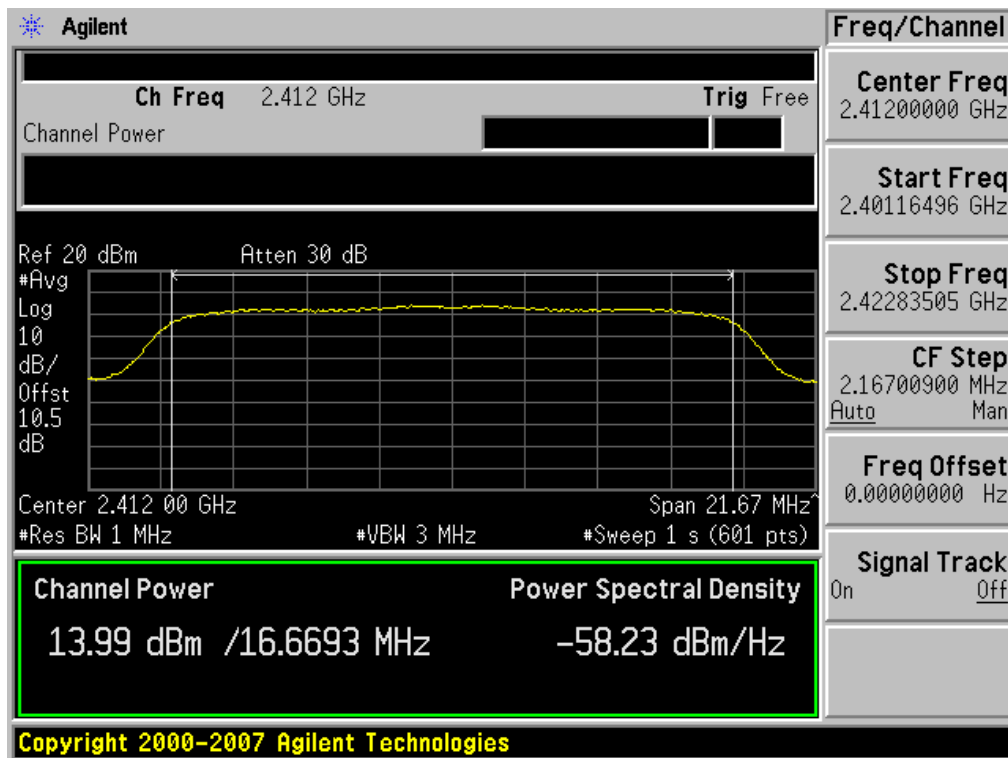


### Conducted Output Power (802.11g-CH 1) 9Mbps

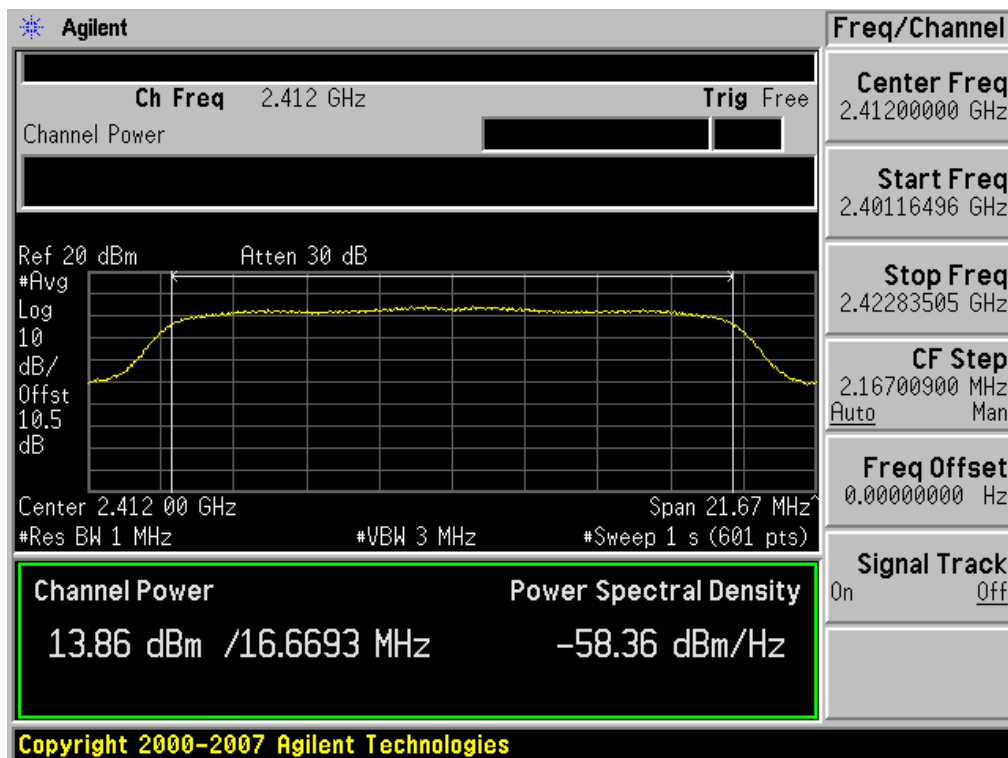


### Conducted Output Power (802.11g-CH 1) 12Mbps

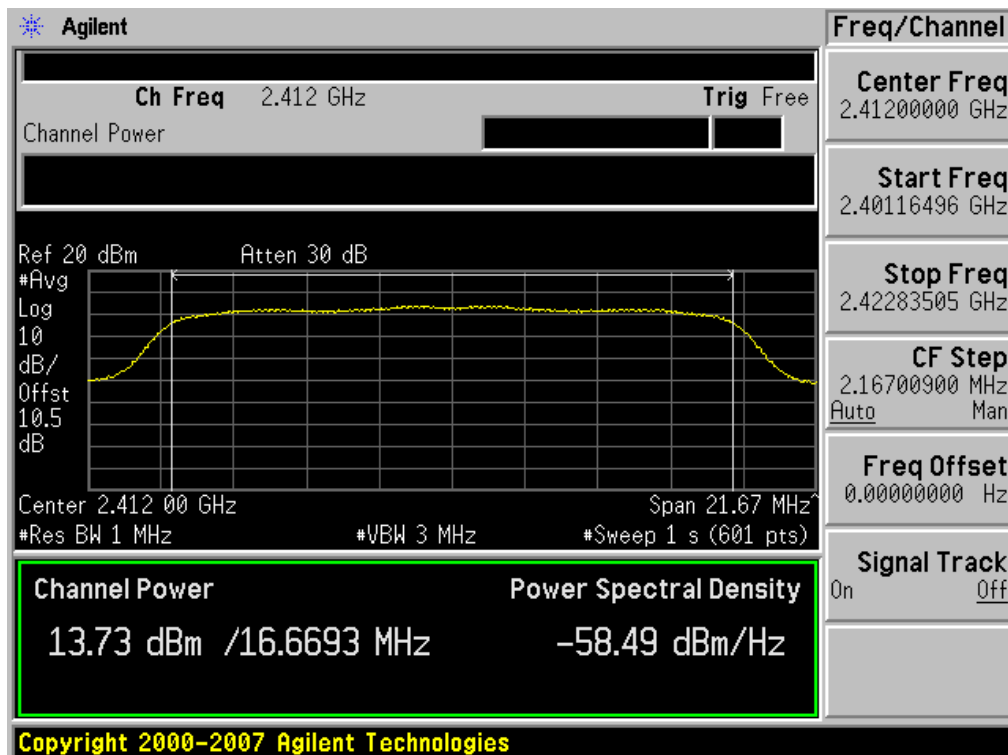


### Conducted Output Power (802.11g-CH 1) 18Mbps

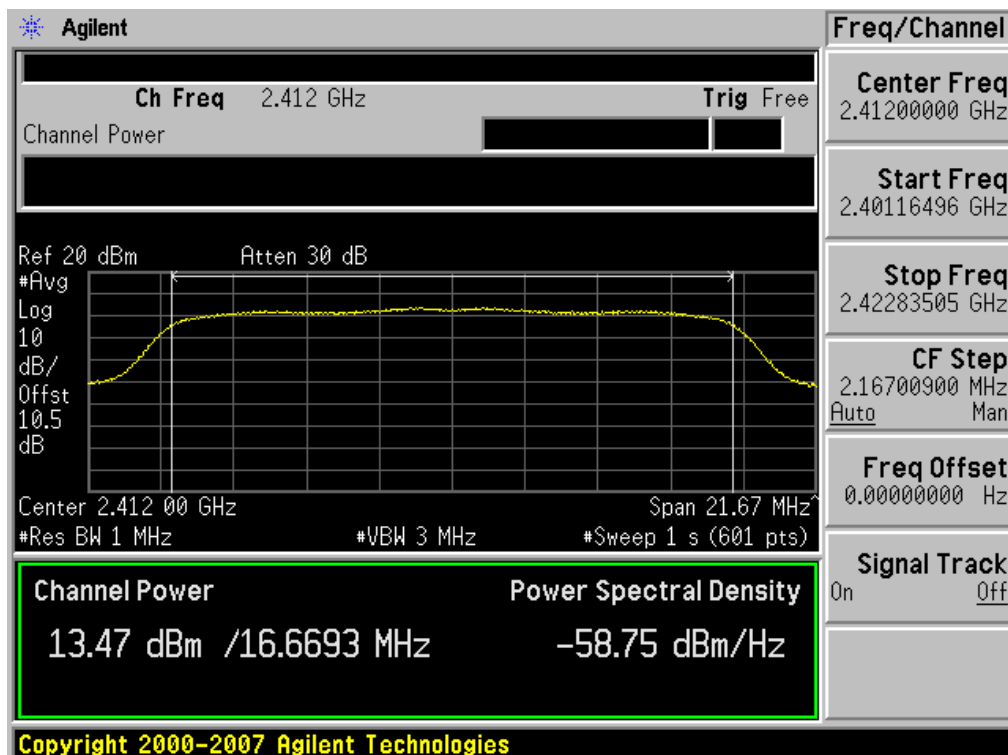


### Conducted Output Power (802.11g-CH 1) 24Mbps

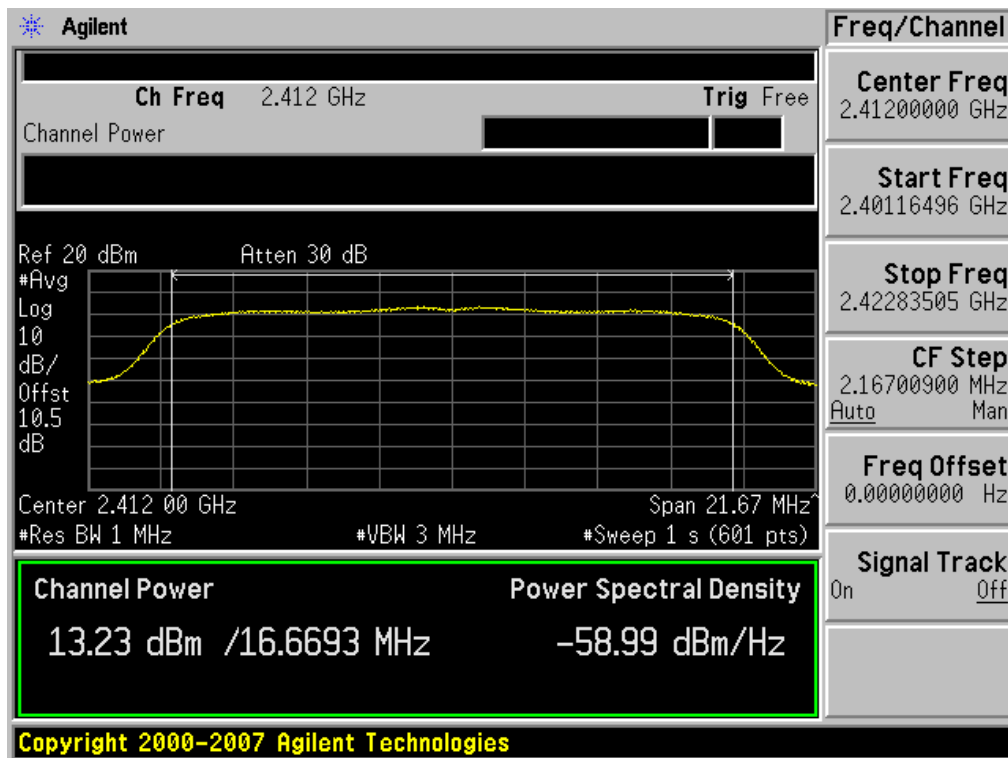


### Conducted Output Power (802.11g-CH 1) 36Mbps

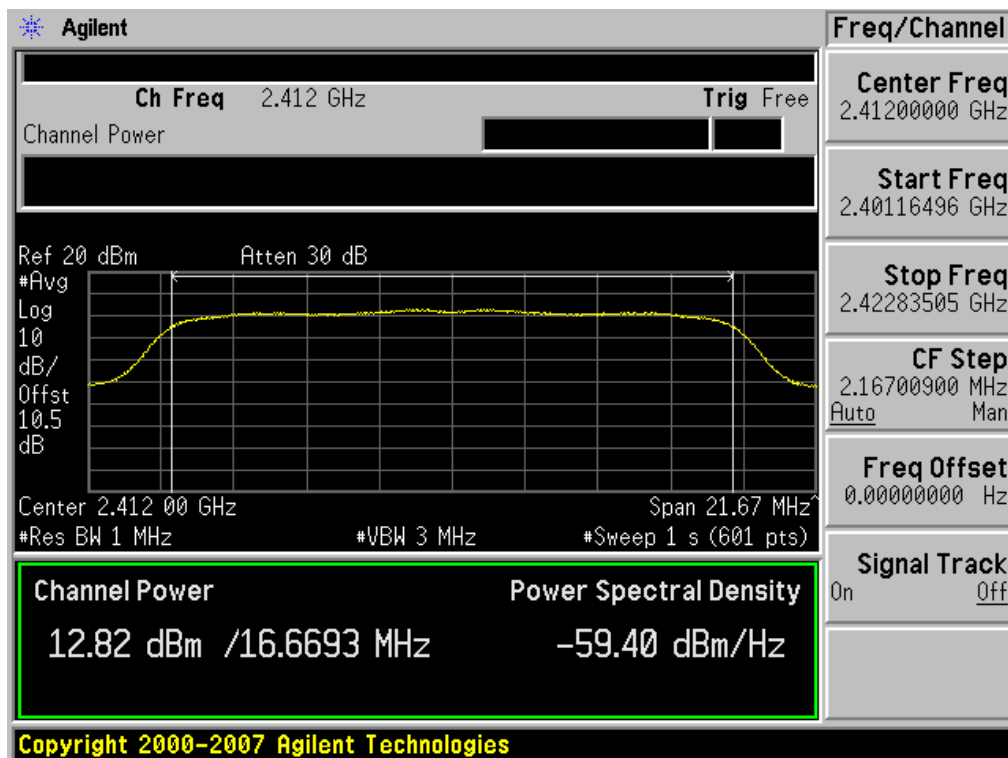


### Conducted Output Power (802.11g-CH 1) 48Mbps

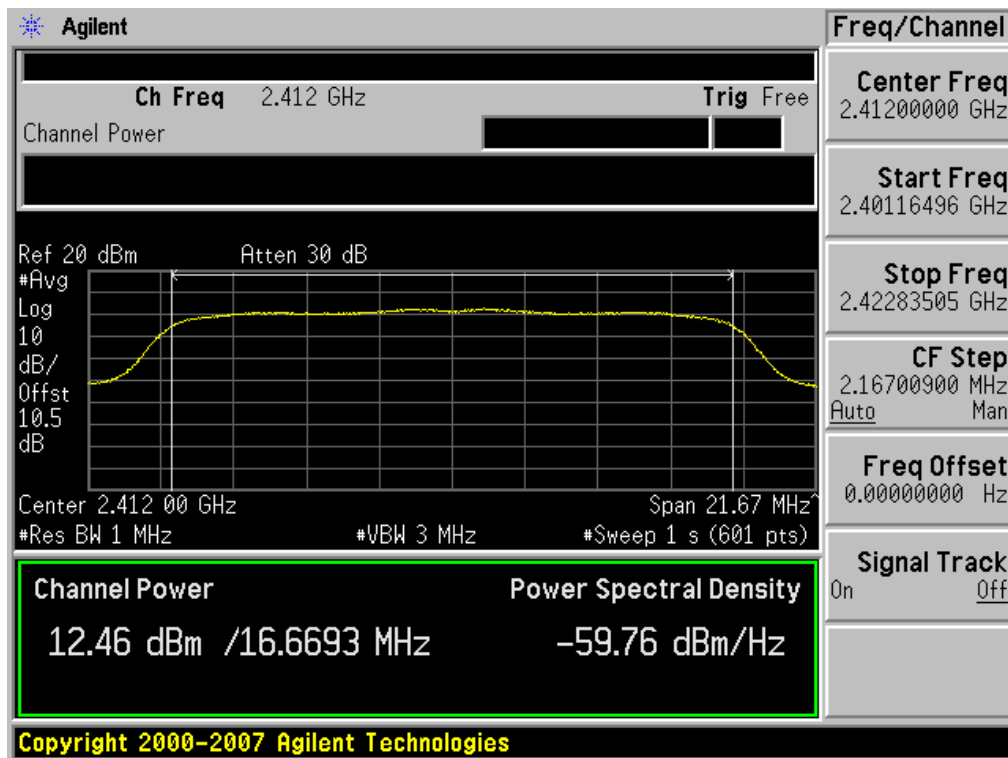


### Conducted Output Power (802.11g-CH 1) 54Mbps

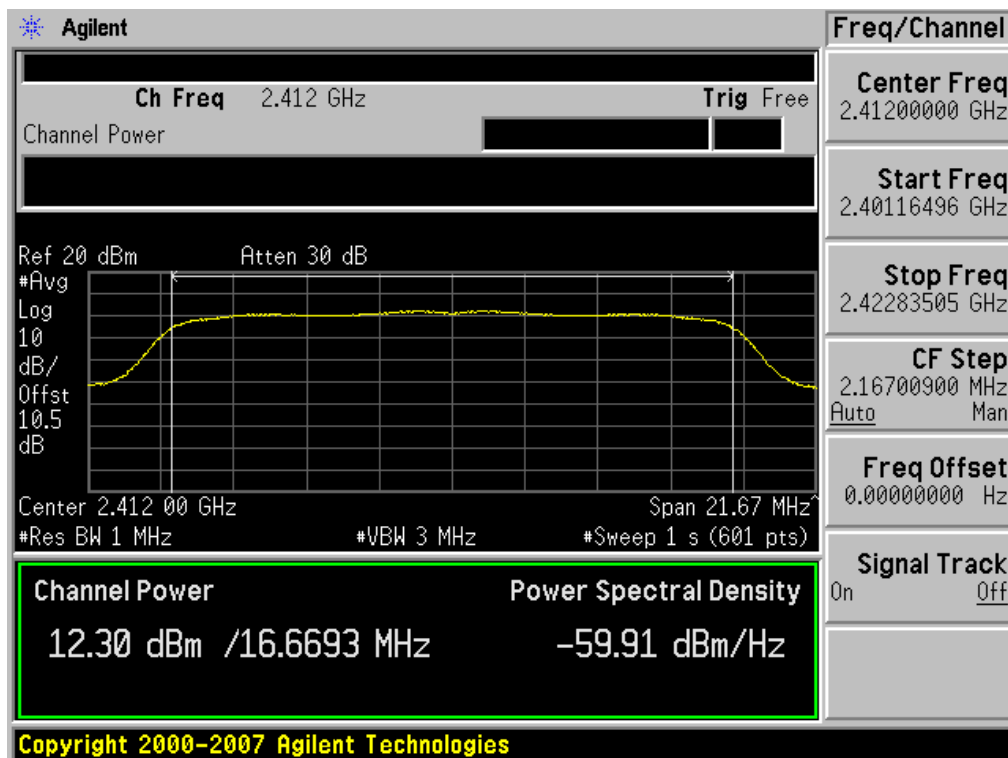


### Conducted Output Power (802.11g-CH 6) 6Mbps

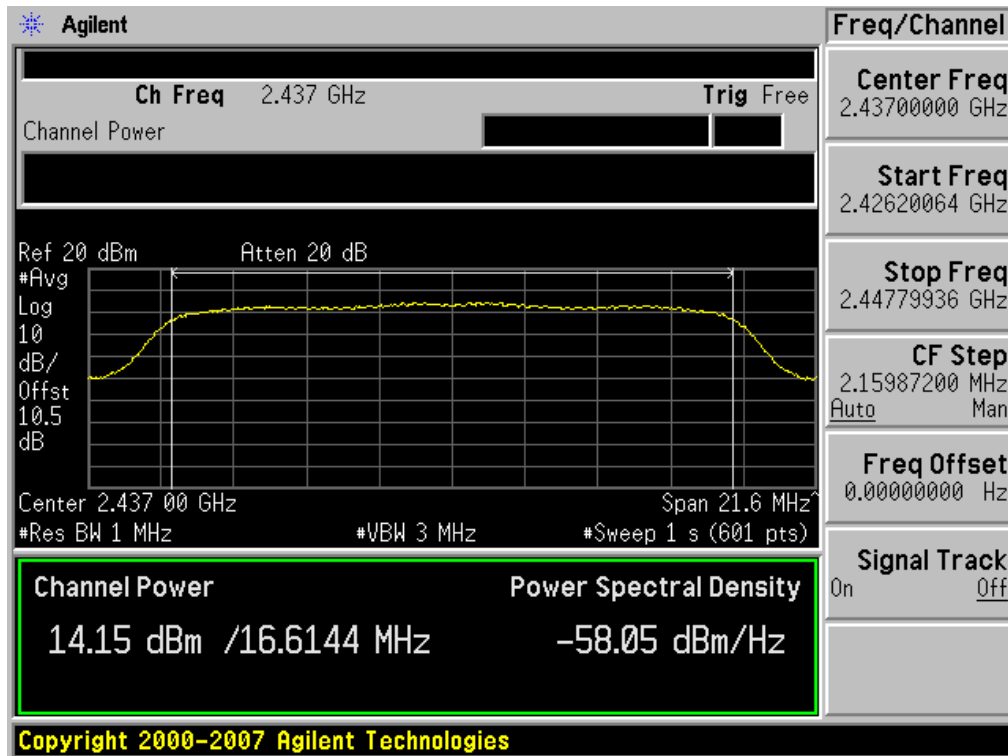


### Conducted Output Power (802.11g-CH 6) 9Mbps

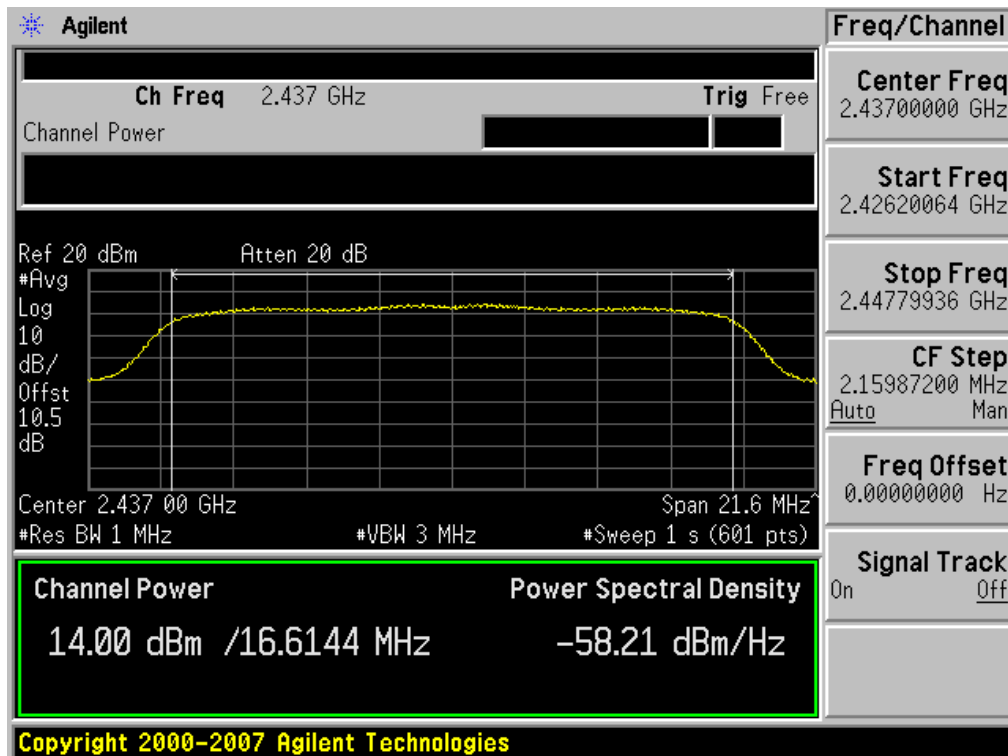


### Conducted Output Power (802.11g-CH 6) 12Mbps

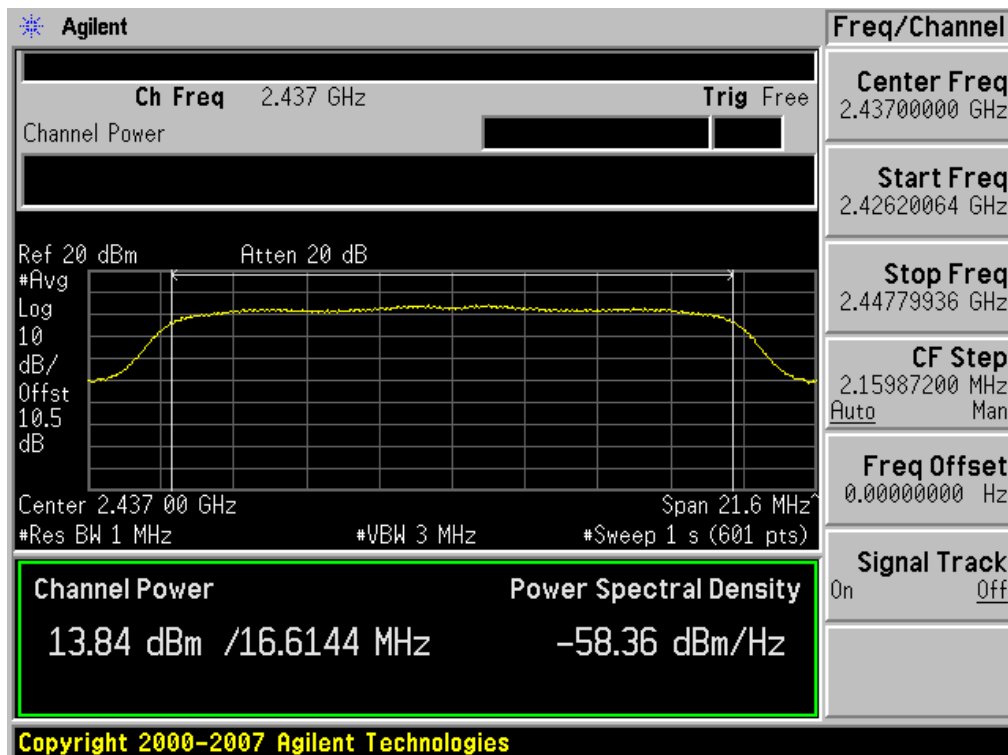


### Conducted Output Power (802.11g-CH 6) 18Mbps

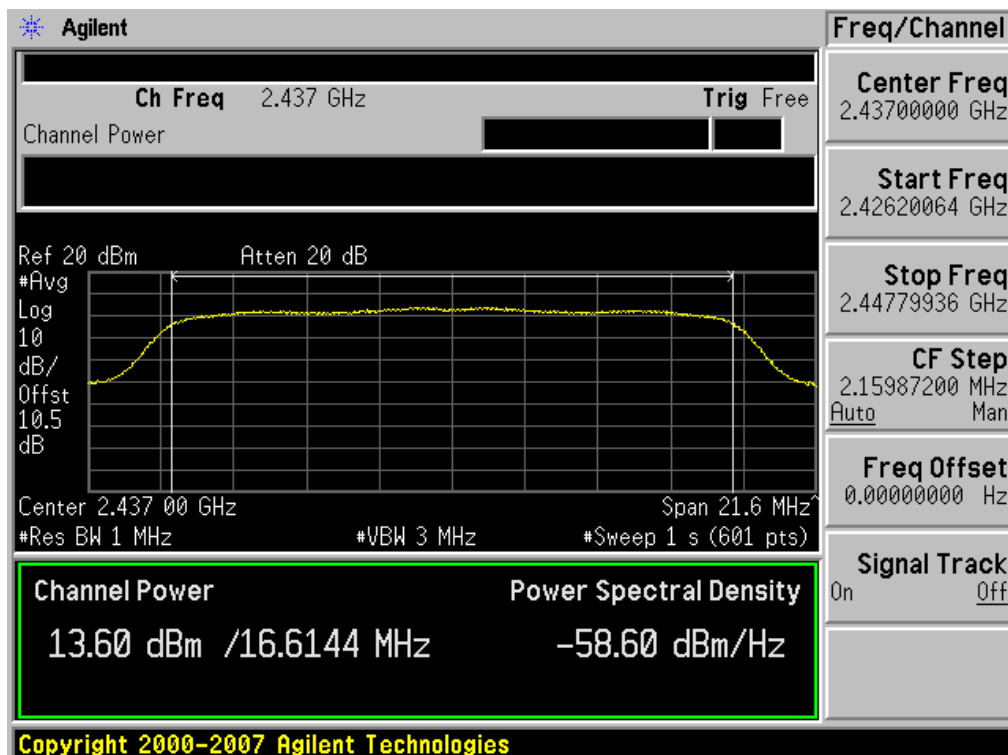


### Conducted Output Power (802.11g-CH 6) 24Mbps

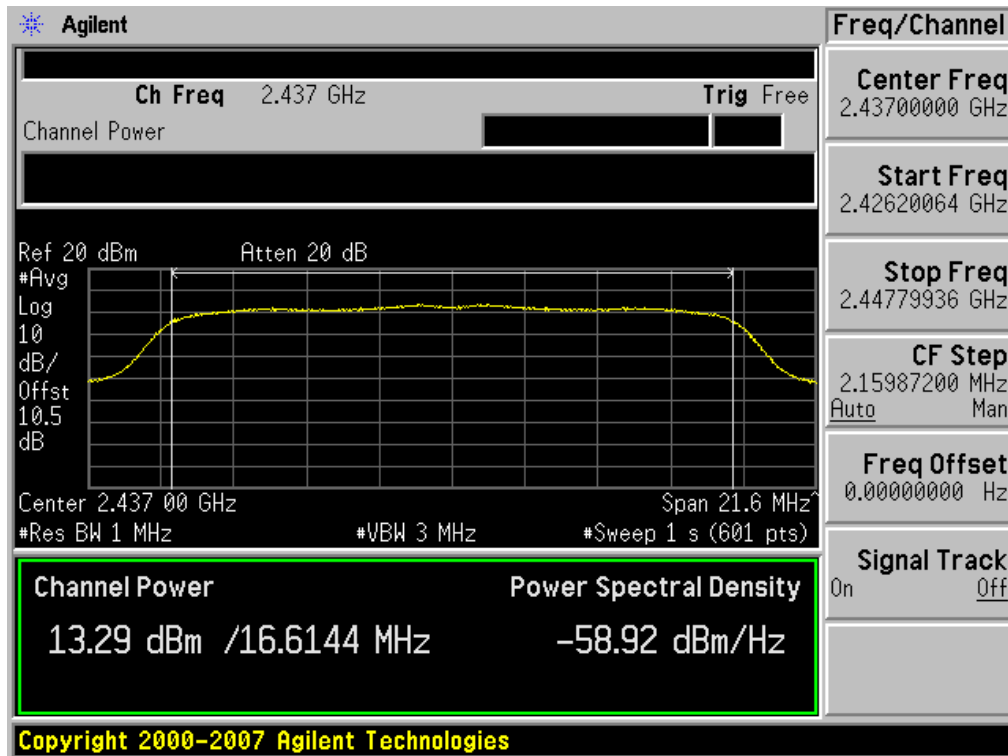


### Conducted Output Power (802.11g-CH 6) 36Mbps

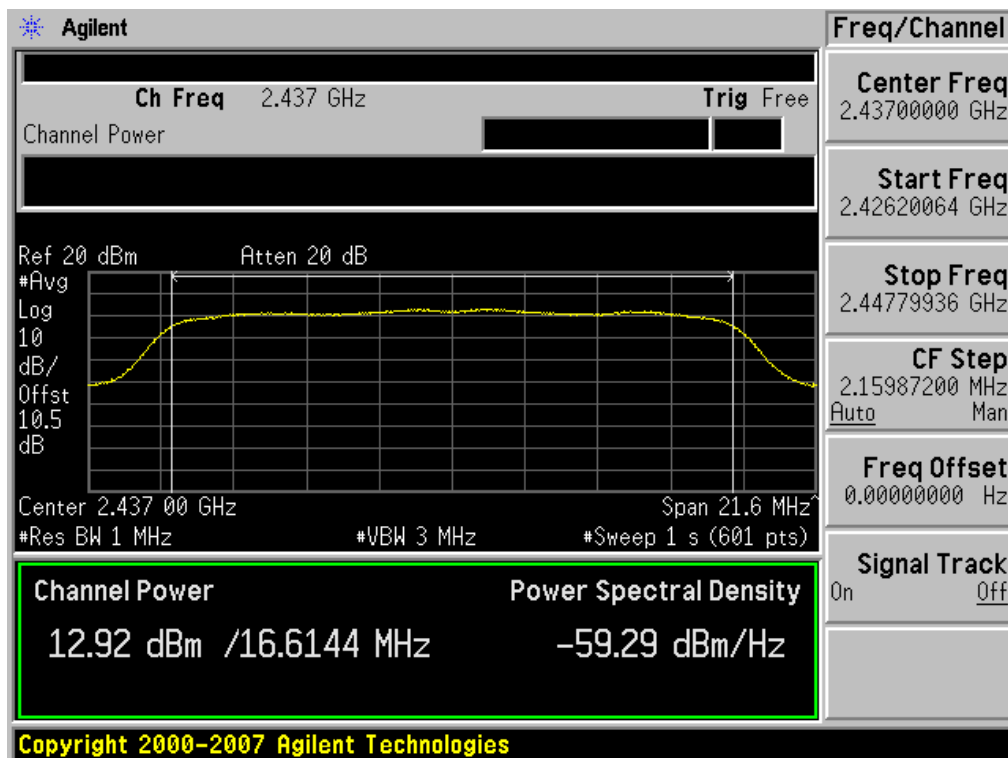


### Conducted Output Power (802.11g-CH 6) 48Mbps

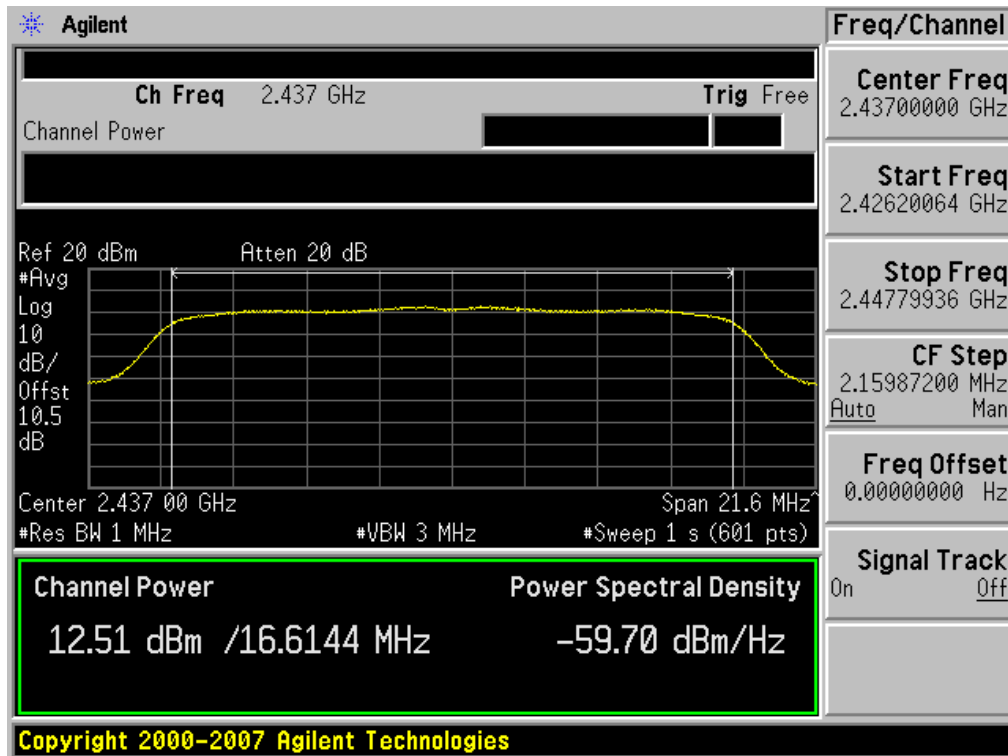


### Conducted Output Power (802.11g-CH 6) 54Mbps

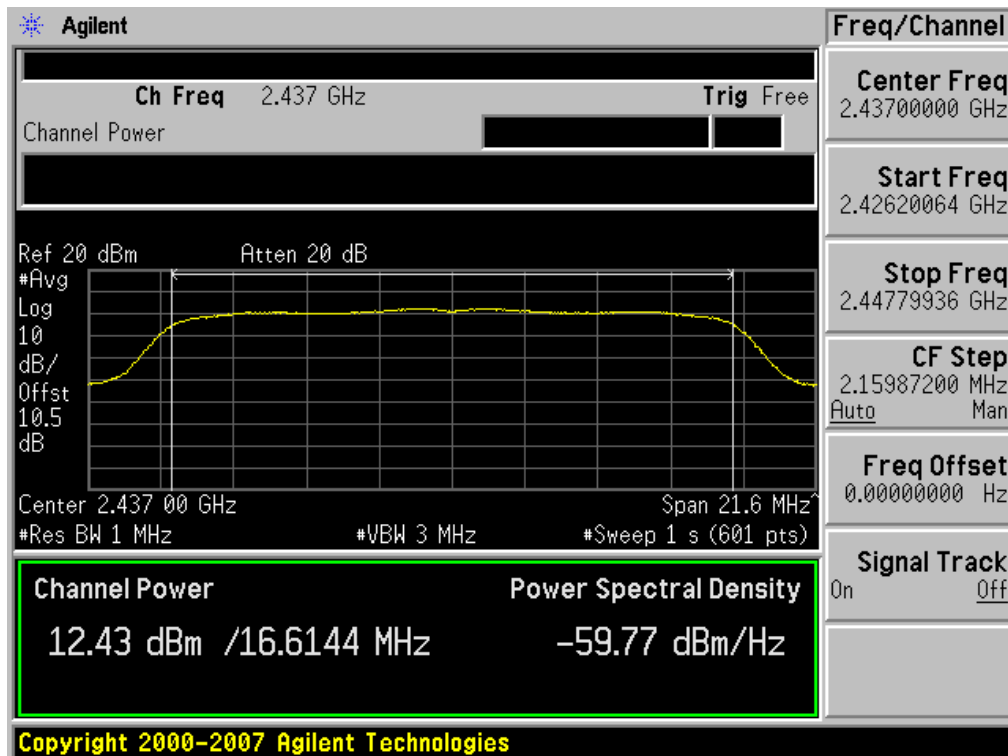


### Conducted Output Power (802.11g-CH 11) 6Mbps

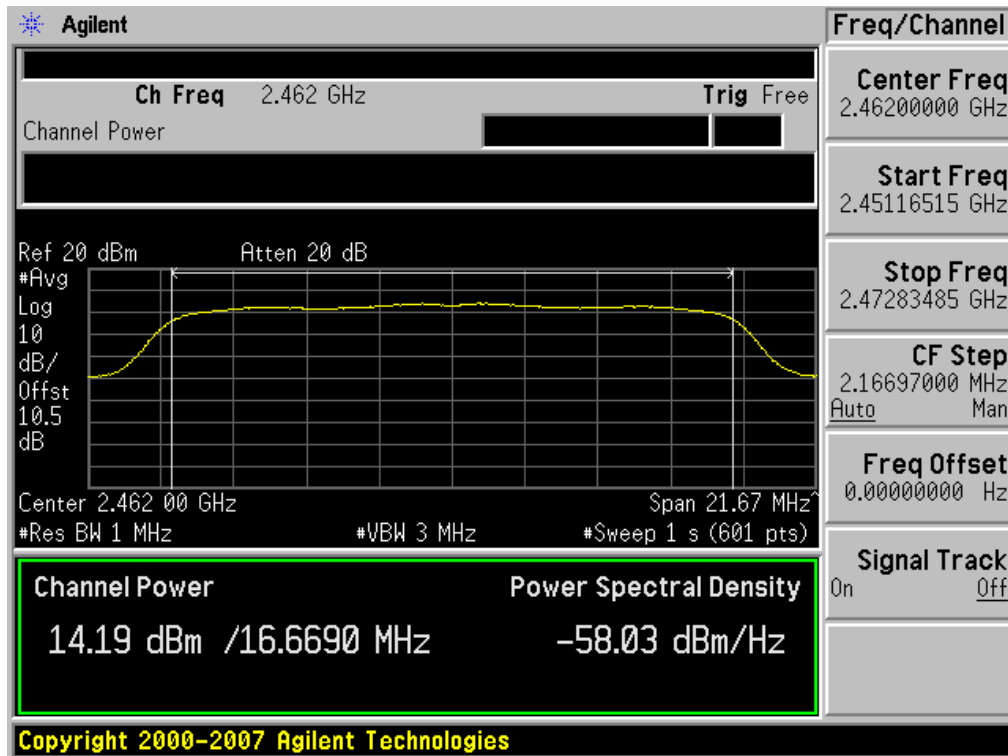


### Conducted Output Power (802.11g-CH 11) 9Mbps

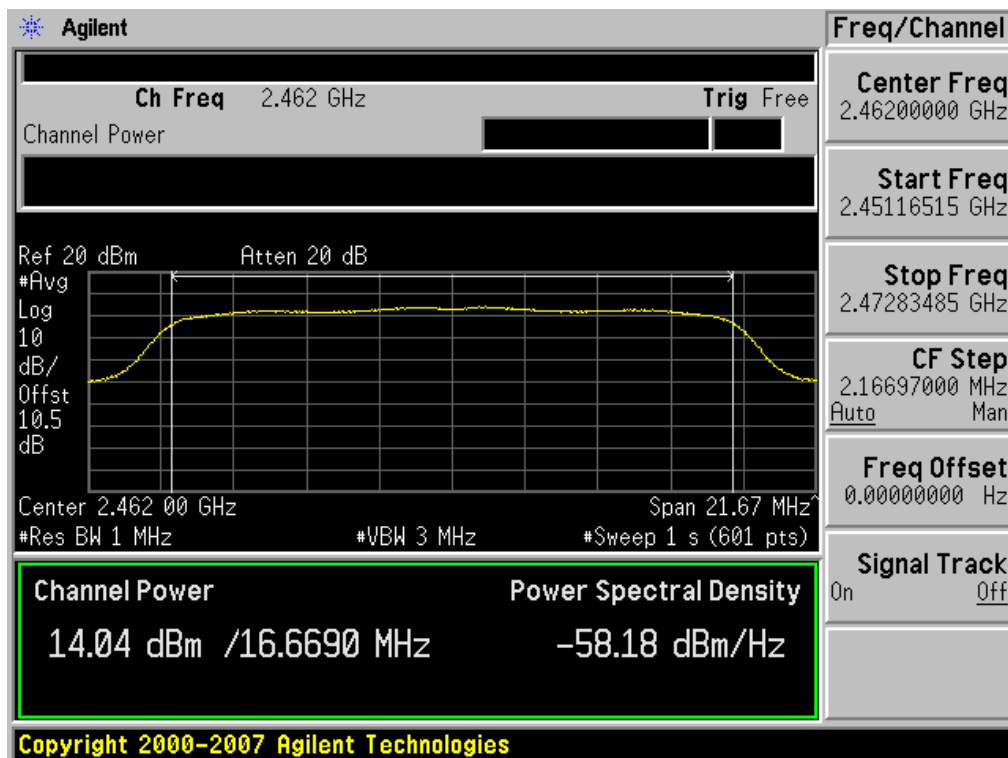


### Conducted Output Power (802.11g-CH 11) 12Mbps

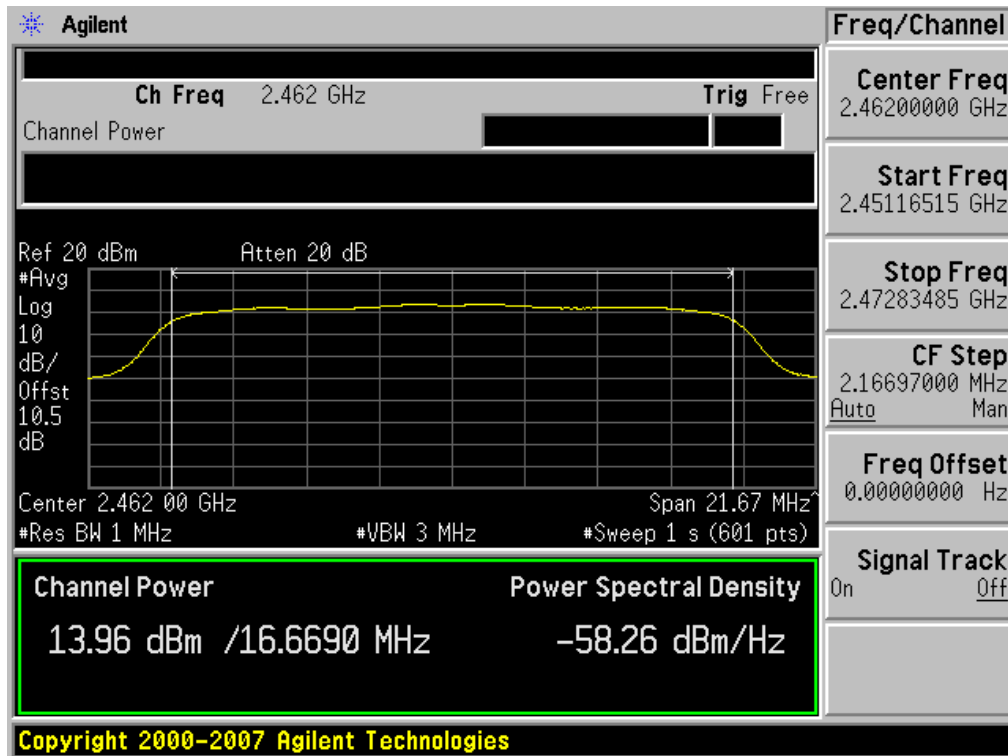


### Conducted Output Power (802.11g-CH 11) 18Mbps

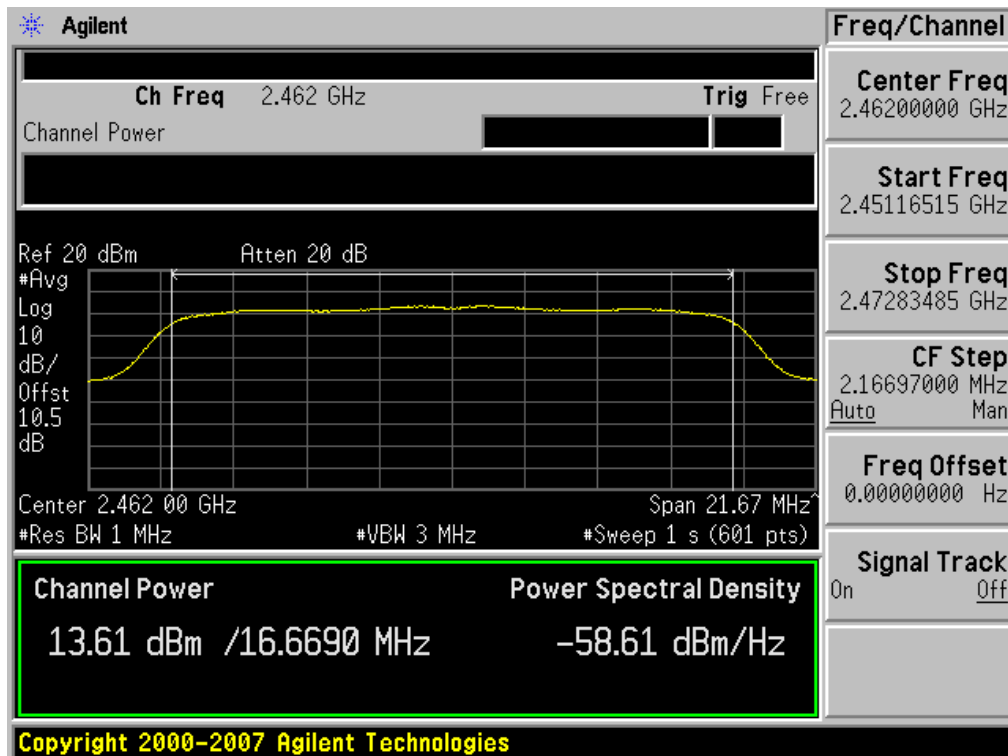


### Conducted Output Power (802.11g-CH 11) 24Mbps

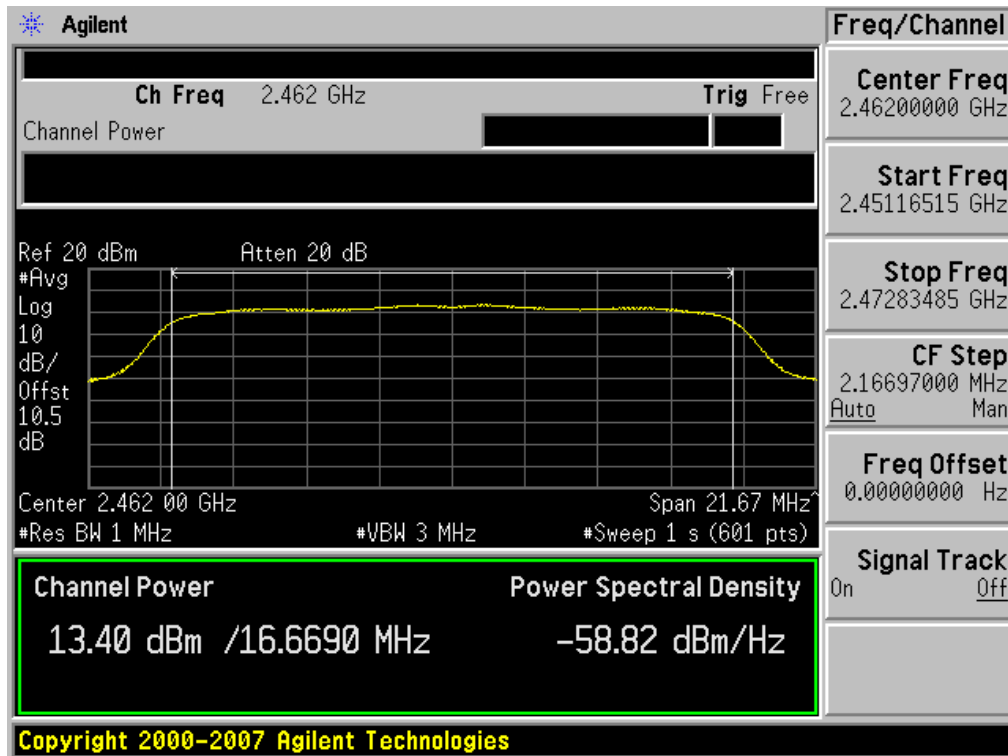


### Conducted Output Power (802.11g-CH 11) 36Mbps

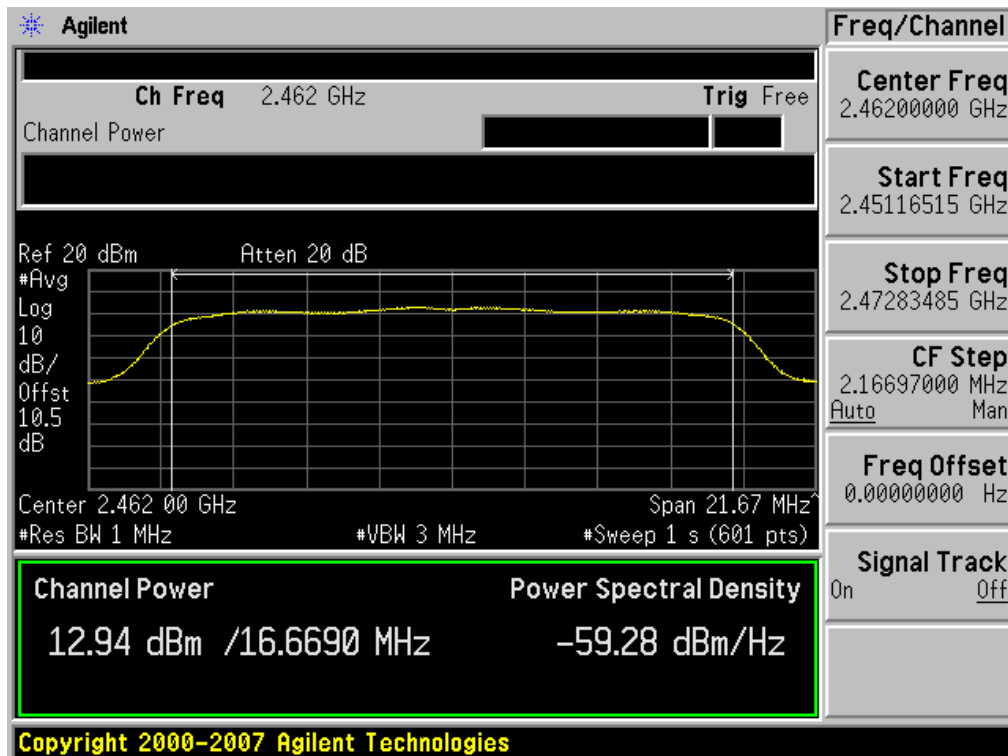


### Conducted Output Power (802.11g-CH 11) 48Mbps

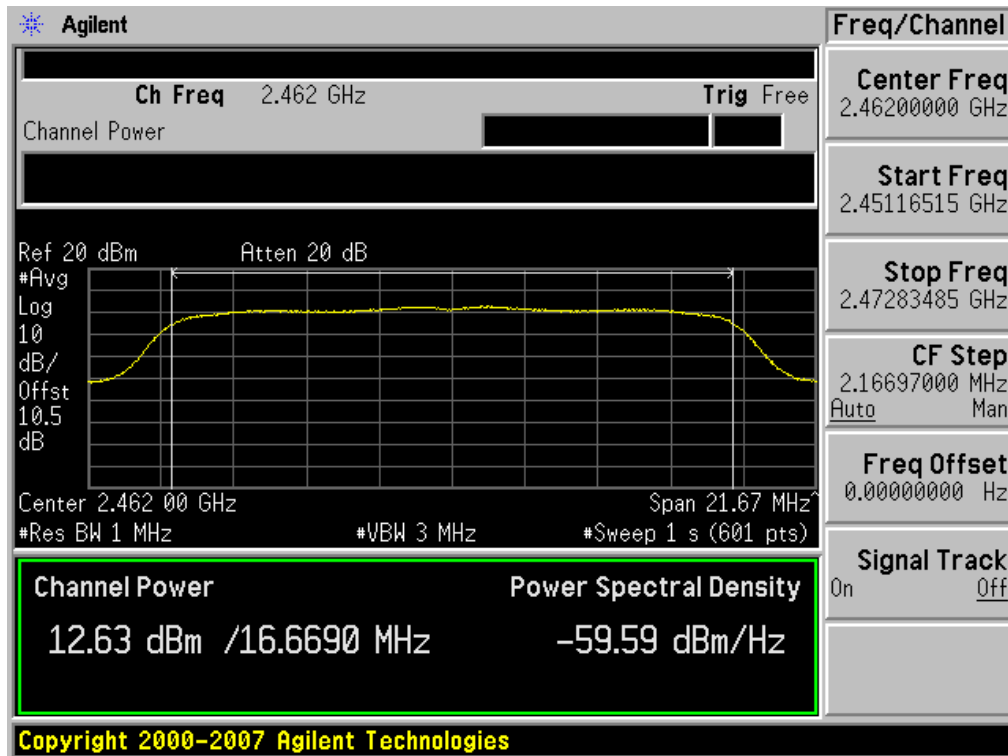


### Conducted Output Power (802.11g-CH 11) 54Mbps

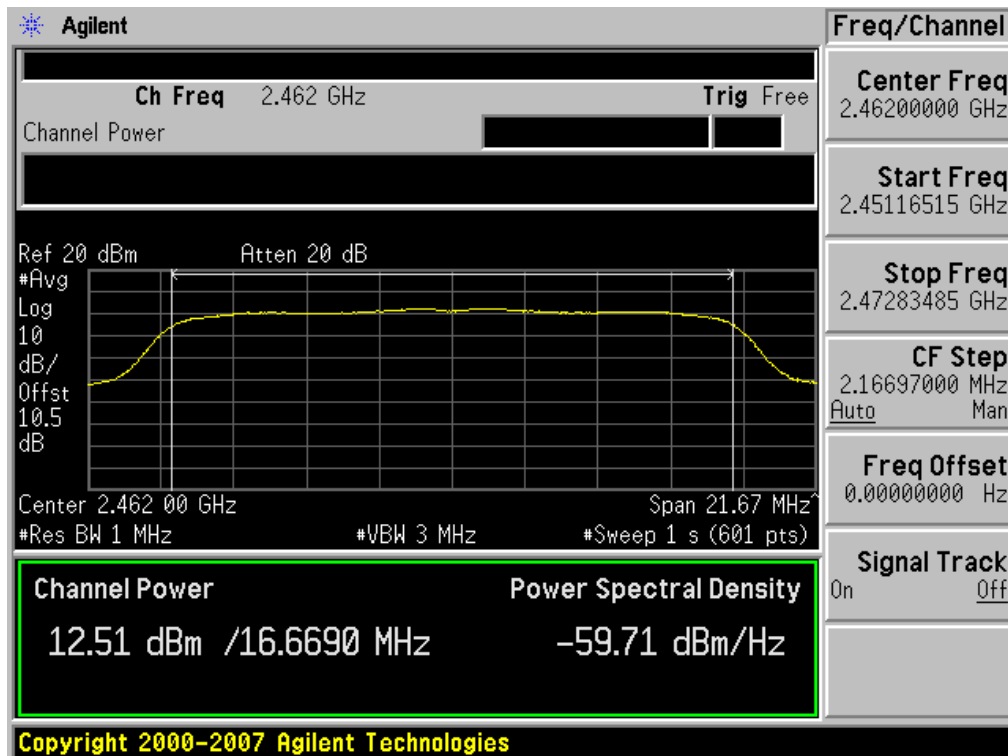


### Conducted Output Power (802.11n-CH 1) 6.5Mbps

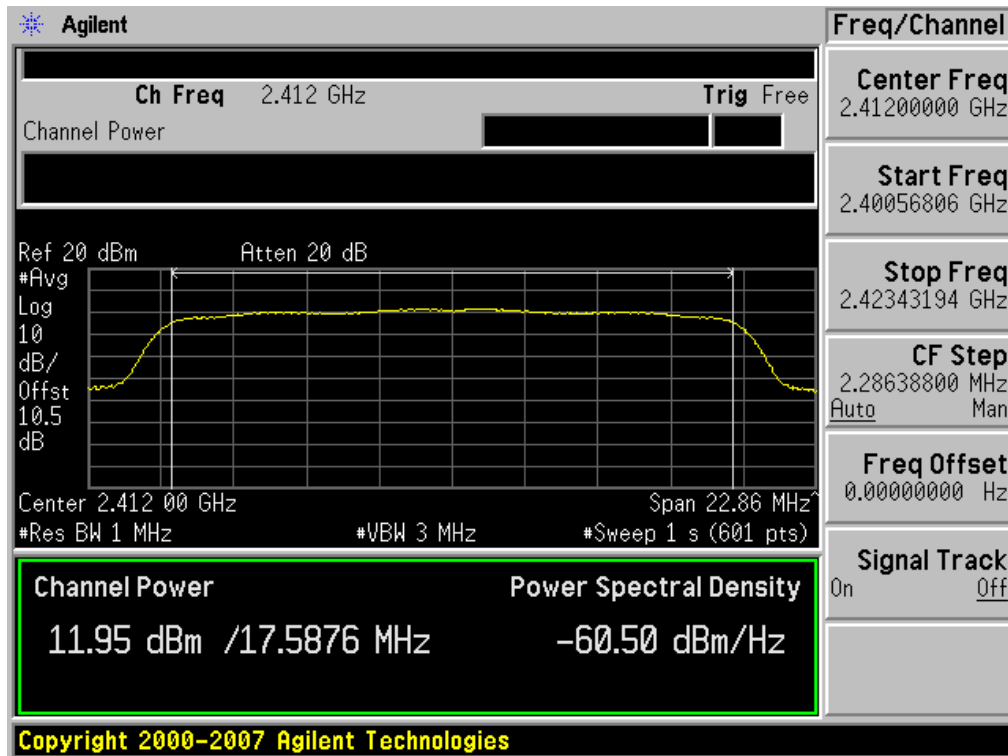


### Conducted Output Power (802.11n-CH 1) 13Mbps

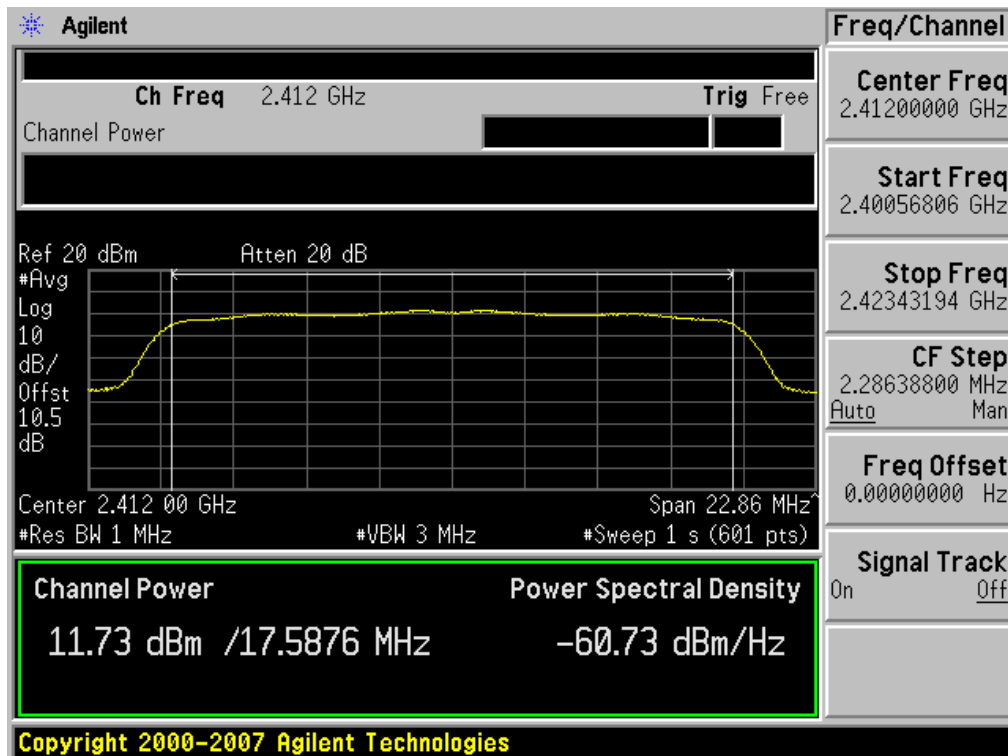


### Conducted Output Power (802.11n-CH 1) 19.5Mbps

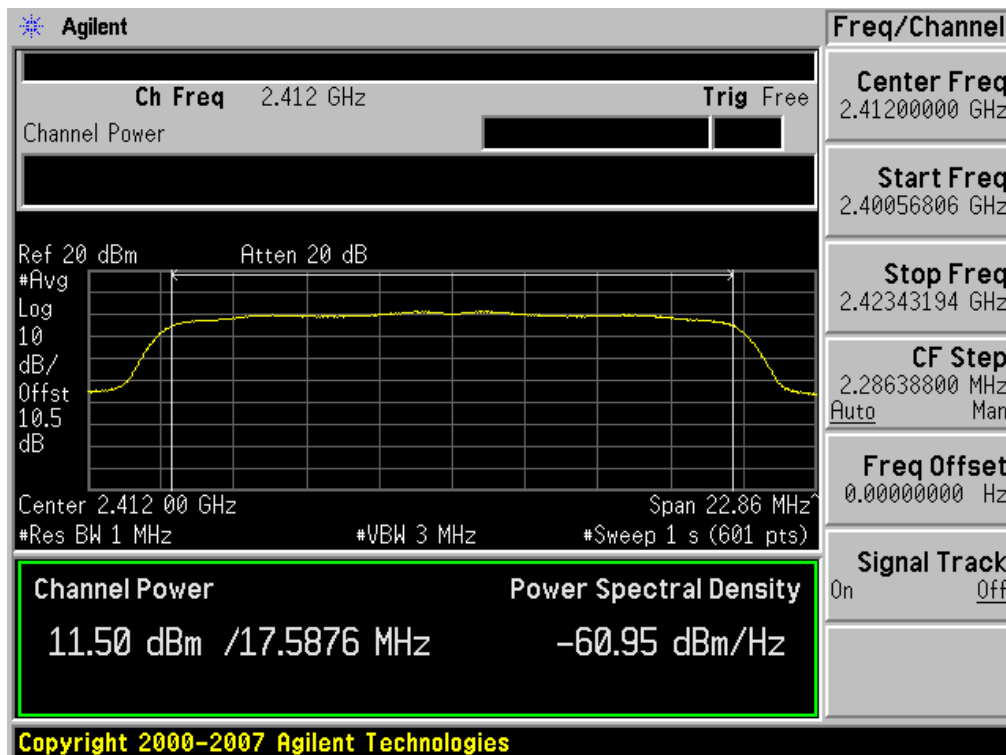


### Conducted Output Power (802.11n-CH 1) 26Mbps

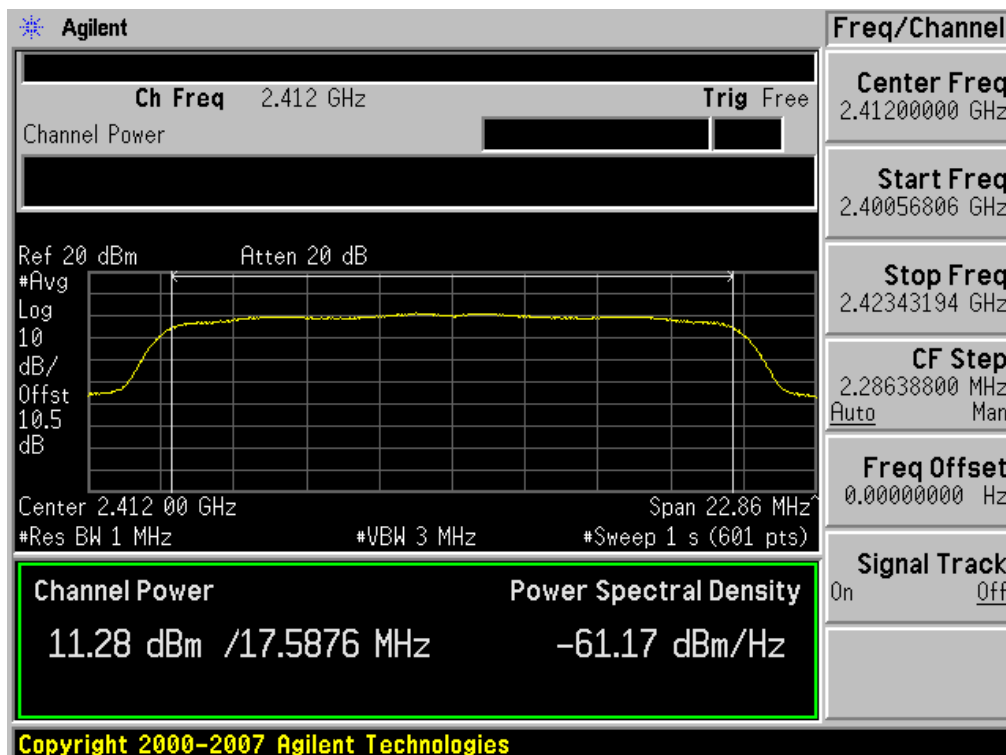


### Conducted Output Power (802.11n-CH 1) 39Mbps

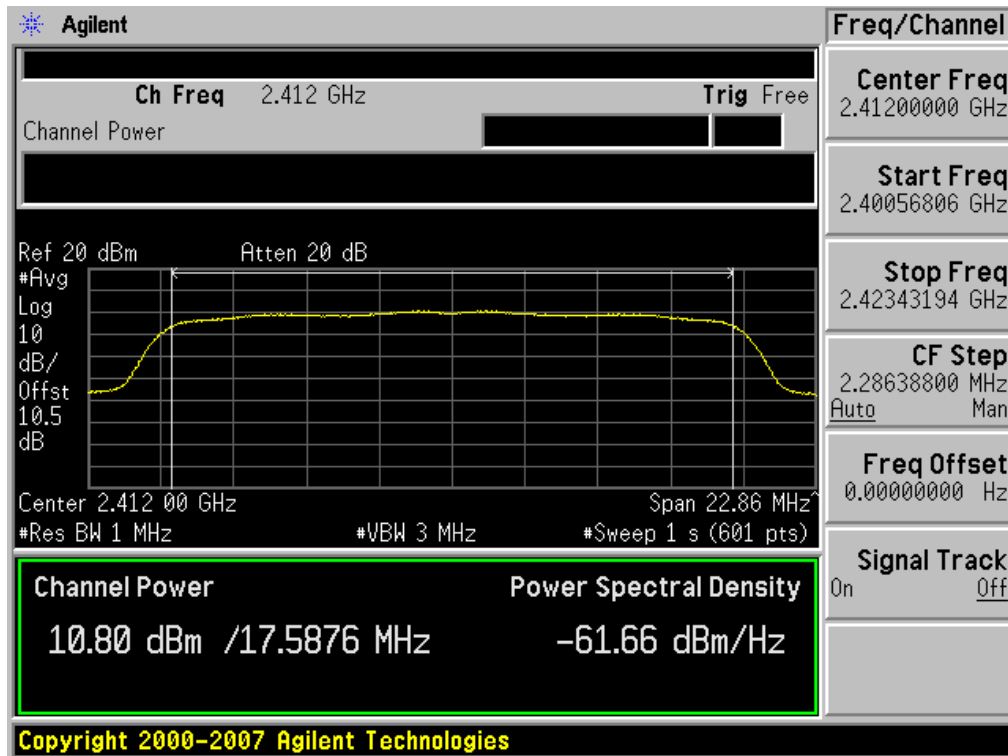


### Conducted Output Power (802.11n-CH 1) 52Mbps

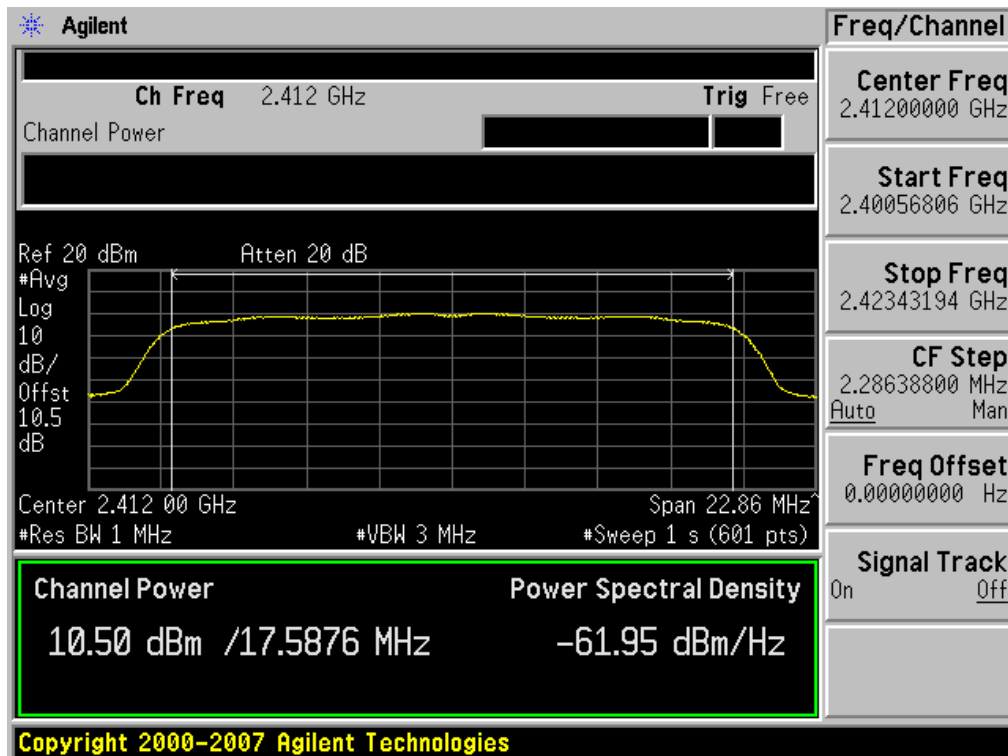


### Conducted Output Power (802.11n-CH 1) 58.5Mbps

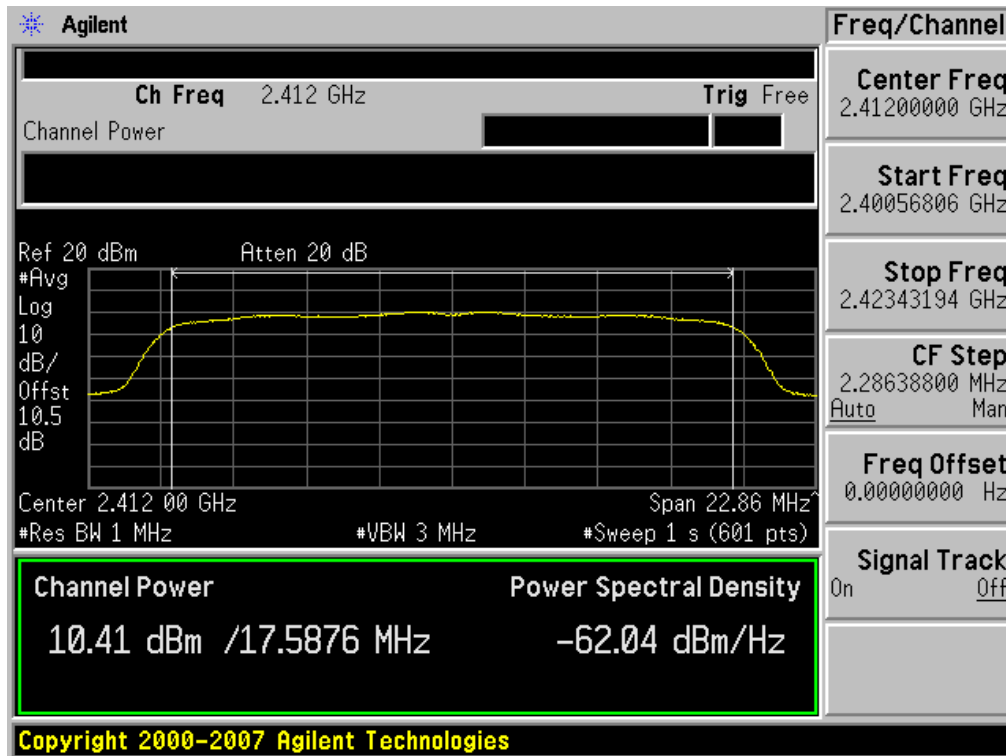


### Conducted Output Power (802.11n-CH 1) 65Mbps

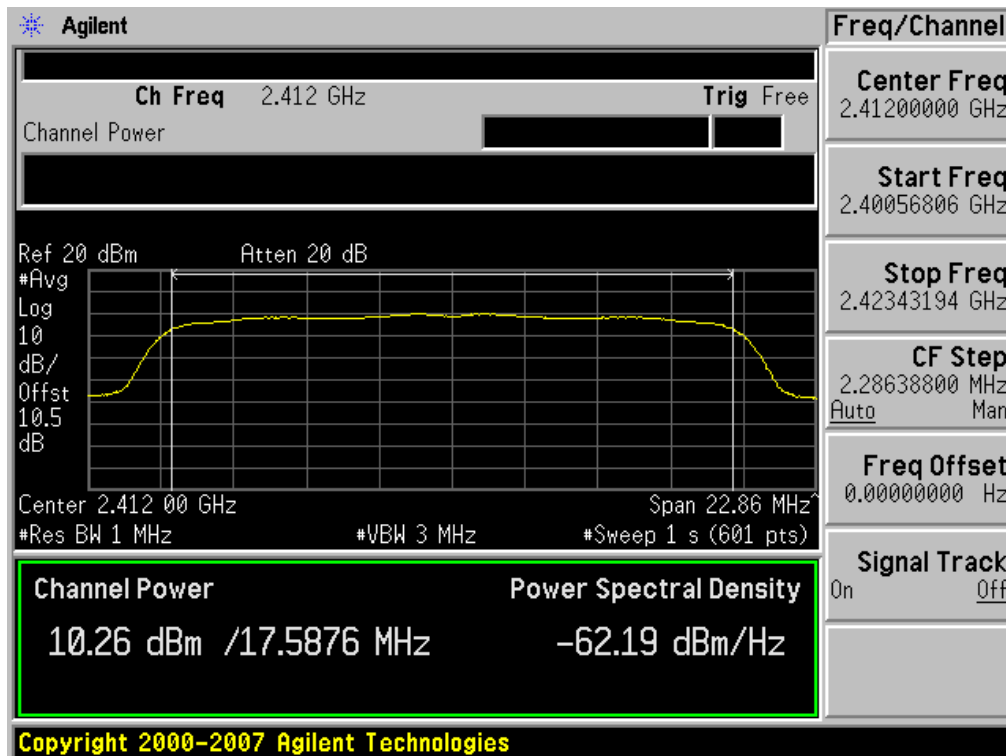


### Conducted Output Power (802.11n-CH 6) 6.5Mbps

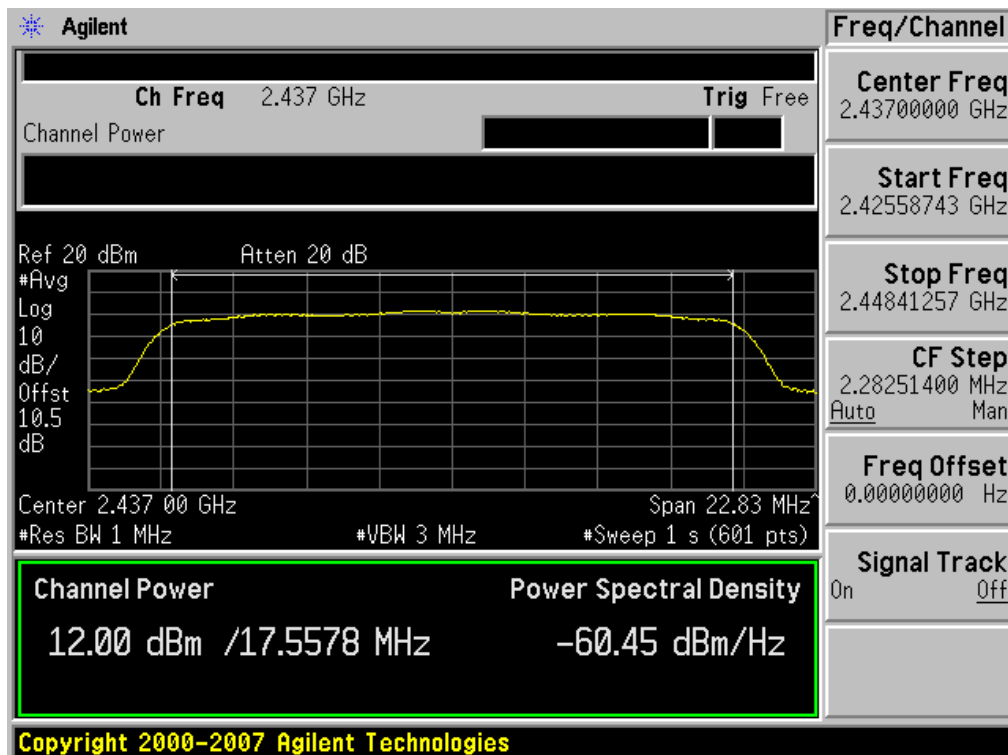


### Conducted Output Power (802.11n-CH 6) 13Mbps

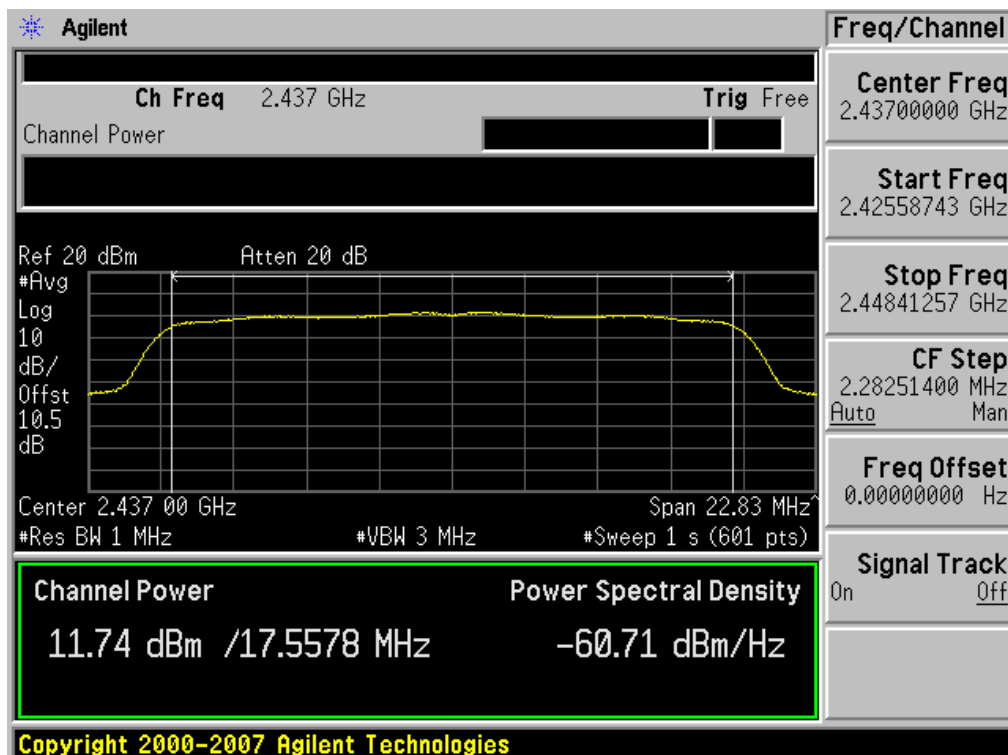


### Conducted Output Power (802.11n-CH 6) 19.5Mbps

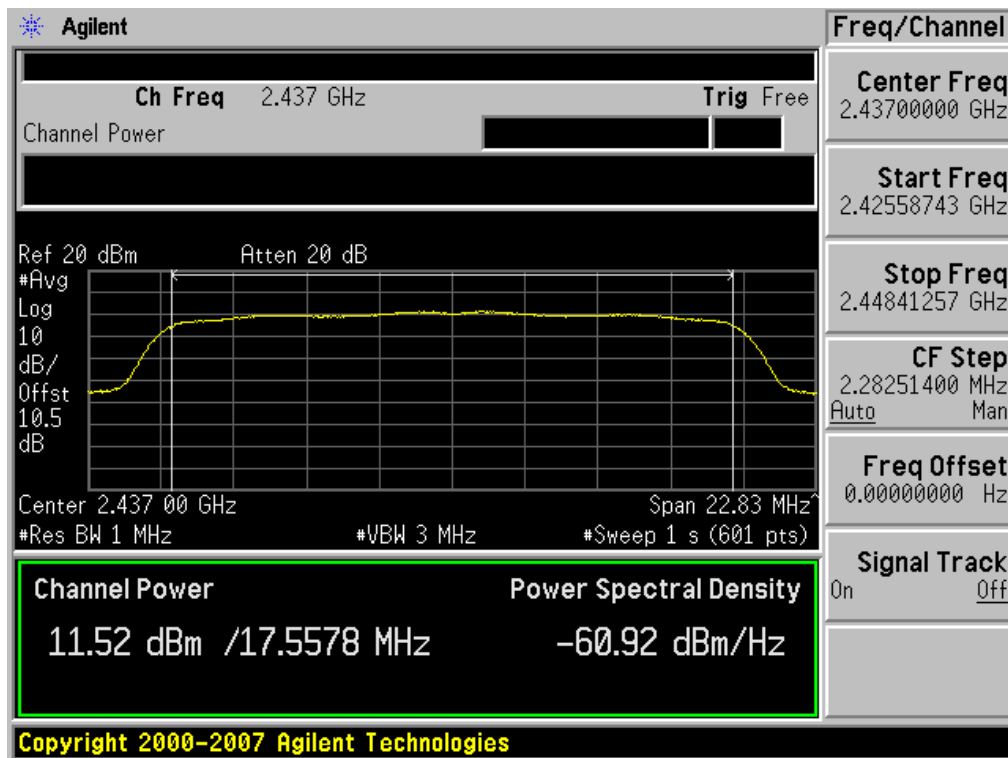


### Conducted Output Power (802.11n-CH 6) 26Mbps

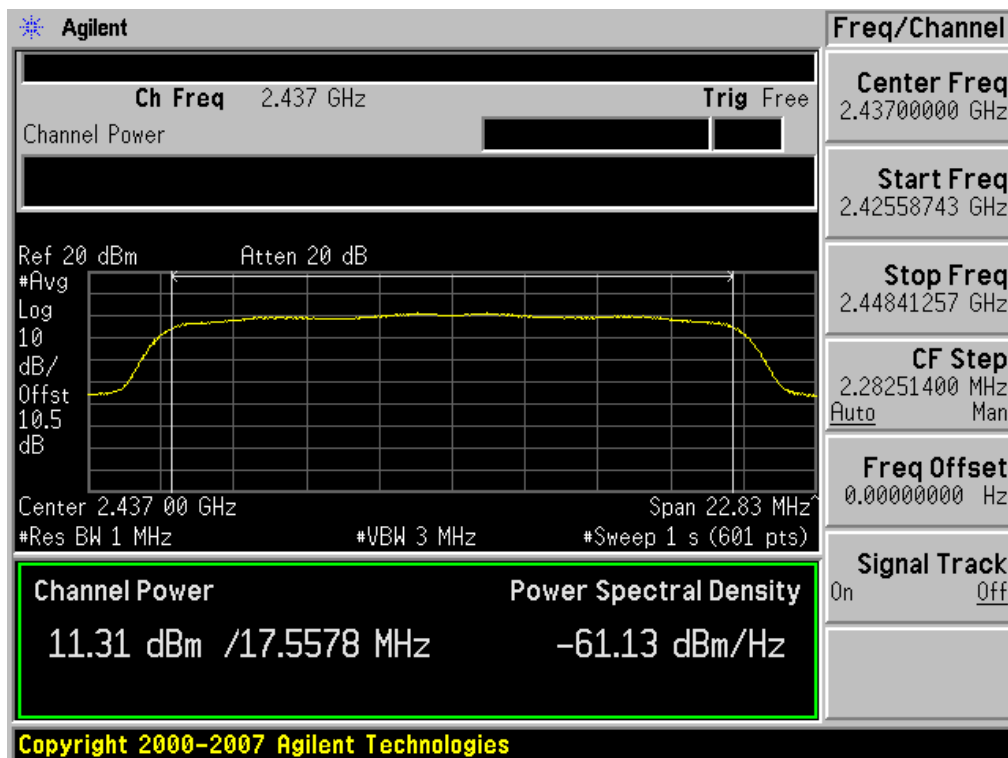


### Conducted Output Power (802.11n-CH 6) 39Mbps

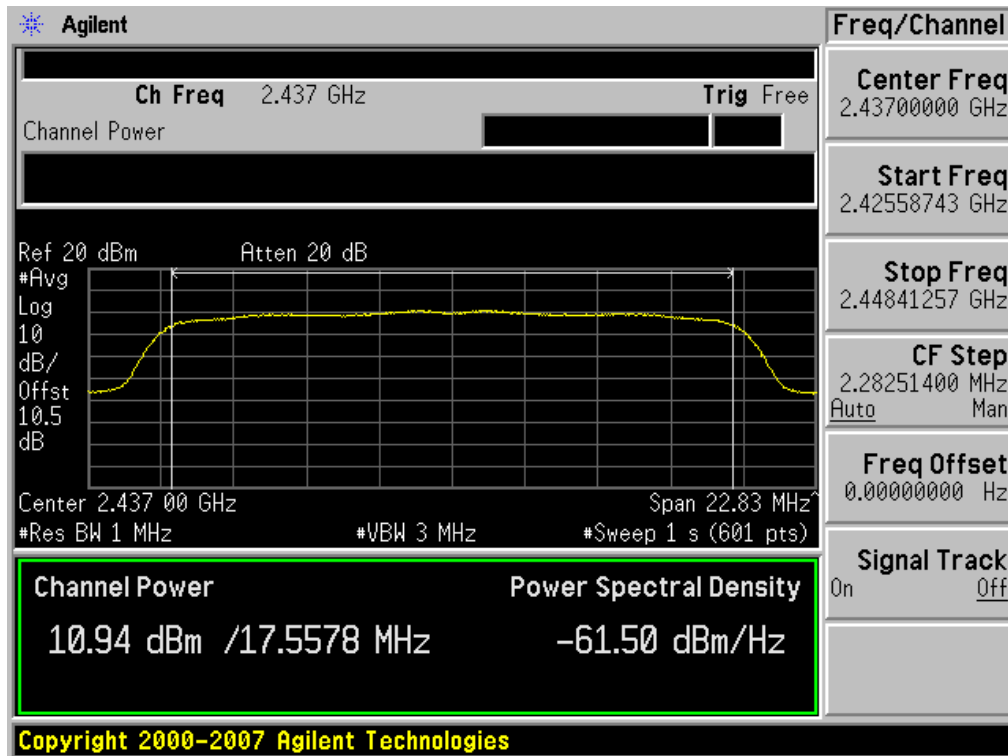


### Conducted Output Power (802.11n-CH 6) 52Mbps

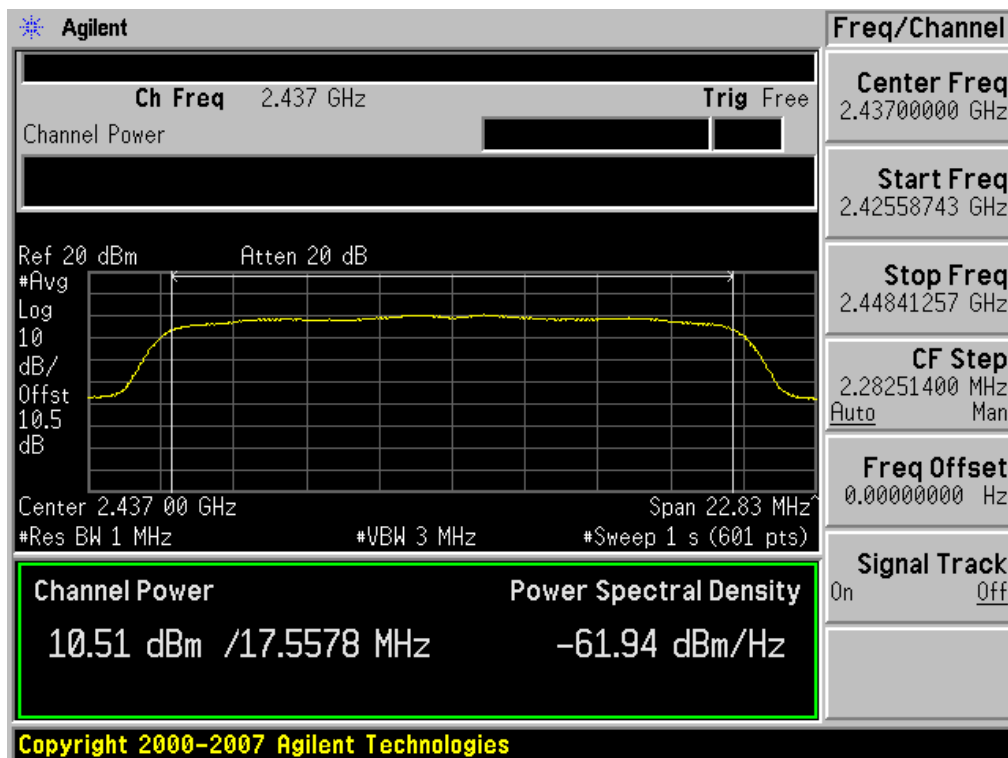


### Conducted Output Power (802.11n-CH 6) 58.5Mbps

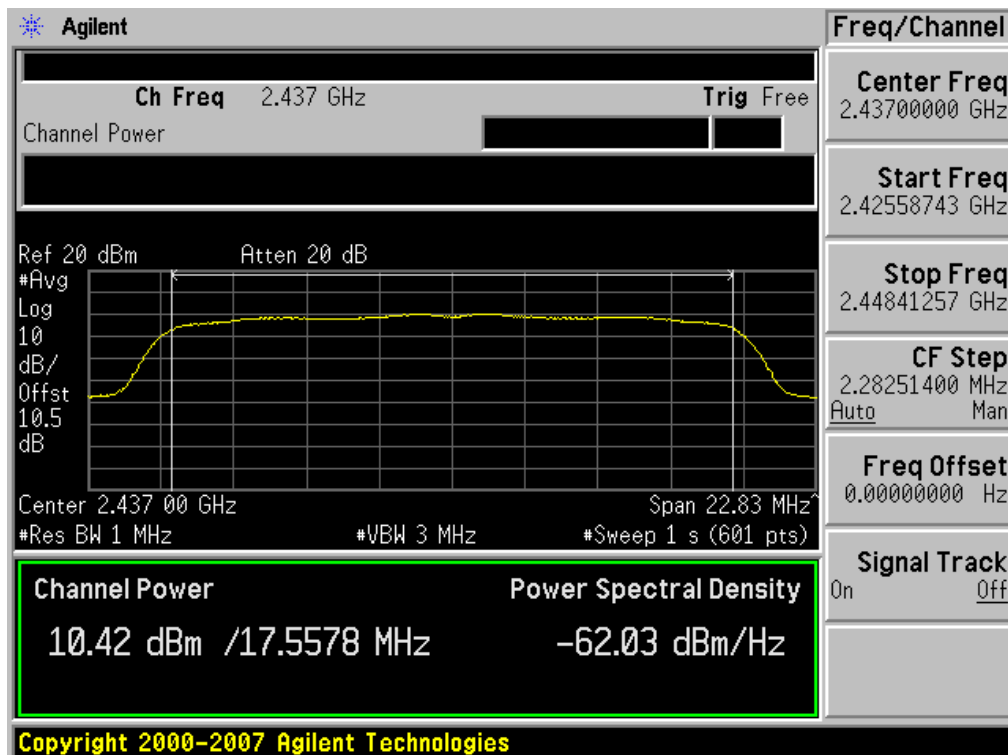


### Conducted Output Power (802.11n-CH 6) 65Mbps

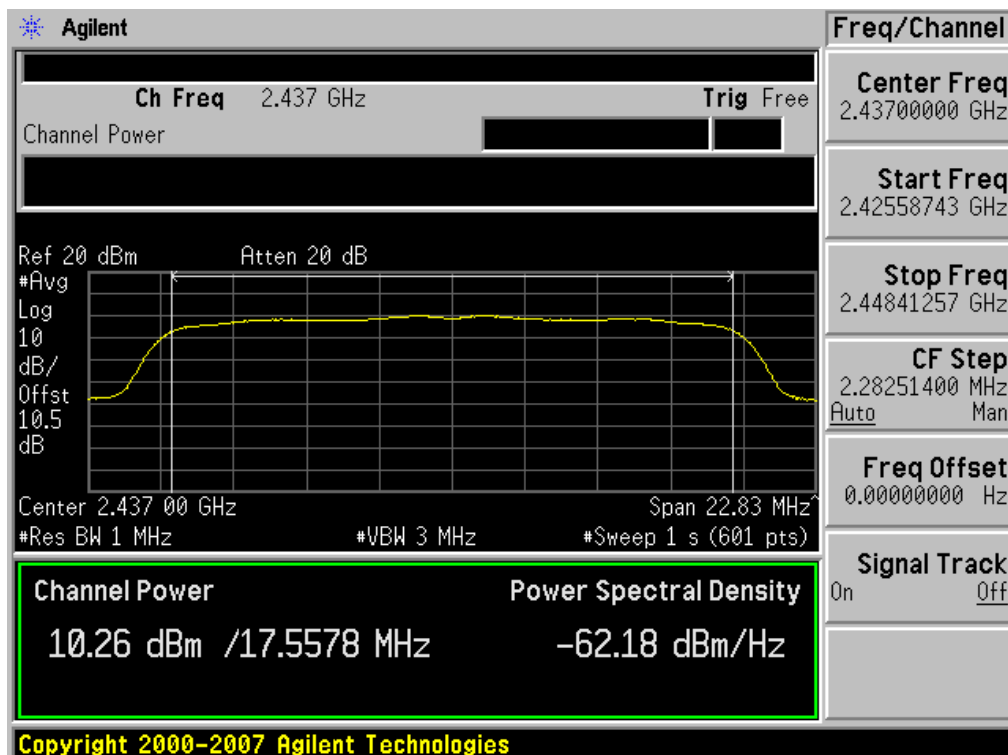


### Conducted Output Power (802.11n-CH 11) 6.5Mbps

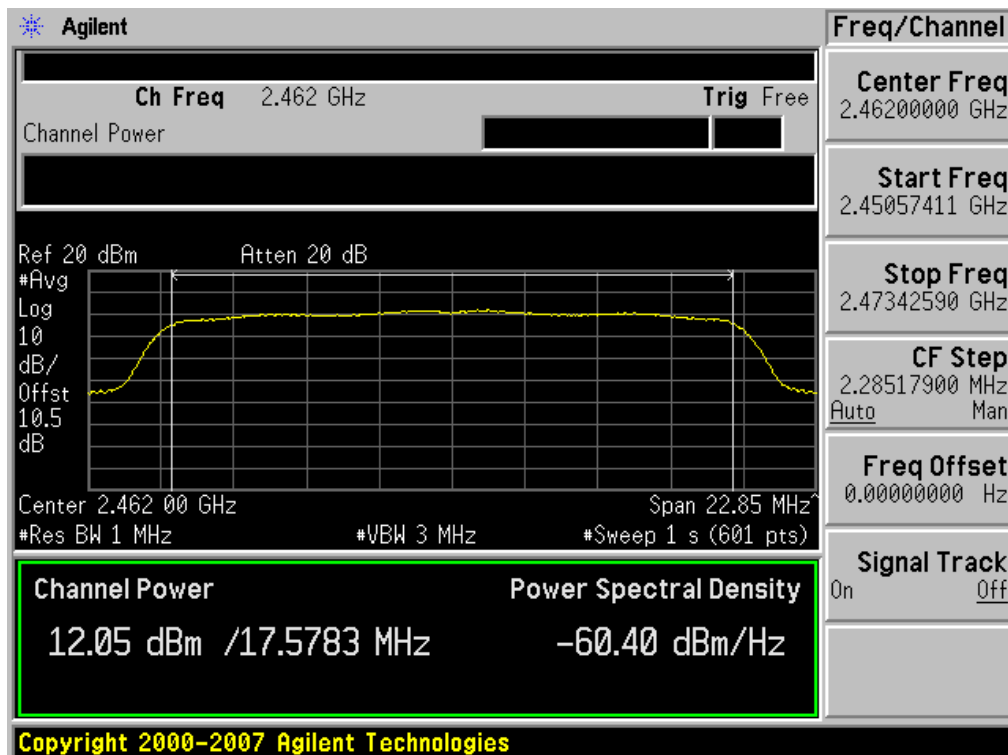


### Conducted Output Power (802.11n-CH 11) 13Mbps

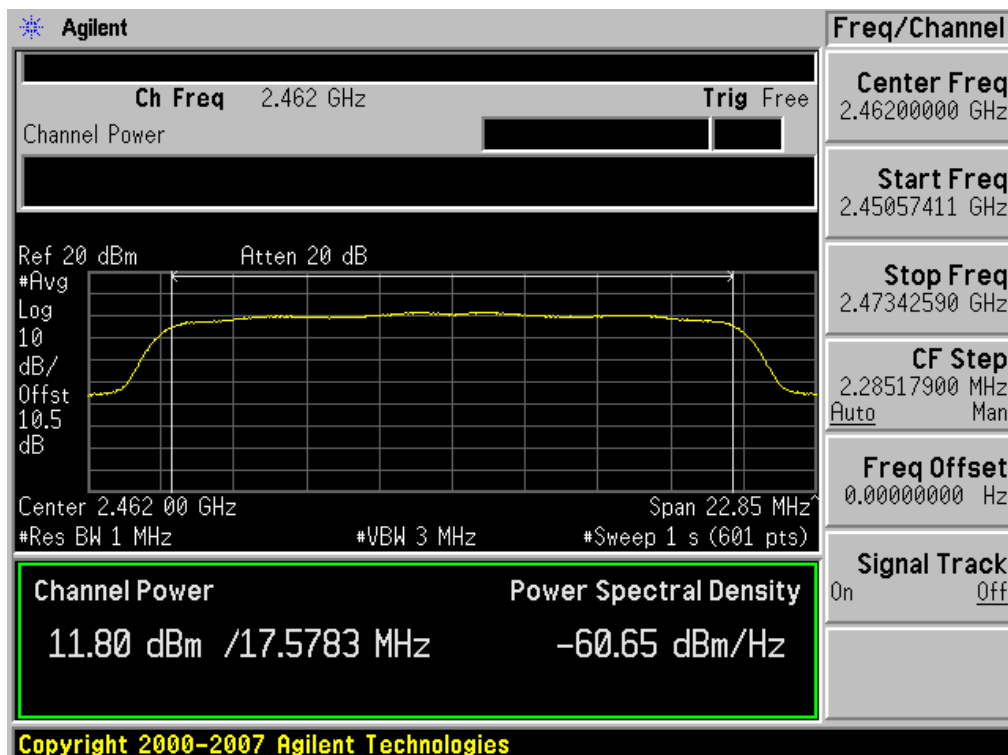


### Conducted Output Power (802.11n-CH 11) 19.5Mbps

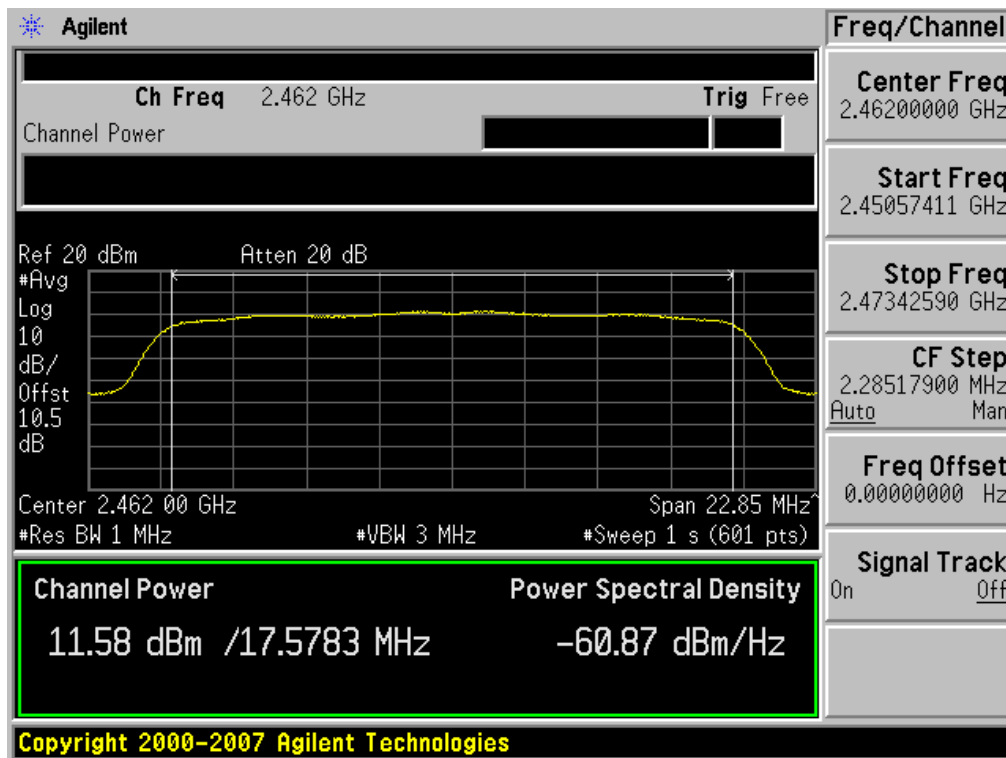


### Conducted Output Power (802.11n-CH 11) 26Mbps

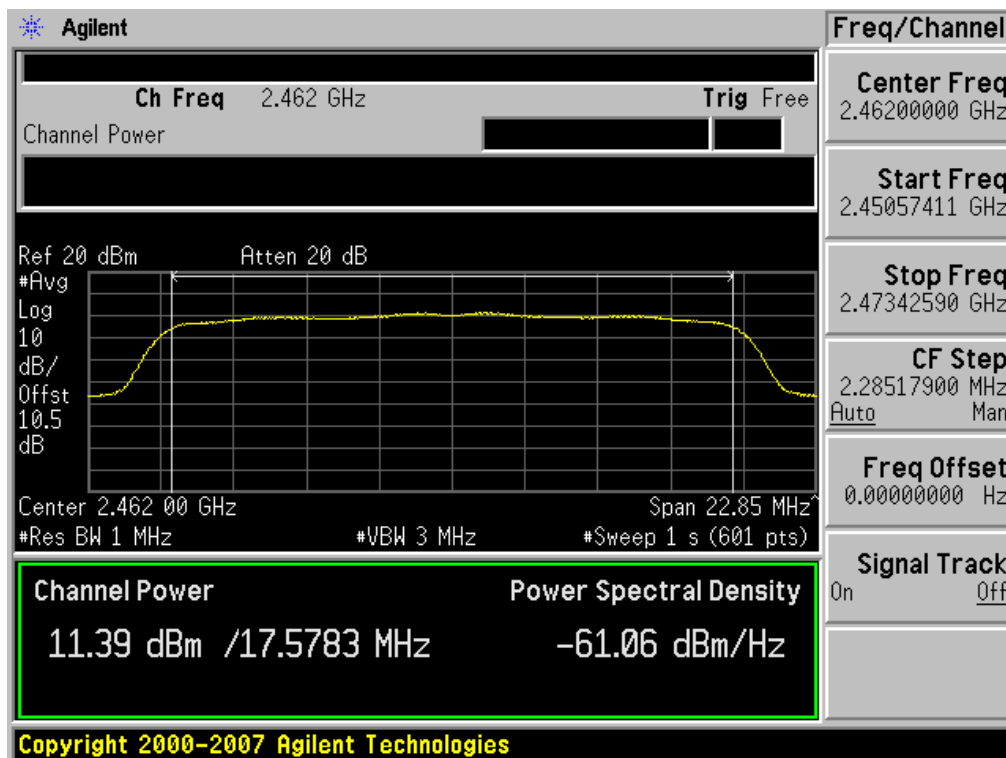


### Conducted Output Power (802.11n-CH 11) 39Mbps

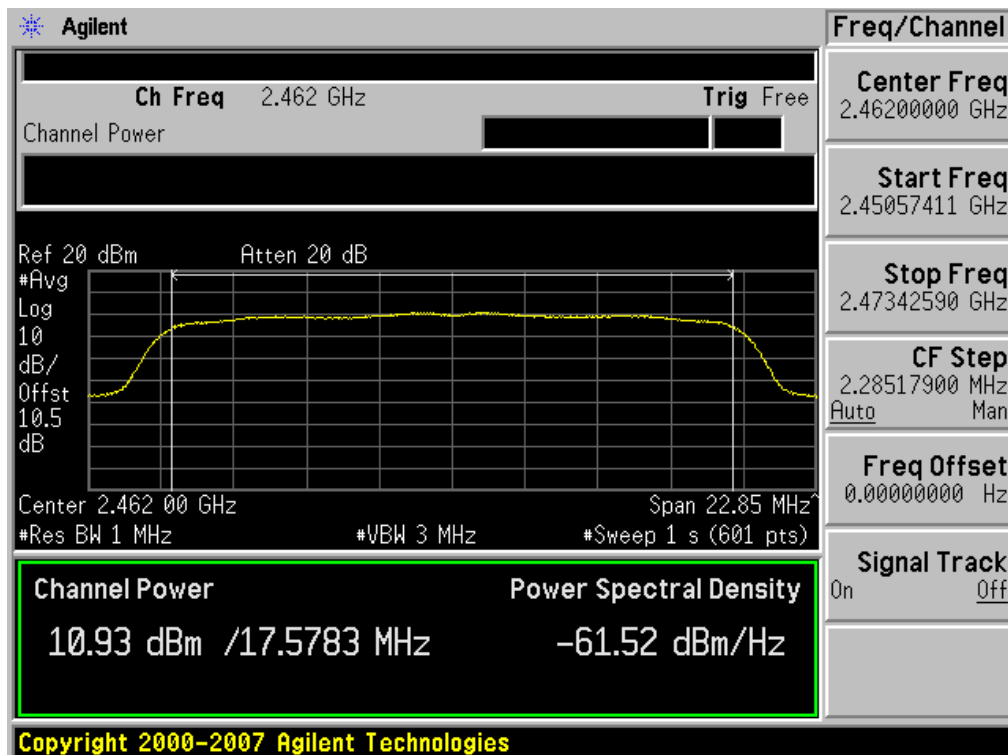


### Conducted Output Power (802.11n-CH 11) 52Mbps

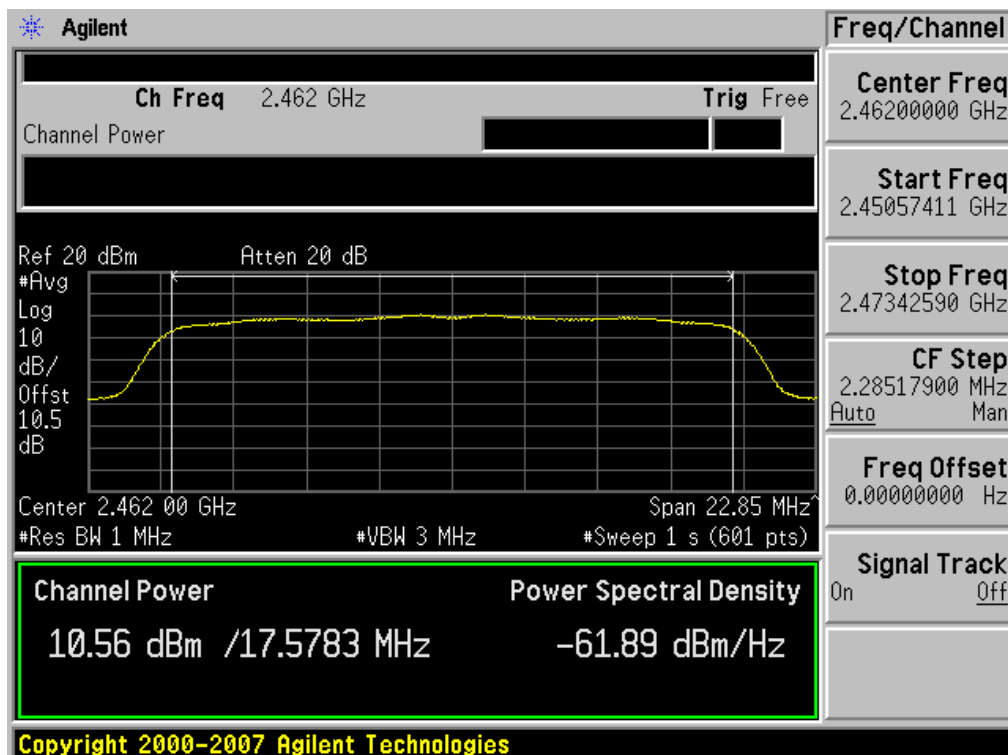

### Conducted Output Power (802.11n-CH 11) 58.5Mbps

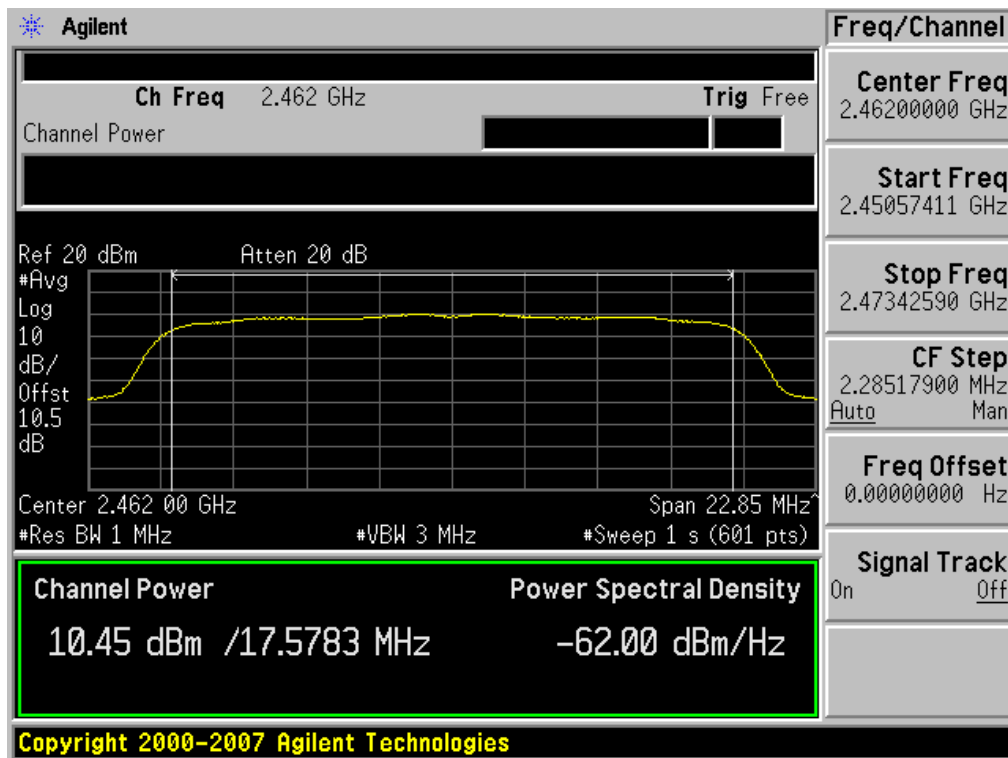

### Conducted Output Power (802.11n-CH 11) 65Mbps

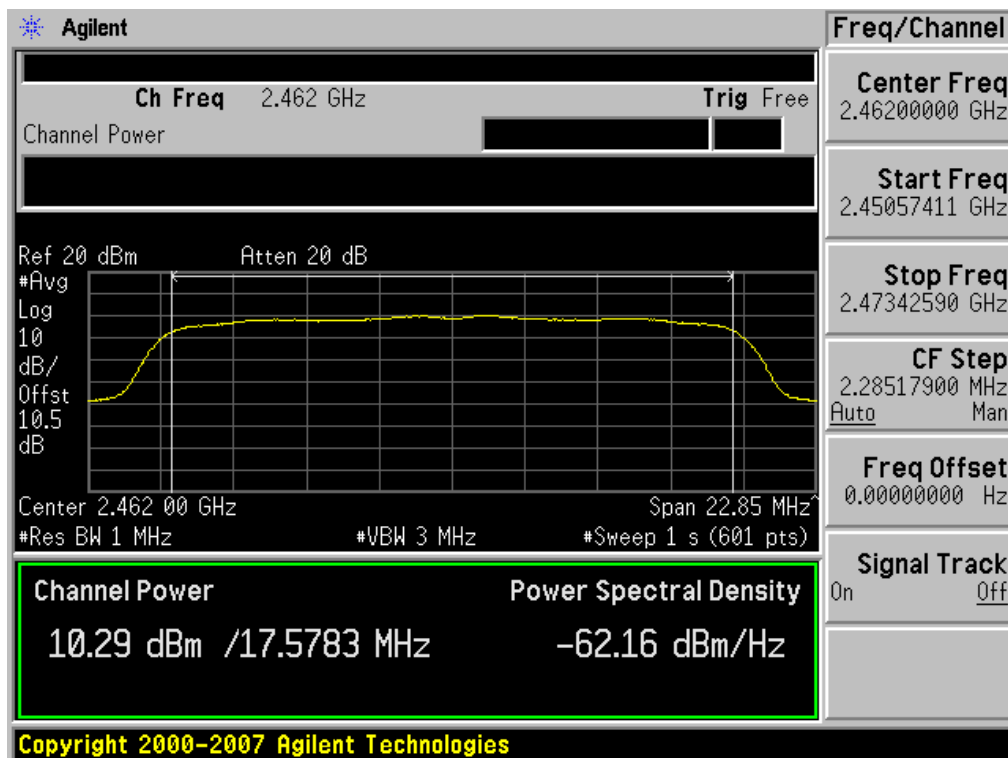


### 8.3 POWER SPECTRAL DENSITY (802.11b/g/n)

#### Test Requirements and limit, §15.247(e)

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

**Minimum Standard – The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.**

#### ■ TEST CONFIGURATION



#### ■ TEST PROCEDURE

The spectrum analyzer is set to :

1. Span = 300 kHz
2. RBW = 3 kHz
3. VBW = 3 kHz
4. Sweep = 100 sec
5. Detector Mode = Peak

#### ■ Sample Calculation

$$\begin{aligned} \text{PSD} &= \text{Reading Value} + \text{ATT loss} + \text{Cable loss}(1 \text{ ea}) \\ &= -5 \text{ dBm} + 10 \text{ dB} + 0.8 \text{ dB} = 5.8 \text{ dBm} \end{aligned}$$

Where) Spectrum offset = ATT loss + Cable loss(1 ea)

Note: Power values in plot is applied offset.


■ TEST RESULTS

Conducted Power Density Measurements


| Frequency (MHz) | Channel No. | Mode    | Test Result         |           |
|-----------------|-------------|---------|---------------------|-----------|
|                 |             |         | Power Density (dBm) | Pass/Fail |
| 2412            | 1           | 802.11b | -6.73               | Pass      |
| 2437            | 6           |         | -6.20               | Pass      |
| 2462            | 11          |         | -7.41               | Pass      |
| 2412            | 1           | 802.11g | -8.49               | Pass      |
| 2437            | 6           |         | -9.64               | Pass      |
| 2462            | 11          |         | -9.82               | Pass      |
| 2412            | 1           | 802.11n | -11.97              | Pass      |
| 2437            | 6           |         | -12.28              | Pass      |
| 2462            | 11          |         | -12.15              | Pass      |

■ RESULT PLOTS


Power Spectral Density (802.11b-CH 1)

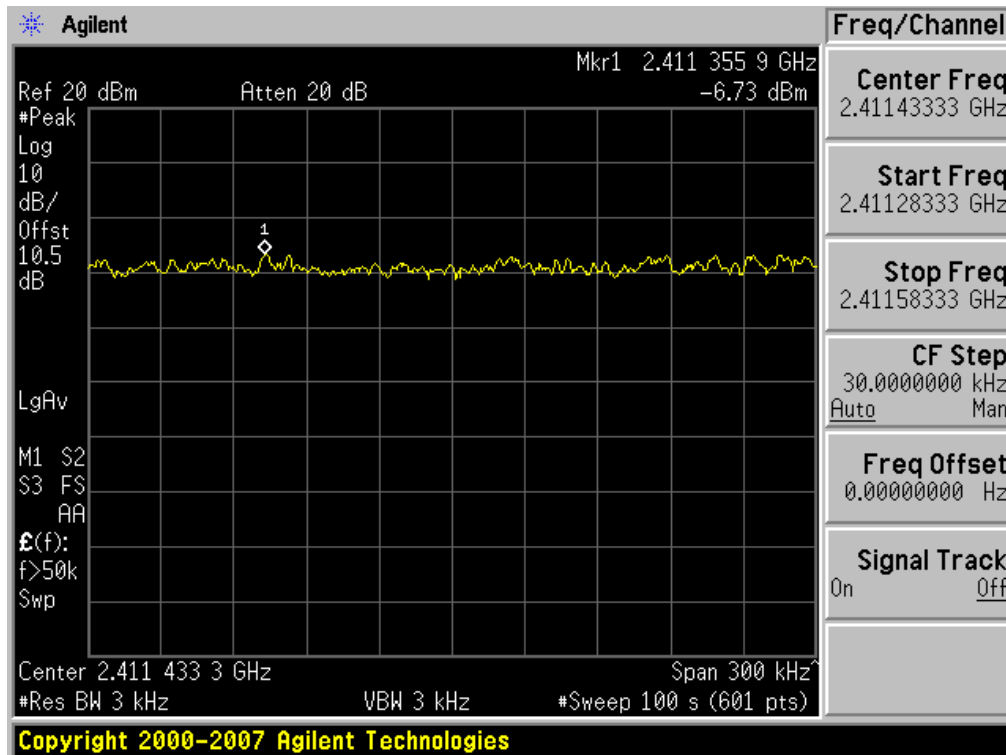


Power Spectral Density (802.11b-CH 6)

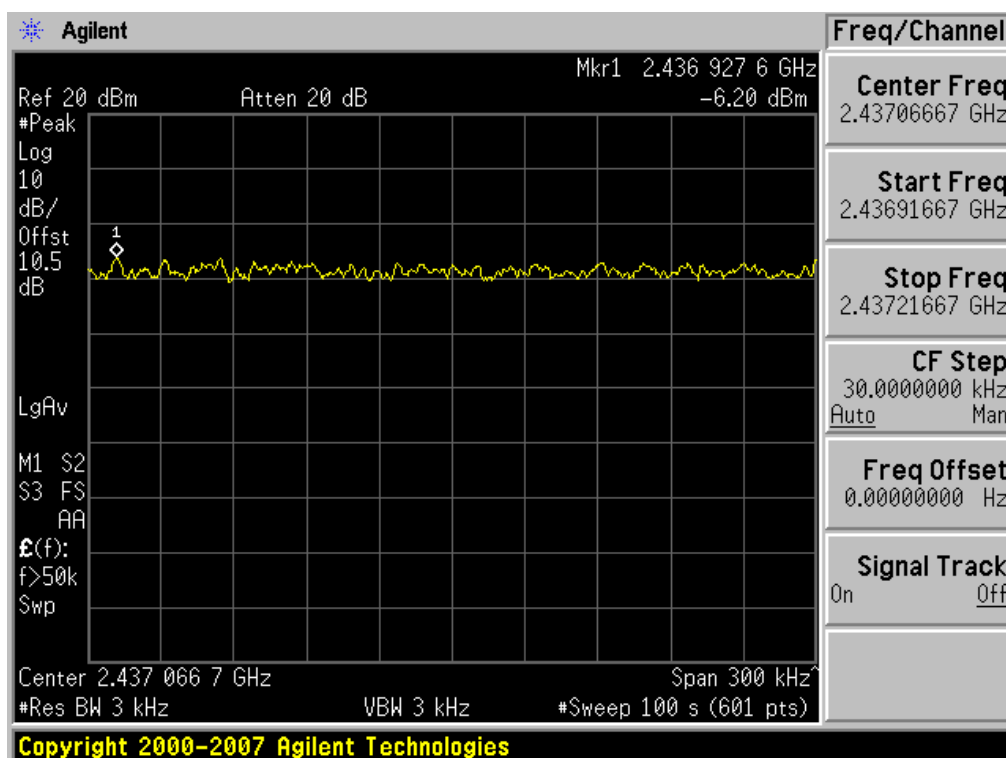


### Power Spectral Density (802.11b-CH 11)

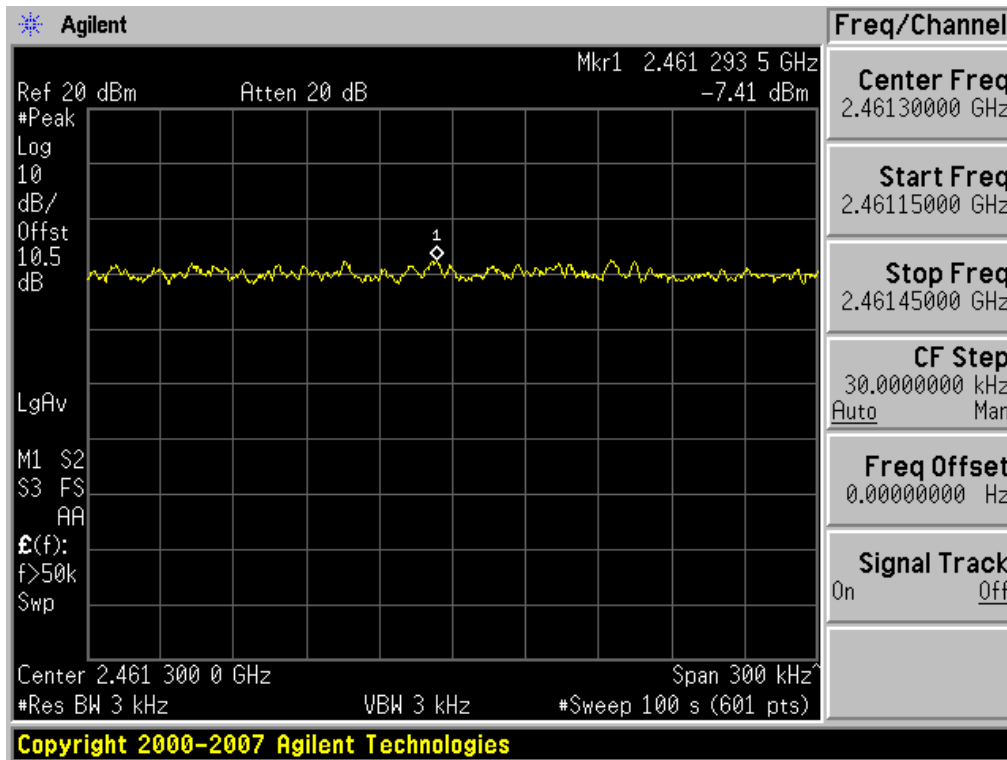


### Power Spectral Density (802.11g-CH 1)

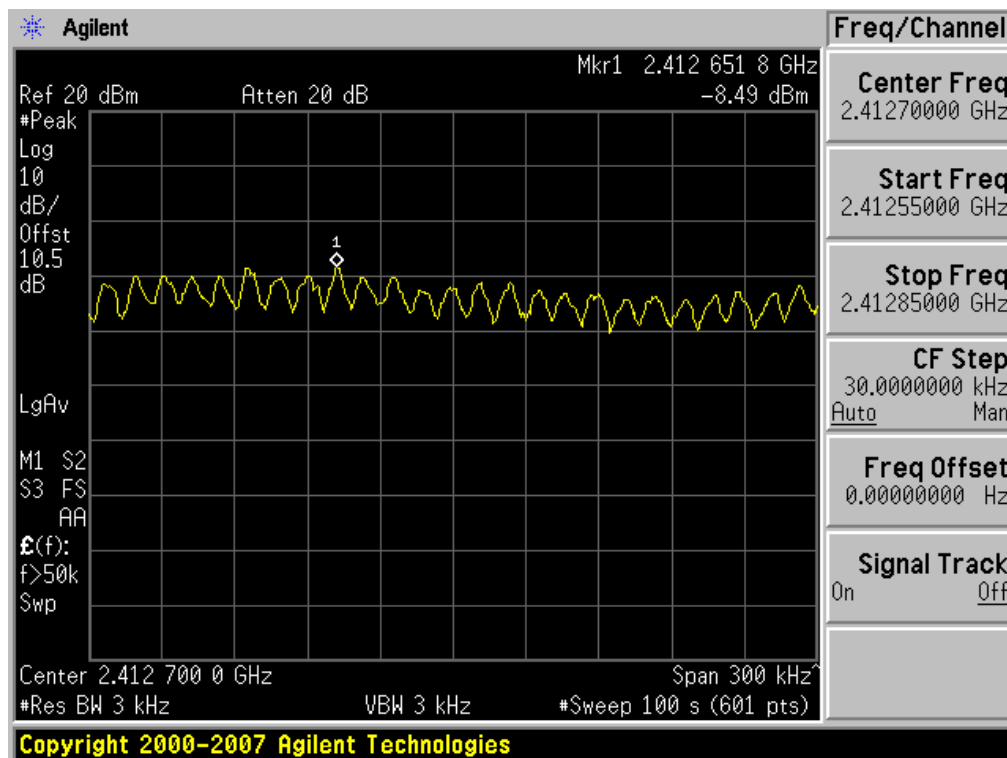


### Power Spectral Density (802.11g-CH 6)

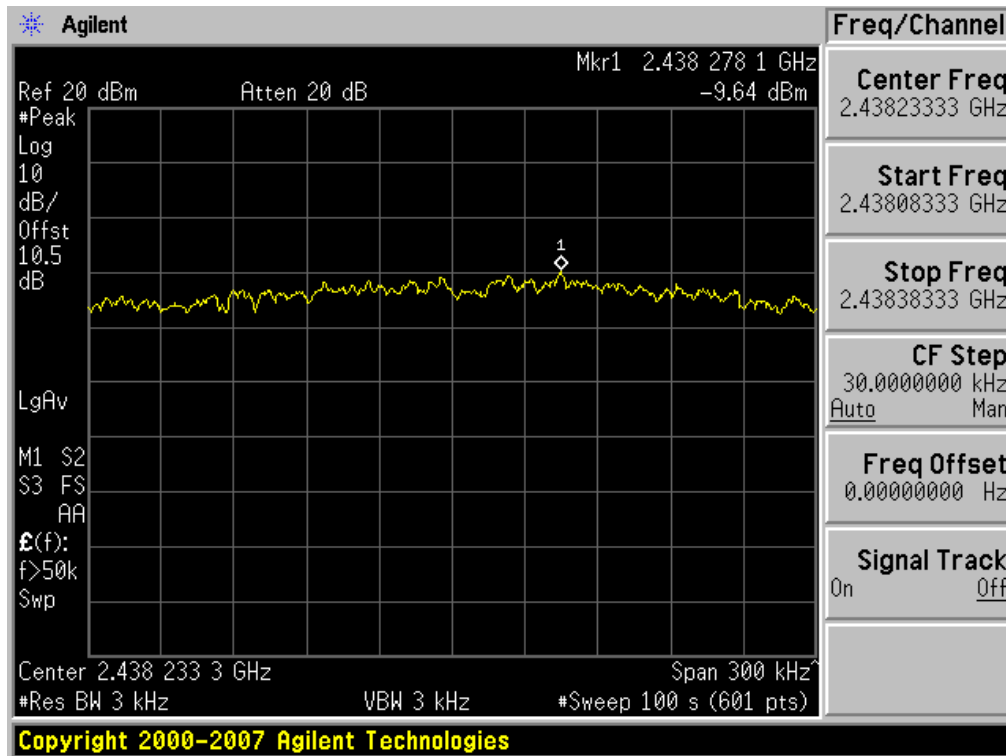


### Power Spectral Density (802.11g-CH11)

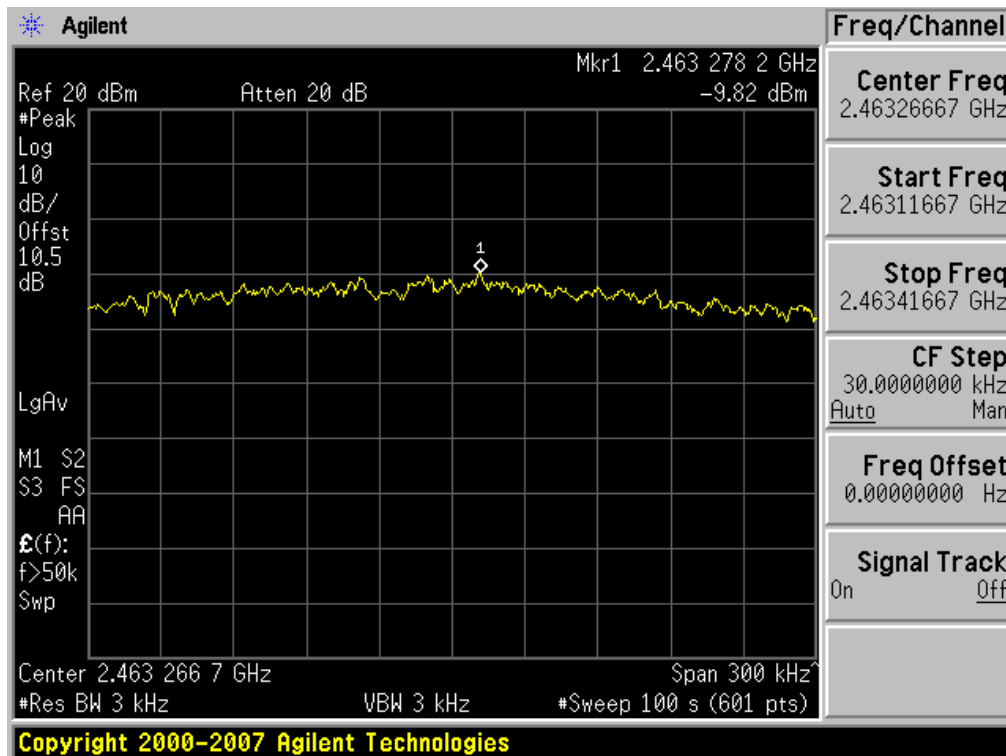


### Power Spectral Density (802.11n-CH 1)

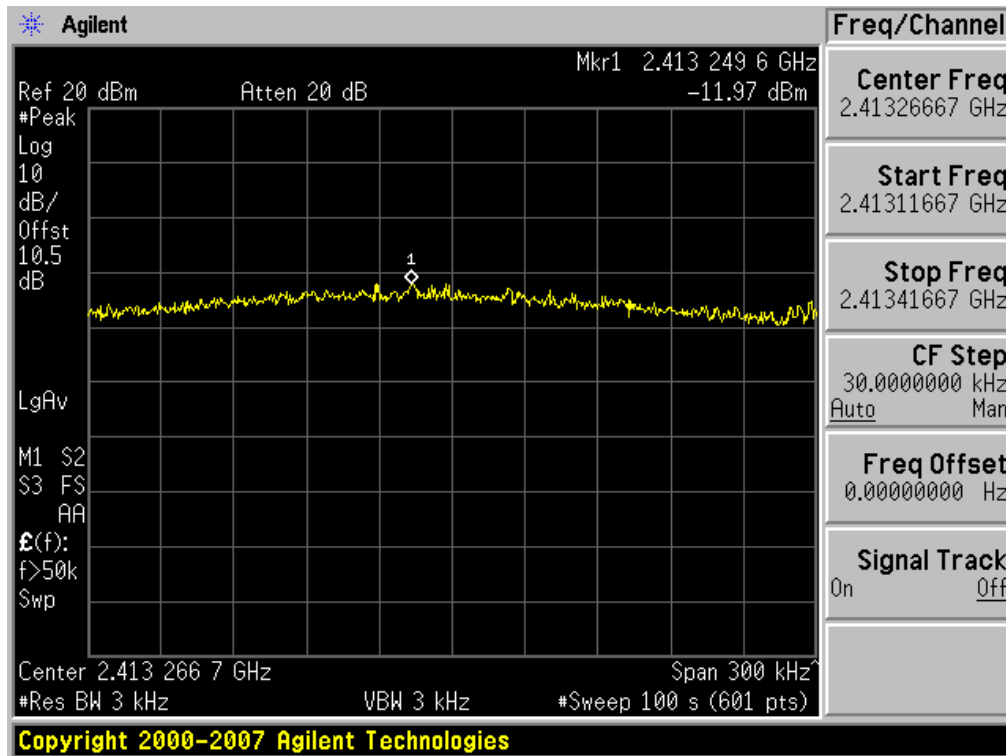

### Power Spectral Density (802.11n-CH 6)

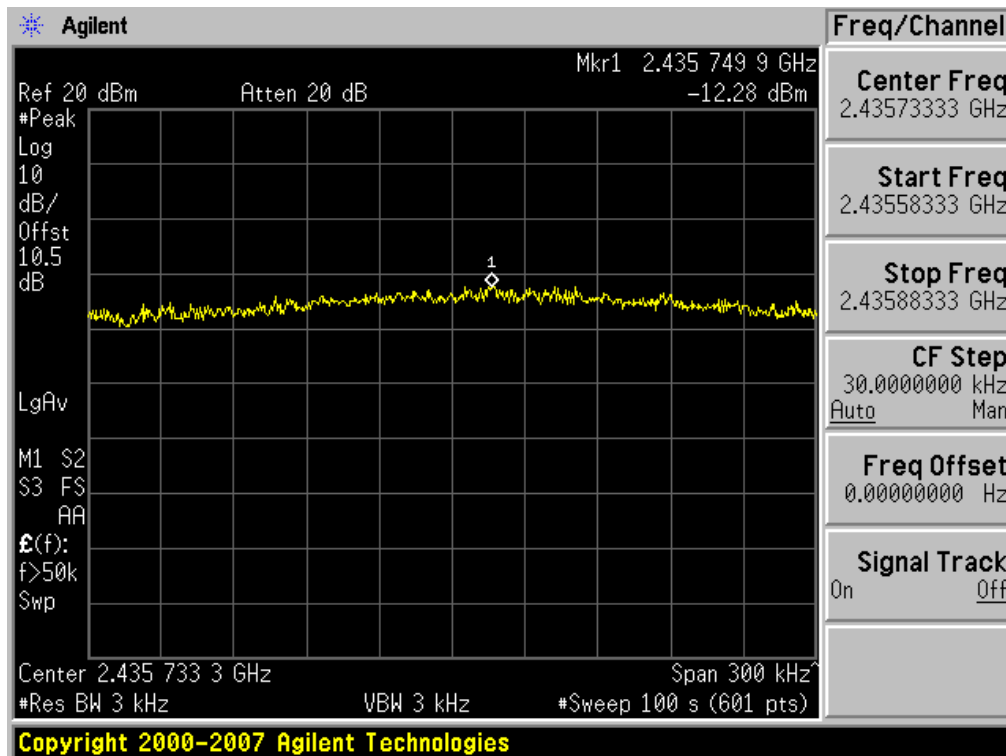

### Power Spectral Density (802.11n-CH11)

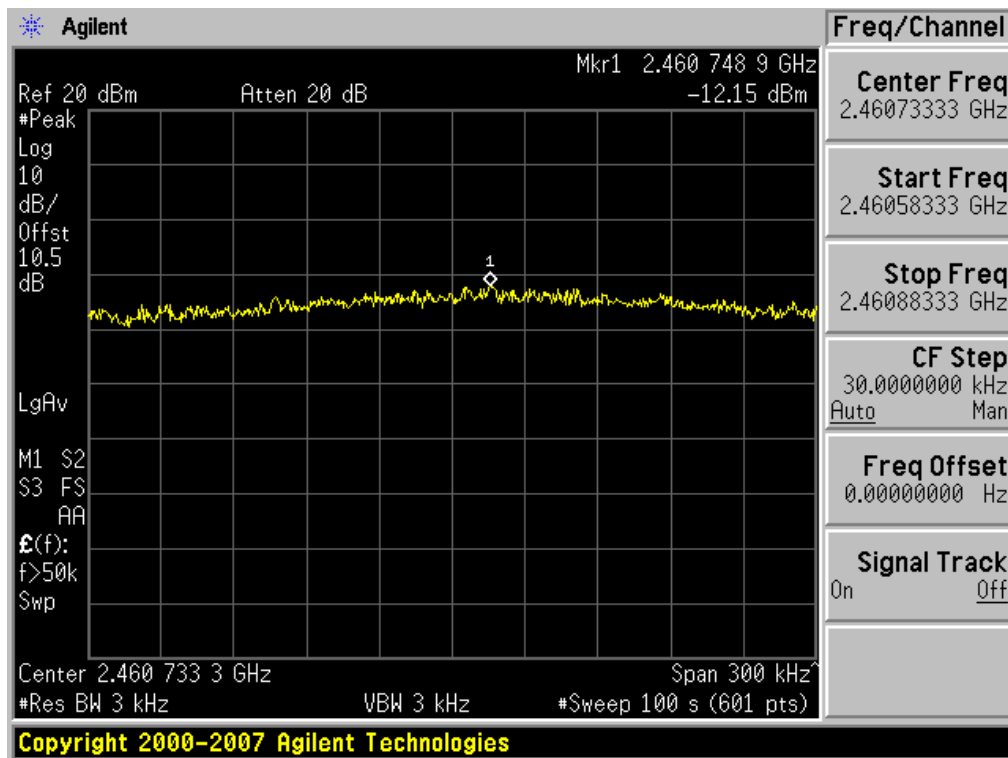


## 8.4 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

### Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### ■ TEST CONFIGURATION



### ■ TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.


Detector Mode is set to a peak detector Mode.

Measurements are made over the 30 MHz to 26 GHz range with the transmitter set to the lowest, middle, and highest channels.


|                                   |                                  |                                                                            |                                                  |
|-----------------------------------|----------------------------------|----------------------------------------------------------------------------|--------------------------------------------------|
| FCC PT.15.247<br>TEST REPORT      | FCC CERTIFICATION REPORT         |                                                                            | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCTR1202FR18-1 | Date of Issue:<br>March 06, 2012 | EUT Type:<br>850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx Only | FCC ID:<br>A3LGTS5300                            |

■ RESULT PLOTS


BandEdge (802.11b-CH1)

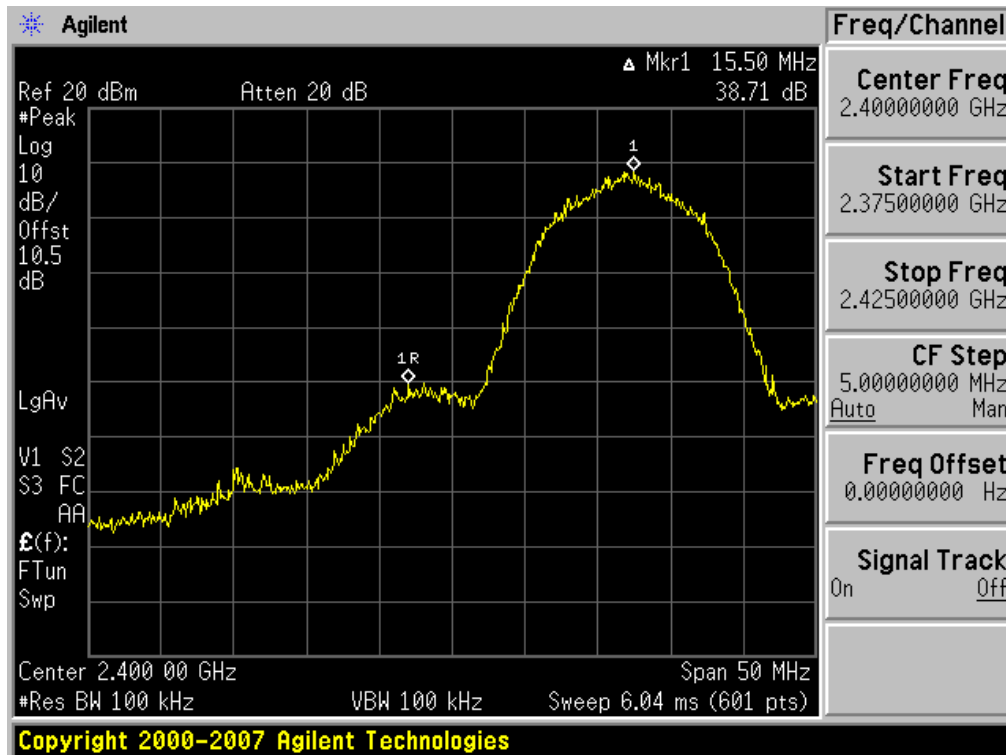


BandEdge (802.11b-CH11)

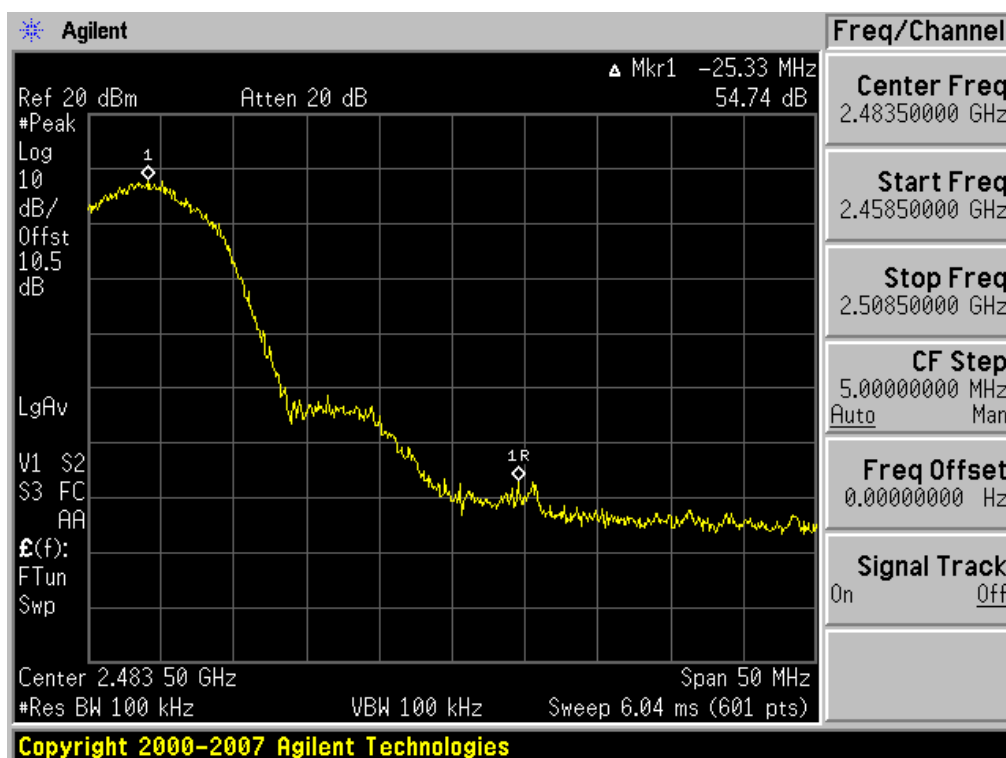


### BandEdge (802.11g-CH1)

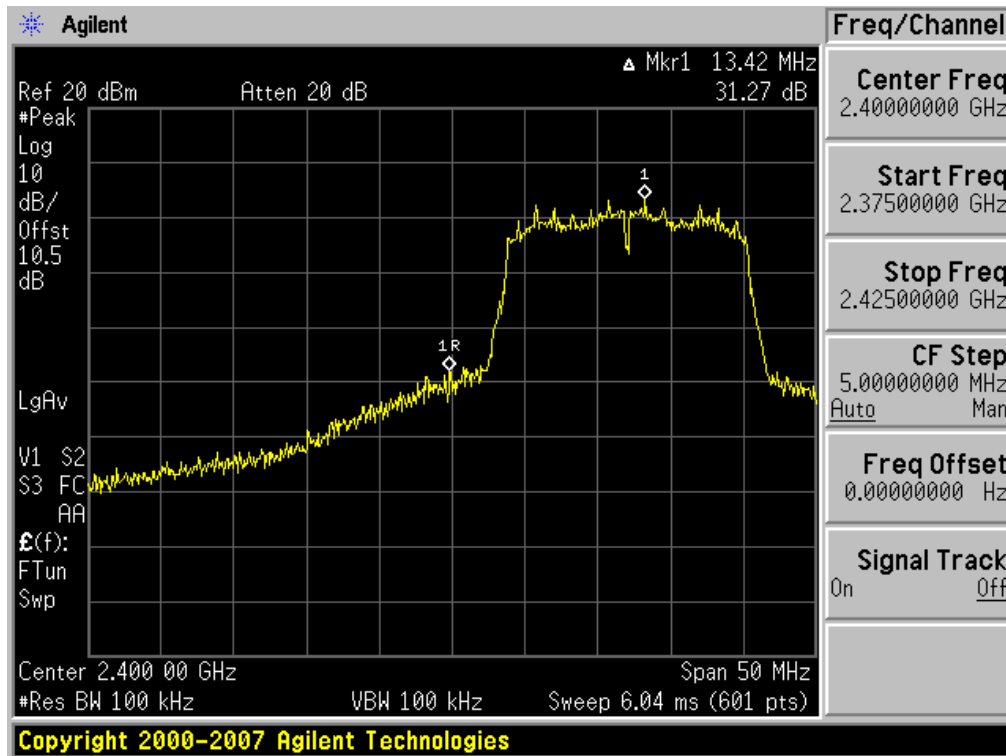


### BandEdge (802.11g-CH11)

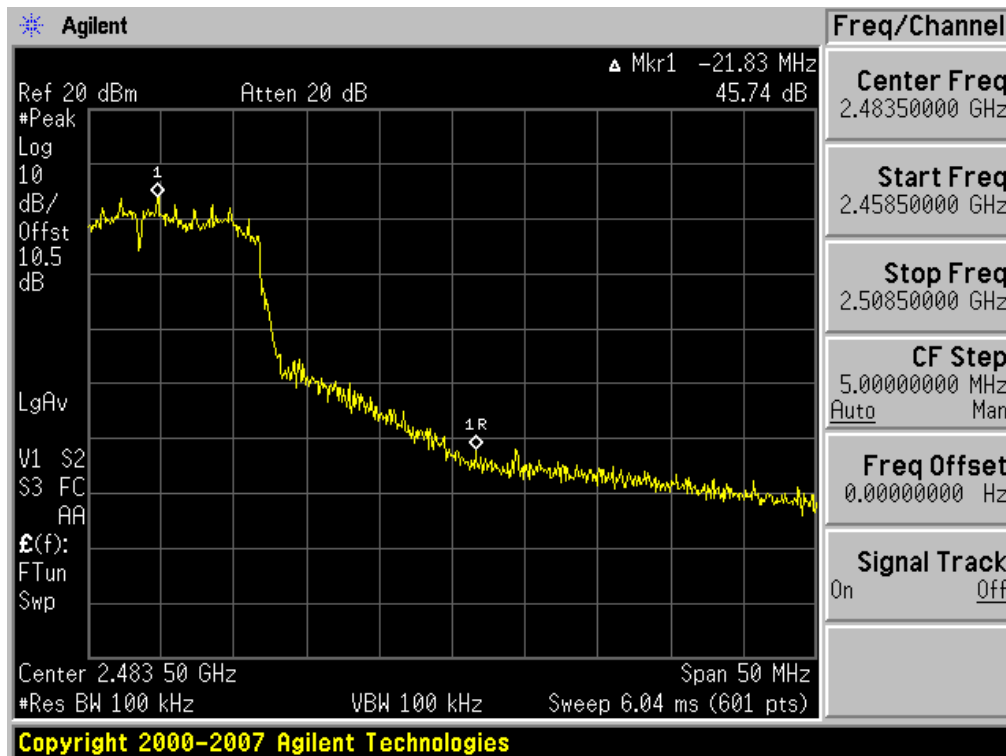

### BandEdge (802.11n-CH1)

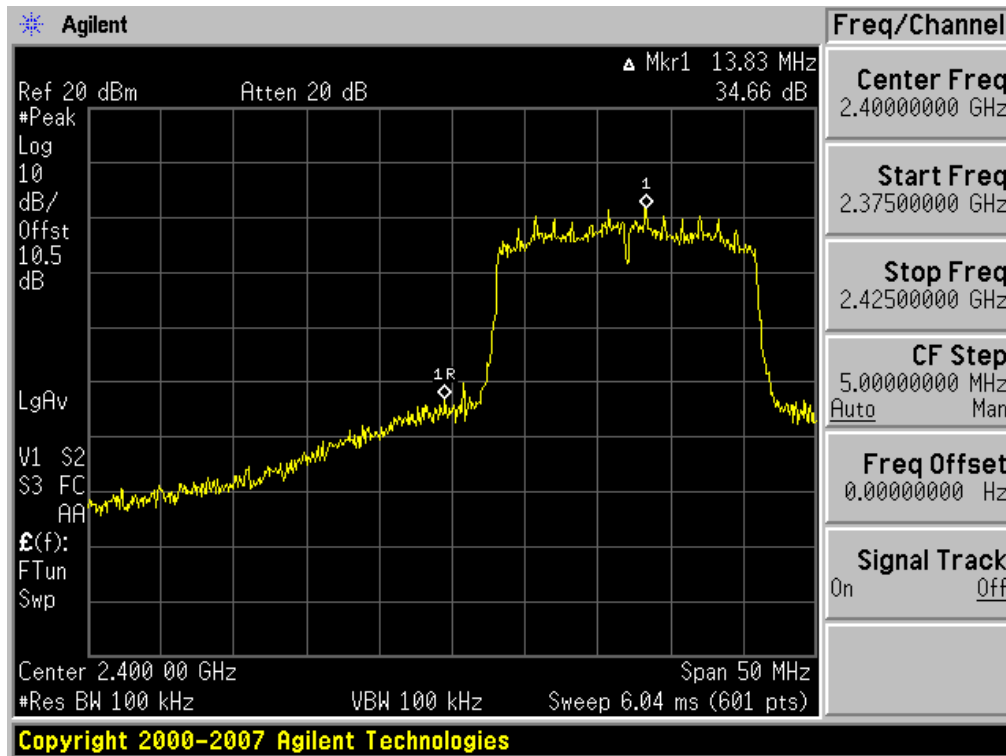


### BandEdge (802.11n-CH11)

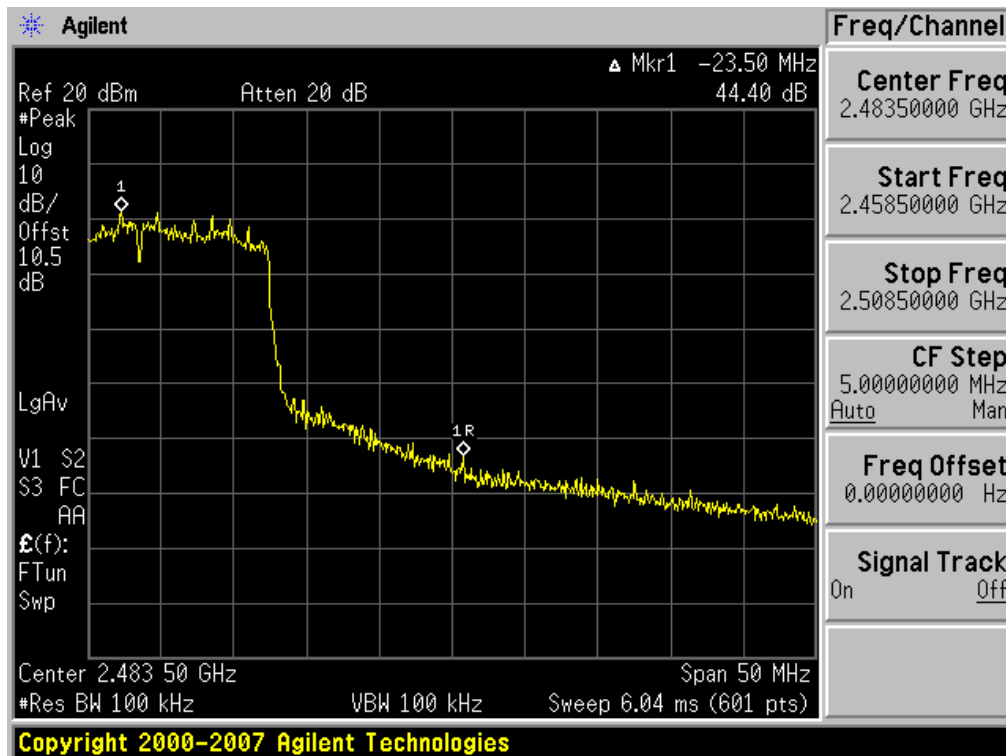


30 MHz ~ 1 GHz


### Conducted Spurious Emission (802.11b-CH1)

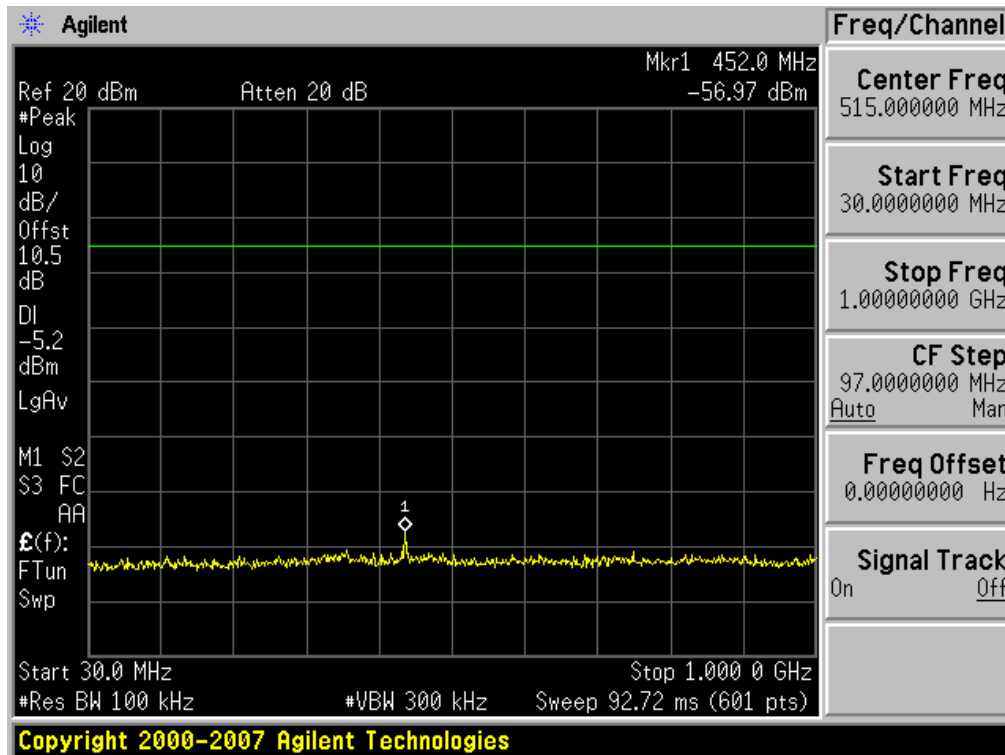


### Conducted Spurious Emission (802.11b-CH6)

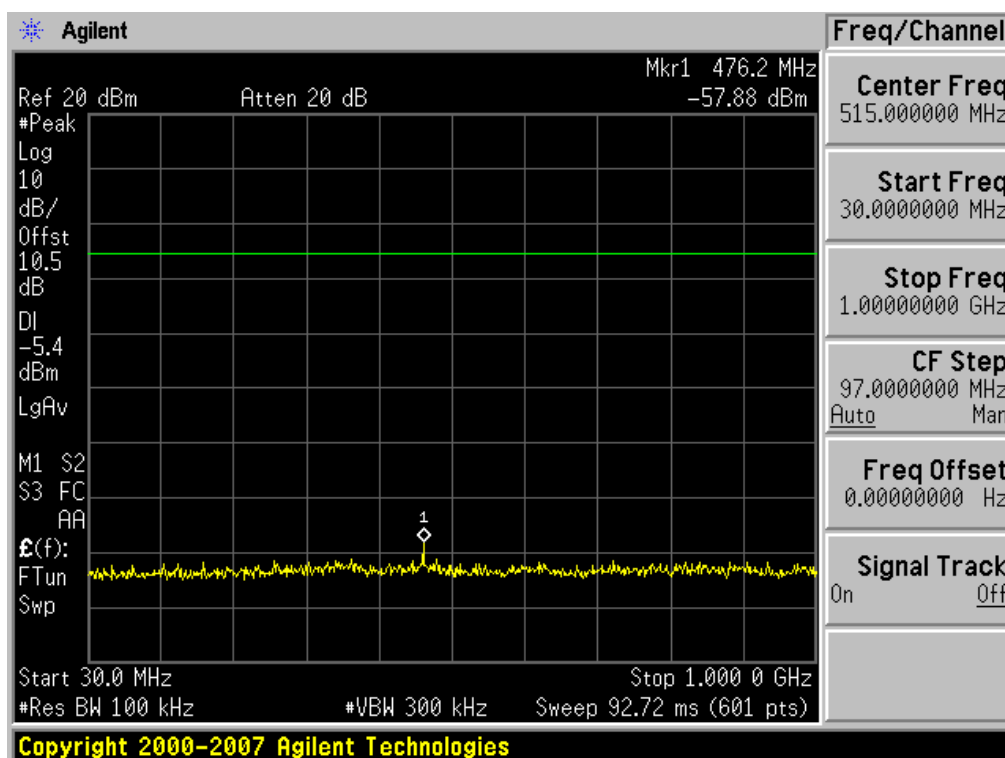


### Conducted Spurious Emission (802.11b-CH11)

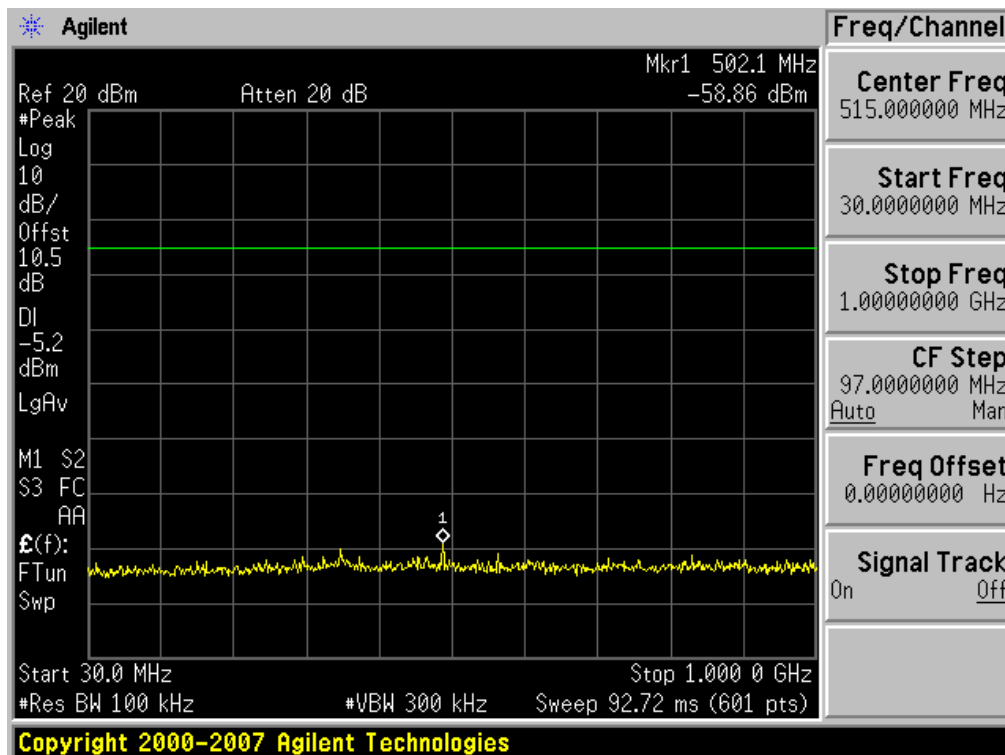


### Conducted Spurious Emission (802.11g-CH11)

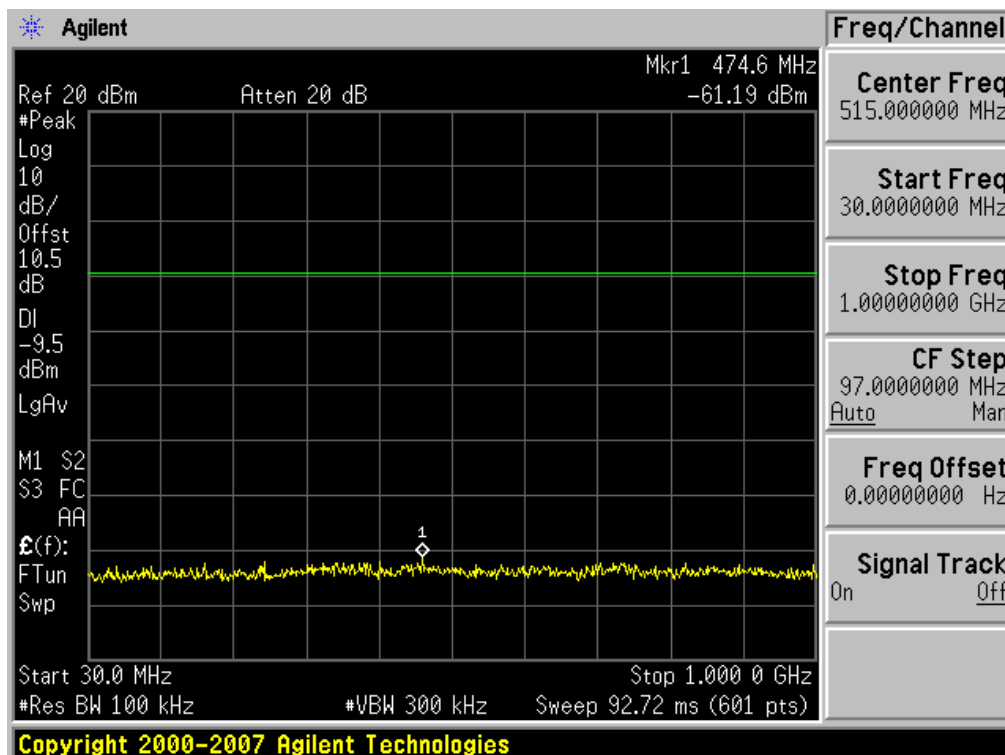


### Conducted Spurious Emission (802.11g-CH6)

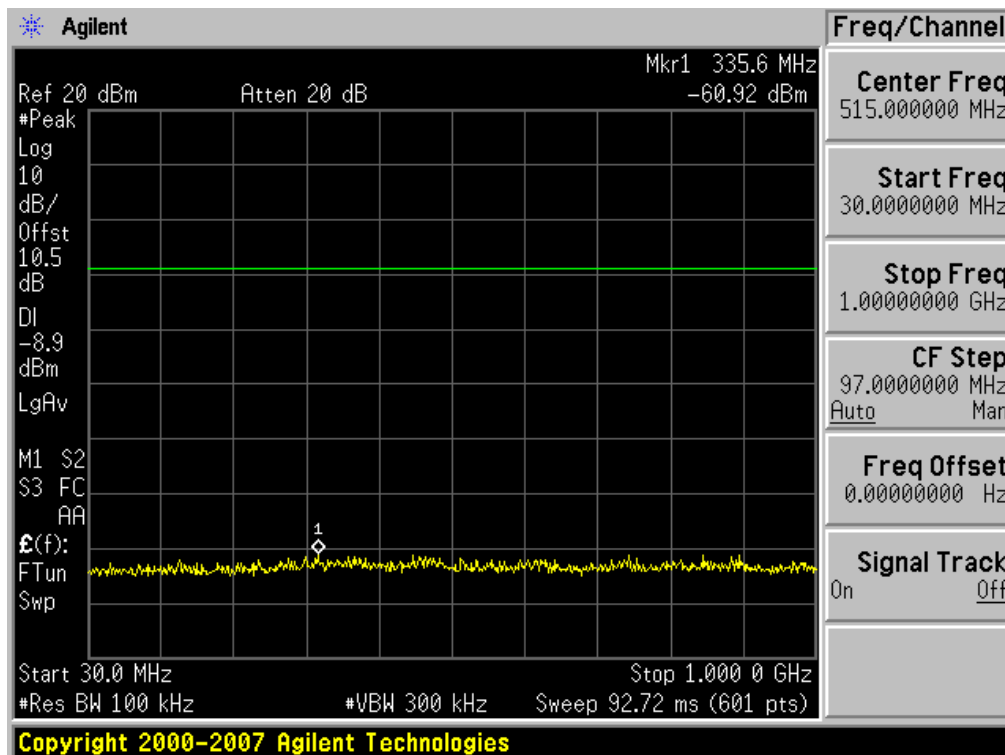


### Conducted Spurious Emission (802.11g-CH11)

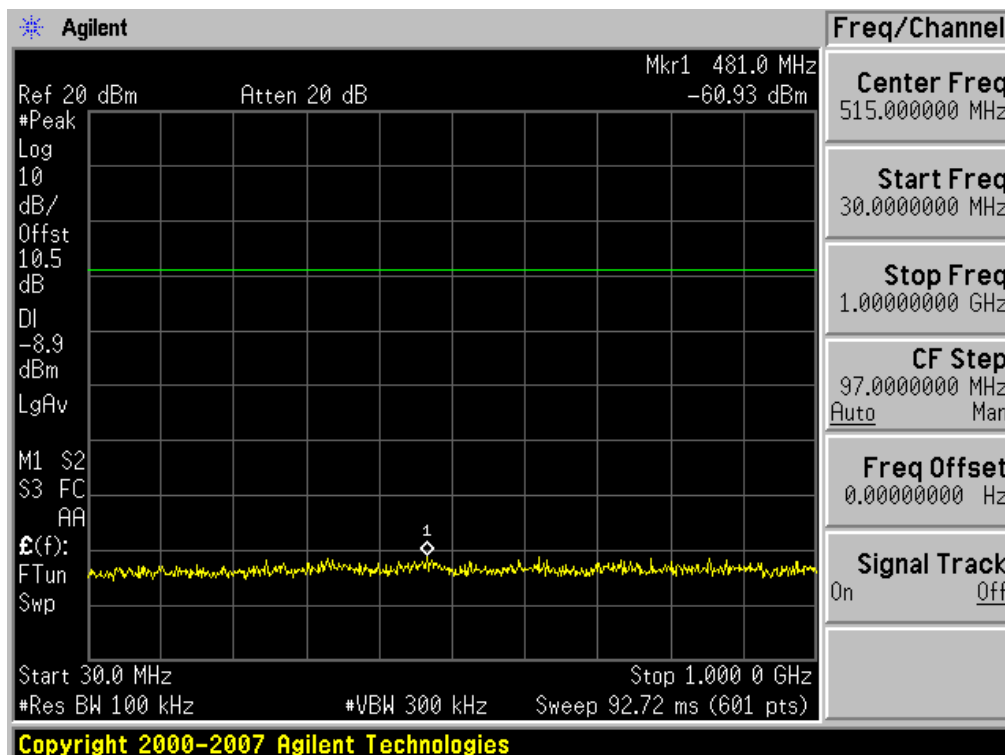


### Conducted Spurious Emission (802.11n-CH1)

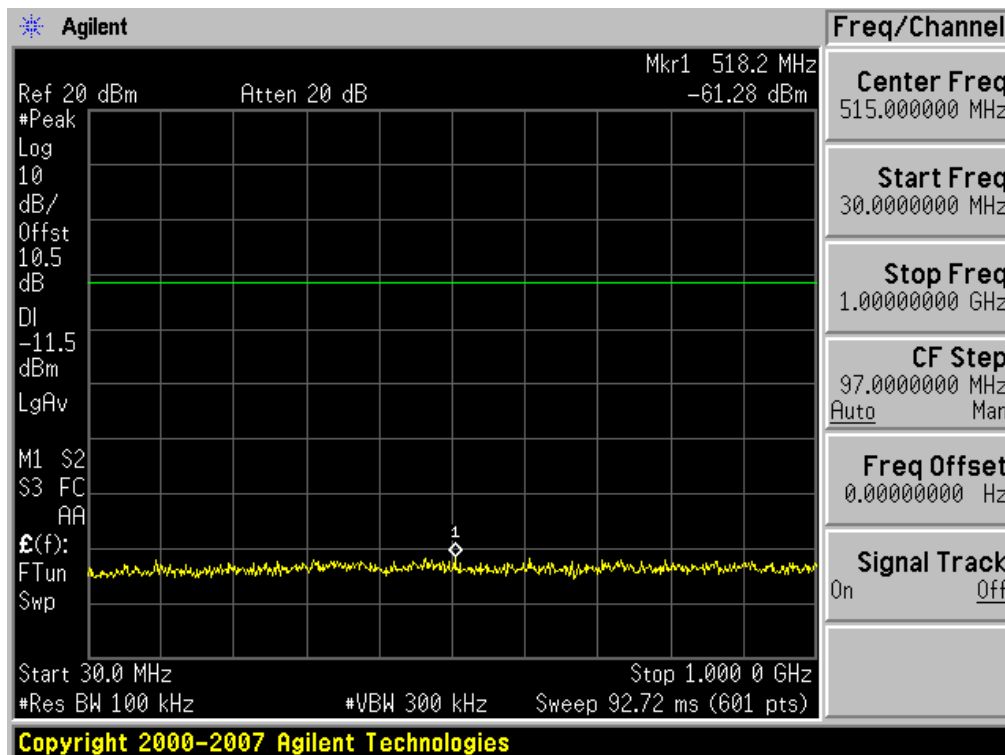

### Conducted Spurious Emission (802.11n-CH6)

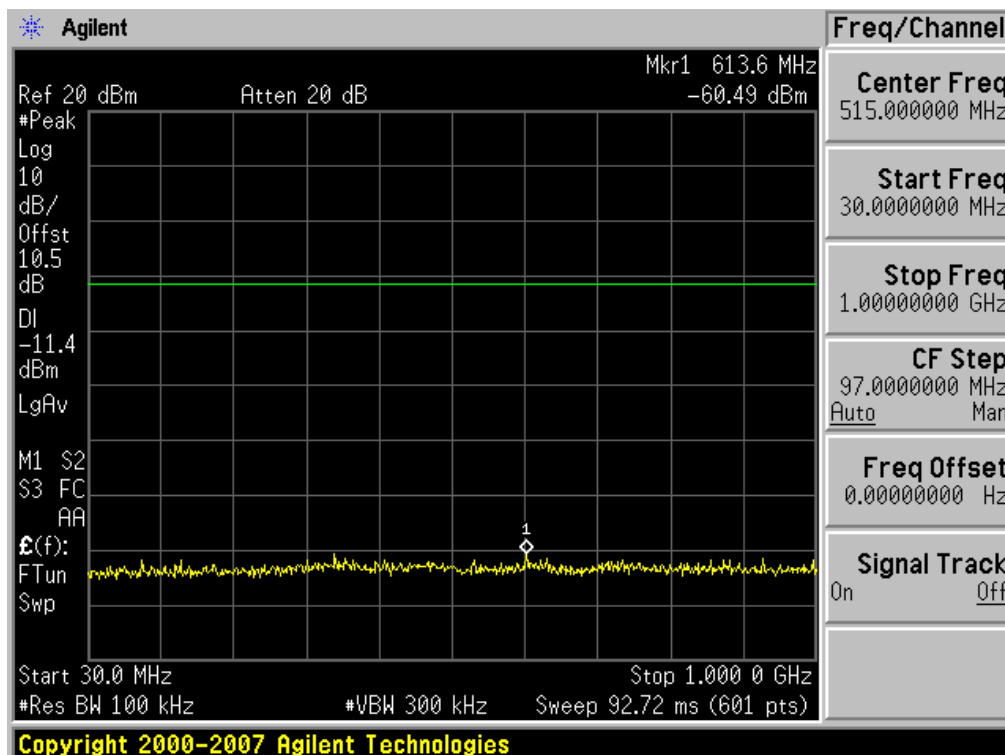


## Conducted Spurious Emission (802.11n-CH11)

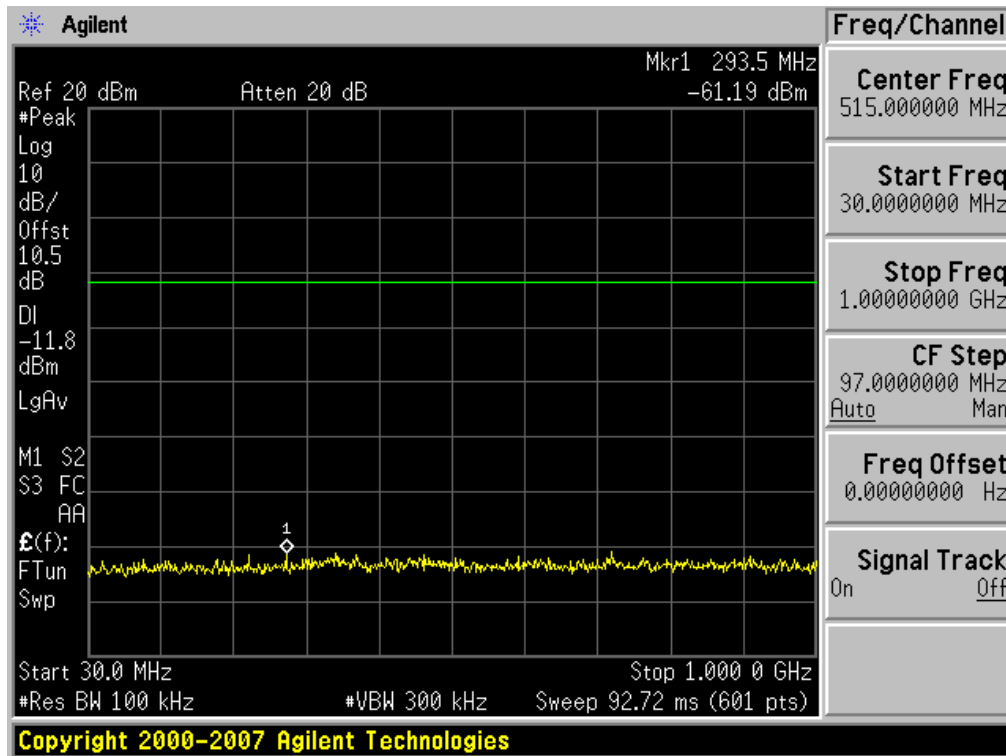


1 GHz ~ 26 GHz


### Conducted Spurious Emission (802.11b-CH1)

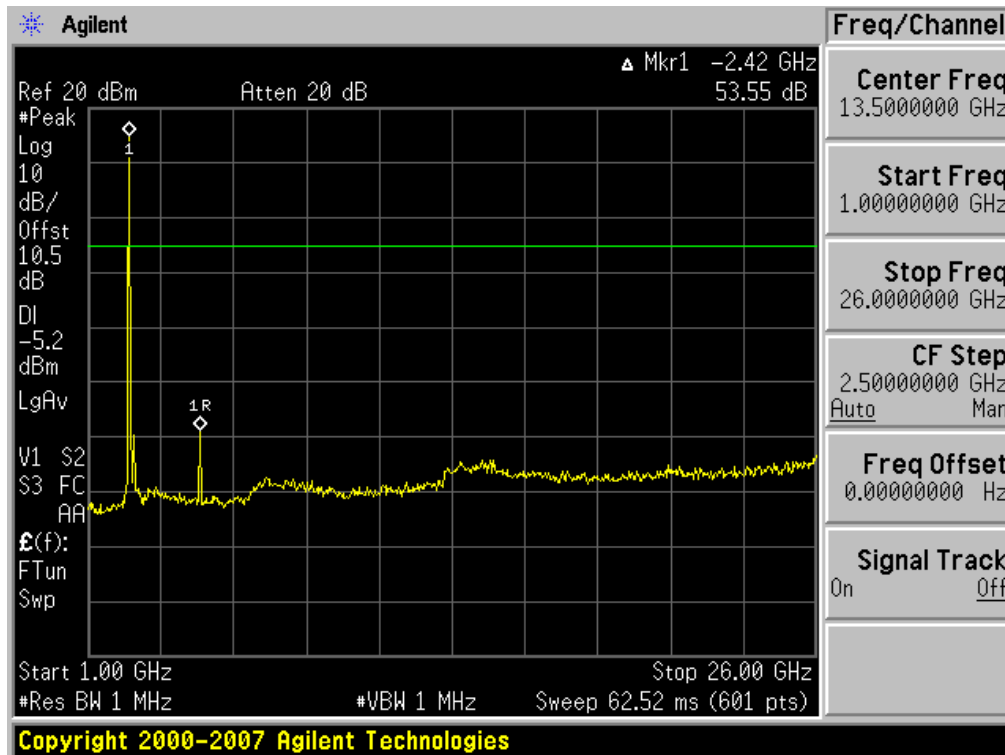


### Conducted Spurious Emission (802.11b-CH6)

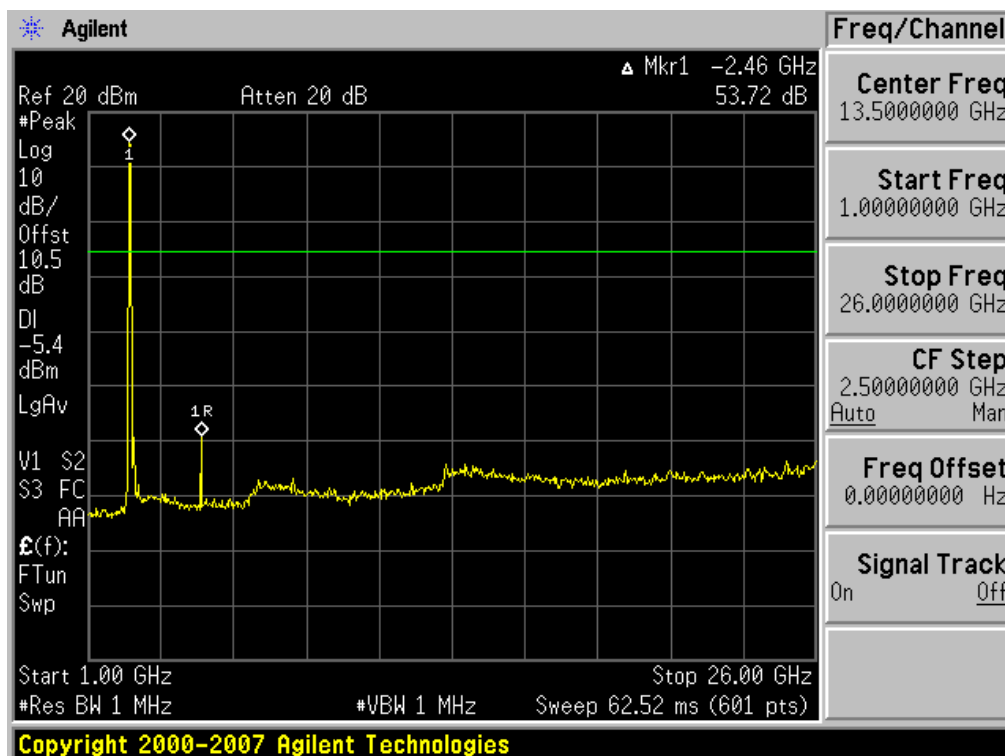


### Conducted Spurious Emission (802.11b-CH11)

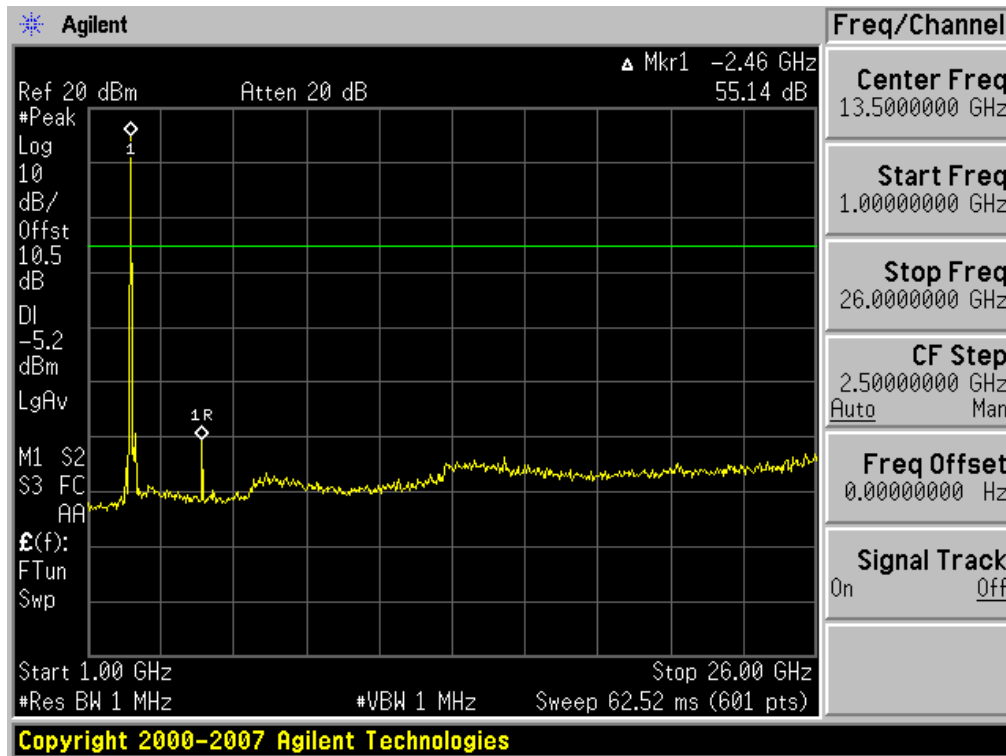


### Conducted Spurious Emission (802.11g-CH1)

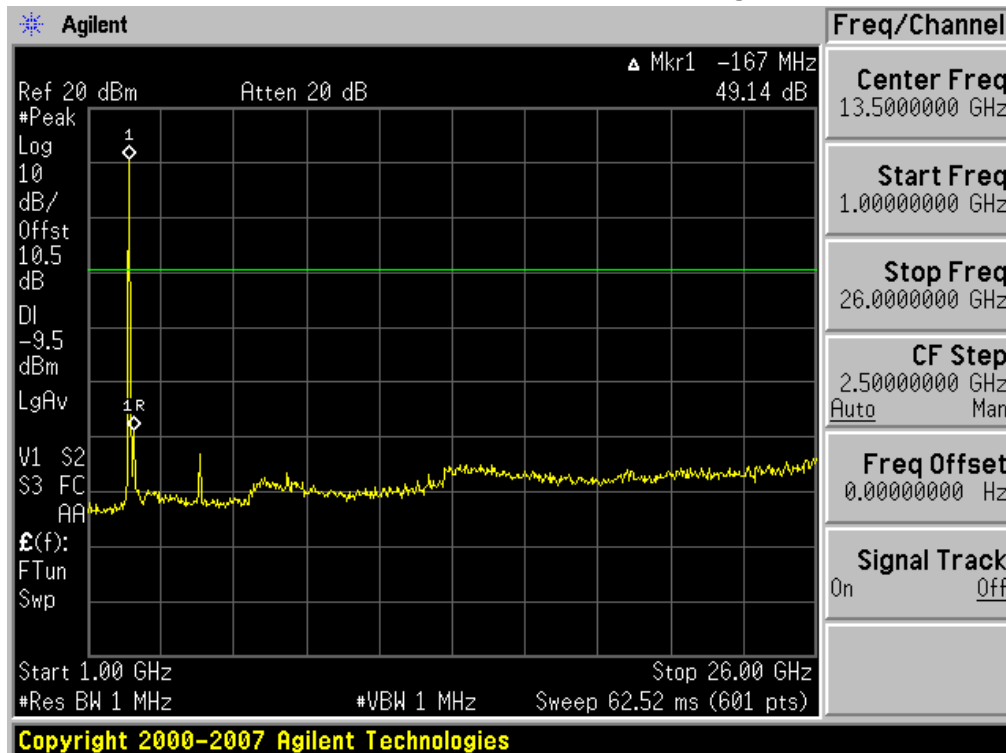


### Conducted Spurious Emission (802.11g-CH6)

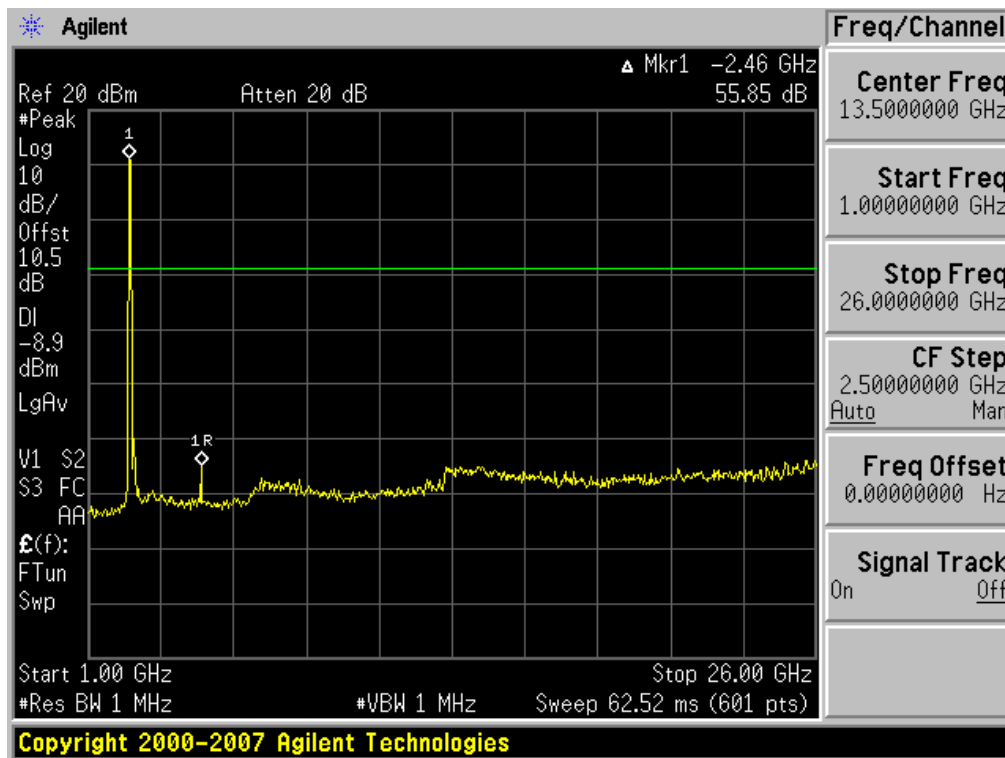


### Conducted Spurious Emission (802.11g-CH11)

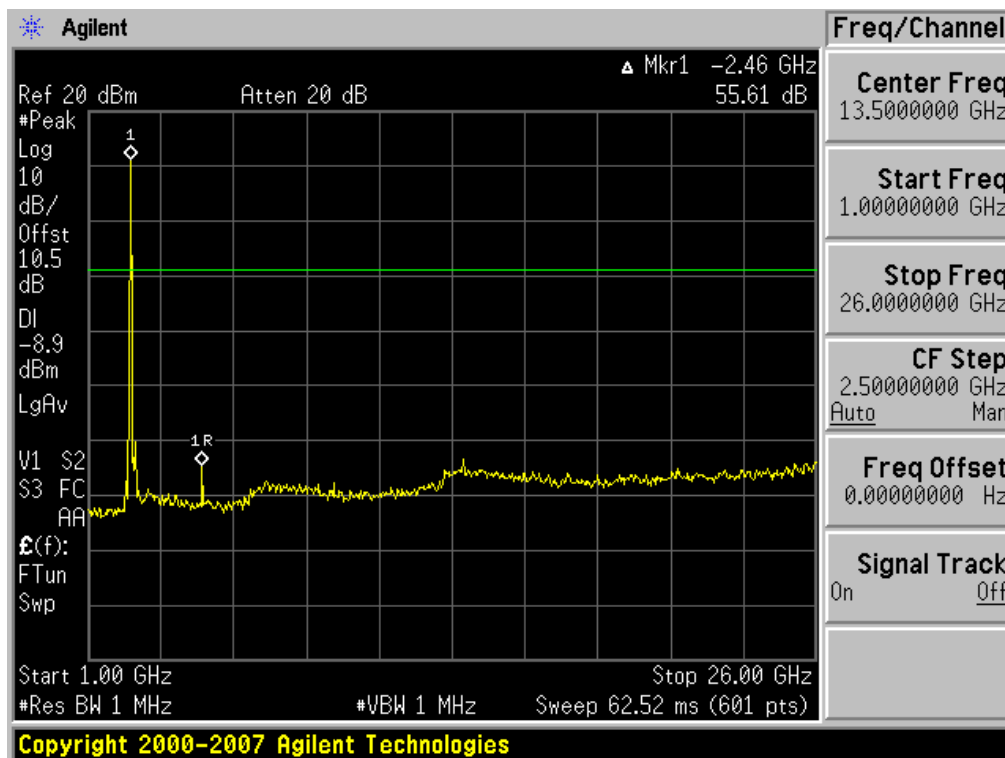


### Conducted Spurious Emission (802.11n-CH1)

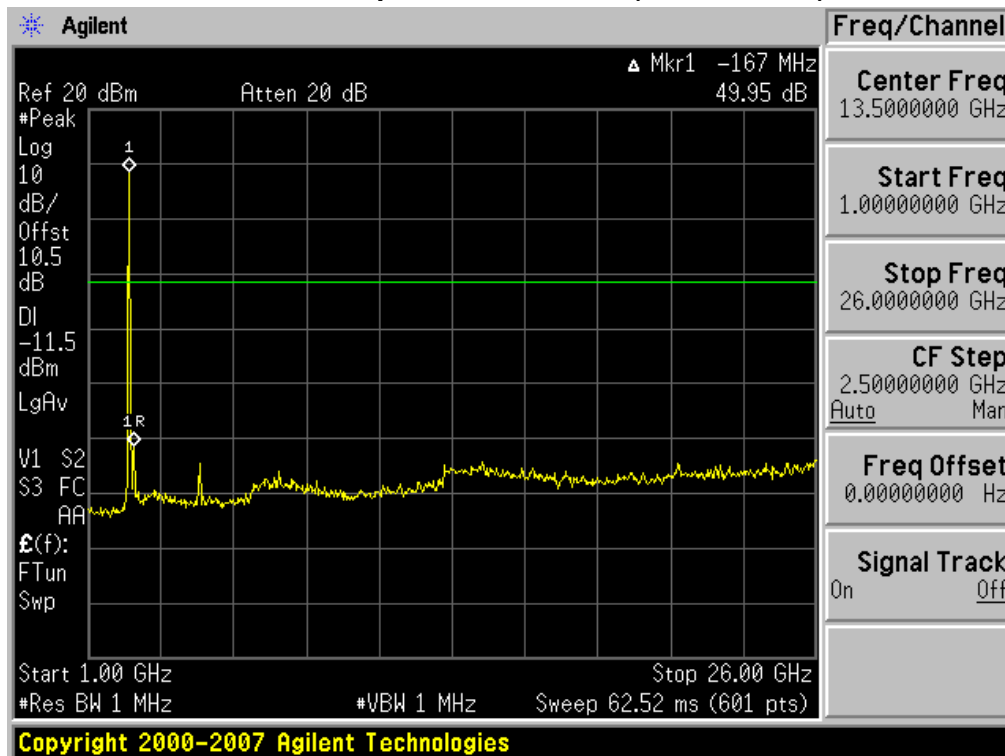

### Conducted Spurious Emission (802.11n-CH6)

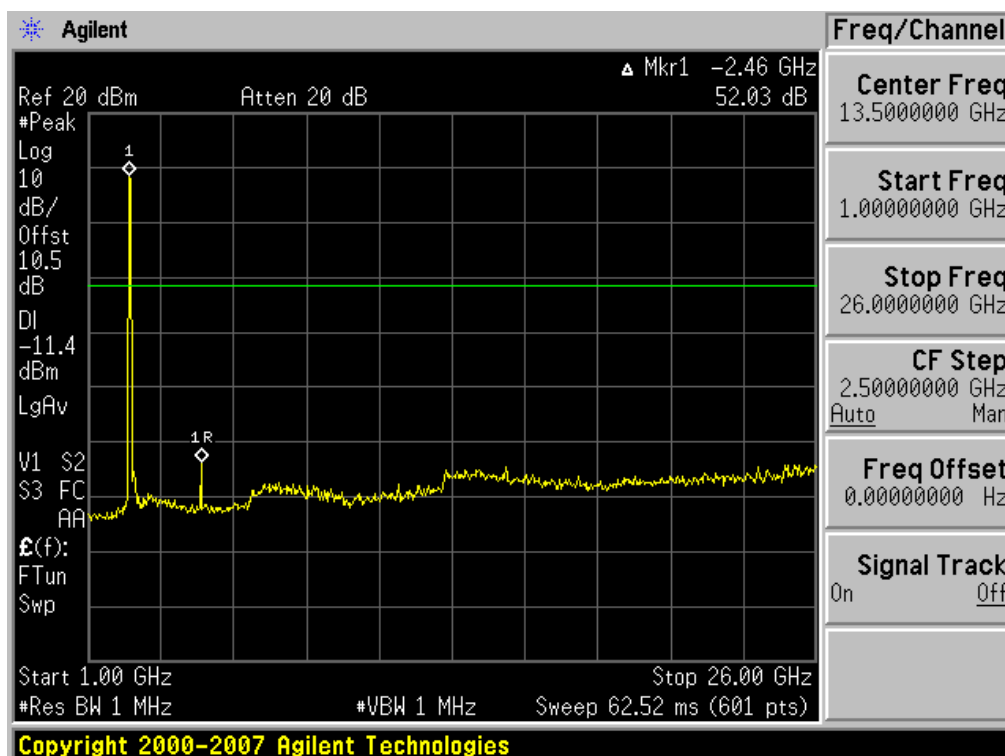

**Conducted Spurious Emission (802.11n-CH11)**

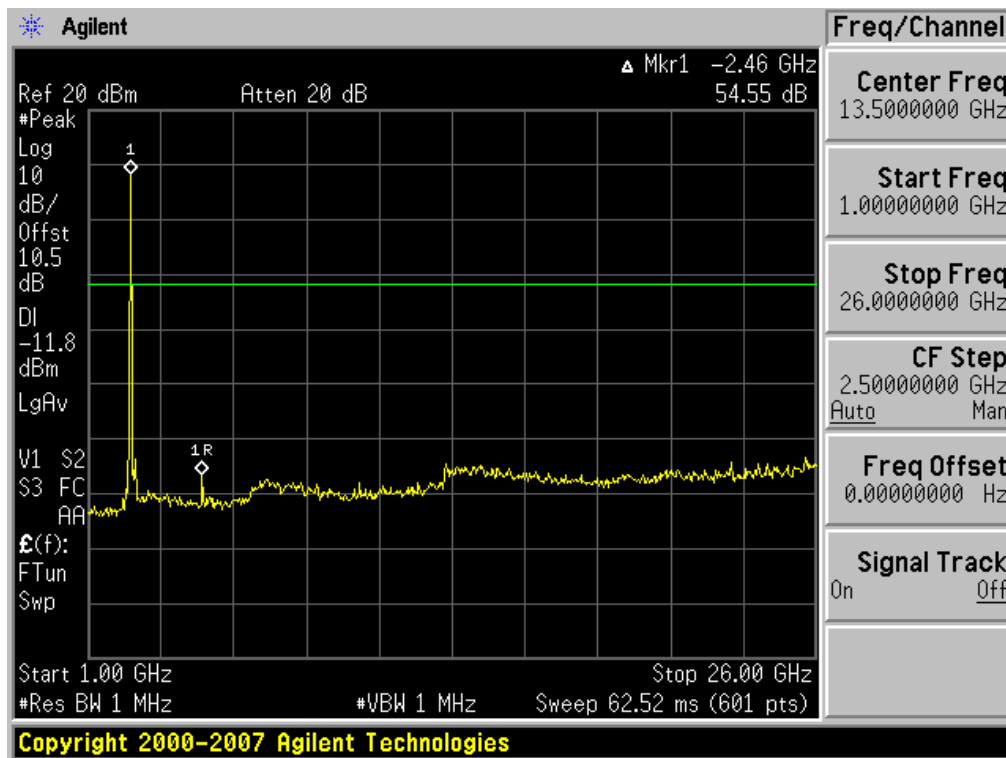

## 8.5 RADIATED MEASUREMENT.


### 8.5.1 RADIATED SPURIOUS EMISSIONS.

Test Requirements and limit, §15.205, §15.209


| Frequency (MHz) | Field Strength (uV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009 – 0.490   | 2400/F(kHz)           | 300                      |
| 0.490 – 1.705   | 24000/F(kHz)          | 30                       |
| 1.705 – 30      | 30                    | 30                       |
| 30-88           | 100                   | 3                        |
| 88-216          | 150                   | 3                        |
| 216-960         | 200                   | 3                        |
| Above 960       | 500                   | 3                        |


## Test Configuration

### Below 30 MHz

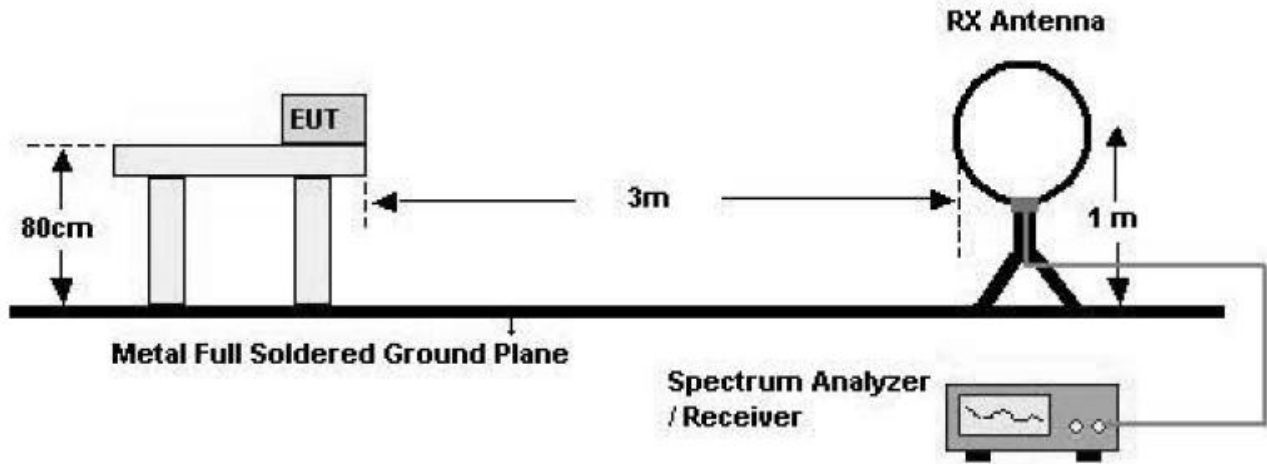

### 30 MHz - 1 GHz

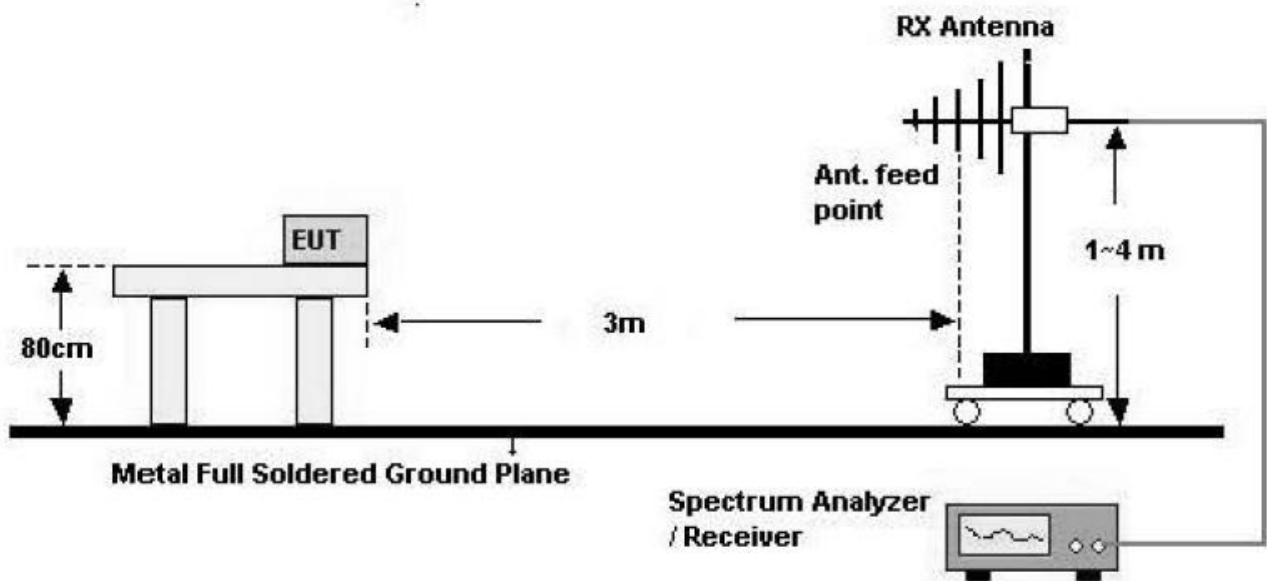

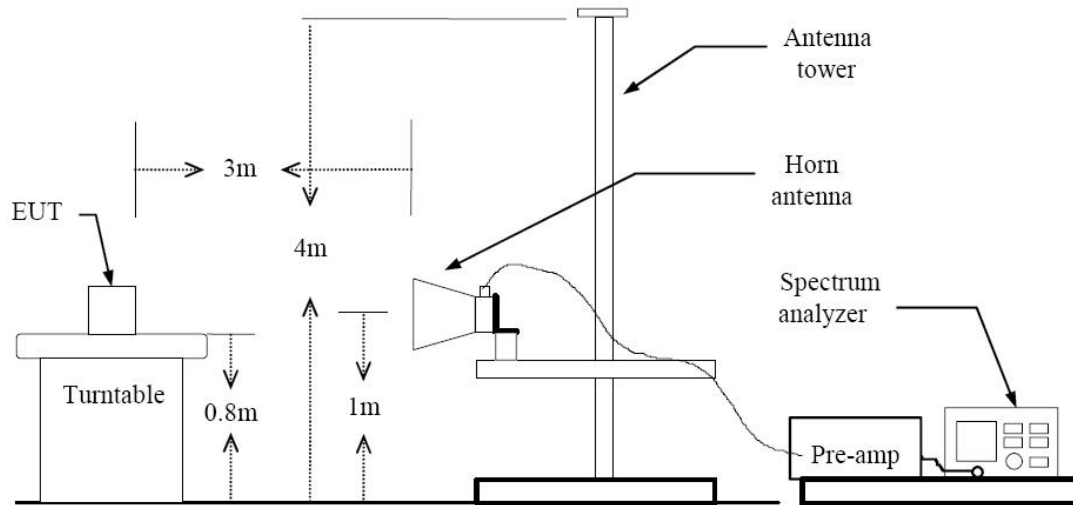

## TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

|                                          |                                         |                                                                                   |                                                  |
|------------------------------------------|-----------------------------------------|-----------------------------------------------------------------------------------|--------------------------------------------------|
| <b>FCC PT.15.247<br/>TEST REPORT</b>     | <b>FCC CERTIFICATION REPORT</b>         |                                                                                   | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| <b>Test Report No.</b><br>HCTR1202FR18-1 | <b>Date of Issue:</b><br>March 06, 2012 | <b>EUT Type:</b><br>850/1900 GSM/GPRS Phone with Bluetooth, WLAN and EDGE Rx Only | <b>FCC ID:</b><br>A3LGT5300                      |

## TEST RESULTS

**9 kHz – 30MHz**

**Operation Mode:** Normal Mode

| Frequency               | Reading    | Ant. factor | Cable loss | Ant. POL | Total        | Limit        | Margin |
|-------------------------|------------|-------------|------------|----------|--------------|--------------|--------|
| MHz                     | dB $\mu$ V | dB /m       | dB         | (H/V)    | dB $\mu$ V/m | dB $\mu$ V/m | dB     |
| No Critical peaks found |            |             |            |          |              |              |        |

### Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)
4. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor

## TEST RESULTS

**Below 1 GHz**

**Operation Mode:** Normal Mode

| Frequency               | Reading    | Ant. factor | Cable loss | Ant. POL | Total        | Limit        | Margin |
|-------------------------|------------|-------------|------------|----------|--------------|--------------|--------|
| MHz                     | dB $\mu$ V | dB /m       | dB         | (H/V)    | dB $\mu$ V/m | dB $\mu$ V/m | dB     |
| No Critical peaks found |            |             |            |          |              |              |        |

### Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

## Above 1 GHz

|                     |          |
|---------------------|----------|
| Operation Mode:     | 802.11 b |
| Transfer Rate:      | 1 Mbps   |
| Operating Frequency | 2412     |
| Channel No.         | 01 Ch    |

| Frequency<br>[MHz] | Reading<br>dBuV | AN.+CL-AMP G<br>[dB] | ANT. POL<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Detect |
|--------------------|-----------------|----------------------|-------------------|-------------------|-------------------|----------------|--------|
| 4824               | 52.62           | -0.10                | V                 | 52.52             | 74                | 21.48          | PK     |
| 4824               | 41.27           | -0.10                | V                 | 41.17             | 54                | 12.83          | AV     |
| 7236               | 48.50           | 10.13                | V                 | 58.63             | 74                | 15.37          | PK     |
| 7236               | 35.73           | 10.13                | V                 | 45.86             | 54                | 8.14           | AV     |
| 4824               | 53.56           | -0.10                | H                 | 53.46             | 74                | 20.54          | PK     |
| 4824               | 43.47           | -0.10                | H                 | 43.37             | 54                | 10.63          | AV     |
| 7236               | 49.42           | 10.13                | H                 | 59.55             | 74                | 14.45          | PK     |
| 7236               | 36.78           | 10.13                | H                 | 46.91             | 54                | 7.09           | AV     |

### Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
  - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
5. We have done 802.11b/g/n mode test. Worst case of EUT is 1 Mbps in 802.11b.

|                     |          |
|---------------------|----------|
| Operation Mode:     | 802.11 b |
| Transfer Rate:      | 1 Mbps   |
| Operating Frequency | 2437     |
| Channel No.         | 06 Ch    |

| Frequency<br>[MHz] | Reading<br>dBuV | AN.+CL-AMP G<br>[dB] | ANT. POL<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Detect |
|--------------------|-----------------|----------------------|-------------------|-------------------|-------------------|----------------|--------|
| 4874               | 51.97           | 0.13                 | V                 | 52.10             | 74                | 21.90          | PK     |
| 4874               | 41.39           | 0.13                 | V                 | 41.52             | 54                | 12.48          | AV     |
| 7311               | 51.25           | 10.01                | V                 | 61.26             | 74                | 12.74          | PK     |
| 7311               | 39.27           | 10.01                | V                 | 49.28             | 54                | 4.72           | AV     |
| 4874               | 53.17           | 0.13                 | H                 | 53.30             | 74                | 20.70          | PK     |
| 4874               | 43.89           | 0.13                 | H                 | 44.02             | 54                | 9.98           | AV     |
| 7311               | 51.69           | 10.01                | H                 | 61.70             | 74                | 12.30          | PK     |
| 7311               | 38.89           | 10.01                | H                 | 48.90             | 54                | 5.10           | AV     |

#### Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
  - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
5. We have done 802.11b/g/n mode test. Worst case of EUT is 1 Mbps in 802.11b.

Operation Mode: 802.11 b

Transfer Rate: 1 Mbps

Operating Frequency: 2462

Channel No. 11 Ch

| Frequency<br>[MHz] | Reading<br>dBuV | AN.+CL-AMP G<br>[dB] | ANT. POL<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Detect |
|--------------------|-----------------|----------------------|-------------------|-------------------|-------------------|----------------|--------|
| 4924               | 50.65           | 0.45                 | V                 | 51.10             | 74                | 22.90          | PK     |
| 4924               | 39.20           | 0.45                 | V                 | 39.65             | 54                | 14.35          | AV     |
| 7386               | 51.32           | 10.17                | V                 | 61.49             | 74                | 12.51          | PK     |
| 7386               | 39.53           | 10.17                | V                 | 49.70             | 54                | 4.30           | AV     |
| 4924               | 51.44           | 0.45                 | H                 | 51.89             | 74                | 22.11          | PK     |
| 4924               | 41.25           | 0.45                 | H                 | 41.70             | 54                | 12.30          | AV     |
| 7386               | 50.37           | 10.17                | H                 | 60.54             | 74                | 13.46          | PK     |
| 7386               | 38.88           | 10.17                | H                 | 49.05             | 54                | 4.95           | AV     |

#### Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MH.
  - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
5. We have done 802.11b/g/n mode test. Worst case of EUT is 1 Mbps in 802.11b.

## 8.5.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS

### Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

|                     |                    |
|---------------------|--------------------|
| Operation Mode:     | 802.11g            |
| Transfer Rate:      | 6 Mbps             |
| Operating Frequency | 2412 MHz, 2462 MHz |
| Channel No.         | 01 Ch, 11 Ch       |

| Frequency<br>[MHz] | Reading<br>dBuV | AN.+CL<br>[dB] | ANT. POL<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Detect |
|--------------------|-----------------|----------------|-------------------|-------------------|-------------------|----------------|--------|
| 2390.0             | 26.16           | 33.86          | H                 | 60.02             | 74                | 13.98          | PK     |
| 2390.0             | 12.33           | 33.86          | H                 | 46.19             | 54                | 7.81           | AV     |
| 2390.0             | 23.31           | 33.86          | V                 | 57.17             | 74                | 16.83          | PK     |
| 2390.0             | 11.60           | 33.86          | V                 | 45.46             | 54                | 8.54           | AV     |
| 2483.5             | 30.95           | 34.02          | H                 | 64.97             | 74                | 9.03           | PK     |
| 2483.5             | 14.92           | 34.02          | H                 | 48.94             | 54                | 5.06           | AV     |
| 2483.5             | 26.23           | 34.02          | V                 | 60.25             | 74                | 13.75          | PK     |
| 2483.5             | 12.38           | 34.02          | V                 | 46.40             | 54                | 7.60           | AV     |

### Notes:

- Spectrum setting:
  - Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
  - AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
- We have done 802.11b/g/n mode test. . Worst case of EUT is 6 Mbps in 802.11g

## 8.6 POWERLINE CONDUCTED EMISSIONS

### Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Limits (dBμV) |          |
|-----------------------|---------------|----------|
|                       | Quasi-peak    | Average  |
| 0.15 to 0.50          | 66 to 56      | 56 to 46 |
| 0.50 to 5             | 56            | 46       |
| 5 to 30               | 60            | 50       |

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. We are performed the AC Power Line Conducted Emission test for 11 Mbps, Ch.11 and 802.11b. Because 802.11b mode is worst case.

■ **RESULT PLOTS**

**Conducted Emissions (Line 1)**


HCT

EMC

EUT: GT-S5300  
Manufacturer: SAMSUNG  
Operating Condition: WLAN MODE  
Test Site: SHIELD ROOM  
Operator: JS LEE  
Test Specification: FCC PART15 CLASS B  
Comment: H

**SCAN TABLE: "FCC PART 15 B(H)"**

| Short Description: |                |            | FCC PART 15 CLASS B |            |           |            |
|--------------------|----------------|------------|---------------------|------------|-----------|------------|
| Start Frequency    | Stop Frequency | Step Width | Detector            | Meas. Time | IF Bandw. | Transducer |
| 150.0 kHz          | 500.0 kHz      | 1.0 kHz    | MaxPeak             | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average             |            |           |            |
| 500.0 kHz          | 5.0 MHz        | 4.0 kHz    | MaxPeak             | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average             |            |           |            |
| 5.0 MHz            | 30.0 MHz       | 4.0 kHz    | MaxPeak             | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average             |            |           |            |

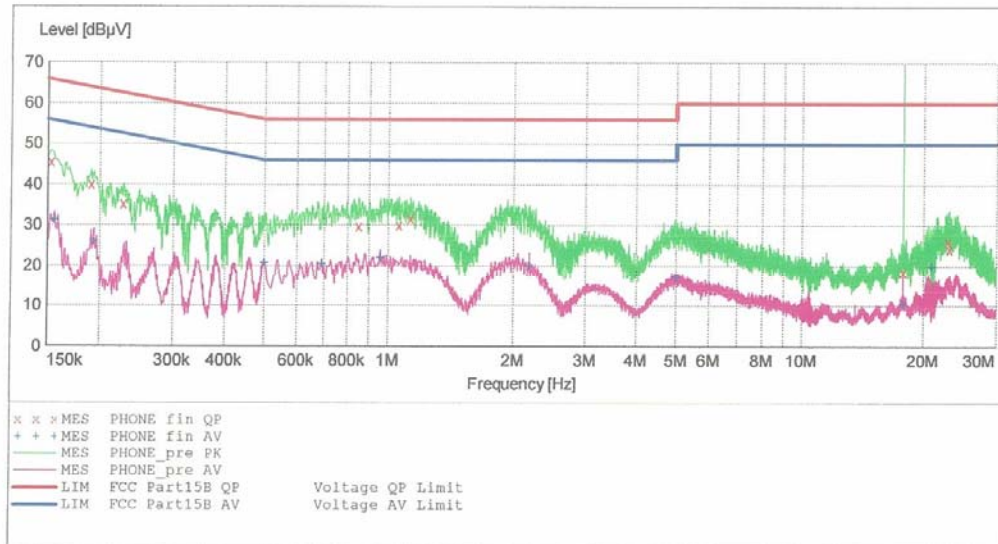

**MEASUREMENT RESULT: "PHONE\_fin QP"**

2/20/2012 9:27PM

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Line | PE  |
|---------------|------------|-----------|------------|-----------|------|-----|
| 0.153010      | 45.60      | 10.1      | 66         | 20.2      | ---  | --- |
| 0.191010      | 40.20      | 10.1      | 64         | 23.8      | ---  | --- |
| 0.228010      | 35.30      | 10.1      | 63         | 27.3      | ---  | --- |
| 0.852000      | 29.80      | 10.1      | 56         | 26.2      | ---  | --- |
| 1.064000      | 30.00      | 10.1      | 56         | 26.0      | ---  | --- |
| 1.132000      | 31.80      | 10.1      | 56         | 24.2      | ---  | --- |
| 17.804000     | 18.40      | 11.7      | 60         | 41.6      | ---  | --- |
| 22.908000     | 25.90      | 12.0      | 60         | 34.1      | ---  | --- |
| 23.080000     | 24.20      | 12.0      | 60         | 35.8      | ---  | --- |

**MEASUREMENT RESULT: "PHONE\_fin AV"**

2/20/2012 9:27PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 0.156010         | 31.20         | 10.1         | 56            | 24.5         | ---  | --- |
| 0.194010         | 26.00         | 10.1         | 54            | 27.8         | ---  | --- |
| 0.499010         | 20.80         | 10.1         | 46            | 25.2         | ---  | --- |
| 0.692000         | 20.50         | 10.1         | 46            | 25.5         | ---  | --- |
| 0.960000         | 22.10         | 10.1         | 46            | 23.9         | ---  | --- |
| 2.192000         | 20.00         | 10.2         | 46            | 26.0         | ---  | --- |
| 5.000000         | 17.10         | 10.5         | 46            | 28.9         | ---  | --- |
| 17.804000        | 10.50         | 11.7         | 50            | 39.5         | ---  | --- |
| 20.920000        | 19.90         | 11.9         | 50            | 30.1         | ---  | --- |

## Conducted Emissions (Line 2)


HCT

EMC

EUT: GT-S5300  
 Manufacturer: SAMSUNG  
 Operating Condition: WLAN MODE  
 Test Site: SHIELD ROOM  
 Operator: JS LEE  
 Test Specification: FCC PART15 CLASS B  
 Comment: N

### SCAN TABLE: "FCC PART 15 B(N)"

| Short Description: |           |         | FCC PART 15 CLASS B |            |           |            |
|--------------------|-----------|---------|---------------------|------------|-----------|------------|
| Start              | Stop      | Step    | Detector            | Meas. Time | IF Bandw. | Transducer |
| Frequency          | Frequency | Width   |                     |            |           |            |
| 150.0 kHz          | 500.0 kHz | 4.0 kHz | MaxPeak             | 10.0 ms    | 9 kHz     | None       |
|                    |           |         | Average             |            |           |            |
| 500.0 kHz          | 5.0 MHz   | 4.0 kHz | MaxPeak             | 10.0 ms    | 9 kHz     | None       |
|                    |           |         | Average             |            |           |            |
| 5.0 MHz            | 30.0 MHz  | 4.0 kHz | MaxPeak             | 10.0 ms    | 9 kHz     | None       |
|                    |           |         | Average             |            |           |            |

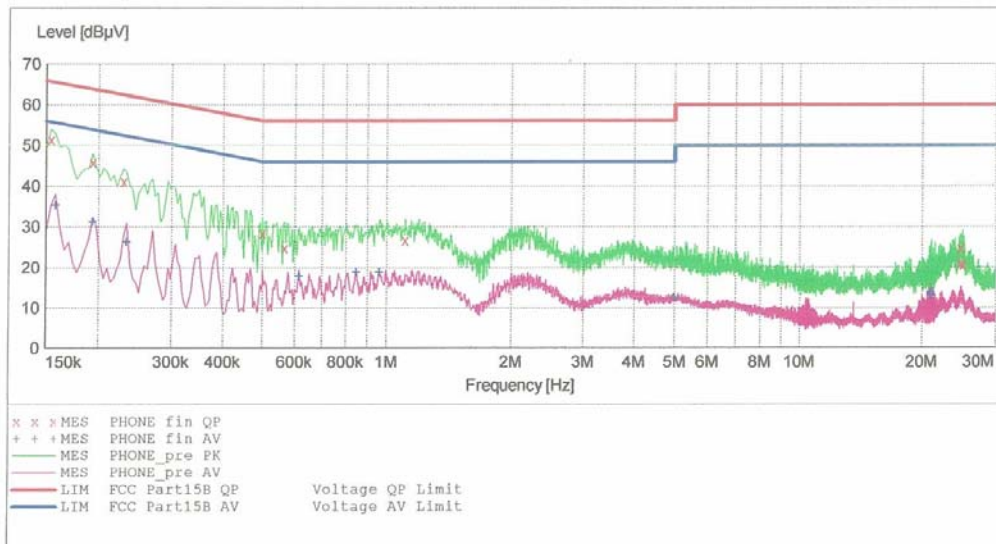

### MEASUREMENT RESULT: "PHONE\_fin QP"

2/20/2012 9:23PM

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Line | PE  |
|---------------|------------|-----------|------------|-----------|------|-----|
| 0.154010      | 51.50      | 10.3      | 66         | 14.3      | ---  | --- |
| 0.194010      | 45.80      | 10.3      | 64         | 18.1      | ---  | --- |
| 0.230010      | 41.10      | 10.3      | 62         | 21.4      | ---  | --- |
| 0.500000      | 28.40      | 10.3      | 56         | 27.6      | ---  | --- |
| 0.568000      | 24.80      | 10.3      | 56         | 31.2      | ---  | --- |
| 1.112000      | 26.70      | 10.4      | 56         | 29.3      | ---  | --- |
| 24.688000     | 20.90      | 11.8      | 60         | 39.1      | ---  | --- |
| 24.776000     | 24.60      | 11.8      | 60         | 35.4      | ---  | --- |
| 25.008000     | 20.60      | 11.8      | 60         | 39.4      | ---  | --- |

**MEASUREMENT RESULT: "PHONE\_fin AV"**

2/20/2012 9:23PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 0.158010         | 35.30         | 10.3         | 56            | 20.3         | ---  | --- |
| 0.194010         | 31.20         | 10.3         | 54            | 22.7         | ---  | --- |
| 0.234010         | 26.20         | 10.3         | 52            | 26.1         | ---  | --- |
| 0.616000         | 17.80         | 10.3         | 46            | 28.2         | ---  | --- |
| 0.848000         | 18.80         | 10.4         | 46            | 27.2         | ---  | --- |
| 0.964000         | 18.80         | 10.4         | 46            | 27.2         | ---  | --- |
| 5.000000         | 12.60         | 10.7         | 46            | 33.4         | ---  | --- |
| 20.980000        | 13.80         | 11.7         | 50            | 36.2         | ---  | --- |
| 21.020000        | 13.10         | 11.7         | 50            | 36.9         | ---  | --- |

## 9. LIST OF TEST EQUIPMENT

| Manufacturer          | Model / Equipment                                      | Calibration Interval | Calibration Due | Serial No.         |
|-----------------------|--------------------------------------------------------|----------------------|-----------------|--------------------|
| Rohde & Schwarz       | ESH2-Z5/ LISN                                          | Annual               | 02/03/2013      | 861741/013         |
| Schwarzbeck           | VULB 9168/ TRILOG Antenna                              | Biennial             | 02/09/2013      | 200                |
| Rohde & Schwarz       | ESI 40 / EMI TEST RECEIVER                             | Annual               | 05/26/2012      | 831564103          |
| Agilent               | E4440A/ Spectrum Analyzer                              | Annual               | 05/02/2012      | US45303008         |
| Agilent               | N9020A/ SIGNAL ANALYZER                                | Annual               | 09/23/2012      | MY51110020         |
| HD                    | MA240/ Antenna Position Tower                          | N/A                  | N/A             | 556                |
| EMCO                  | 1050/ Turn Table                                       | N/A                  | N/A             | 114                |
| HD GmbH               | HD 100/ Controller                                     | N/A                  | N/A             | 13                 |
| HD GmbH               | KMS 560/ SlideBar                                      | N/A                  | N/A             | 12                 |
| Rohde & Schwarz       | ESH3-Z2/ PULSE LIMITER                                 | Annual               | 08/01/2012      | 375.8810.352       |
| Rohde & Schwarz       | SCU-18/ Signal Conditioning Unit                       | Annual               | 09/19/2012      | 10094              |
| MITEQ                 | AFS44-00102650-42-10P-44-PS/ POWER AMP                 | Annual               | 09/23/2012      | 1532439            |
| Schwarzbeck           | BBHA 9120D/ Horn Antenna                               | Biennial             | 10/17/2013      | 937                |
| Schwarzbeck           | BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)               | Biennial             | 10/26/2012      | BBHA9170342        |
| Rohde & Schwarz       | FSP / Spectrum Analyzer                                | Annual               | 02/09/2013      | 839117/011         |
| Agilent               | E4440A / Spectrum Analyzer                             | Annual               | 05/02/2012      | US45303008         |
| Agilent               | E4416A /Power Meter                                    | Annual               | 11/07/2012      | GB41291412         |
| Agilent               | E9327A /POWER SENSOR                                   | Annual               | 05/02/2012      | MY4442009          |
| Wainwright Instrument | WHF3.3/18G-10EF / High Pass Filter                     | Annual               | 05/02/2012      | 1                  |
| Wainwright Instrument | WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter | Annual               | 05/02/2012      | 1                  |
| Hewlett Packard       | 11636B/Power Divider                                   | Annual               | 11/07/2012      | 11377              |
| Hewlett Packard       | 11667B / Power Splitter                                | Annual               | 11/04/2012      | 10126              |
| DIGITAL               | EP-3010 /DC POWER SUPPLY                               | Annual               | 11/07/2012      | 3110117            |
| ITECH                 | IT6720 / DC POWER SUPPLY                               | Annual               | 11/07/2012      | 010002156287001199 |
| TESCOM                | TC-3000C / BLUETOOTH TESTER                            | Annual               | 11/14/2012      | 3000C000276        |
| Rohde & Schwarz       | CBT / BLUETOOTH TESTER                                 | Annual               | 05/02/2012      | 100422             |
| EMCO                  | 6502.LOOP ANTENNA                                      | Biennial             | 01/11/2014      | 9009-2536          |
| MITEQ                 | AMF-6D-001180-35-20P/ POWER AMP                        | Annual               | 12/26/2012      | 990893             |