



FCC CFR47 PART 15 SUBPART C

CERTIFICATION TEST REPORT

FOR

**850/1900 GSM/GPRS, 850 WCDMA PHONE WITH BLUETOOTH 3.0 AND EDR,
HOTSPOTS, VOIP AND WLAN TRANSCEIVER**

MODEL NUMBER: GT-S5360B

FCC ID: A3LGTS5360B

REPORT NUMBER: 11I13975- 5, Revision A

ISSUE DATE: SEPTEMBER 8, 2011

Prepared for
SAMSUNG ELECTRONICS CO., LTD
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

Prepared by
COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	09/07/11	Initial Issue	F. Ibrahim
A	09/08/11	Revised section 5.2 and section 5.3	F. Ibrahim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. SOFTWARE AND FIRMWARE	7
5.5. WORST-CASE CONFIGURATION AND MODE	7
5.6. DESCRIPTION OF TEST SETUP	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. ANTENNA PORT TEST RESULTS	11
7.1. 802.11b MODE IN THE 2.4 GHz BAND	11
7.1.1. 6 dB BANDWIDTH	11
7.1.2. OUTPUT POWER	15
7.1.3. AVERAGE POWER	19
7.1.4. POWER SPECTRAL DENSITY	20
7.1.5. CONDUCTED SPURIOUS EMISSIONS	24
7.2. 802.11g MODE IN THE 2.4 GHz BAND	31
7.2.1. 6 dB BANDWIDTH	31
7.2.2. OUTPUT POWER	35
7.2.3. AVERAGE POWER	39
7.2.4. POWER SPECTRAL DENSITY	40
7.2.5. CONDUCTED SPURIOUS EMISSIONS	44
7.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	51
7.3.1. 6 dB BANDWIDTH	51
7.3.2. OUTPUT POWER	55
7.3.3. AVERAGE POWER	59
7.3.4. POWER SPECTRAL DENSITY	60
7.3.5. CONDUCTED SPURIOUS EMISSIONS	64
8. RADIATED TEST RESULTS	71
8.1. LIMITS AND PROCEDURE	71
8.2. TRANSMITTER ABOVE 1 GHz	72

8.2.1.	TX ABOVE 1 GHz FOR 802.11b MODE IN THE 2.4 GHz BAND	72
8.2.2.	TX ABOVE 1 GHz FOR 802.11g MODE IN THE 2.4 GHz BAND	81
8.2.3.	TX ABOVE 1 GHz FOR 802.11n HT20 MODE IN THE 2.4 GHz BAND	90
8.3.	<i>WORST-CASE BELOW 1 GHz</i>	99
9.	AC POWER LINE CONDUCTED EMISSIONS	102
10.	SETUP PHOTOS	106

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

EUT DESCRIPTION: 850/1900 GSM/GPRS, 850 WCDMA PHONE WITH BLUETOOTH
3.0 AND EDR, HOTSPOTS, VOIP AND WLAN TRANSCEIVER

MODEL: GT-S5360B

SERIAL NUMBER: R26B610799D

DATE TESTED: August 09 - September 07, 2011

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:



FRANK IBRAHIM
EMC SUPERVISOR
UL CCS

Tested By:



THANH NGUYEN
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 850/1900 GSM/GPRS, 850 WCDMA phone with Bluetooth 3.0 and EDR, Hotspots, VOIP and WLAN transceiver.

The radio module is manufactured by Samsung Electronics Co., Ltd.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

(MHz)		(dBm)	(mW)
2412 - 2462	802.11b	17.31	53.83
2412 - 2462	802.11g	23.21	209.41
2412 - 2462	802.11n HT20	20.95	124.45

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna, with a maximum gain of 2.56 dBi.

5.4. SOFTWARE AND FIRMWARE

The test utility software used during testing was S5360B, rev. 010

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power; therefore, radiated emissions below 1 GHz and power line conducted emissions were performed with the EUT set to transmit at the channel with highest output power.

Worst-case data rates as provided by the client are as follows:

802.11b mode: 1Mbps

802.11g mode: 6Mbps

802.11n 20MHz: MCS0

EUT was investigated in three orthogonal orientation X,Y,Z in battery-operated configuration, and also while connected to AC/DC adapter and headphones, and it was found that Z position (See setup photos) orientation is worst-case, therefore, all final testing was conducted with EUT in Z orientation.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

CONFIGURATION 1:

TEST PERIPHERALS				
Device Type	Manufacturer	Model Number	Serial Number	FCC ID
Headset	Samsung	N/A	F1 192B	N/A

CONFIGURATION 2:

TEST PERIPHERALS				
Device Type	Manufacturer	Model Number	Serial Number	FCC ID
AC Adapter 1	Samsung	ETA0U10EBE	F1 192C	DoC
Headset	Samsung	N/A	F1 192B	N/A

I/O CABLES

CONFIGURATION 1:

TEST I / O CABLES								
Cable No	I/O Port	# of I/O Port	Connector Type	Type of Cable	Cable Length	Data Traffic	Bundled	Remark
3	Audio	1	Mini-Jack	Un-Shielded	1.6m	N	N	

CONFIGURATION 2:


TEST I / O CABLES								
Cable No	I/O Port	# of I/O Port	Connector Type	Type of Cable	Cable Length	Data Traffic	Bundled	Remark
1	AC	1	USA115V	Shielded	1.5m	N	Y	
2	DC Power	1	Micro USB	Shielded	1.5m	N	Y	
3	Audio	1	Mini-Jack	Un-Shielded	1.6m	N	N	

TEST SETUP


The EUT is a standalone unit with battery operated and/ or an AC adapter. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

CONFIGURATION 1:

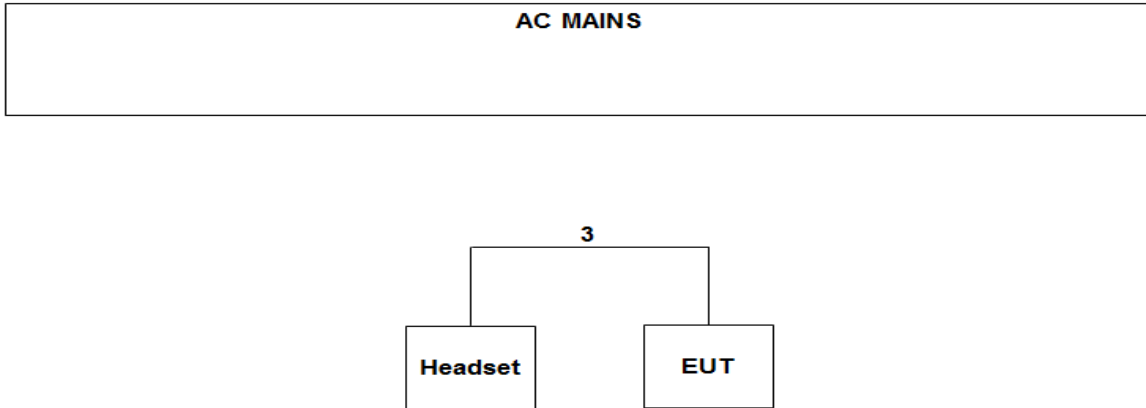

CONFIGURATION 2:

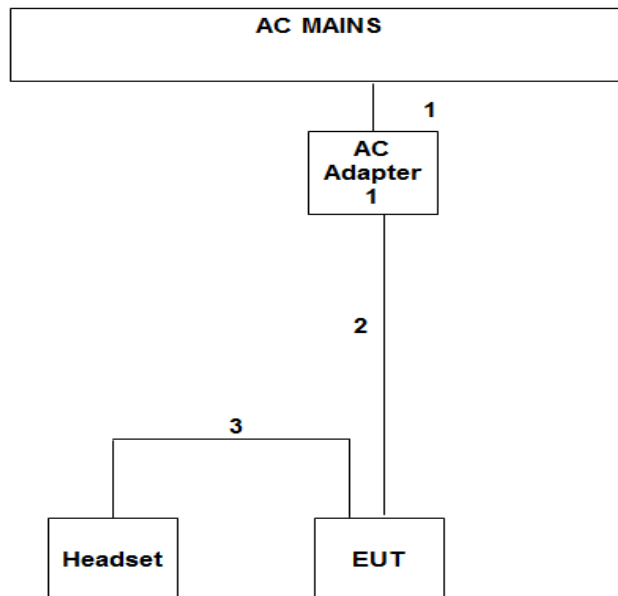

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01179	01/19/11	04/19/12
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	07/16/11	07/16/12
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00885	01/27/11	01/27/12
Antenna, Horn, 18 GHz	EMCO	3115	C00945	06/29/11	06/29/12
Antenna, Horn, 18-26 GHz	A.R.A	MWH-18264/B	C00589	07/28/11	07/28/12
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	None	07/06/11	07/06/12
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	11/10/10	11/10/11
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	N02481	11/10/10	11/10/11

7. ANTENNA PORT TEST RESULTS

7.1. 802.11b MODE IN THE 2.4 GHz BAND

7.1.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	8.00	0.5
Middle	2437	8.00	0.5
High	2462	8.58	0.5

6 dB BANDWIDTH

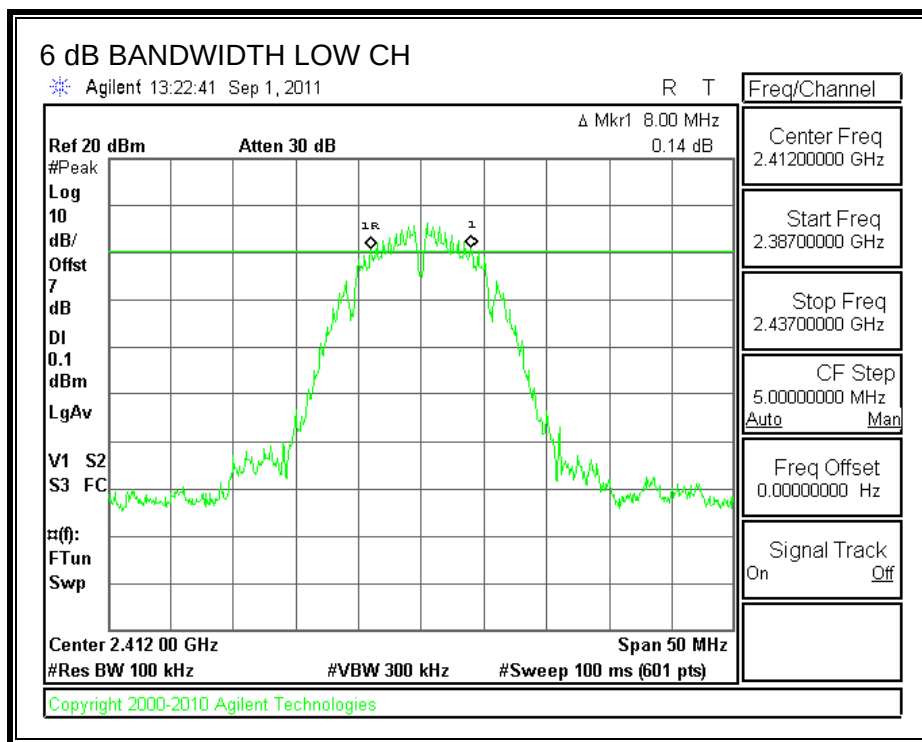

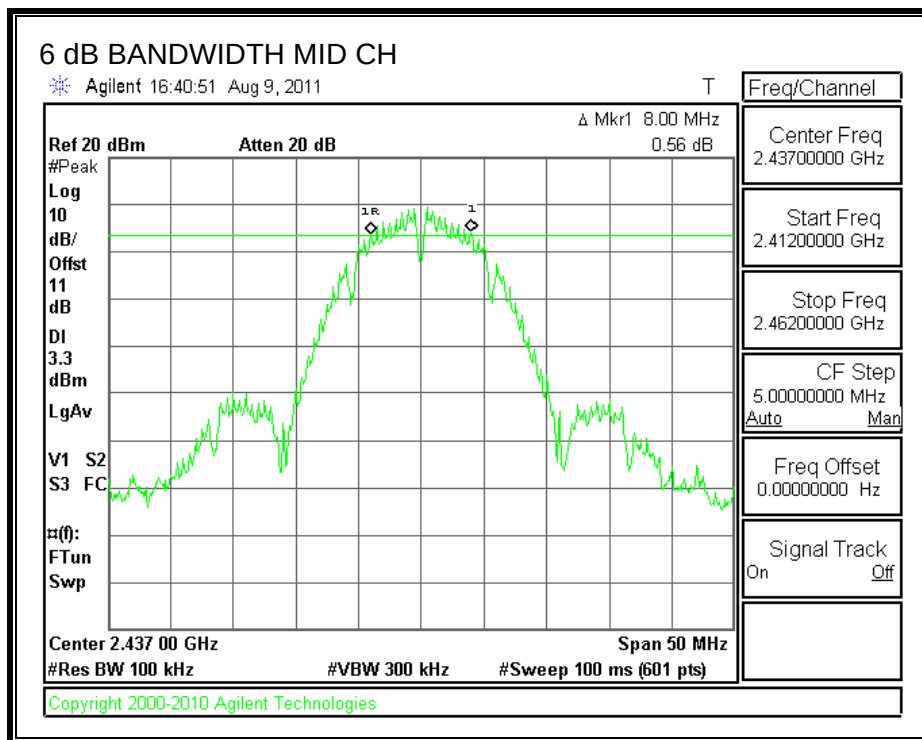

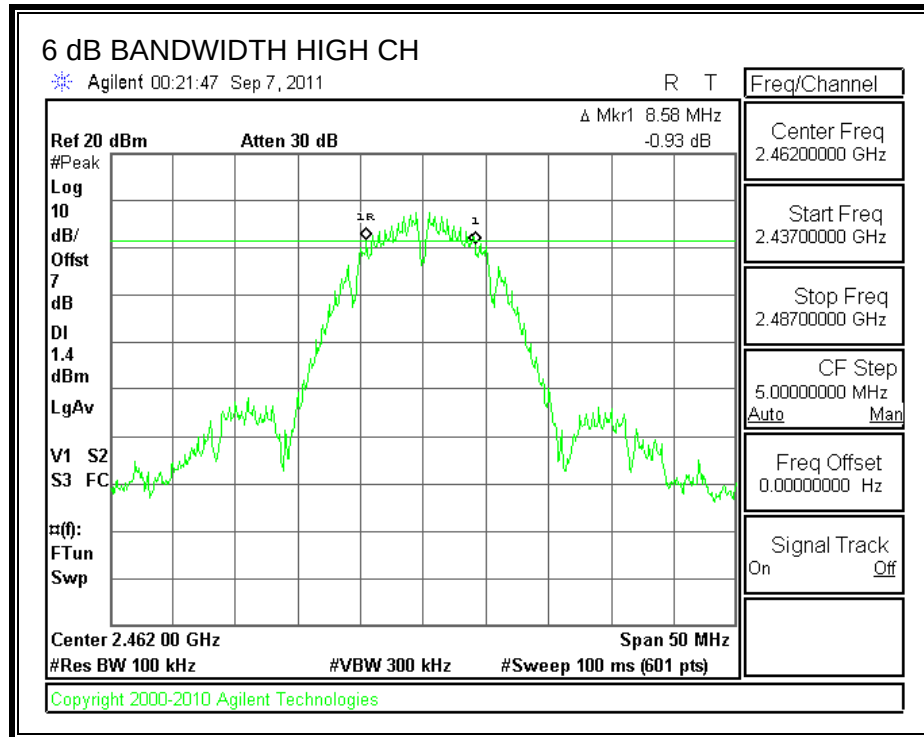

7.1.2. OUTPUT POWER

LIMITS

FCC §15.247 (b)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


Peak power is measured using the Channel bandwidth Alternative peak output power procedure specified in "TCB Training for Devices covered under Scopes A1 - A4" by Joe Dichoso, May 2003.


RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Attenuator and Cable Offset (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	9.75	7	16.75	30	-13.25
Middle	2437	9.94	7	16.94	30	-13.06
High	2462	10.31	7	17.31	30	-12.69

OUTPUT POWER

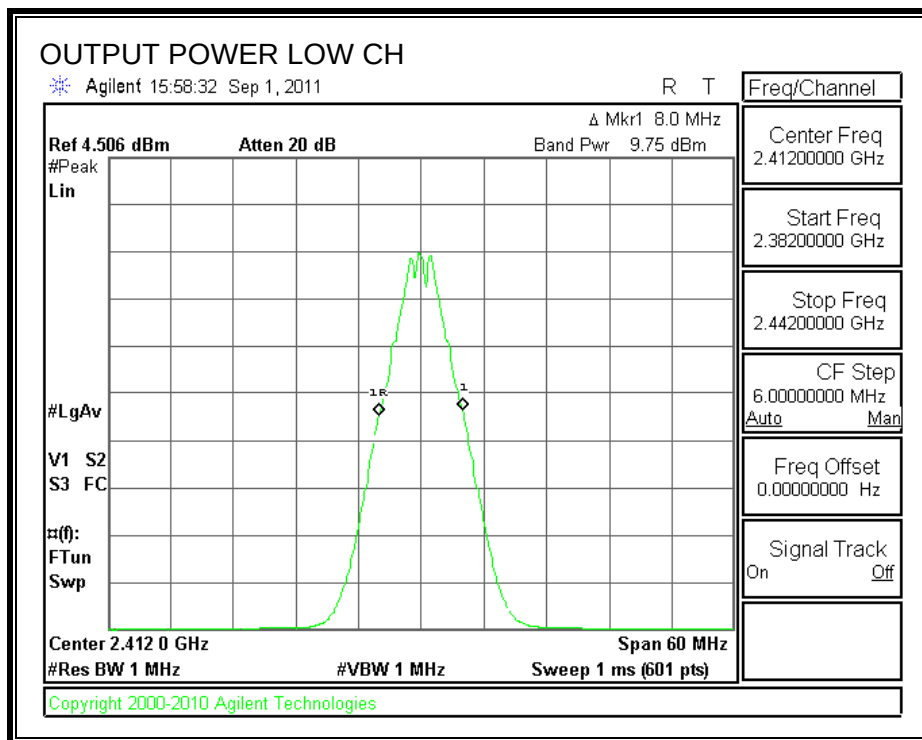

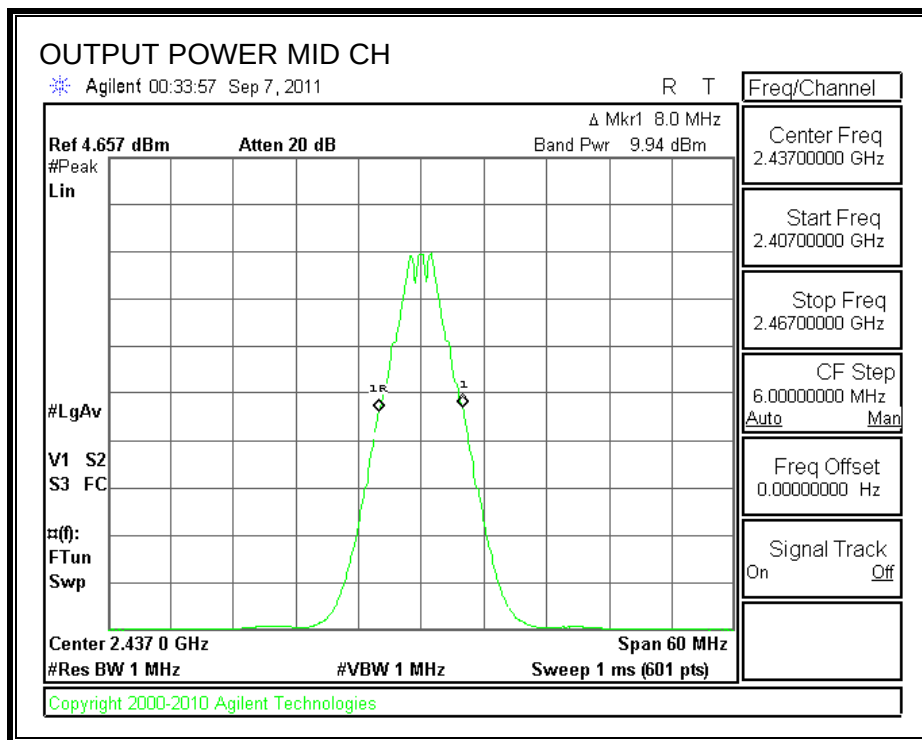

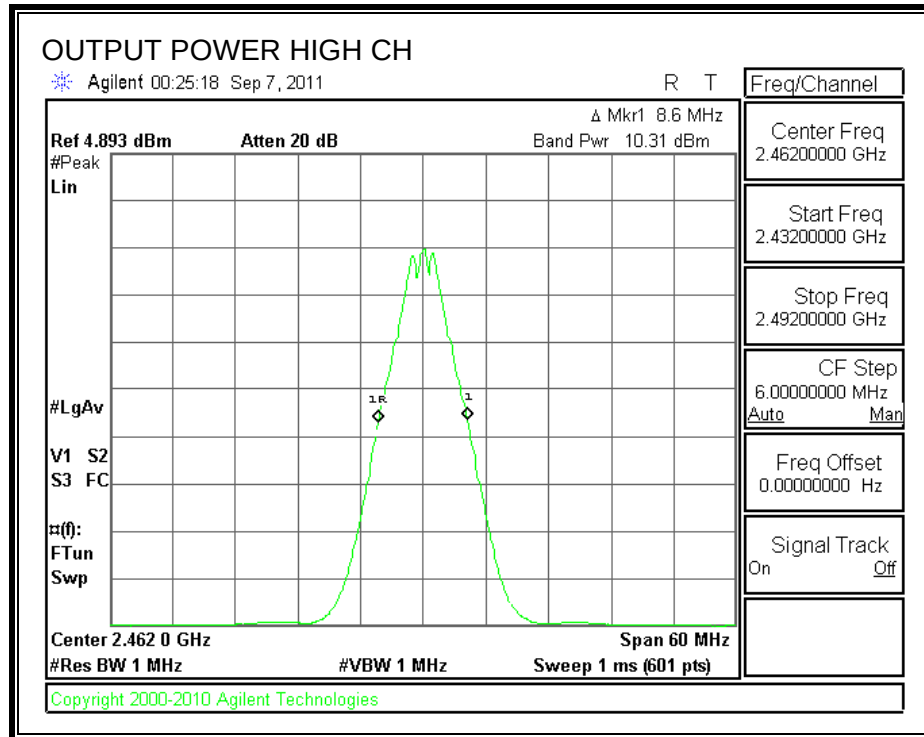

7.1.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Power (dBm)
Low	2412	15.19
Middle	2437	15.48
High	2462	15.62

7.1.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.


RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-5.63	8	-13.63
Middle	2437	-4.60	8	-12.60
High	2462	-6.60	8	-14.60

POWER SPECTRAL DENSITY

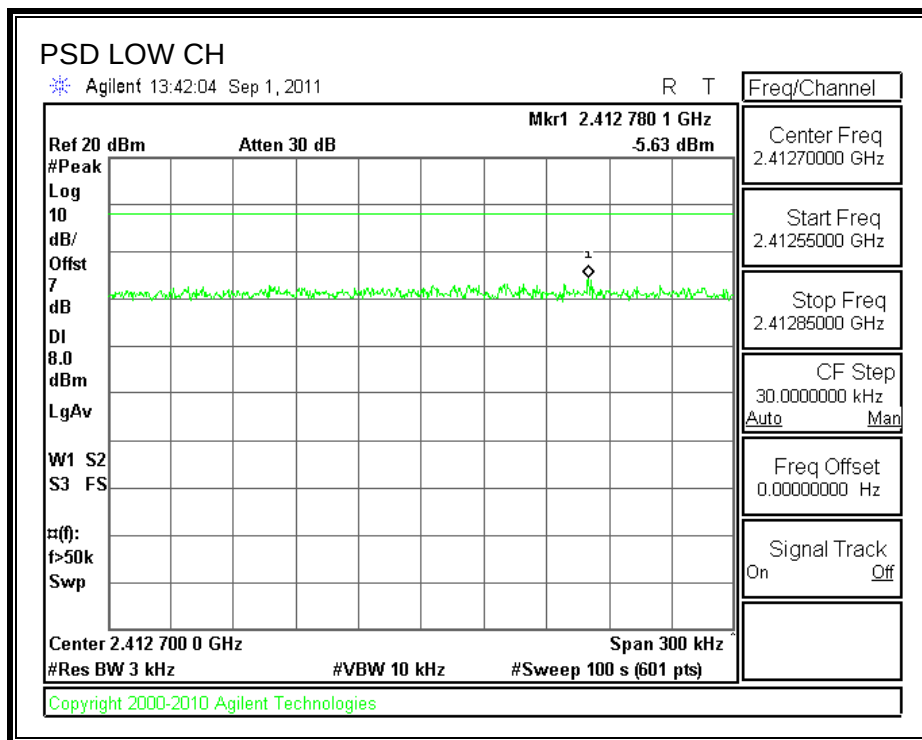

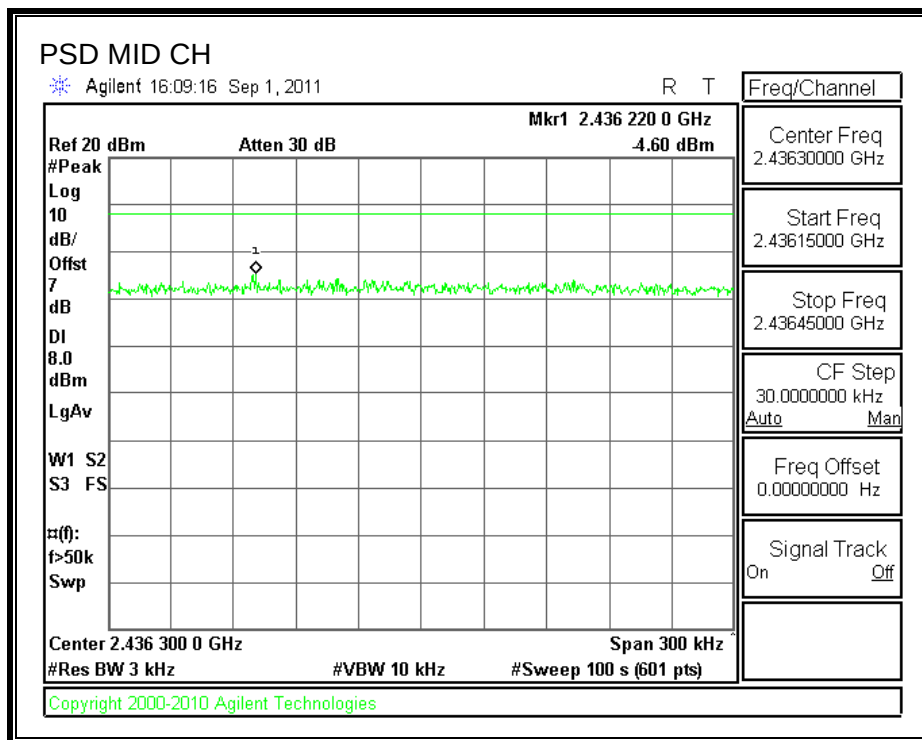

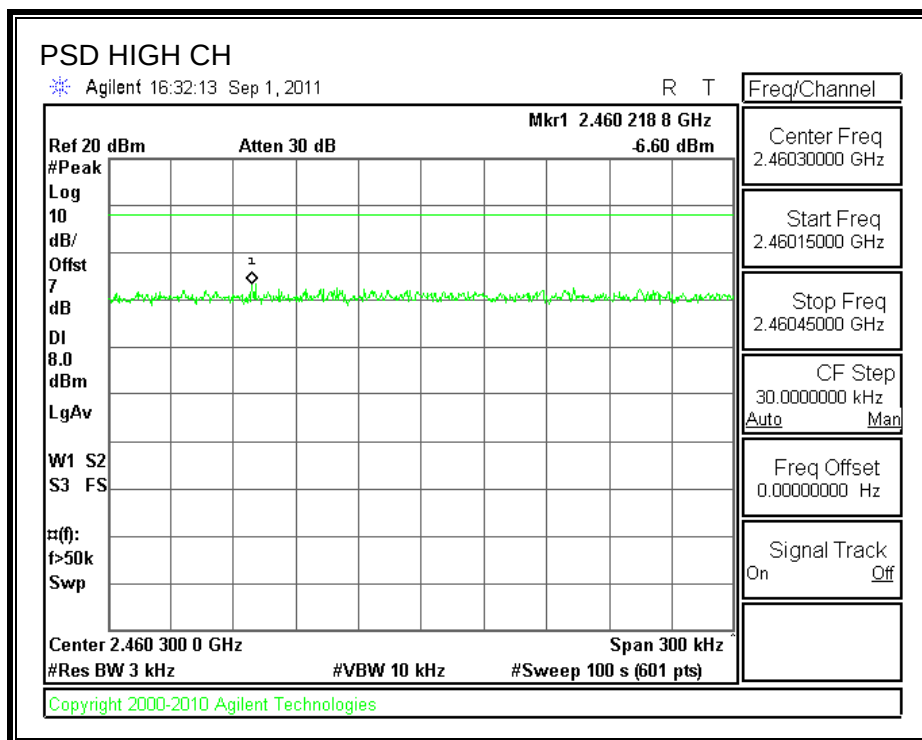

7.1.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

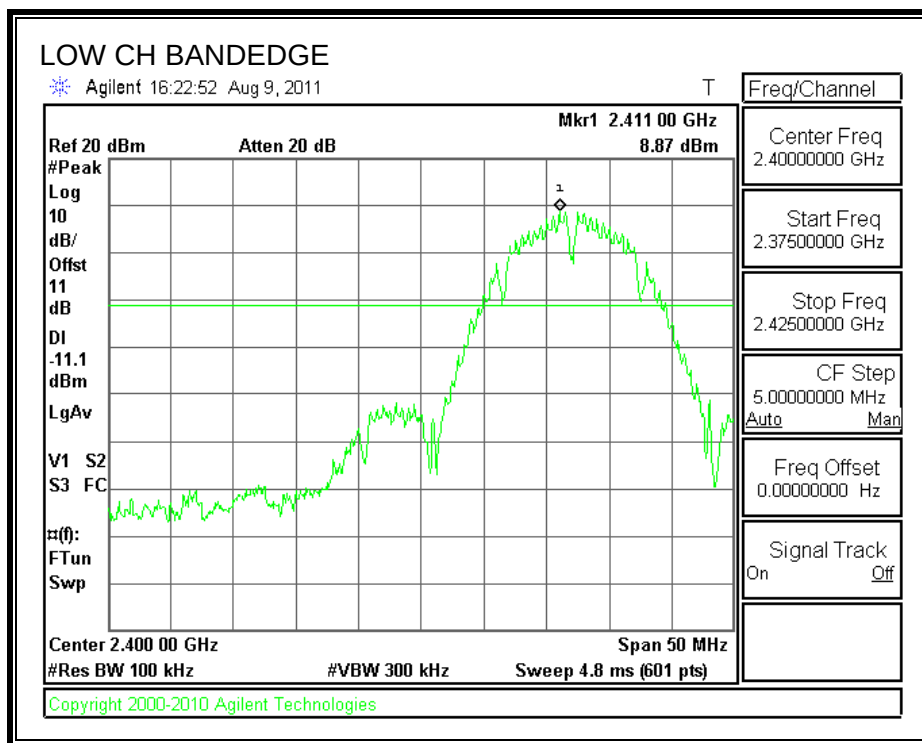

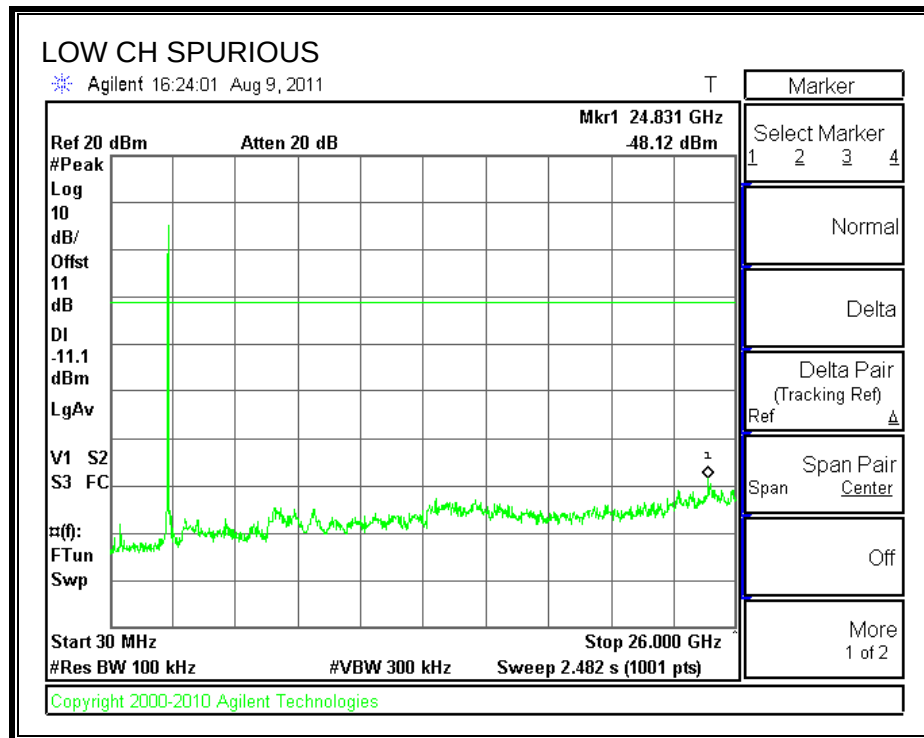



SPURIOUS EMISSIONS, MID CHANNEL

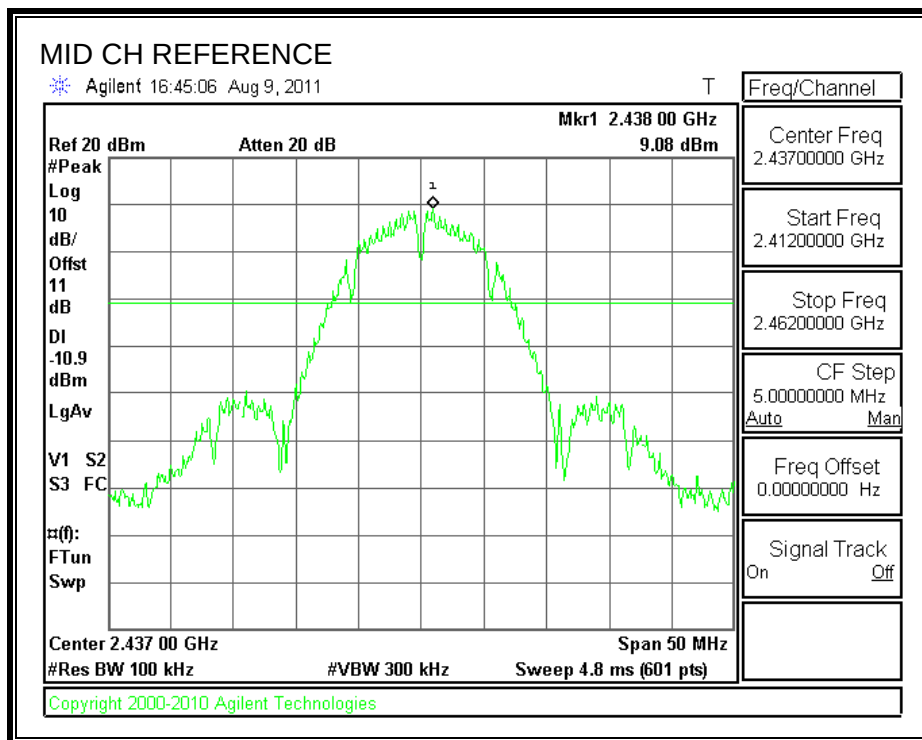

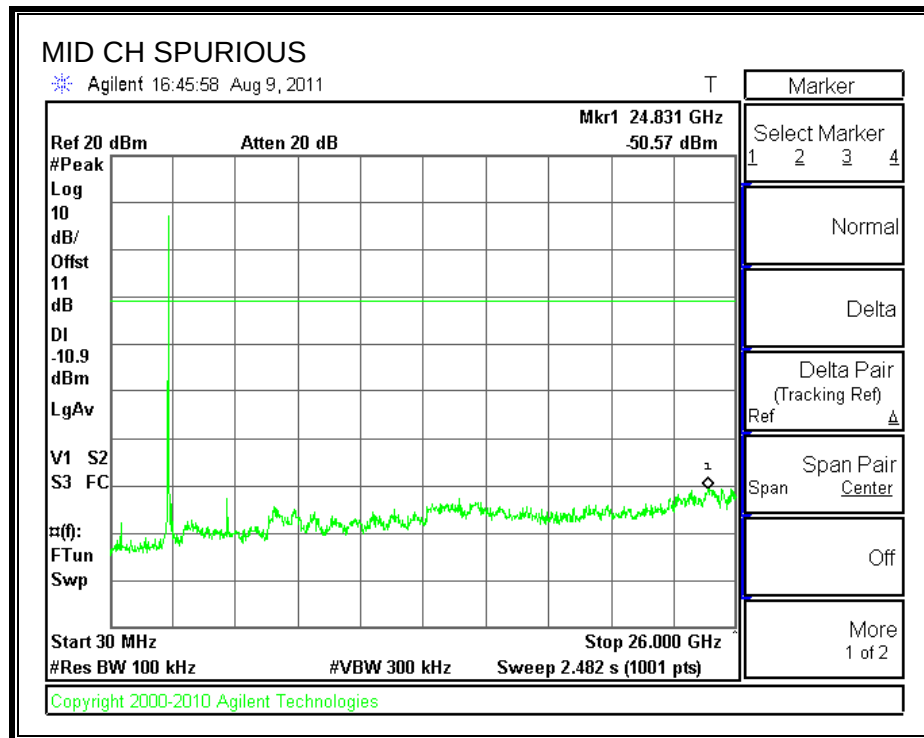

SPURIOUS EMISSIONS, HIGH CHANNEL

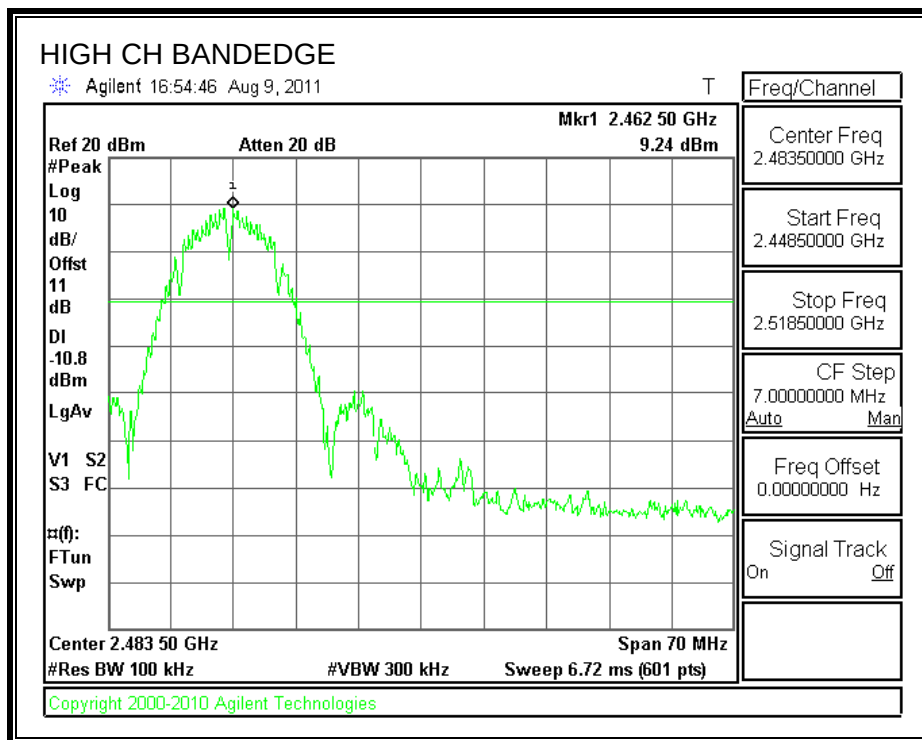

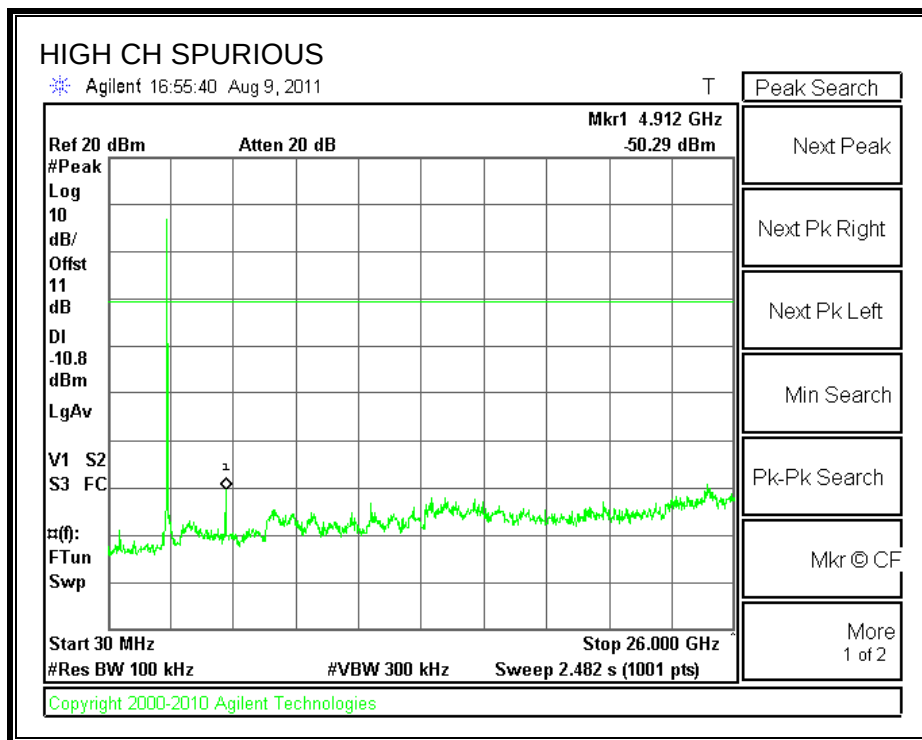

7.2. 802.11g MODE IN THE 2.4 GHz BAND

7.2.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	15.17	0.5
Middle	2437	15.17	0.5
High	2462	15.17	0.5

6 dB BANDWIDTH

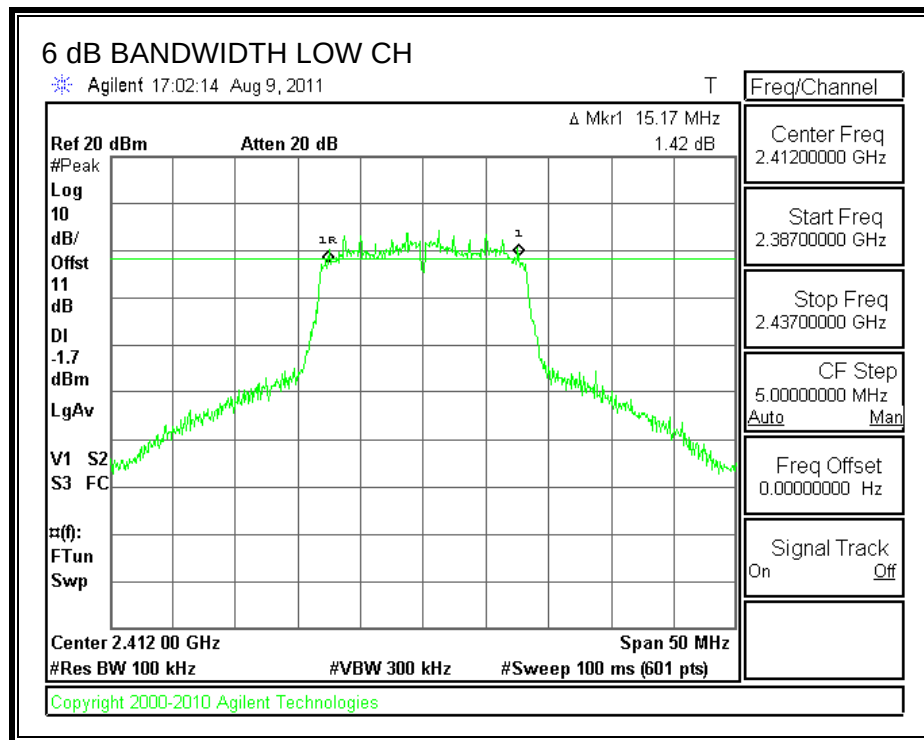

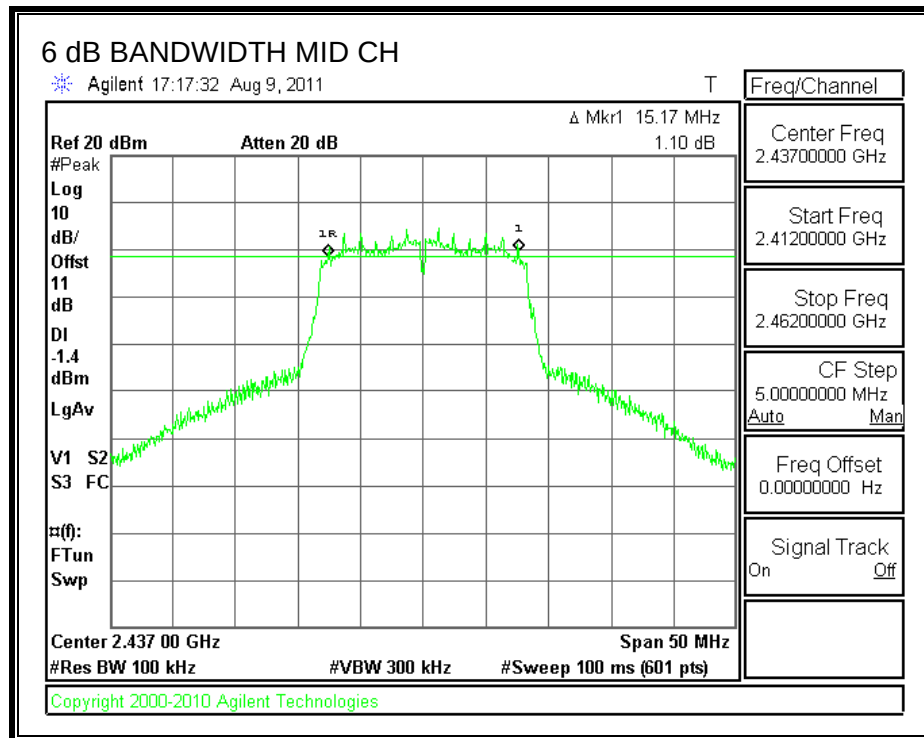

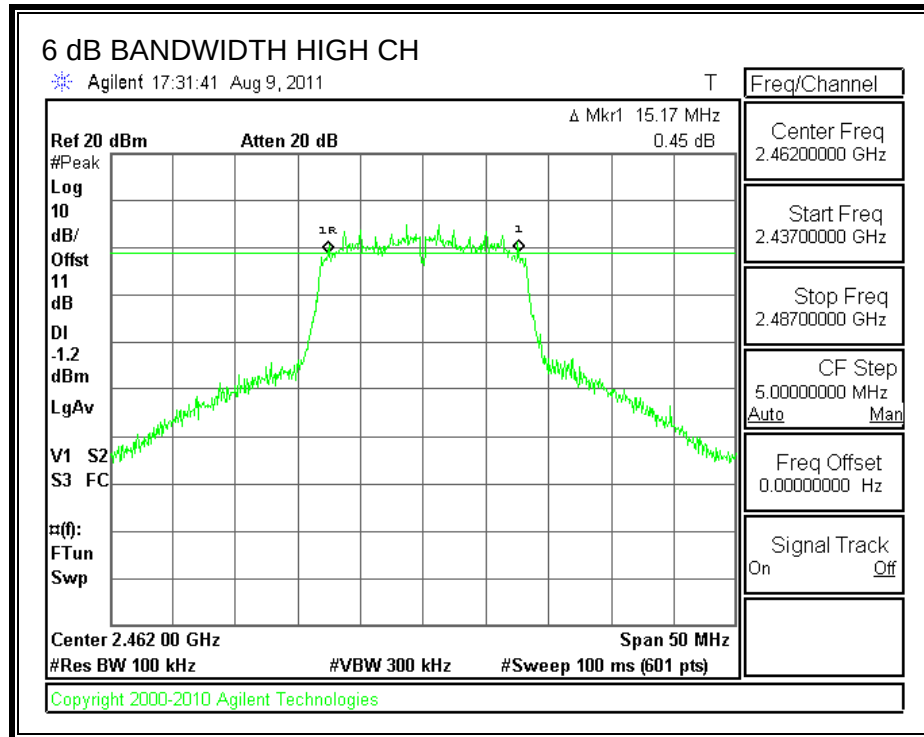

7.2.2. OUTPUT POWER

LIMITS

FCC §15.247 (b)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


Peak power is measured using the Channel bandwidth Alternative peak output power procedure specified in "TCB Training for Devices covered under Scopes A1 - A4" by Joe Dichoso, May 2003.


RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Attenuator and Cable Offset (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	11.72	11	22.72	30	-7.28
Middle	2437	11.99	11	22.99	30	-7.01
High	2462	12.21	11	23.21	30	-6.79

OUTPUT POWER

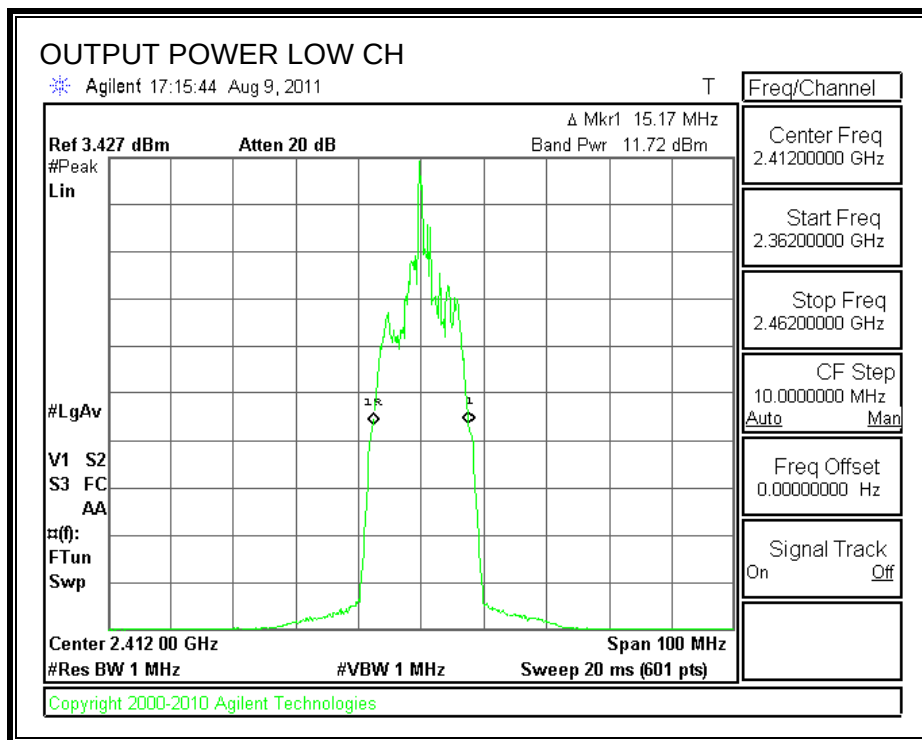

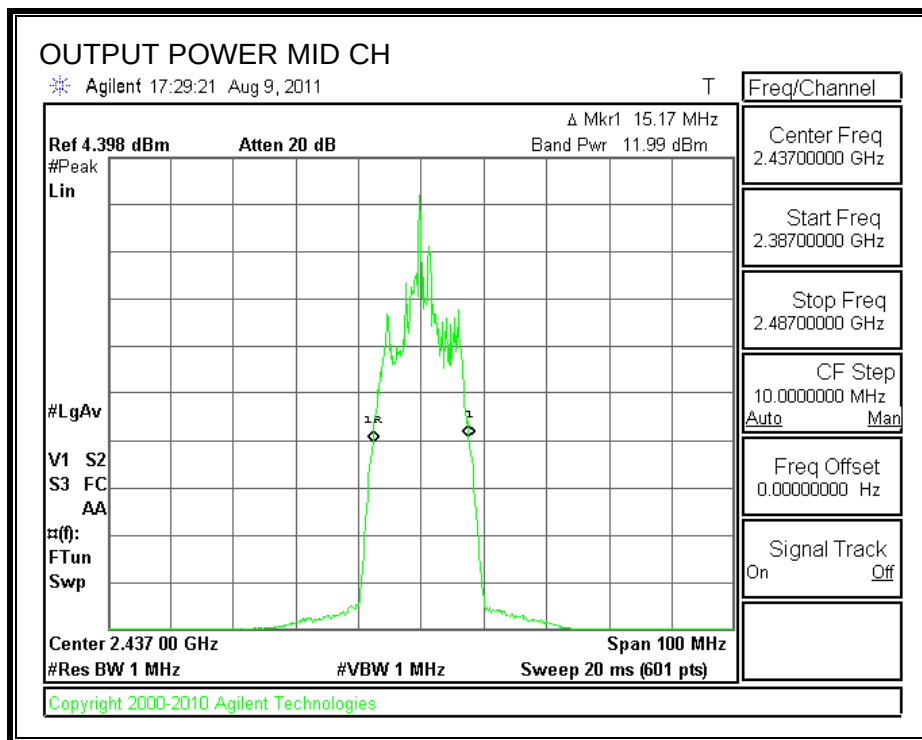

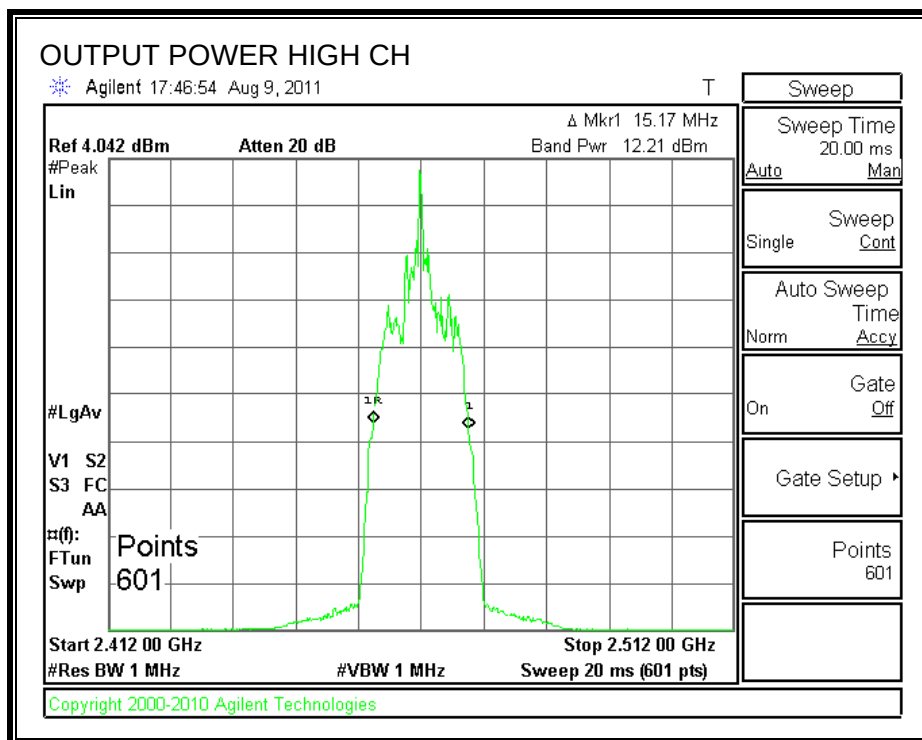

7.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Power (dBm)
Low	2412	14.30
Middle	2437	14.48
High	2462	14.65

7.2.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.


RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-8.63	8	-16.63
Middle	2437	-9.03	8	-17.03
High	2462	-8.78	8	-16.78

POWER SPECTRAL DENSITY

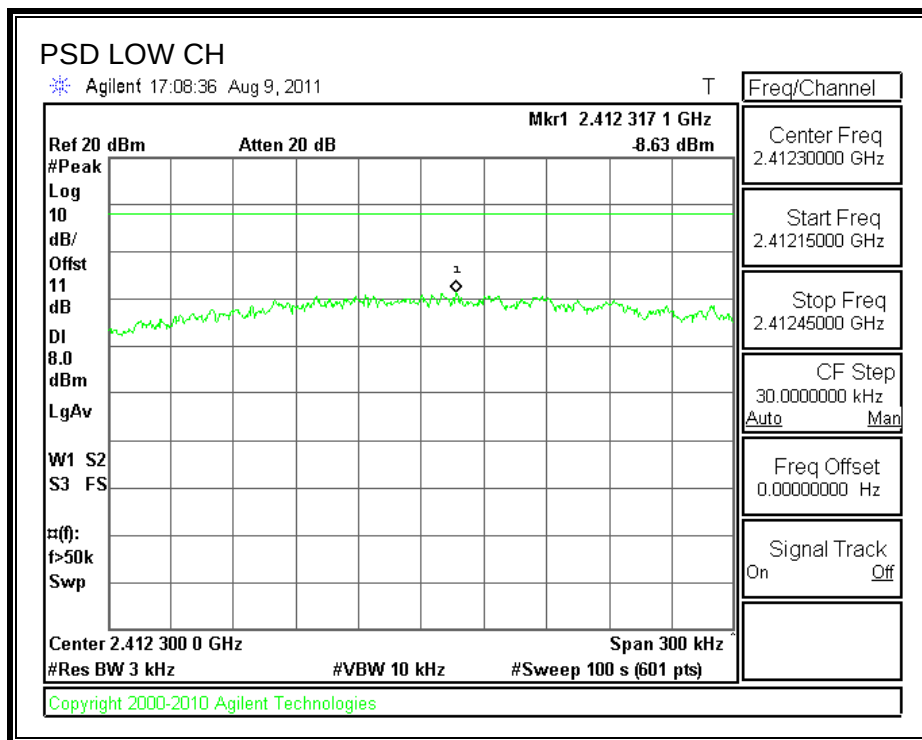

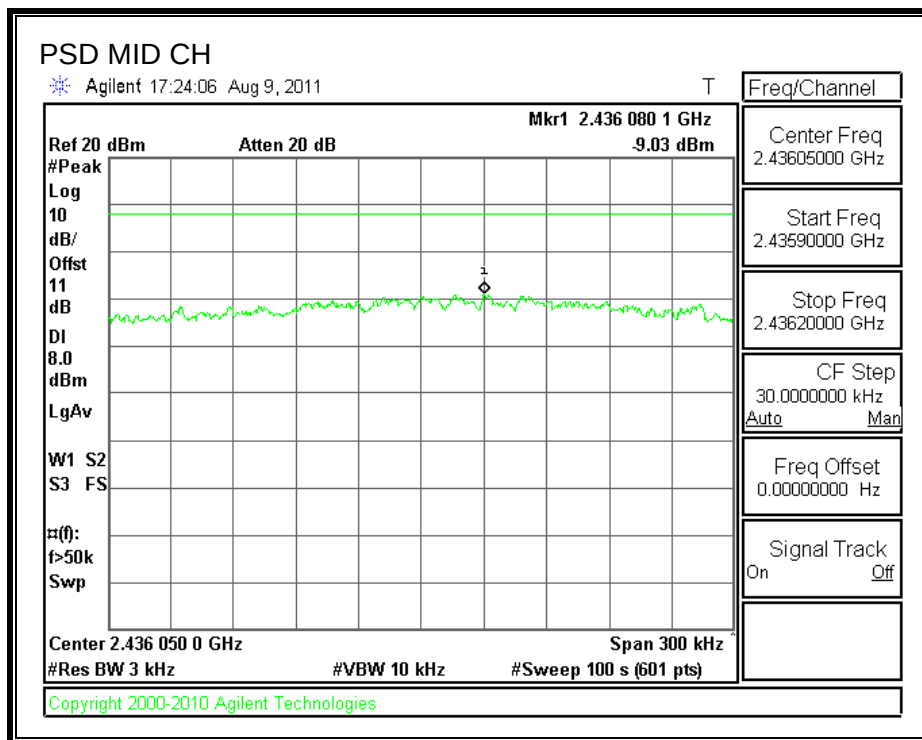

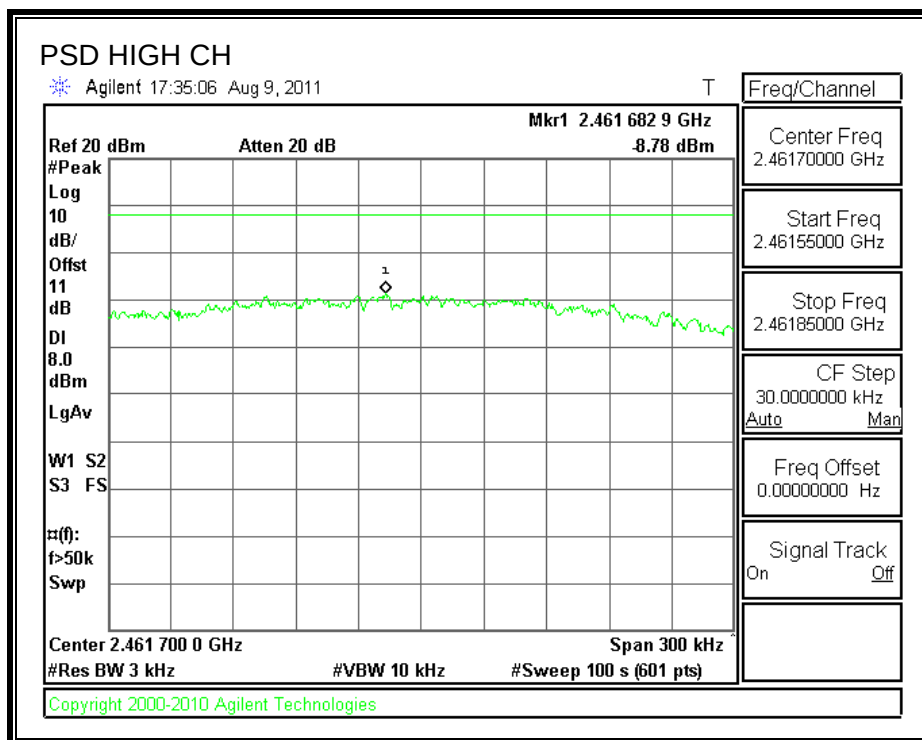

7.2.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

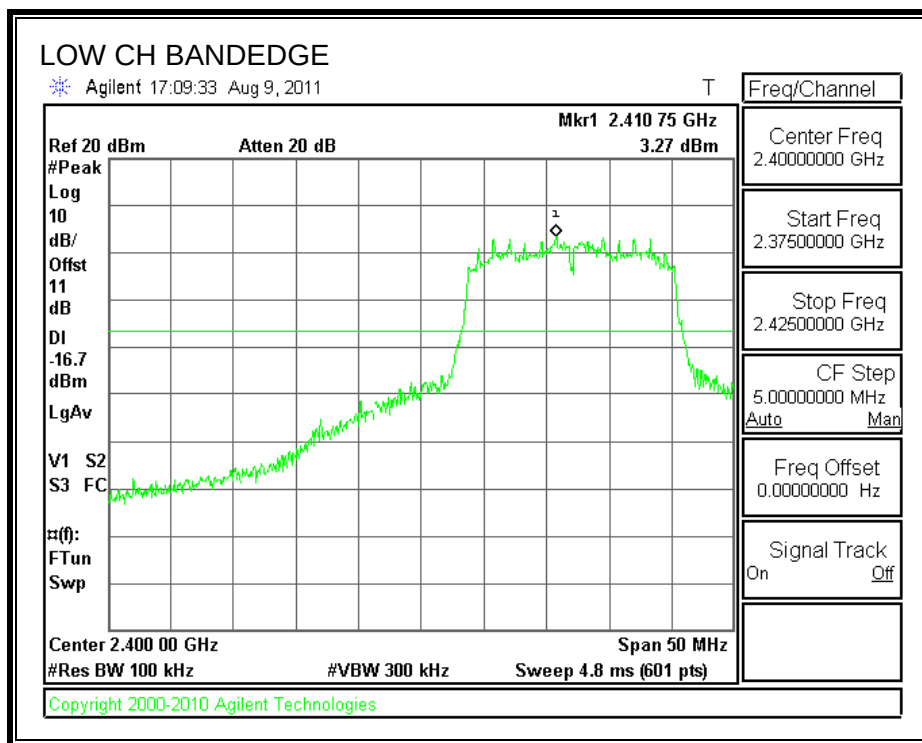

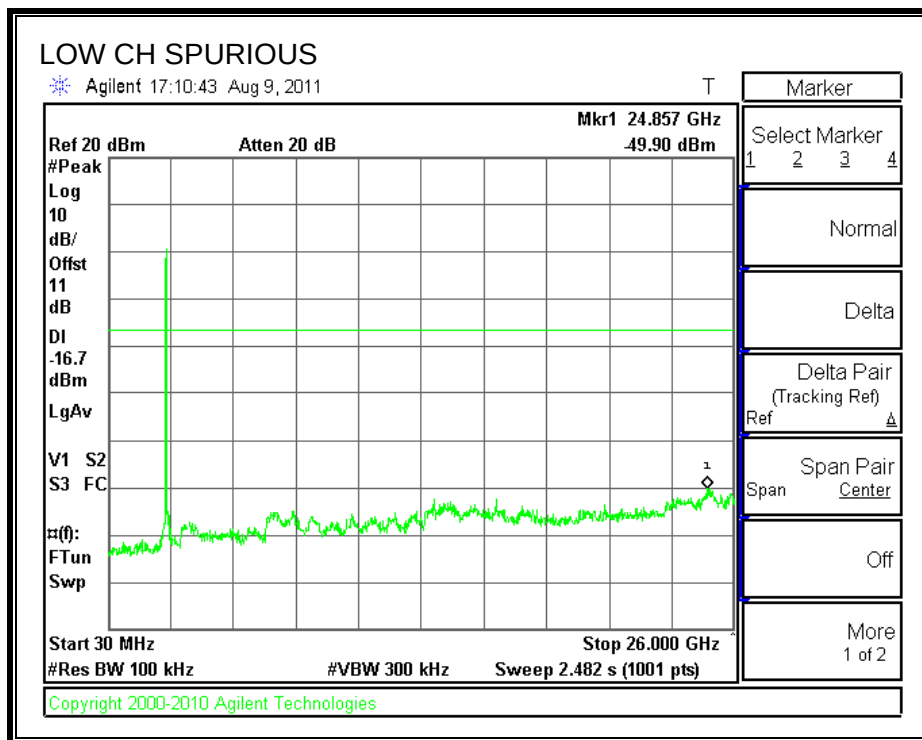



SPURIOUS EMISSIONS, MID CHANNEL

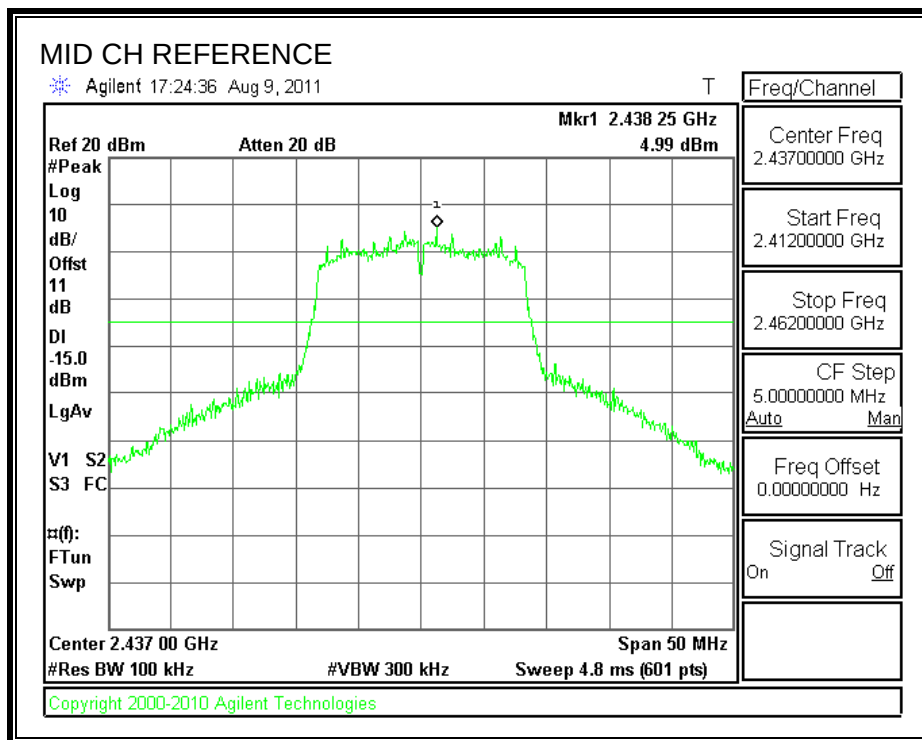

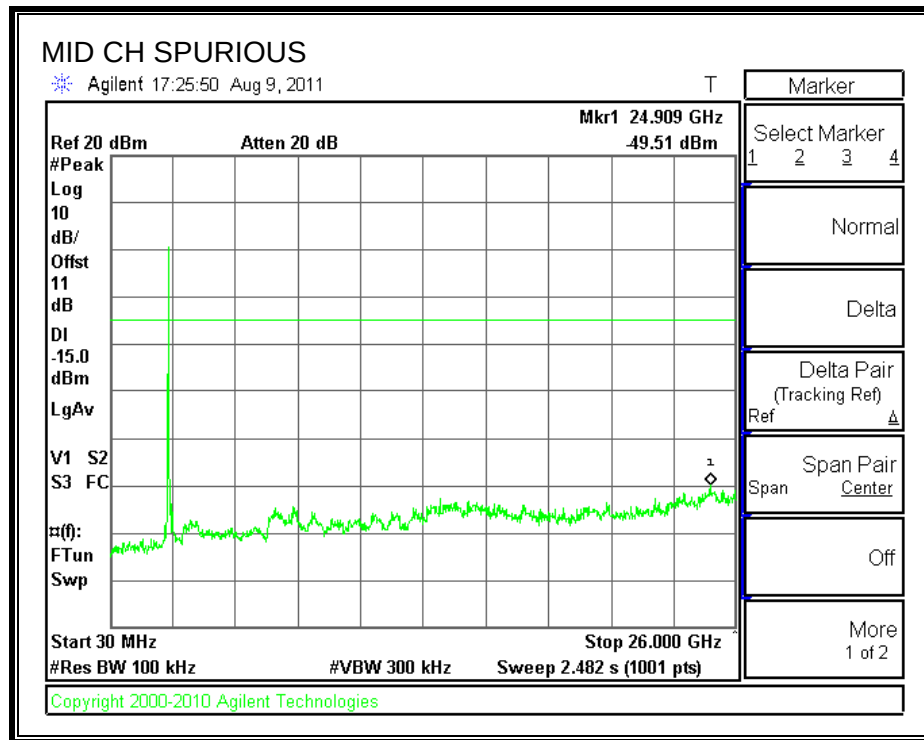

SPURIOUS EMISSIONS, HIGH CHANNEL

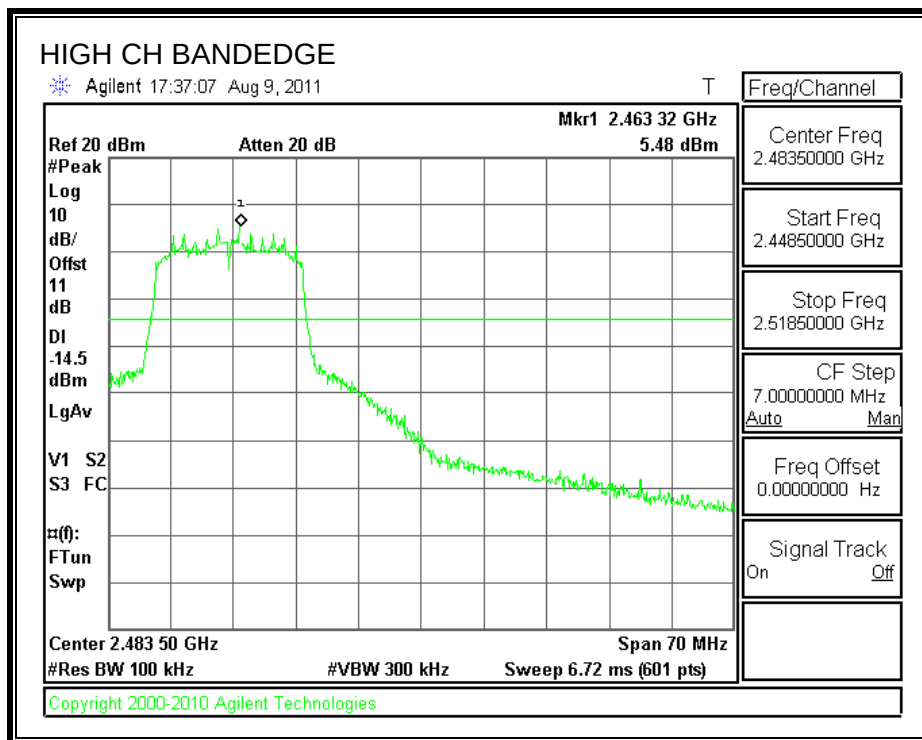

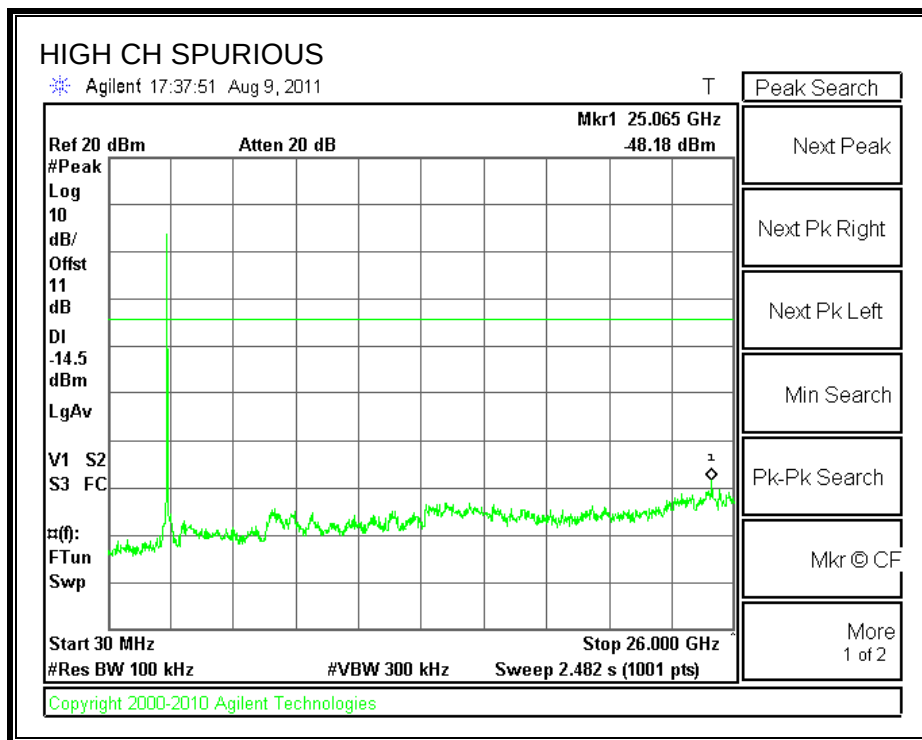

7.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

7.3.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	15.17	0.5
Middle	2437	15.17	0.5
High	2462	15.17	0.5

6 dB BANDWIDTH

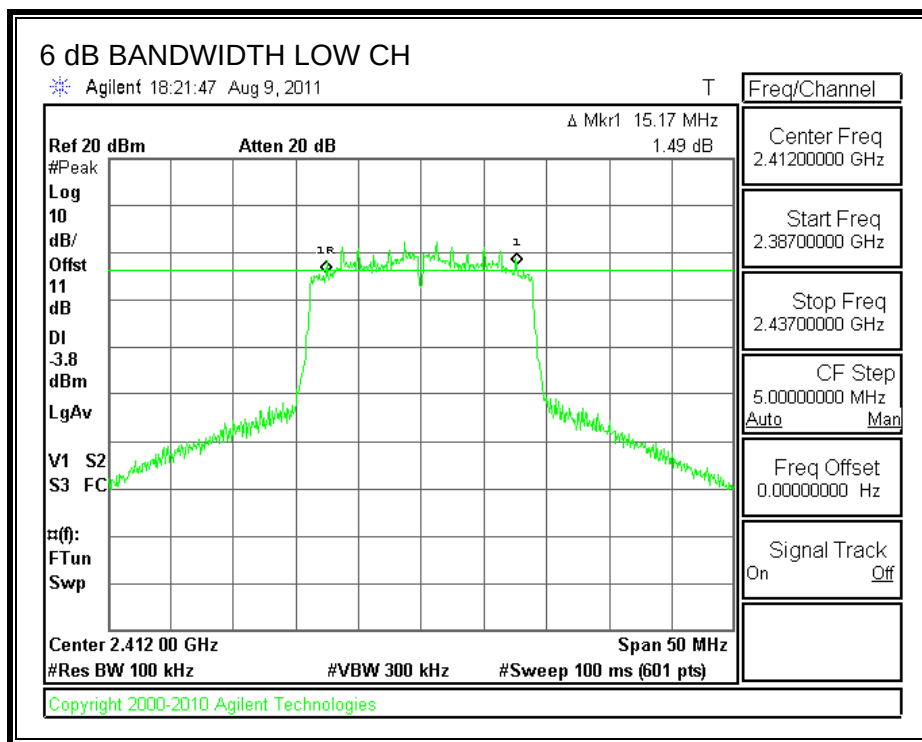

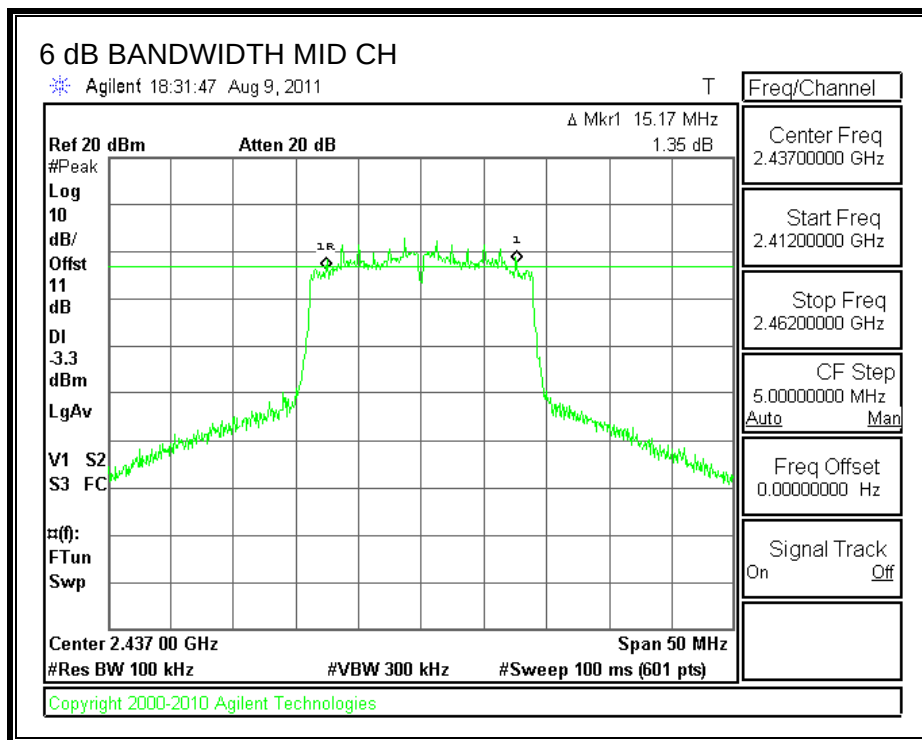

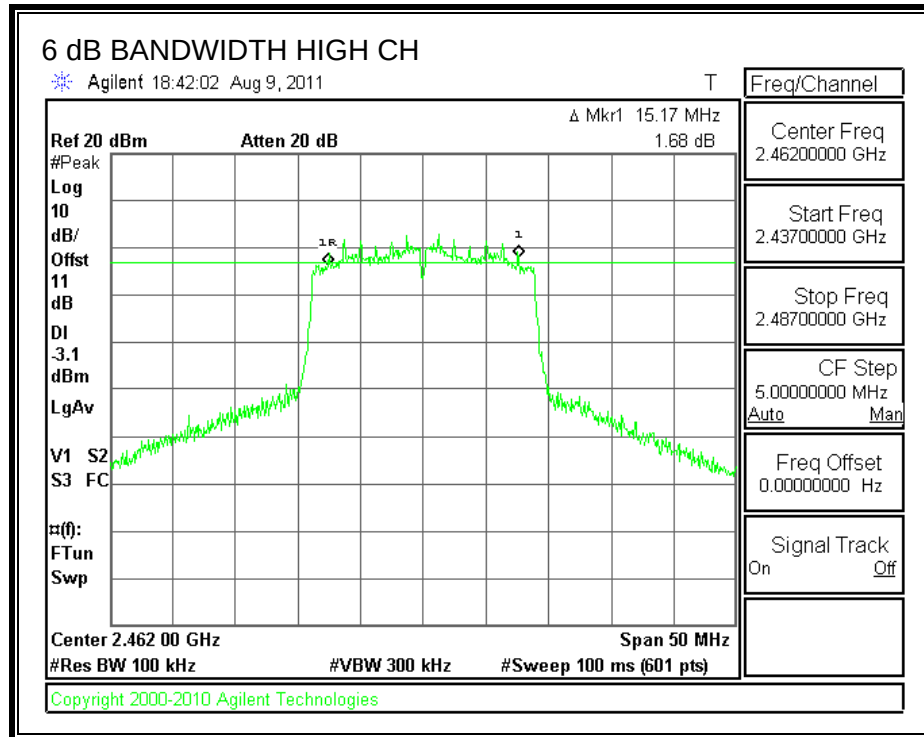

7.3.2. OUTPUT POWER

LIMITS

FCC §15.247 (b)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


Peak power is measured using the Channel bandwidth Alternative peak output power procedure specified in "TCB Training for Devices covered under Scopes A1 - A4" by Joe Dichoso, May 2003.


RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Attenuator and Cable Offset (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	9.43	11	20.43	30	-9.57
Middle	2437	9.75	11	20.75	30	-9.25
High	2462	9.95	11	20.95	30	-9.05

OUTPUT POWER

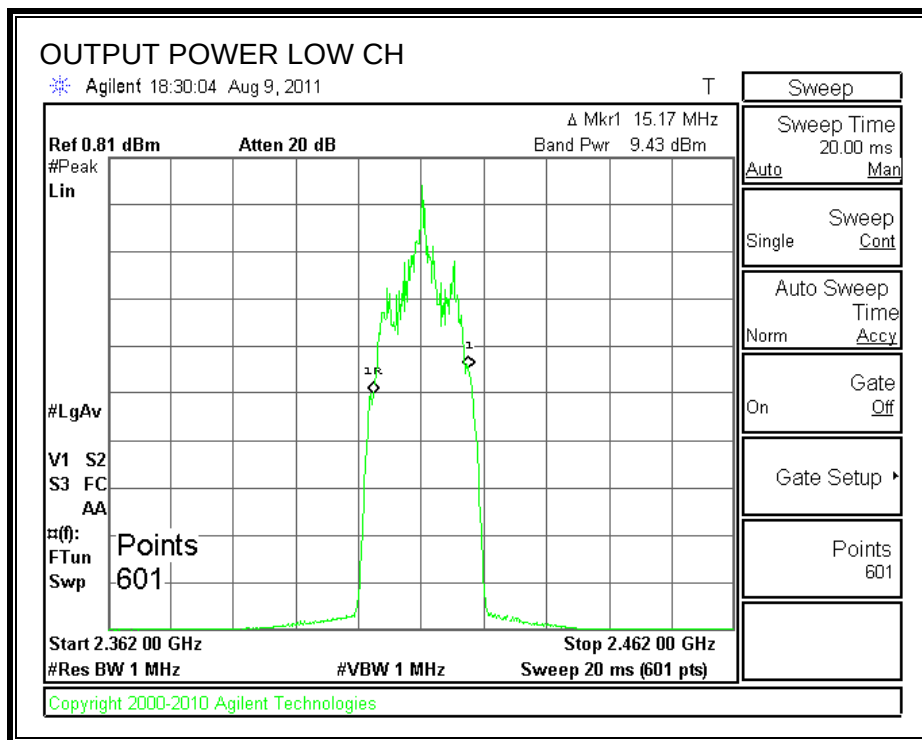

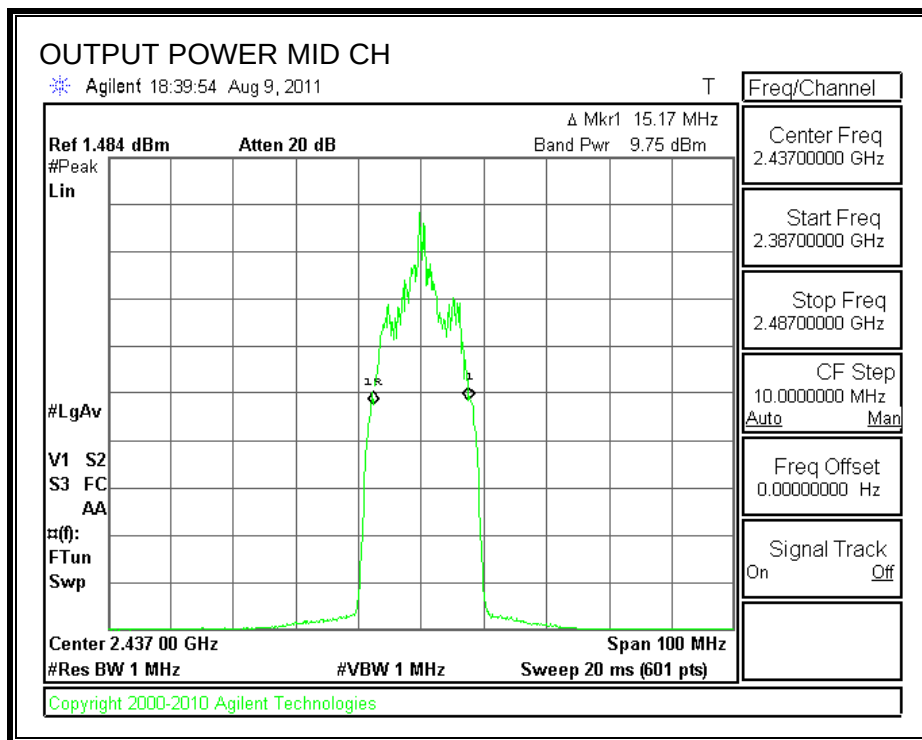

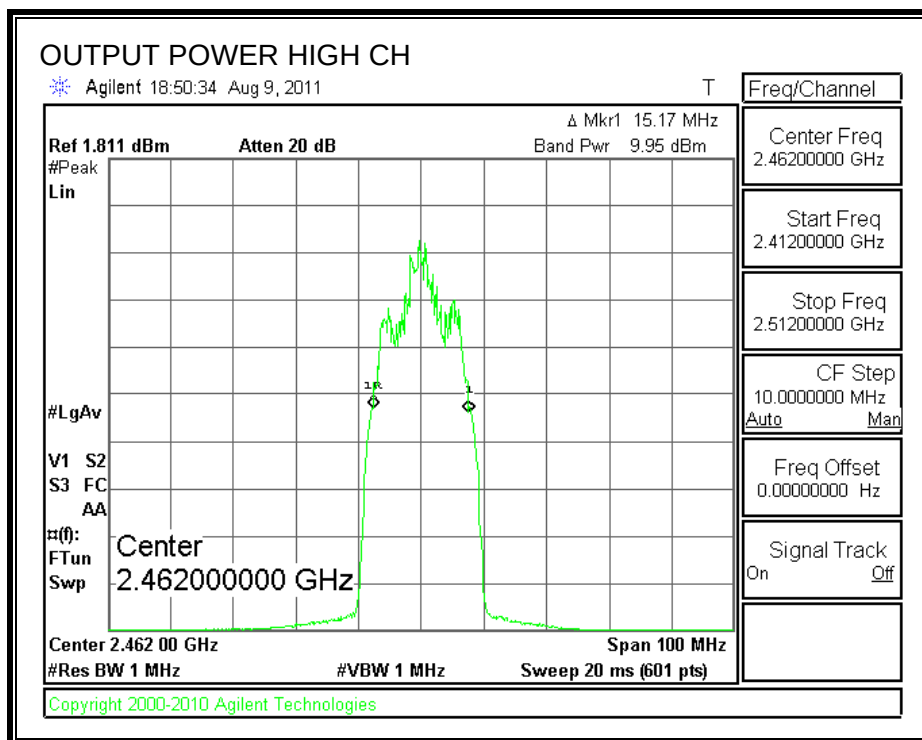

7.3.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Power (dBm)
Low	2412	12.25
Middle	2437	12.48
High	2462	12.62

7.3.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.


RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-11.17	8	-19.17
Middle	2437	-10.91	8	-18.91
High	2462	-9.06	8	-17.06

POWER SPECTRAL DENSITY

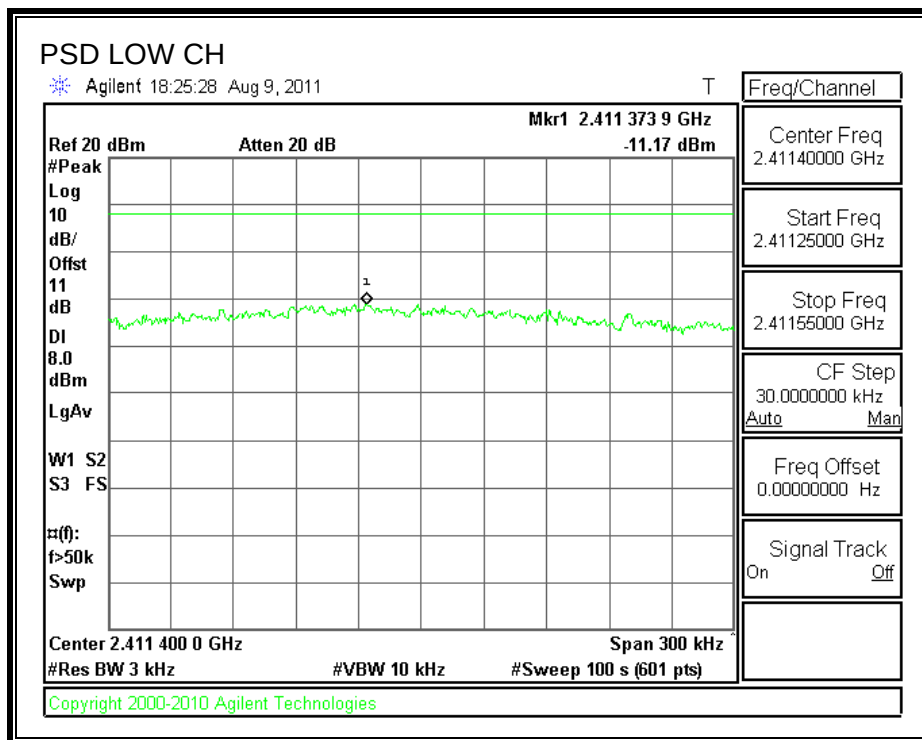

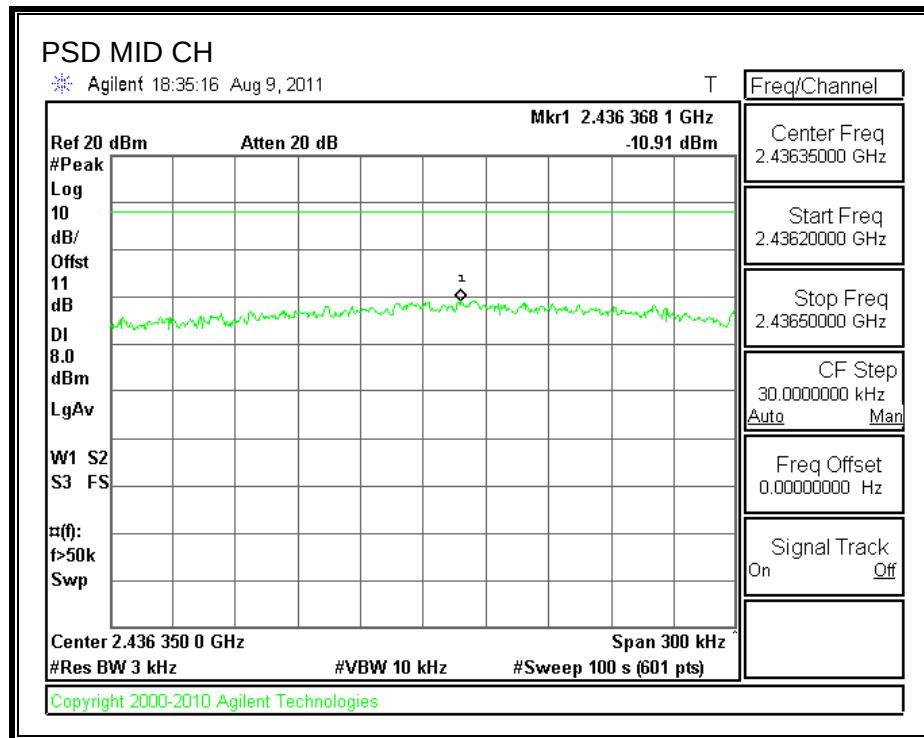

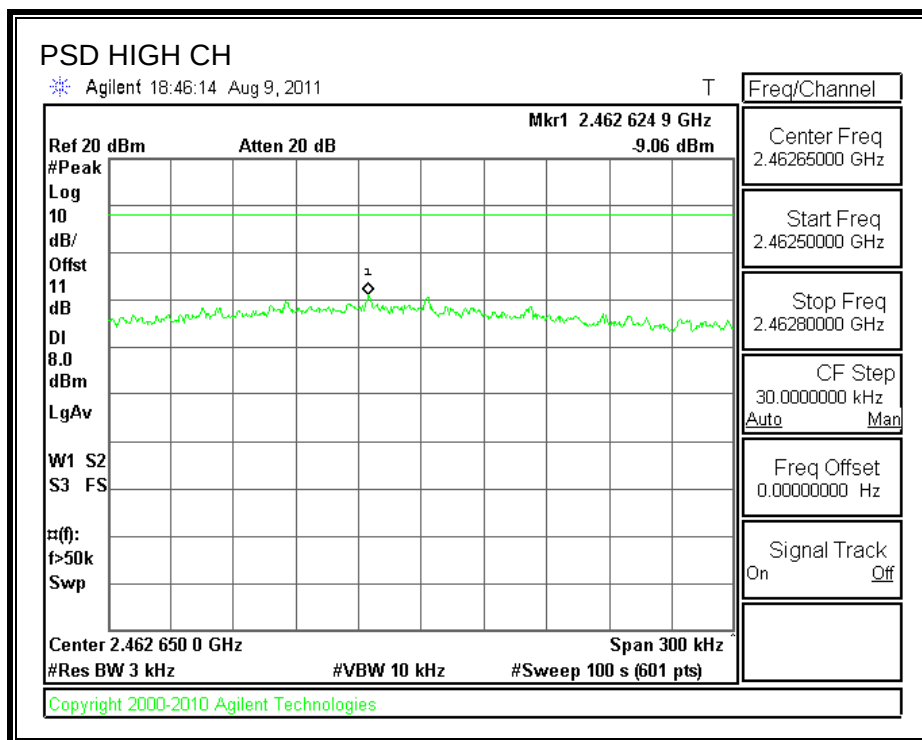

7.3.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

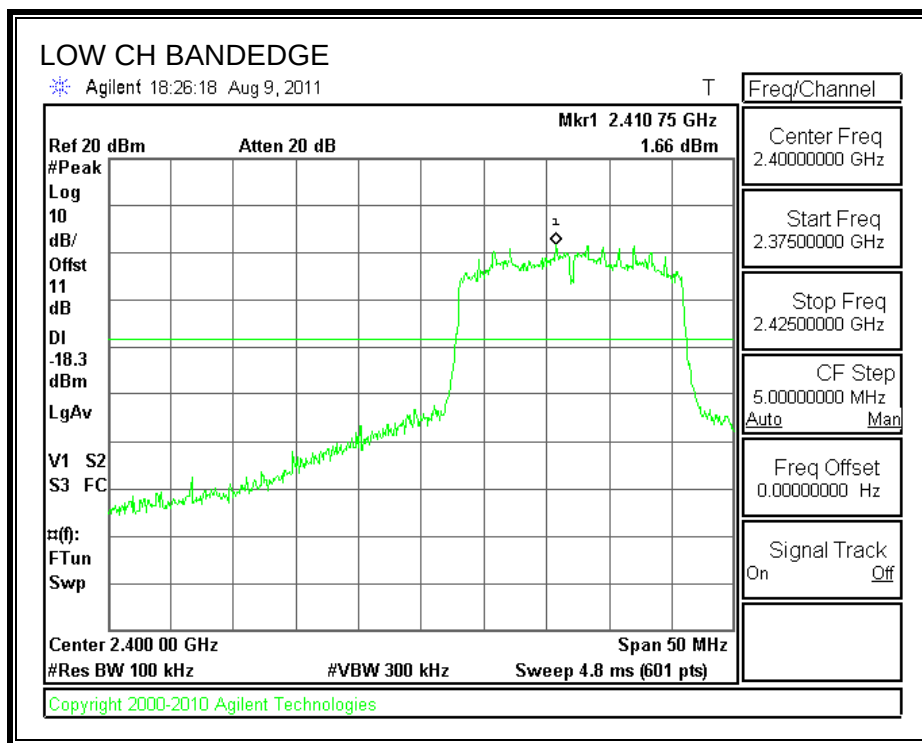

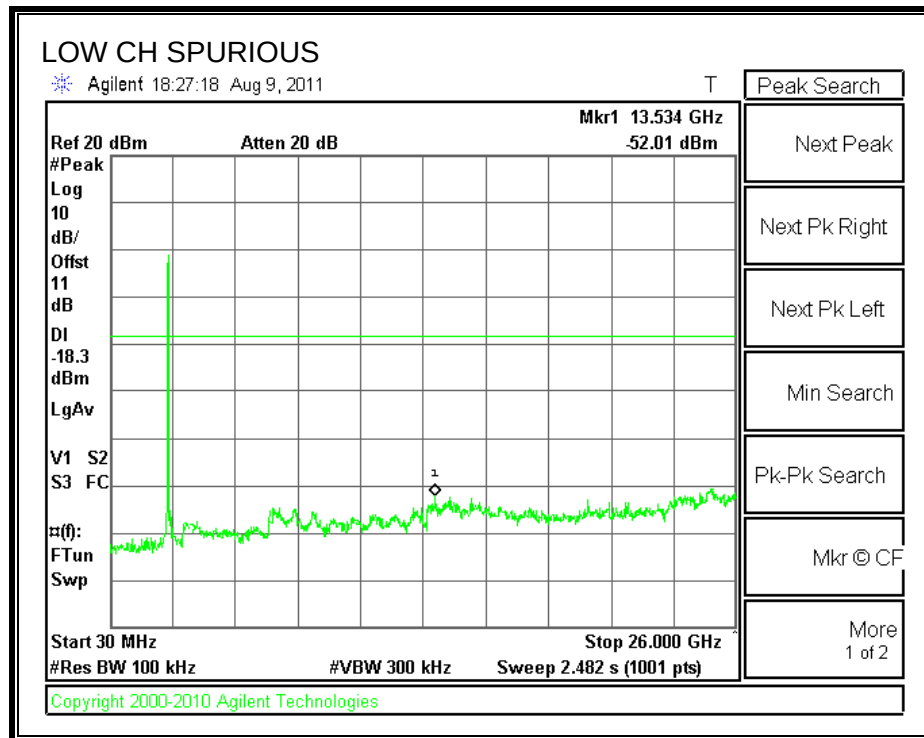



SPURIOUS EMISSIONS, MID CHANNEL

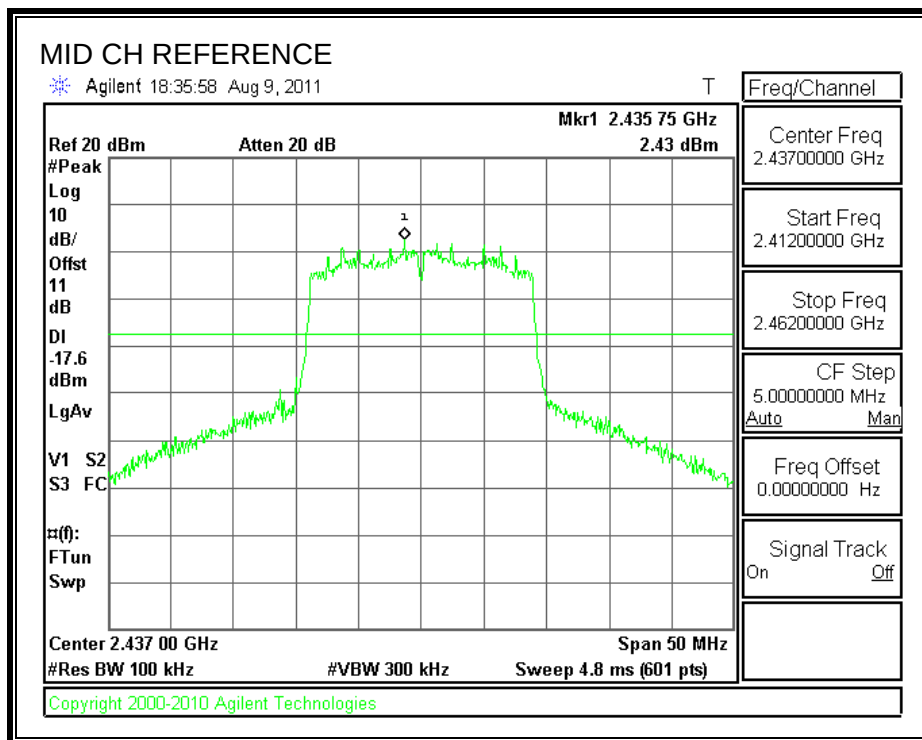

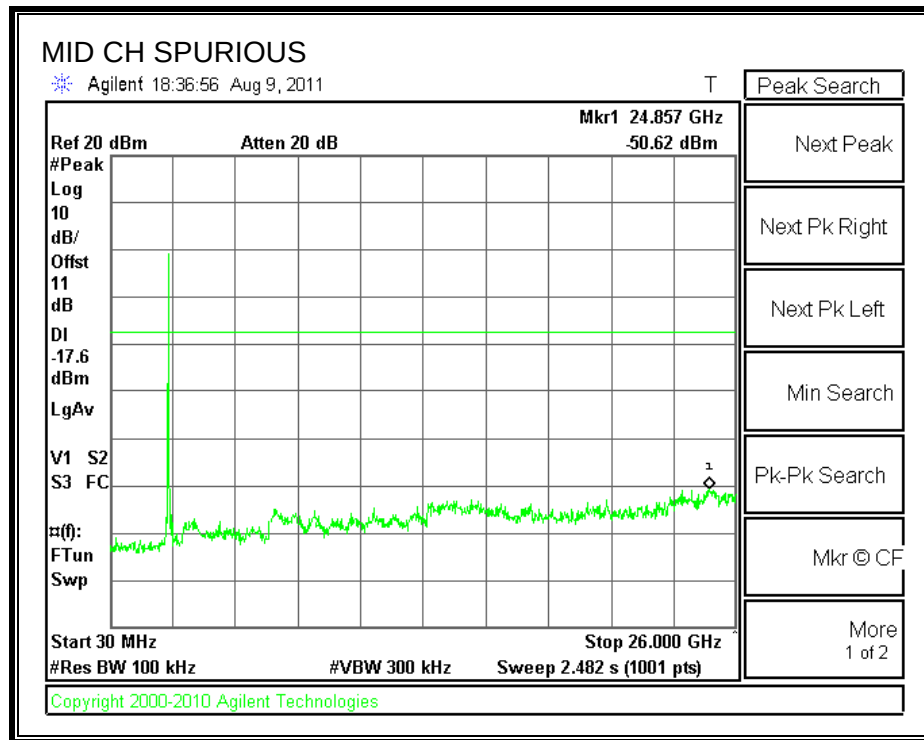

SPURIOUS EMISSIONS, HIGH CHANNEL

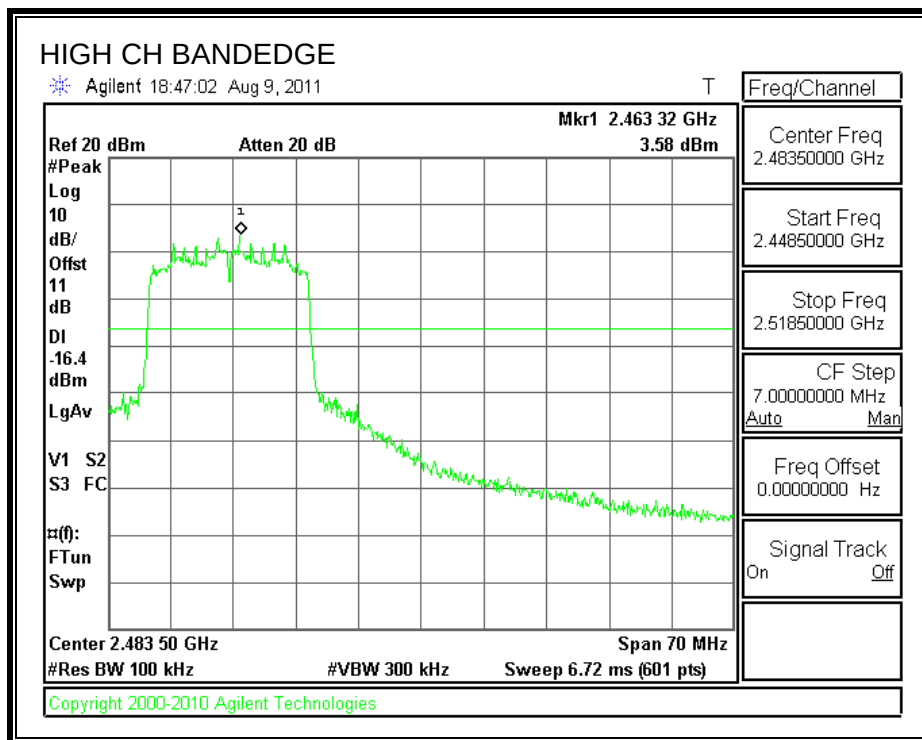

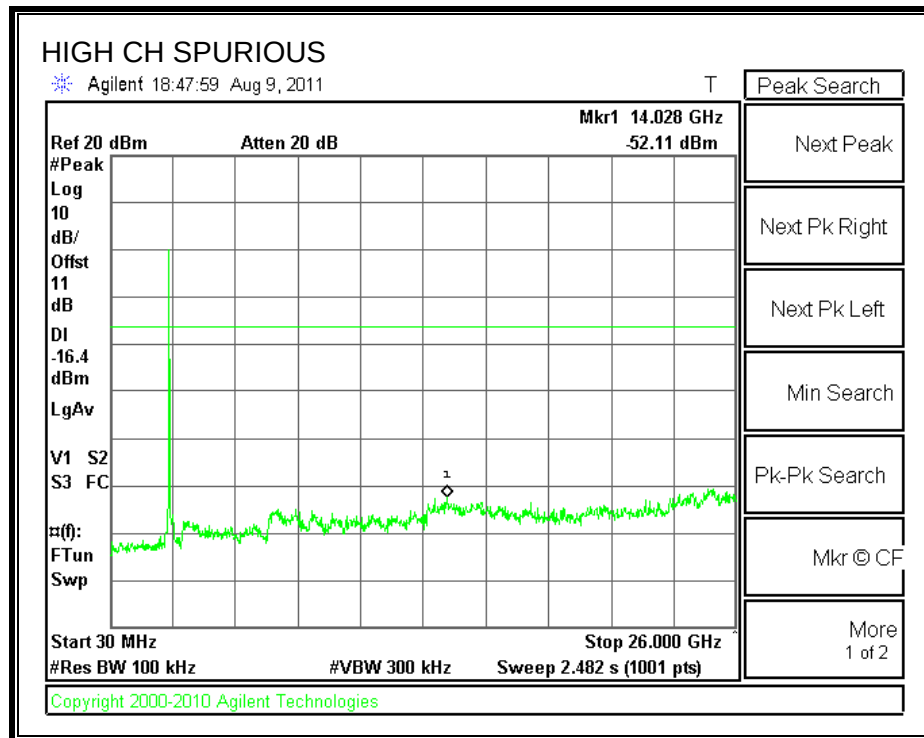

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. TRANSMITTER ABOVE 1 GHz


8.2.1. TX ABOVE 1 GHz FOR 802.11b MODE IN THE 2.4 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

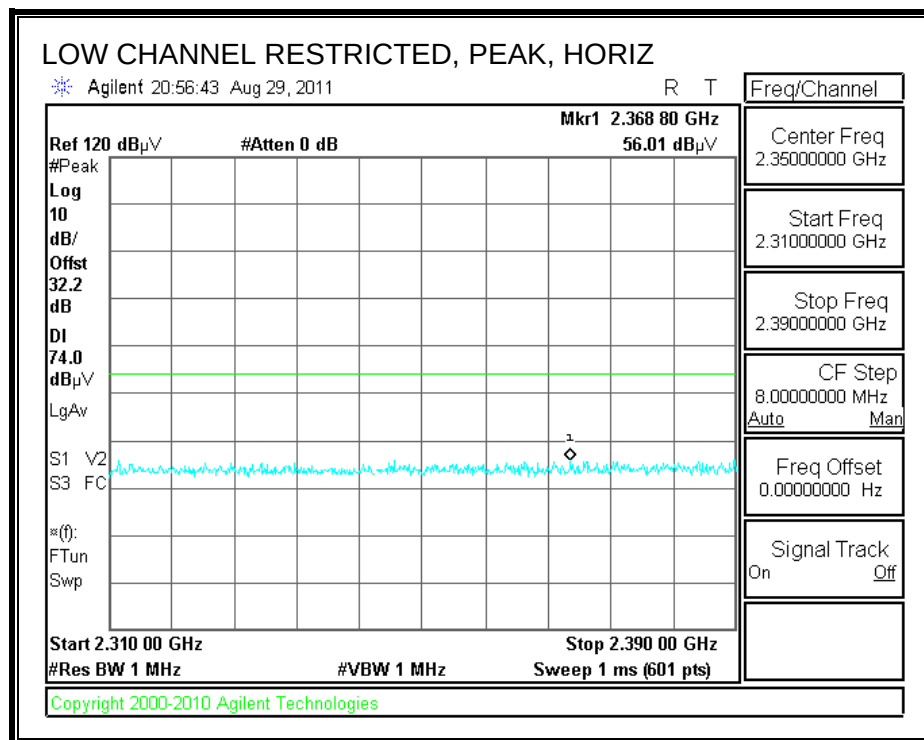

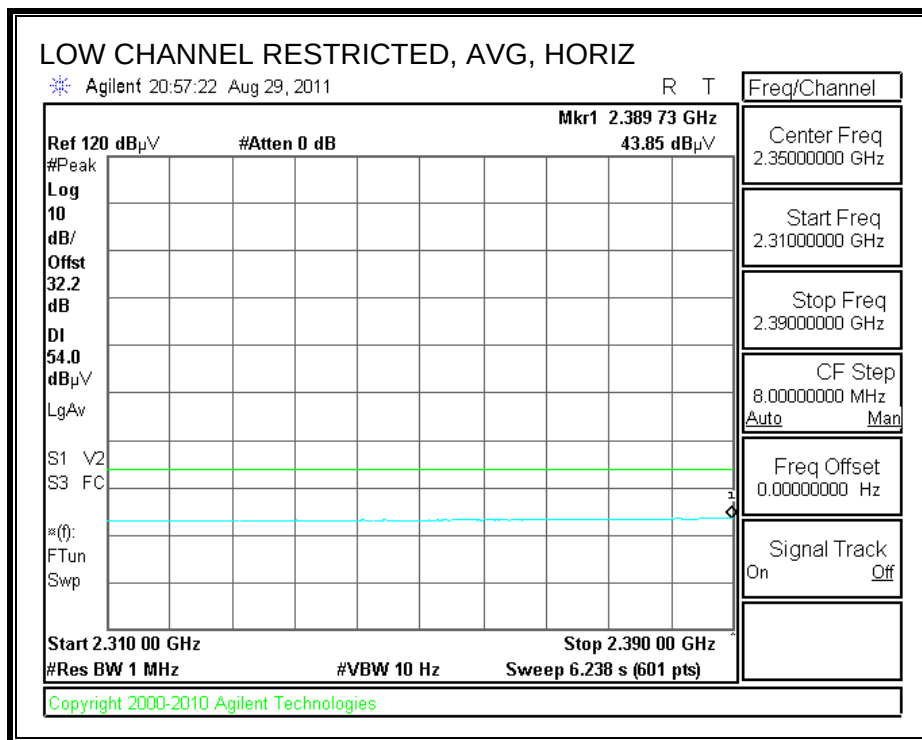



RESTRICTED BANEDGE (LOW CHANNEL, VERTICAL)

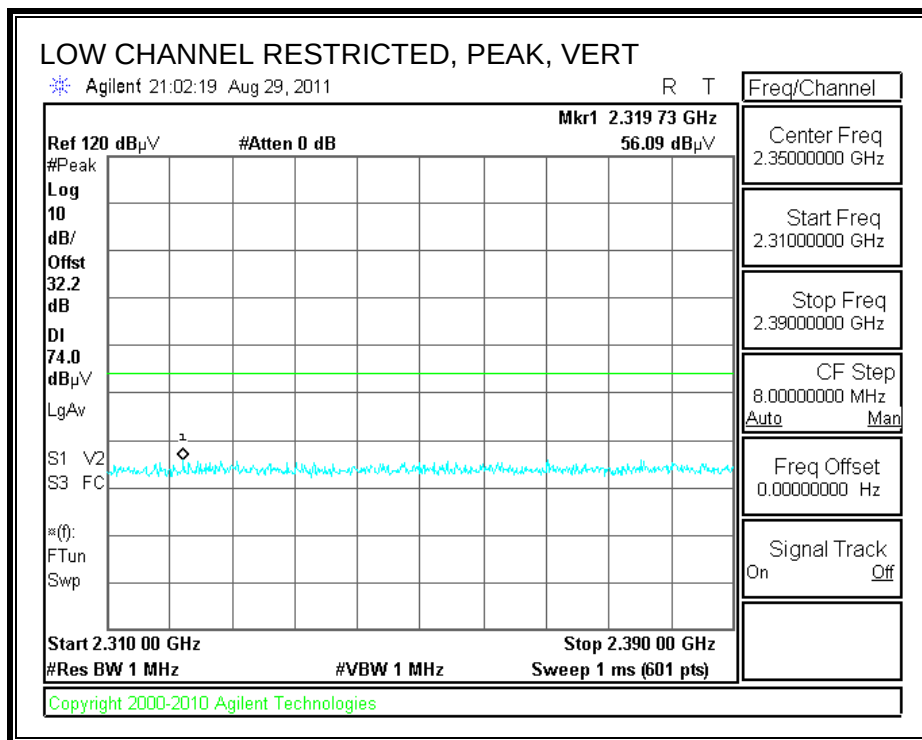

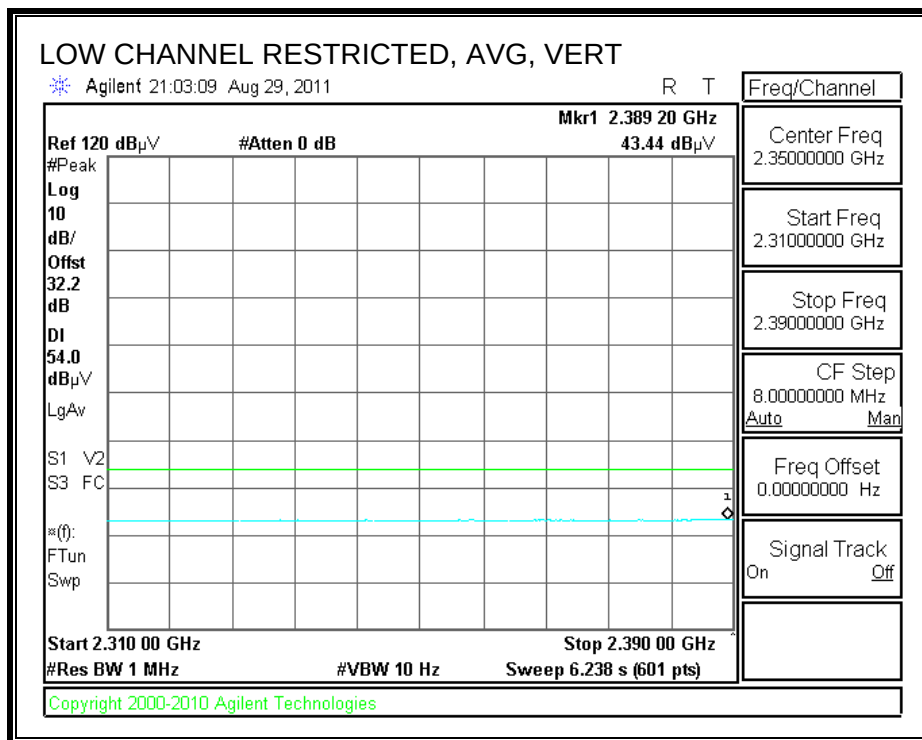



RESTRICTED BANEDGE (HIGH CHANNEL, HORIZONTAL)

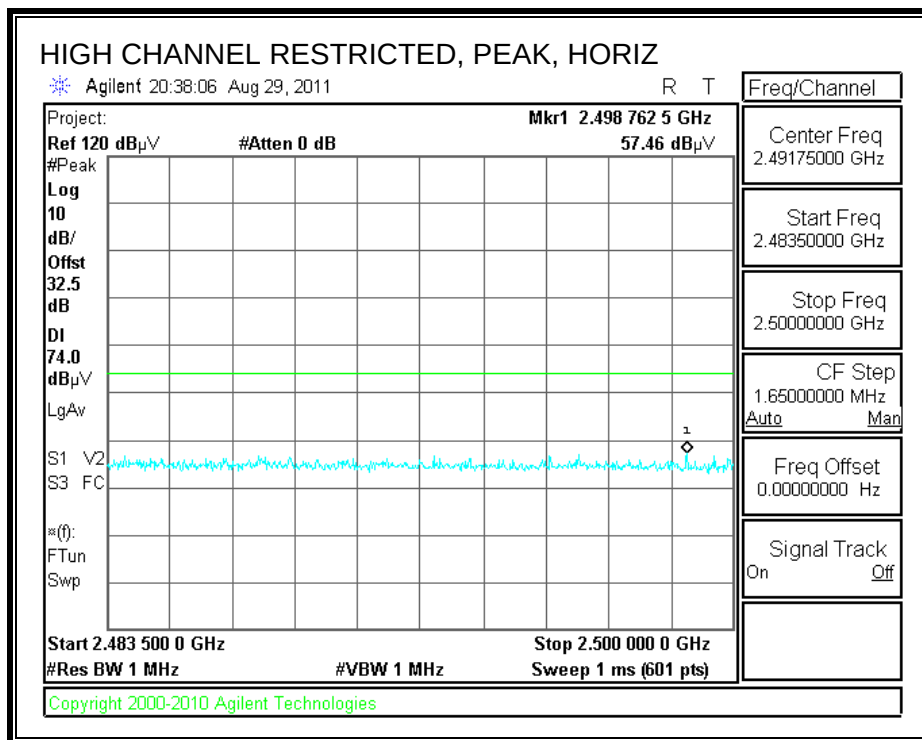

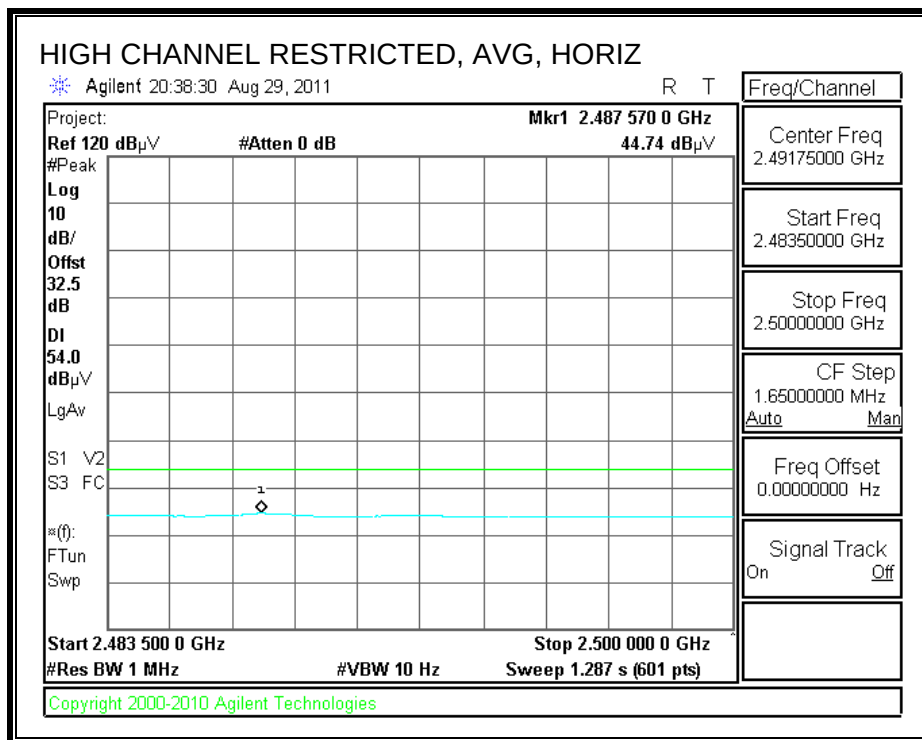

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

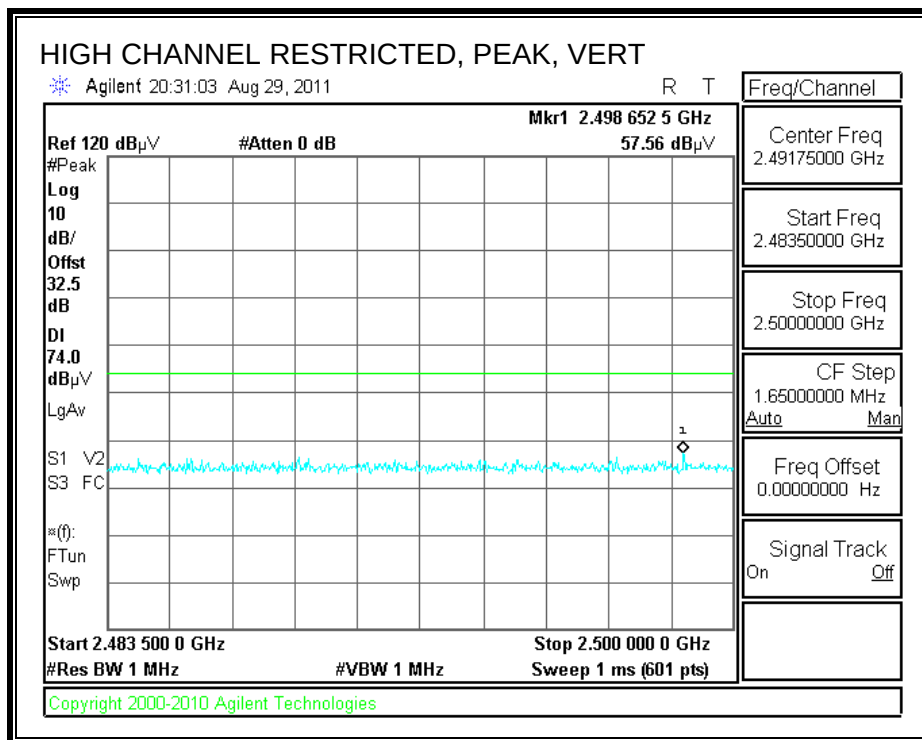


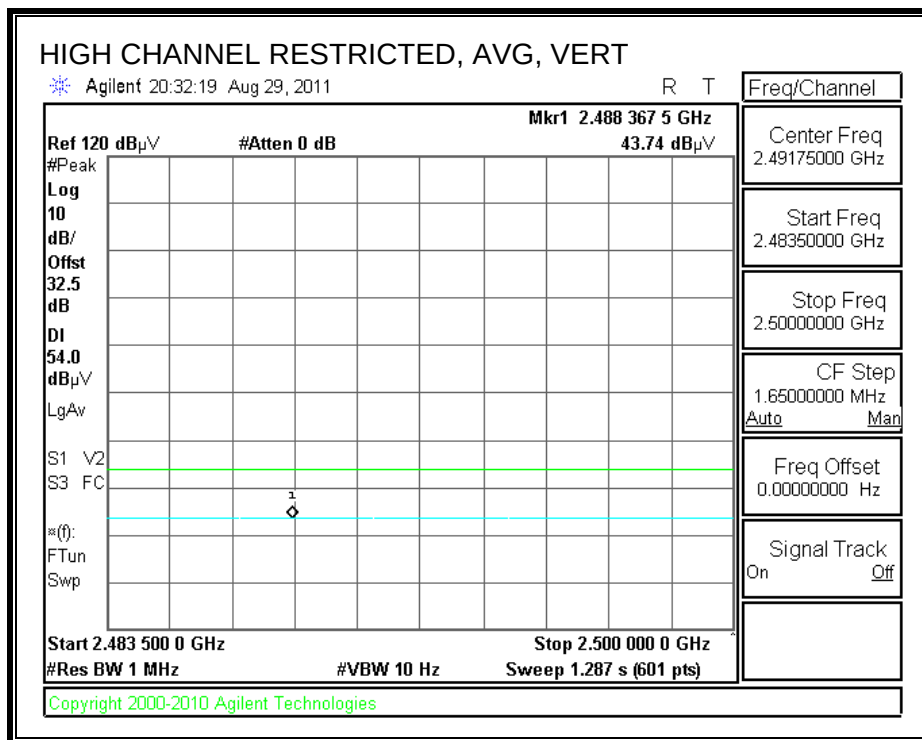


[illegible]


8.2.2. TX ABOVE 1 GHz FOR 802.11g MODE IN THE 2.4 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

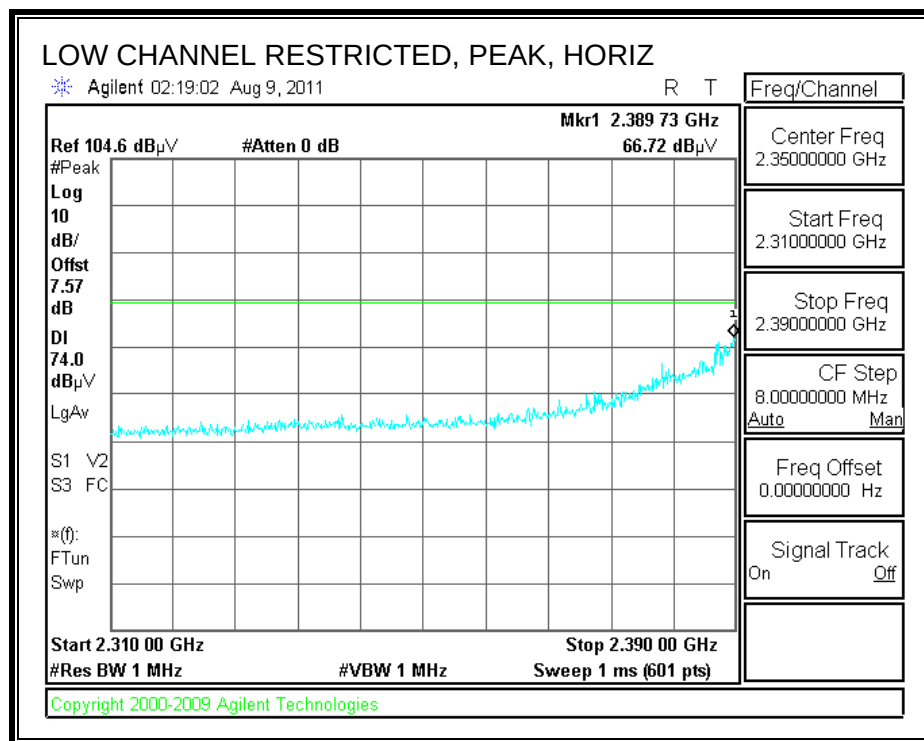

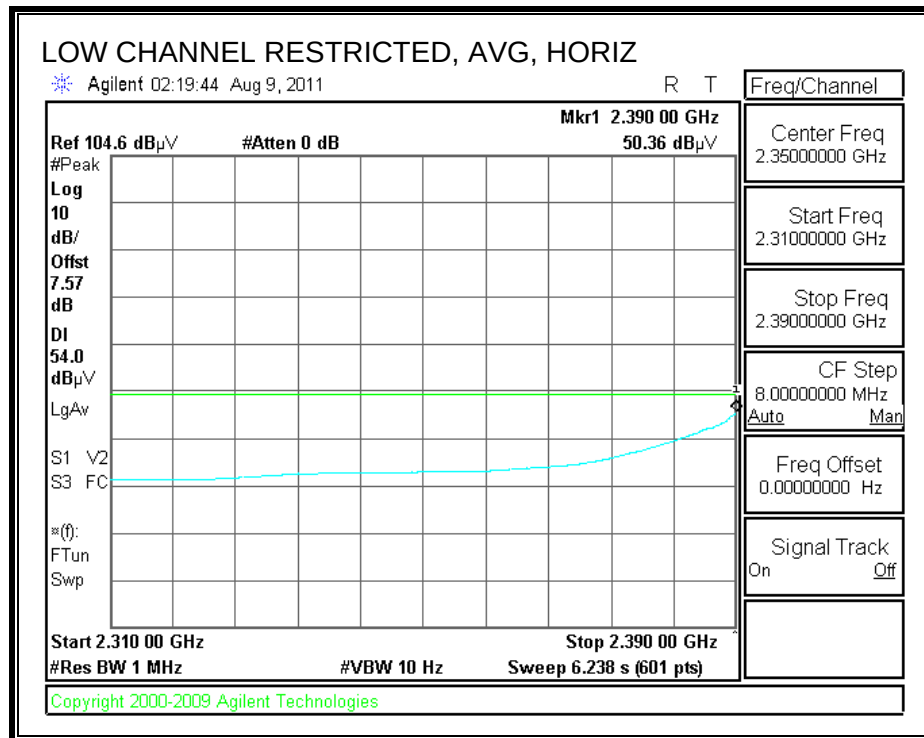



RESTRICTED BANEDGE (LOW CHANNEL, VERTICAL)

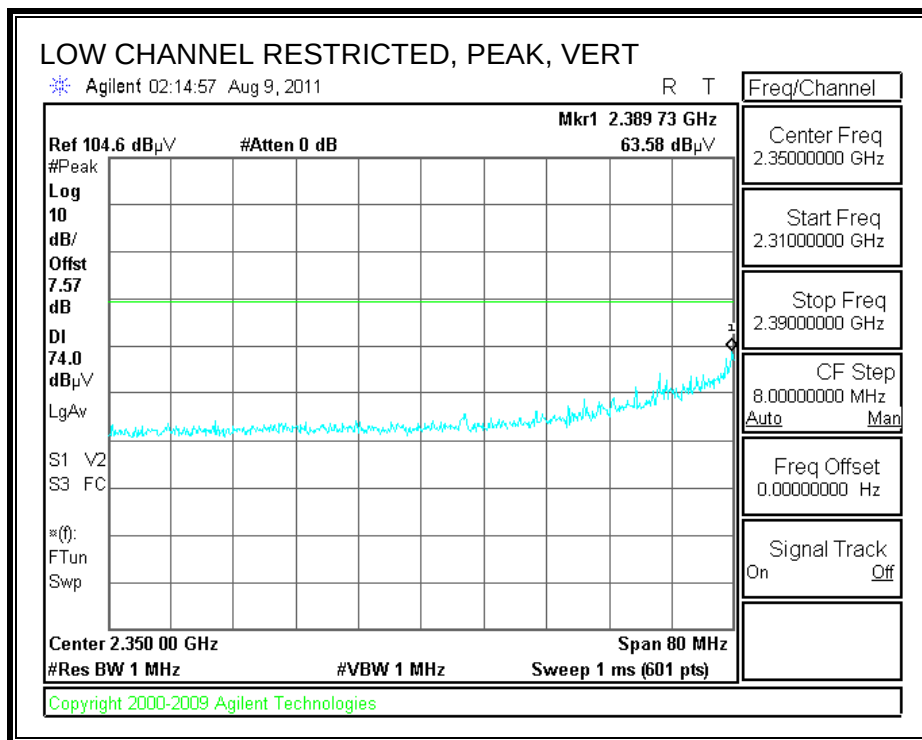

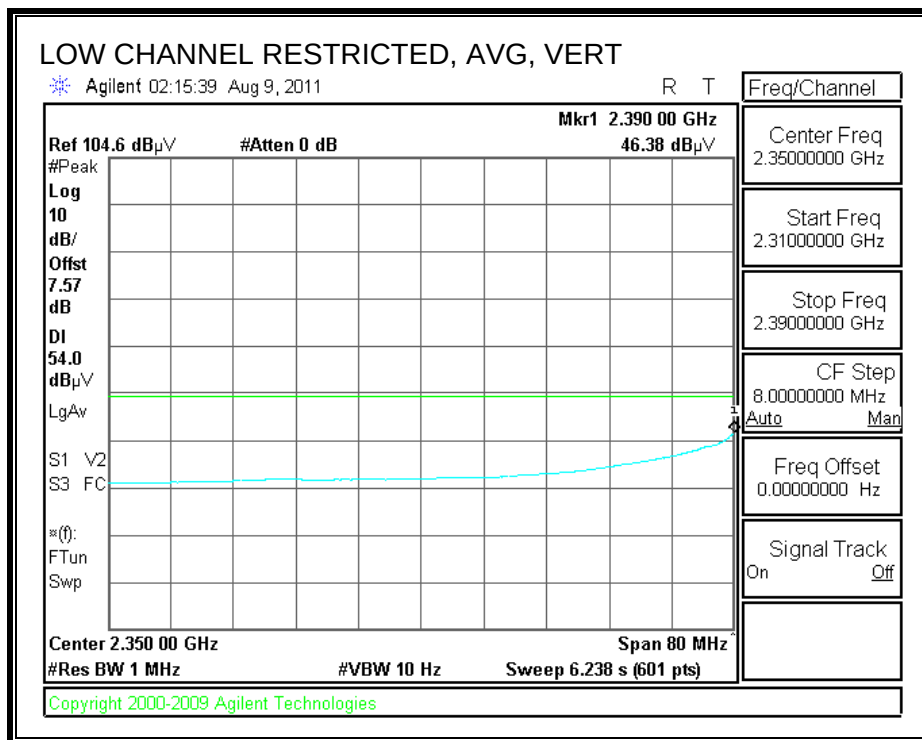



RESTRICTED BANEDGE (HIGH CHANNEL, HORIZONTAL)

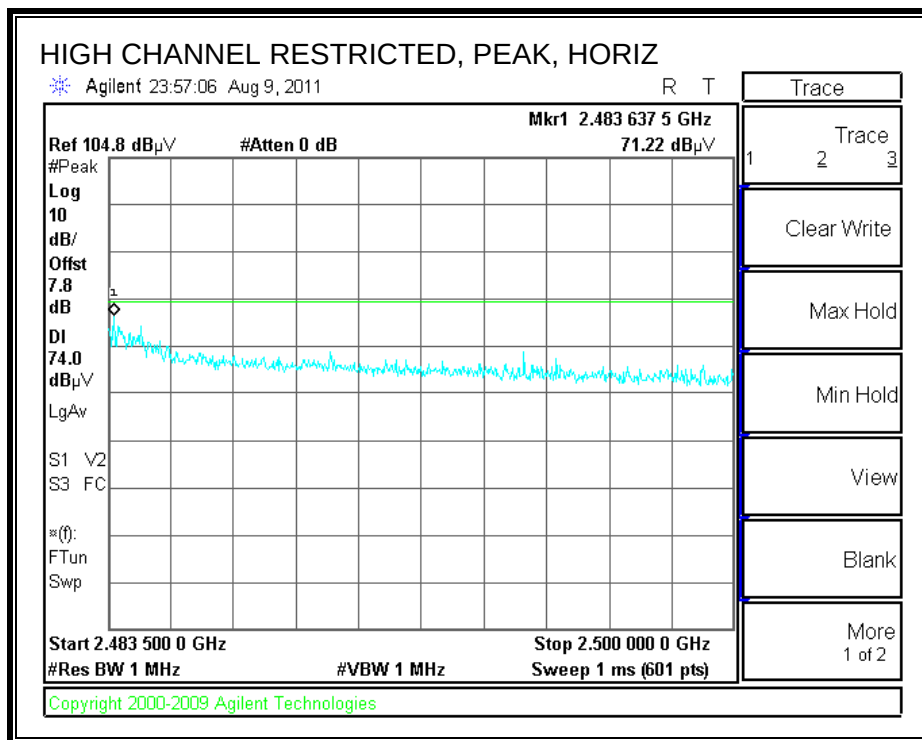

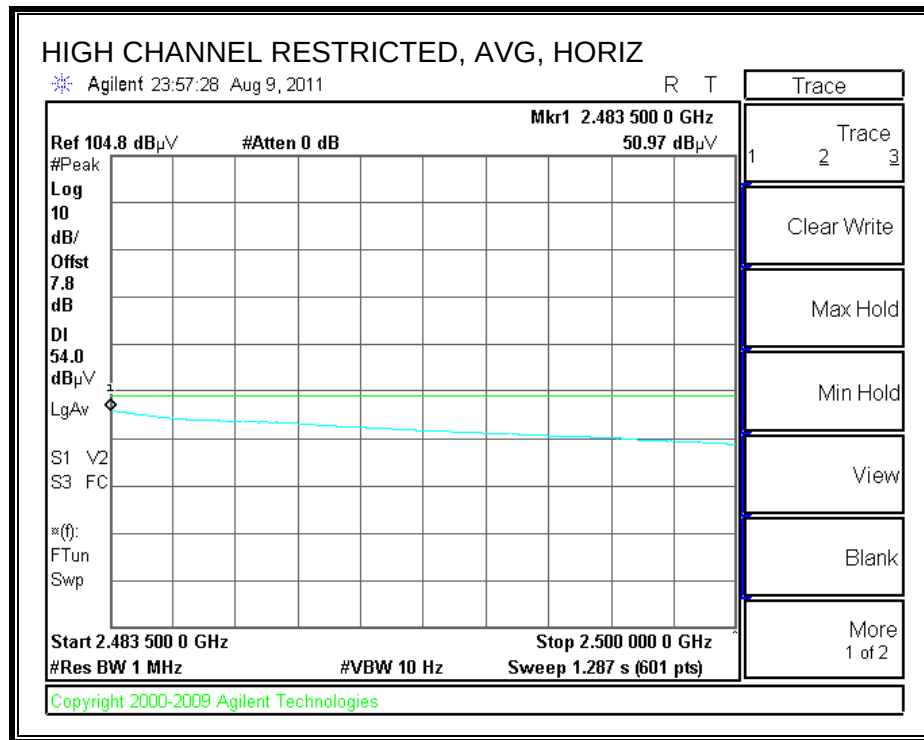

RESTRICTED BANEDGE (HIGH CHANNEL, VERTICAL)

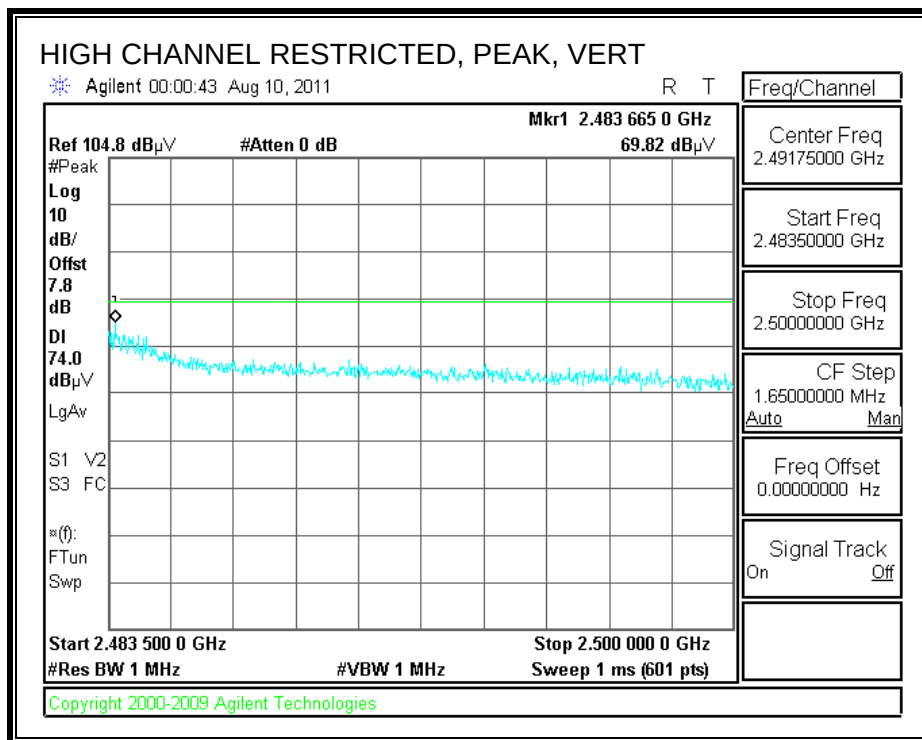

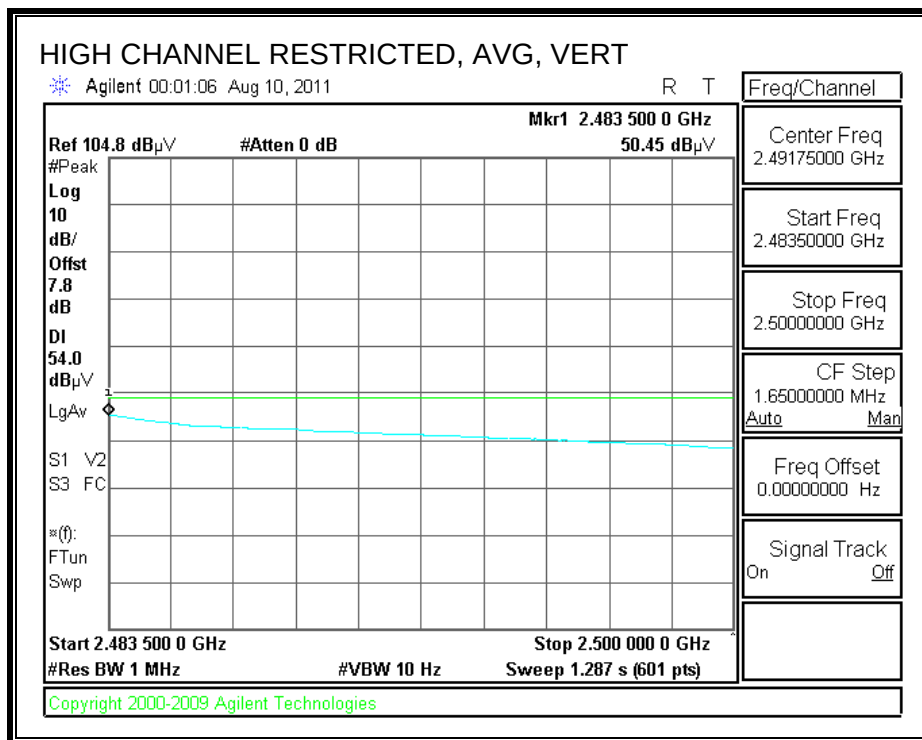



HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement																
Compliance Certification Services, Fremont 5m Chamber-B																
Company:		SAMSUNG														
Project #:		11I13975														
Date:		8/29/2011														
Test Engineer:		Thanh Nguyen														
Configuration:		EUT 2G worst Position, AC Adapter														
Mode:		Transmit g mode														
Test Equipment:																
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit				
T59; S/N: 3245 @3m			T145 Agilent 3008A0056						T39; ARA 18-26GHz; S/N:1013			FCC 15.205				
Hi Frequency Cables																
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz	
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF_4.0GHz							
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Low Ch																
4.824	3.0	46.8	32.8	33.2	6.3	-34.8	0.0	0.6	52.1	38.1	74	54	-21.9	-15.9	V	
4.824	3.0	44.1	29.9	33.2	6.3	-34.8	0.0	0.6	49.3	35.2	74	54	-24.7	-18.8	H	
Mid Ch																
4.874	3.0	46.6	32.4	33.2	6.3	-34.8	0.0	0.6	51.9	37.7	74	54	-22.1	-16.3	V	
7.311	3.0	42.0	27.8	36.2	8.5	-34.9	0.0	0.6	52.4	38.2	74	54	-21.6	-15.8	V	
12.185	3.0	34.0	21.7	39.6	11.1	-32.3	0.0	0.9	53.4	41.1	74	54	-20.6	-12.9	Noise floor	
4.874	3.0	42.4	29.4	33.2	6.3	-34.8	0.0	0.6	47.8	34.7	74	54	-26.2	-19.3	H	
7.311	3.0	39.3	25.3	36.2	8.5	-34.9	0.0	0.6	49.7	35.7	74	54	-24.3	-18.3	Noise floor	
High Ch																
4.924	3.0	46.4	32.4	33.3	6.3	-34.8	0.0	0.6	51.9	37.9	74	54	-22.1	-16.1	V	
7.386	3.0	48.8	33.2	36.3	8.5	-34.9	0.0	0.6	59.4	43.8	74	54	-14.6	-10.2	V	
4.924	3.0	45.3	31.5	33.3	6.3	-34.8	0.0	0.6	50.8	36.9	74	54	-23.2	-17.1	H	
7.386	3.0	40.3	25.6	36.3	8.5	-34.9	0.0	0.6	50.8	36.1	74	54	-23.2	-17.9	H	
No other emissions were detected above the system noise floor																
Rev. 07.08.11																
f	Measurement Frequency		Amp	Preamp Gain		Avg Lim		Average Field Strength Limit								
Dist	Distance to Antenna		D Corr	Distance Correct to 3 meters		Pk Lim		Peak Field Strength Limit								
Read	Analyzer Reading		Avg	Average Field Strength @ 3 m		Avg Mar		Margin vs. Average Limit								
AF	Antenna Factor		Peak	Calculated Peak Field Strength		Pk Mar		Margin vs. Peak Limit								
CL	Cable Loss		HPF	High Pass Filter												


8.2.3. TX ABOVE 1 GHz FOR 802.11n HT20 MODE IN THE 2.4 GHz BAND


RESTRICTED BANEDGE (LOW CHANNEL, HORIZONTAL)

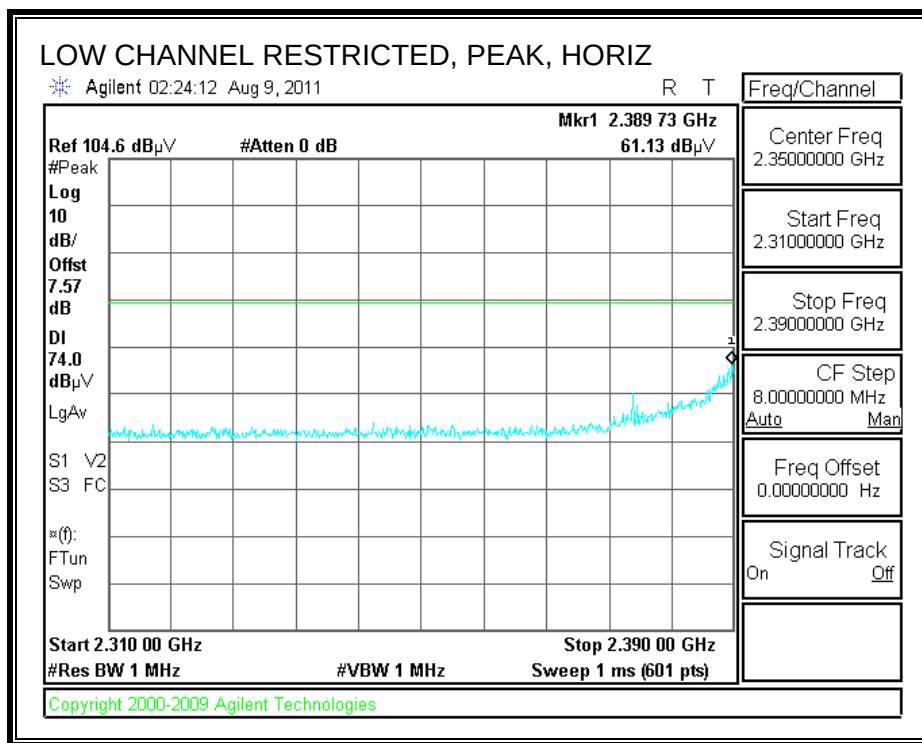

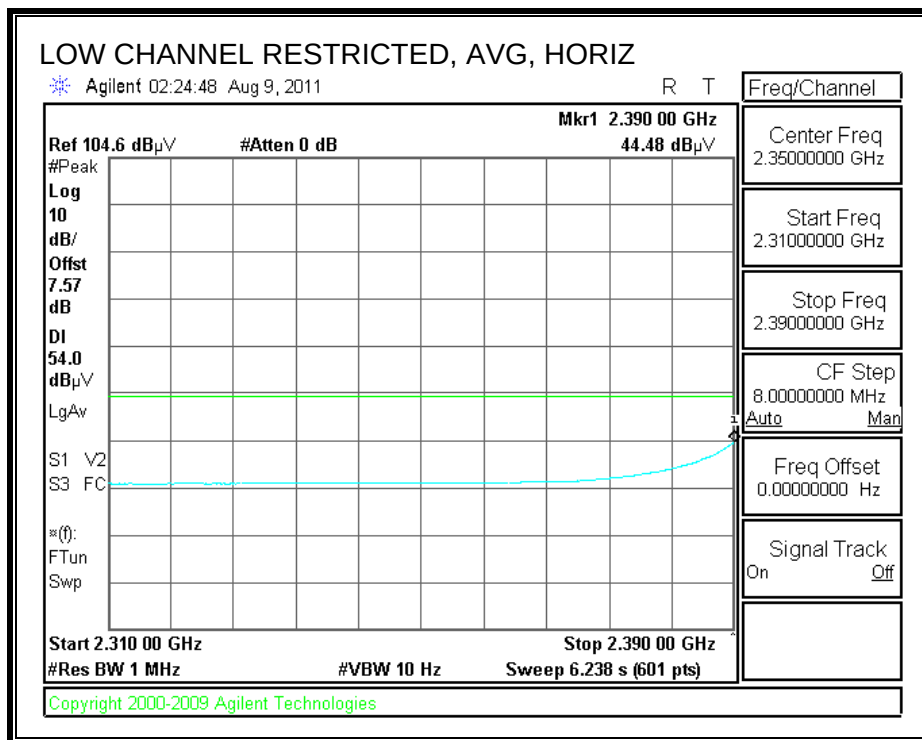



RESTRICTED BANEDGE (LOW CHANNEL, VERTICAL)

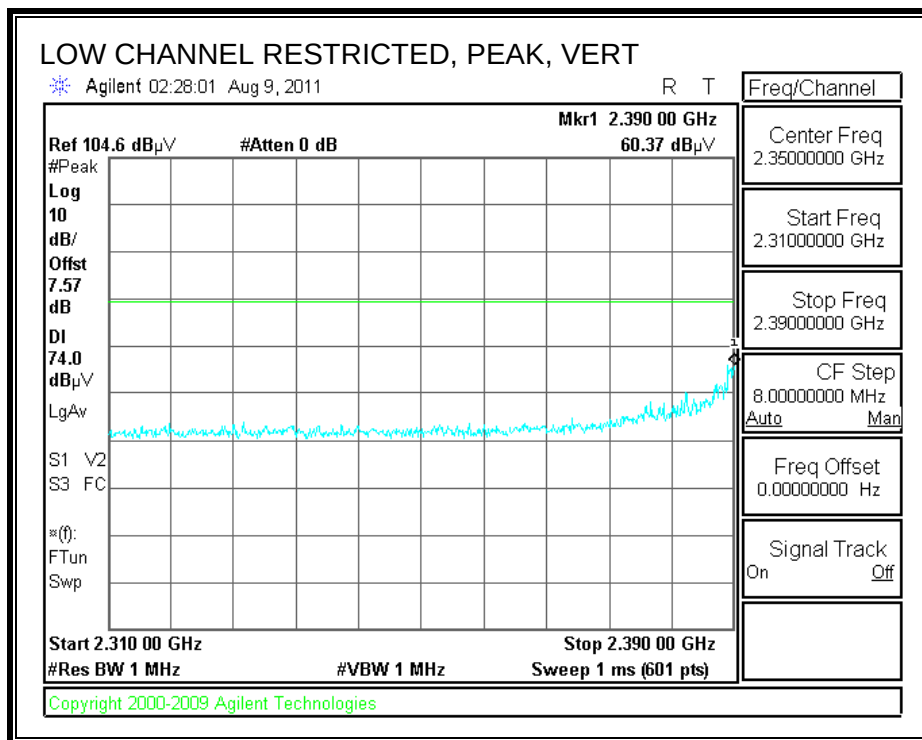

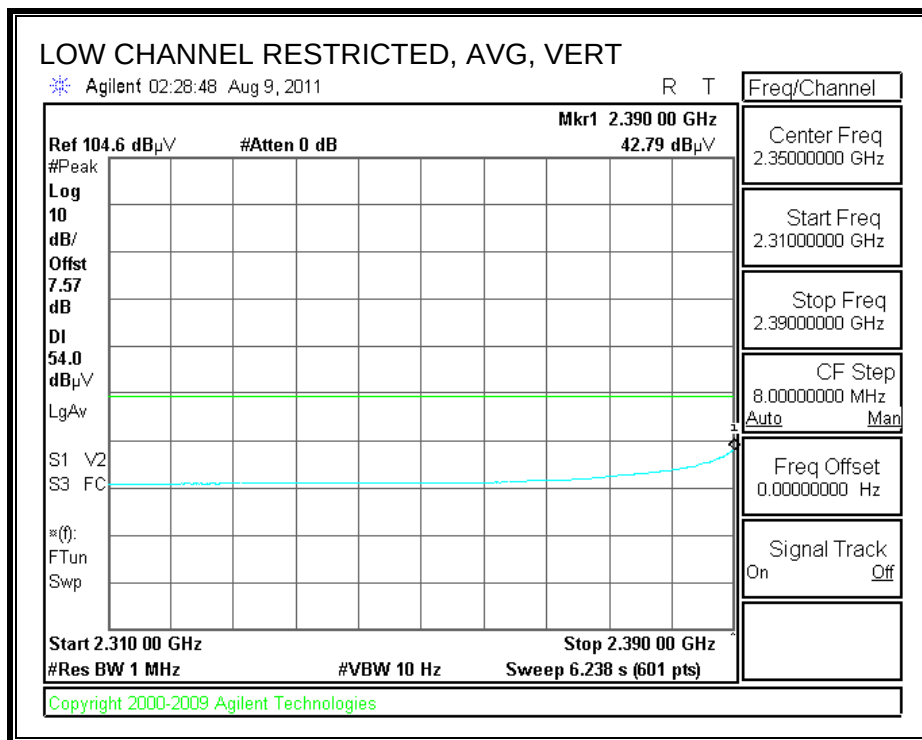



RESTRICTED BANEDGE (HIGH CHANNEL, HORIZONTAL)

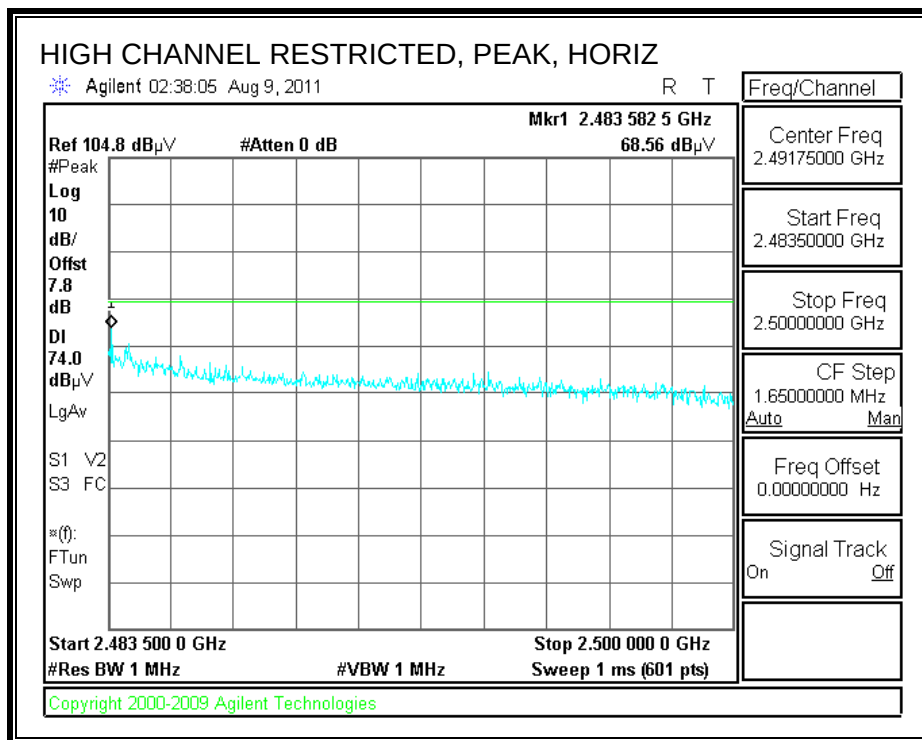

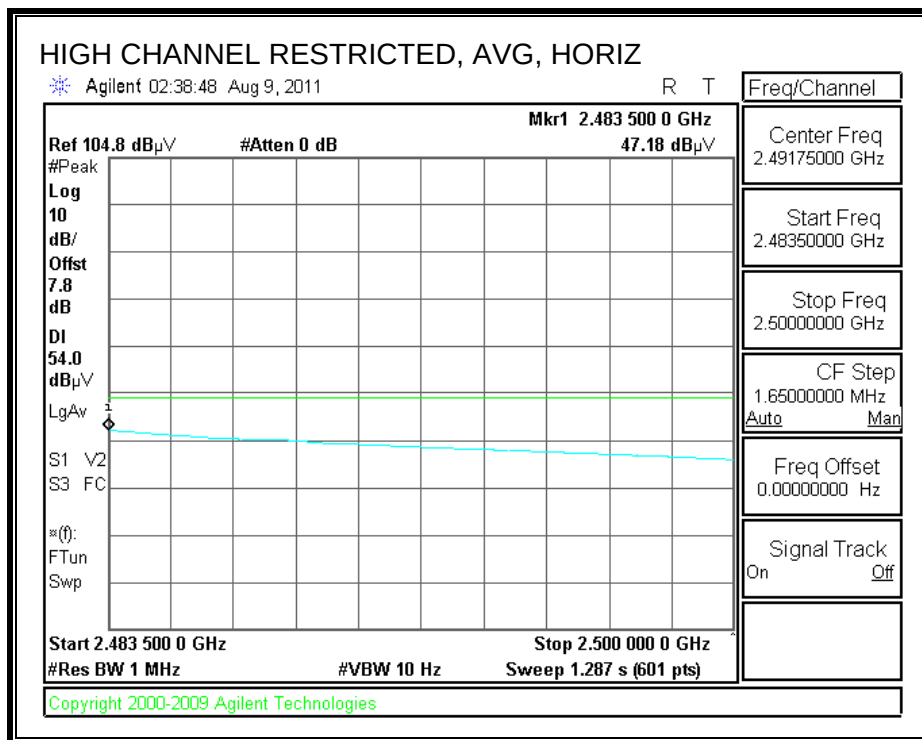

RESTRICTED BANEDGE (HIGH CHANNEL, VERTICAL)

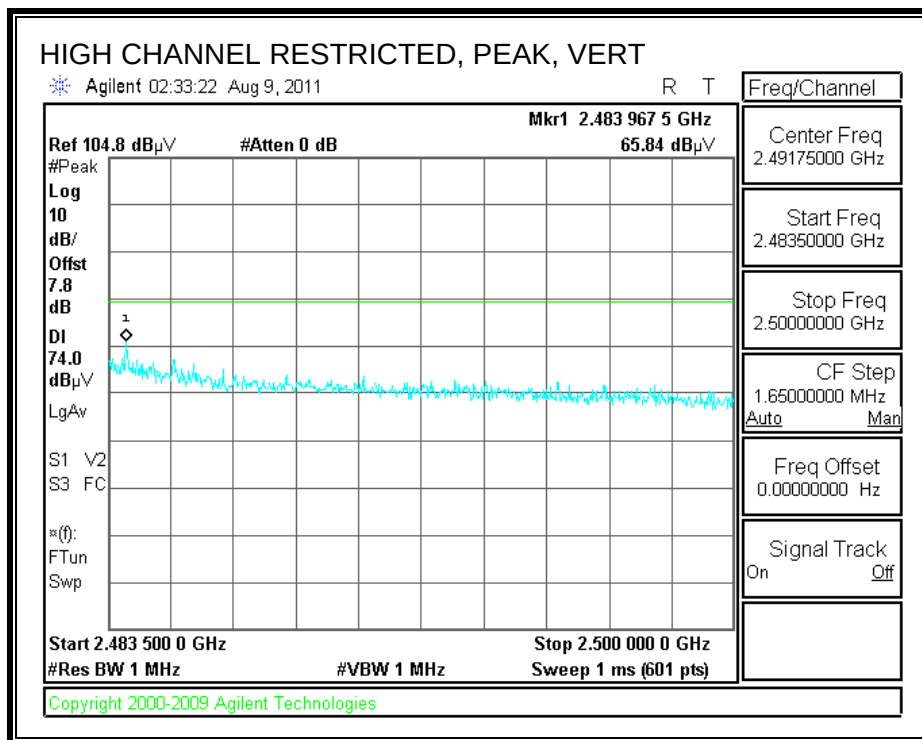

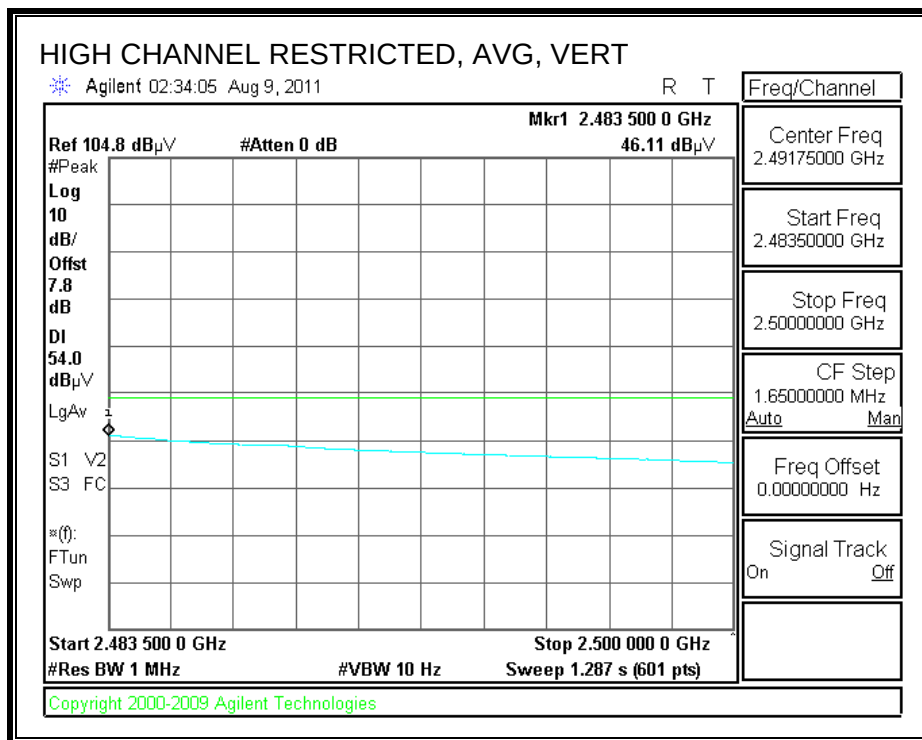


HARMONICS AND SPURIOUS EMISSIONS


High Frequency Measurement																	
Compliance Certification Services, Fremont 5m Chamber-B																	
Company:		SAMSUNG															
Project #:		11I13975															
Date:		8/29/2011															
Test Engineer:		Thanh Nguyen															
Configuration:		EUT 2G worst Position, AC Adapter															
Mode:		Transmit HT 20 mode															
Test Equipment:																	
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				Limit	
T59; S/N: 3245 @3m				T145 Agilent 3008A0056								T39; ARA 18-26GHz; S/N:1013				FCC 15.205	
Hi Frequency Cables																	
3' cable 22807700				12' cable 22807600				20' cable 22807500				HPF				Reject Filter	
3' cable 22807700				12' cable 22807600				20' cable 22807500				HPF_4.0GHz					
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz																	
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		
Low Ch																	
4.824	3.0	46.8	32.8	33.2	6.3	-34.8	0.0	0.6	52.1	38.1	74	54	-21.9	-15.9	V		
4.824	3.0	44.1	29.9	33.2	6.3	-34.8	0.0	0.6	49.3	35.2	74	54	-24.7	-18.8	H		
Mid Ch																	
4.874	3.0	46.6	32.4	33.2	6.3	-34.8	0.0	0.6	51.9	37.7	74	54	-22.1	-16.3	V		
7.311	3.0	42.0	27.8	36.2	8.5	-34.9	0.0	0.6	52.4	38.2	74	54	-21.6	-15.8	V		
12.185	3.0	34.0	21.7	39.6	11.1	-32.3	0.0	0.9	53.4	41.1	74	54	-20.6	-12.9	Noise floor		
4.874	3.0	42.4	29.4	33.2	6.3	-34.8	0.0	0.6	47.8	34.7	74	54	-26.2	-19.3	H		
7.311	3.0	39.3	25.3	36.2	8.5	-34.9	0.0	0.6	49.7	35.7	74	54	-24.3	-18.3	Noise floor		
High Ch																	
4.924	3.0	42.4	26.5	33.3	6.3	-34.8	0.0	0.6	47.8	32.0	74	54	-26.2	-22.0	V		
7.386	3.0	42.6	28.8	36.3	8.5	-34.9	0.0	0.6	53.1	39.3	74	54	-20.9	-14.7	V		
4.924	3.0	40.7	27.0	33.3	6.3	-34.8	0.0	0.6	46.1	32.5	74	54	-27.9	-21.5	H		
7.386	3.0	41.1	26.5	36.3	8.5	-34.9	0.0	0.6	51.6	37.0	74	54	-22.4	-17.0	H		
No other emissions were detected above the system noise floor																	
Rev. 07.08.11																	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										

8.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

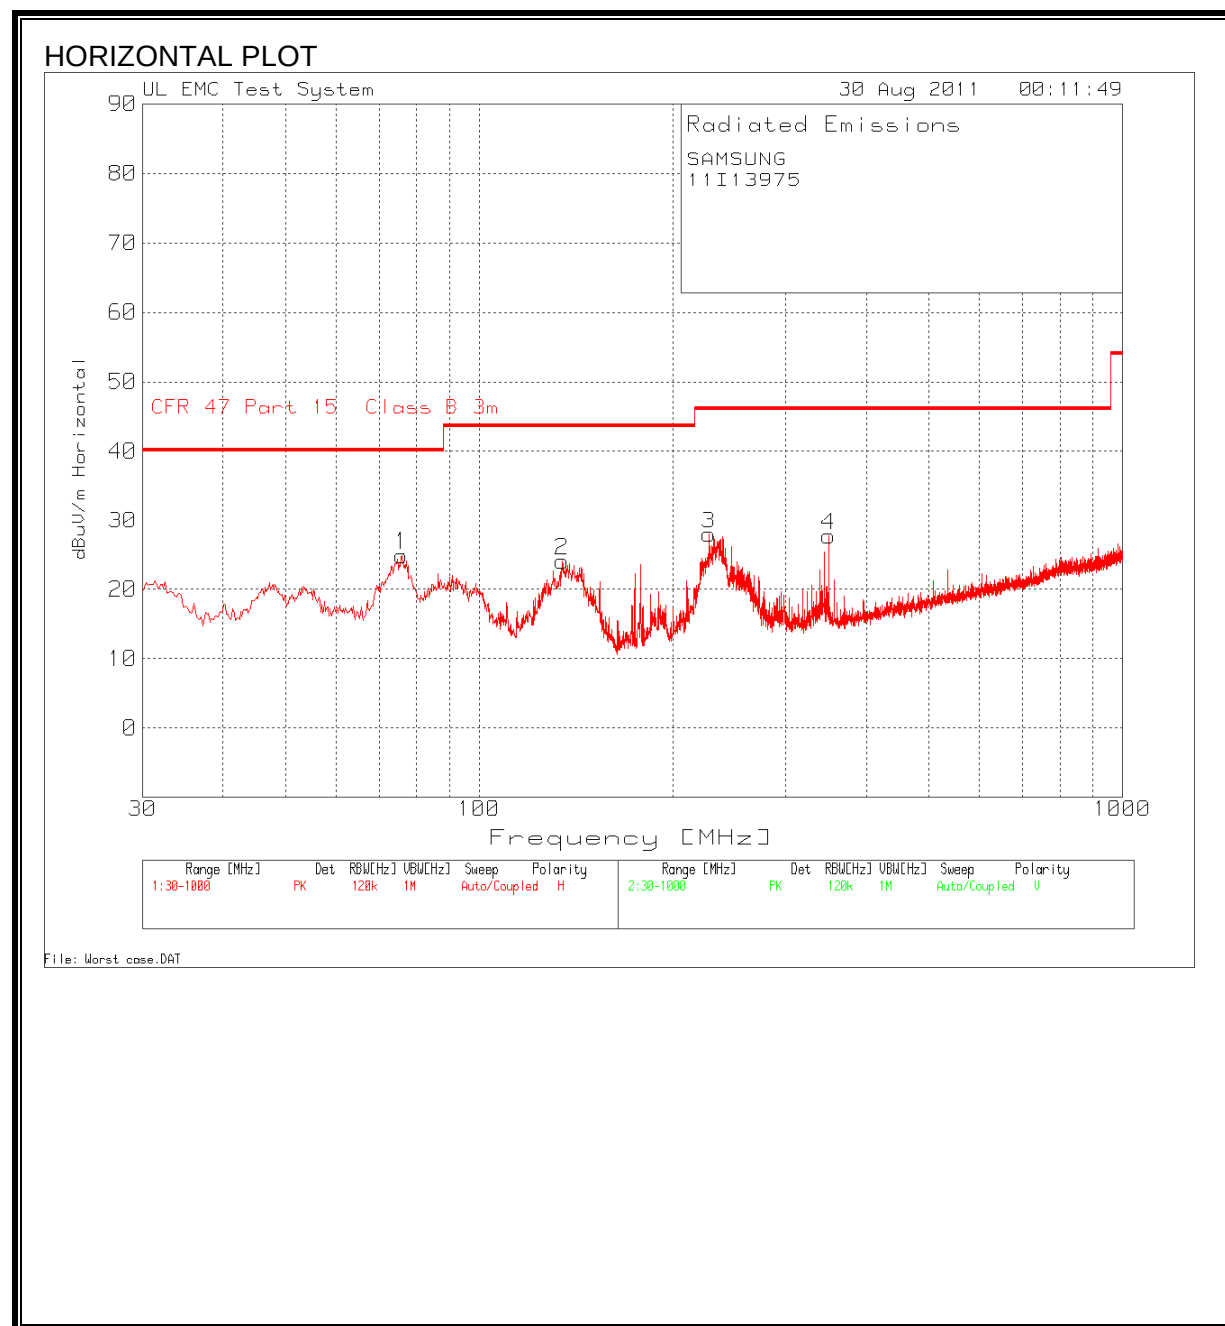

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

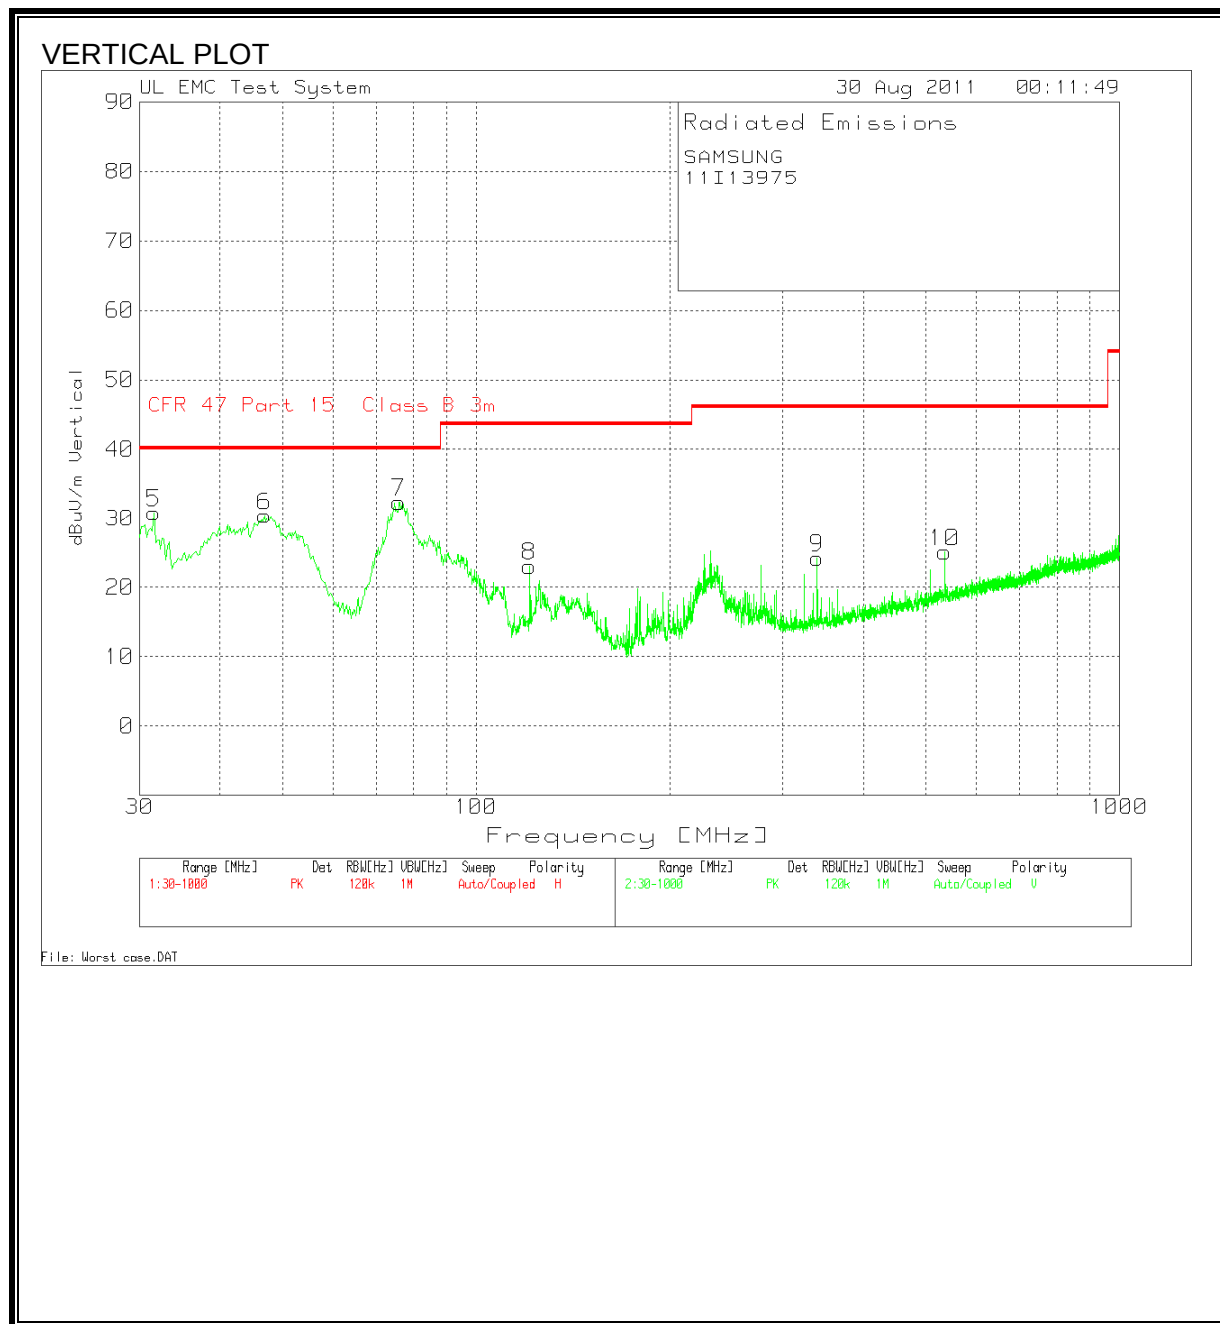

DATA

Manufacturer:		SAMSUNG								
Project:		11U13975								
Model:		GT-S5360B								
Description:										
Range 1 30 - 1000MHz										
Test Freq. (MHz)	Meter Reading (dBuV)	Detector	Cable Loss [dB]	Pre-Amp Gain [dB]	Antenna Factor [dB]	10m to 3m Conversion [dB]	CISPR22 Class B 10 m Limit	Margin	Height [cm]	Polarity
75.7474	45.13	PK	1.2	-29.4	7.9	24.83	40	-15.17	200	Horz
134.4824	38.13	PK	1.6	-29.2	13.5	24.03	43.5	-19.47	200	Horz
227.9157	42.73	PK	2.1	-28.8	11.9	27.93	46	-18.07	100	Horz
349.4564	39.85	PK	2.6	-28.8	14.1	27.75	46	-18.25	100	Horz
Range 2 200 - 1000MHz										
Test Freq. (MHz)	Meter Reading (dBuV)	Detector	Cable Loss [dB]	Pre-Amp Gain [dB]	Antenna Factor [dB]	10m to 3m Conversion [dB]	CISPR22 Class B 10 m Limit	Margin	Height [cm]	Polarity
31.5508	39.81	PK	0.9	-29.5	19.6	30.81	40	-9.19	100	Vert
46.8645	48.9	PK	1	-29.4	9.9	30.4	40	-9.6	100	Vert
75.9412	52.75	PK	1.2	-29.4	7.9	32.45	40	-7.55	100	Vert
121.1071	37.06	PK	1.5	-29.2	13.7	23.06	43.5	-20.44	100	Vert
339.1827	36.31	PK	2.6	-28.7	14	24.21	46	-21.79	100	Vert
535.1599	33.96	PK	3.2	-29.4	17.3	25.06	46	-20.94	100	Vert

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE


ANSI C63.4

RESULTS

6 WORST EMISSIONS

SAMSUNG									
11I13975									
Line-L1 .15 - 30MHz									
Test Freq. (MHz)	Meter Reading	Detector	LISN [dB]	Conducted Emission Cable [dB]	Correct Reading (dBuVolts)	Class B Quasi-peak Limit	Quasi-Peak Margin	Class B Average Limit	Average Margin
0.429	50.51	PK	0	0	50.51	57.3			
0.429	39.09	Av	0	0	39.09	57.3	-18.21	47.3	-8.21
0.4965	51.86	PK	0	0	51.86	56.1	-4.24		
0.4965	39.73	Av	0	0	39.73	56.1	-16.37	46.1	-6.37
0.924	50.92	PK	0	0	50.92	56	-5.08		
0.924	37.42	Av	0	0	37.42	56	-18.58	46	-8.58
2.1705	49.5	PK	0	0	49.5	56	-6.5		
2.1705	36.03	Av	0	0	36.03	56	-19.97	46	-9.97
Line-L2 .15 - 30MHz									
Test Freq. (MHz)	Meter Reading	Detector	LISN [dB]	Conducted Emission Cable [dB]	Correct Reading (dBuVolts)	Class B Quasi-peak Limit	Quasi-Peak Margin	Class B Average	Average Margin
0.5055	47.52	PK	0	0	47.52	56	-8.48		
0.5055	31.83	Av	0	0	31.83	56	-24.17	46	-14.17
0.9735	48.6	PK	0	0	48.6	56	-7.4		
0.9735	32.08	Av	0	0	32.08	56	-23.92	46	-13.92
1.203	47.92	PK	0	0	47.92	56	-8.08		
1.203	30.29	Av	0	0	30.29	56	-25.71	46	-15.71

LINE 1 RESULTS

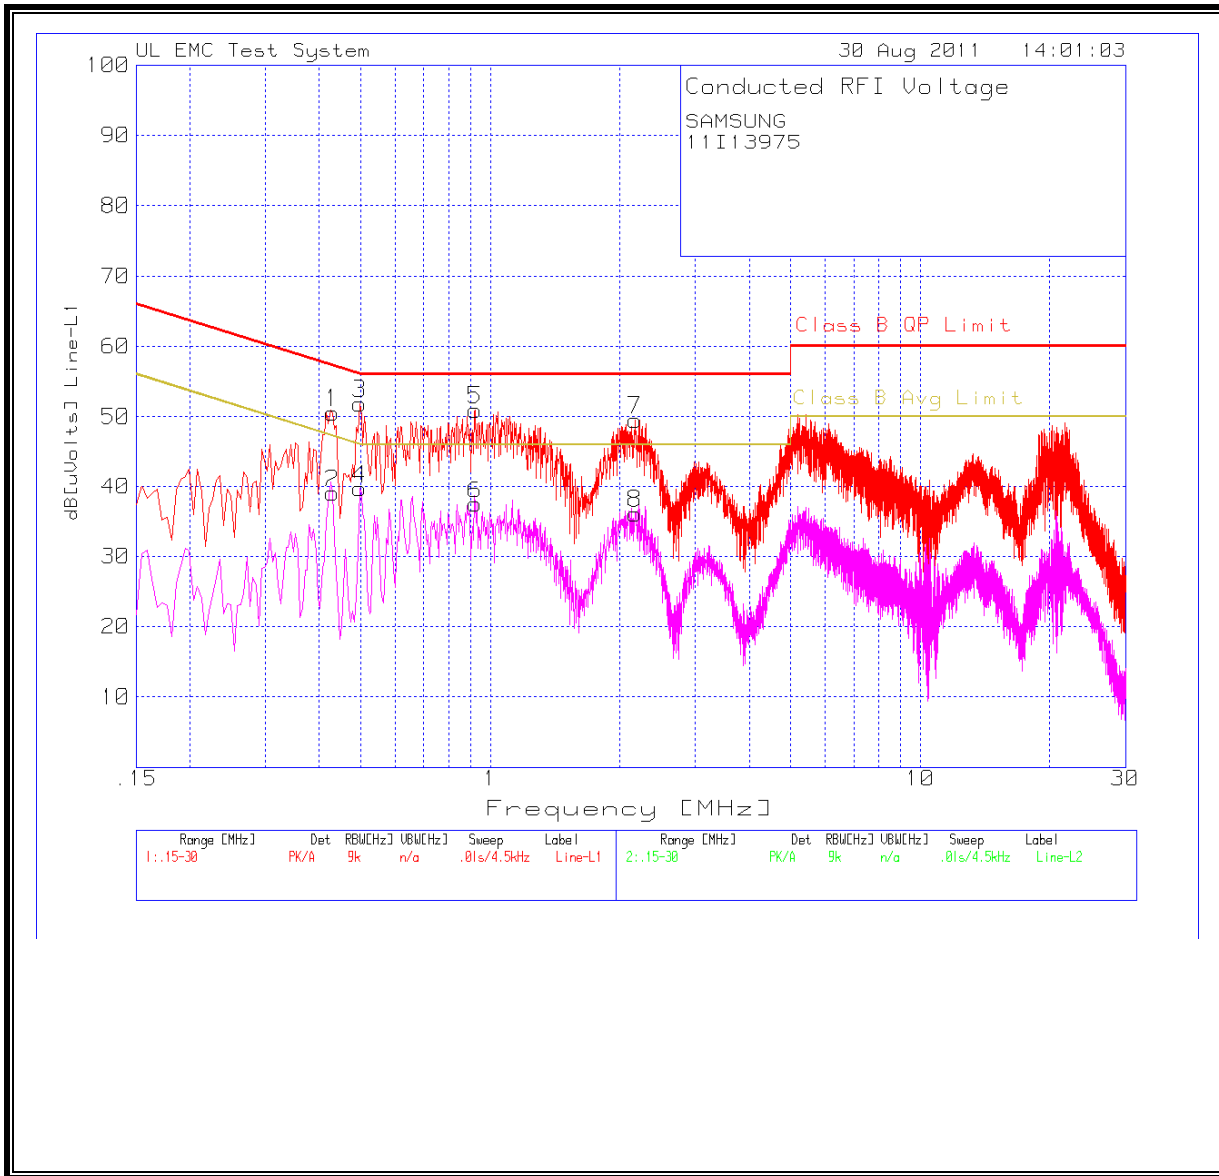

LINE 2 RESULTS

