



	1. Use 'AI / PDF' provided by 'SAMSUNG' for letter and contents
	2. Background color is 'WHITE', letter color is 'BLACK' (reverse for SAMSUNG LOGO)
H	3. Back side should be attached to release paper once adhesive is applied.
	4. No letter should be blur/smeared
	5. The production must be proceed after the approval of R&D Group
	6. The product must be within approved sample's specification tolerance.
I	7. The product must be finished in a ROLL
	8. Release paper must be unifiedn for material and color(blue)
	9. Do not contain any substances which are specified in (OQA-2049).



MAT. 		FIN. Semi transparency OPP laminating + UVP Coating			
GT-S5660B (승인용)					
LABEL-MAIN					
UNIT	mm	DESIGNED	CHECKED	APPROVED	PROJECTION
TOLERANCE	+0.0 -0.1	Tae Hun Kim	Kyeong Hwan JO	June Sop Kim	
SCALE	N/S				SHEET NO
Vendor	HSINS	110119	110119	110119	
SAMSUNG ELECTRONICS		Doc. CODE	GH68-00000A		

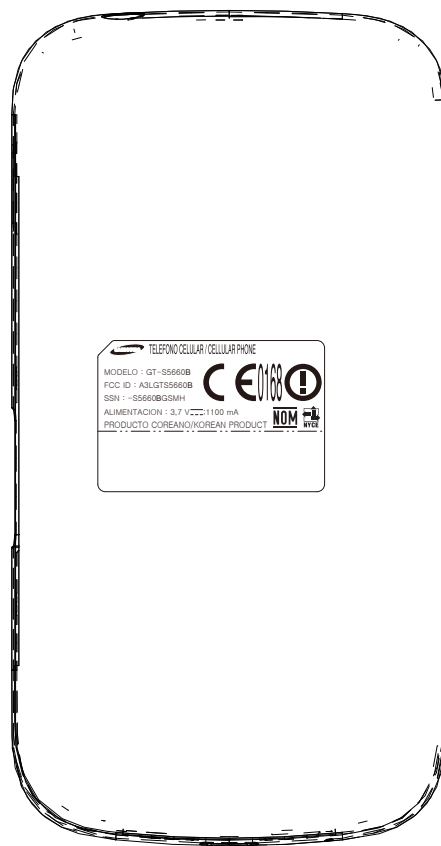

The label is placed inside the battery compartment