



HCT CO., LTD.

CERTIFICATION DIVISION
74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, KOREA
TEL: +82 31 645 6300 FAX: +82 31 645 6401

EMI CERTIFICATION REPORT

Applicant:

SAMSUNG ELECTRONICS CO., LTD
416. Maetan-3dong, Yeongtong-gu, Suwon-si,
Gyeonggi-do, 442-742, Korea

Date of Issue: August 23, 2013

Test Report No.: HCTE1308FE29

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

FCC ID:

A3LGTS7262

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B Class B
Equipment Type : 850/1900 GSM/GPRS Phone with BT v4.0(LE) , 802.11b/g/n and EDGE
Rx only, Hotspot
Model Name : GT-S7262
Port / Connector(s) : USB / Ear-phone Port
Date of Test : August 21, 2013 - August 22, 2013

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862


Report prepared by
: Gu-Cheol Yoon
Test Engineer of EMC Team


Approved by
: Sang-Jun Lee
Manager of EMC Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

DOCUMENT HISTORY

The revision history for this document is shown in table.

Version	Date	Description
HCTE1308FE29	August 23, 2013	Initial Release

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	4
1.1 Product Description.....	4
1.2 Related Submittal(s) / Grant(s).....	4
1.3 Tested System Details.....	5
1.4 Cable Description	6
1.5 Noise Suppression Parts on Cable. (I/O cable)	6
1.6 Test Methodology	7
1.7 Test Facility	7
1.8 Frequency Range of Radiated Measurements	7
2. SYSTEM TEST CONFIGURATION.....	8
2.1 Configuration of Test System	8
3. PRELIMINARY TEST	9
3.1 Conducted Emission Test	9
3. 2 Radiated Emission Test	9
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY	10
4.1 Conducted Emission Test	10
4.2 Radiated Emission Test	11
5. FIELD STRENGTH CALCULATION	17
6. TEST EQUIPMENT	18
7. CONCLUSION	19

ATTACHMENT: TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

Equipment Under Test is **EUT type: 850/1900 GSM/GPRS Phone with BT v4.0(LE) , 802.11b/g/n and EDGE Rx only, Hotspot, Model: GT-S7262** manufactured by **SAMSUNG ELECTRONICS CO., LTD.** Its basic purpose is used for communications.

Model	GT-S7262
FCC ID	A3LGTS7262
EUT Type	850/1900 GSM/GPRS Phone with BT v4.0(LE) , 802.11b/g/n and EDGE Rx only, Hotspot
TX Frequency	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900)
RX Frequency	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Name	FCC ID / DoC	Connected To
EUT	SAMSUNG	GT-S7262	A3LGTS7262	Notebook PC Ear-phone
USB cable	SAMSUNG	ECB-DU28BE	-	E.U.T Notebook PC
Ear-phone	SAMSUNG	EHS61ASFWE	-	E.U.T
Notebook PC	H.P	ProBook6560b	DoC	EUT Notebook PC adaptor
Notebook PC adaptor	DELT Electronics (JIANGSU) LTD.	PPP012D-S	-	Notebook PC
Mouse	Radio shack	Serial mouse	FSUGMZE3	Notebook PC
Gateway adaptor	Yang Ming Industrial	DA-60M12	-	Gateway
Gateway	Axesstel	MV440	PH7MV440	Notebook PC, Adaptor
RJ45 cable	-	-	-	Notebook PC, Gateway
Micro SD card	SanDisk	8 GB	-	E.U.T

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	Micro USB	Y	Y	(P,D)0.6
	Ear-phone	N/A	Y	(D)1.5
Notebook PC	RJ 45	N/A	N	(D)1.5
	Serial (Mouse)	N/A	Y	(D)1.8
	DC in	N	N/A	(P)1.8
Gateway	DC in	N	N/A	(P)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Micro USB	N	N/A	Y	Both End
	Ear-phone	N	N/A	Y	EUT End
Notebook PC	RJ 45	N	N/A	N	N/A
	Serial (Mouse)	N	N/A	Y	Notebook PC End

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to EUT distance of 3 m

1.7 Test Facility

Chamber used to collect the test data is located at the 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, KOREA. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4.

Measurement Facilities	Reg. No.
Radiated Field strength measurement facility (3m)	90661(Mar. 02, 2011)
Radiated Field strength measurement facility (10m)	90661 (Sep. 03, 2010)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System


2.1.1 Conducted Emission Test

EUT was connected to LISN via Notebook PC adaptor and Base Station. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

2.1.2 Radiated Emission Test

Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m semi-anechoic chamber.

[Configuration of Tested System]

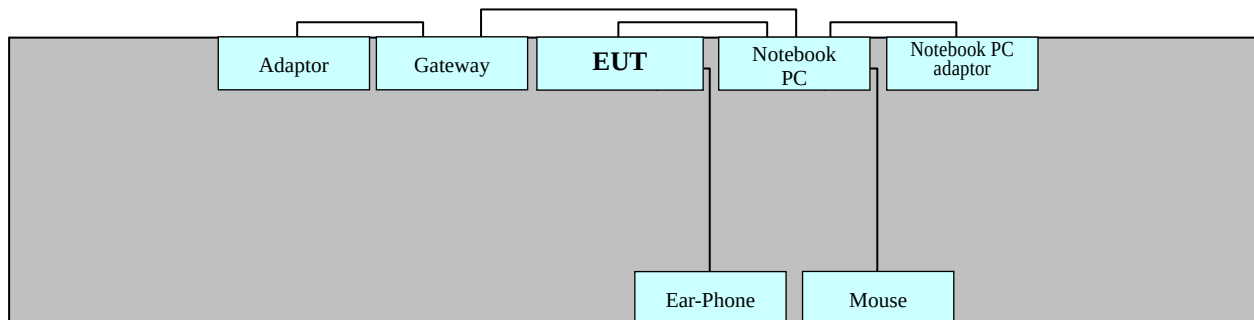

Non-Conductive Table
Power Line: 120 VAC

3. PRELIMINARY TEST

3.1 Conducted Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: ☒ Data Communication mode

3. 2 Radiated Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: ☒ Data Communication mode

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit Apply to	: FCC PART 15 Subpart B Class B
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Operation Mode	: Data Communication mode
Temperature	: 25.6 °C
Humidity Level	: 52.7 %
Test Date	: August 22, 2013

Frequency (MHz)	Transd (dB)	Conductor	Quasi-Peak			Average		
			Limit (dBuV)	Measurement Level (dBuV)	Result Level (dBuV)	Limit (dBuV)	Measurement Level (dBuV)	Result Level (dBuV)
0.150	9.8	H	66	41.9	51.7	56	-	-
0.194	10.0	N	64	45.8	55.8	54	-	-
0.198	10.0	N	64	-	-	54	27.9	37.9
0.198	9.8	H	64	46.7	56.5	54	-	-
0.262	9.8	H	61	38.6	48.4	51	-	-
0.262	10.0	N	61	37.5	47.5	51	19.1	29.1

※ **NOTE:** Refer to page 11 to page 14 for details.

1. Line H = Hot, Line N = Neutral
2. Transd = LISN factor + Cable Loss factor


HCT

EMC

EUT: GT-S7262
Manufacturer: SAMSUNG
Operating Condition: DATA MODE
Test Site: SHIELD ROOM
Operator: GC YOON
Test Specification: FCC PART15 B
Comment: H

SCAN TABLE: "FCC CLASS B(H)"

Short Description:			KN22 CLASS B			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

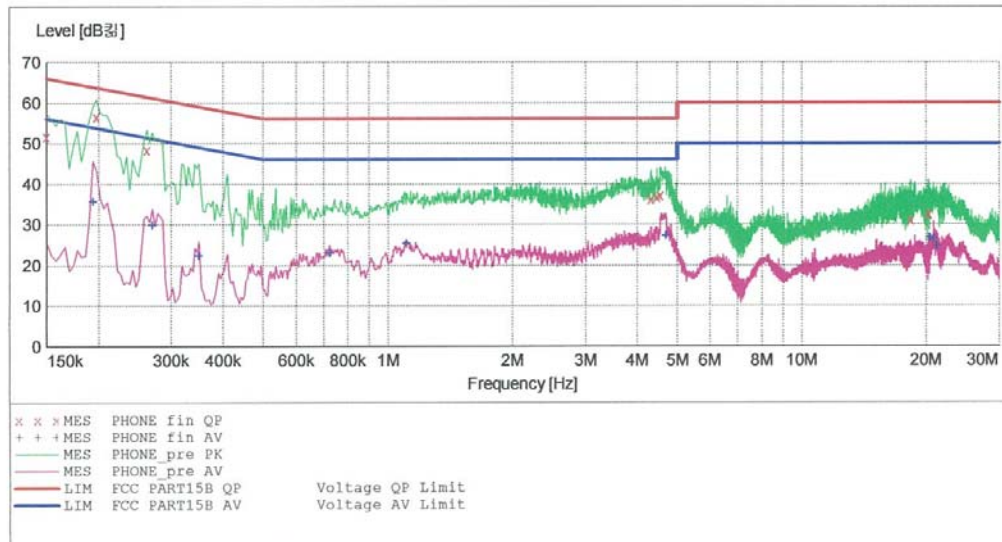

MEASUREMENT RESULT: "PHONE_fin QP"

2013-08-22 9:30 오후

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.150001	51.70	9.8	66	14.3	---	---
0.198001	56.50	9.8	64	7.2	---	---
0.262001	48.40	9.8	61	13.0	---	---
4.332000	36.20	10.1	56	19.8	---	---
4.472000	36.80	10.2	56	19.2	---	---
4.544000	37.20	10.2	56	18.8	---	---
18.372000	31.10	10.9	60	28.9	---	---
20.200000	32.50	10.9	60	27.5	---	---
20.268000	32.60	10.9	60	27.4	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

2013-08-22 9:30 오후

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.194001	35.70	9.8	54	18.2	---	---
0.270001	29.80	9.8	51	21.3	---	---
0.350001	22.30	9.8	49	26.6	---	---
0.724000	22.90	9.8	46	23.1	---	---
1.112000	25.30	9.9	46	20.7	---	---
4.692000	27.30	10.2	46	18.7	---	---
20.448000	26.70	10.9	50	23.3	---	---
20.844000	26.50	11.0	50	23.5	---	---
21.156000	24.70	11.0	50	25.3	---	---


HCT

EMC

EUT: GT-S7262
Manufacturer: SAMSUNG
Operating Condition: DATA MODE
Test Site: SHIELD ROOM
Operator: GC YOON
Test Specification: FCC PART15 B
Comment: N

SCAN TABLE: "FCC CLASS B(N)"

Short Description:			KN22 CLASS B			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

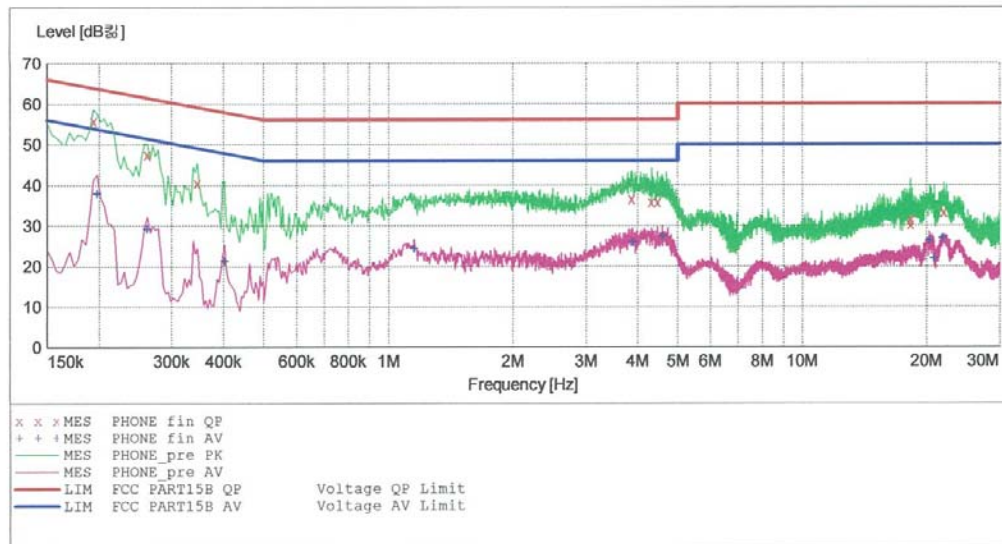

MEASUREMENT RESULT: "PHONE_fin QP"

2013-08-22 9:33오후

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.194001	55.80	10.0	64	8.0	---	---
0.262001	47.50	10.0	61	13.9	---	---
0.346001	40.40	10.0	59	18.7	---	---
3.872000	36.50	10.3	56	19.5	---	---
4.332000	35.80	10.3	56	20.2	---	---
4.472000	35.80	10.3	56	20.2	---	---
18.292000	31.50	11.2	60	28.5	---	---
18.308000	30.30	11.2	60	29.7	---	---
22.012000	33.20	11.4	60	26.8	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

2013-08-22 9:33 오후

Frequency MHz	Level dB _{μV}	Transd dB	Limit dB _{μV}	Margin dB	Line	PE
0.198001	37.90	10.0	54	15.8	---	---
0.262001	29.10	10.0	51	22.3	---	---
0.402001	21.10	10.0	48	26.7	---	---
1.156000	24.40	10.1	46	21.6	---	---
3.896000	25.80	10.3	46	20.2	---	---
4.592000	27.40	10.4	46	18.6	---	---
20.256000	26.30	11.3	50	23.7	---	---
20.848000	21.70	11.3	50	28.3	---	---
21.880000	26.80	11.4	50	23.2	---	---

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

-For measurement below 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operation Mode : Data Communication mode

Temperature : 24.0 °C

Humidity Level : 66.1 %

Test Date : August 21, 2013

Frequency (MHz)	Reading (dBuV)	Polarity (H/V)	Antenna Height (m)	Correction Factor		Limit (dBuV/m)	Level (dBuV/m)	Margin (dB)
				Antenna (dB/m)	Cable (dB)			
32.8	15.35	V	1.0	11.42	3.34	40.0	30.11	9.89
54.9	14.79	V	1.0	12.11	3.51	40.0	30.41	9.59
104.8	17.65	V	1.0	9.83	3.79	43.5	31.27	12.23
180.1	16.46	H	1.0	11.56	4.12	43.5	32.14	11.36
266.0	12.47	H	1.0	12.29	4.41	46.0	29.17	16.83
400.0	10.42	H	1.0	15.63	4.87	46.0	30.92	15.08

-For measurement above 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Peak mode: Peak (RBW: 1 MHz, VBW: 1 MHz)
: Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)

Operation Mode : Data Communication mode

Temperature : 24.0 °C

Humidity Level : 65.0 %

Test Date : August 22, 2013

Frequency (GHz)	Peak			POL	Average		
	Total (dBμV/m)	Limit (dBμV/m)	Margin (dB)		Total (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1.3308	50.60	74	23.4	V	27.50	54	26.5

※ NOTE:

1. Measurement above 1 GHz was performed from 1 GHz to the 5th harmonic of highest fundamental frequency. Test was measured by 12 GHz.

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>Next CAL Date</u>
<u>Conducted Emission</u>					
☐ EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	2014.04.25
☒ EMI Test Receiver	Rohde & Schwarz	ESCI	100033	1 year	2014.06.23
☐ LISN	Rohde & Schwarz	ESH3-Z5	100282	1 year	2014.07.03
☒ LISN	Rohde & Schwarz	ENV216	100073	1 year	2014.02.06
☒ LISN	EMCO	3816/2SH	9706-1070	1 year	2014.04.26
☐ Attenuator	Rohde & Schwarz	ESH3-Z2	357.8810.352	1 year	2014.07.03
<u>Radiated Emission</u>					
-For measurement below 1 GHz					
☒ EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	2014.04.16
☒ Trilog Antenna	Schwarzbeck	VULB9160	3301	2 year	2014.12.17
☒ Antenna master	HD GmbH	MA240	240/520	N/A	-
☒ Turn Table	HD GmbH	2090	9702/1224	N/A	-
☐ EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	2014.07.01
☐ Trilog Antenna	Schwarzbeck	VULB9168	185	2 year	2015.04.16
☐ Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
☐ Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
-For measurement above 1 GHz					
☒ EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	2014.04.16
☒ Antenna master	HD GmbH	MA240	240/520	N/A	-
☒ Turn Table	HD GmbH	2090	9702/1224	N/A	-
☐ EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	2014.07.01
☐ Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
☐ Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
☒ Power Amplifier	CERNEX	CBLU1183540	21690	1 year	2014.07.12
☒ Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	2014.12.13

7. CONCLUSION

The data collected shows that the **EUT type: 850/1900 GSM/GPRS Phone with BT v4.0(LE) , 802.11b/g/n and EDGE Rx only, Hotspot, FCC ID: A3LGTS7262, Model: GT-S7262** complies with §15.107 and §15.109 of the FCC rules.