



**FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
CERTIFICATION TEST REPORT**

FOR

**GT-S7275~802.11 B/G/N 1X1 HT20, + BT4.0 (LE) + GSM850/1900 AND
WCDMA850MHz BAR PHONE**

MODEL NUMBER: GT-S7275

FCC ID: A3LGTS7275

REPORT NUMBER: 13I15226-3

ISSUE DATE: June 24, 2013

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

Prepared by

**UL CCS
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Issue			
Rev.	Date	Revisions	Revised By
---	6/24/13	Initial Issue	P. Kim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. SOFTWARE AND FIRMWARE.....	7
5.4. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.5. WORST-CASE CONFIGURATION AND MODE	8
5.6. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. RF POWER OUTPUT VERIFICATION	11
7.1. GPRS MODE.....	11
7.2. UMTS REL 99 MODE	14
7.3. HSDPA REL 5	16
7.4. HSPA REL 6 (HSDPA & HSUPA).....	18
8. CONDUCTED TEST RESULTS	20
8.1. OCCUPIED BANDWIDTH	20
8.1.1. GPRS MODE.....	22
8.1.1. EGPRS MODE	26
8.1.2. UMTS REL 99 MODE	30
8.1.3. HSDPA MODE.....	33
8.2. BAND EDGE.....	36
8.2.1. GPRS MODE.....	37
8.2.1. EGPRS MODE	39
8.2.2. UMTS REL 99 MODE	41
8.2.3. UMTS HSDPA MODE.....	42

8.3.	OUT OF BAND EMISSIONS.....	43
8.3.1.	GPRS MODE.....	44
8.3.1.	EGPRS MODE	50
8.3.2.	UMTS REL 99 MODE	56
8.4.	UMTS HSDPA MODE.....	59
9.	FREQUENCY STABILITY	62
10.	RADIATED TEST RESULTS	66
10.1.	RADIATED POWER (ERP & EIRP).....	66
10.1.1.	GPRS 850 (Cellular Band)	68
10.1.2.	GPRS 1900 (PCS Band)	69
10.1.3.	EGPRS 850 (Cellular Band)	70
10.1.4.	EGPRS 1900 (PCS Band).....	71
10.1.5.	UMTS 850 REL 99 (Cellular Band).....	72
10.1.6.	UMTS 850 HSDPA (Cellular Band)	73
10.2.	FIELD STRENGTH OF SPURIOUS RADIATION	74
10.2.1.	GPRS (Cellular Band)	75
10.2.2.	GPRS (PCS Band)	76
10.2.3.	EGPRS (Cellular Band)	77
10.2.4.	EGPRS (PCS Band).....	78
10.2.5.	WCDMA REL 99 (Cellular Band).....	79
10.2.6.	WCDMA HSUPA (Cellular Band)	80
11.	SETUP PHOTOS	81

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

EUT DESCRIPTION: 802.11 B/G/N 1X1 HT20, + BT4.0 (LE) +
GSM850/1900 AND WCDMA850MHz BAR PHONE

MODEL: GT-S7275

SERIAL NUMBER: 47901EAF5D9C3077 (RADIATED)
47901EB9147C30DD (CONDUCTED)

DATE TESTED: June 12-18, 2013

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H AND 24E	PASS

UL CCS tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:

Tested By:



PHILIP KIM
WISE OPERATIONS MANAGER
UL CCS

STEVEN TRAN
WISE LAB TECHNICIAN
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 2, FCC CFR 47 Part 22, and FCC CFR Part 24.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a bar-style cell phone featuring 802.11 B/G/N 1X1 HT20, + BT4.0 (LE) + GSM850/1900 AND WCDMA850MHz SMART PHONE

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak of both conducted and ERP / EIRP output powers as follows:

Frequency range (MHz)	Modulation	Conducted		ERP	
		dBm	mW	dBm	mW
824.2 - 848.8	GPRS	32.50	1778.3	24.94	311.9
1850.2-1909.8	GPRS	29.50	891.3	29.27	845.3

826.4 - 846	REL 99	23.00	199.5	18.21	66.2
826.4 - 846	HSUPA	22.00	158.5	18.46	70.1
826.4 – 846.6	HSDPA, Rel 6	21.50	141.3	18.46	70.1

5.3. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was REV0.1 and the software version was S7275.001.

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an integral antenna with a maximum peak gain as follow:

Frequency (MHz)	Gain (dBi)
850MHz	-6.36
1900MHz	0.641

5.5. WORST-CASE CONFIGURATION AND MODE

Based on the investigation results, the highest peak power and enhanced data rate is the worst-case scenario for all measurements.

Worst-case modes: GPRS, UMTS WCDMA and UMTS HSDPA Sub-test 1.

Since the EUT is a portable device, to determine the worst/highest emissions, the X, Y, and Z orientations of the EUT with respect to the turntable and the worst among them with headset and an AC adapter were investigated. After the investigations, Y-Orientation without AC adapter and headset was the worst case for CELL bands, and X-Orientation for PCS bands.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung Electronics	ETA0U80EBE	DK1C220TS/A-E	DoC
Headset	Samsung Electronics	N/A	N/A	DoC

I/O CABLES (CONDUCTED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	RF	1	Antenna Port	Un-Shielded	0.2m	NA
2	RF In/Out	1	Call Box	Un-Shielded	0.5m	NA
3	RF Out	1	Spectrum Analyzer	None	None	NA


I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC	1	DC	Un-shielded	1m	NA
2	Jack	1	Earphone	Un-shielded	1.2m	NA


TEST SETUP

The EUT is a stand-alone device. A link is established between the EUT and the communications test set.

SETUP DIAGRAM FOR RF CONDUCTED TESTS

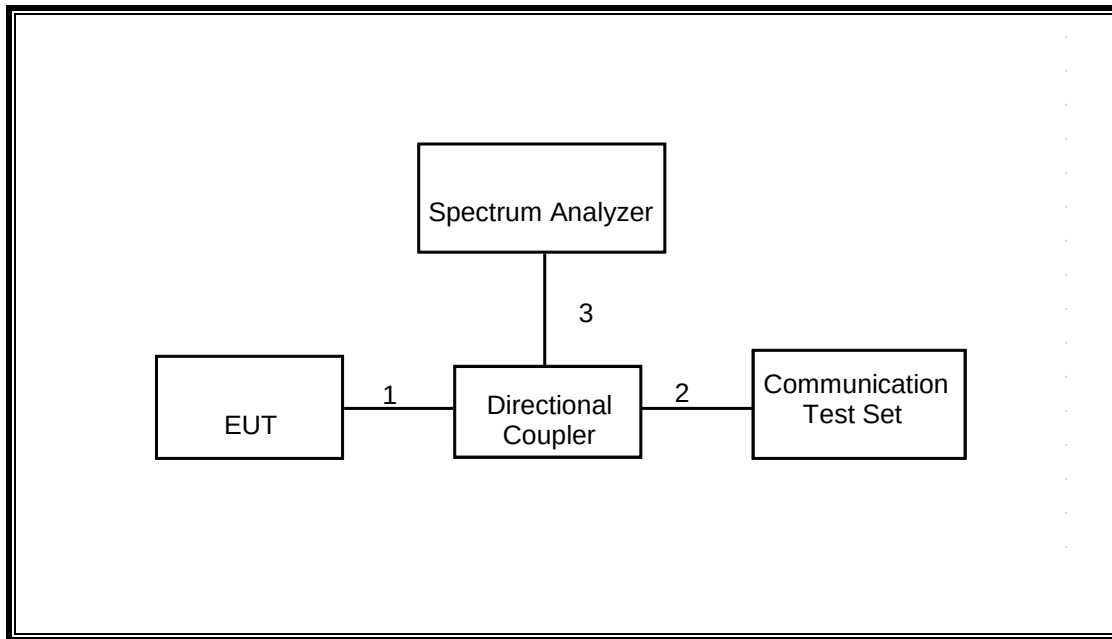

SETUP DIAGRAM FOR RF RADIATED TESTS

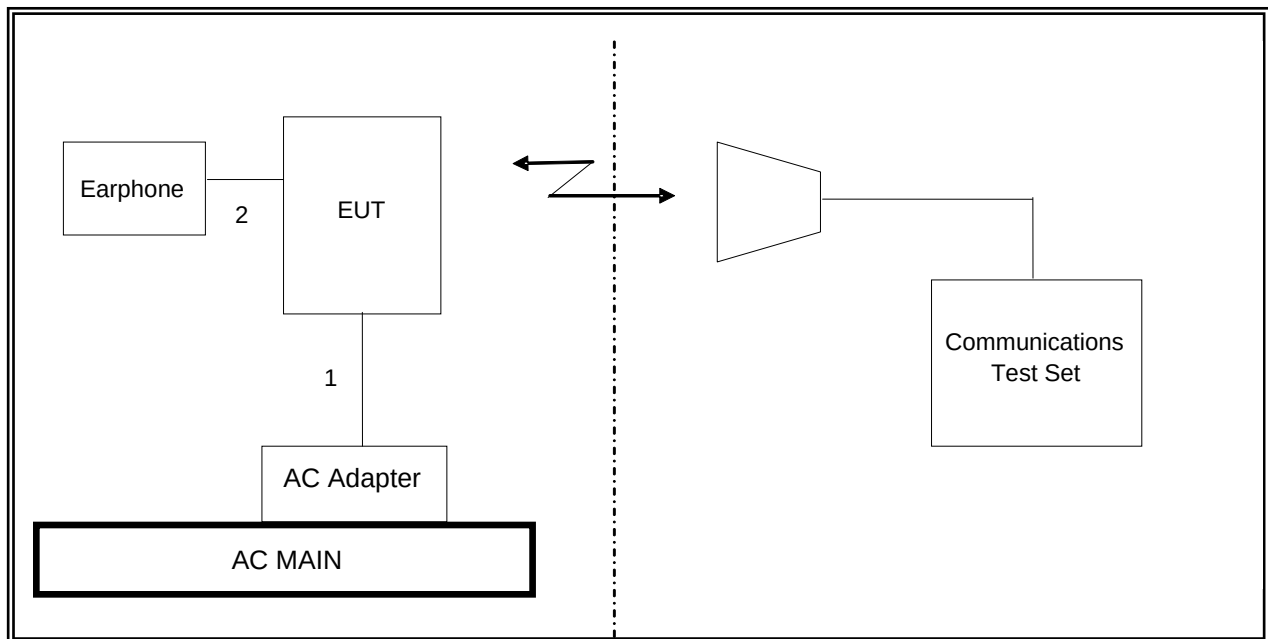

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn, 18 GHz	EMCO	3115	C00872	10/25/13
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00885	12/11/13
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/14
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	10/22/13
Communication Test Set	Agilent / HP	E5515C	C01086	06/20/13
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/14
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02689	CNR
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01016	08/14/13
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/13
Antenna, Tuned Dipole 400~1000 MHz	ETS	3121C DB4	C00993	02/14/14

7. RF POWER OUTPUT VERIFICATION

7.1. GPRS MODE

TEST PROCEDURE

The transmitter output was connected to the input terminal of Directional Coupler via calibrated coaxial cable. The output coupling terminal of the Directional Coupler was directly connected to a spectrum analyzer while the output through terminal connected to the communication test set via calibrated coaxial cable.

The output power was measured with the spectrum analyzer at the low, middle and high channel in each band.

- Set the spectrum analyzer span wide enough or greater than the modulated signal BW.
- Set a spectrum analyzer at peak detection mode with VBW $\geq$ RBW $\geq$ 26dB BW, typically 3MHz.
- Set a marker to point the corresponding peak value.

GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press Connection control to choose the different menus

Press RESET > choose all to reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM+GPRS or GSM+EGPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850/900

> 27 dBm for EGPRS 850/900

> 30 dBm for GPRS1800/1900

> 26 dBm for EGPRS1800/1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0> 4 dB

Slot Config > Unchanged (if already set under MS Signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3 (Default)

Network Coding Scheme > CS1 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1PSR Bit Pattern

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal On to turn on the signal and change settings

RESULTS

GSM

CELL

GSM (GMSK) - Voice Mode

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)
850	128	824.2	31.8
	190	836.6	31.9
	251	848.8	31.9

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)
1900	512	1850.2	29.2
	661	1880.0	29.3
	810	1909.8	29.4

GPRS

CELL

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)							
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
850	128	824.2	31.8	22.8	30.3	24.3	27.5	23.2	26.5	23.5
	190	836.6	31.9	22.9	30.4	24.4	27.6	23.3	26.5	23.5
	251	848.8	31.9	22.9	30.4	24.4	27.6	23.3	26.5	23.5

PCS

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)							
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
1900	512	1850.2	29.2	20.2	28.0	22.0	24.7	20.4	23.4	20.4
	661	1880.0	29.3	20.3	27.8	21.8	24.5	20.2	23.3	20.3
	810	1909.8	29.5	20.5	27.4	21.4	24.3	20.0	23.1	20.1

EGPRS

CELL

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)							
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
850	128	824.2	25.8	16.8	24.4	18.4	21.4	17.1	20.1	17.1
	190	836.6	25.8	16.8	24.4	18.4	21.5	17.2	20.2	17.2
	251	848.8	25.8	16.8	24.4	18.4	21.5	17.2	20.2	17.2

PCS

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)							
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
1900	512	1850.2	25.0	16.0	23.5	17.5	20.6	16.3	19.4	16.4
	661	1880.0	25.1	16.1	23.5	17.5	20.7	16.4	19.6	16.6
	810	1909.8	25.0	16.0	23.4	17.4	20.6	16.3	19.4	16.4

7.2. UMTS REL 99 MODE

TEST PROCEDURE

The transmitter output was connected to the input terminal of Directional Coupler via calibrated coaxial cable. The output coupling terminal of the Directional Coupler was directly connected to a spectrum analyzer while the output through terminal connected to the communication test set via calibrated coaxial cable.

The output power was measured with the spectrum analyzer at the low, middle and high channel in each band.

- Set the spectrum analyzer span wide enough or greater than the modulated signal BW.
- Set a spectrum analyzer at peak detection mode with VBW $\geq$ RBW $\geq$ 26dB BW, typically 5MHz.
- Set a marker to point the corresponding peak value.

TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel99
	Subtest	-
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	β_c	Not Applicable
	β_d	Not Applicable
	β_{ec}	Not Applicable
	β_c/β_d	8/15
	β_{hs}	Not Applicable
	β_{ed}	Not Applicable

RESULTS

UMTS REL99

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	21.7
		4183	836.6	21.6
		4233	846.6	21.8

7.3. HSDPA REL 5

The following 4 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121.

Summary of settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	Ahs = β_{hs}/β_c	30/15			

RESULTS

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	21.6
		4183	836.6	0	21.6
		4233	846.6	0	21.5
	Subtest 2	4132	826.4	0	20.5
		4183	836.6	0	20.4
		4233	846.6	0	20.3
	Subtest 3	4132	826.4	0.5	21.2
		4183	836.6	0.5	21.0
		4233	846.6	0.5	21.1
	Subtest 4	4132	826.4	0.5	20.5
		4183	836.6	0.5	20.5
		4233	846.6	0.5	20.5

7.4. HSPA REL 6 (HSDPA & HSUPA)

TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15 47/15	56/75	47/15
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	A _{hs} = β_{hs}/β_c	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27	

RESULTS

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
WCDMA Band V	Subtest 1	4132	826.4	0	21.0
		4183	836.6	0	21.0
		4233	846.6	0	21.0
	Subtest 2	4132	826.4	2	18.9
		4183	836.6	2	19.1
		4233	846.6	2	19.2
	Subtest 3	4132	826.4	1	20.0
		4183	836.6	1	20.6
		4233	846.6	1	20.7
	Subtest 4	4132	826.4	2	19.4
		4183	836.6	2	19.3
		4233	846.6	2	19.4
	Subtest 5	4132	826.4	0	21.0
		4183	836.6	0	21.0
		4233	846.6	0	21.1

8. CONDUCTED TEST RESULTS

8.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

- GPRS
- UMTS REL 99, and HSUPA

RESULTS

Band	Mode	Channel	f (MHz)	99% BW (kHz)	-26dB BW (kHz)
Cellular	GPRS	128	824.20	241.5433	451.901
		190	836.60	247.6849	317.429
		251	848.80	253.0319	323.935
PCS		512	1850.2	251.6059	313.372
		661	1880.0	245.5177	304.546
		810	1909.8	244.5701	317.012



Band	Mode	Channel	f (MHz)	99% BW (kHz)	-26dB BW (kHz)
Cellular	EGPRS	128	824.20	251.1153	304.386
		190	836.60	249.2485	304.021
		251	848.80	244.9439	306.229
PCS		512	1850.2	245.2695	305.893
		661	1880.0	247.9315	297.388
		810	1909.8	240.1846	323.373


Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
REL 99	Cell	4357	826.4	4.0842	4.678
		4408	836.6	4.1769	4.693
		4458	846.6	4.1106	4.650

Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
HSUPA	Cell	4357	826.4	4.1269	4.544
		4408	836.6	4.2250	4.637
		4458	846.6	4.1324	4.643



8.1.1. GPRS MODE


CELL BAND

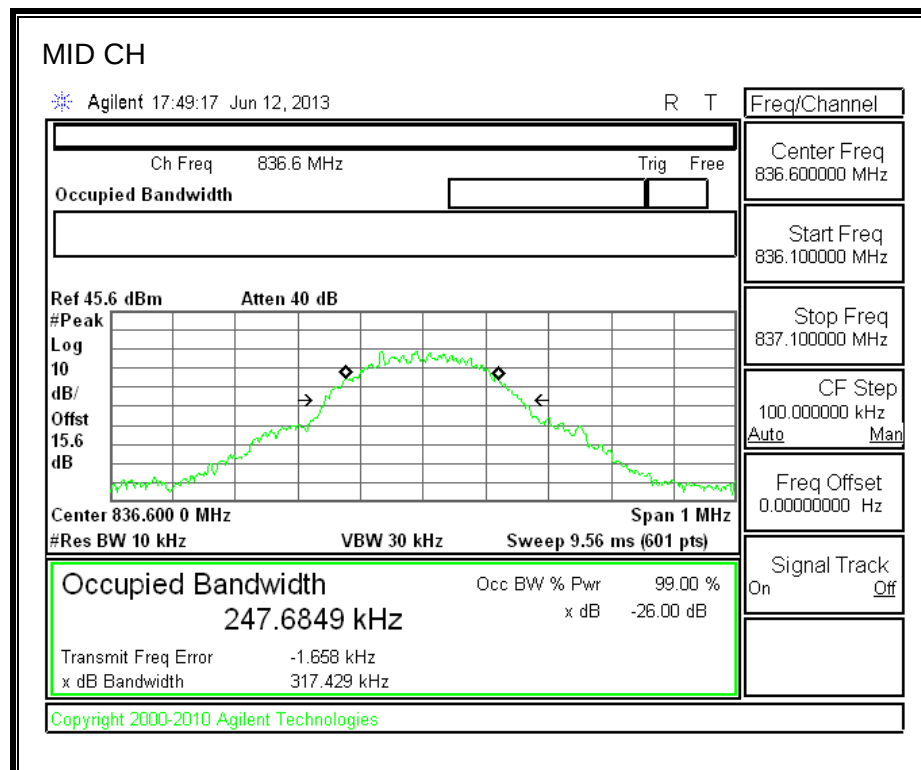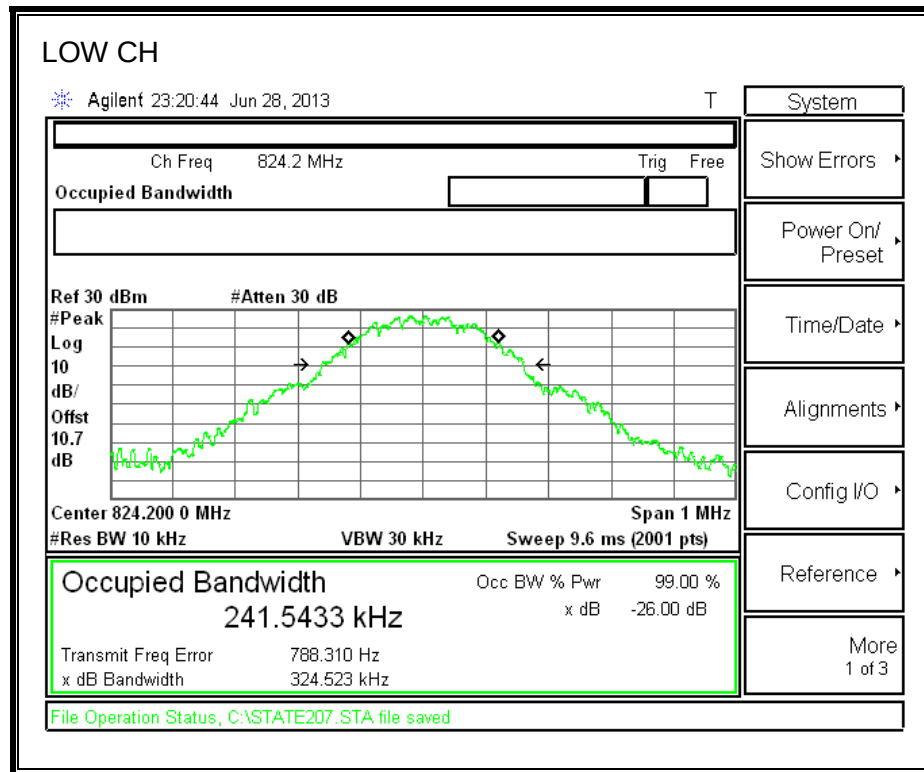

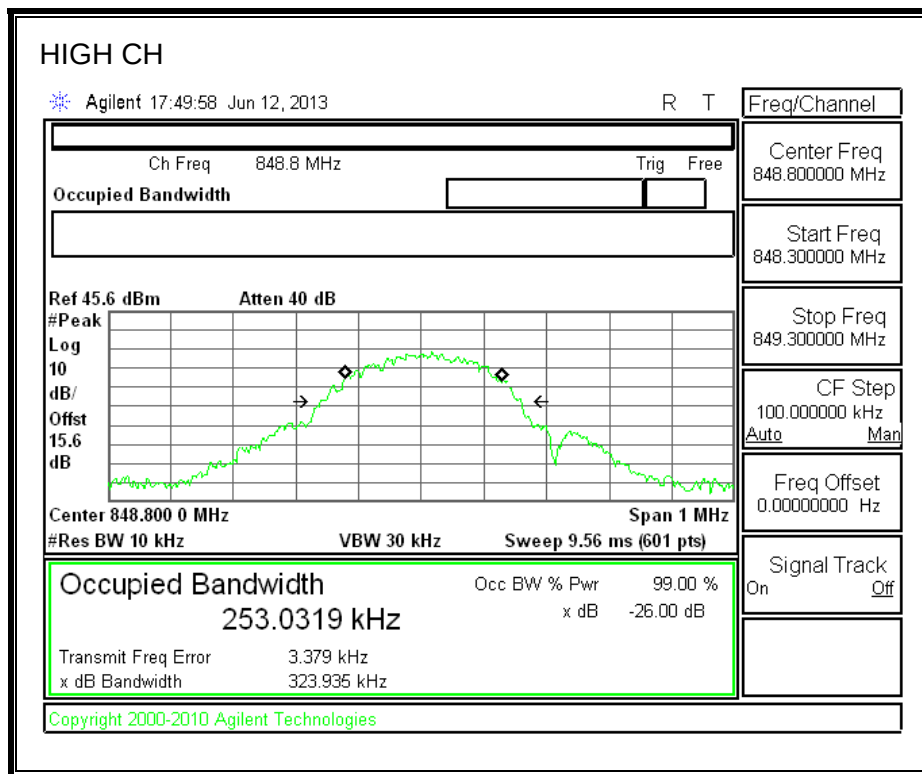



PCS Band

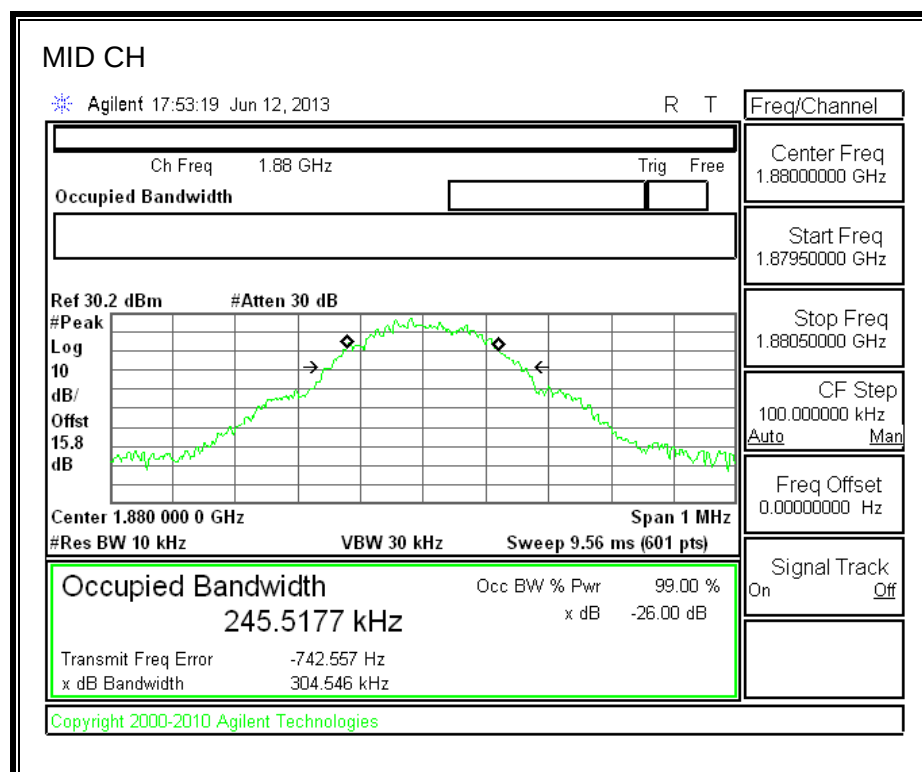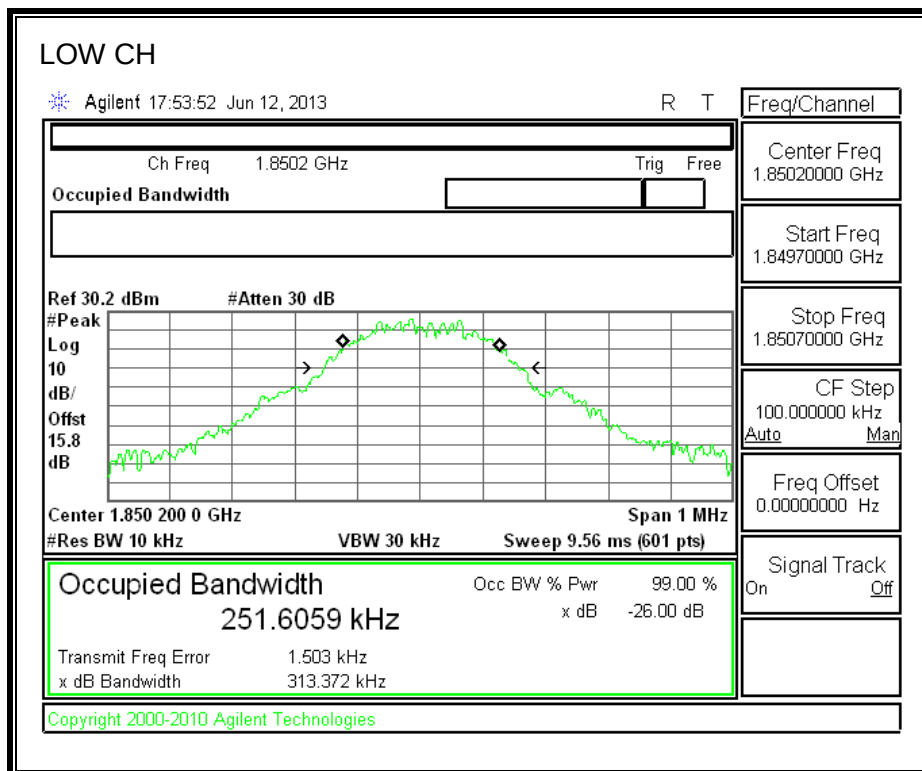


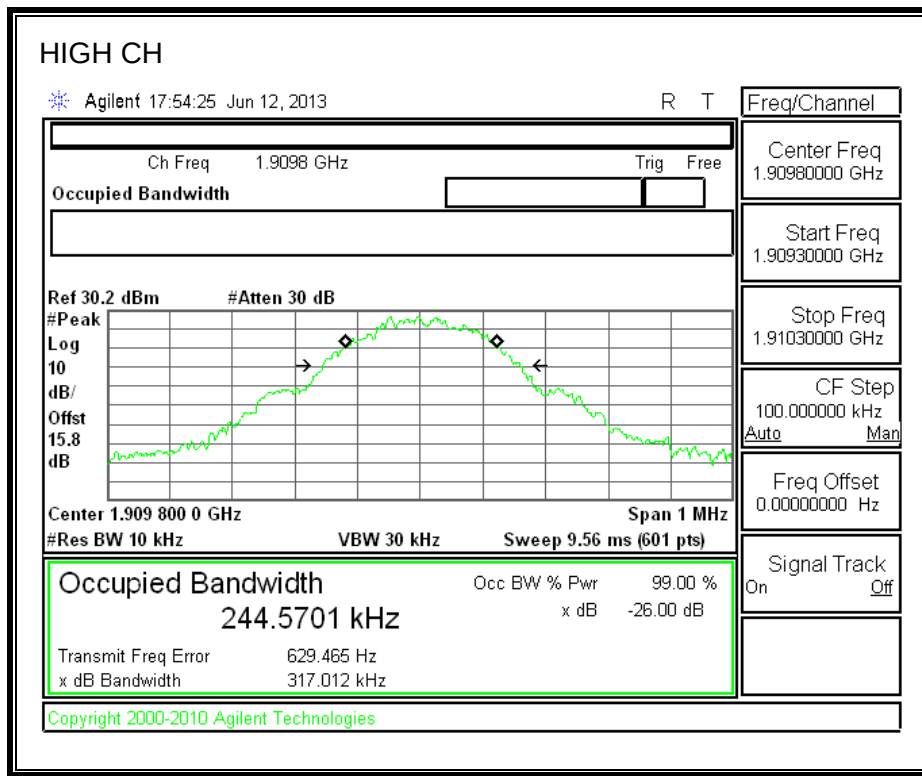



8.1.1. EGPRS MODE


CELL BAND

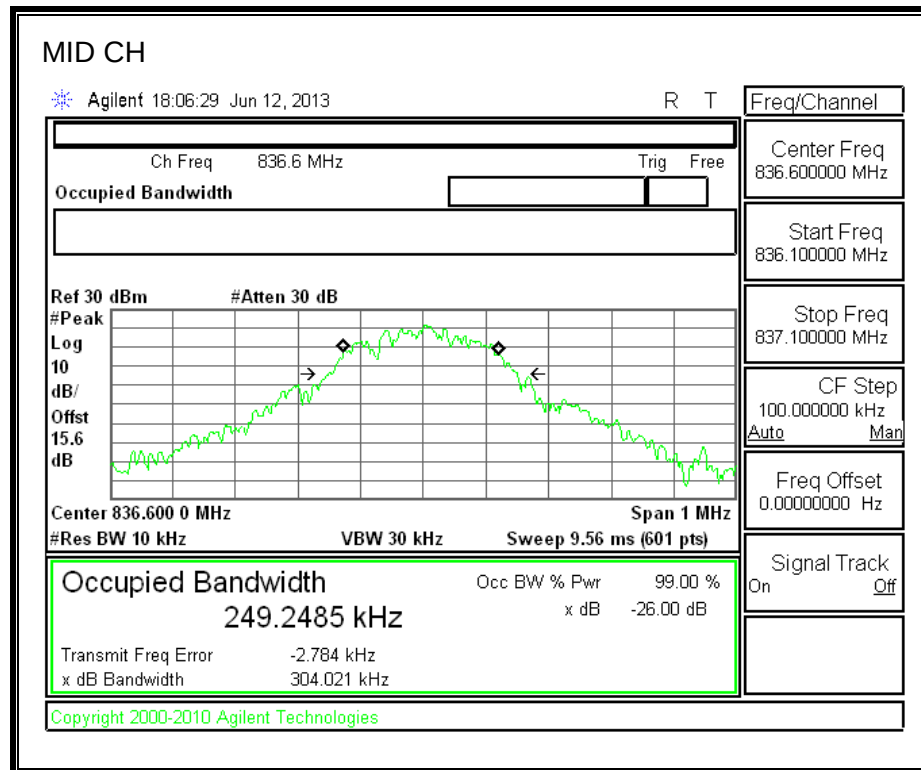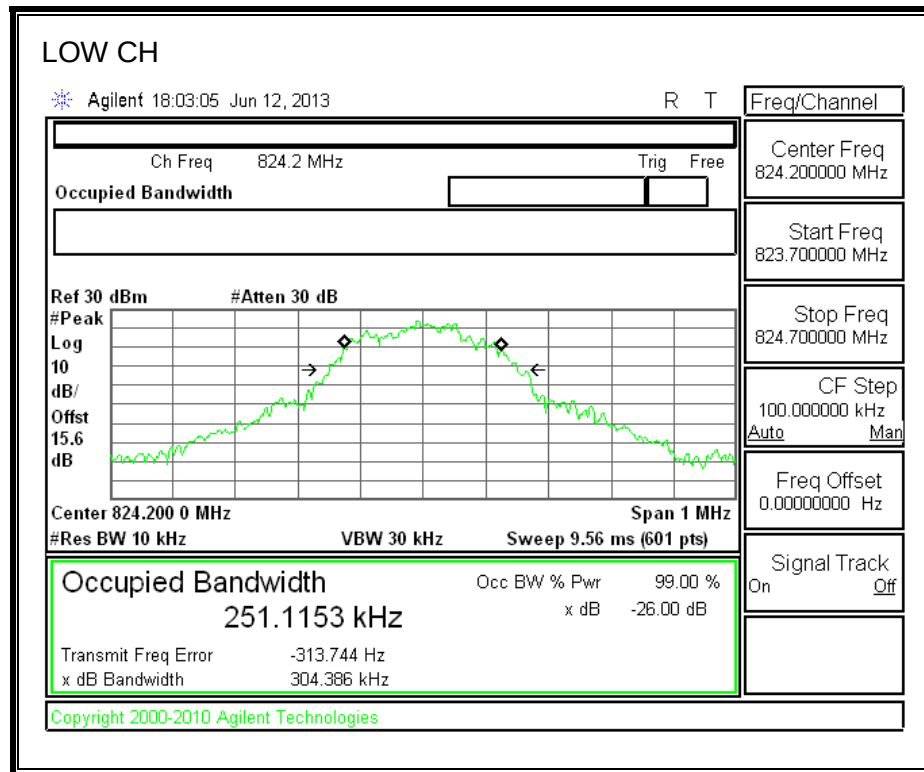

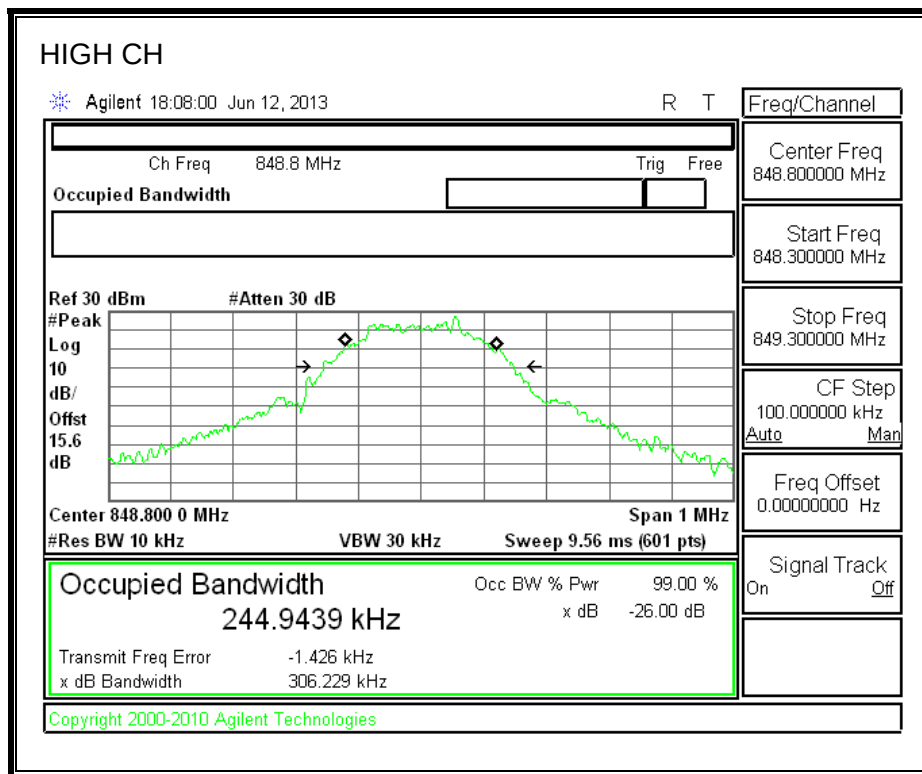


PCS Band

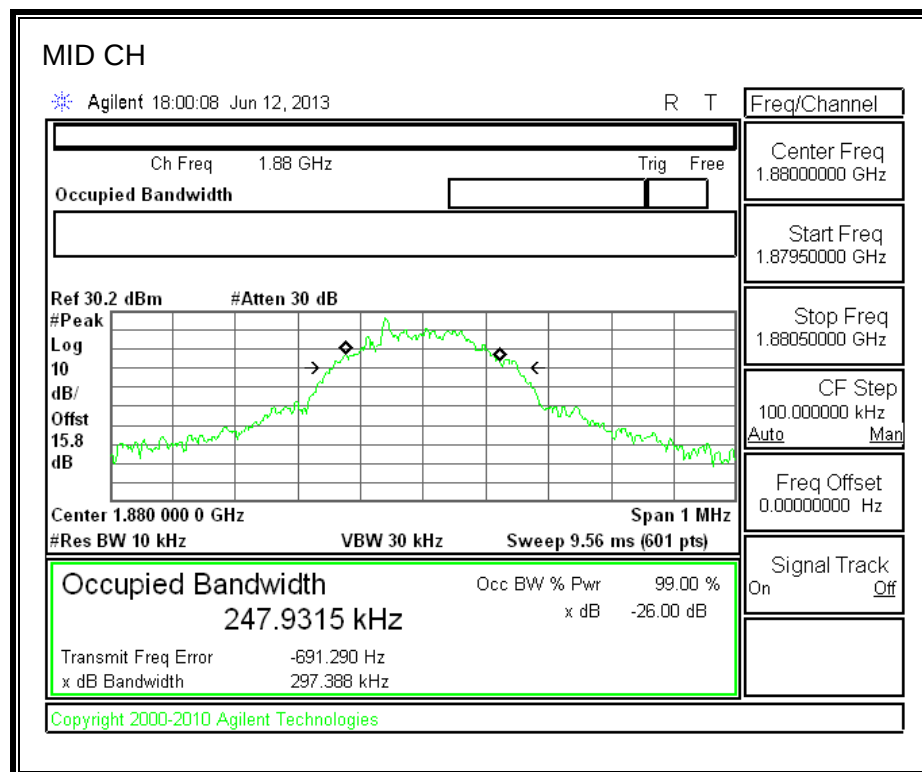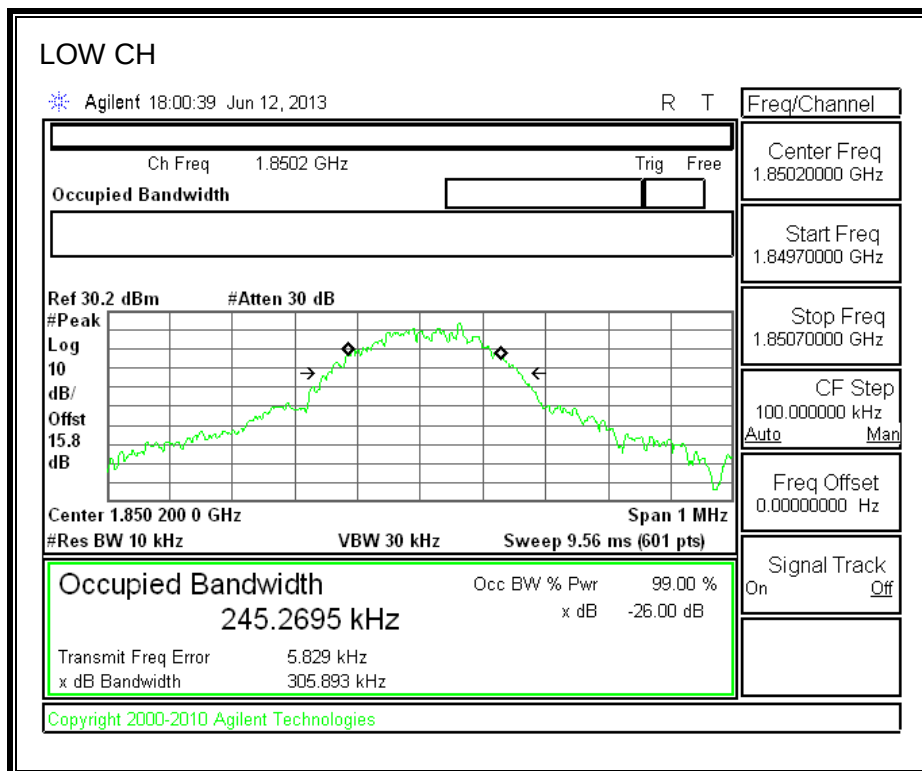


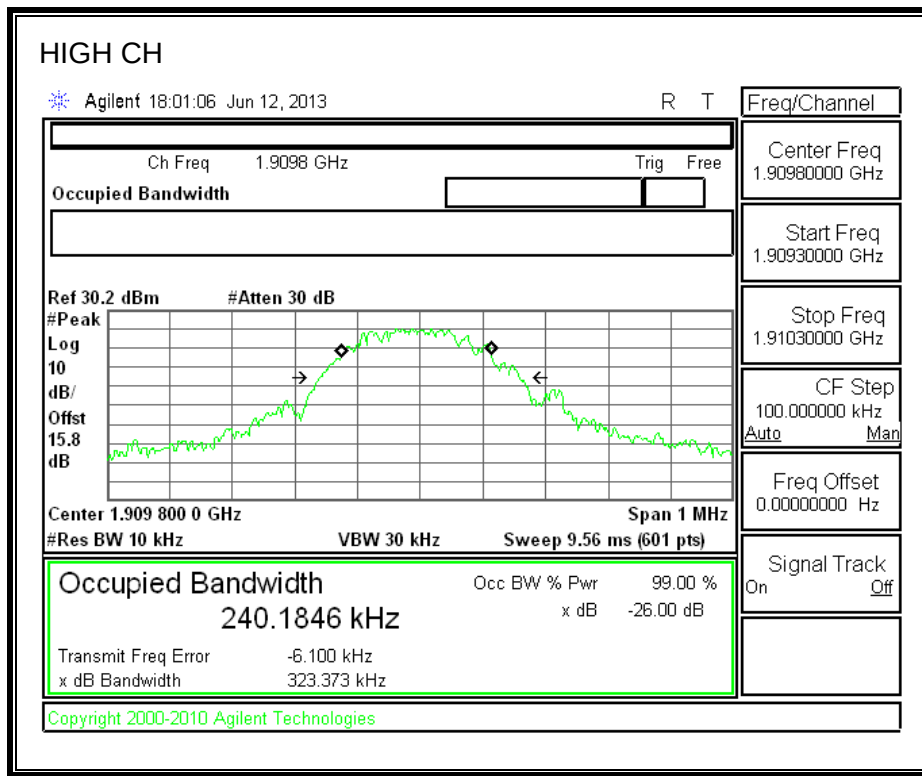


8.1.2. UMTS REL 99 MODE

CELL Band

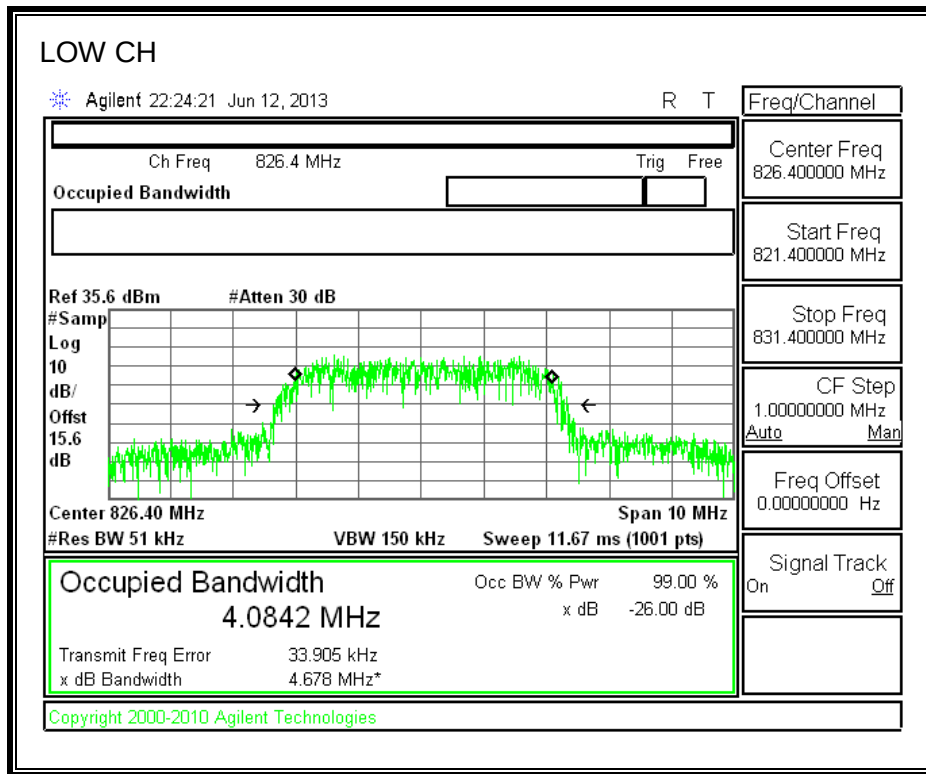


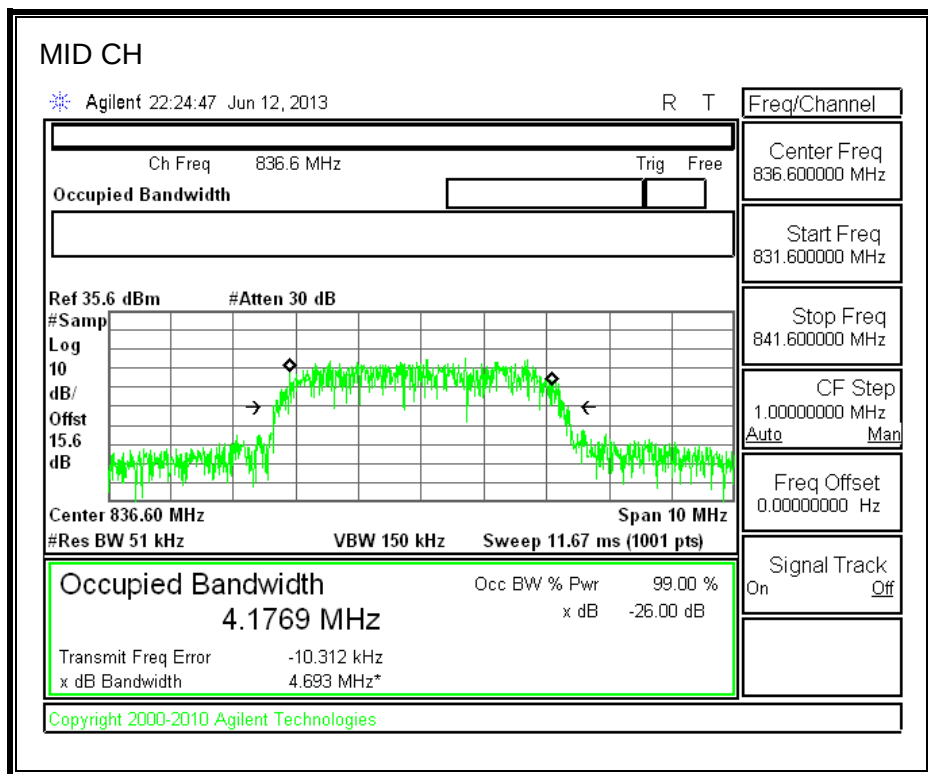


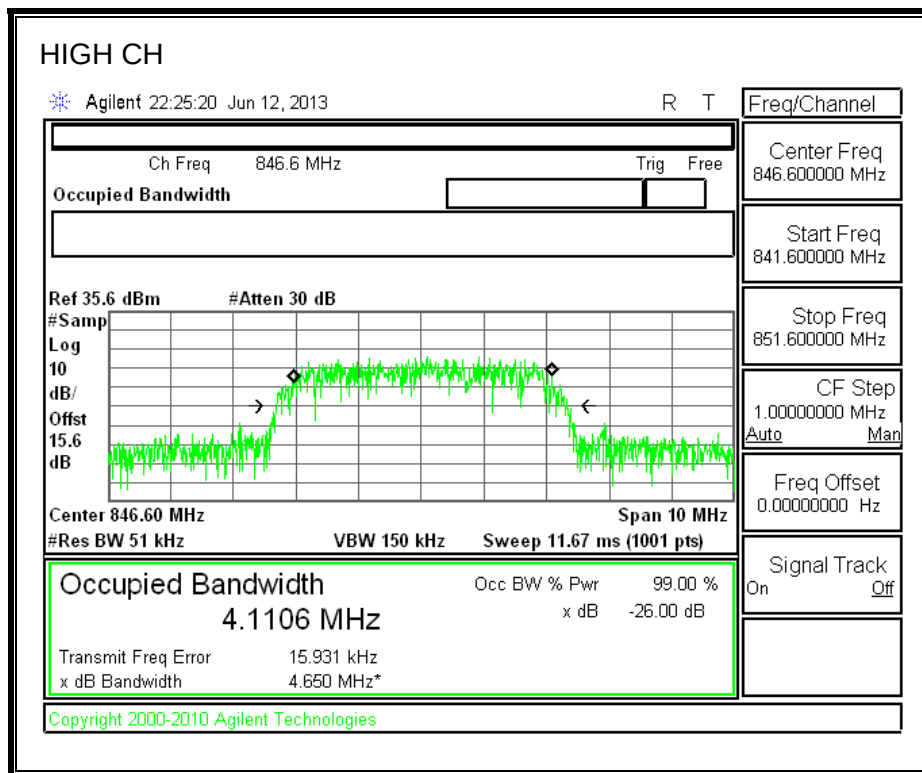


8.1.3. HSDPA MODE

CELL Band

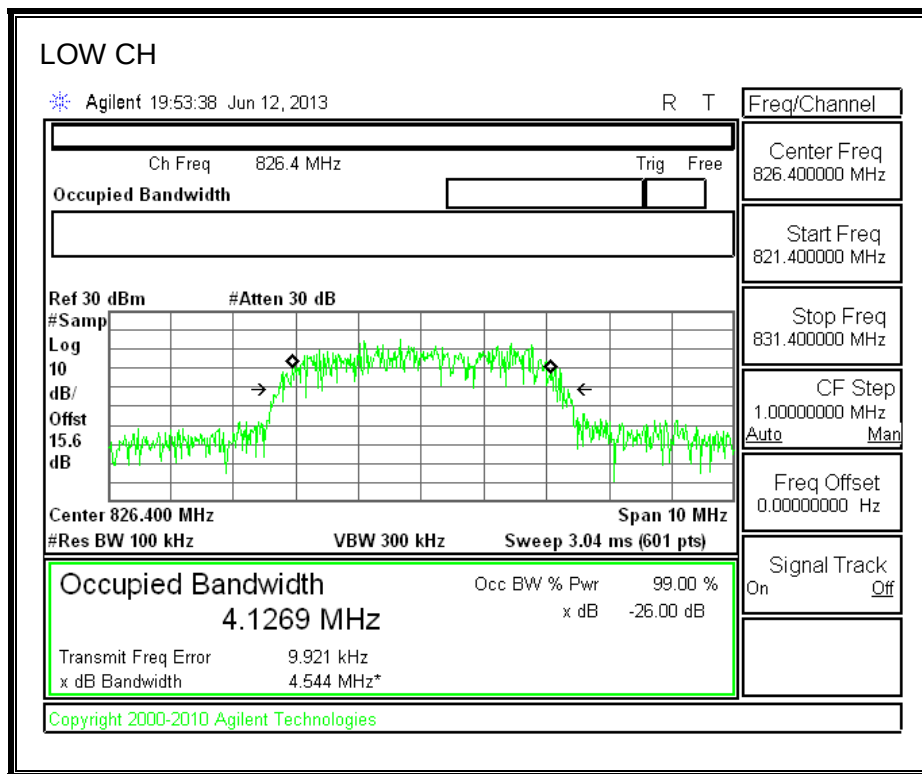

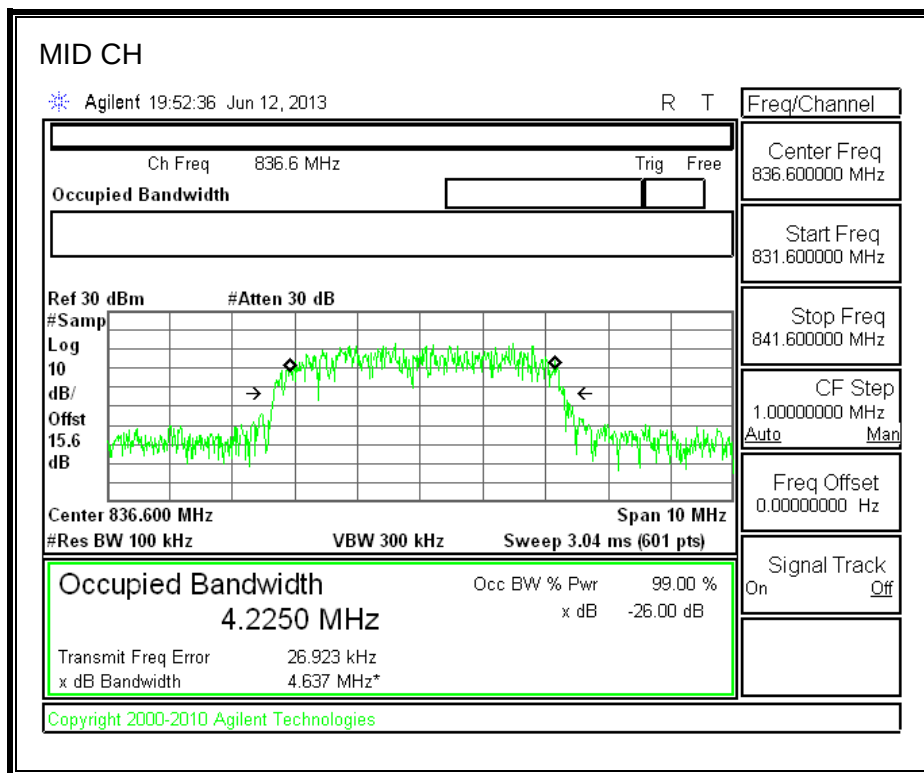

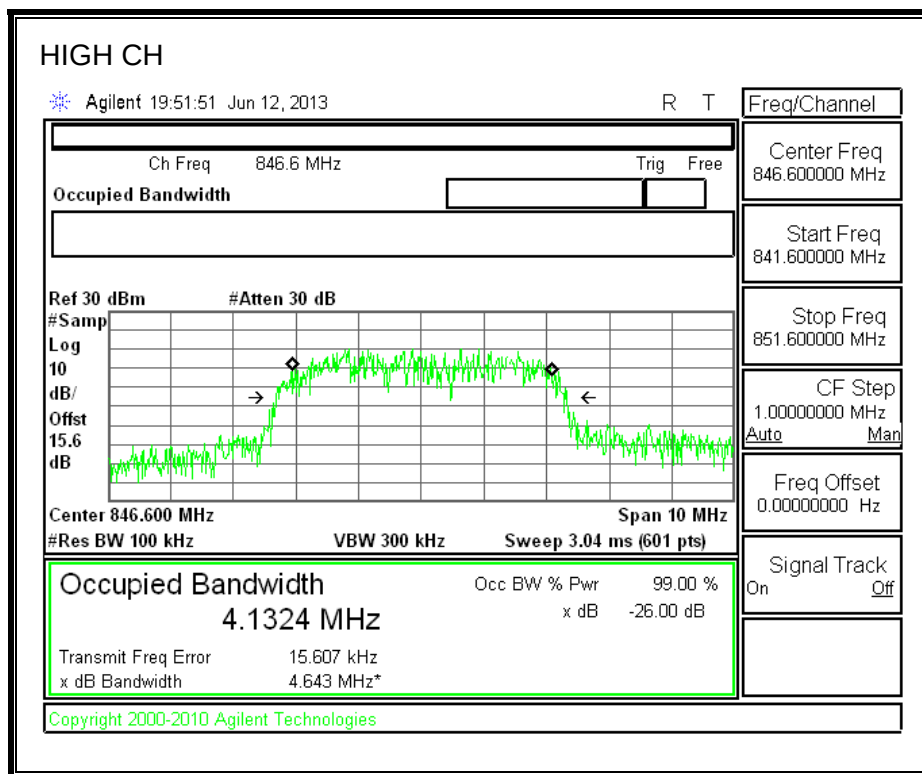

8.2. BAND EDGE

RULE PART(S)

FCC: §22.359, 24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

The transmitter output was connected to a Agilent 8960 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

- Set the spectrum analyzer span to include the block edge frequency (824, 848, 1850, 1910MHz)
- Set a marker to point the corresponding band edge frequency in each test case.
- Set display line at -13 dBm
- Set resolution bandwidth to at least 1% of emission bandwidth.



MODES TESTED

- GPRS
- UMTS REL 99, and HSUPA



RESULTS

8.2.1. GPRS MODE

CELL BAND

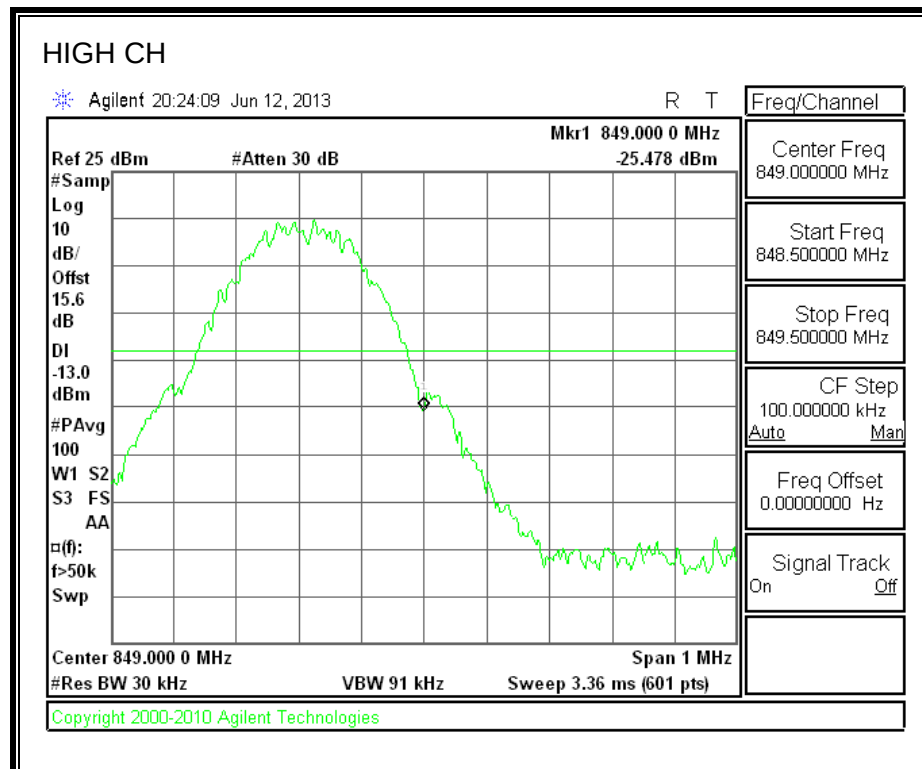
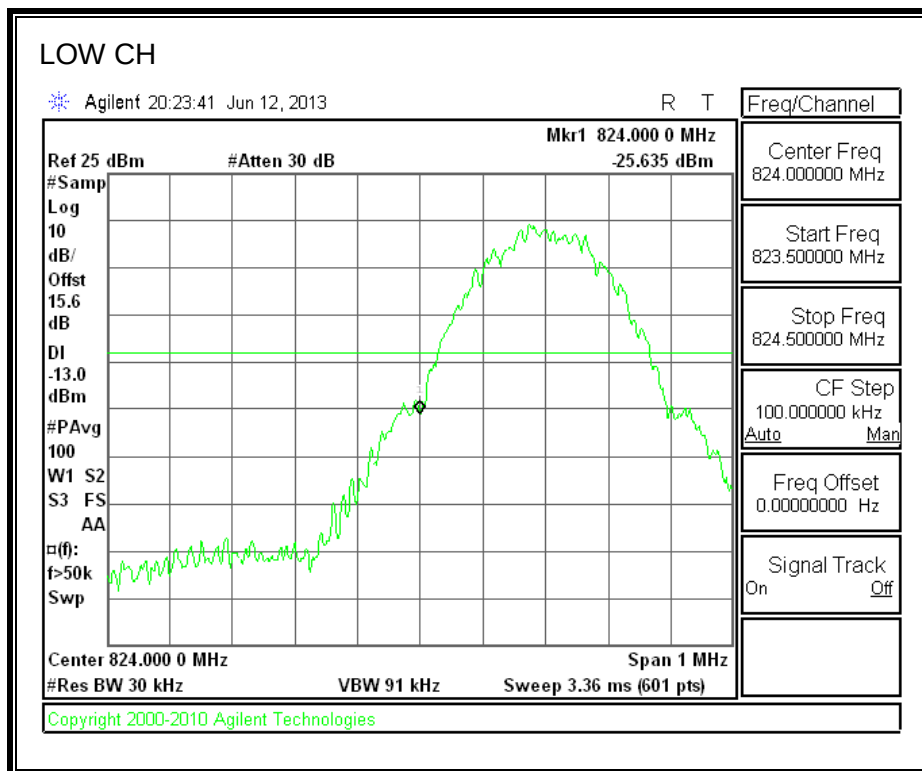


PCS BAND

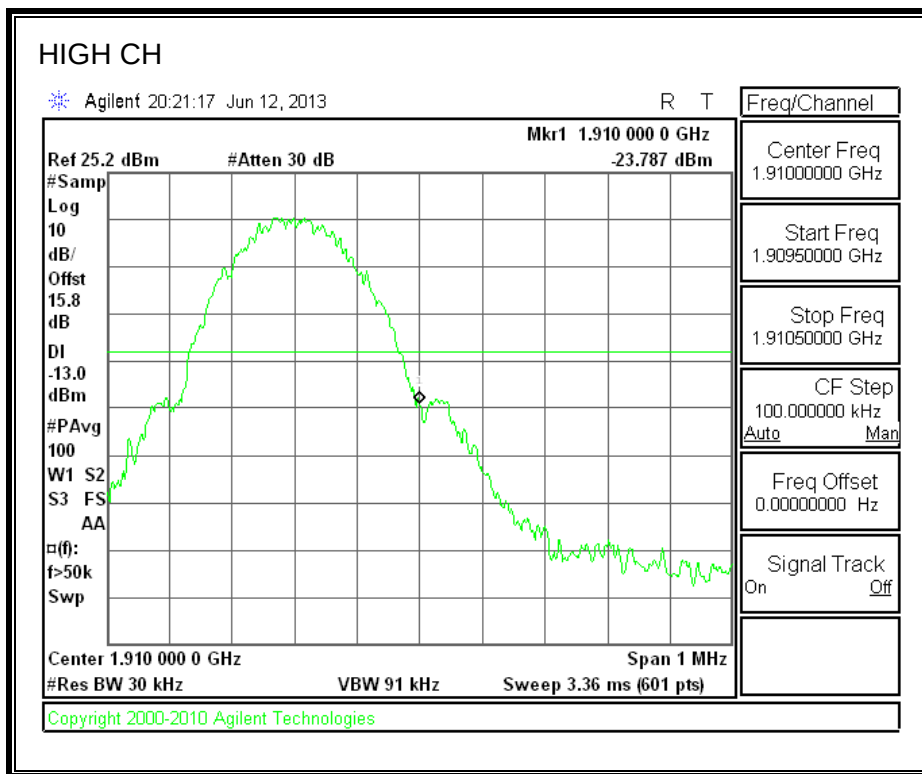
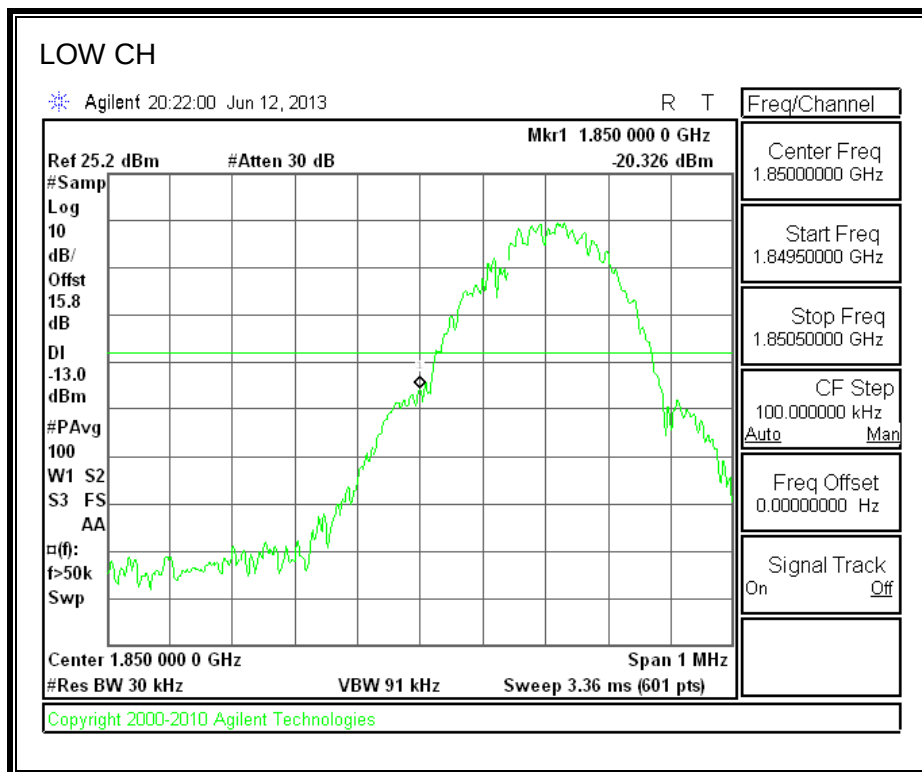


8.2.1. EGPRS MODE

CELL BAND

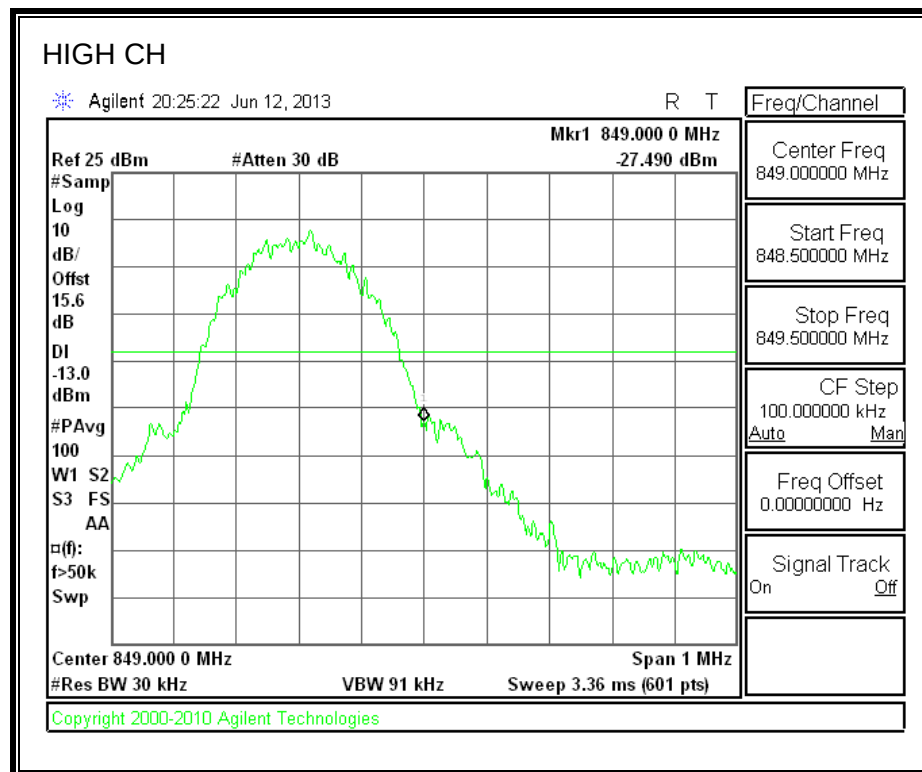
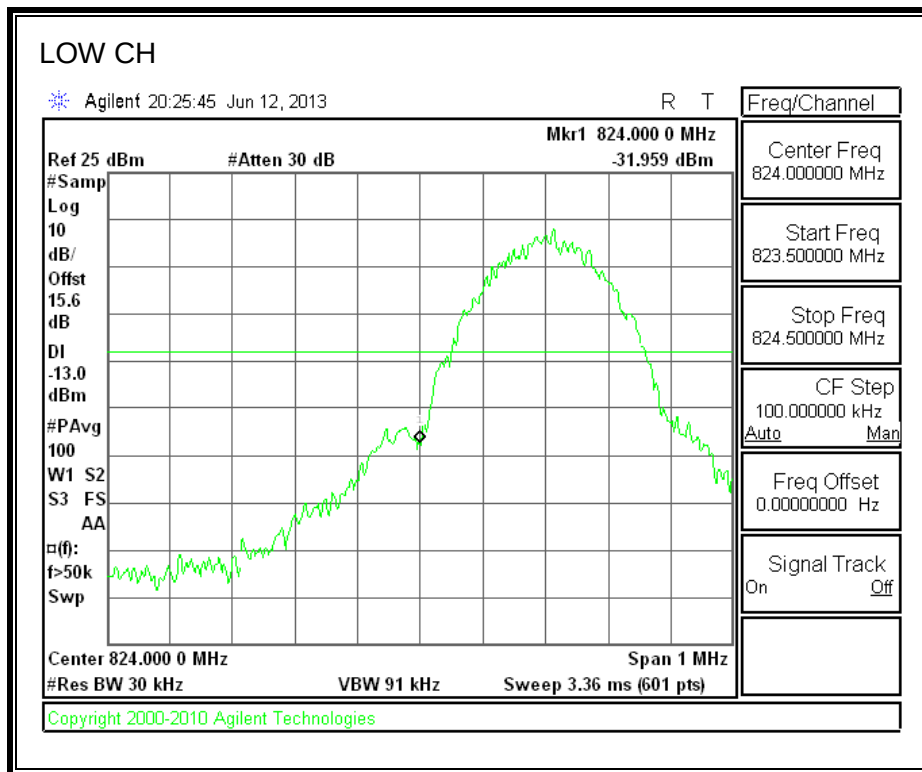


PCS BAND

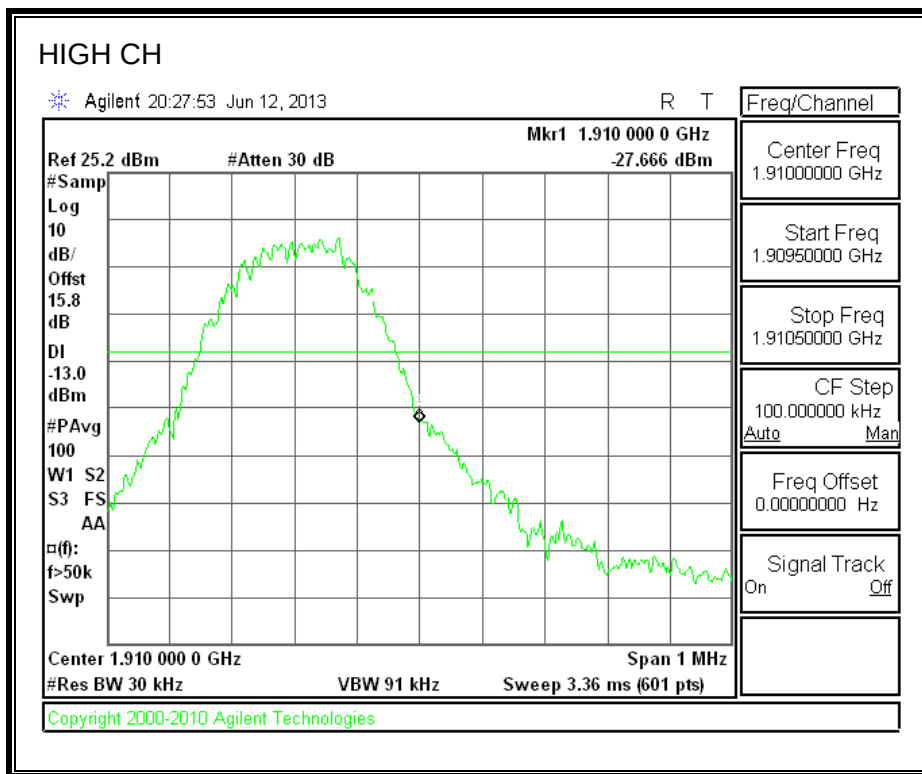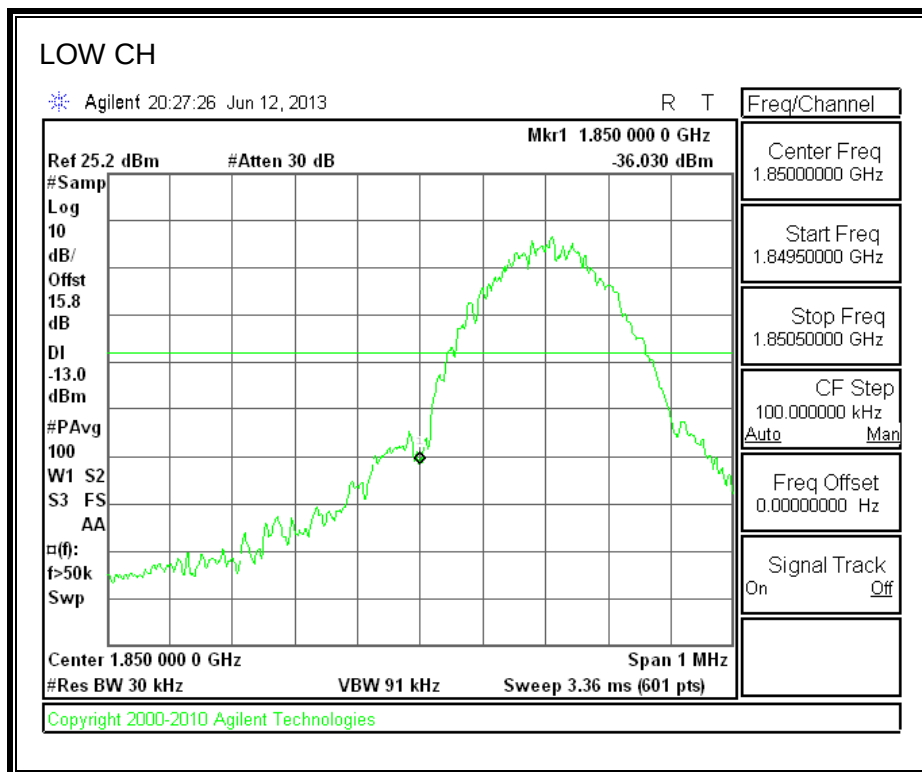



8.2.2. UMTS REL 99 MODE

CELL BAND

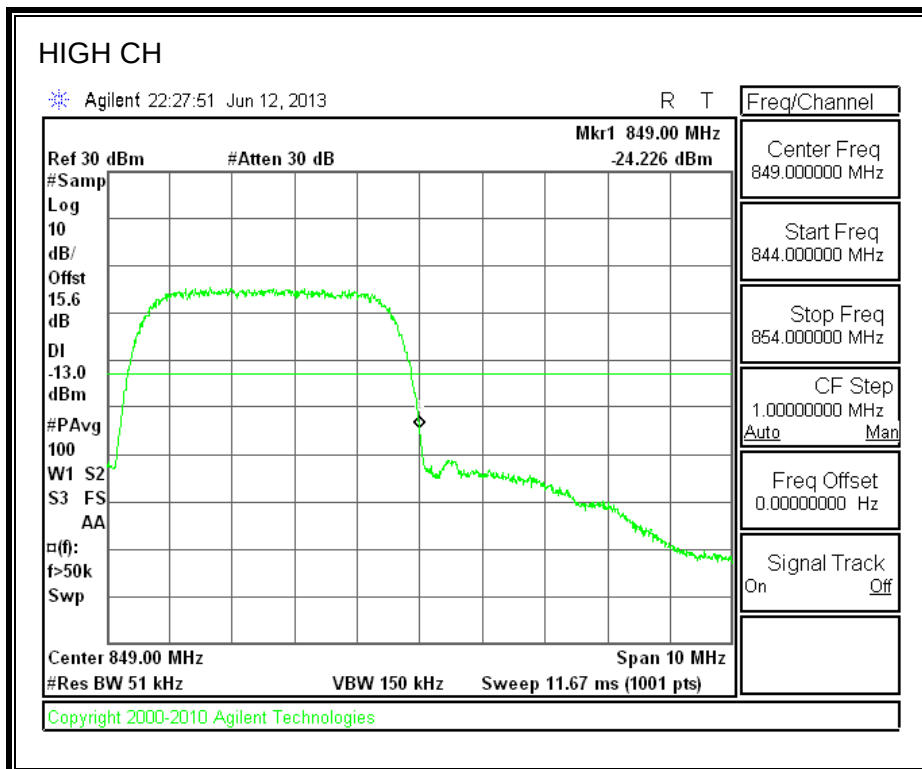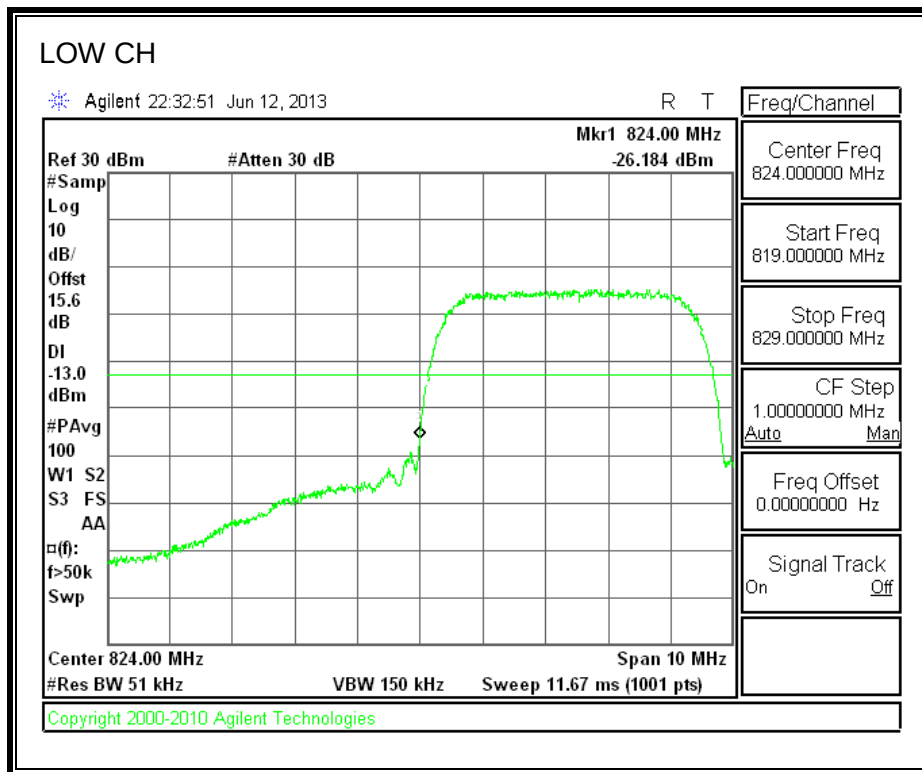

8.2.3. UMTS HSDPA MODE

CELL BAND

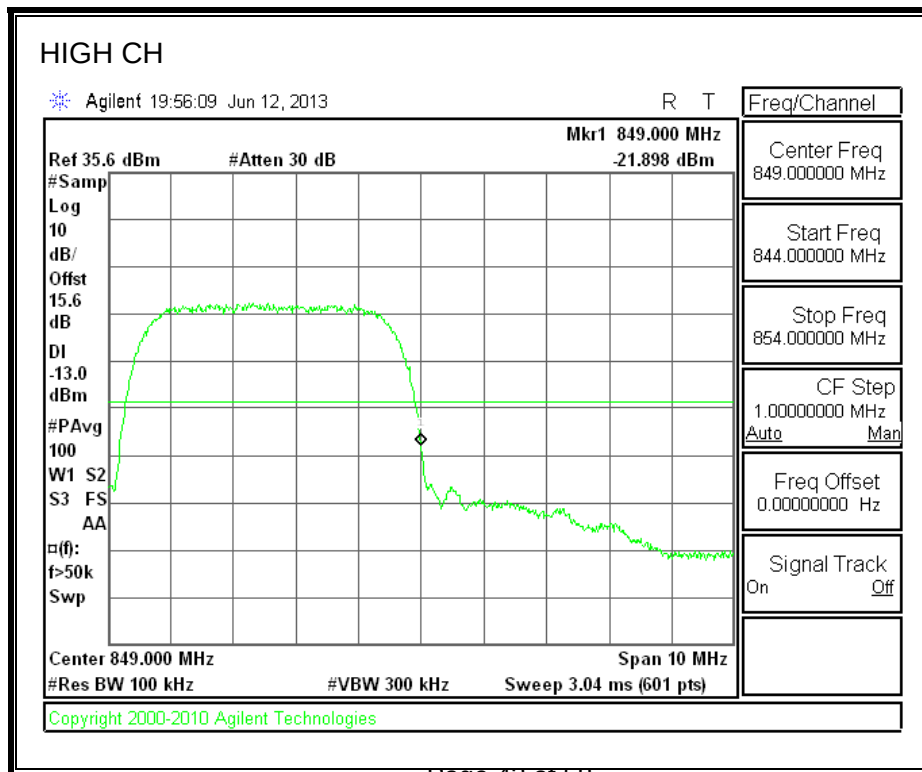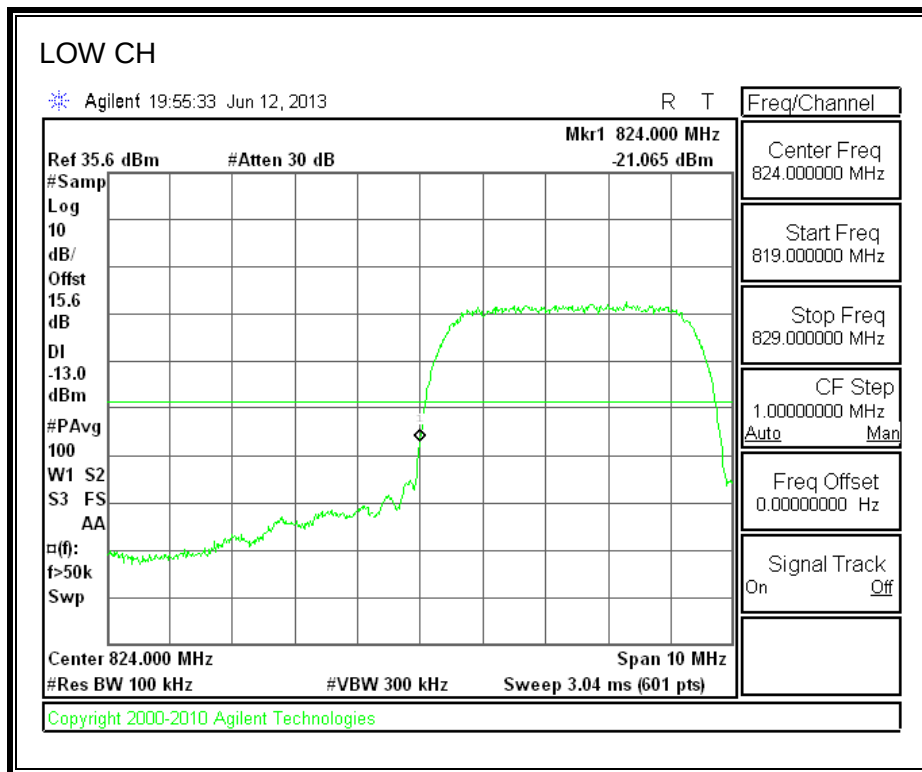

8.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- Set display line at -13 dBm
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.


MODES TESTED


- GPRS
- UMTS REL 99, and HSUPA


RESULTS

8.3.1. GPRS MODE


CELL BAND

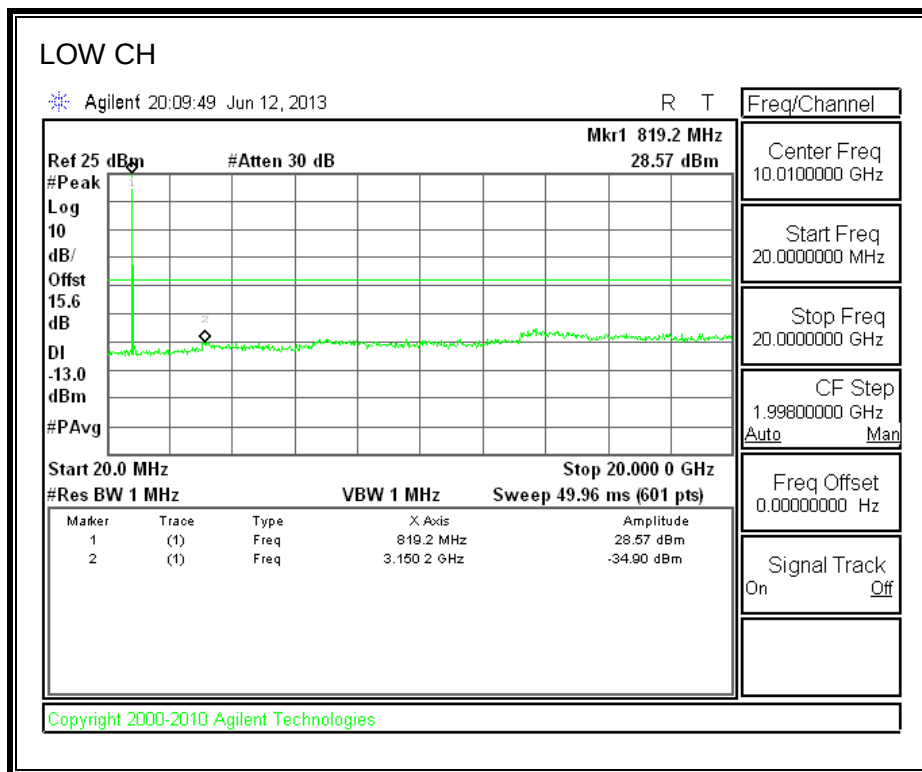


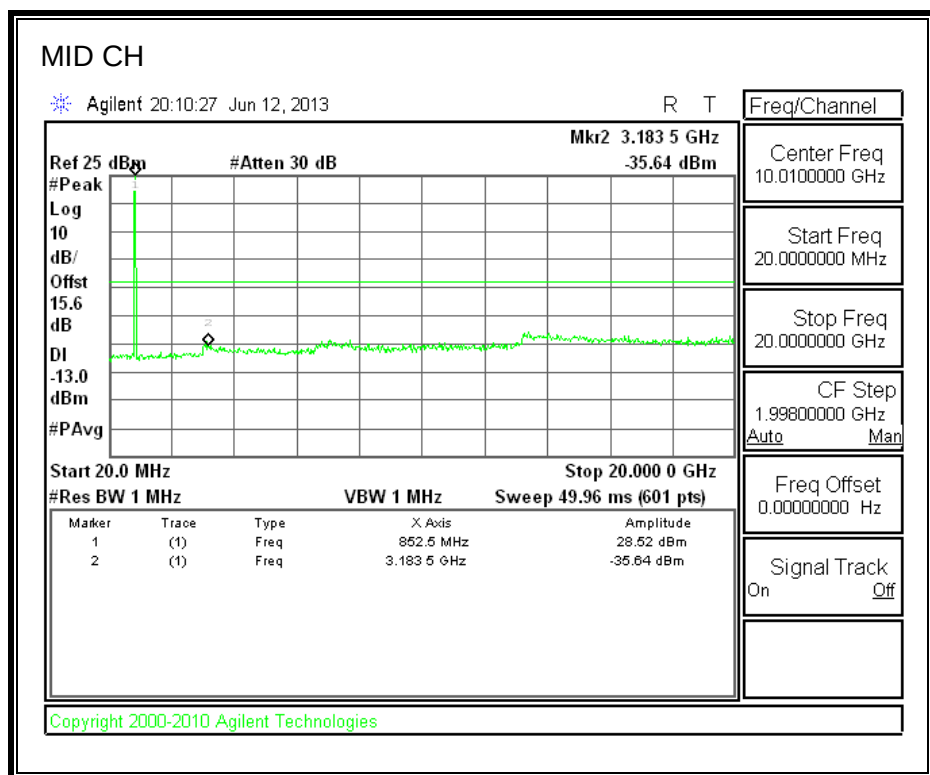


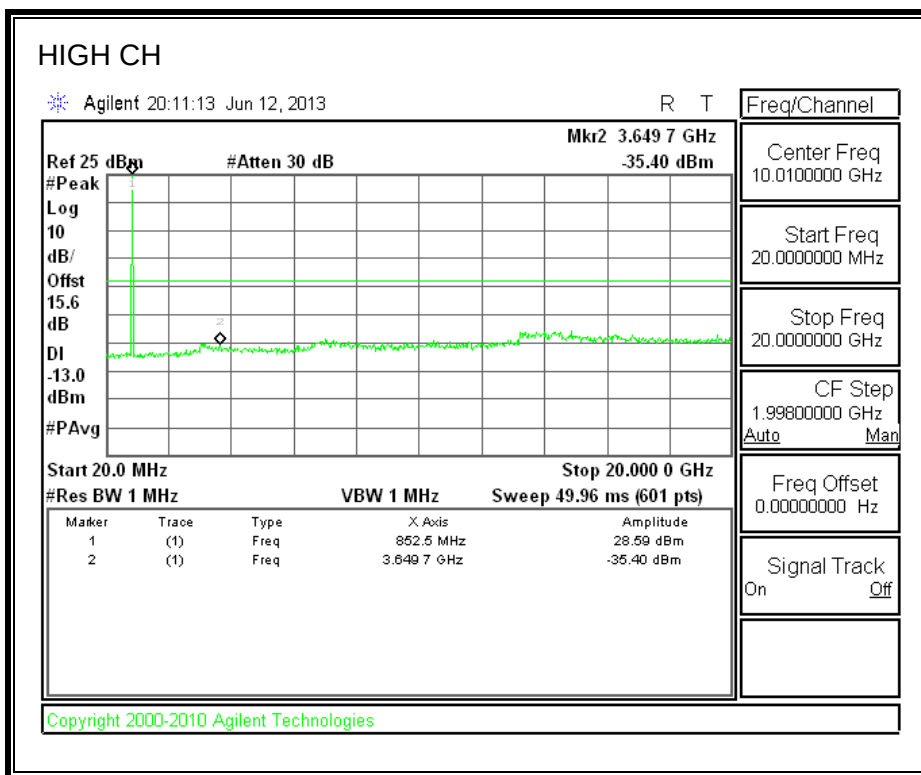

PCS BAND

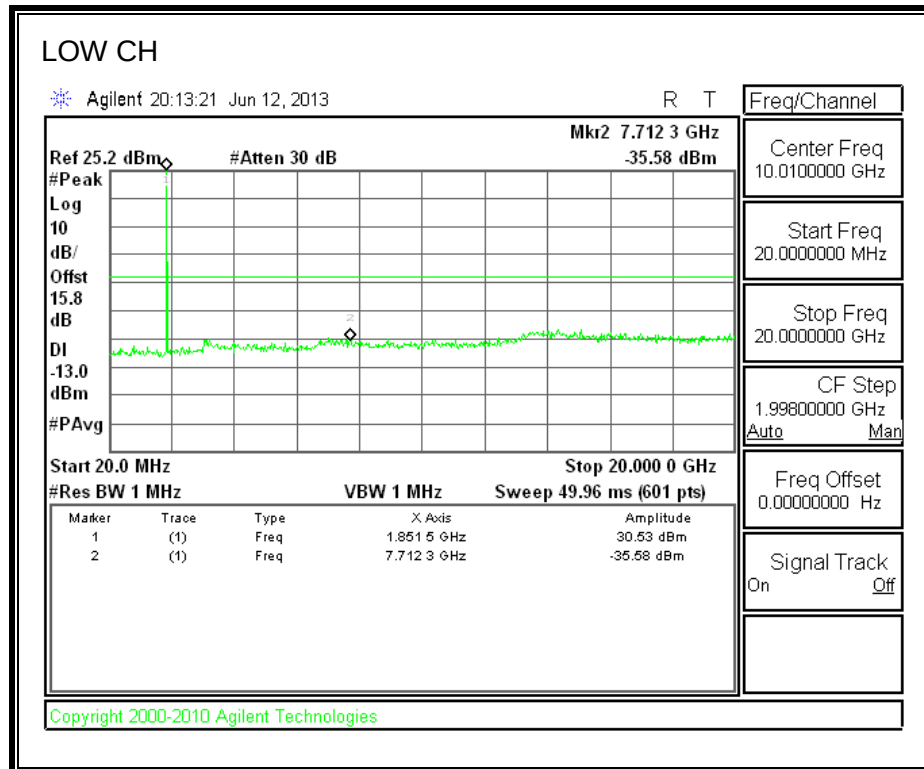


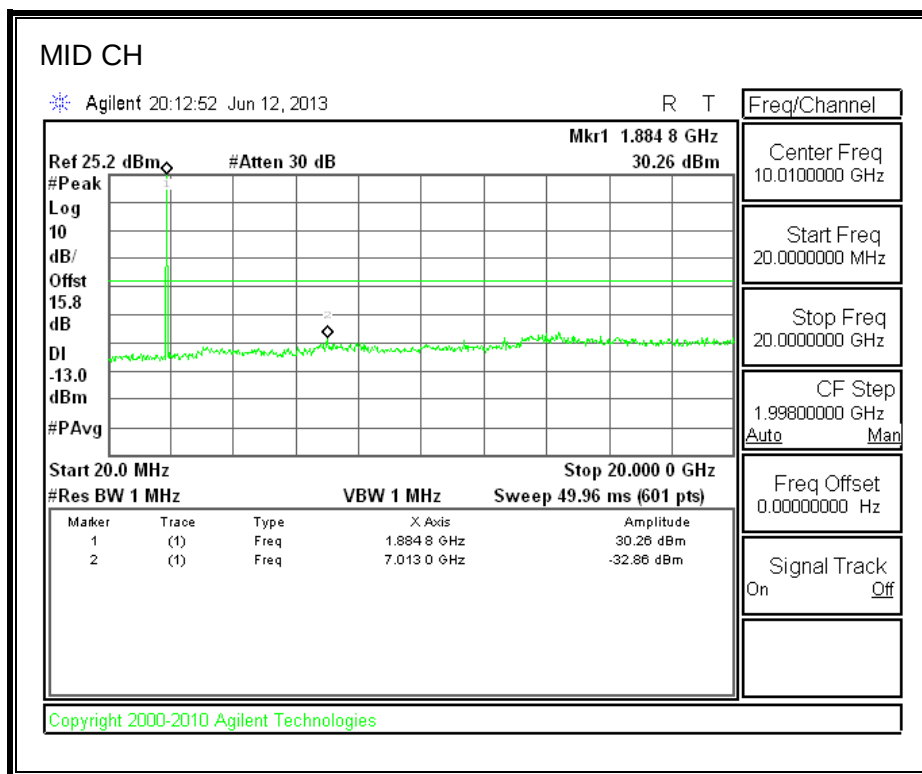


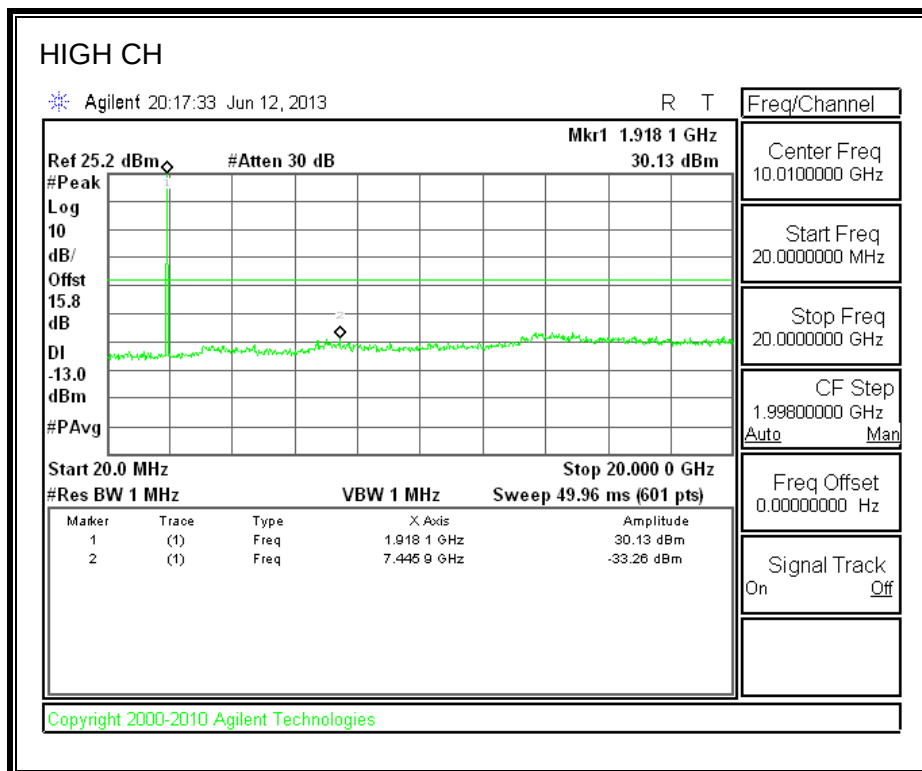


8.3.1. EGPRS MODE


CELL BAND

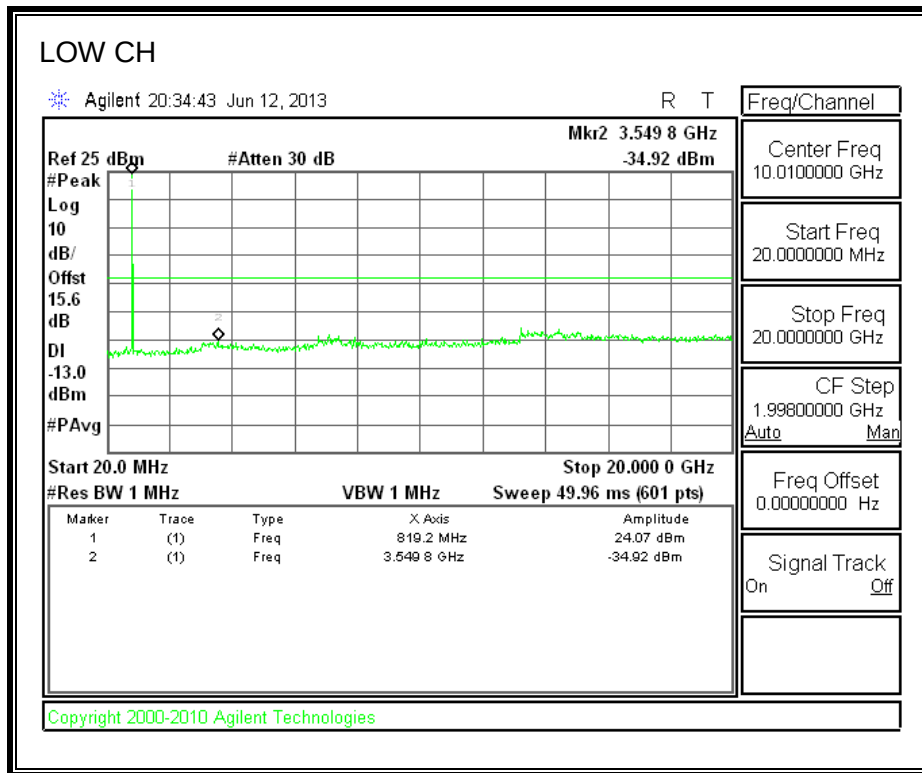


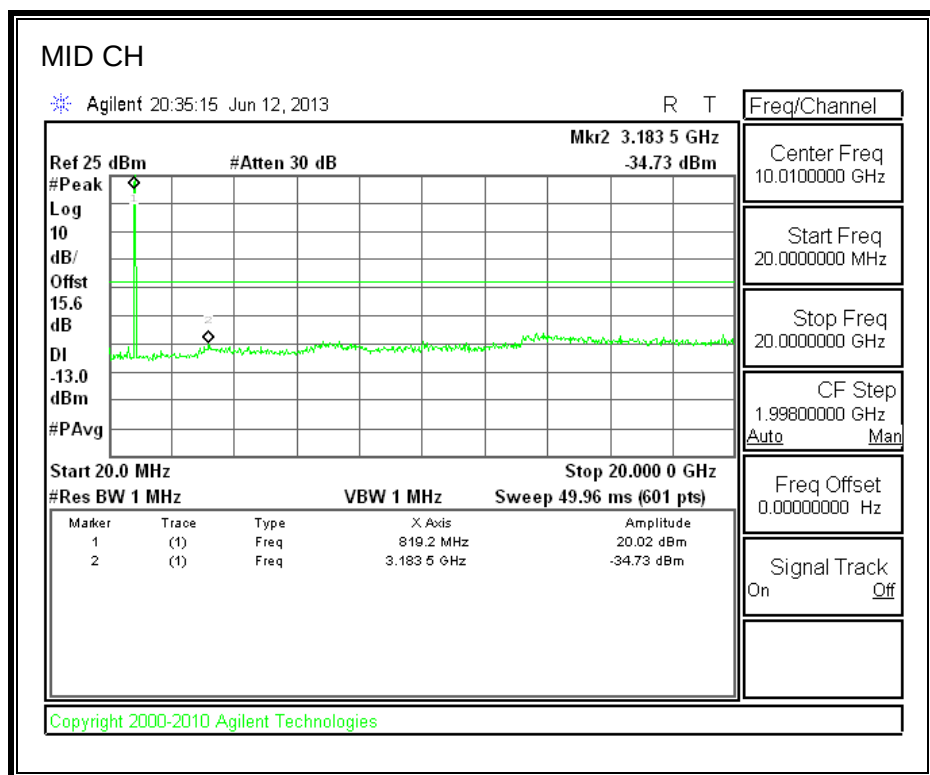


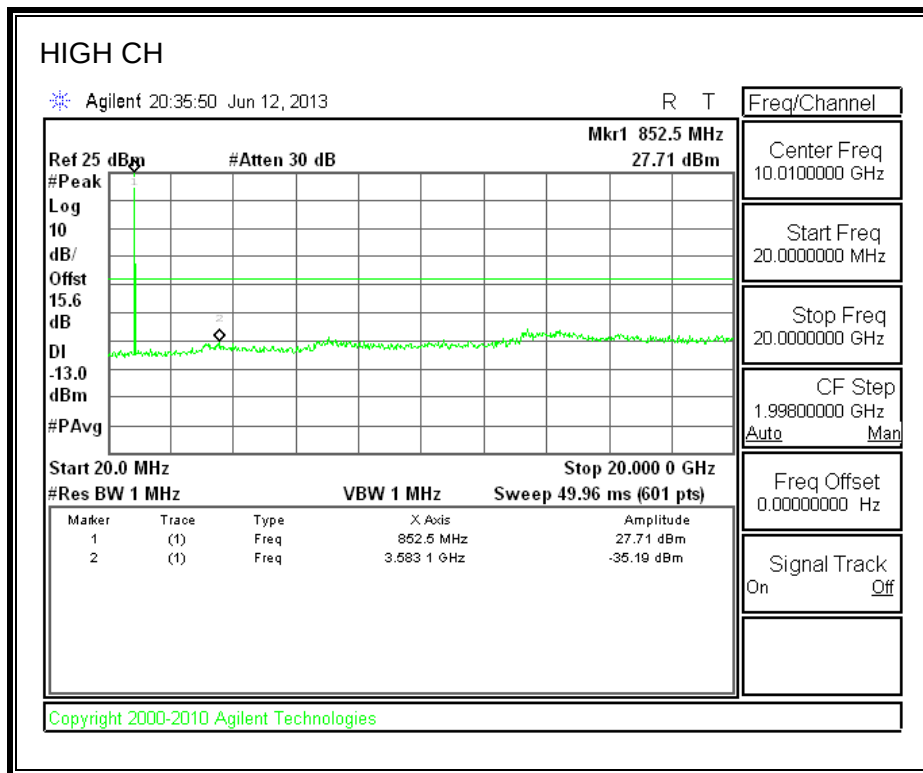

PCS BAND

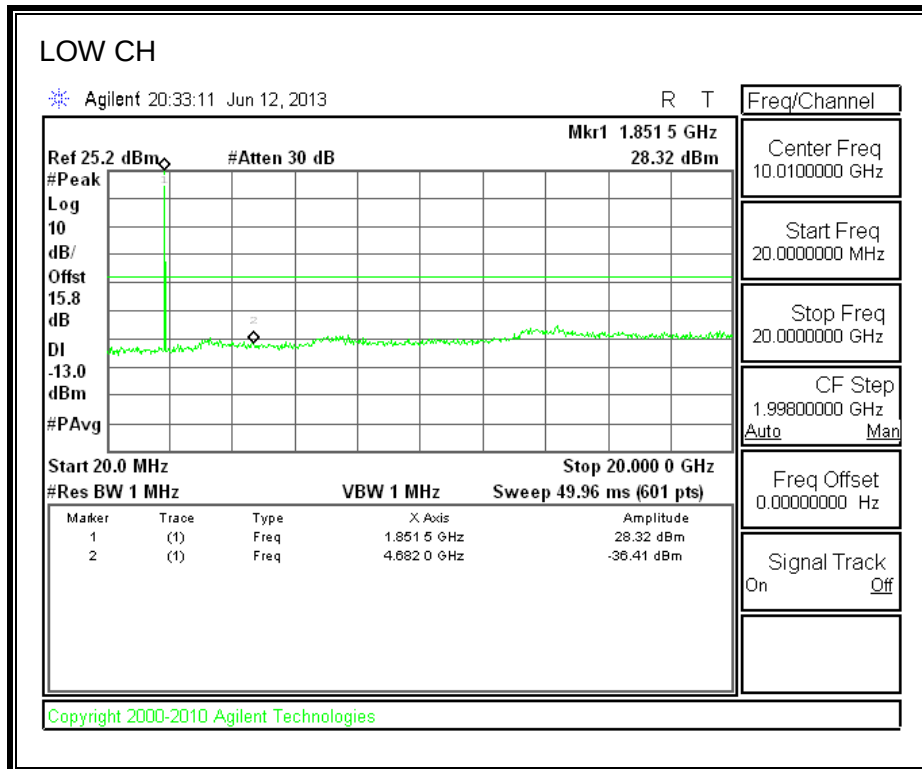


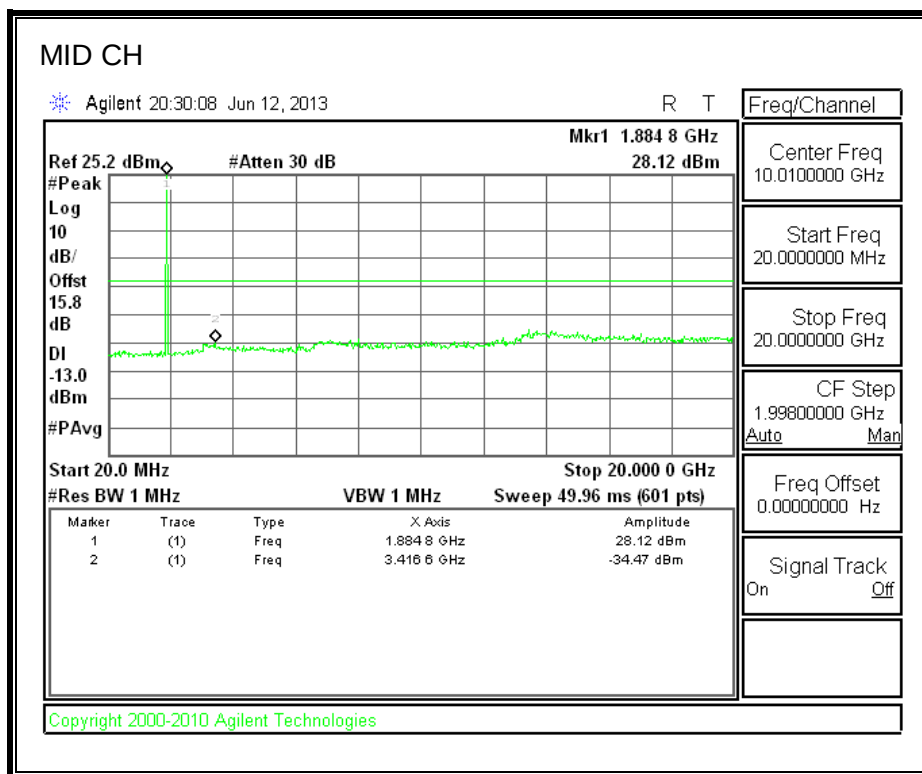


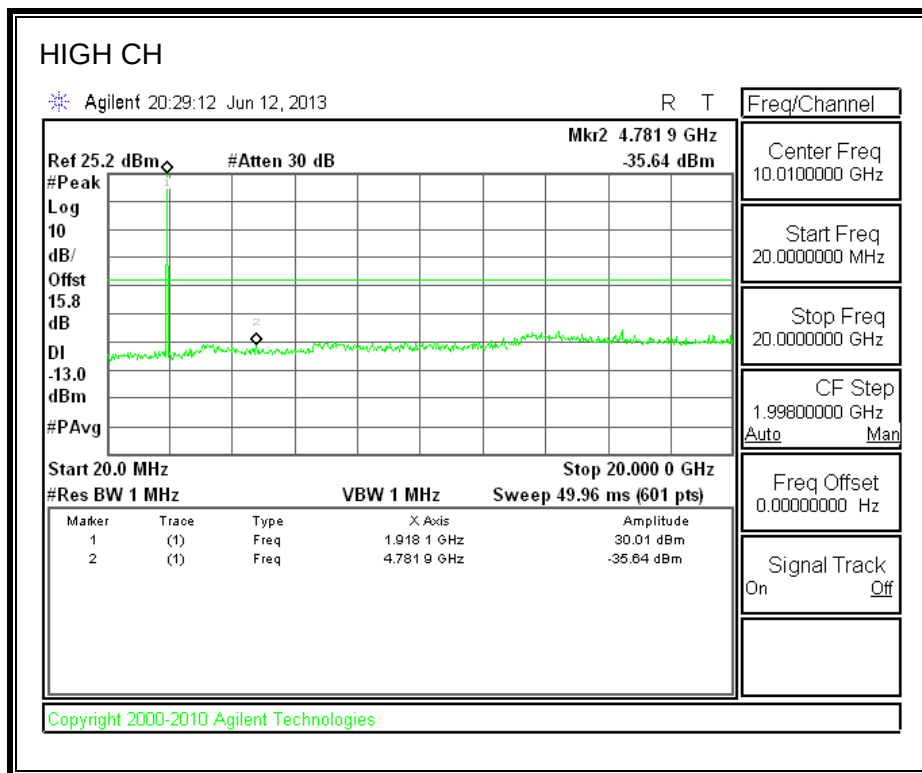


8.3.2. UMTS REL 99 MODE

CELL BAND

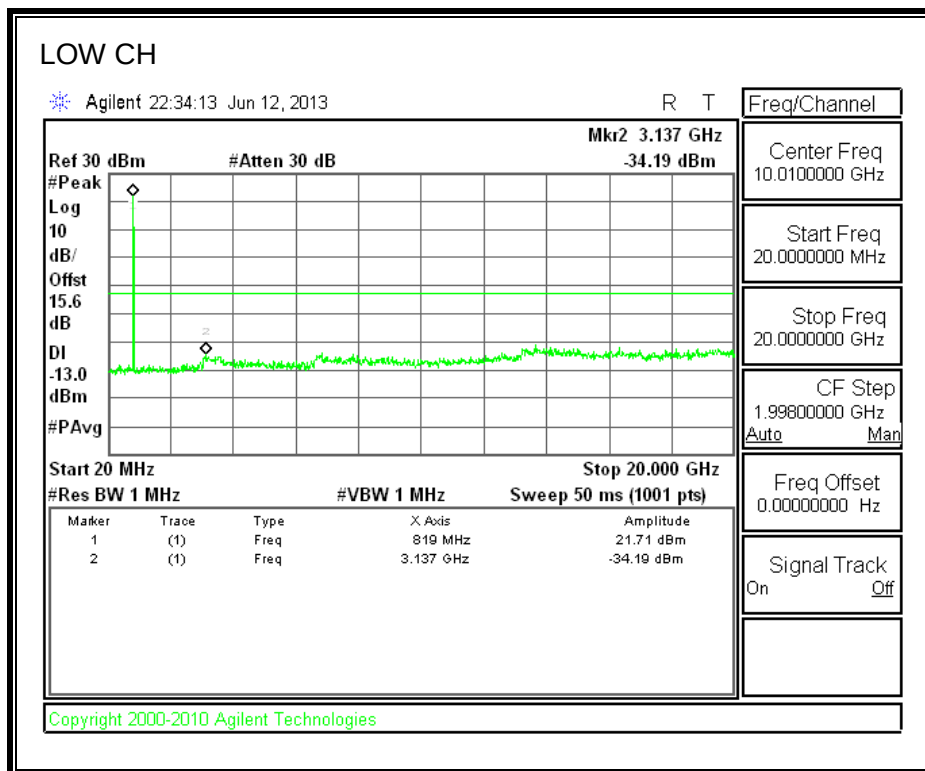


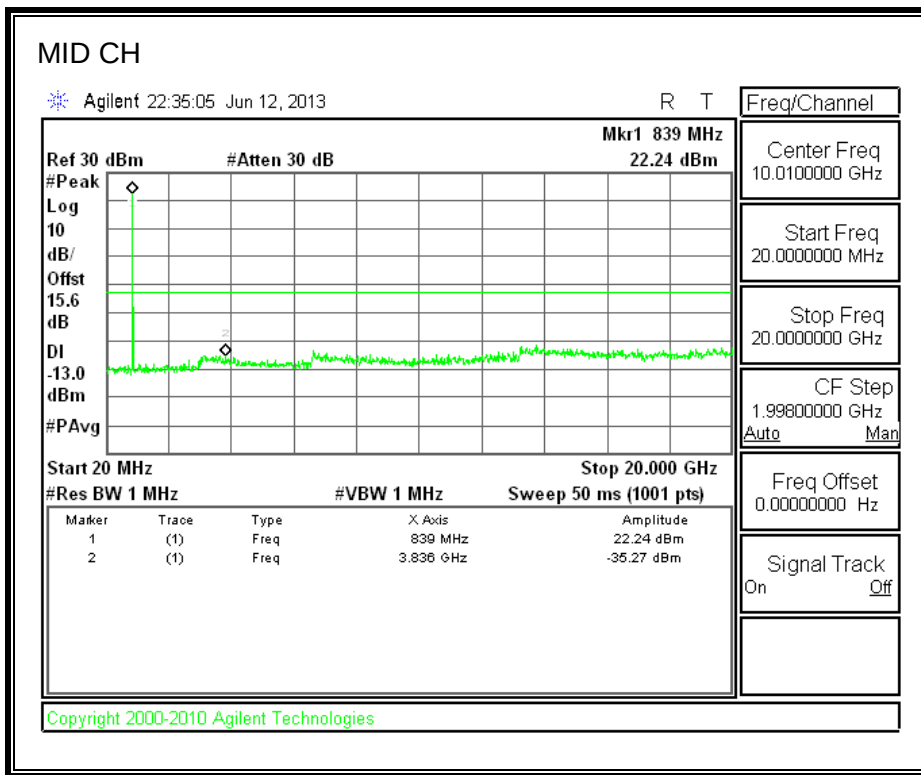

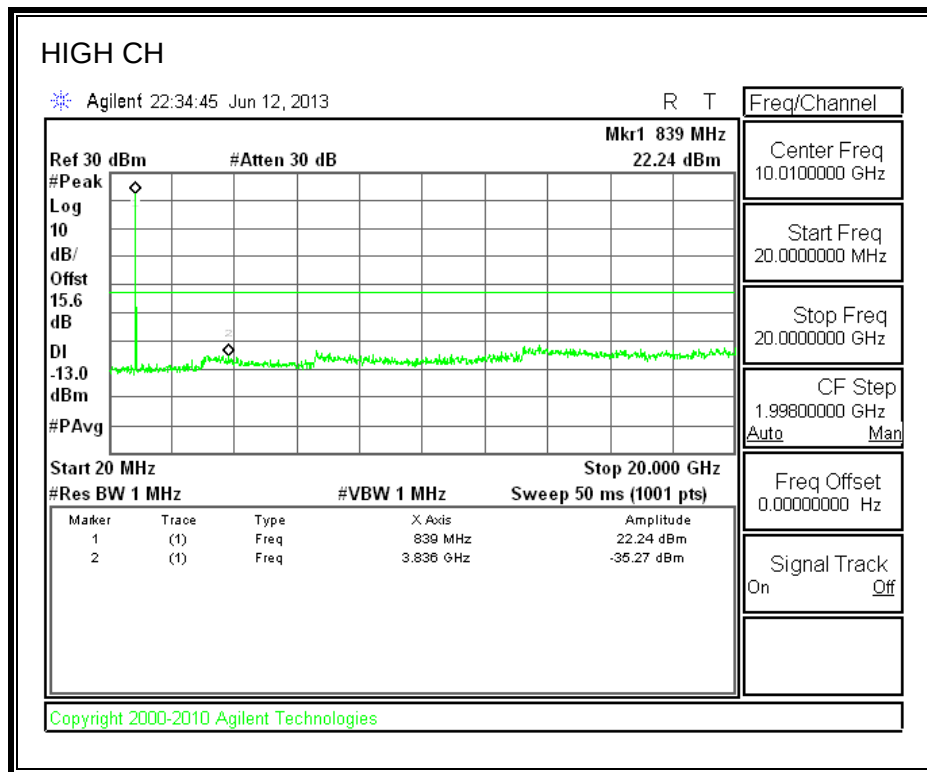



8.4. UMTS HSDPA MODE

CELL BAND

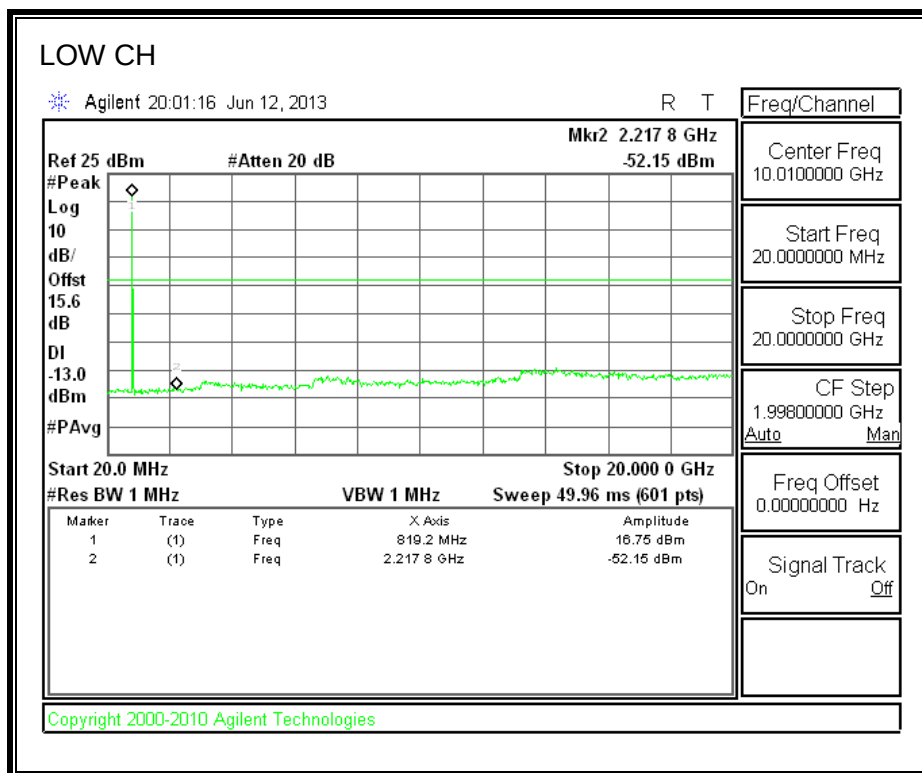

MID CH

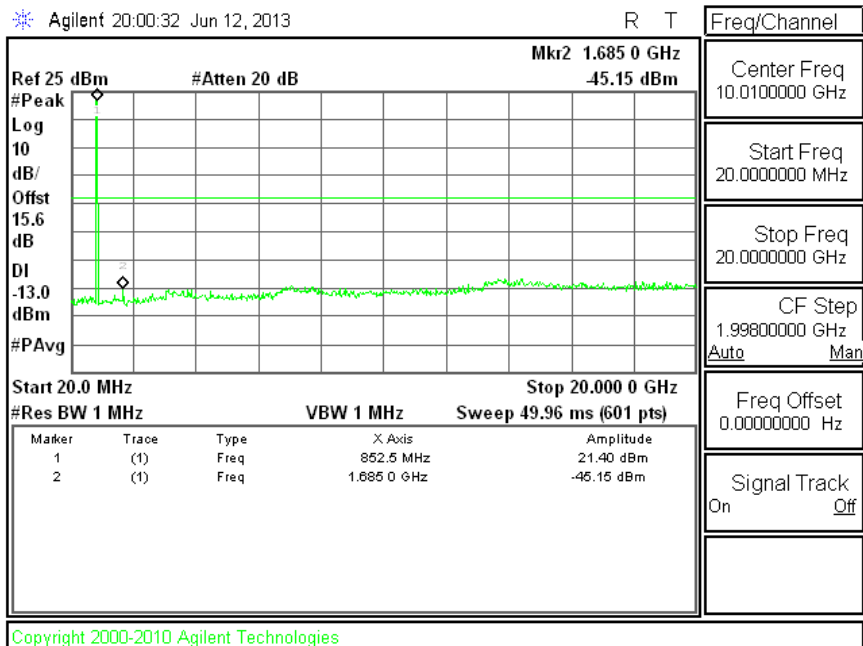

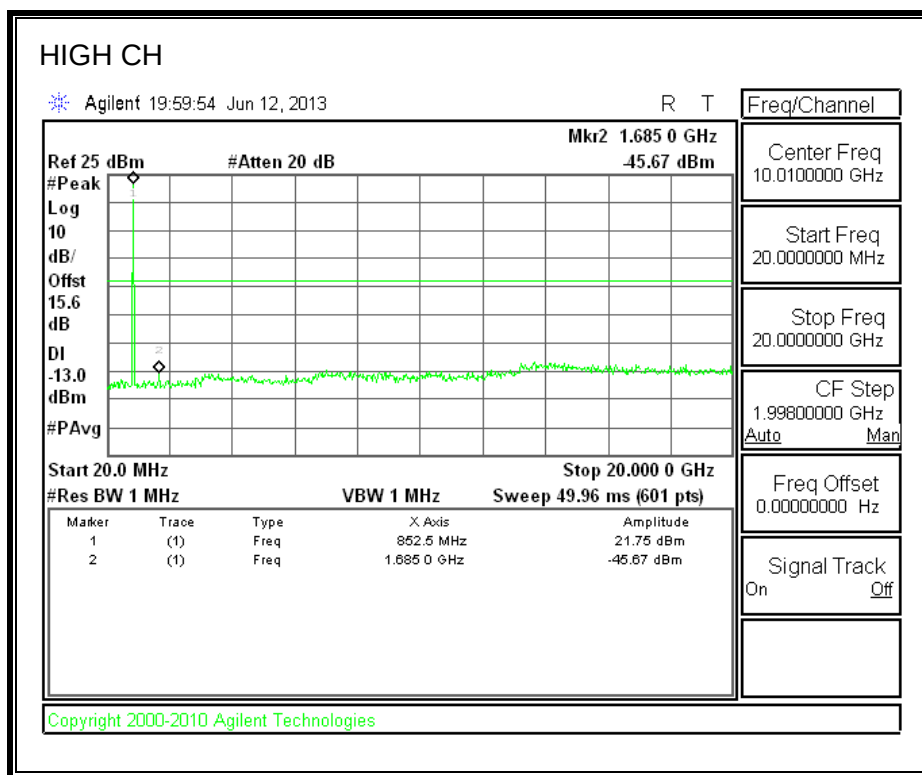

9. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235

LIMITS

- §22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.
- §24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use Agilent 8960 with Frequency Error measurement capability.

- Temp. = -30° to $+50^{\circ}\text{C}$
- Voltage = 85% - 115%

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- GPRS 850 and GPRS 1900
- UMTS 850 only

RESULTS

See the following pages

CELL, GPRS MODULATION – MID CHANNEL

Reference Frequency: Cellular Mid Channel 836.600027MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	50	836.600000	0.005	2.5
3.70	40	836.600002	0.002	2.5
3.70	30	836.600004	0.000	2.5
3.70	20	836.600004	0	2.5
3.70	10	836.600004	0.000	2.5
3.70	0	836.600001	0.004	2.5
3.70	-10	836.599998	0.007	2.5
3.70	-20	836.600012	-0.010	2.5
3.70	-30	836.600007	-0.004	2.5

Reference Frequency: Cellular Mid Channel 836.600027MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	20	836.600004	0	2.5
4.20	20	836.600006	-0.002	2.5
3.30	20	836.600005	-0.001	2.5
End Volt(3.2)	20	836.600004	0.000	2.5

PCS, GPRS MODULATION – MID CHANNEL

Reference Frequency: PCS Mid Channel 1880.000036MHz @ 20°C Limit: within the authorized block or +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	50	1879.999997	0.007	2.5
3.70	40	1879.999999	0.006	2.5
3.70	30	1880.000006	0.002	2.5
3.70	20	1880.000010	0	2.5
3.70	10	1880.000009	0.001	2.5
3.70	0	1879.999996	0.007	2.5
3.70	-10	1879.999994	0.009	2.5
3.70	-20	1880.000013	-0.002	2.5
3.70	-30	1880.000020	-0.005	2.5

Reference Frequency: PCS Mid Channel 1880.000036MHz @ 20°C Limit: within the authorized block or +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	20	1880.000010	0.00000	2.5
4.20	20	1880.000012	-0.00106	2.5
3.30	20	1880.000008	0.00106	2.5
End Volt(3.2)	20	1880.000009	0.00053	2.5

CELL WCDMA – MID CHANNEL

Reference Frequency: Cellular Mid Channel 835.999992MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	50	836.599701	0.504	2.5
3.70	40	836.600404	-0.336	2.5
3.70	30	836.600727	-0.722	2.5
3.70	20	836.600123	0	2.5
3.70	10	836.599821	0.361	2.5
3.70	0	836.600120	0.004	2.5
3.70	-10	836.600322	-0.238	2.5
3.70	-20	836.599765	0.428	2.5
3.70	-30	836.599610	0.613	2.5

Reference Frequency: Cellular Mid Channel 836.000004MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	20	836.600123	0	2.5
4.20	20	836.600501	-0.452	2.5
3.30	20	836.600245	-0.146	2.5
End Volt(3.2)	20	836.600525	-0.481	2.5

10. RADIATED TEST RESULTS

10.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 2.2.17

The ERP/EIRP power was measured with the spectrum analyzer which attached with receiver antenna via calibrated cable. The measurements have been taken at the low, middle and high channel in each band.

- Set the spectrum analyzer span wide enough or greater than the modulated signal BW.
- Set a spectrum analyzer at peak detection mode with VBW $\geq$ RBW $\geq$ 26dB BW, typically 3MHz.for GSM and 5MHz for WCDMA modes respectively.
- Set a marker to point the corresponding peak value.

MODES TESTED

- GSM, and GPRS
- UMTS, REL 99, and HSUPA

RESULTS

Mode	Channel	f (MHz)	ERP	
			dBm	mW
GPRS	128	824.20	23.38	217.77
	190	836.60	24.94	311.89
	251	848.80	24.33	271.02

Mode	Channel	f (MHz)	EIRP	
			dBm	mW
GPRS	512	1850.20	28.86	769.13
	661	1880.00	28.40	691.83
	810	1909.80	29.27	845.28

Mode	Channel	f (MHz)	ERP	
			dBm	mW
EGPRS	128	824.20	19.70	93.33
	190	836.60	23.07	202.77
	251	848.80	21.88	154.17

Mode	Channel	f (MHz)	EIRP	
			dBm	mW
EGPRS	512	1850.20	27.16	520.00
	661	1880.00	28.00	630.96
	810	1909.80	27.77	598.41

Mode	Channel	f (MHz)	ERP	
			dBm	mW
REL 99	4357	826.40	15.46	35.16
	4408	836.60	16.17	41.40
	4458	846.60	18.21	66.22

Mode	Channel	f (MHz)	EIRP	
			dBm	mW
HSUPA	4357	826.40	16.27	42.36
	4405	836.00	16.64	46.13
	4455	846.00	18.46	70.15

10.1.1. GPRS 850 (Cellular Band)

High Frequency Substitution Measurement Compliance Certification Services Chamber B								
Company: Samsung Project #: 13I15226 Date: 06/15/13 Test Engineer: Kiya Kedida Configuration: EUT only, Y Config Mode: GPRS 850								
Test Equipment: Receiving: Sunol T243, and Chamber B N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 208947003) Warehouse.								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.20	23.98	V	0.6	0.0	23.38	38.5	-15.1	
824.20	6.53	H	0.6	0.0	5.93	38.5	-32.5	
Mid Ch								
836.60	25.54	V	0.6	0.0	24.94	38.5	-13.5	
836.60	8.64	H	0.6	0.0	8.04	38.5	-30.4	
High Ch								
848.80	24.93	V	0.6	0.0	24.33	38.5	-14.1	
848.80	11.02	H	0.6	0.0	10.42	38.5	-28.0	
Rev. 3.17.11								

10.1.2. GPRS 1900 (PCS Band)

High Frequency Fundamental Measurement Compliance Certification Services 5M Chamber B								
Company: Samsung Project #: 13U15226 Date: 06/15/13 Test Engineer: Kiya Kedida Configuration: EUT, X position with AC and HS Mode: GSM 1900 GPRS								
Test Equipment:								
Receiving: Horn T59, and Chamber B SMA Cables								
Substitution: Horn T60 Substitution, 4ft SMA Cable (244639001) Warehouse								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1.850	13.2	V	0.85	8.46	20.77	33.0	-12.2	
1.850	21.2	H	0.85	8.52	28.86	33.0	-4.1	
Mid Ch								
1.880	13.2	V	0.85	8.46	20.84	33.0	-12.2	
1.880	20.7	H	0.85	8.52	28.40	33.0	-4.6	
High Ch								
1.910	13.9	V	0.85	8.46	21.51	33.0	-11.5	
1.910	21.6	H	0.85	8.52	29.27	33.0	-3.7	
Rev. 3.17.11								

10.1.3. EGPRS 850 (Cellular Band)

High Frequency Substitution Measurement Compliance Certification Services Chamber B								
Company: Samsung Project #: 13I15226 Date: 06/15/13 Test Engineer: Kiya Kedida Configuration: EUT only, Y Config Mode: EGPRS 850								
Test Equipment: Receiving: Sunol T243, and Chamber B N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 208947003) Warehouse.								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.20	20.30	V	0.6	0.0	19.70	38.5	-18.7	
824.20	4.40	H	0.6	0.0	3.80	38.5	-34.6	
Mid Ch								
836.60	23.67	V	0.6	0.0	23.07	38.5	-15.4	
836.60	3.95	H	0.6	0.0	3.35	38.5	-35.1	
High Ch								
848.80	22.48	V	0.6	0.0	21.88	38.5	-16.6	
848.80	8.37	H	0.6	0.0	7.77	38.5	-30.7	
Rev. 3.17.11								

10.1.4. EGPRS 1900 (PCS Band)

High Frequency Fundamental Measurement Compliance Certification Services 5M Chamber B								
Company: Samsung Project #: 13U15226 Date: 06/15/13 Test Engineer: Kiya Kedida Configuration: EUT, X position with AC and HS Mode: GSM 1900 EGPRS								
Test Equipment:								
Receiving: Horn T59, and Chamber B SMA Cables								
Substitution: Horn T60 Substitution, 4ft SMA Cable (244639001) Warehouse								
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1.850	13.1	V	0.85	8.46	20.71	33.0	-12.3	
1.850	19.5	H	0.85	8.52	27.16	33.0	-5.8	
Mid Ch								
1.880	13.1	V	0.85	8.46	20.71	33.0	-12.3	
1.880	20.3	H	0.85	8.52	28.00	33.0	-5.0	
High Ch								
1.910	12.5	V	0.85	8.46	20.11	33.0	-12.9	
1.910	20.1	H	0.85	8.52	27.77	33.0	-5.2	
Rev. 3.17.11								

10.1.5. UMTS 850 REL 99 (Cellular Band)

High Frequency Substitution Measurement Compliance Certification Services Chamber B								
Company: Samsung Project #: 13I15226 Date: 06/18/13 Test Engineer: Steven Tran Configuration: EUT only, Y config Mode: WCDMA, Rel 99 850								
Test Equipment: Receiving: Sunol T243, and Chamber B N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 208947003) Warehouse.								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
826.40	16.06	V	0.6	0.0	15.46	38.5	-23.0	
826.40	-1.46	H	0.6	0.0	-2.06	38.5	-40.5	
Mid ch								
836.60	16.77	V	0.6	0.0	16.17	38.5	-22.3	
836.60	1.65	H	0.6	0.0	1.05	38.5	-37.4	
High Ch								
846.60	18.81	V	0.6	0.0	18.21	38.5	-20.2	
846.60	-0.77	H	0.6	0.0	-1.37	38.5	-39.8	
Rev. 3.17.11								

10.1.6. UMTS 850 HSDPA (Cellular Band)

High Frequency Substitution Measurement Compliance Certification Services Chamber B								
Company: Samsung Project #: 13I15226 Date: 06/18/13 Test Engineer: Steven Tran Configuration: EUT only, Y config Mode: WCDMA, HSDPA 850 MHz								
Test Equipment: Receiving: Sunol T243, and Chamber B N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 208947003) Warehouse.								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
826.40	16.87	V	0.6	0.0	16.27	38.5	-22.2	
826.40	-1.77	H	0.6	0.0	-2.37	38.5	-40.8	
Mid ch								
836.60	17.24	V	0.6	0.0	16.64	38.5	-21.8	
836.60	-0.50	H	0.6	0.0	-1.10	38.5	-39.5	
High Ch								
846.60	19.06	V	0.6	0.0	18.46	38.5	-20.0	
846.60	1.25	H	0.6	0.0	0.65	38.5	-37.8	
Rev. 3.17.11								

10.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

MODES TESTED

- GPRS, EGPRS
- UMTS REL 99, and HSDPA

RESULTS

10.2.1. GPRS (Cellular Band)

Compliance Certification Services									
Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		13I15226							
Date:		06/17/13							
Test Engineer:		Steven Tran							
Configuration:		Y position							
Mode:		Tx, 850MHz GPRS MODE							
Chamber		Pre-amplifier		Filter		Limit			
5m Chamber B		T34 8449B		Filter 1		Part 22			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, (824.2MHz)									
1.648	-9.3	V	3.0	37.4	1.0	-45.7	-13.0	-32.7	
2.473	-7.3	V	3.0	36.4	1.0	-42.7	-13.0	-29.7	
1.648	-6.4	H	3.0	37.4	1.0	-42.7	-13.0	-29.7	
2.473	-3.2	H	3.0	36.4	1.0	-38.6	-13.0	-25.6	
Mid Ch, (836.6MHz)									
1.673	-4.9	V	3.0	37.3	1.0	-41.3	-13.0	-28.3	
2.510	-7.3	V	3.0	36.4	1.0	-42.6	-13.0	-29.6	
1.673	-6.7	H	3.0	37.3	1.0	-43.0	-13.0	-30.0	
2.510	-1.9	H	3.0	36.4	1.0	-37.2	-13.0	-24.2	
High Ch, (848.8MHz)									
1.698	-6.6	V	3.0	37.3	1.0	-42.9	-13.0	-29.9	
2.546	-5.5	V	3.0	36.3	1.0	-40.8	-13.0	-27.8	
1.698	-1.4	H	3.0	37.3	1.0	-37.7	-13.0	-24.7	
2.546	-0.3	H	3.0	36.3	1.0	-35.7	-13.0	-22.7	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									

10.2.2. GPRS (PCS Band)

Compliance Certification Services									
Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		13I15226							
Date:		06/17/13							
Test Engineer:		Steven Tran							
Configuration:		X position with all peripherals							
Mode:		Tx, 1900MHz GPRS MODE							
Chamber		Pre-amplifier		Filter		Limit			
5m Chamber B		T34 8449B		Filter 1		Part 24			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.2MHz									
3.700	-21.5	V	3.0	35.4	1.0	-55.9	-13.0	-42.9	
5.551	-21.2	V	3.0	34.7	1.0	-54.9	-13.0	-41.9	
3.700	-21.6	H	3.0	35.4	1.0	-56.0	-13.0	-43.0	
5.551	-21.0	H	3.0	34.7	1.0	-54.7	-13.0	-41.7	
Mid Ch, 1880MHz									
3.760	-23.5	V	3.0	35.3	1.0	-57.8	-13.0	-44.8	
5.640	-21.5	V	3.0	34.7	1.0	-55.2	-13.0	-42.2	
3.760	-20.9	H	3.0	35.3	1.0	-55.2	-13.0	-42.2	
5.640	-20.7	H	3.0	34.7	1.0	-54.5	-13.0	-41.5	
High Ch, 1909.8MHz									
3.820	-22.7	V	3.0	35.3	1.0	-57.0	-13.0	-44.0	
5.729	-21.2	V	3.0	34.7	1.0	-54.9	-13.0	-41.9	
3.820	-23.2	H	3.0	35.3	1.0	-57.4	-13.0	-44.4	
5.729	-20.4	H	3.0	34.7	1.0	-54.1	-13.0	-41.1	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									

10.2.3. EGPRS (Cellular Band)

Compliance Certification Services									
Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		13I15226							
Date:		06/17/13							
Test Engineer:		Steven Tran							
Configuration:		Y position							
Mode:		Tx, 850MHz EGPRS MODE							
Chamber		Pre-amplifier		Filter		Limit			
5m Chamber B		T34 8449B		Filter 1		Part 22			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, (824.2MHz)									
1.648	-24.3	V	3.0	37.4	1.0	-60.7	-13.0	-47.7	
2.473	-21.6	V	3.0	36.4	1.0	-57.0	-13.0	-44.0	
1.648	-19.9	H	3.0	37.4	1.0	-56.3	-13.0	-43.3	
2.473	-16.5	H	3.0	36.4	1.0	-51.9	-13.0	-38.9	
Mid Ch, (836.6MHz)									
1.673	-24.1	V	3.0	37.3	1.0	-60.4	-13.0	-47.4	
2.510	-19.3	V	3.0	36.4	1.0	-54.6	-13.0	-41.6	
1.673	-22.4	H	3.0	37.3	1.0	-58.7	-13.0	-45.7	
2.510	-16.6	H	3.0	36.4	1.0	-51.9	-13.0	-38.9	
High Ch, (848.8MHz)									
1.698	-26.2	V	3.0	37.3	1.0	-62.5	-13.0	-49.5	
2.546	-18.5	V	3.0	36.3	1.0	-53.9	-13.0	-40.9	
1.698	-22.7	H	3.0	37.3	1.0	-59.0	-13.0	-46.0	
2.546	-12.7	H	3.0	36.3	1.0	-48.1	-13.0	-35.1	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									

10.2.4. EGPRS (PCS Band)

Compliance Certification Services									
Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		13I15226							
Date:		06/17/13							
Test Engineer:		Steven Tran							
Configuration:		X position with all peripherals							
Mode:		Tx, 1900MHz GPRS MODE							
Chamber		Pre-amplifier		Filter		Limit			
5m Chamber B		T34 8449B		Filter 1		Part 24			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.2MHz									
3.700	-21.5	V	3.0	35.4	1.0	-55.9	-13.0	-42.9	
5.551	-21.2	V	3.0	34.7	1.0	-54.9	-13.0	-41.9	
3.700	-21.6	H	3.0	35.4	1.0	-56.0	-13.0	-43.0	
5.551	-21.0	H	3.0	34.7	1.0	-54.7	-13.0	-41.7	
Mid Ch, 1880MHz									
3.760	-23.5	V	3.0	35.3	1.0	-57.8	-13.0	-44.8	
5.640	-21.5	V	3.0	34.7	1.0	-55.2	-13.0	-42.2	
3.760	-20.9	H	3.0	35.3	1.0	-55.2	-13.0	-42.2	
5.640	-20.7	H	3.0	34.7	1.0	-54.5	-13.0	-41.5	
High Ch, 1909.8MHz									
3.820	-22.7	V	3.0	35.3	1.0	-57.0	-13.0	-44.0	
5.729	-21.2	V	3.0	34.7	1.0	-54.9	-13.0	-41.9	
3.820	-23.2	H	3.0	35.3	1.0	-57.4	-13.0	-44.4	
5.729	-20.4	H	3.0	34.7	1.0	-54.1	-13.0	-41.1	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									

10.2.5. WCDMA REL 99 (Cellular Band)

UL Verification Services Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		13I15226							
Date:		06/19/13							
Test Engineer:		Steven Tran							
Configuration:		EUT with peripherals, Y config							
Mode:		TX, UMTS 850MHz, Rel 99							
Chamber		Pre-amplifier		Filter		Limit			
5m Chamber B		T145 8449B		Filter 1		FCC Part 22			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Channel (826.4MHz)									
1.653	-27.6	V	3.0	35.5	1.0	-62.2	-13.0	-49.2	
1.653	-26.6	H	3.0	35.5	1.0	-61.1	-13.0	-48.1	
Mid Channel (836.6MHz)									
1.673	-27.7	V	3.0	35.5	1.0	-62.3	-13.0	-49.3	
1.673	-27.3	H	3.0	35.5	1.0	-61.8	-13.0	-48.8	
High Channel (846.8MHz)									
1.694	-27.7	V	3.0	35.5	1.0	-62.3	-13.0	-49.3	
1.694	-27.2	H	3.0	35.5	1.0	-61.8	-13.0	-48.8	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									

10.2.6. WCDMA HSUPA (Cellular Band)

Compliance Certification Services									
Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		13I15226							
Date:		05/17/13							
Test Engineer:		Steven Tran							
Configuration:		EUT with all peripherals, Y position							
Mode:		Tx, 850MHz WCDMA HSDPA MODE							
Chamber		Pre-amplifier		Filter		Limit			
5m Chamber B		T145 8449B		Filter 1		FCC Part 22			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Channel (826.4MHz)									
1.653	-23.8	V	3.0	35.5	1.0	-58.3	-13.0	-45.3	
1.653	-22.5	H	3.0	35.5	1.0	-57.1	-13.0	-44.1	
Mid Channel (836.6MHz)									
1.673	-25.1	V	3.0	35.5	1.0	-59.7	-13.0	-46.7	
1.673	-24.8	H	3.0	35.5	1.0	-59.4	-13.0	-46.4	
High Channel (846.8MHz)									
1.694	-26.4	V	3.0	35.5	1.0	-60.9	-13.0	-47.9	
1.694	-25.4	H	3.0	35.5	1.0	-60.0	-13.0	-47.0	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									