


2. Sample Label

This drawing is property of SEC. Use or copy of this drawing without proper permission from the appropriate technical-document managing department is prohibited.

	1	2	3	4	5	6	7	8
			Rev. No	* RATED 값 1500 mA => 1000 mA 변경 (110823)				
A								
B								
C								
D								
E								
F								
G	Technical Description							
H	1. Use 'AI / PDF' provided by 'SAMSUNG' for letter and contents							
I	2. Background color is 'WHITE', letter color is 'BLACK' (reverse for SAMSUNG LOGO)							
J	3. Back side should be attached to release paper once adhesive is applied.							
K	4. No letter should be blur/smeared							
L	5. The production must be proceed after the approval of R&D Group							
	6. The product must be within approved sample's specification tolerance.							
	7. The product must be finished in a ROLL							
	8. Release paper must be unifiedn for material and color(blue)							
	9. Do not contain any substances which are specified in (OQA-2049).							
	MAT. J		OPF Laminating 16µ Adhesive 8µ WHITE POLYPROPYLENE 80µ Adhesive 25µ		FIN. J			Semi transparency OPP laminating + UVP Coating
	TITLE GT-S8600 LABEL-MAIN							
	UNIT	mm	DESIGNED	CHECKED	APPROVED	PROJECTION		
	TOLERANCE	+0.0 -0.1	Tae Hun Kim	Kyeong Hwan JO	June Sop Kim			
	SCALE	N/S				SHEET NO		1/1
	Vendor	HSINS	110811	110811	110811			
	ELECTRONICS		Doc. CODE		GH68-35646A			

3. FCC ID Label Location

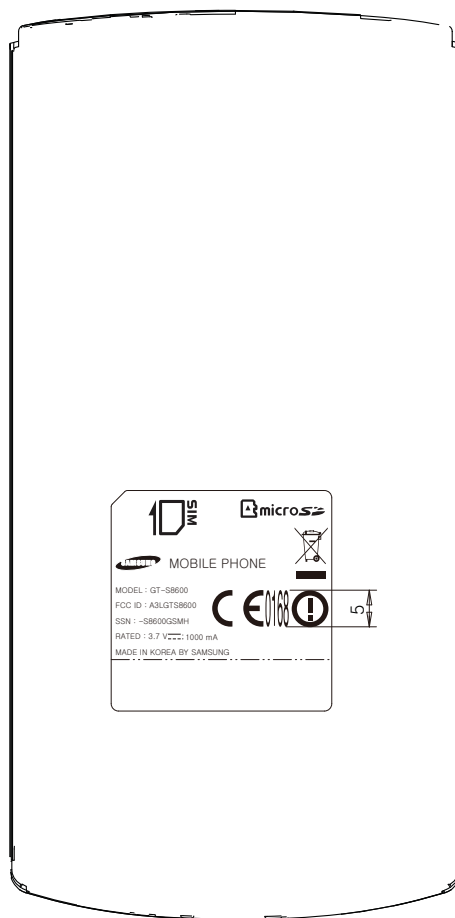

The label is placed inside the battery compartment