

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : W174R-D027
AGR No. : A173A-081
Applicant : Samsung Electronics Co Ltd
Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058
Manufacturer : Samsung Electronics Co Ltd
Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058
Type of Equipment : AWG (Advanced Wireless Gateway)
FCC ID. : A3LGXMC990CL
Model Name : GX-MC990CL
Serial number : N/A
Total page of Report : 218 pages (including this page)
Date of Incoming : March 10, 2017
Date of issue : April 11, 2017

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:



Ki-Hong, Nam / Asst, Chief Engineer
ONETECH Corp.

Approved by:



Keun-Young, Choi / Vice President
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	7
2. TEST SUMMARY	8
2.1 TEST ITEMS AND RESULTS	8
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	8
2.3 RELATED SUBMITTAL(S) / GRANT(S)	8
2.4 PURPOSE OF THE TEST	8
2.5 TEST METHODOLOGY.....	8
2.6 TEST FACILITY.....	8
3. GENERAL INFORMATION	9
3.1 PRODUCT DESCRIPTION.....	9
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	11
4. EUT MODIFICATIONS.....	11
5. SYSTEM TEST CONFIGURATION	12
5.1 JUSTIFICATION.....	12
5.2 PERIPHERAL EQUIPMENT	12
5.4 CONFIGURATION OF TEST SYSTEM.....	14
5.5 ANTENNA REQUIREMENT	14
6. PRELIMINARY TEST	15
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	15
6.2 GENERAL RADIATED EMISSIONS TESTS	15
7. MINIMUM 6 DB BANDWIDTH	16
7.1 OPERATING ENVIRONMENT	16
7.2 TEST SET-UP	16
7.3 TEST EQUIPMENT USED.....	16
7.4 TEST DATA FOR 802.11B WLAN MODE.....	17
7.4.1 Test data for Antenna 0	17
7.4.2 Test data for Antenna 1	19
7.4.3 Test data for Antenna 2	21
7.5 TEST DATA FOR 802.11G WLAN MODE	23
7.5.1 Test data for Antenna 0	23
7.5.2 Test data for Antenna 1	25

7.5.3 Test data for Antenna 2	27
7.6 TEST DATA FOR 802.11N_HT20 WLAN MODE	29
7.6.1 Test data for Antenna 0	29
7.6.2 Test data for Antenna 1	31
7.6.3 Test data for Antenna 2	33
7.7 TEST DATA FOR 802.11N_HT40 WLAN MODE	35
7.7.1 Test data for Antenna 0	35
7.7.2 Test data for Antenna 1	37
7.7.3 Test data for Antenna 2	39
8. 99 % OCCUPIED BANDWIDTH.....	41
8.1 OPERATING ENVIRONMENT	41
8.2 TEST SET-UP	41
8.3 TEST EQUIPMENT USED	41
8.4 TEST DATA FOR 802.11B WLAN MODE.....	42
8.4.1 Test data for Antenna 0	42
8.4.2 Test data for Antenna 1	44
8.4.3 Test data for Antenna 2	46
8.5 TEST DATA FOR 802.11G WLAN MODE	48
8.5.1 Test data for Antenna 0	48
8.5.2 Test data for Antenna 1	50
8.5.3 Test data for Antenna 2	52
8.6 TEST DATA FOR 802.11N_HT20 WLAN MODE.....	54
8.6.1 Test data for Antenna 0	54
8.6.2 Test data for Antenna 1	56
8.6.3 Test data for Antenna 2	58
8.7 TEST DATA FOR 802.11N_HT40 WLAN MODE.....	60
8.7.1 Test data for Antenna 0	60
8.7.2 Test data for Antenna 1	62
8.7.3 Test data for Antenna 2	64
9. MAXIMUM PEAK OUTPUT POWER.....	66
9.1 OPERATING ENVIRONMENT	66
9.2 TEST SET-UP	66
9.3 TEST EQUIPMENT USED	66
9.4 TEST DATA FOR 802.11B WLAN MODE.....	67
9.4.1 Test data for Antenna 0	67
9.4.2 Test data for Antenna 1	69
9.4.3 Test data for Antenna 2	71

9.4.4 Test data for Multiple transmit.....	73
9.5 TEST DATA FOR 802.11G WLAN MODE	74
9.5.1 Test data for Antenna 0	74
9.5.2 Test data for Antenna 1	76
9.5.3 Test data for Antenna 2	78
9.5.4 Test data for Multiple transmit.....	80
9.6 TEST DATA FOR 802.11N_HT20 WLAN MODE	81
9.6.1 Test data for Antenna 0	81
9.6.2 Test data for Antenna 1	83
9.6.3 Test data for Antenna 2	85
9.6.4 Test data for Multiple transmit.....	87
9.7 TEST DATA FOR 802.11N_HT40 WLAN MODE	88
9.7.1 Test data for Antenna 0	88
9.7.2 Test data for Antenna 1	90
9.7.3 Test data for Antenna 2	92
9.7.4 Test data for Multiple transmit.....	94
10. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	95
10.1 OPERATING ENVIRONMENT	95
10.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	95
10.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	95
10.4 TEST EQUIPMENT USED.....	95
10.5 TEST DATA FOR CONDUCTED EMISSION	96
10.5.1 Test data for 802.11b WLAN Mode.....	96
10.5.2 Test data for 802.11g WLAN Mode.....	111
10.5.3 Test data for 802.11n_HT20 WLAN Mode.....	126
10.5.4 Test data for 802.11n_HT40 WLAN Mode.....	141
10.6 TEST DATA FOR RADIATED EMISSION.....	156
10.6.1 Radiated Emission which fall in the Restricted Band.....	156
10.6.2 Radiated Emission which fall in the Band Edge	164
10.6.3 Spurious & Harmonic Radiated Emission.....	171
11. PEAK POWER SPECTRUL DENSITY	181
11.1 OPERATING ENVIRONMENT	181
11.2 TEST SET-UP	181
11.3 TEST EQUIPMENT USED.....	181
11.4 TEST DATA FOR 802.11B WLAN MODE.....	182
11.4.1 Test data for Antenna 0	182
11.4.2 Test data for Antenna 1	184

11.4.3 Test data for Antenna 2	186
11.4.4 Test data for Multiple transmit.....	188
11.5 TEST DATA FOR 802.11G WLAN MODE	189
11.5.1 Test data for Antenna 0	189
11.5.2 Test data for Antenna 1	191
11.5.3 Test data for Antenna 2	193
11.5.4 Test data for Multiple transmit.....	195
11.6 TEST DATA FOR 802.11N_HT20 WLAN MODE.....	196
11.6.1 Test data for Antenna 0	196
11.6.2 Test data for Antenna 1	198
11.6.3 Test data for Antenna 2	200
11.6.4 Test data for Multiple transmit.....	202
11.7 TEST DATA FOR 802.11N_HT40 WLAN MODE.....	203
11.7.1 Test data for Antenna 0	203
11.7.2 Test data for Antenna 1	205
11.7.3 Test data for Antenna 2	207
11.7.4 Test data for Multiple transmit.....	209
12. DUTY CYCLE	210
12.1 OPERATING ENVIRONMENT	210
12.2 TEST SET-UP	210
12.3 TEST EQUIPMENT USED.....	210
12.4 TEST DATA FOR WORST CASE.....	211
12.5 TEST DATA.....	212
13. RADIATED EMISSION TEST	213
13.1 OPERATING ENVIRONMENT	213
13.2 TEST SET-UP	213
13.3 TEST EQUIPMENT USED.....	213
13.4 TEST DATA FOR 802.11B WLAN MODE AND 802.11A RLAN MODE	214
13.4.1 Test data for 30 MHz ~ 1 GHz	214
13.4.2 Test data for Below 30 MHz	215
13.4.3 Test data for above 1 GHz	215
14. CONDUCTED EMISSION TEST.....	216
14.1 OPERATING ENVIRONMENT	216
14.2 TEST SET-UP	216
14.3 TEST EQUIPMENT USED.....	216
14.4 TEST DATA FOR 802.11B WLAN MODE AND 802.11A RLAN MODE	217

REVISION HISTORY

Issued Report No.	Issued Date	Revisions	Effect Section
W174R-D027	April 11, 2017	Initial Issue	All

DOCUMENT HISTORY

Revision No.	Issued Date	Revisions	Effect Section
Original	April 11, 2017	Initial Issue	-
Revision 01	May 15, 2017	Revise Data (Section 2.1 Product Description) Added Test(Section 8. 99 % Occupied Bandwidth) Additional Test(Section 9. Maximum Peak Output Power) Provide Plots(Section 10.6 Test Data For Radiated Emission)	Section 2.1, Section 8, Section 9. Section 10.
Revision 02	May 17, 2017	Revise Test set-up (Section 9. Maximum Peak Output Power)	Section 9.2
Revision 03	May 23, 2017	Re-Test(Section 8. 99 % Occupied Bandwidth, Section 9. MAXIMUM PEAK OUTPUT POWER Section 10.5 TEST DATA FOR CONDUCTED EMISSION) Provide Plots(Section 10.6.2 Radiated Emission which fall in the Band Edge) Additional Test(Section 12. DUTY CYCLE) Revise Remark 4(Section 9.4.4, 9.5.4, 9.6.4, 9.7.4) Revise Remark 2(Section 11.4.4, 11.5.4, 11.6.4, 11.7.4)	Section 8, Section 9, Section 10.5 , Section 10.6.2, Section 12, Remark 2, Remark 4

1. VERIFICATION OF COMPLIANCE

Applicant : Samsung Electronics Co Ltd
Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058
Contact Person : Chan Ho Youn / General Manager
Telephone No. : 973-808-6362
FCC ID : A3LGXMC990CL
Model Name : GX-MC990CL
Brand Name : -
Serial Number : N/A
Date : April 11, 2017

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	AWG (Advanced Wireless Gateway)
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 DTS Meas Guidance
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
	99 % Occupied Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-4617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The Samsung Electronics Co Ltd, Model GX-MC990CL (referred to as the EUT in this report) is a AWG (Advanced Wireless Gateway). Product specification information described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	AWG (Advanced Wireless Gateway)		
FREQUENCY RANGE	WLAN 2.4 GHz Band	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))	
		2 422 MHz ~ 2 452 MHz (802.11n(HT40))	
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
			5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
			5 210 MHz (802.11ac(VHT80))
		5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))
			5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))
			5 775 MHz (802.11ac(VHT80))
MAX. RF OUTPUT POWER	WLAN 2.4 GHz Band	Antenna 0	Wi-Fi 802.11b (16.38 dBm) Wi-Fi 802.11g (20.09 dBm) Wi-Fi 802.11n(HT20) (20.12 dBm) Wi-Fi 802.11n(HT40) (21.87 dBm)
		Antenna 1	Wi-Fi 802.11b (16.46 dBm) Wi-Fi 802.11g (20.26 dBm) Wi-Fi 802.11n(HT20) (21.20 dBm) Wi-Fi 802.11n(HT40) (22.39 dBm)
		Antenna 2	Wi-Fi 802.11b (16.56 dBm) Wi-Fi 802.11g (20.99 dBm) Wi-Fi 802.11n(HT20) (21.28 dBm) Wi-Fi 802.11n(HT40) (21.74 dBm)
		Multiple transmit	Wi-Fi 802.11b (21.24 dBm) Wi-Fi 802.11g (25.24 dBm) Wi-Fi 802.11n(HT20) (25.67 dBm) Wi-Fi 802.11n(HT40) (26.78 dBm)

MAX. RF OUTPUT POWER	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	Antenna 0	Wi-Fi 802.11a (14.17 dBm) Wi-Fi 802.11n(HT20) (13.67 dBm) Wi-Fi 802.11n(HT40) (14.90 dBm) Wi-Fi 802.11ac(HT80) (1.62 dBm)
			Antenna 1	Wi-Fi 802.11a (12.41 dBm) Wi-Fi 802.11n(HT20) (12.69 dBm) Wi-Fi 802.11n(HT40) (14.14 dBm) Wi-Fi 802.11ac(HT80) (0.97 dBm)
			Antenna 2	Wi-Fi 802.11a (12.05 dBm) Wi-Fi 802.11n(HT20) (12.35 dBm) Wi-Fi 802.11n(HT40) (13.97 dBm) Wi-Fi 802.11ac(HT80) (0.59 dBm)
			Antenna 3	Wi-Fi 802.11a (13.14 dBm) Wi-Fi 802.11n(HT20) (13.63 dBm) Wi-Fi 802.11n(HT40) (15.06 dBm) Wi-Fi 802.11ac(HT80) (2.32 dBm)
			Multiple transmit	Wi-Fi 802.11a (18.99 dBm) Wi-Fi 802.11n(HT20) (19.14 dBm) Wi-Fi 802.11n(HT40) (20.56 dBm) Wi-Fi 802.11ac(HT80) (7.45 dBm)
		5 725 MHz ~ 5 850 MHz Band	Antenna 0	Wi-Fi 802.11a (11.45 dBm) Wi-Fi 802.11n(HT20) (15.49 dBm) Wi-Fi 802.11n(HT40) (12.28 dBm) Wi-Fi 802.11ac(HT80) (3.65 dBm)
			Antenna 1	Wi-Fi 802.11a (12.65 dBm) Wi-Fi 802.11n(HT20) (15.78 dBm) Wi-Fi 802.11n(HT40) (13.38 dBm) Wi-Fi 802.11ac(HT80) (4.45 dBm)
			Antenna 2	Wi-Fi 802.11a (13.94 dBm) Wi-Fi 802.11n(HT20) (15.99 dBm) Wi-Fi 802.11n(HT40) (12.71 dBm) Wi-Fi 802.11ac(HT80) (3.85 dBm)
			Antenna 3	Wi-Fi 802.11a (14.78 dBm) Wi-Fi 802.11n(HT20) (13.93 dBm) Wi-Fi 802.11n(HT40) (13.38 dBm) Wi-Fi 802.11ac(HT80) (4.90 dBm)
			Multiple transmit	Wi-Fi 802.11a (19.41 dBm) Wi-Fi 802.11n(HT20) (22.01 dBm) Wi-Fi 802.11n(HT40) (18.98 dBm) Wi-Fi 802.11ac(HT80) (10.26 dBm)

MODULATION TYPE	WLAN 2.4 GHz Band	DSSS Modulation(DBPSK/DQPSK/CCK)	
	WLAN 5 GHz Band	OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	
ANTENNA TYPE	WLAN 2.4 GHz Band	1.60 dBi	
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz	2.80 dBi
		5 725 MHz ~ 5 850 MHz	5.0 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)		40 MHz, 54 MHz	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Samsung Electronics Co Ltd	DATA_GW_MAIN	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
GX-MC990CL	Samsung Electronics Co Ltd	AWG (Advanced Wireless Gateway) (EUT)	TEST JIG
ProBooks 650 G2	H.P.	Notebook PC	TEST JIG
JIG	N/A	TEST JIG	EUT / Notebook PC
A3514_FPNT	POWERNET CORPORATION	AC/DC ADAPTER	EUT

5.3 Mode of operation during the test

Modulation	DATA RATE	OUTPUT POWER[dBm]		
		Ant 0	Ant 1	Ant 2
802.11 b (Middle Channel)	1 Mbps	16.38	16.46	16.56
	2 Mbps	16.21	16.35	16.45
	5.5 Mbps	16.10	16.17	16.29
	11 Mbps	15.88	15.79	15.98
802.11g (Middle Channel)	6 Mbps	20.09	20.26	20.99
	9 Mbps	19.94	19.88	20.76
	12 Mbps	19.70	19.61	20.59
	18 Mbps	19.58	19.25	20.28
	24 Mbps	19.18	19.02	19.96
	36 Mbps	19.02	18.68	19.63
	48 Mbps	18.69	18.38	19.24
	54 Mbps	18.52	18.20	18.90
HT 20 (Middle Channel)	6.5 Mbps	20.12	21.2	21.28
	13 Mbps	19.76	20.93	21.06
	19.5 Mbps	19.61	20.82	20.75
	26 Mbps	19.42	20.61	20.44
	39 Mbps	19.15	20.22	20.24
	52 Mbps	18.85	20.09	20.05
	58.5 Mbps	18.58	19.80	19.79
	65 Mbps	18.31	19.43	19.50
HT 40 (Middle Channel)	13.5 Mbps	21.87	22.39	21.74
	27 Mbps	21.70	22.18	21.34
	40.5 Mbps	21.56	22.00	21.06
	54 Mbps	21.37	21.71	20.87
	81 Mbps	21.21	21.50	20.51
	108 Mbps	20.82	21.11	20.37
	121.5 Mbps	20.66	20.94	20.21
	135 Mbps	20.34	20.78	19.90

The worse case data rate for each modulation is determined 1 Mbps(Ant.0/Ant.1/Ant.2) for IEEE 802.11b, 6 Mbps(Ant.0/Ant.1/Ant.2) for IEEE 802.11g, 6.5 Mbps(Ant.0/Ant.1/Ant.2) for HT20, 13.5 Mbps(Ant.0/Ant.1/Ant.2) for HT40.

5.4 Configuration of Test System

Line Conducted Test: The EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 m Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is WLAN PCB antenna, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
Relative humidity : 41 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.



7.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV40	Rohde & Schwarz	Signal Analyzer	101009	May 31, 2016 (1Y)

All test equipment used is calibrated on a regular basis.

7.4 Test data for 802.11b WLAN Mode

7.4.1 Test data for Antenna 0

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 412	8.49	0.50	7.99
Middle	2 442	8.99	0.50	8.49
High	2 462	8.47	0.50	7.97

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

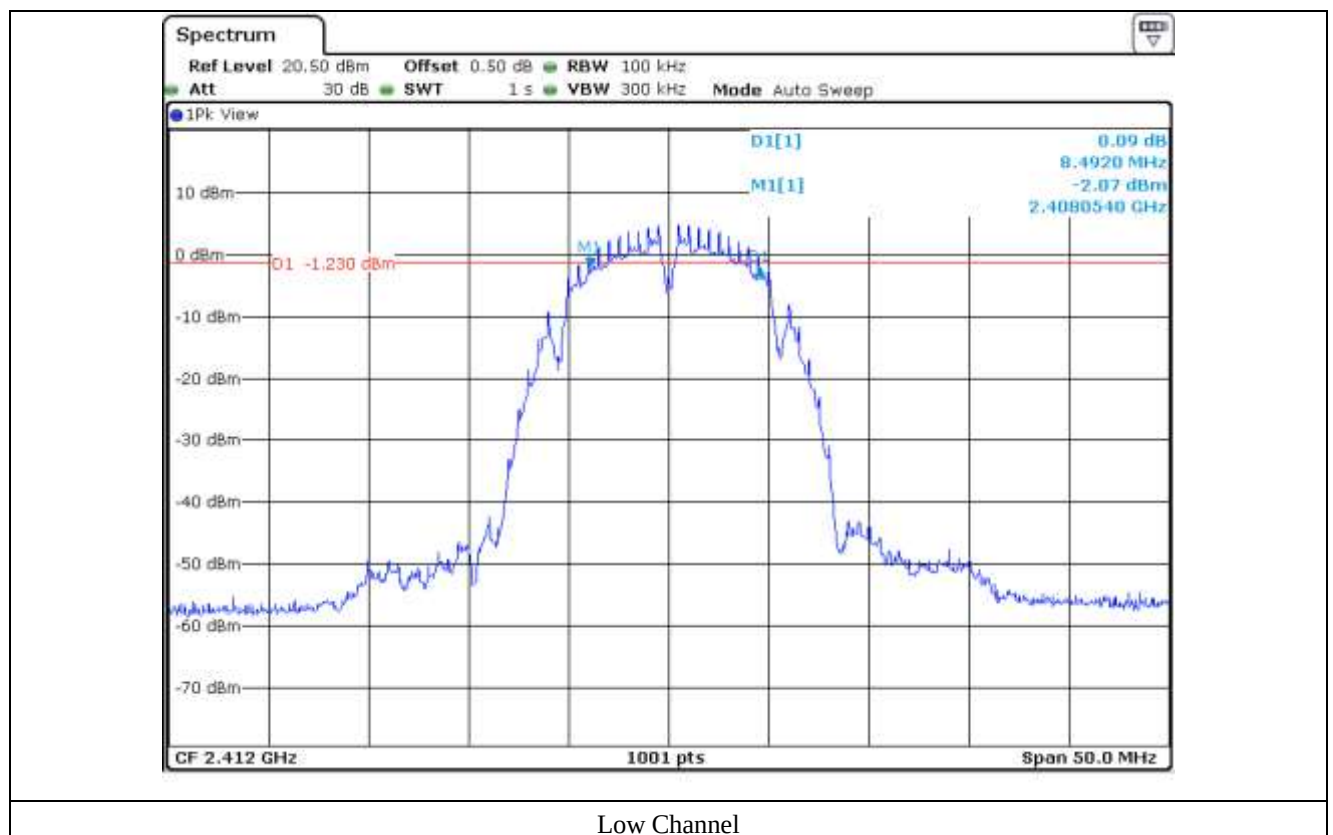

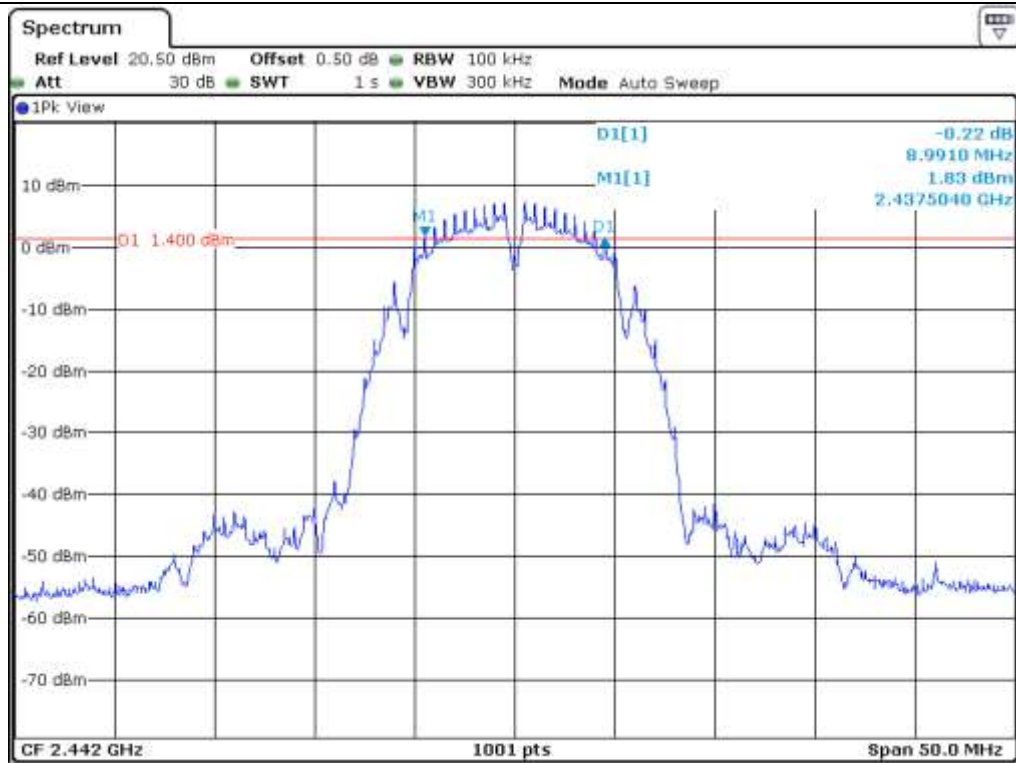

Middle Channel

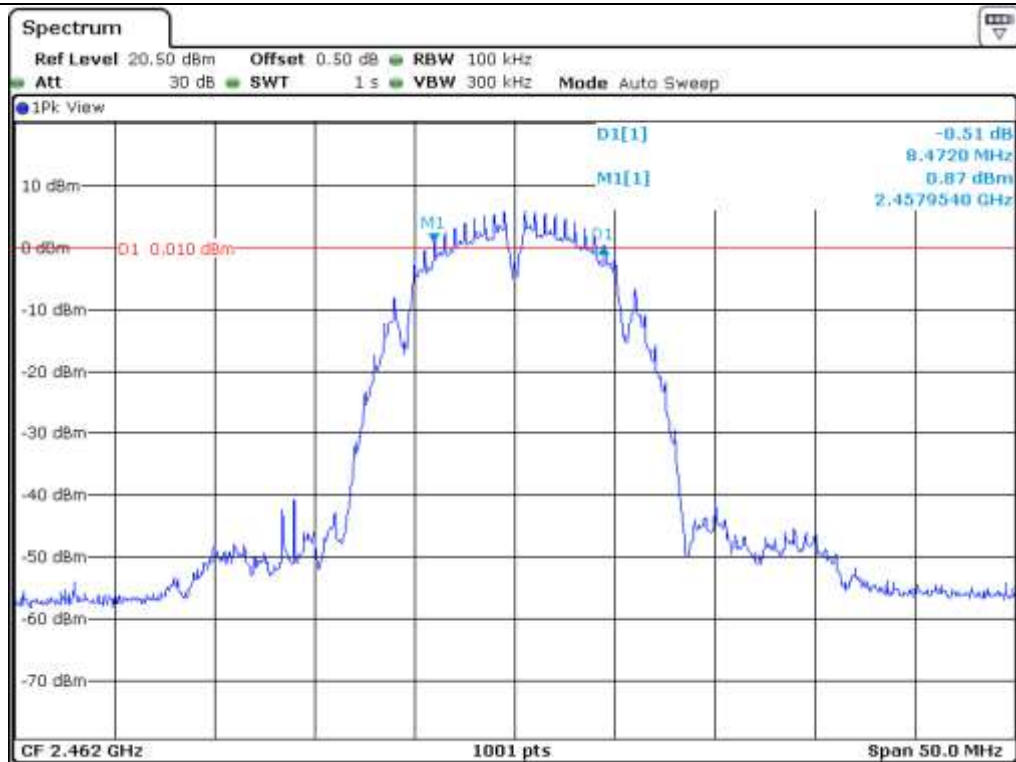

High Channel

7.4.2 Test data for Antenna 1

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 412	8.39	0.50	7.89
Middle	2 442	8.94	0.50	8.44
High	2 462	8.52	0.50	8.02

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

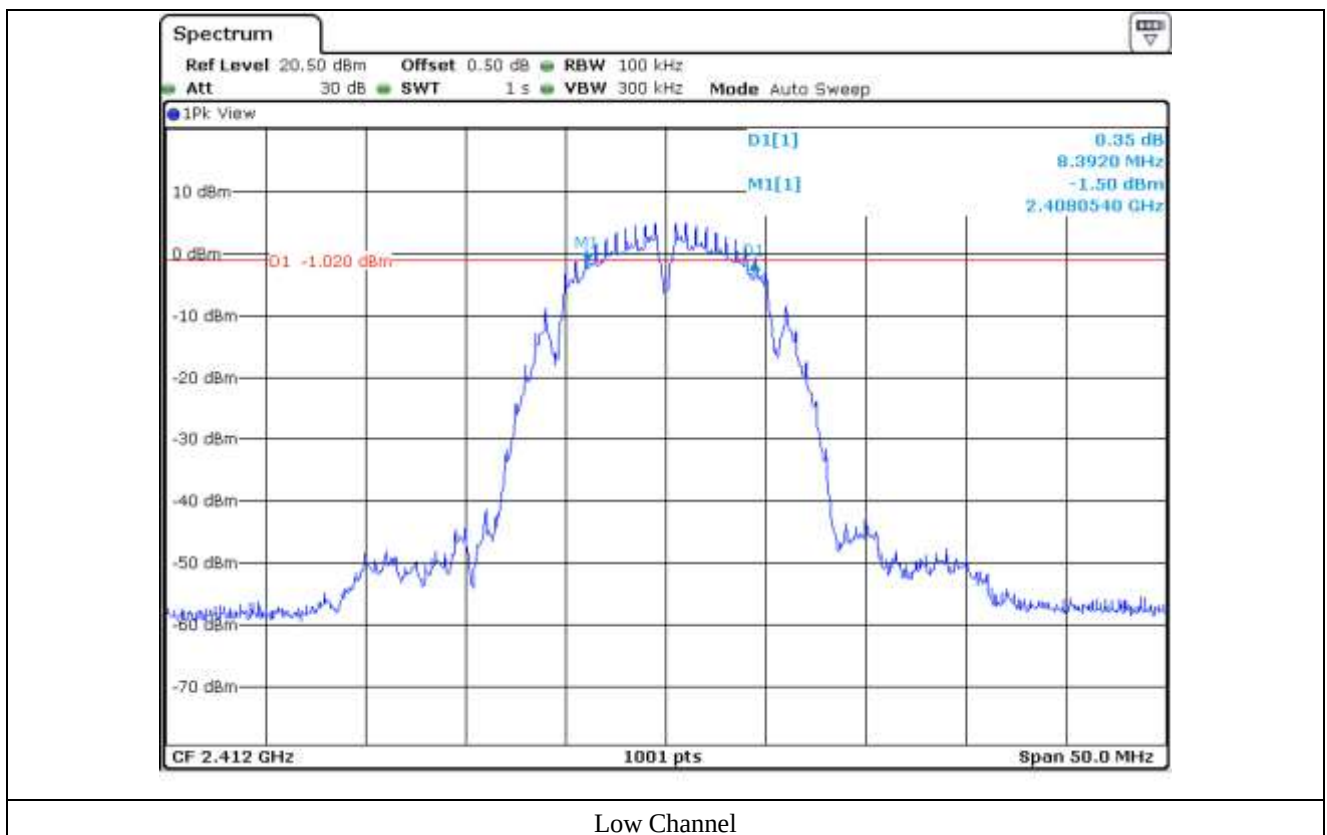

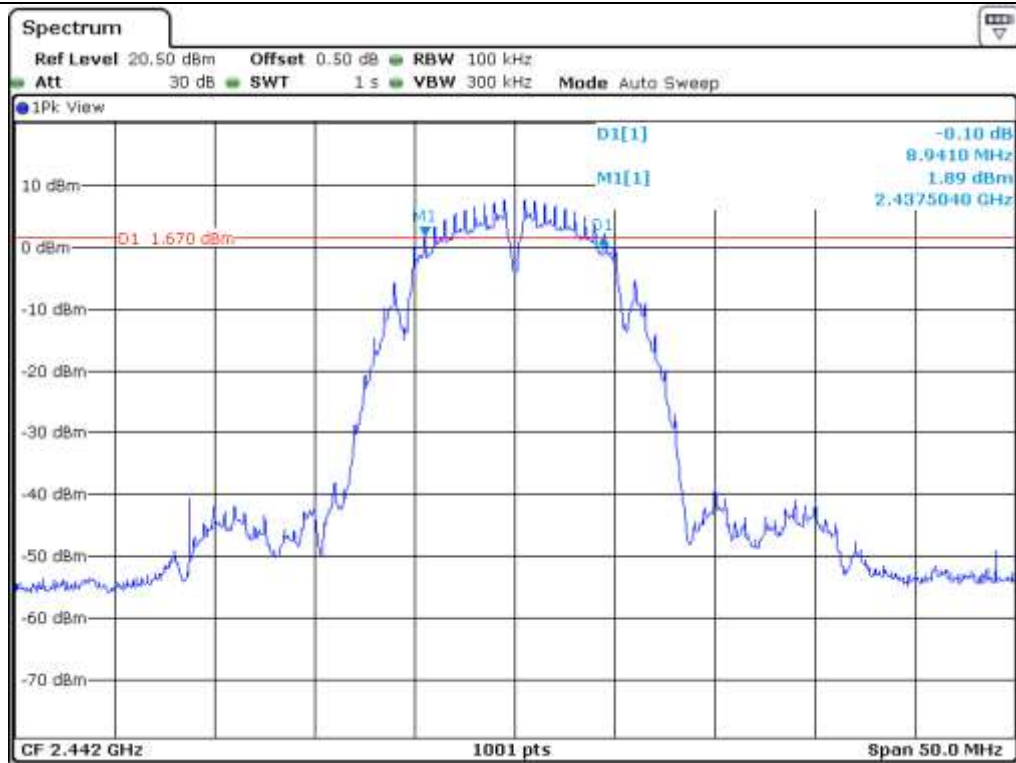

Middle Channel

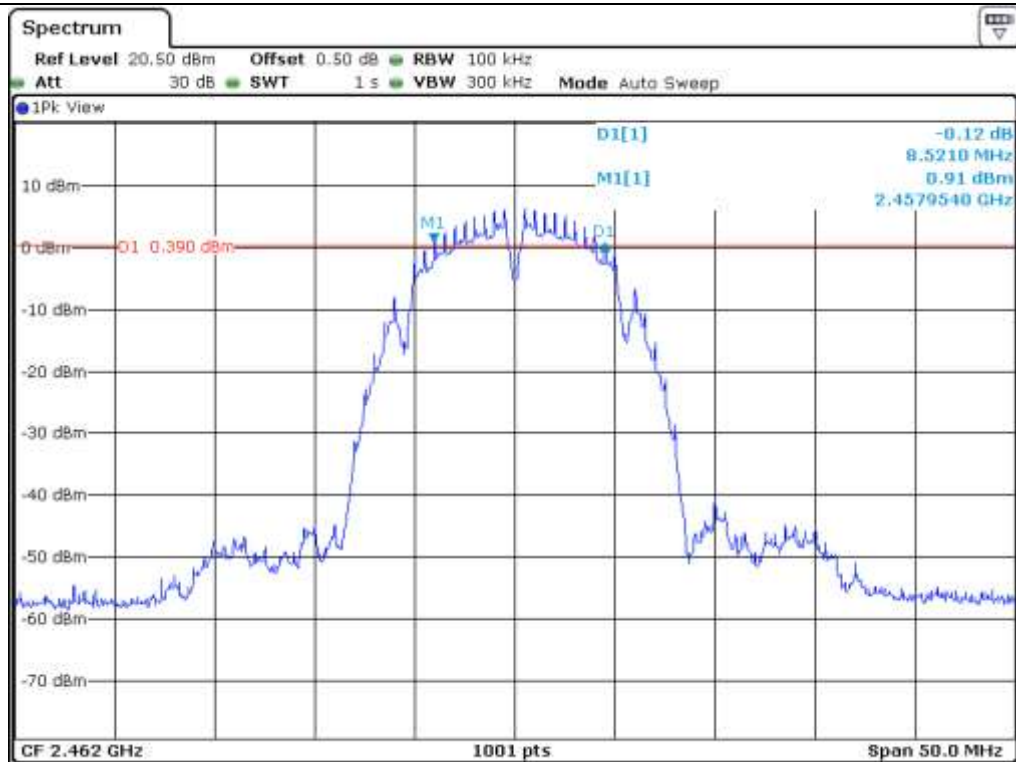

High Channel

7.4.3 Test data for Antenna 2

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 412	8.49	0.50	7.99
Middle	2 442	8.99	0.50	8.49
High	2 462	8.92	0.50	8.42

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

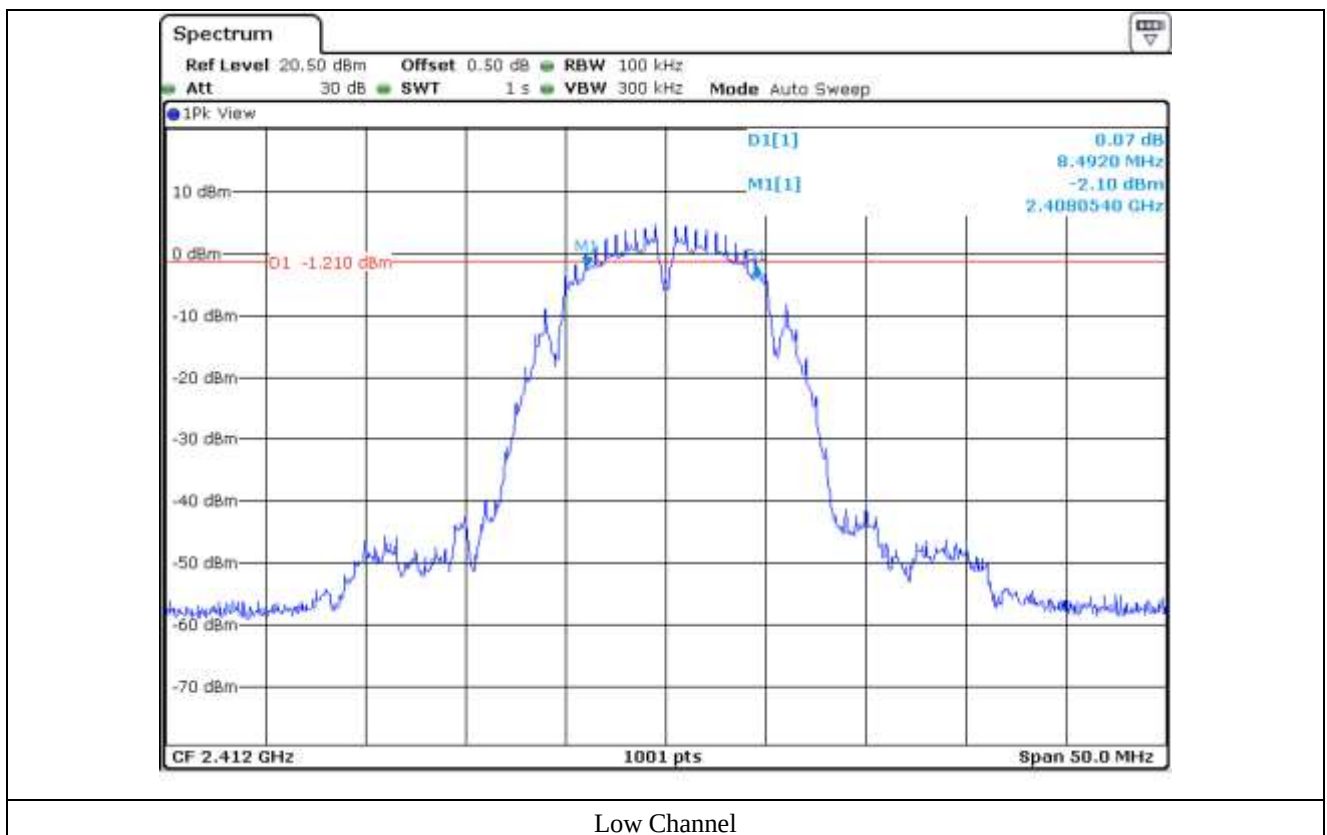

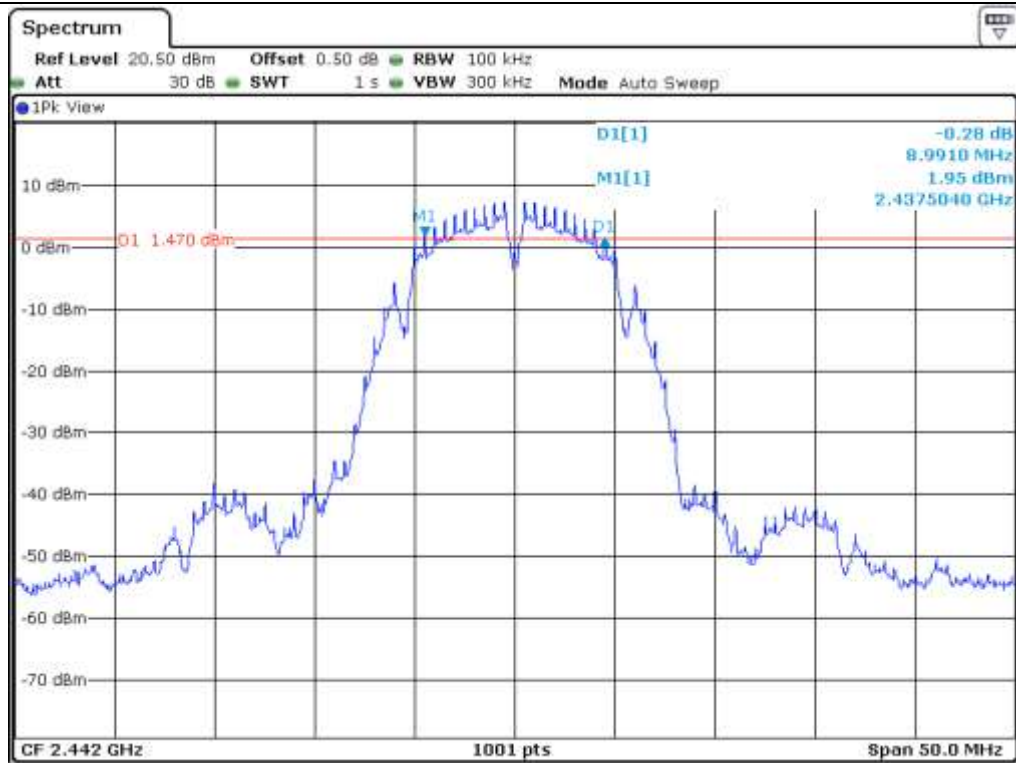

Middle Channel

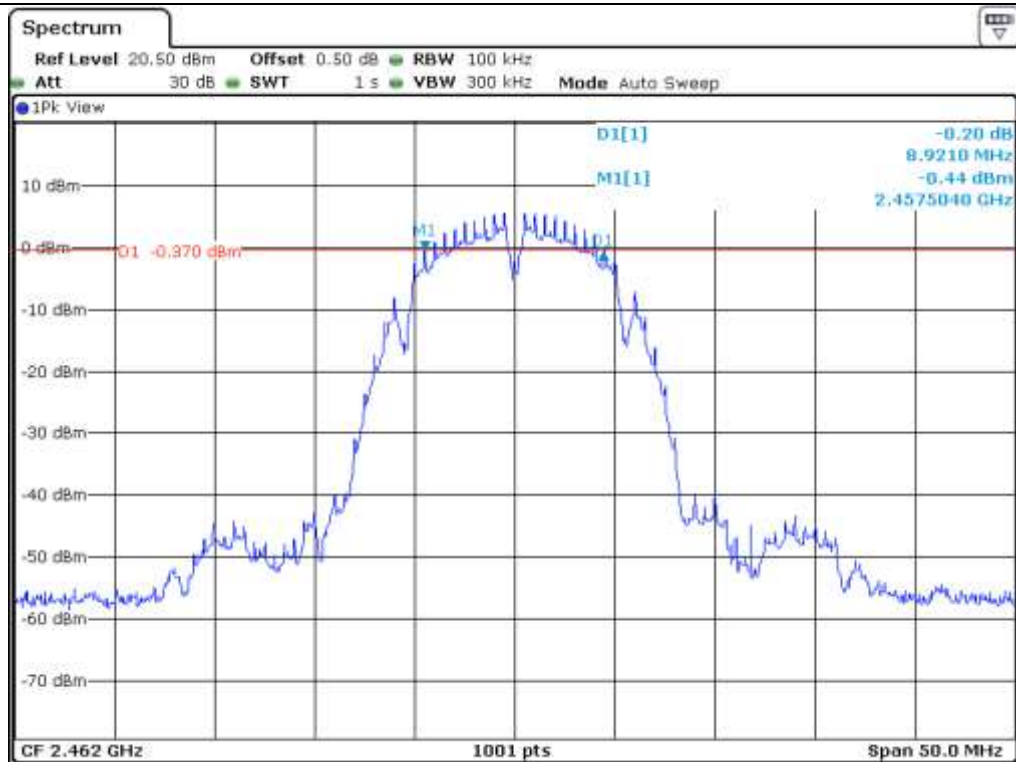

High Channel

7.5 Test data for 802.11g WLAN Mode

7.5.1 Test data for Antenna 0

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 412	15.78	0.50	15.28
Middle	2 442	16.35	0.50	15.85
High	2 462	16.36	0.50	15.86

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

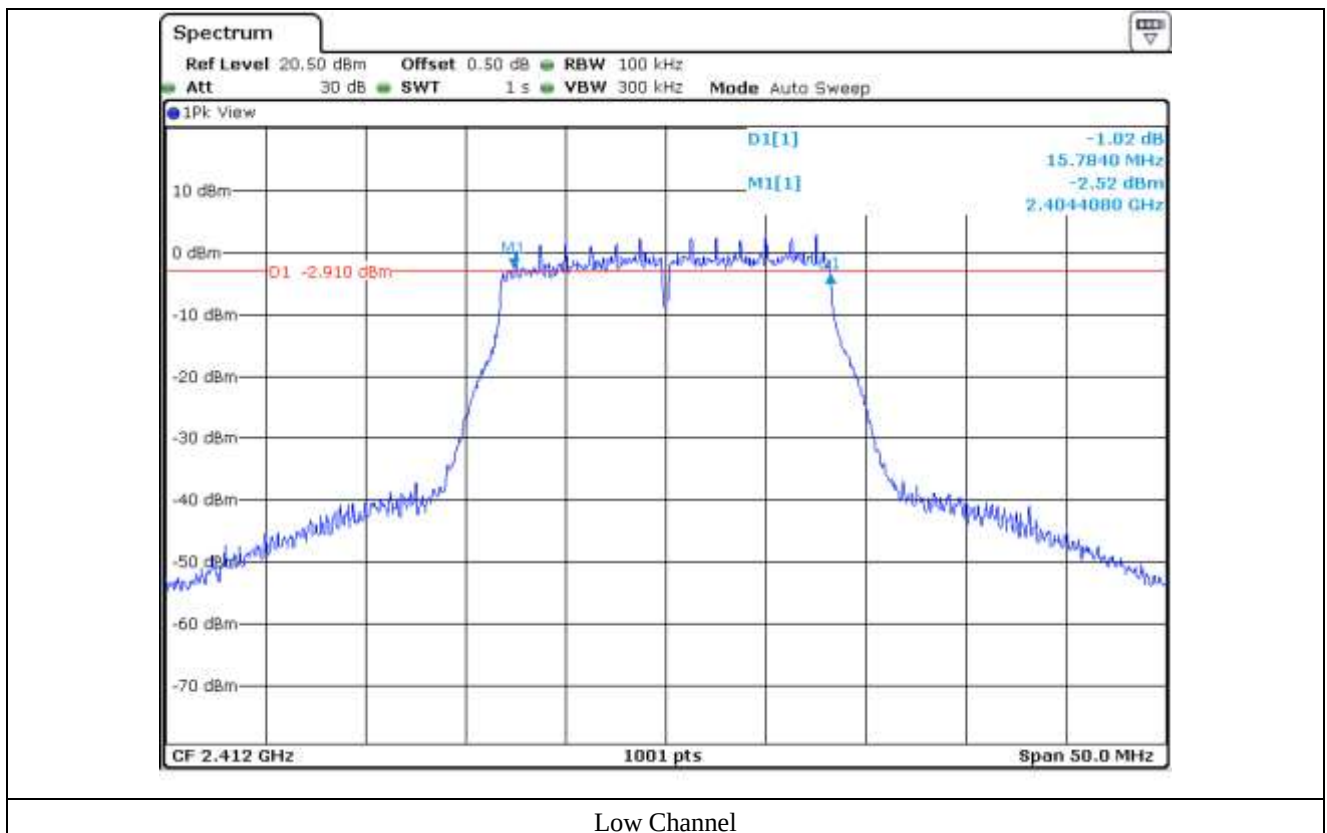

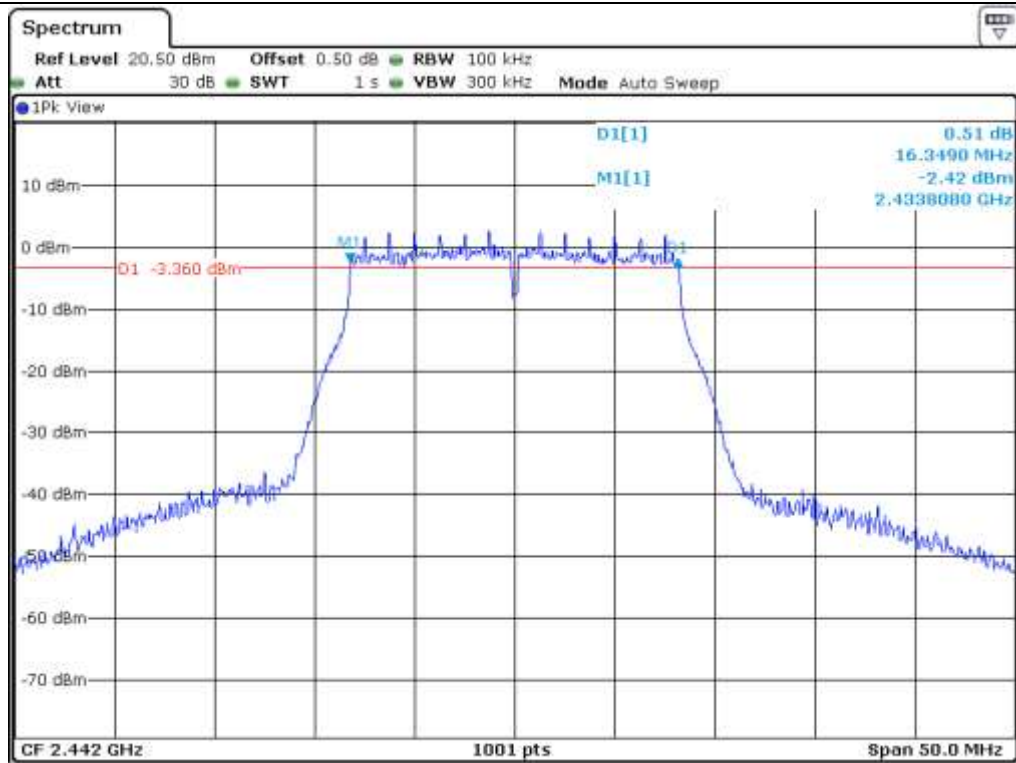

Middle Channel

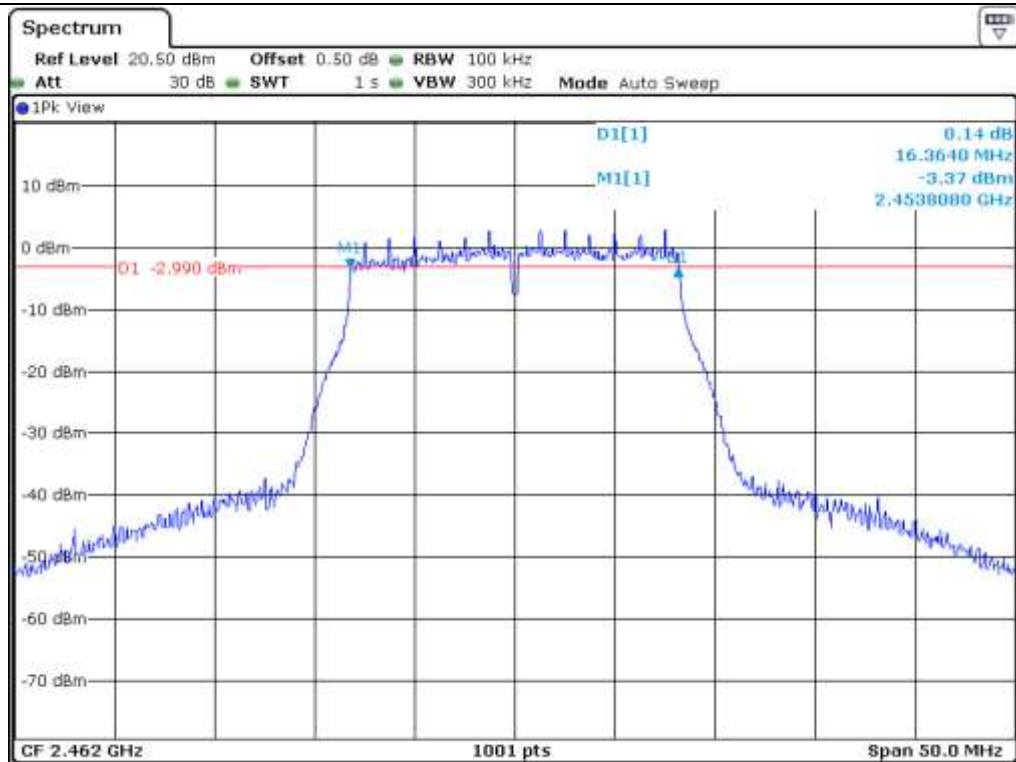

High Channel

-. Test Result : Pass

Remark. Margin = Measured Value - Limit

Spectrum

Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz
 Att 30 dB SWT 1 s VBW 300 kHz Mode Auto Sweep


1Pk View

D1[1] -0.57 dB
 15.6340 MHz
 M1[1] -2.36 dBm
 2.4044080 GHz


D1 -2.950 dBm

CF 2.412 GHz 1001 pts Span 50.0 MHz

Low Channel

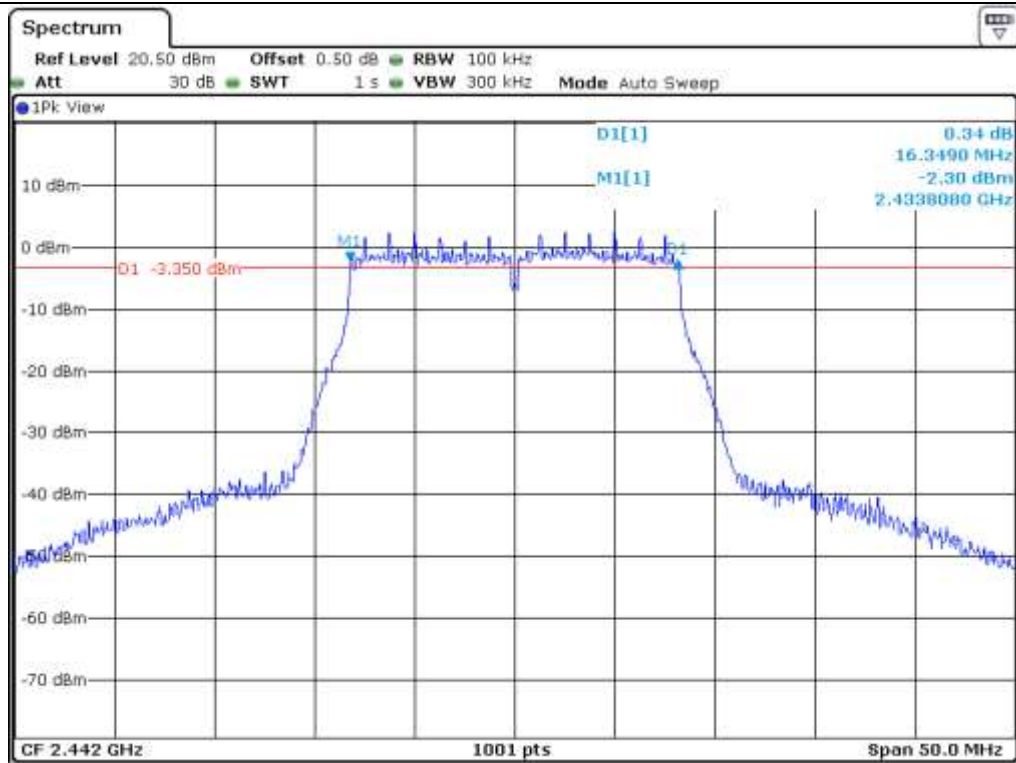

Middle Channel

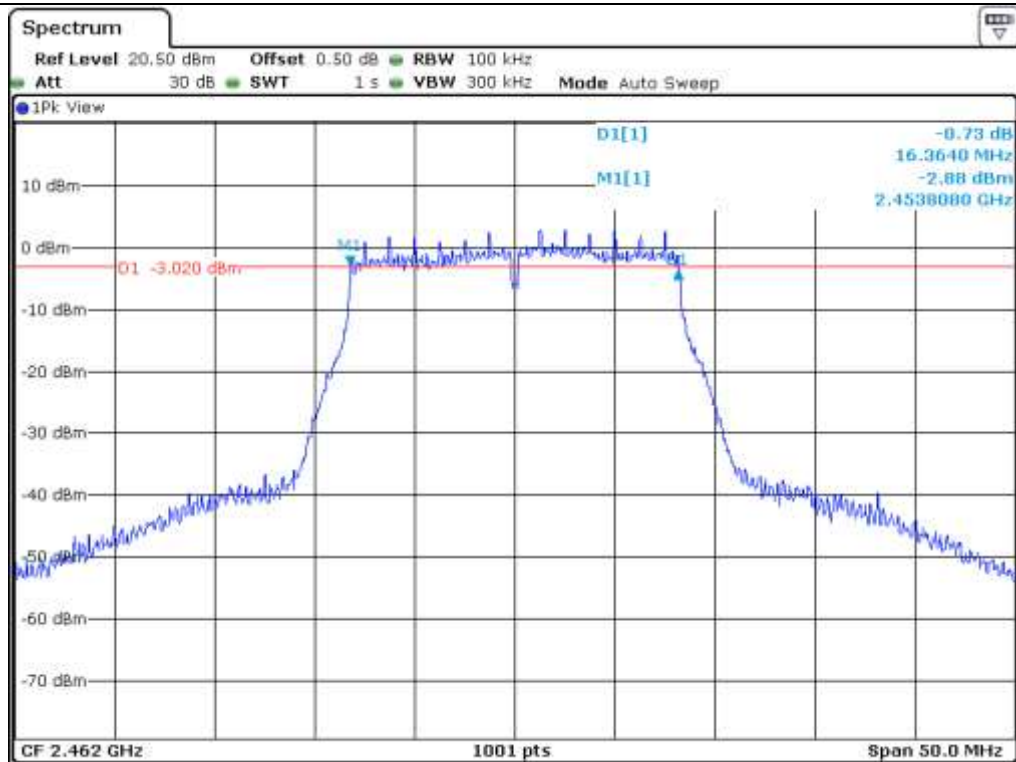

High Channel

7.5.3 Test data for Antenna 2

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 412	16.37	0.50	15.87
Middle	2 442	16.43	0.50	15.93
High	2 462	16.46	0.50	15.96

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

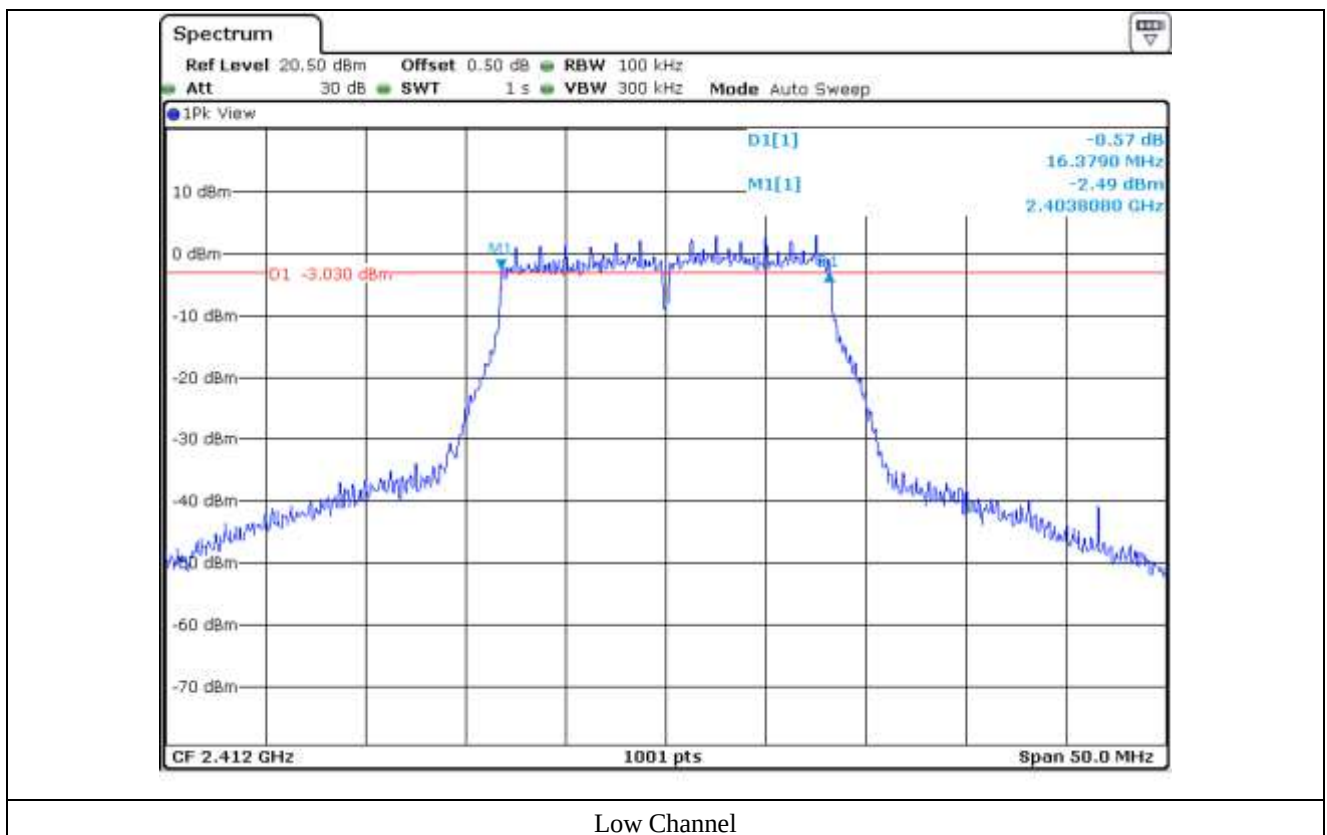

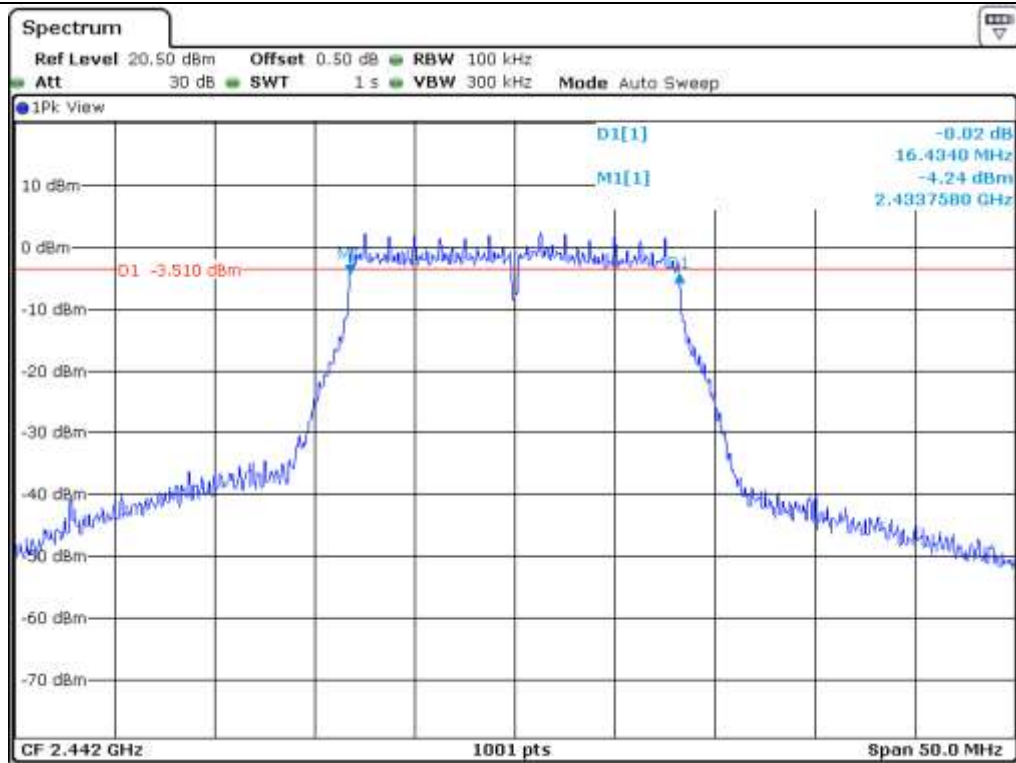

Middle Channel

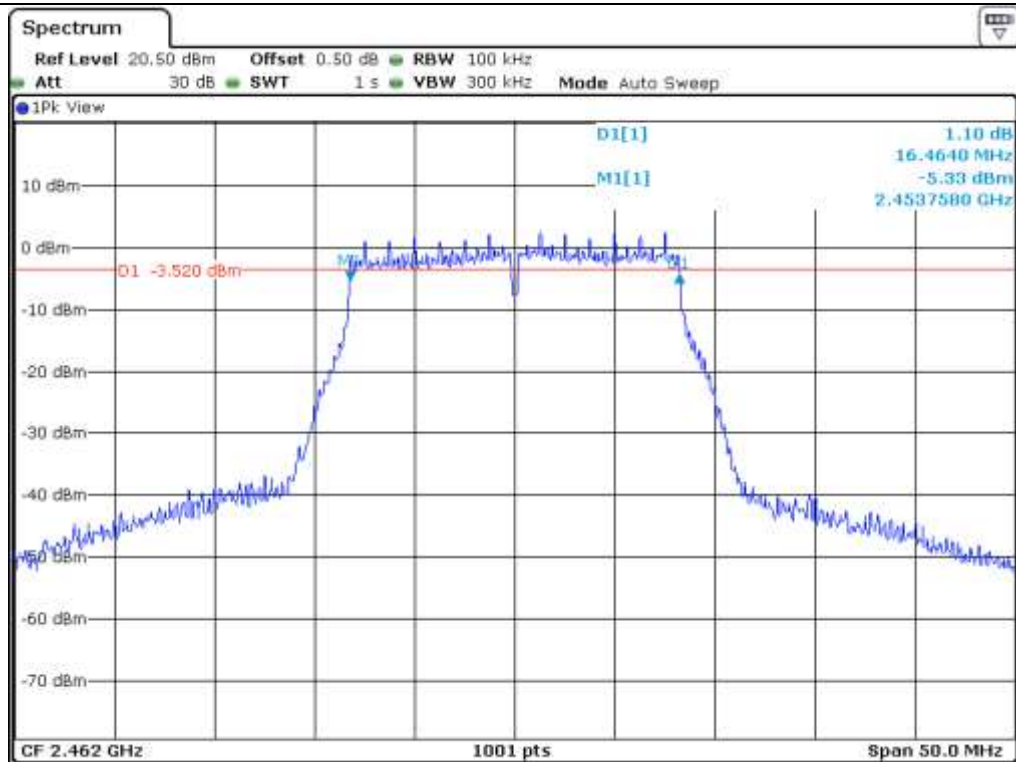

High Channel

7.6 Test data for 802.11n_HT20 WLAN Mode

7.6.1 Test data for Antenna 0

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 412	17.33	0.50	16.83
Middle	2 442	17.55	0.50	17.05
High	2 462	17.43	0.50	16.93

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

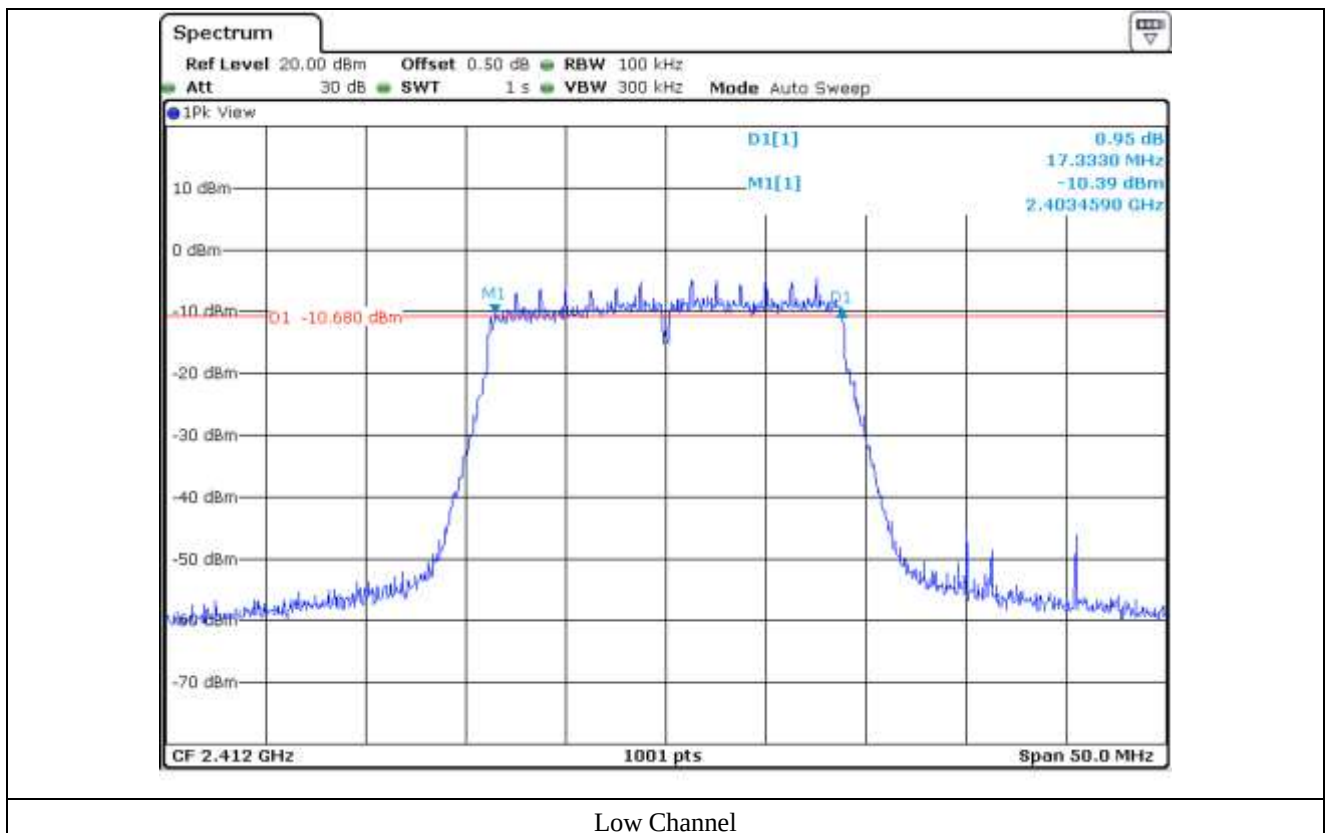

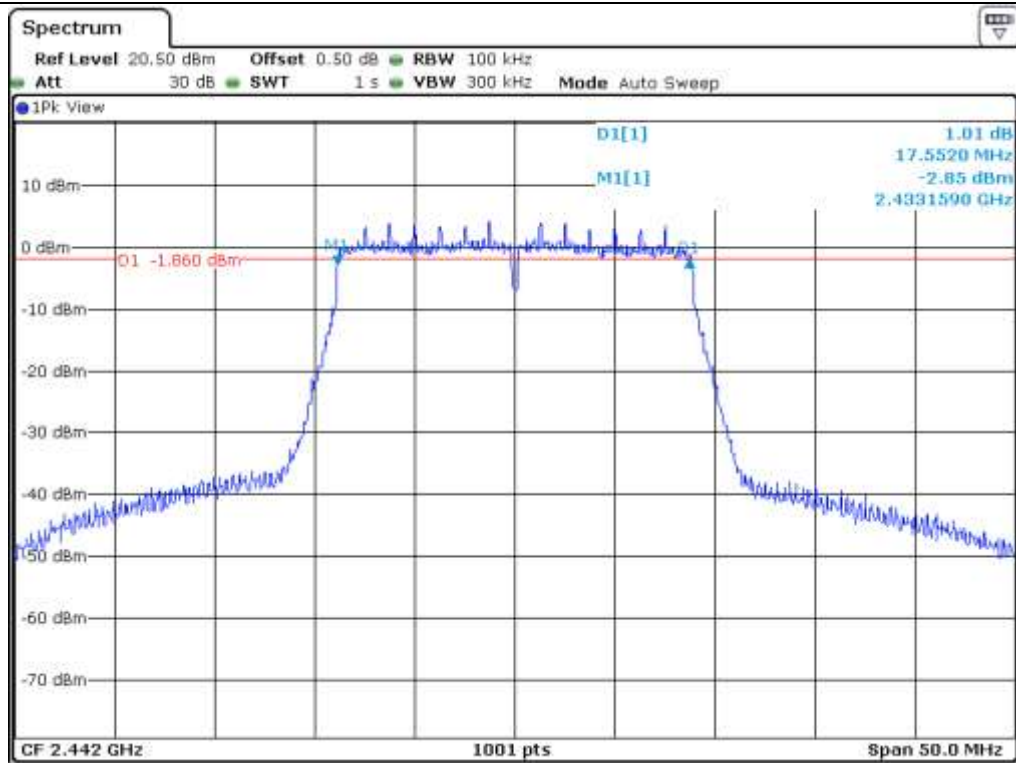

Middle Channel

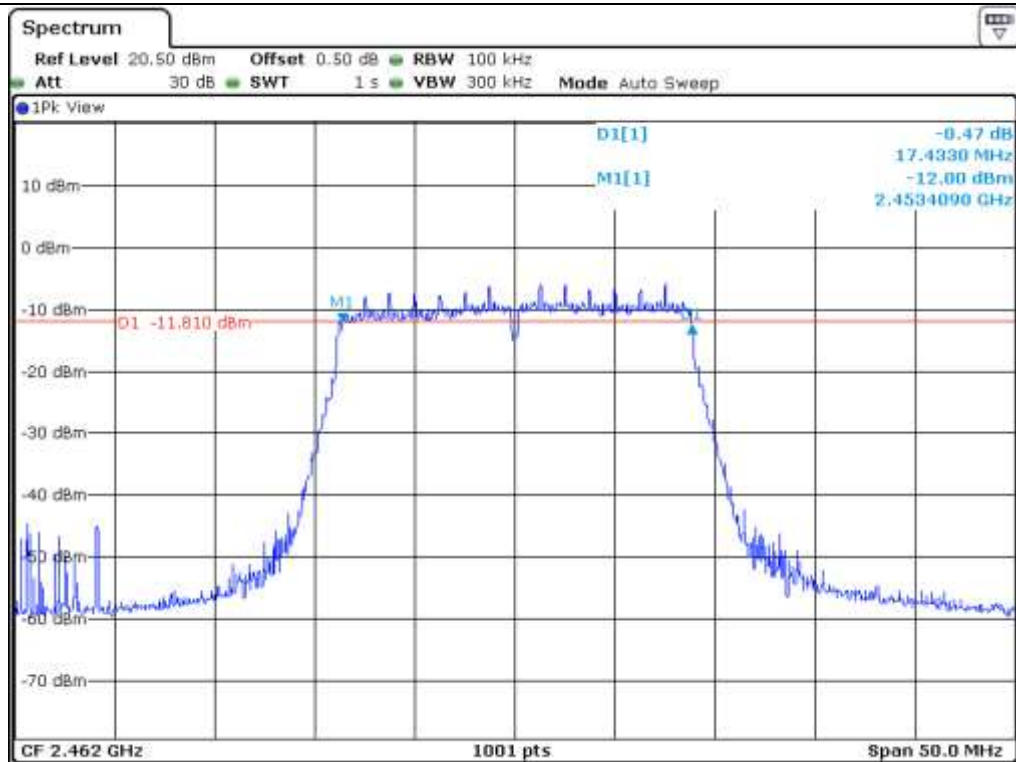

High Channel

7.6.2 Test data for Antenna 1

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 412	15.99	0.50	15.49
Middle	2 442	15.50	0.50	15.00
High	2 462	15.88	0.50	15.38

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

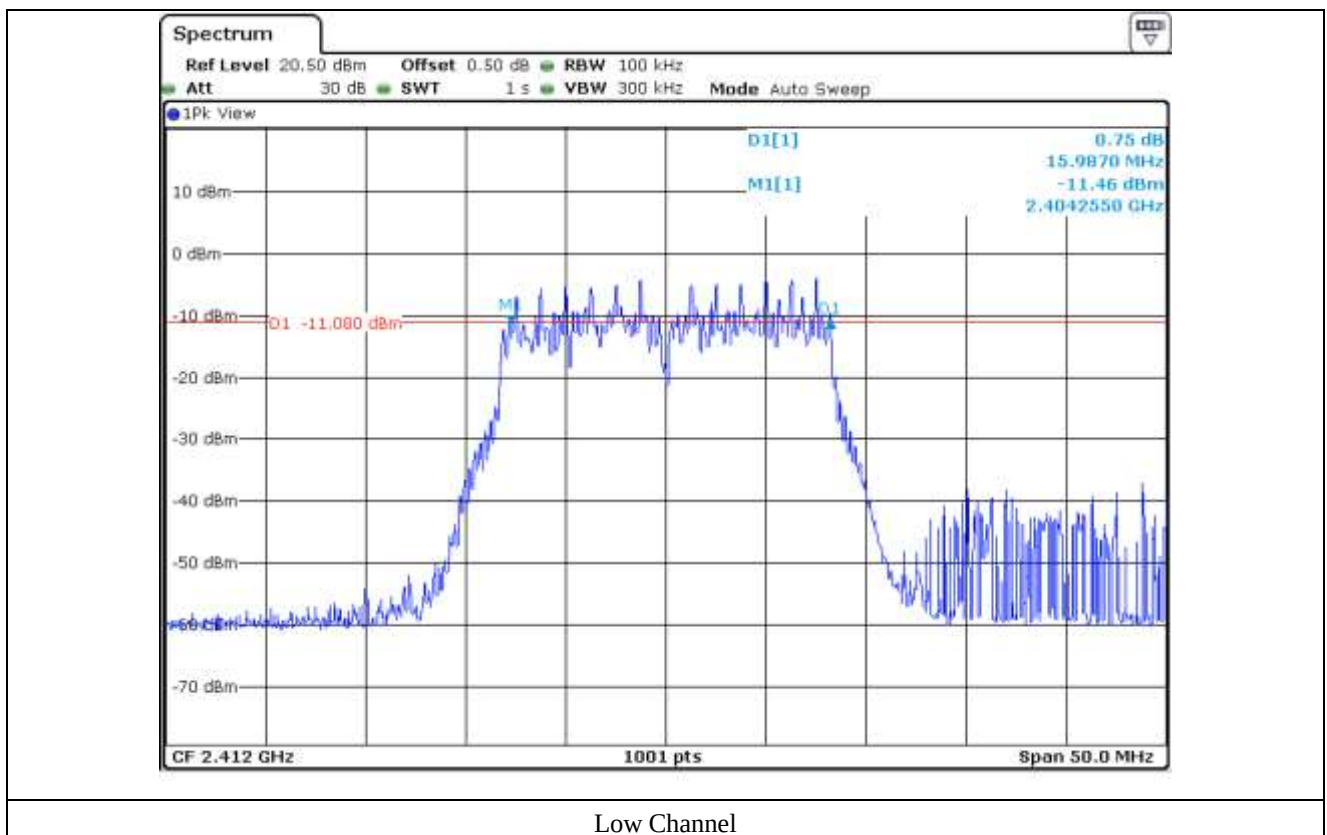

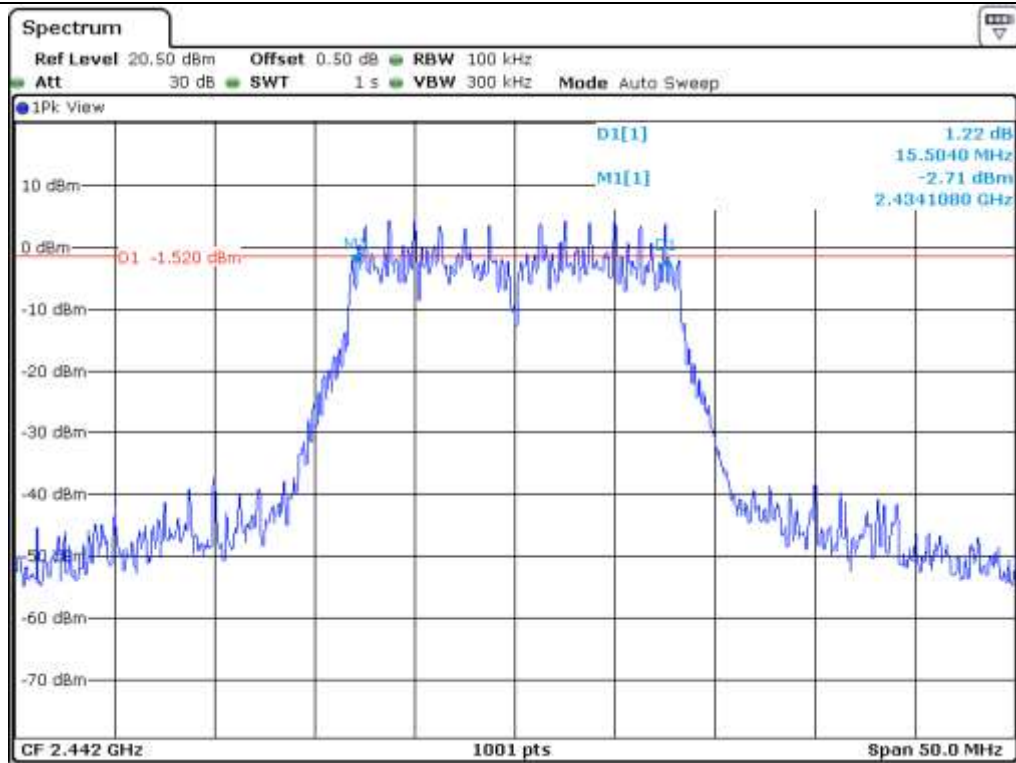

Middle Channel

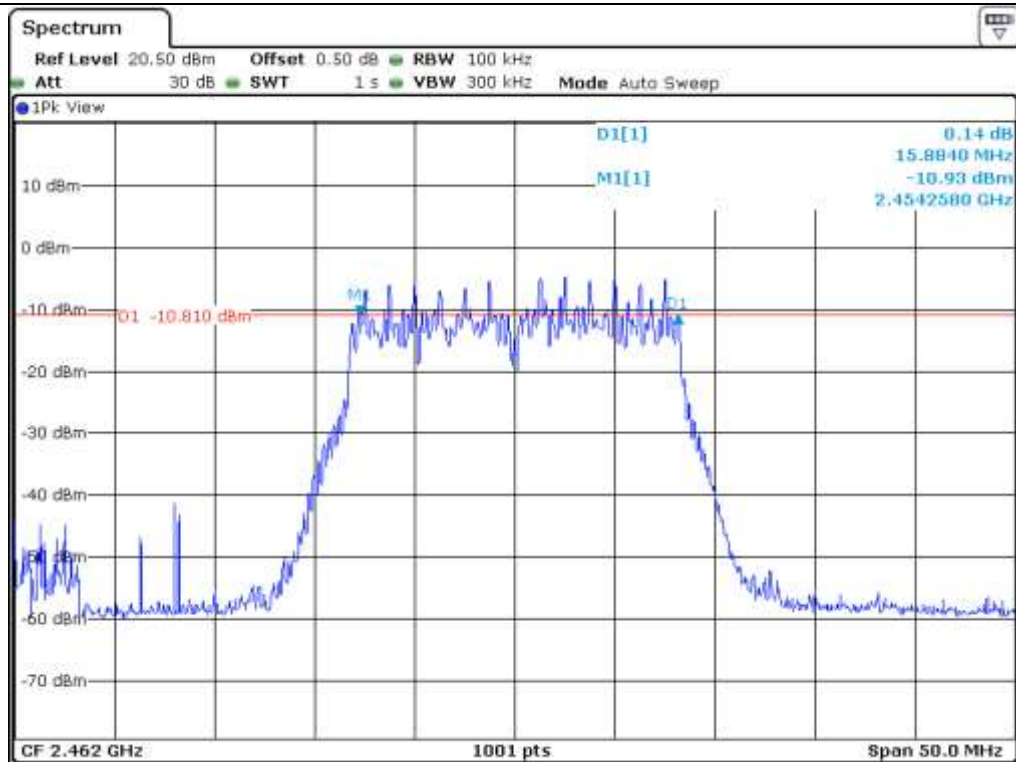

High Channel

7.6.3 Test data for Antenna 2

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 412	16.08	0.50	15.58
Middle	2 442	15.75	0.50	15.25
High	2 462	16.08	0.50	15.58

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

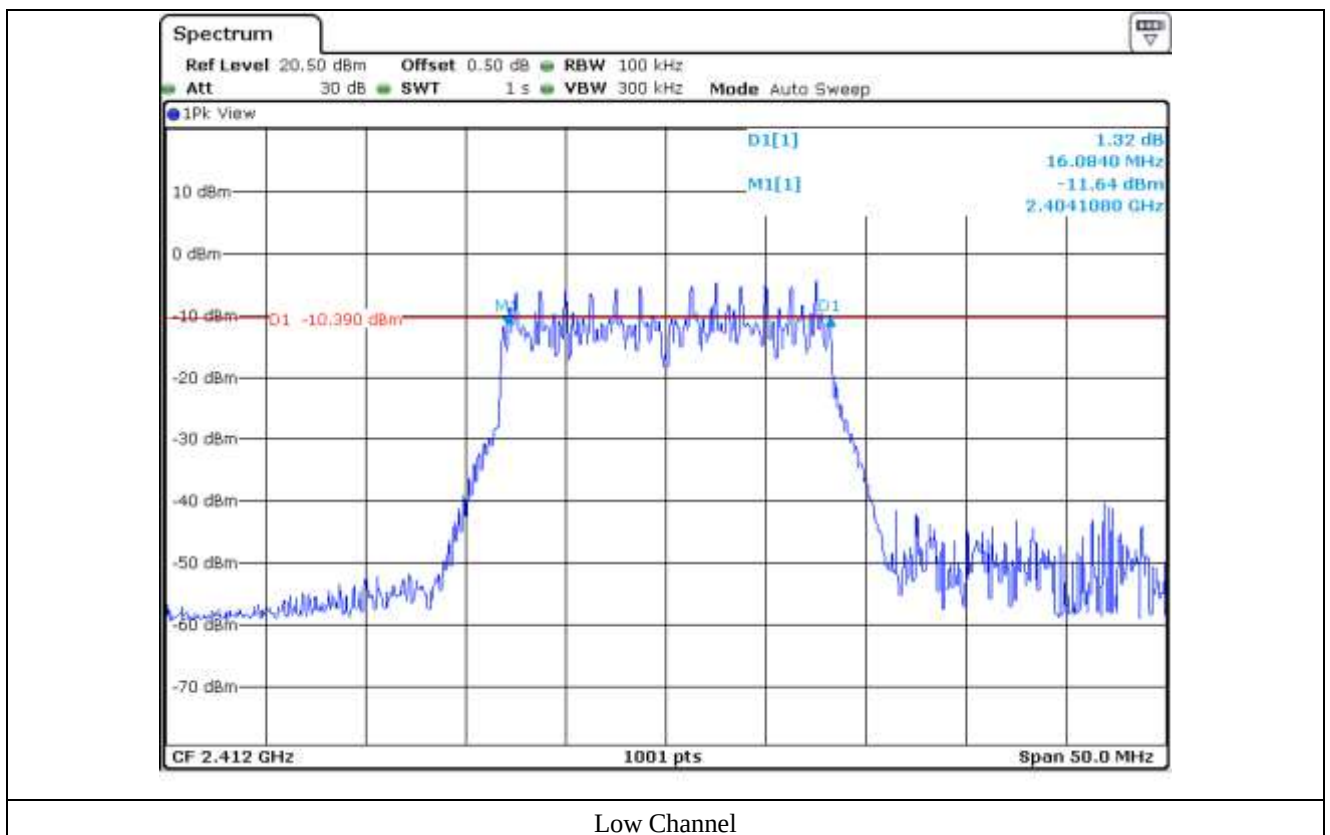

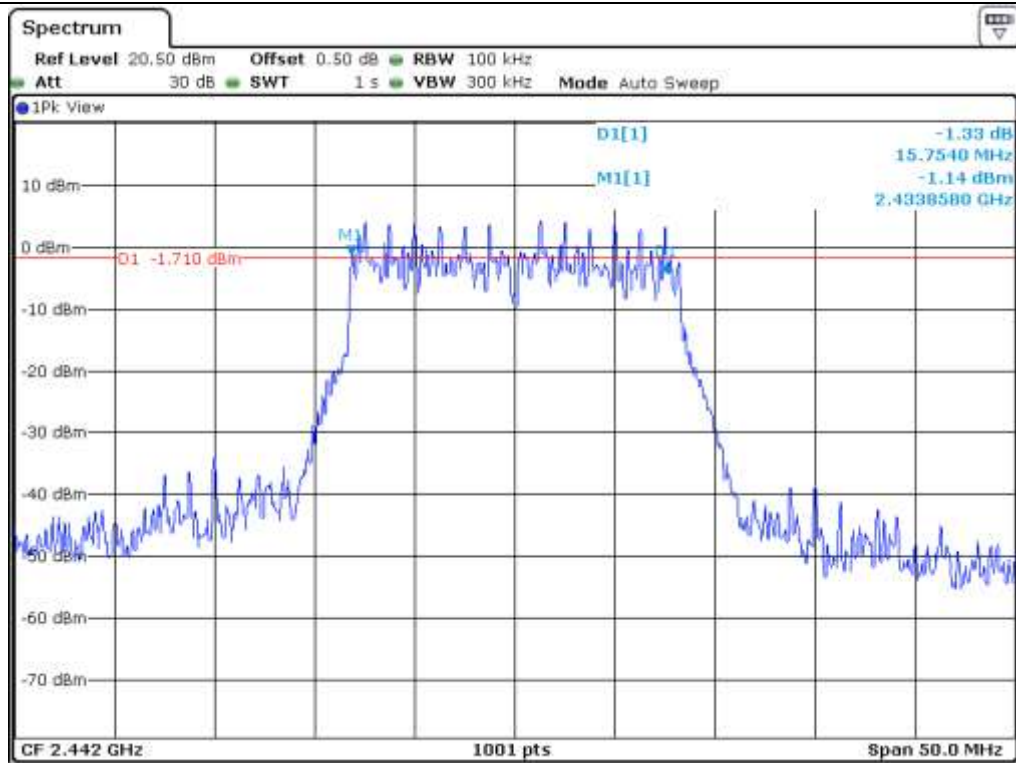

Middle Channel

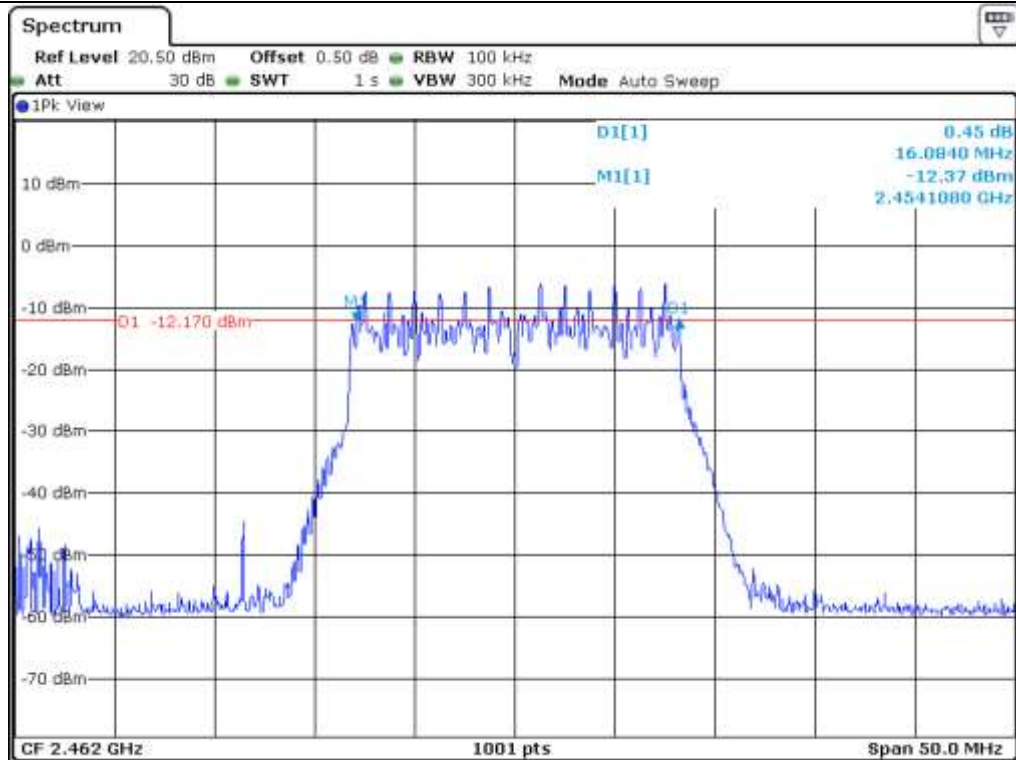

High Channel

7.7 Test data for 802.11n_HT40 WLAN Mode

7.7.1 Test data for Antenna 0


-. Test Date : March 21, 2017


-. Test Result : Pass

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 422	35.86	0.50	35.36
Middle	2 442	36.62	0.50	36.12
High	2 452	36.33	0.50	35.83


Remark. Margin = Measured Value - Limit

Tested by: Hyung-Kwon, Oh / Engineer

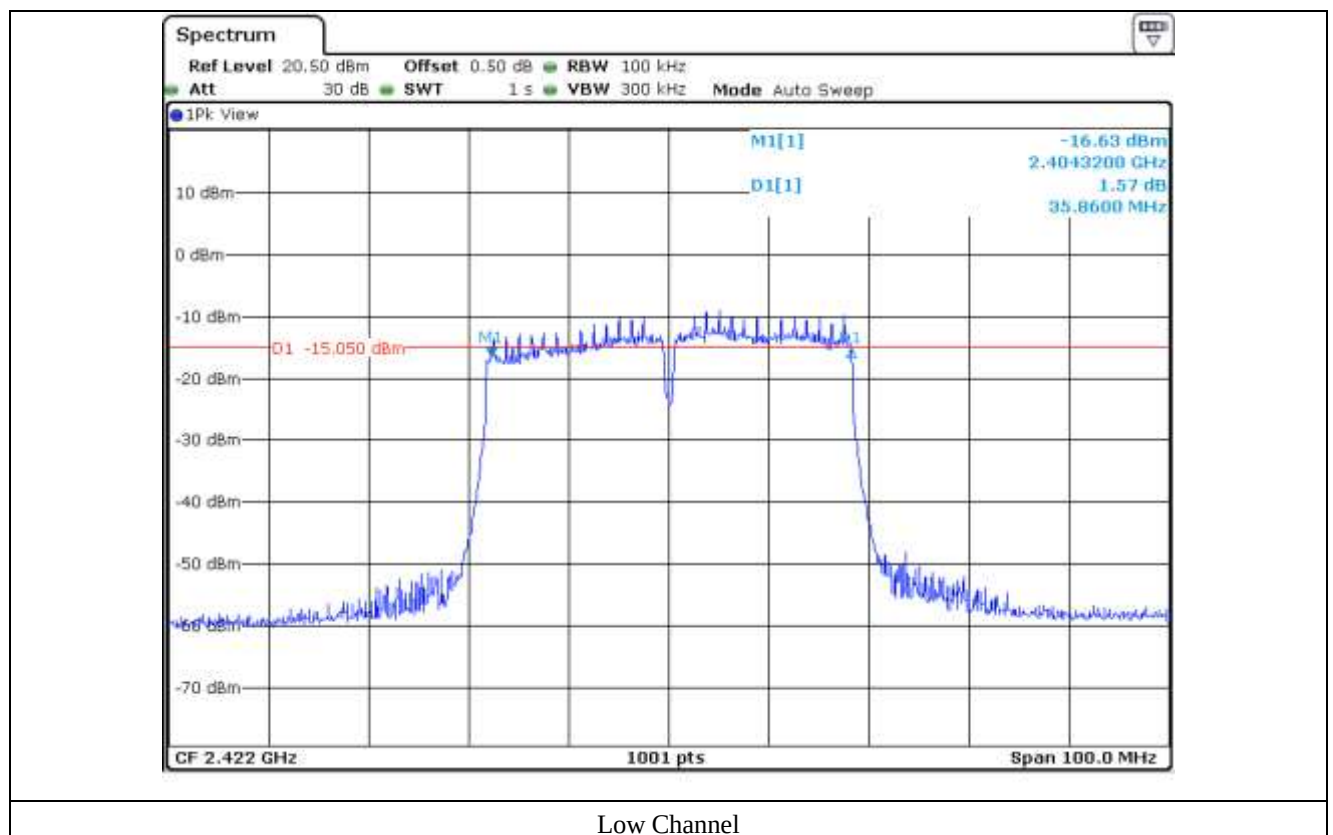

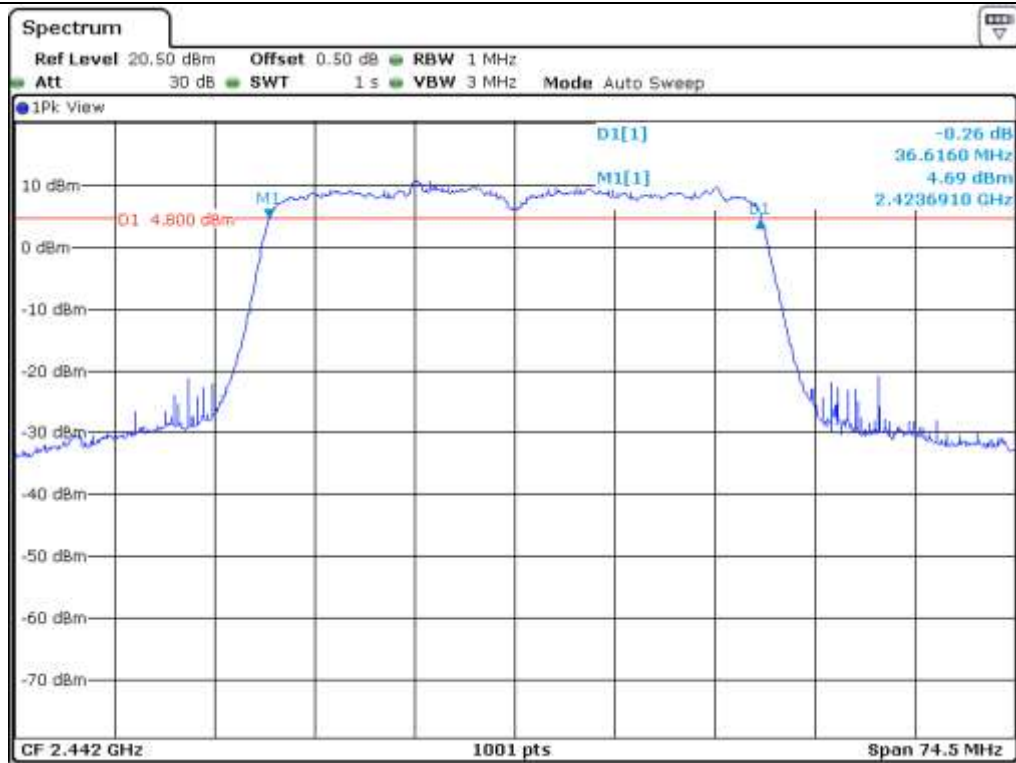

Middle Channel

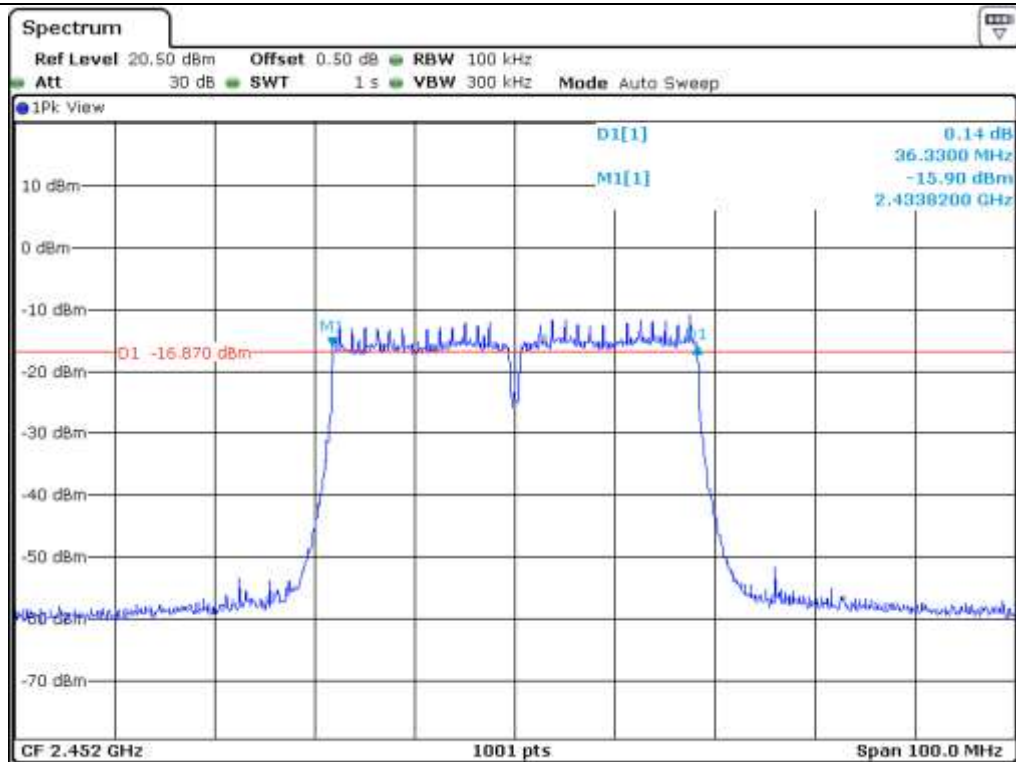

High Channel

7.7.2 Test data for Antenna 1

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 422	35.86	0.50	35.36
Middle	2 442	36.69	0.50	36.19
High	2 452	36.13	0.50	35.63

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

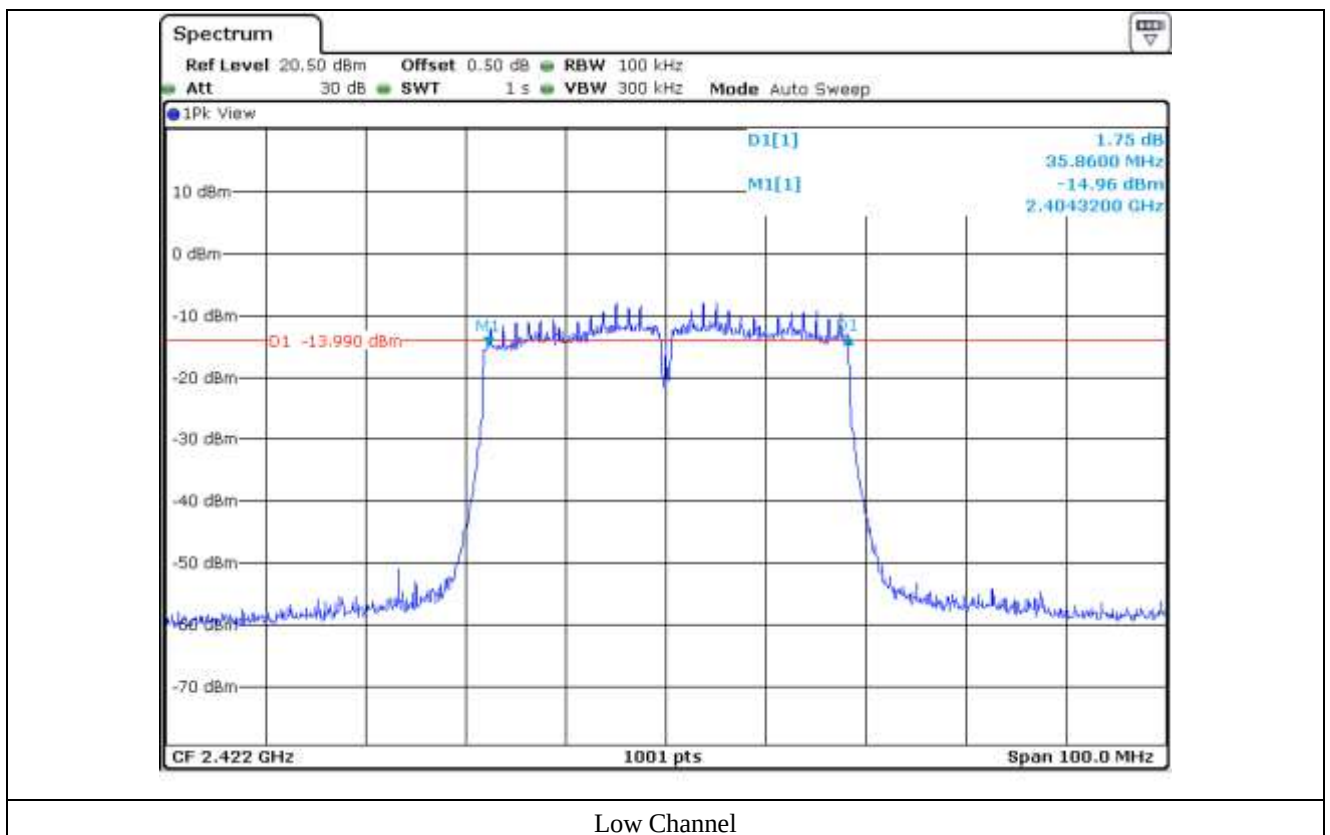

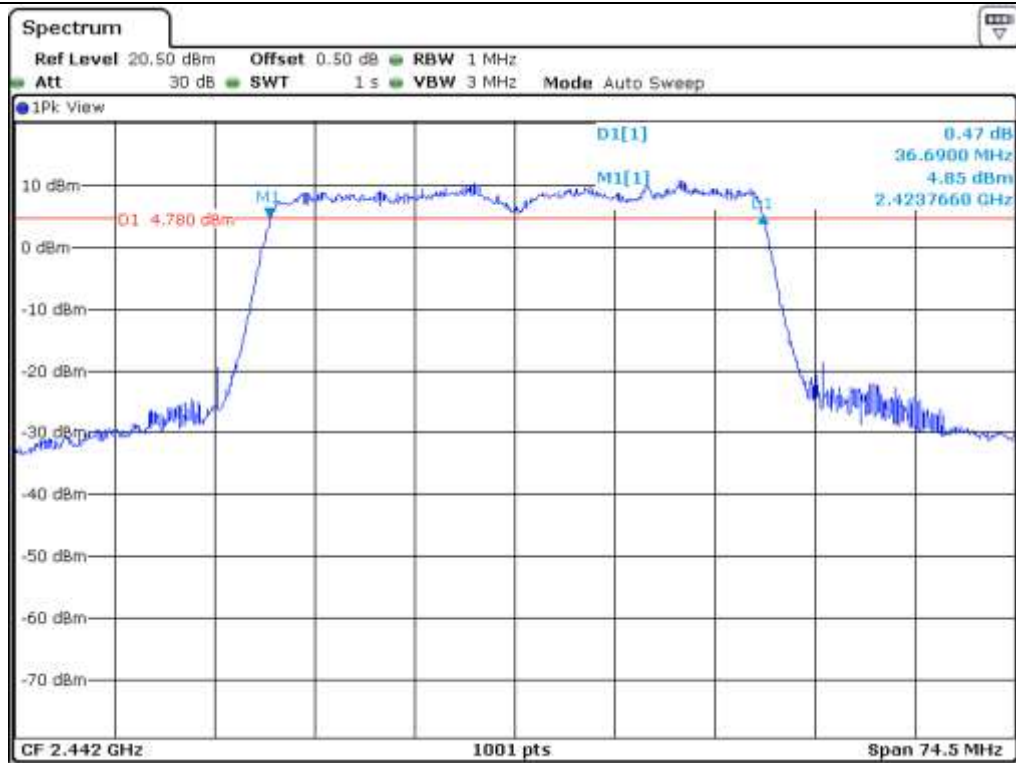

Middle Channel

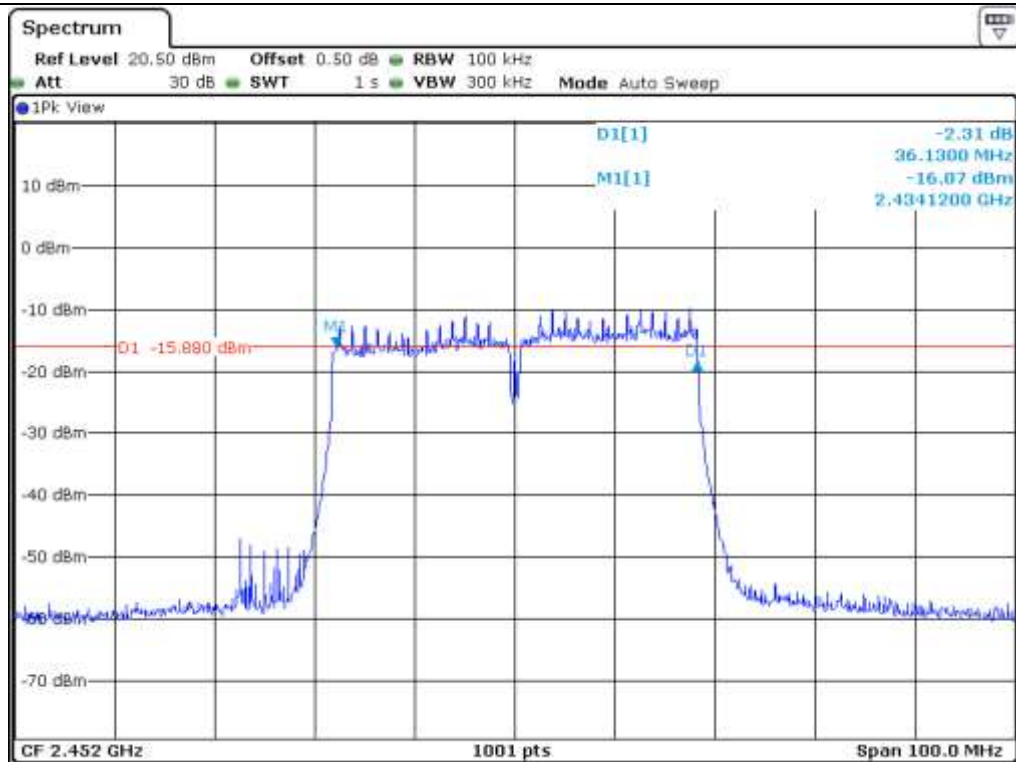

High Channel

7.7.3 Test data for Antenna 2

-. Test Date : March 21, 2017


-. Test Result : Pass

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 422	36.10	0.50	35.60
Middle	2 442	36.62	0.50	36.12
High	2 452	36.43	0.50	35.93

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

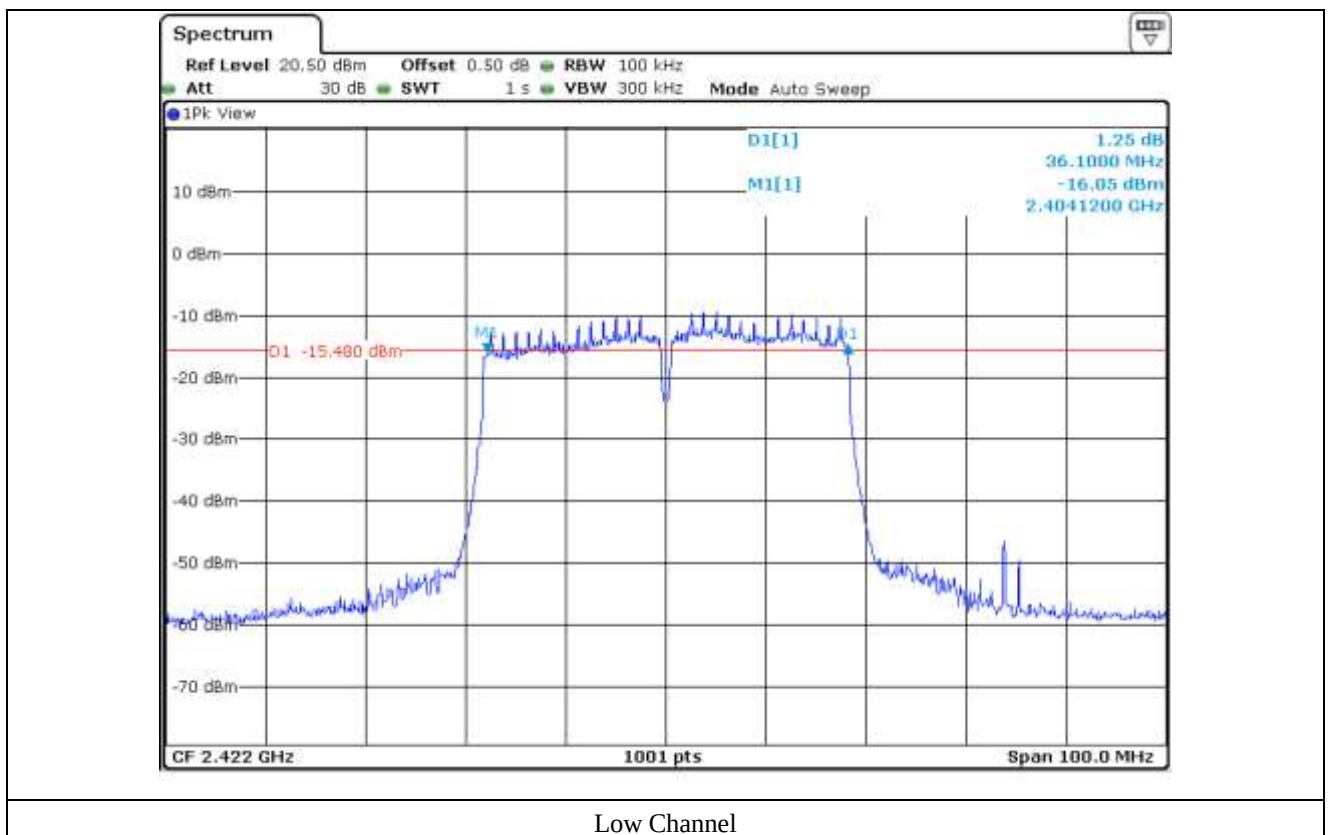



Middle Channel

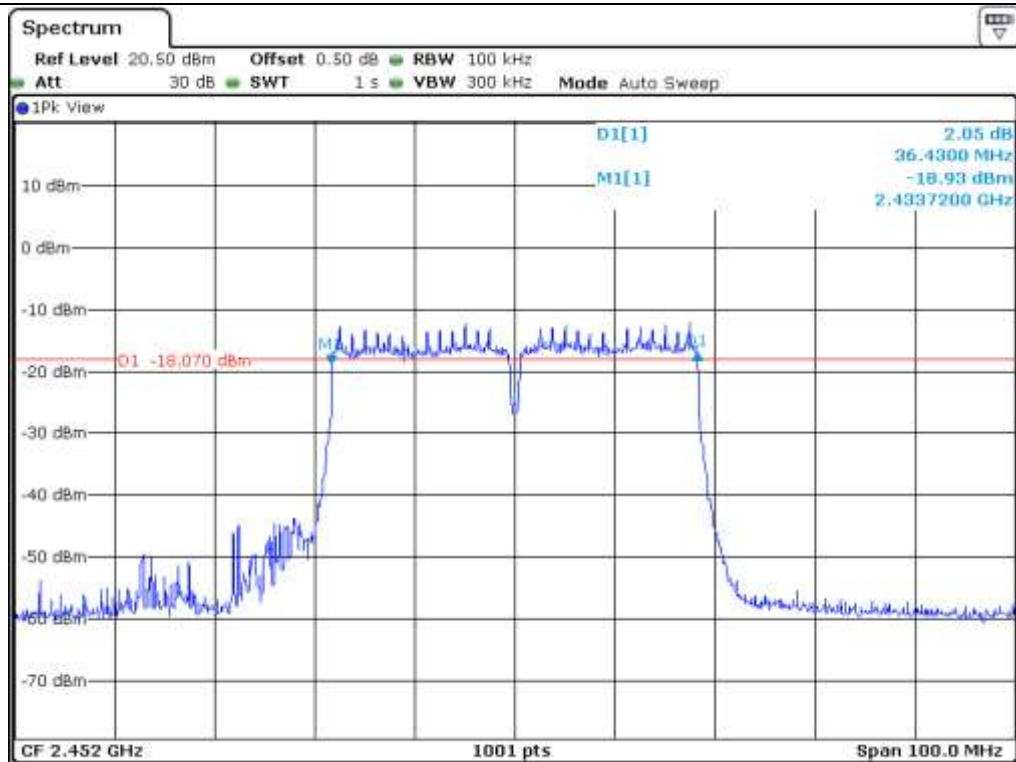

High Channel


8. 99 % OCCUPIED BANDWIDTH

8.1 Operating environment

Temperature : 23 °C
Relative humidity : 41 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 99 % bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission.

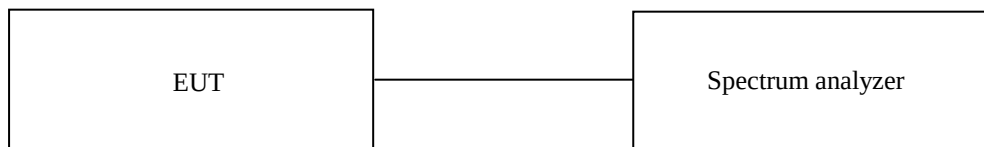

8.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV40	Rohde & Schwarz	Signal Analyzer	101009	May 31, 2016 (1Y)

All test equipment used is calibrated on a regular basis.

8.4 Test data for 802.11b WLAN Mode

8.4.1 Test data for Antenna 0

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 412	11.69	0.50	11.19
Middle	2 442	11.84	0.50	11.34
High	2 462	11.79	0.50	11.29

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

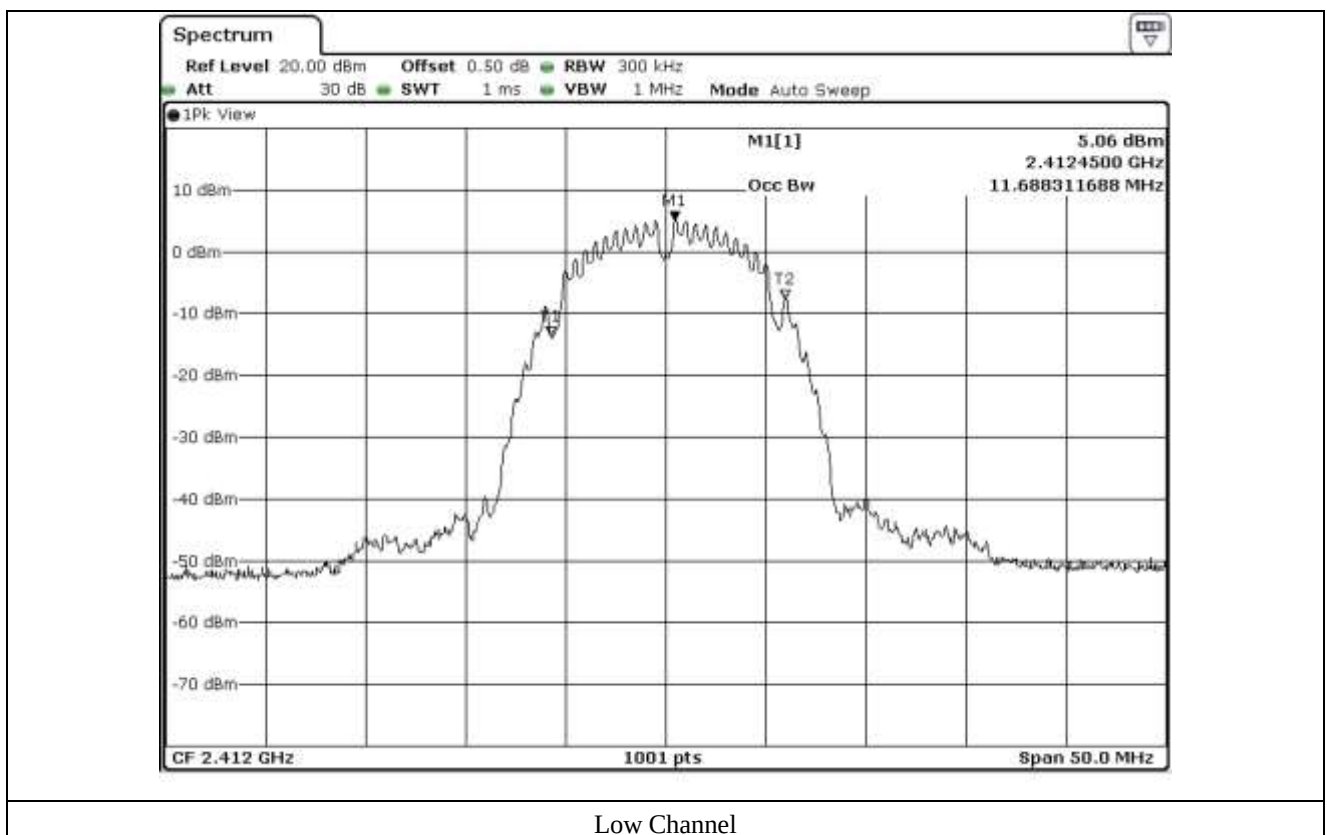

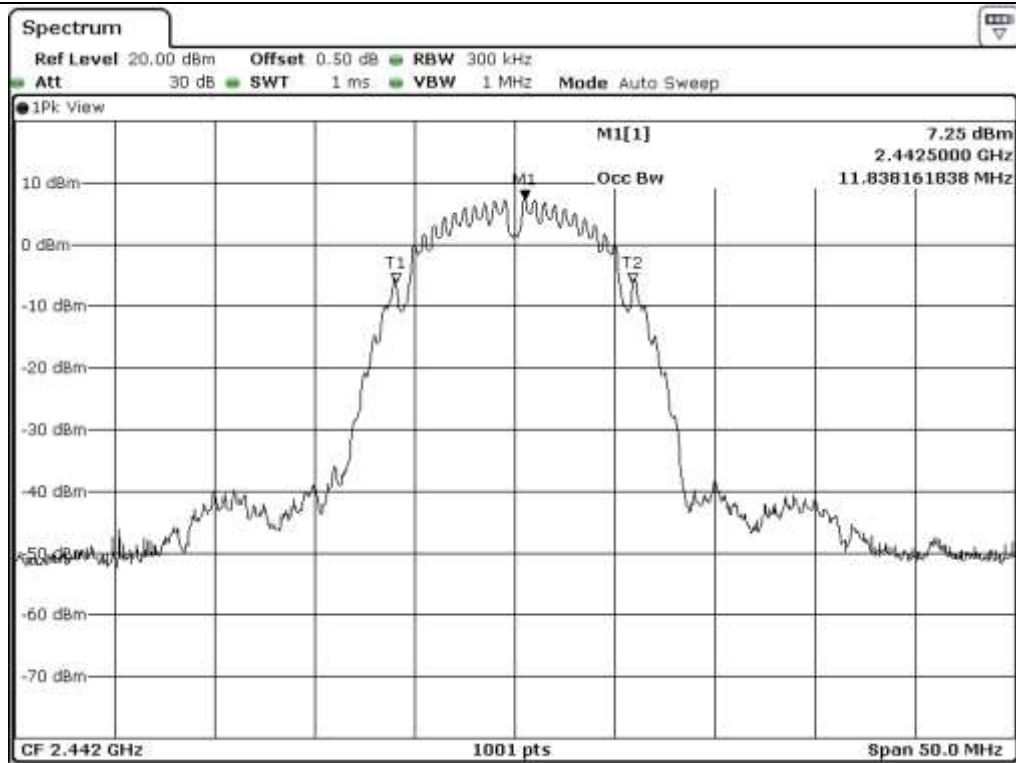

Middle Channel

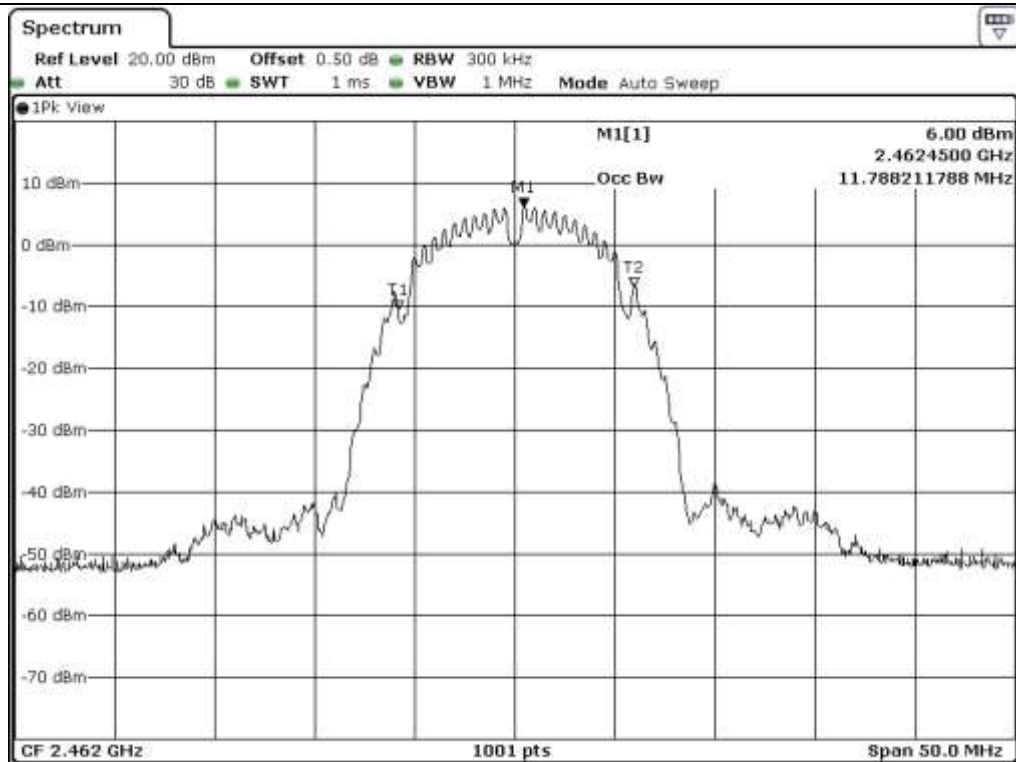

High Channel

8.4.2 Test data for Antenna 1

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 412	11.69	0.50	11.19
Middle	2 442	11.79	0.50	11.29
High	2 462	11.69	0.50	11.19

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

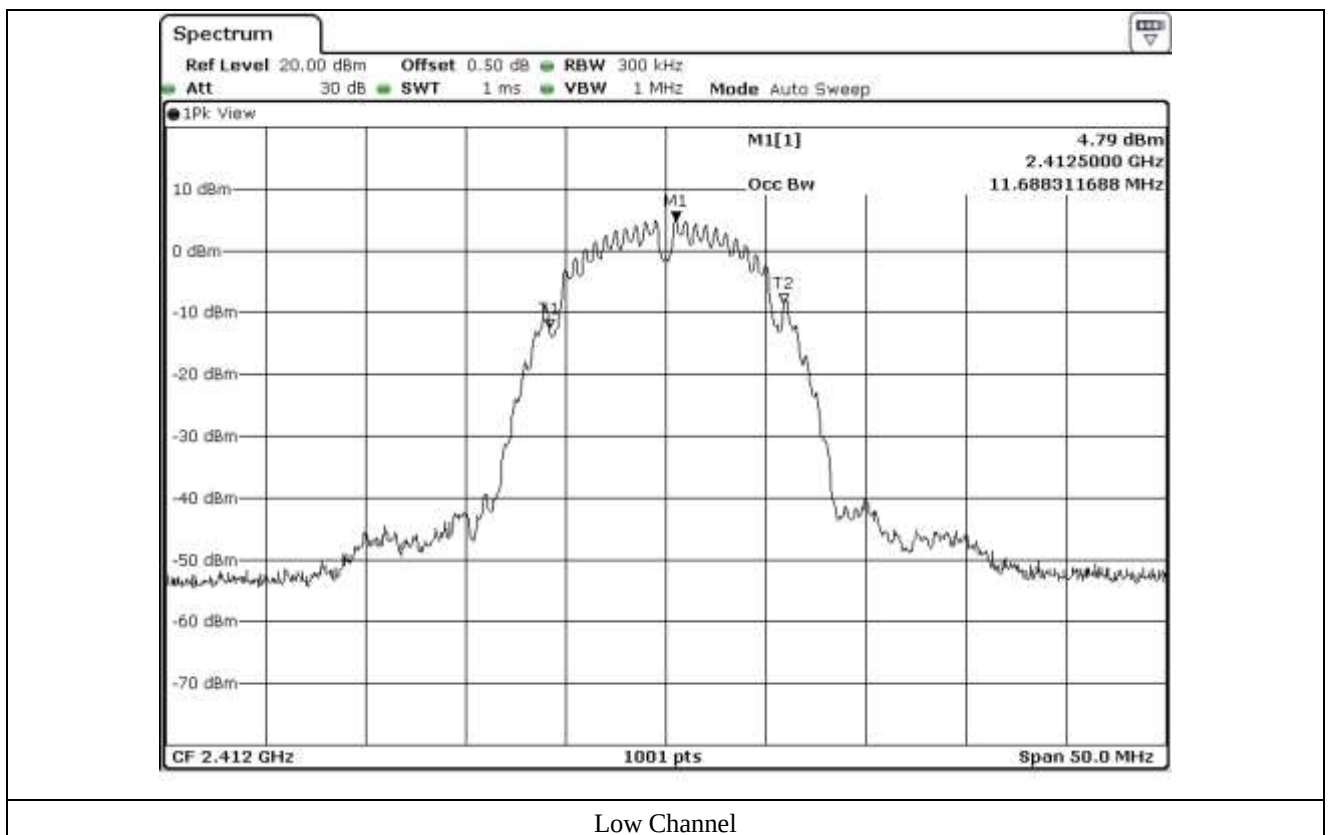

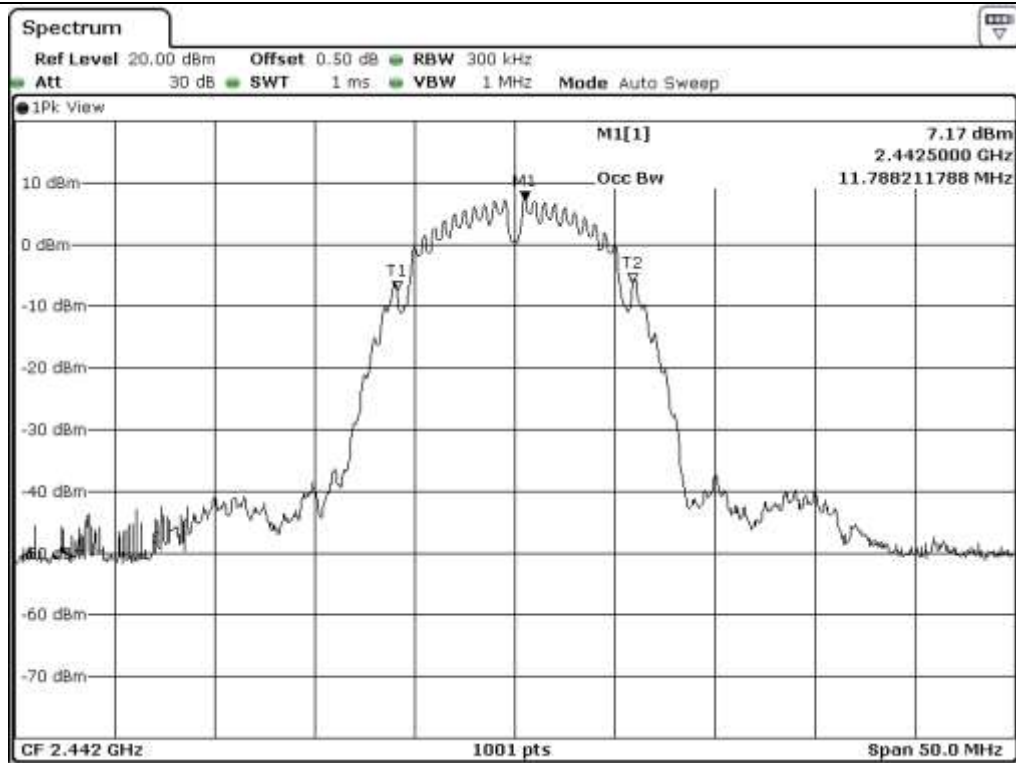

Middle Channel

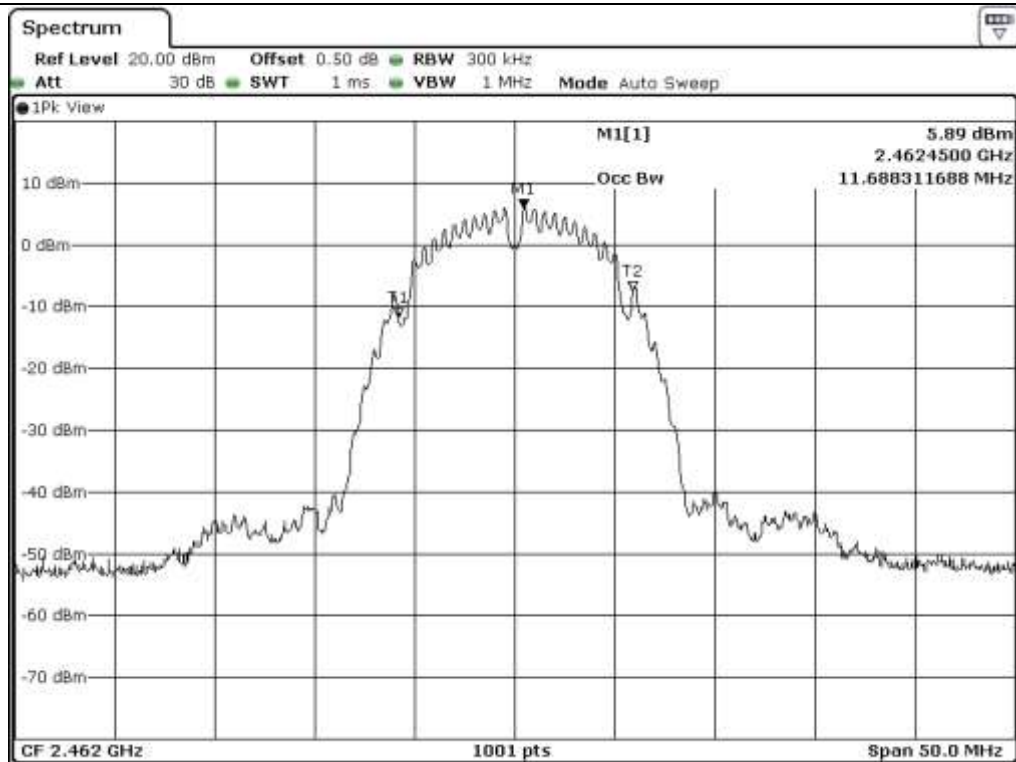

High Channel

8.4.3 Test data for Antenna 2

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 412	11.74	0.50	11.24
Middle	2 442	11.79	0.50	11.29
High	2 462	11.74	0.50	11.24

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

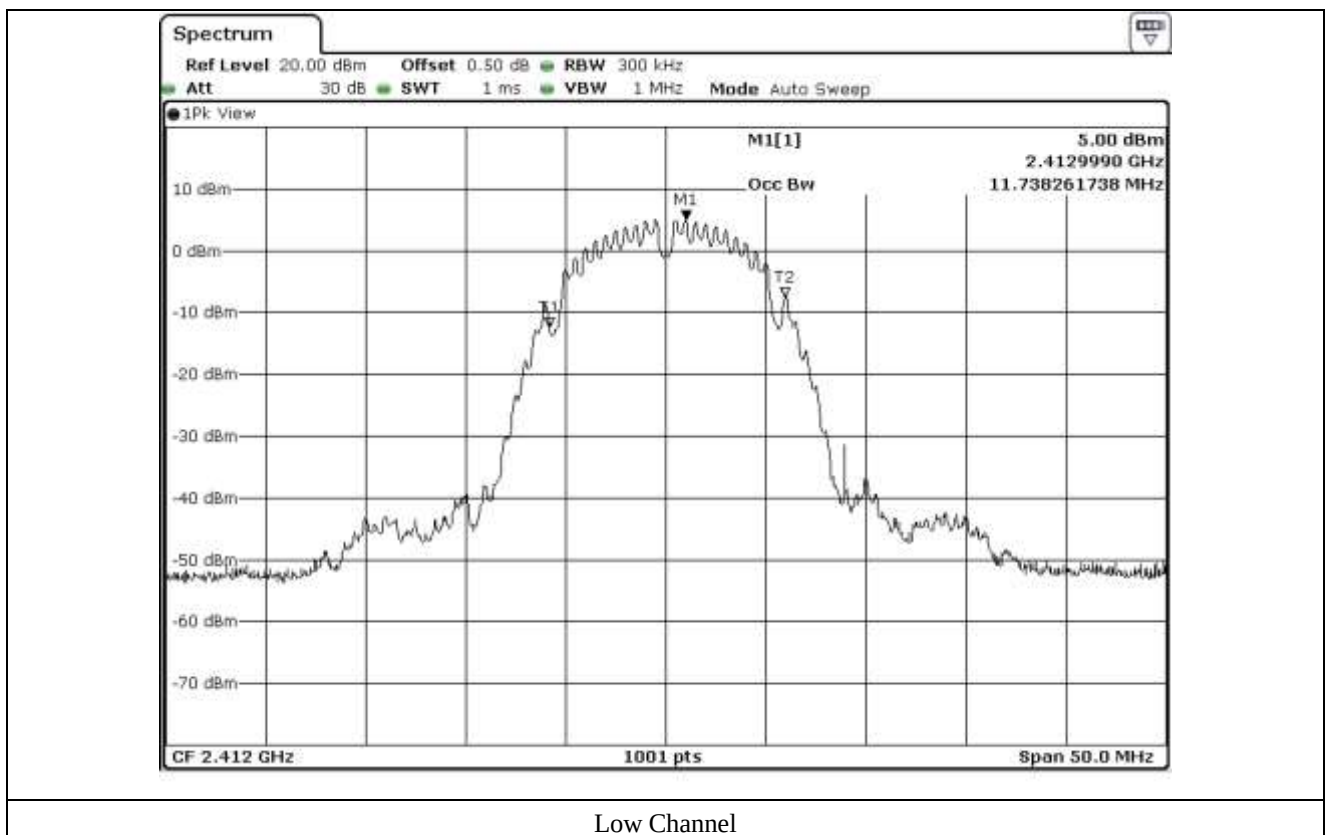

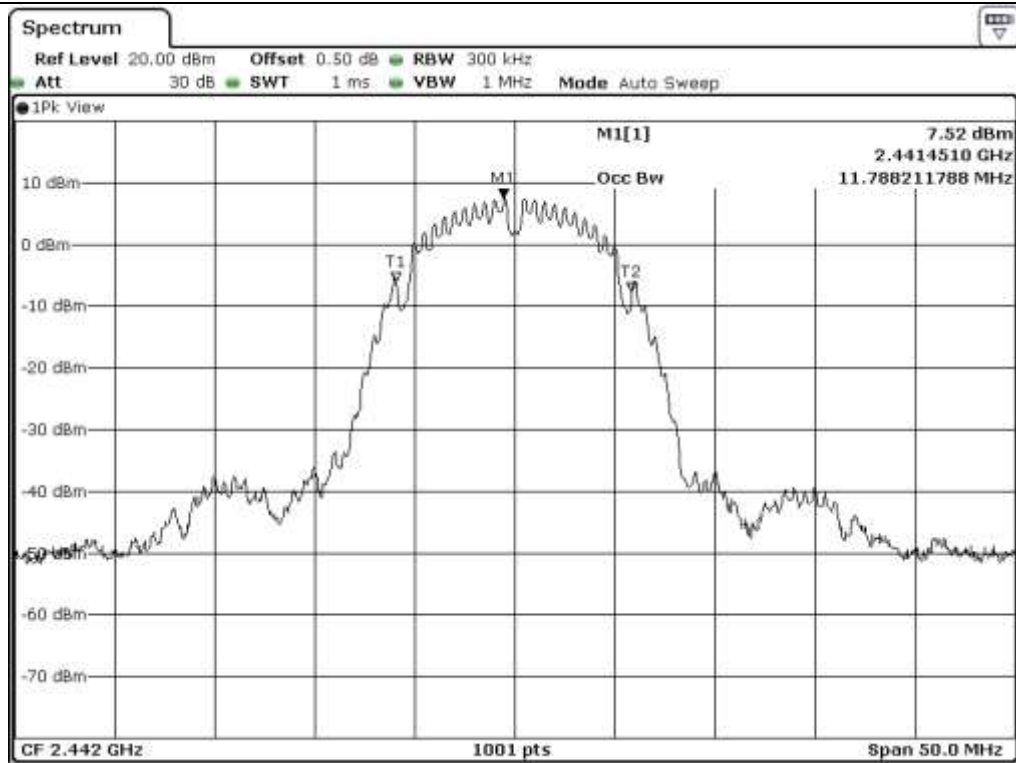

Middle Channel

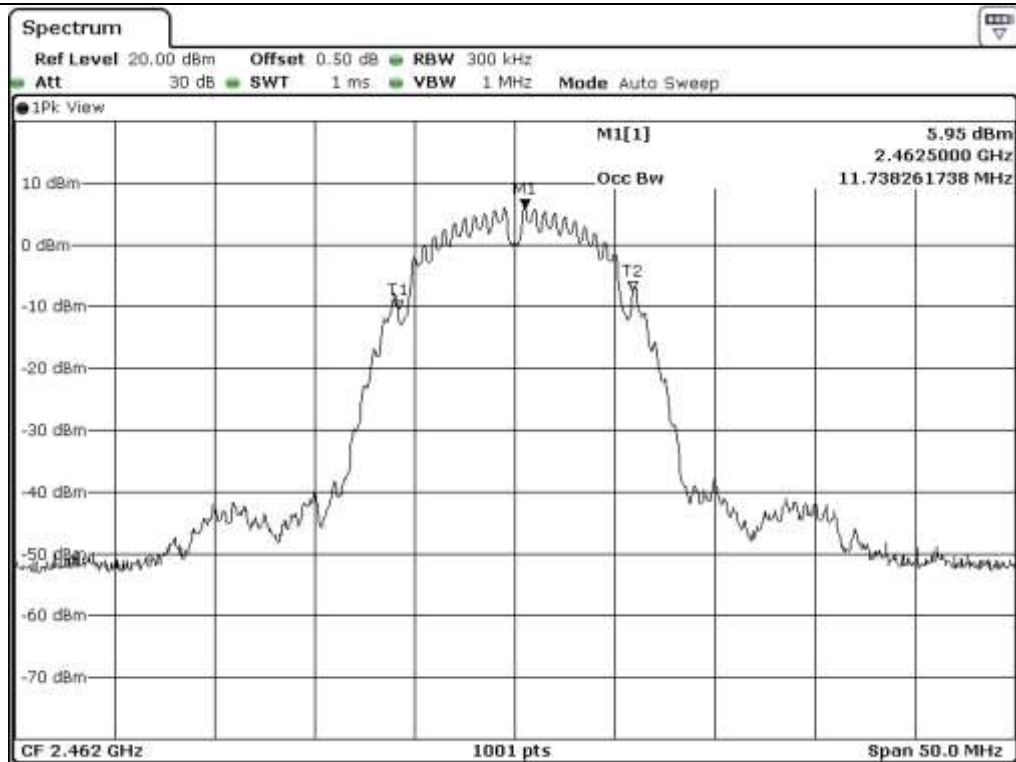

High Channel

8.5 Test data for 802.11g WLAN Mode

8.5.1 Test data for Antenna 0

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 412	16.93	0.50	16.43
Middle	2 442	16.93	0.50	16.43
High	2 462	16.93	0.50	16.43

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

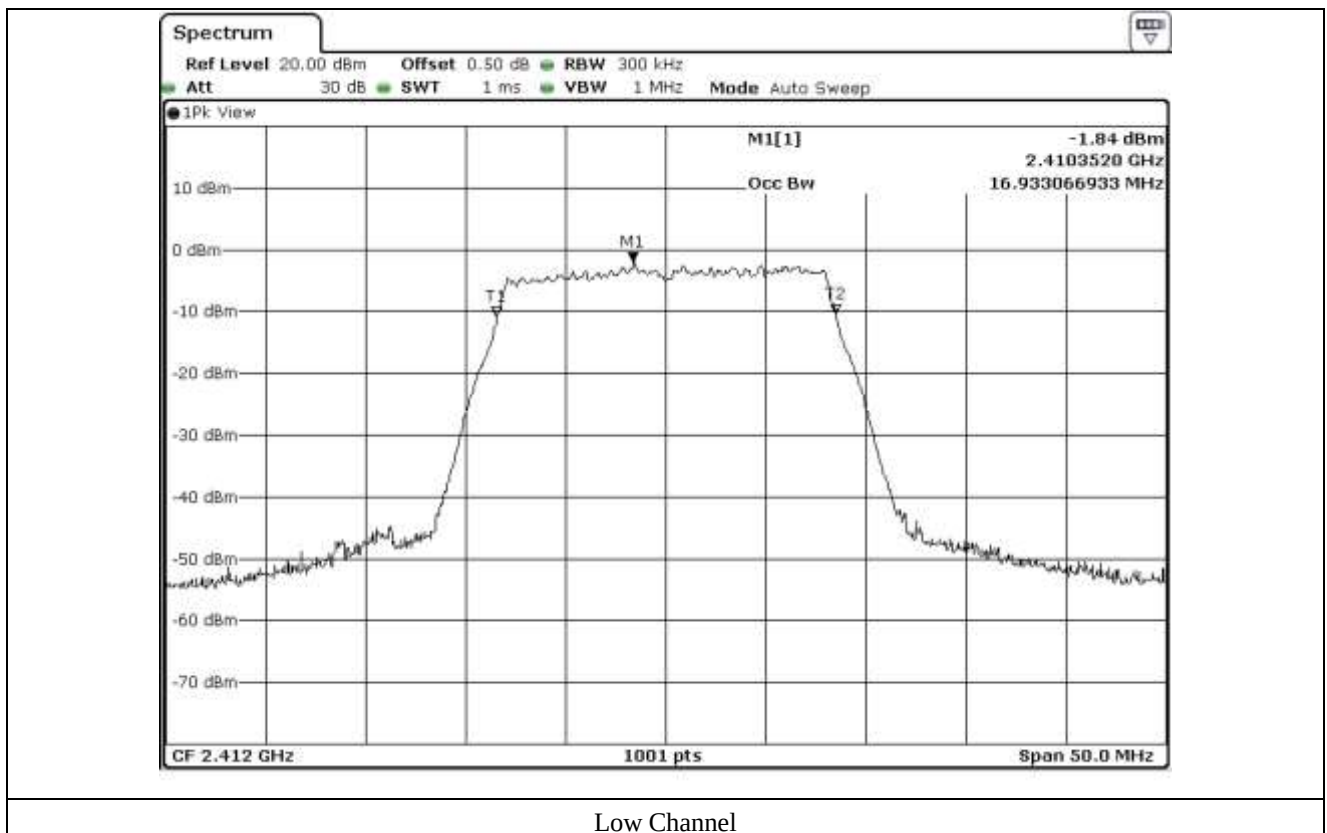

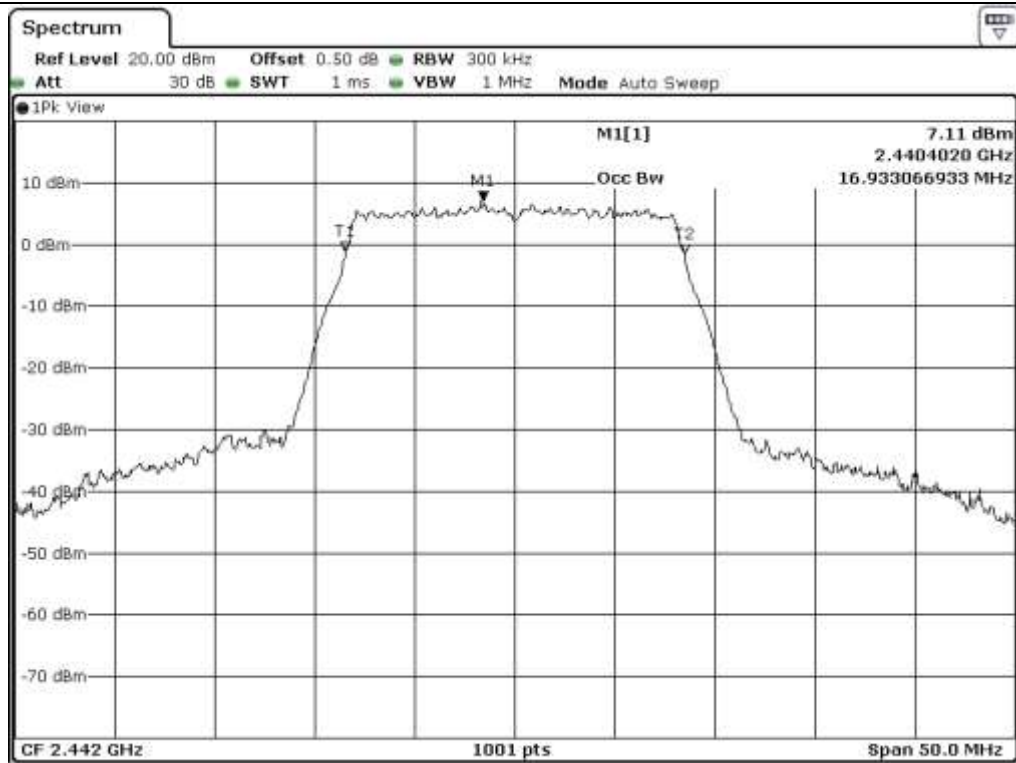

Middle Channel

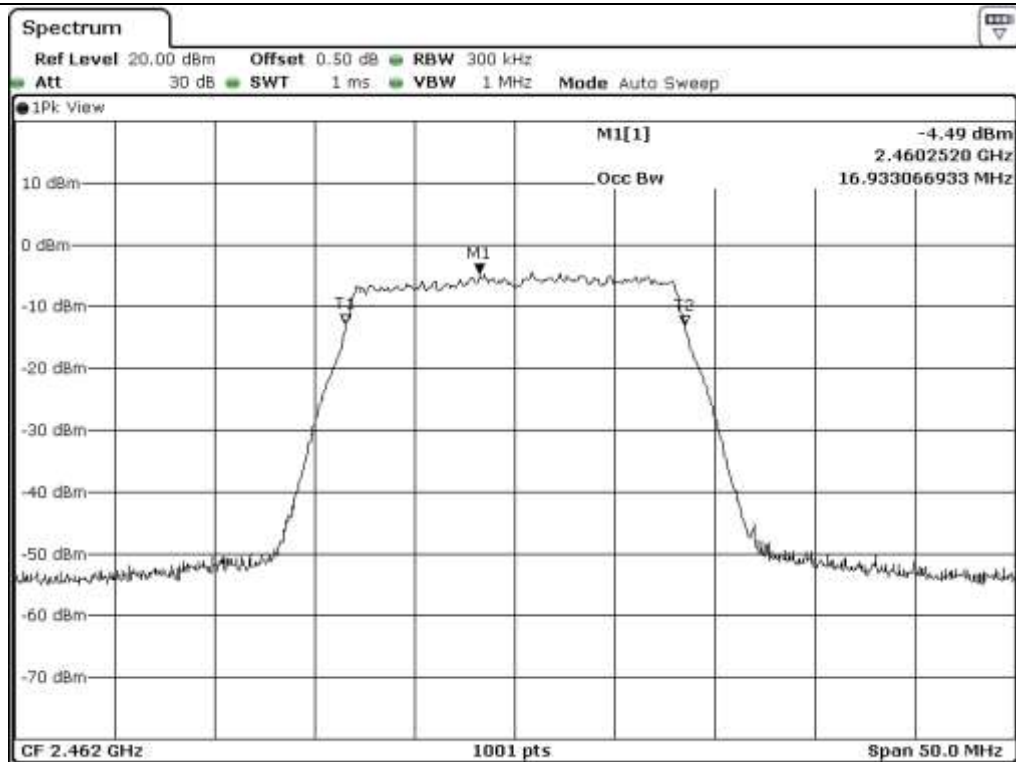

High Channel

8.5.2 Test data for Antenna 1

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 412	16.73	0.50	16.23
Middle	2 442	16.83	0.50	16.33
High	2 462	16.83	0.50	16.33

Remark. Margin = Measured Value - Limit



Tested by: Hyung-Kwon, Oh / Engineer

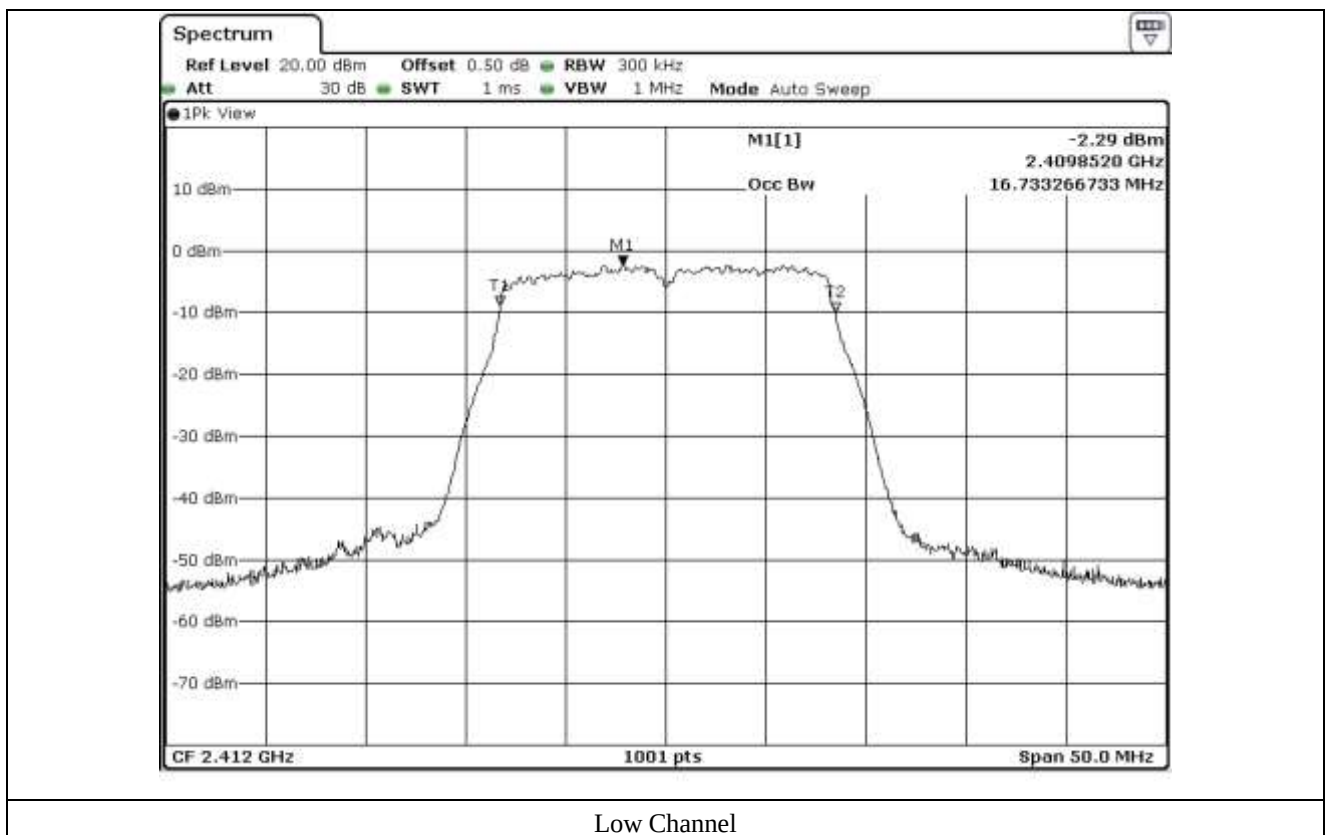

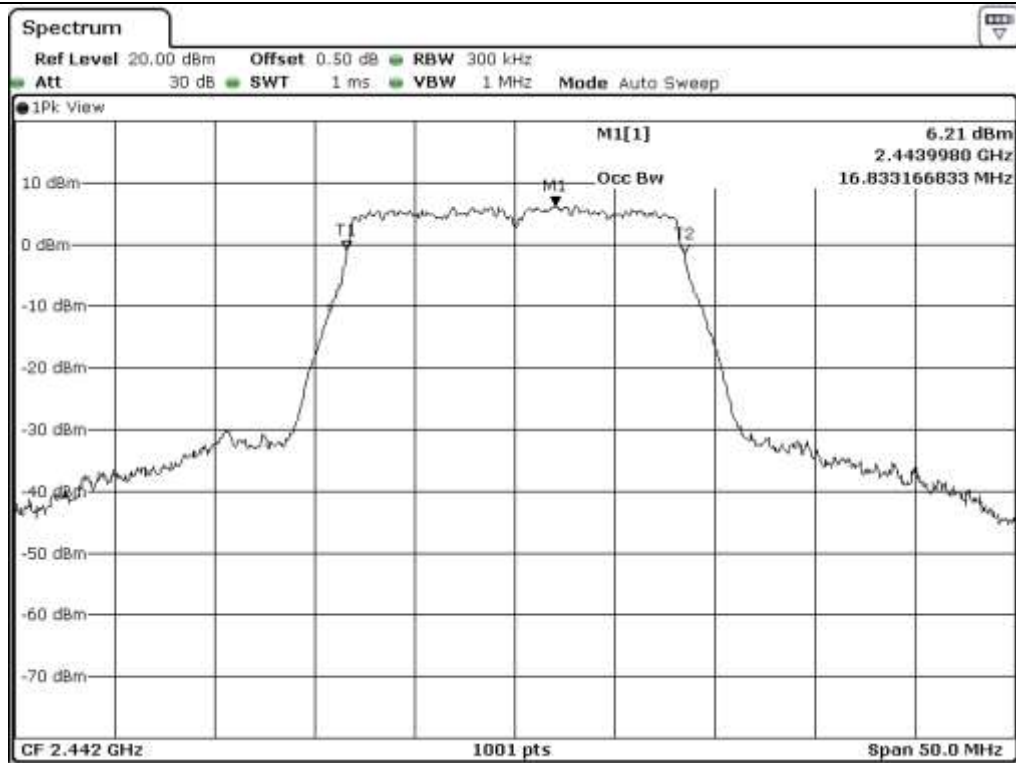

Middle Channel



High Channel

8.5.3 Test data for Antenna 2

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 412	16.83	0.50	16.33
Middle	2 442	16.83	0.50	16.33
High	2 462	16.83	0.50	16.33

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

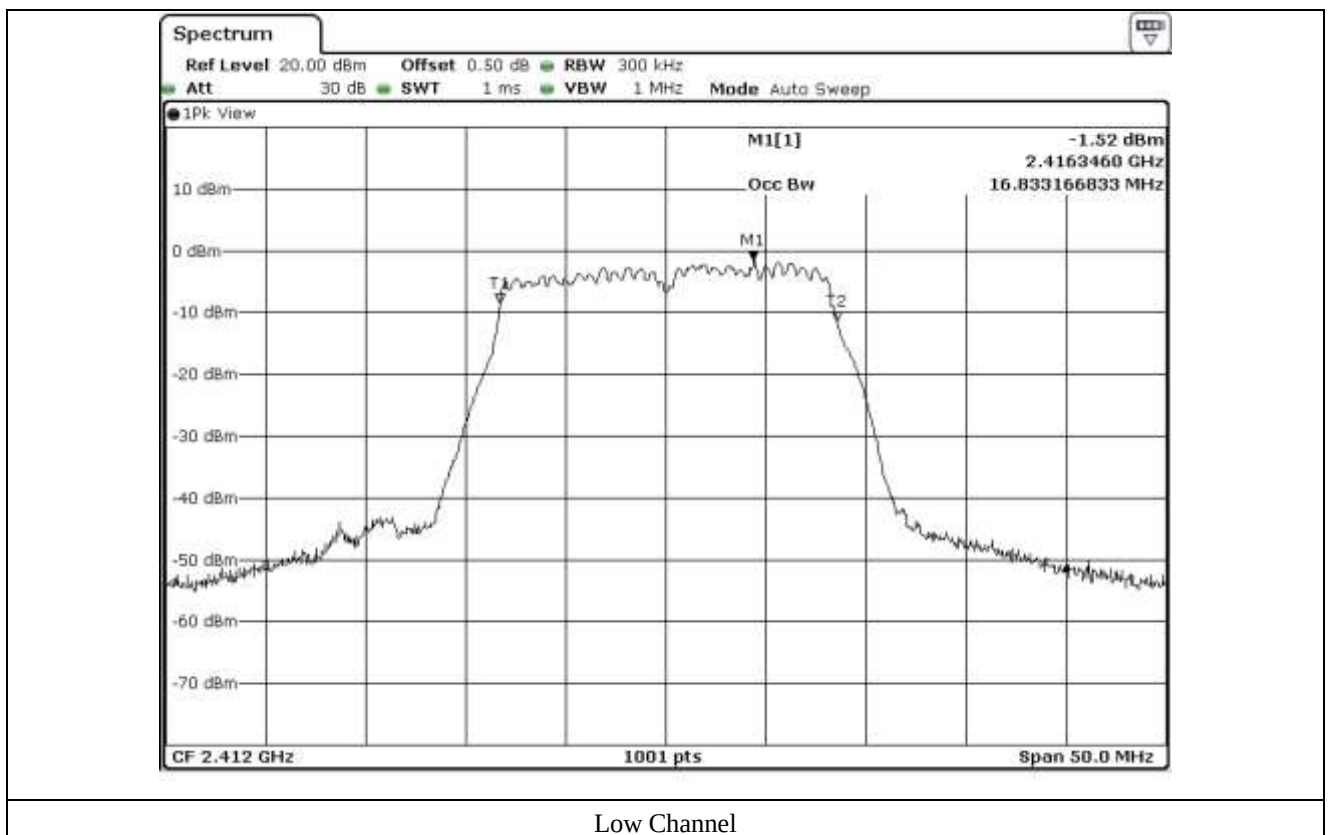

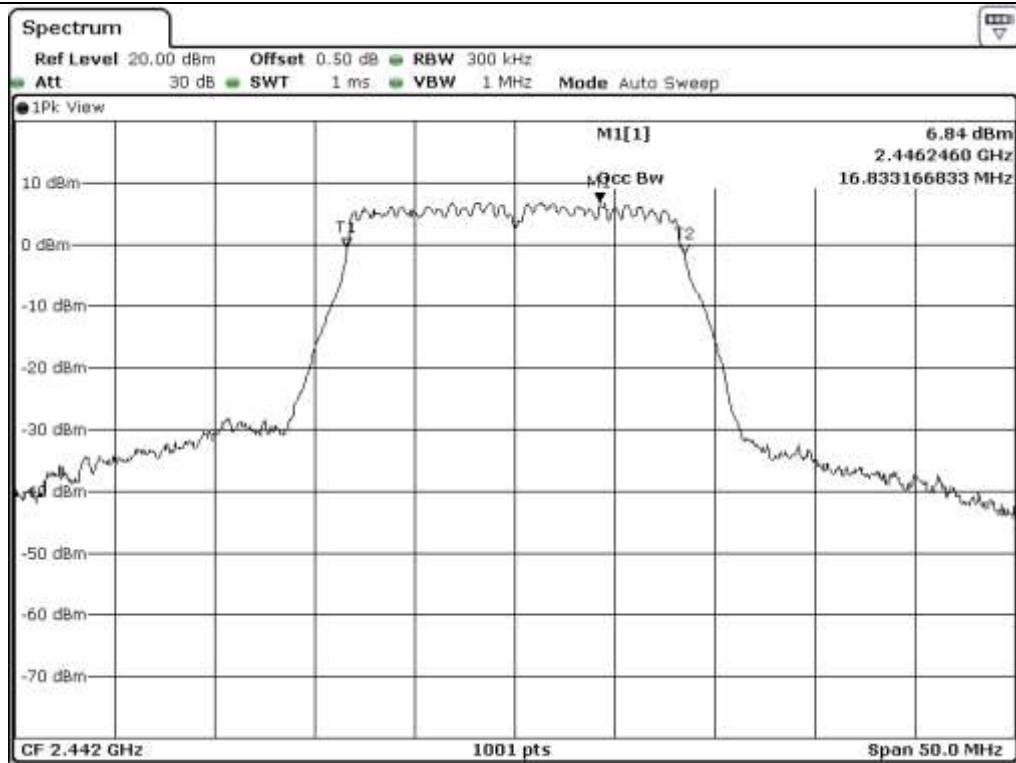

Middle Channel

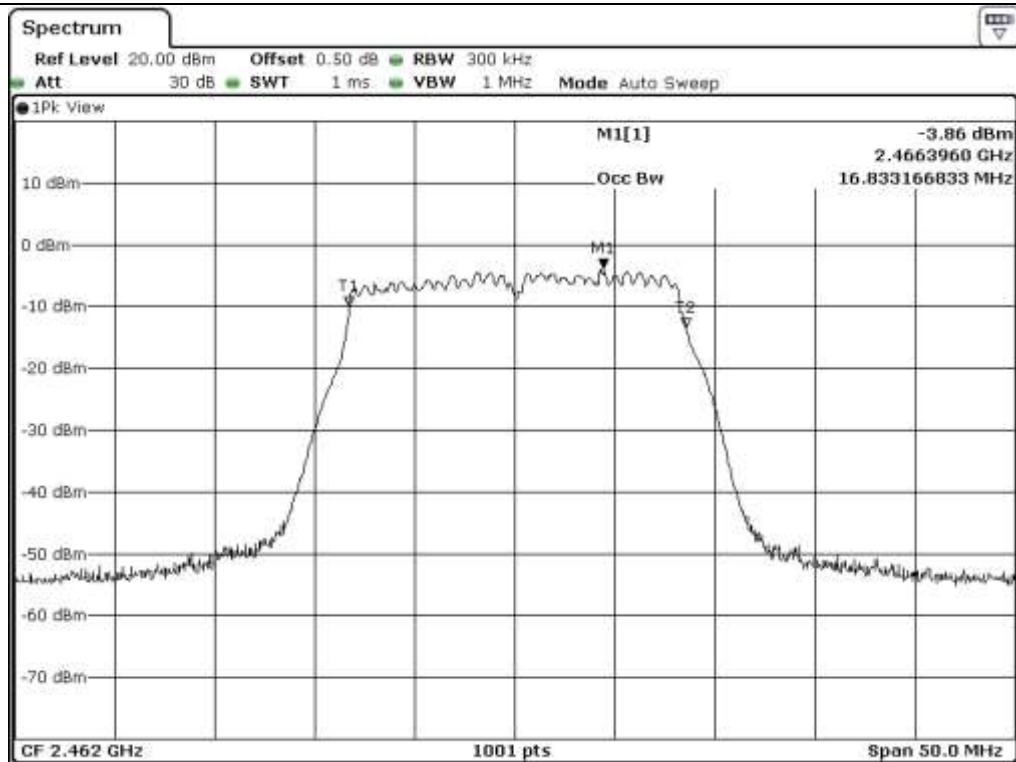

High Channel

8.6 Test data for 802.11n_HT20 WLAN Mode

8.6.1 Test data for Antenna 0

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 412	17.93	0.50	17.43
Middle	2 442	17.93	0.50	17.43
High	2 462	17.93	0.50	17.43

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

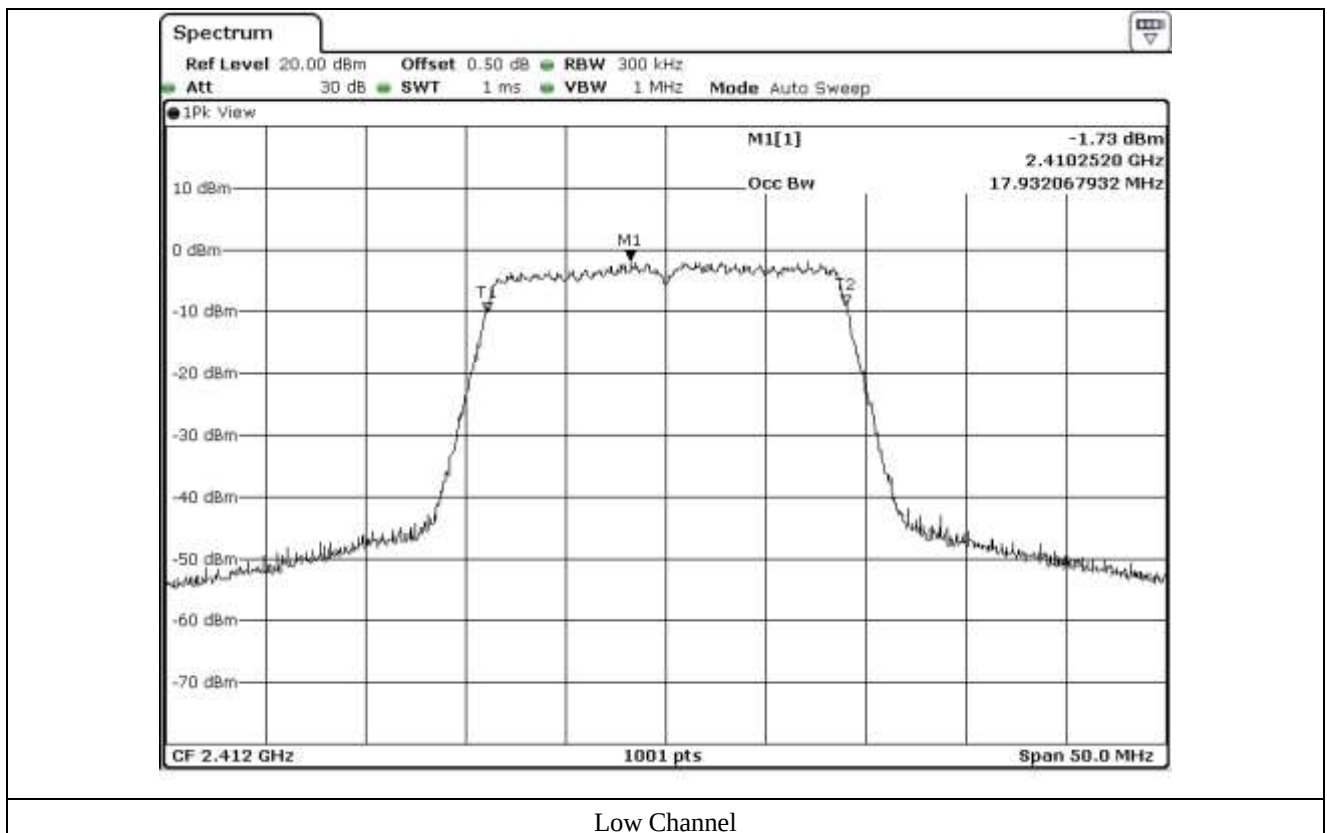

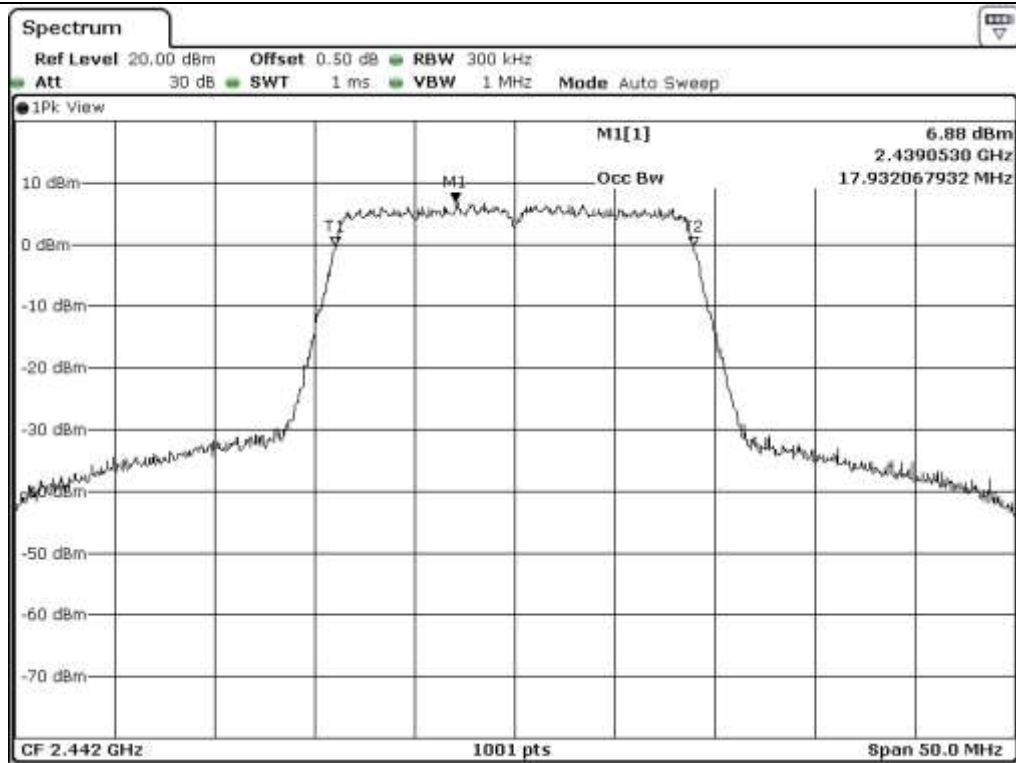

Middle Channel

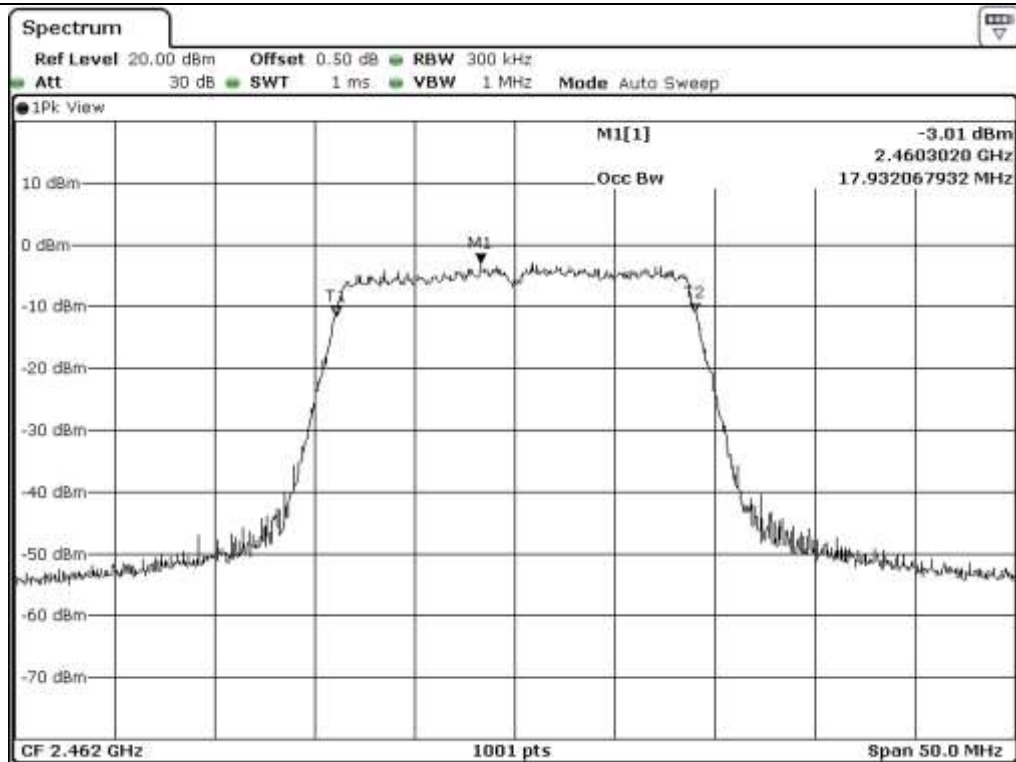

High Channel

8.6.2 Test data for Antenna 1

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 412	17.73	0.50	17.23
Middle	2 442	17.78	0.50	17.28
High	2 462	17.73	0.50	17.23

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

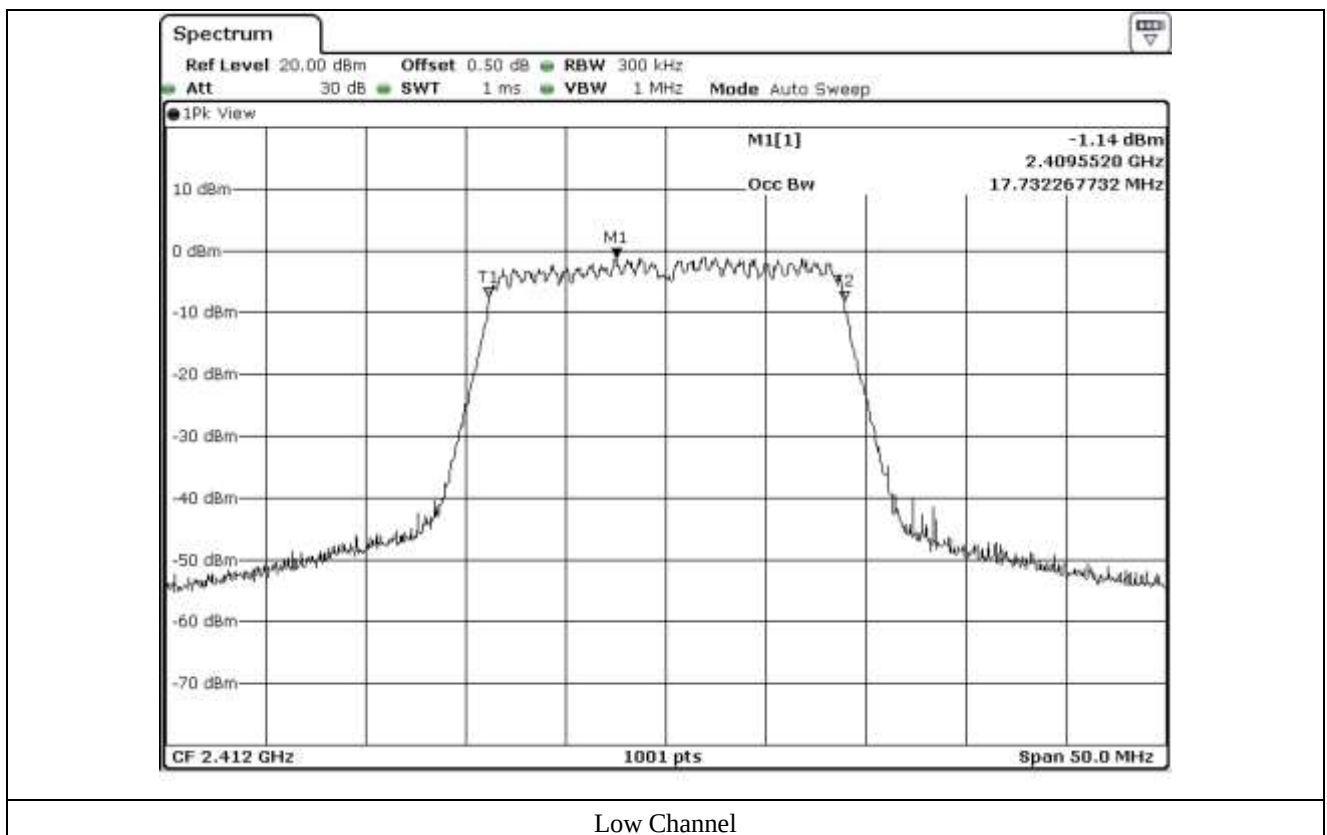

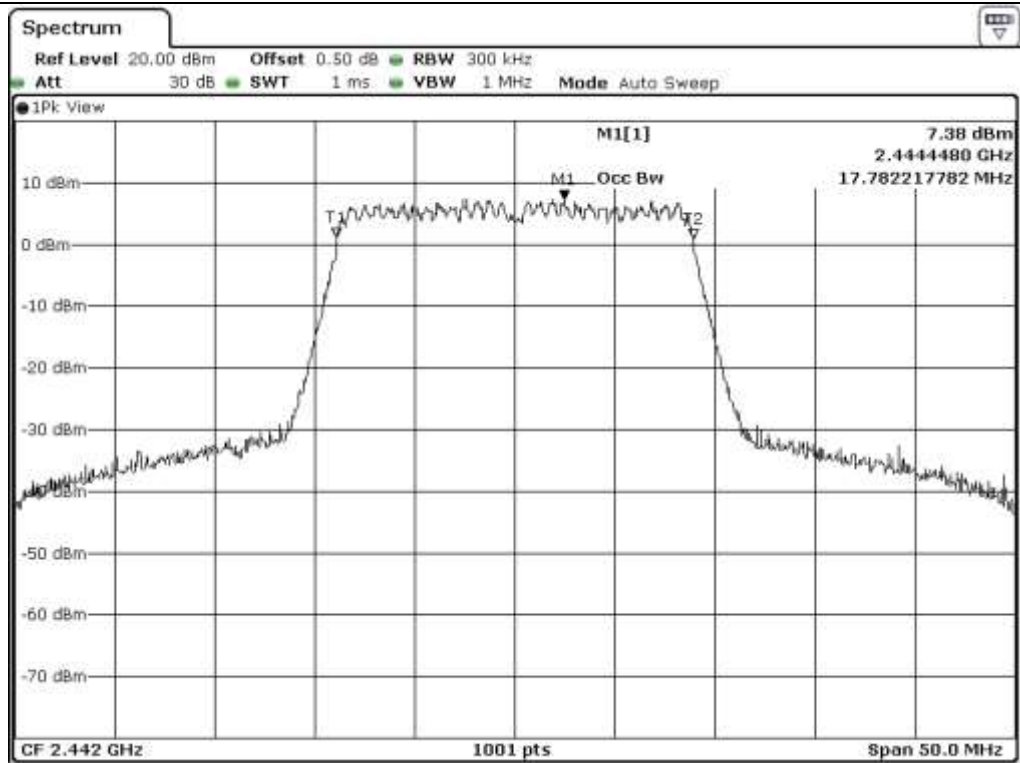

Middle Channel

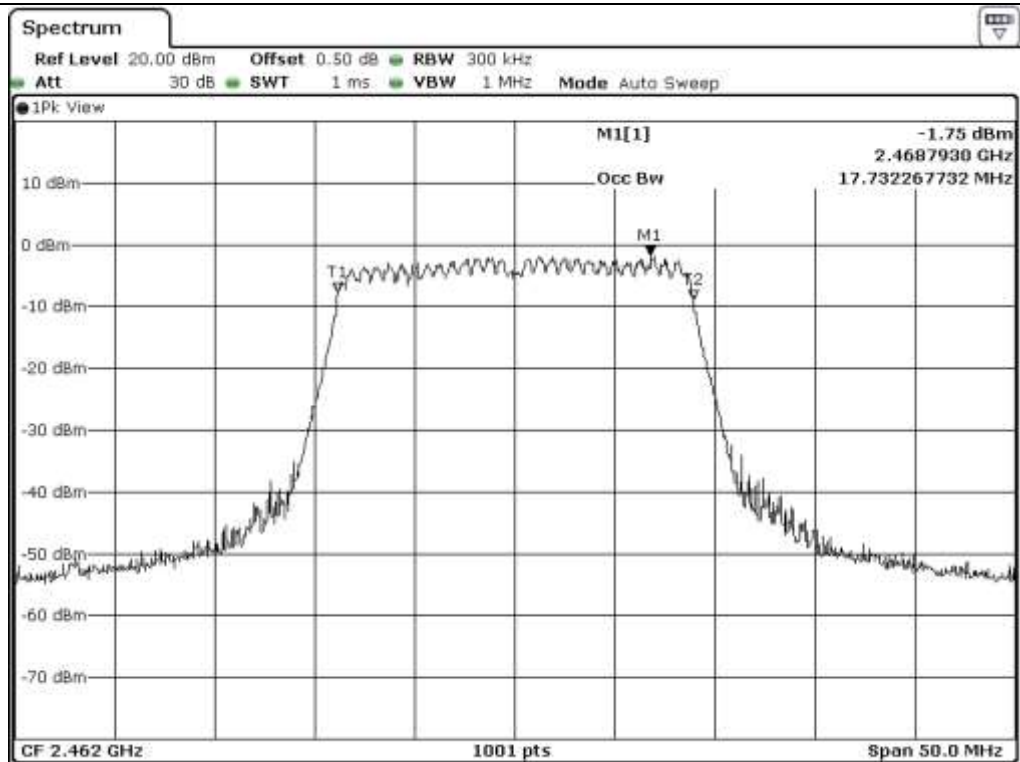

High Channel

8.6.3 Test data for Antenna 2

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 412	17.83	0.50	17.33
Middle	2 442	17.78	0.50	17.28
High	2 462	17.83	0.50	17.33

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

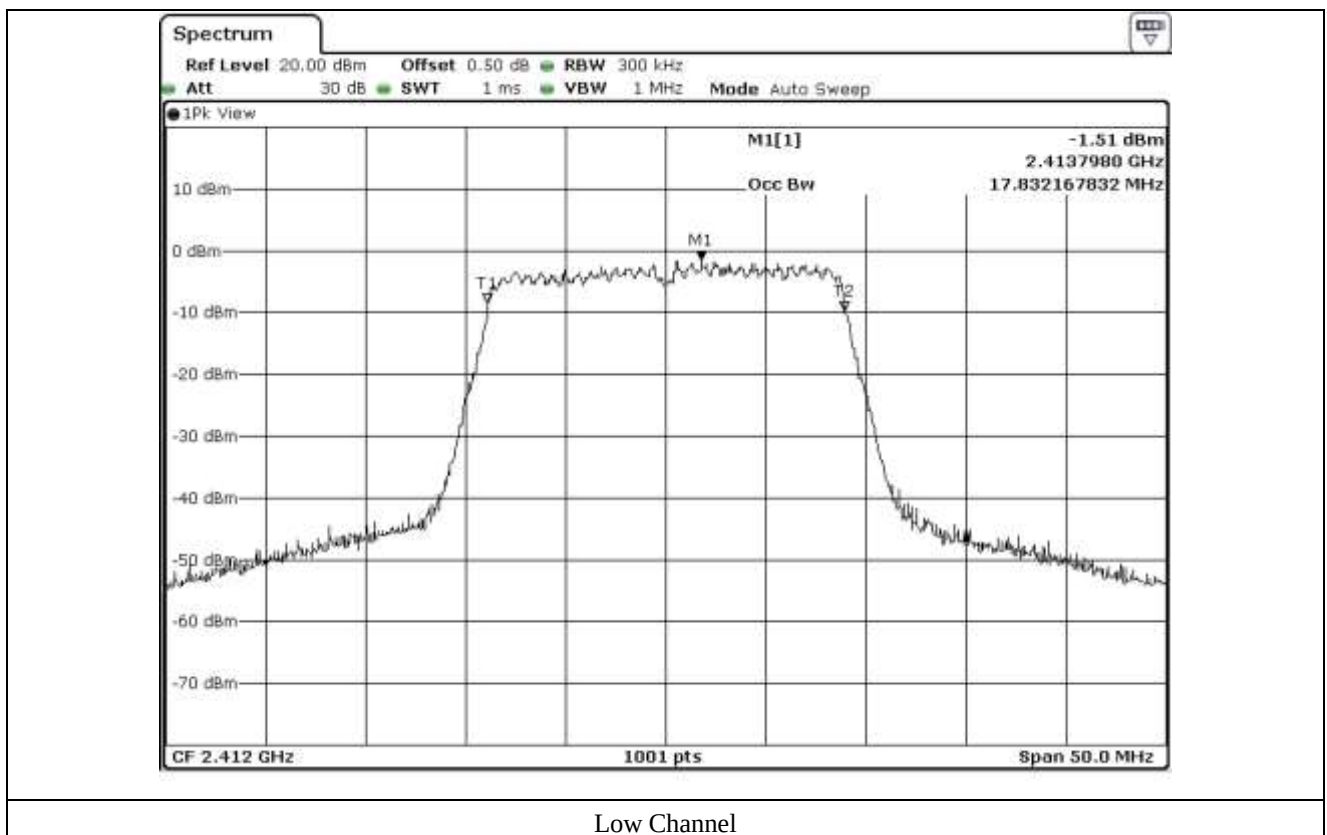

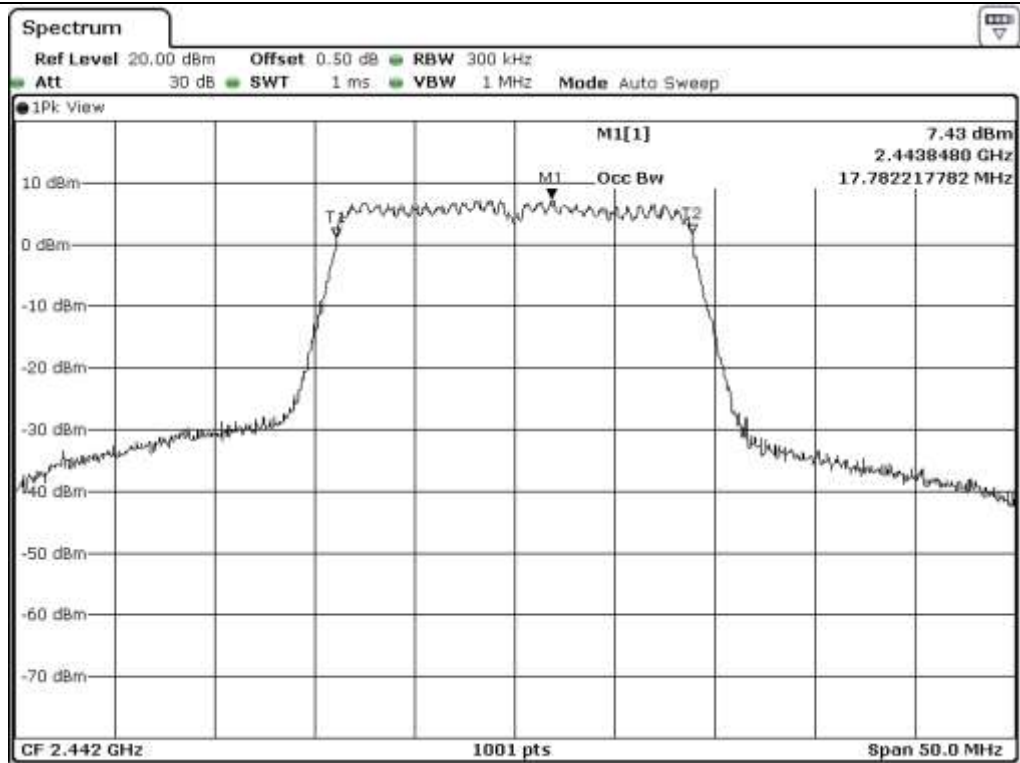

Middle Channel

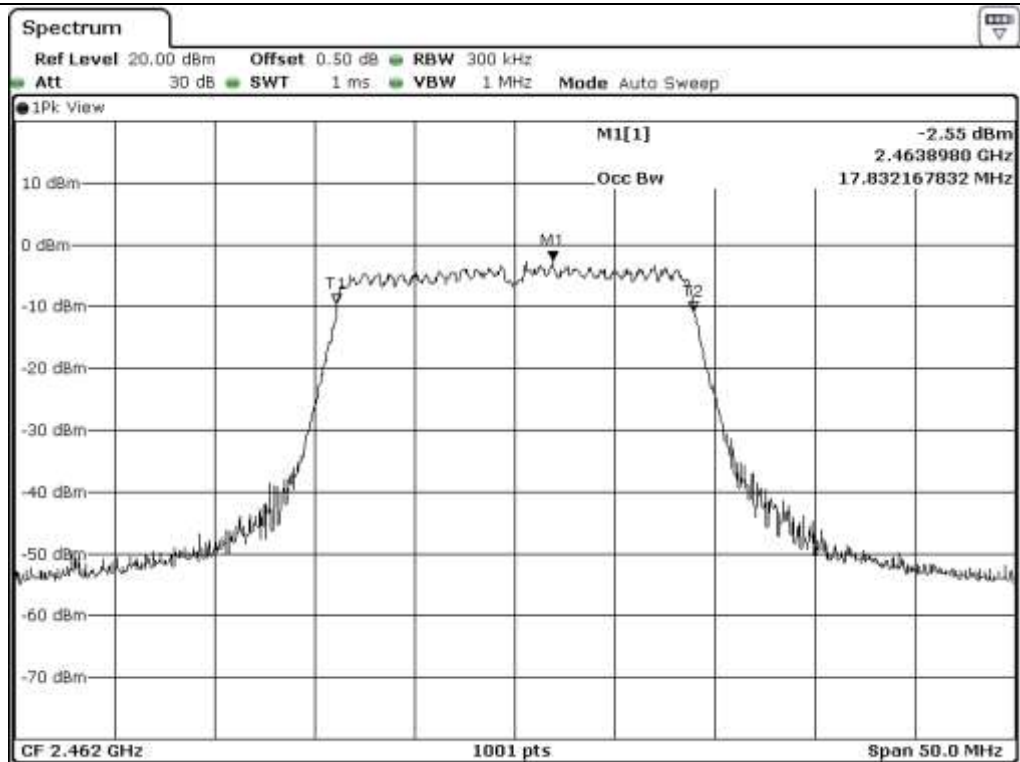

High Channel

8.7 Test data for 802.11n_HT40 WLAN Mode

8.7.1 Test data for Antenna 0


-. Test Date : March 21, 2017

-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 422	36.26	0.50	35.76
Middle	2 442	36.46	0.50	35.96
High	2 452	36.46	0.50	35.96

Remark. Margin = Measured Value - Limit


Tested by: Hyung-Kwon, Oh / Engineer

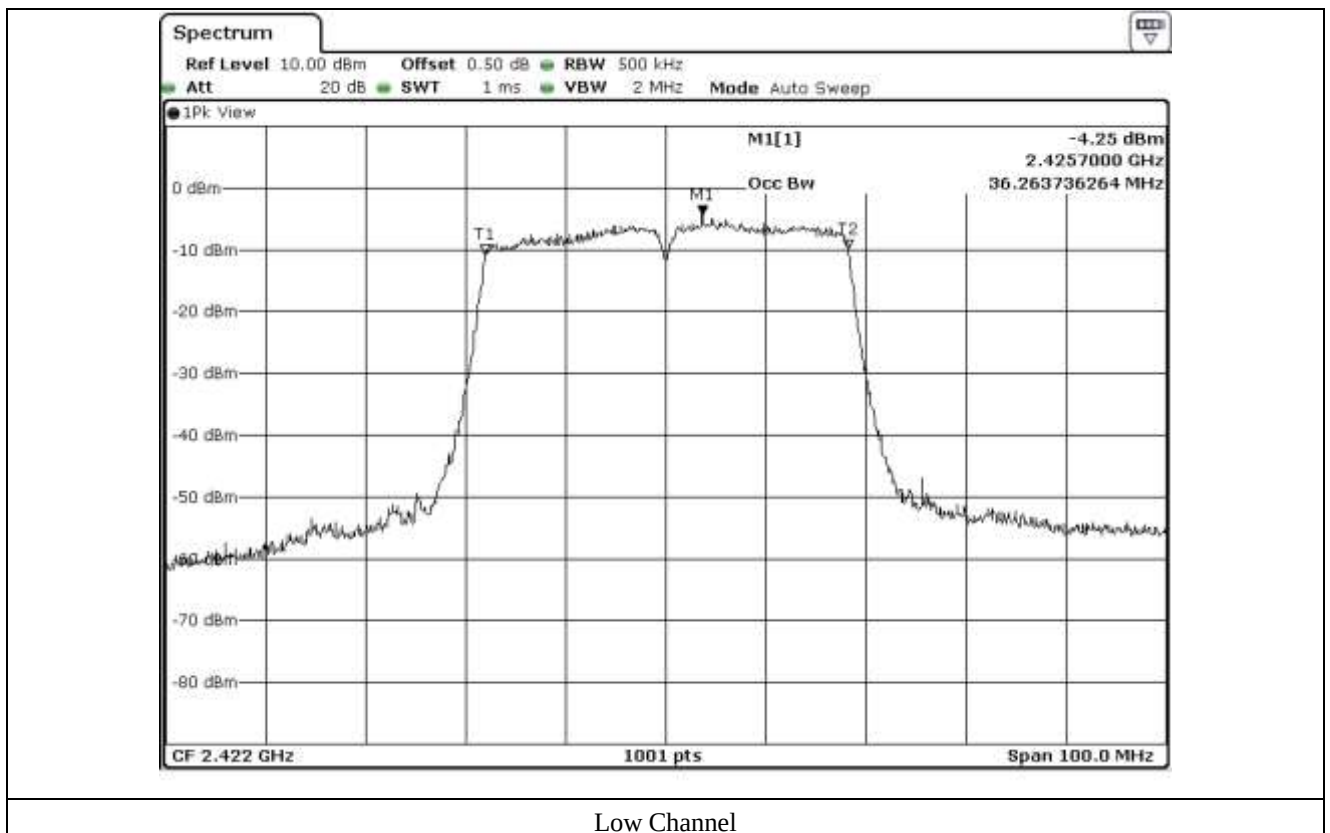

Low Channel

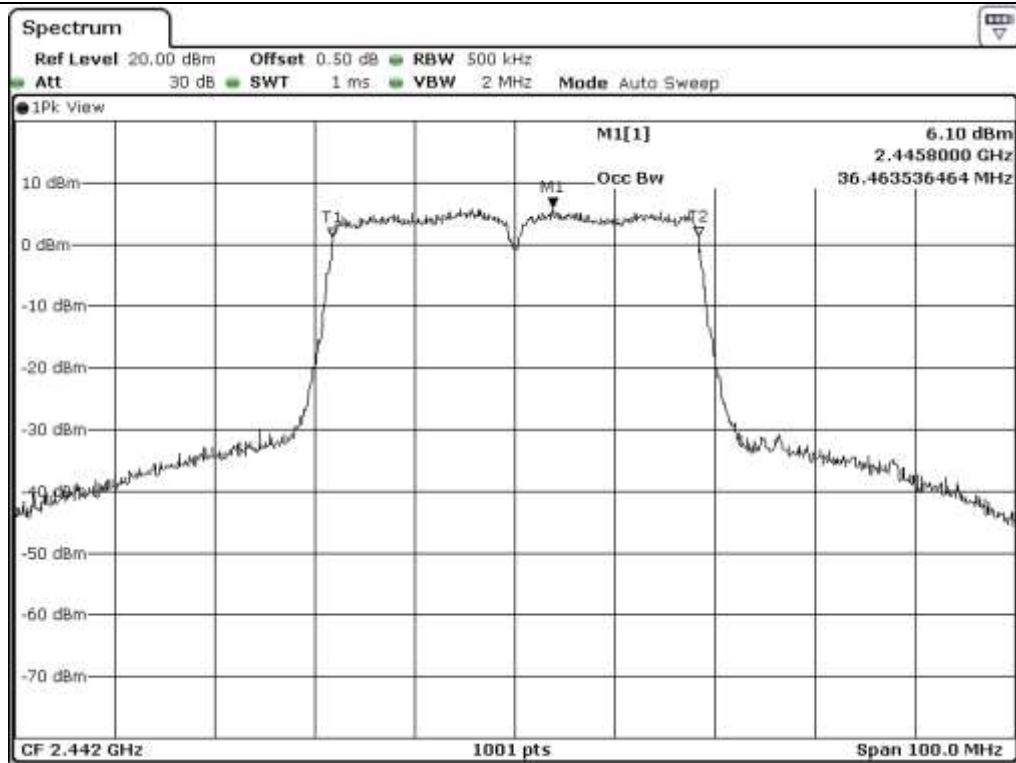

Middle Channel

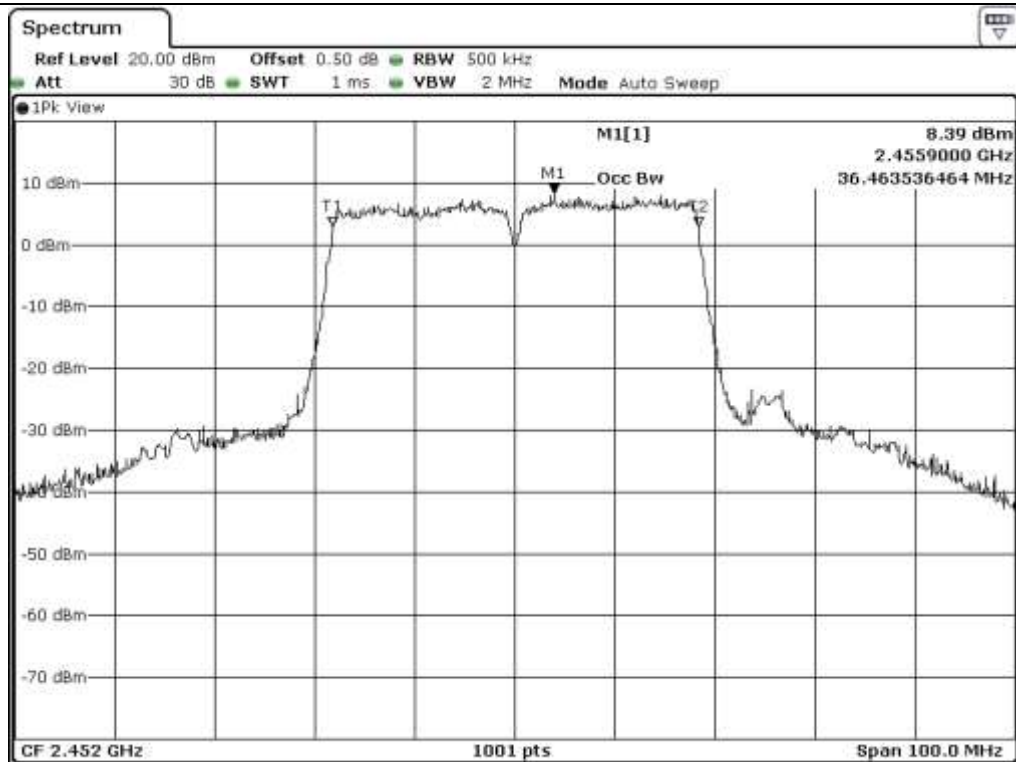

High Channel

8.7.2 Test data for Antenna 1

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 422	36.16	0.50	35.66
Middle	2 442	36.36	0.50	35.86
High	2 452	36.36	0.50	35.86

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

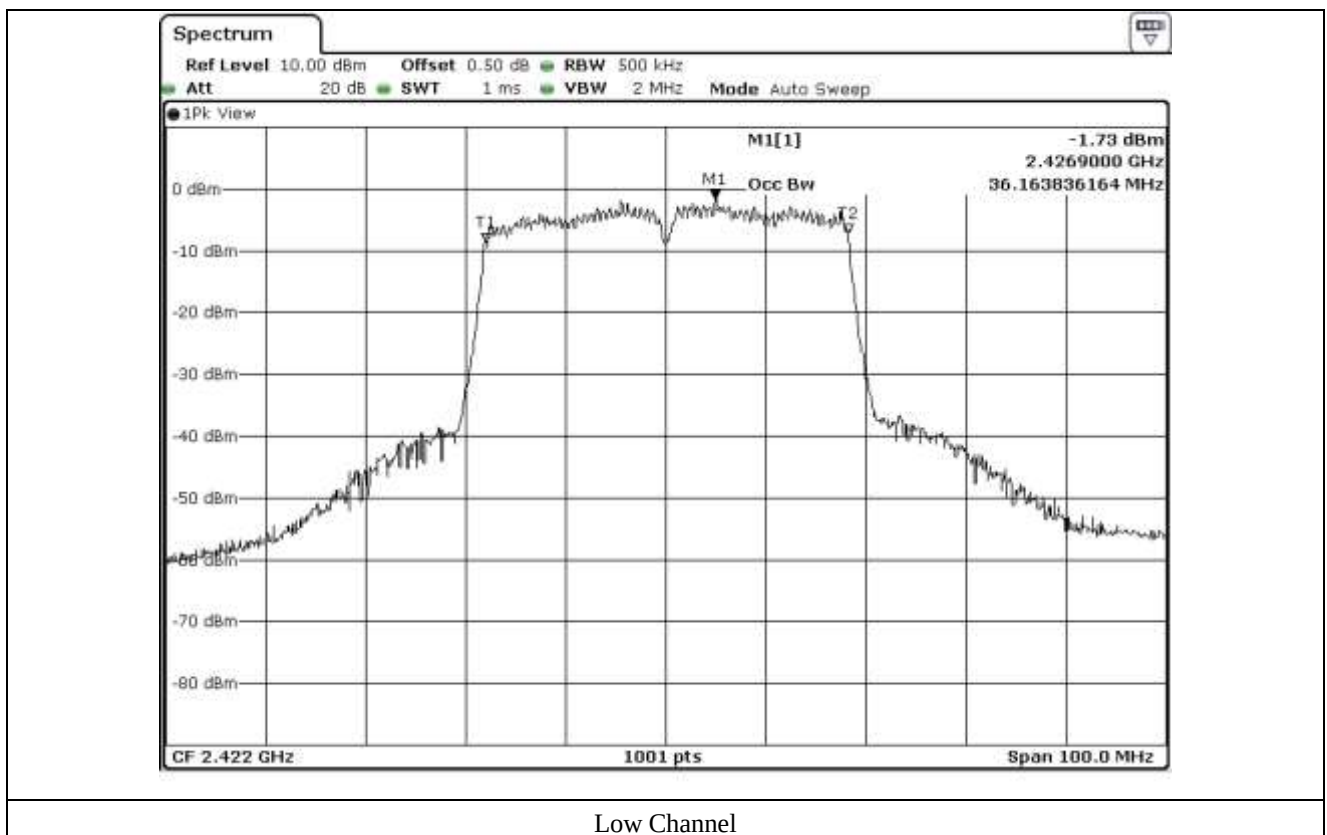

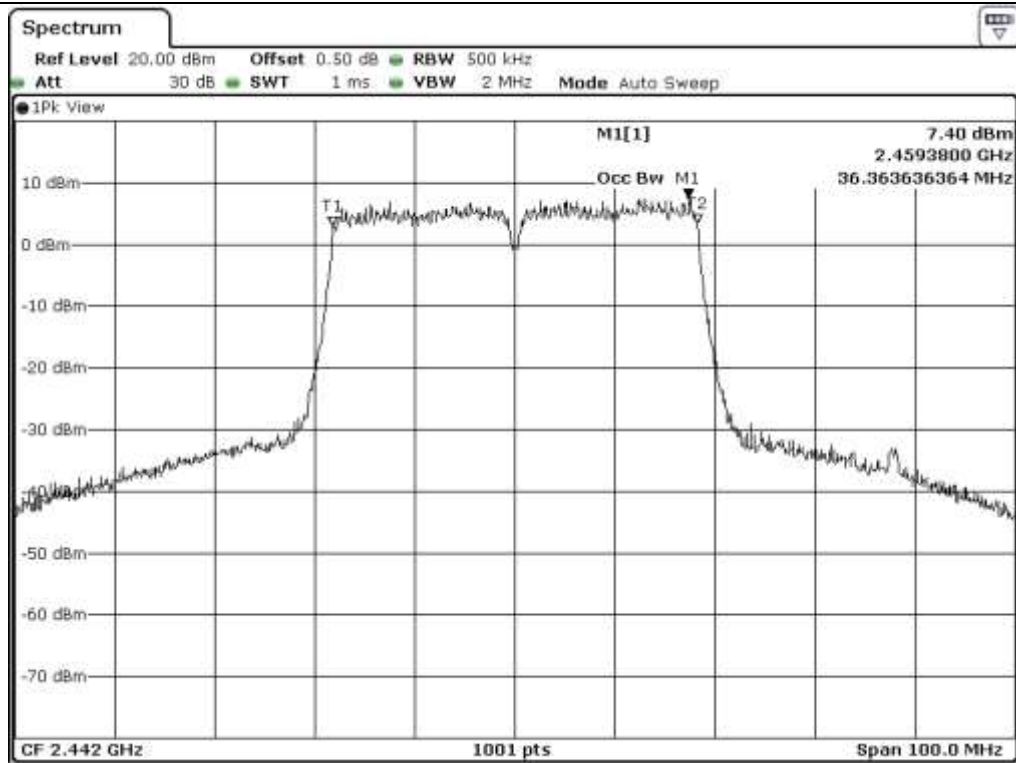

Middle Channel

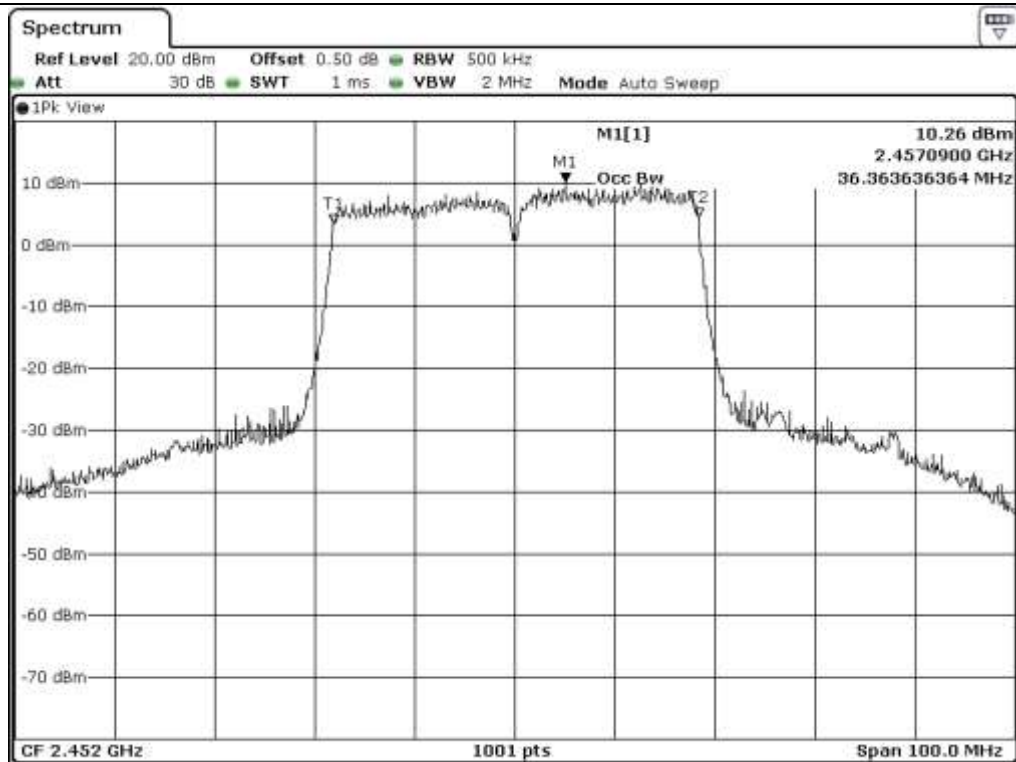

High Channel

8.7.3 Test data for Antenna 2

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 422	36.16	0.50	35.66
Middle	2 442	36.36	0.50	35.86
High	2 452	36.36	0.50	35.86

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Engineer

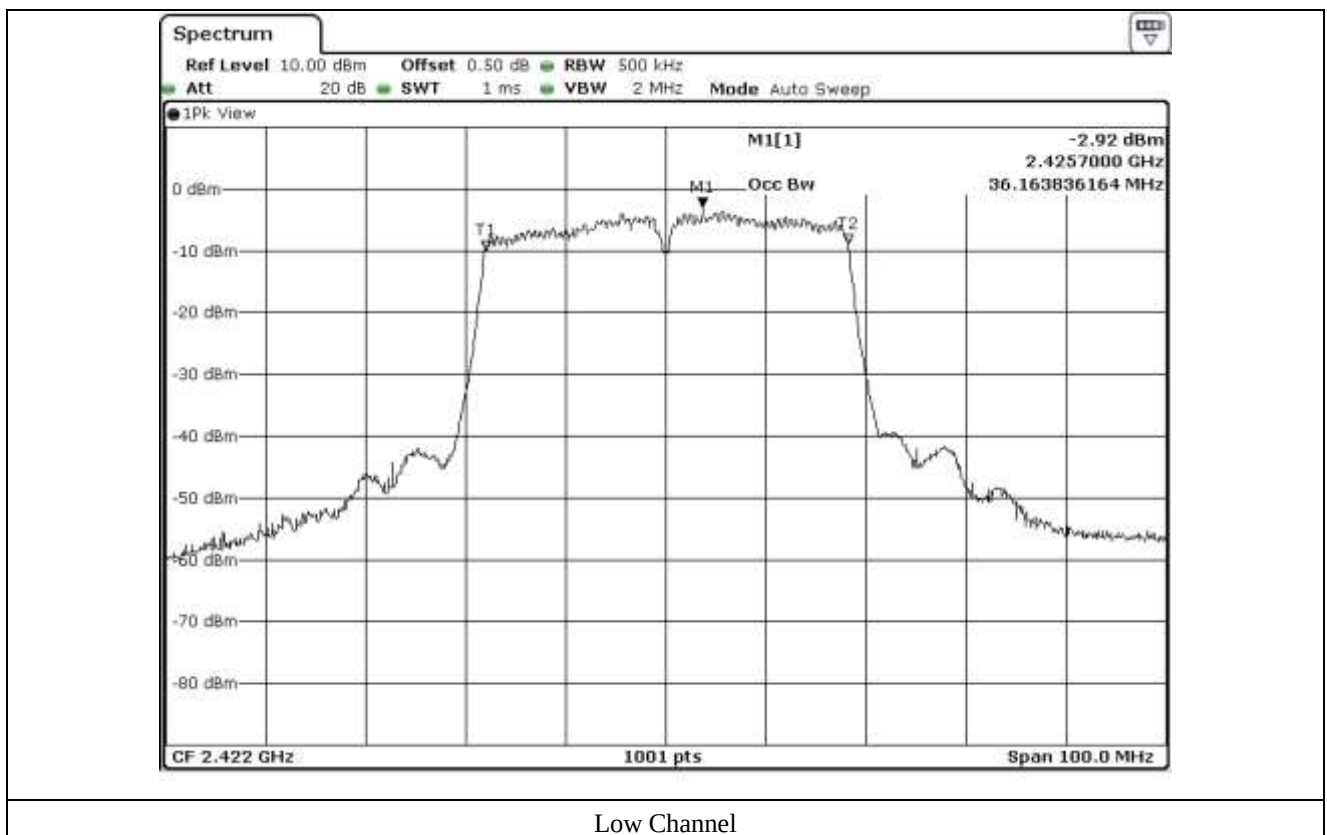

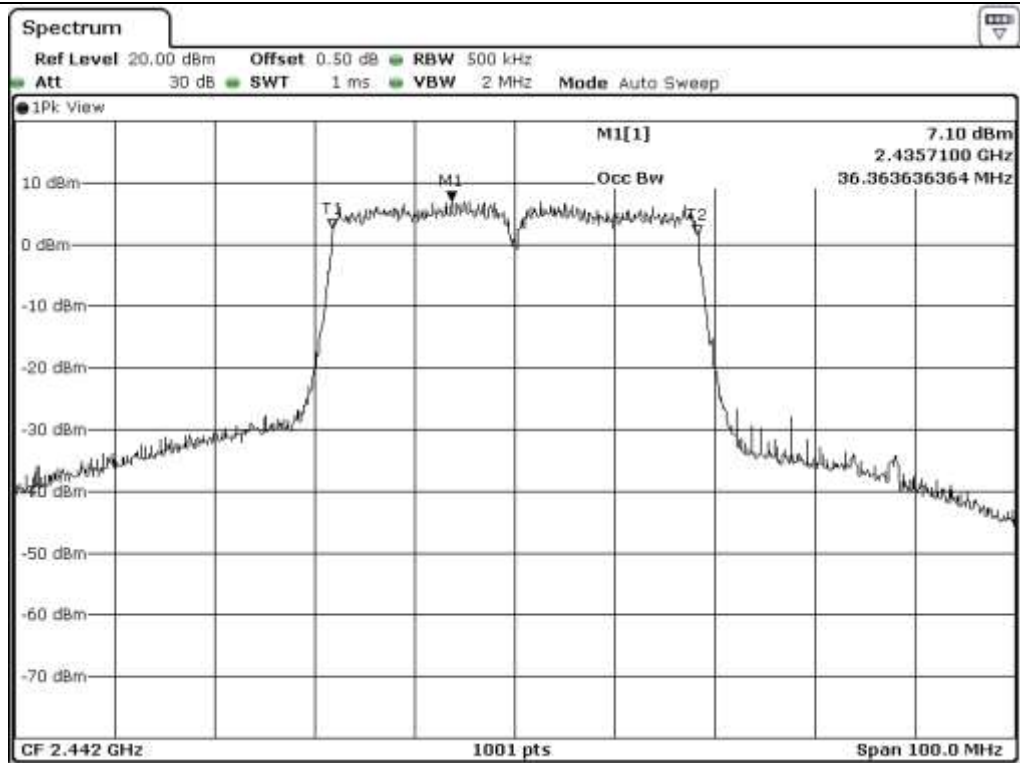

Middle Channel

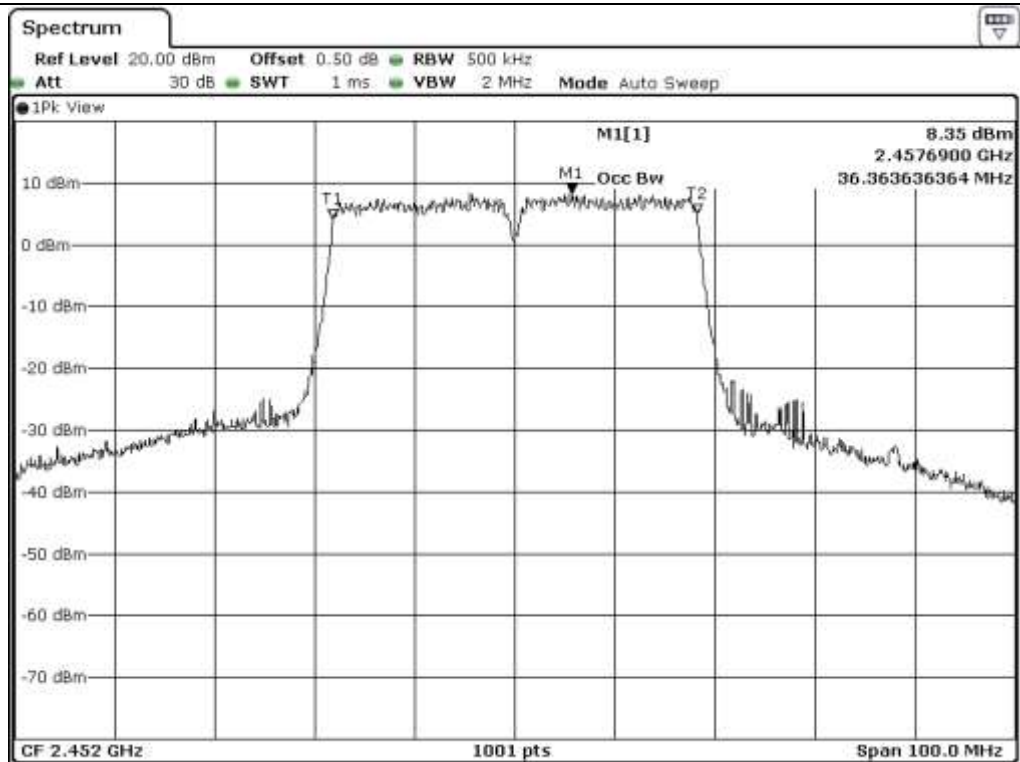

High Channel

9. MAXIMUM PEAK OUTPUT POWER


9.1 Operating environment

Temperature : 23 °C
Relative humidity : 41 % R.H.

9.2 Test set-up

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power to the 99 % Occupied bandwidth as described in Section 9.2.2(KDB 558074 D01 DTS Meas Guidance V04).

The EUT was operating in transmit mode at the appropriate center frequency.

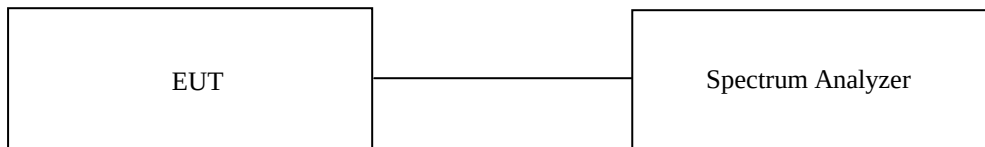

9.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	May. 31, 2016 (1Y)

All test equipment used is calibrated on a regular basis.

9.4 Test data for 802.11b WLAN Mode

9.4.1 Test data for Antenna 0

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	99 % Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	11.69	14.07	30.00	15.93
MIDDLE	2 442.00	11.84	16.38	30.00	13.62
HIGH	2 462.00	11.79	15.09	30.00	14.91

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Hyung-Kwon, Oh / Engineer

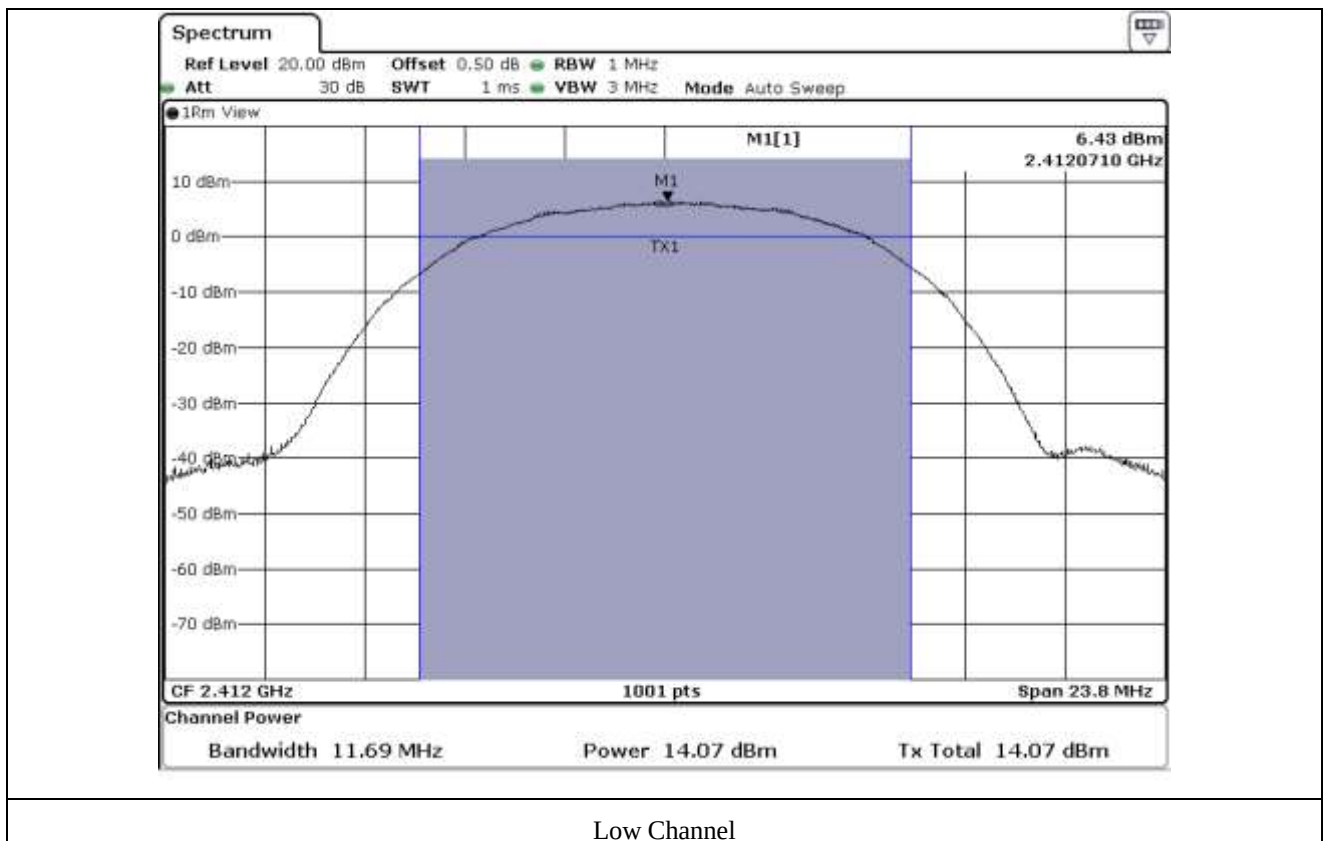

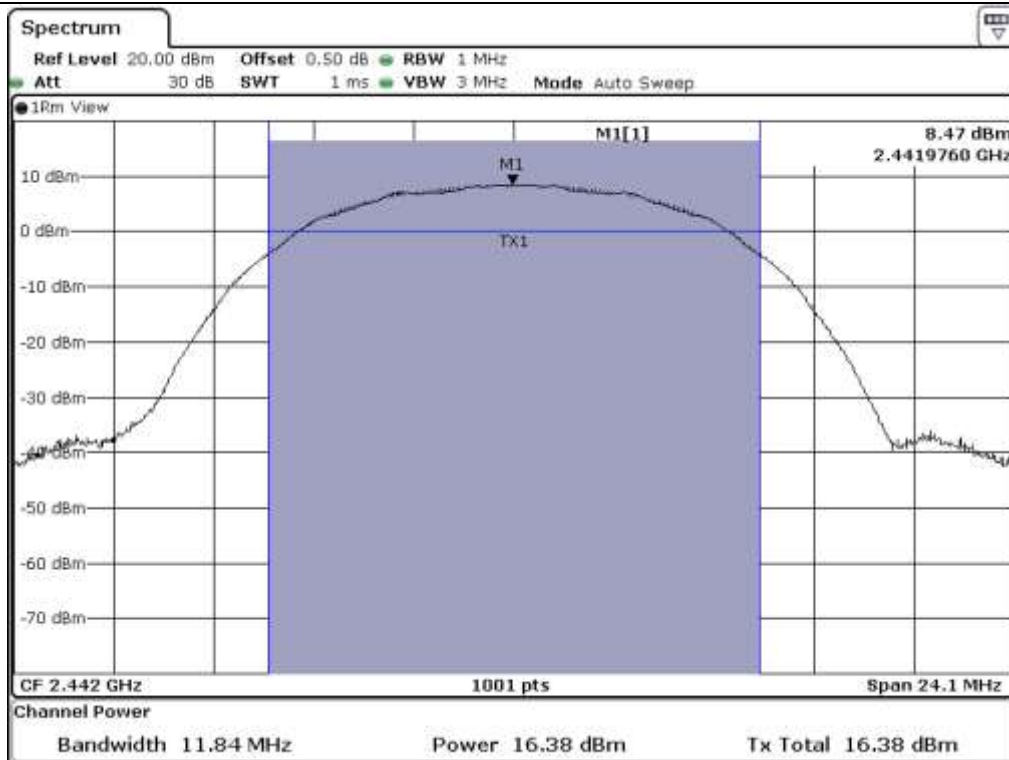

Middle Channel

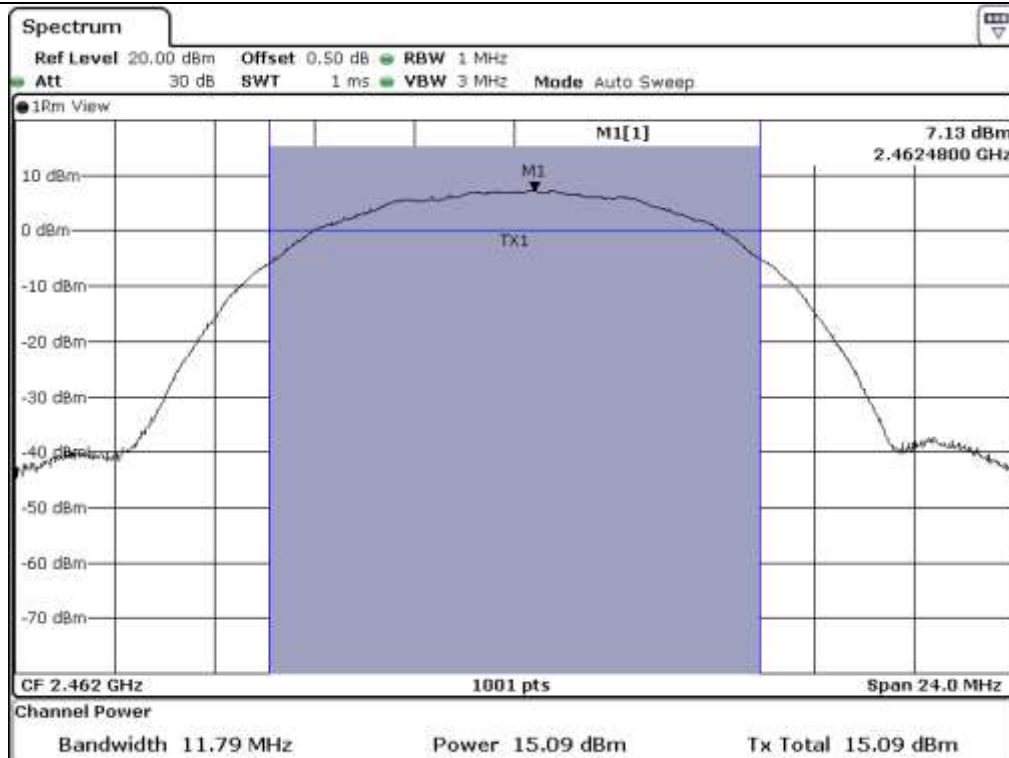

High Channel

9.4.2 Test data for Antenna 1


-. Test Date : March 21, 2017


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	99 % Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	11.69	14.08	30.00	15.92
MIDDLE	2 442.00	11.79	16.46	30.00	13.54
HIGH	2 462.00	11.69	14.90	30.00	15.10


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)


Tested by: Hyung-Kwon, Oh / Engineer

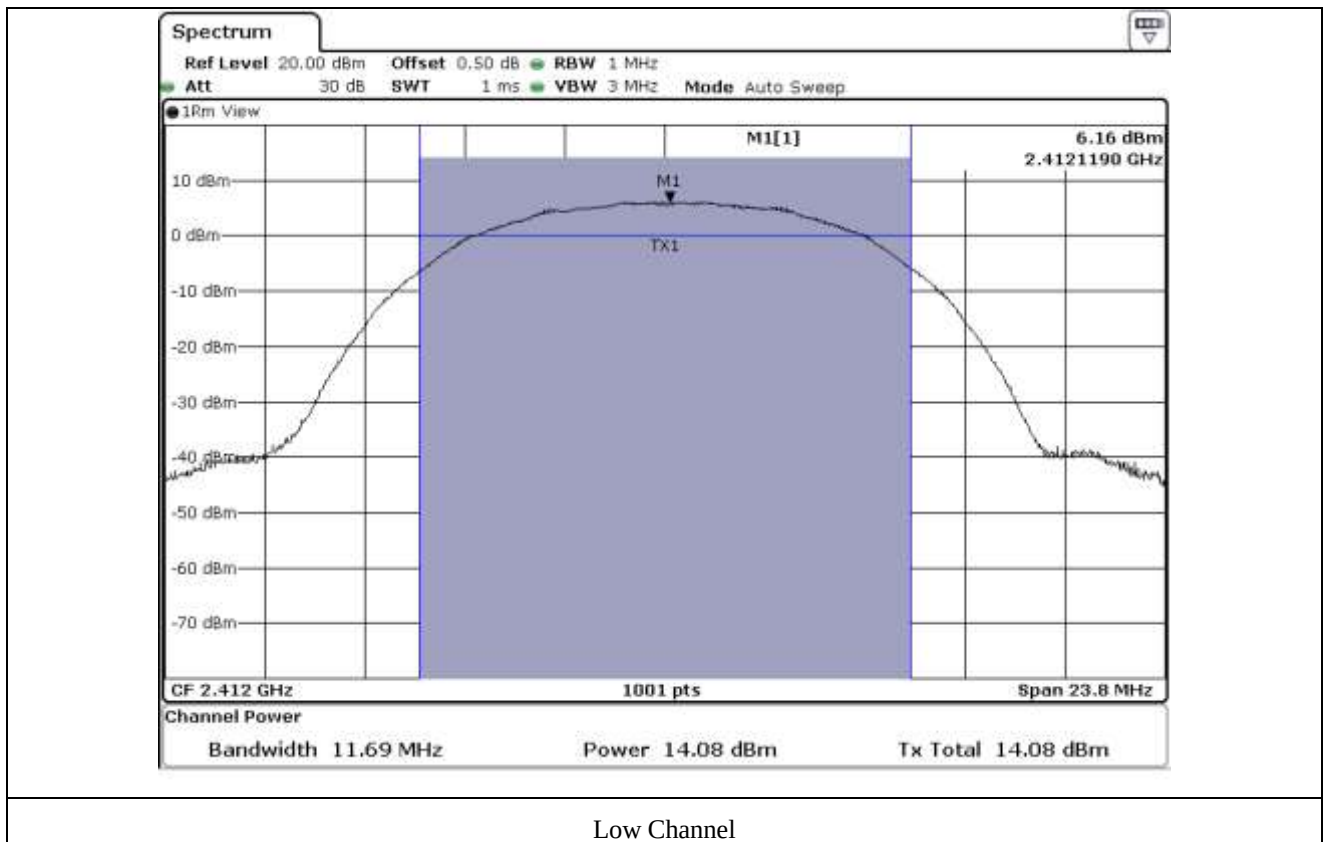

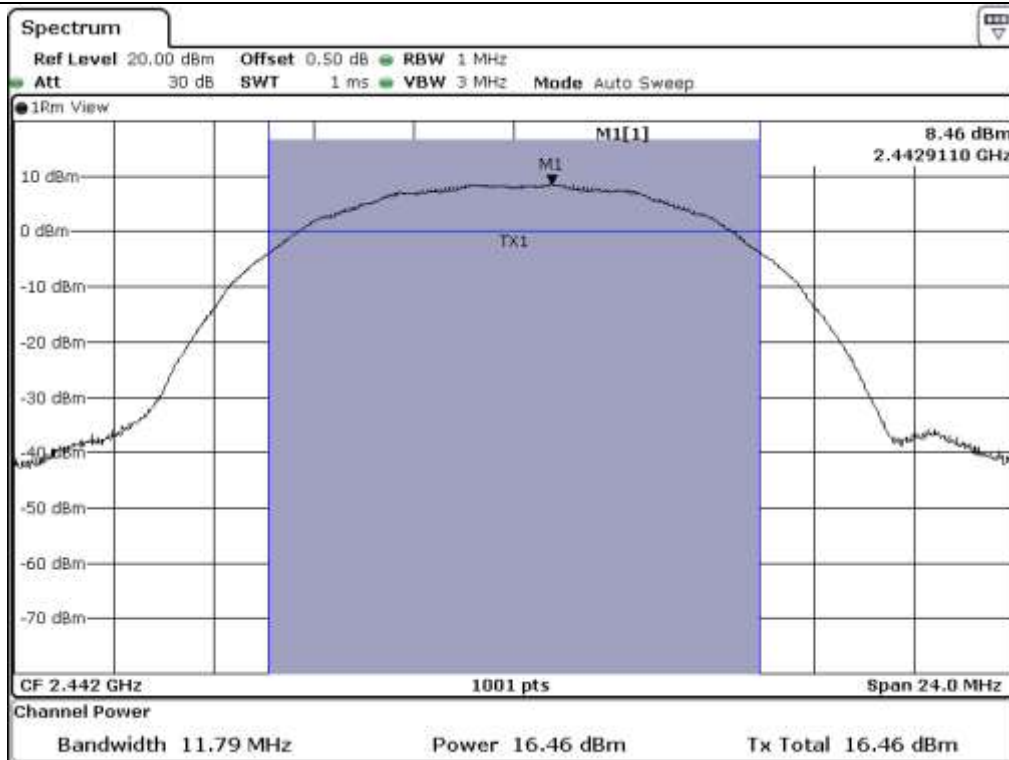

Middle Channel

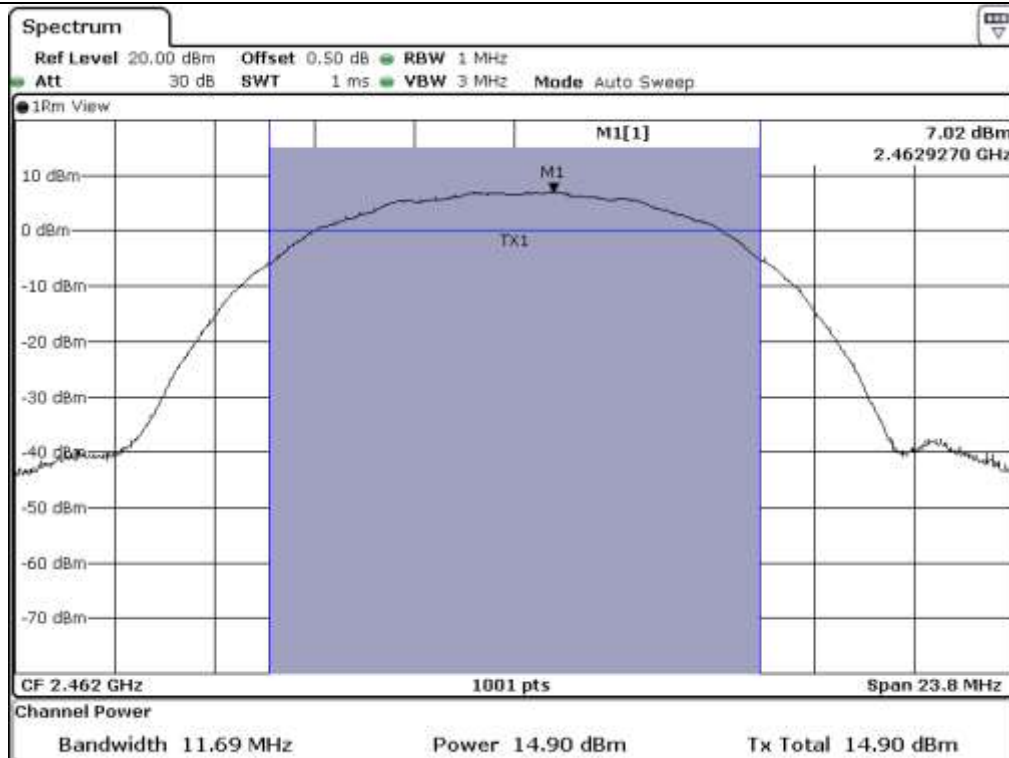

High Channel

9.4.3 Test data for Antenna 2


-. Test Date : March 21, 2017


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	99 % Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	11.74	14.21	30.00	15.79
MIDDLE	2 442.00	11.79	16.56	30.00	13.44
HIGH	2 462.00	11.74	15.06	30.00	14.94


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)


Tested by: Hyung-Kwon, Oh / Engineer

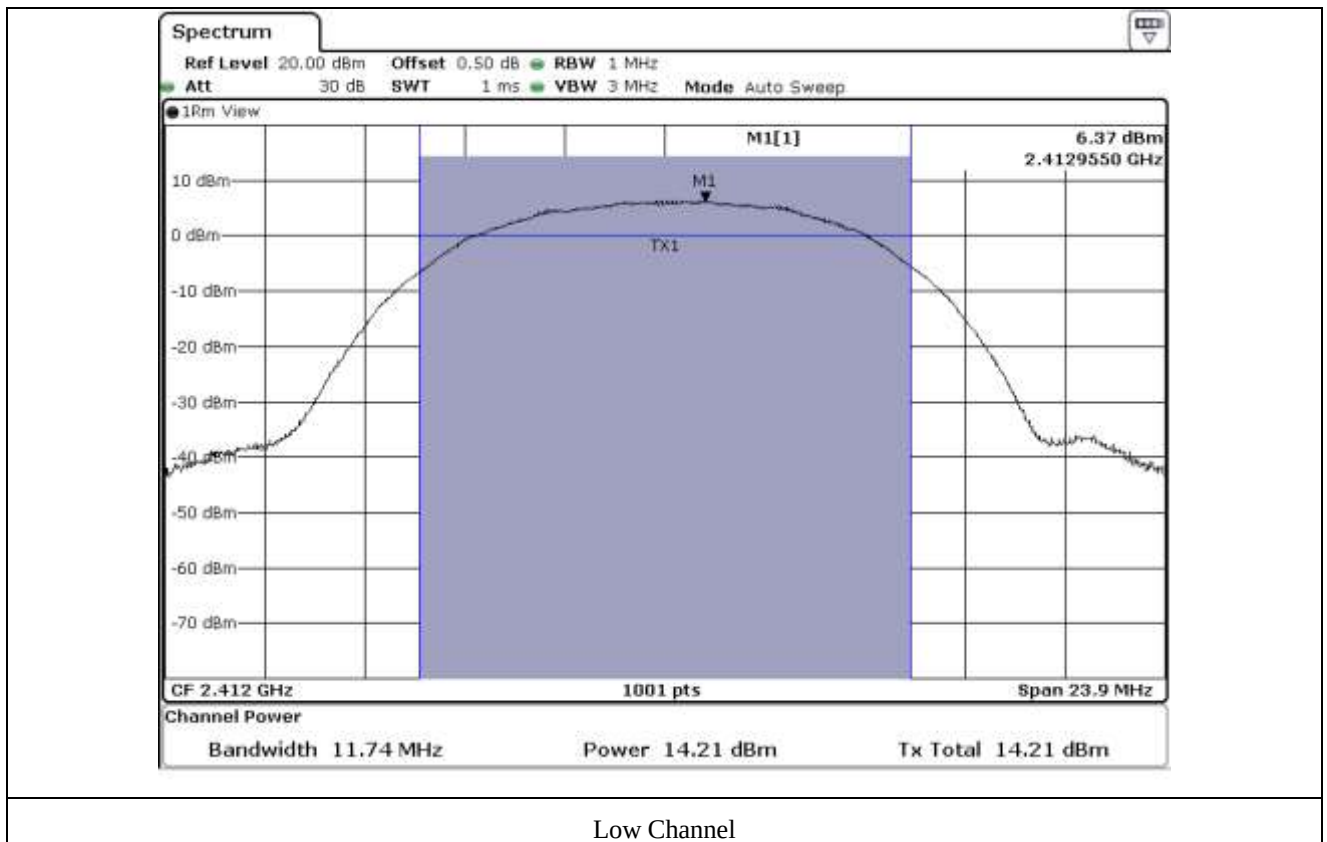

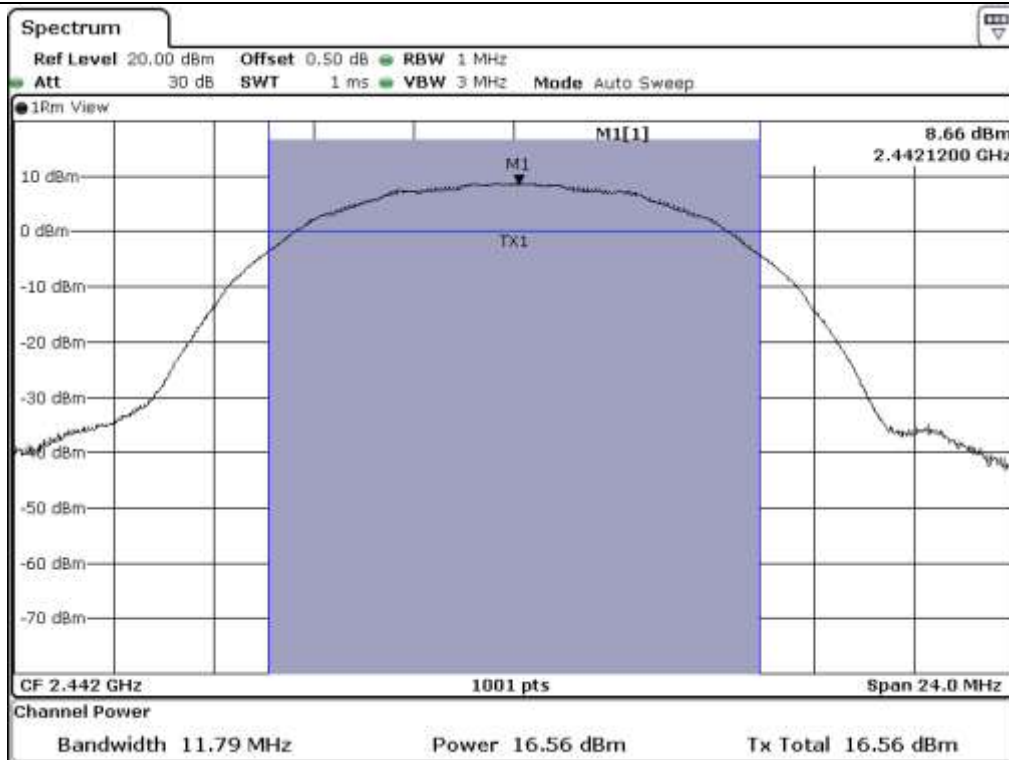

Middle Channel

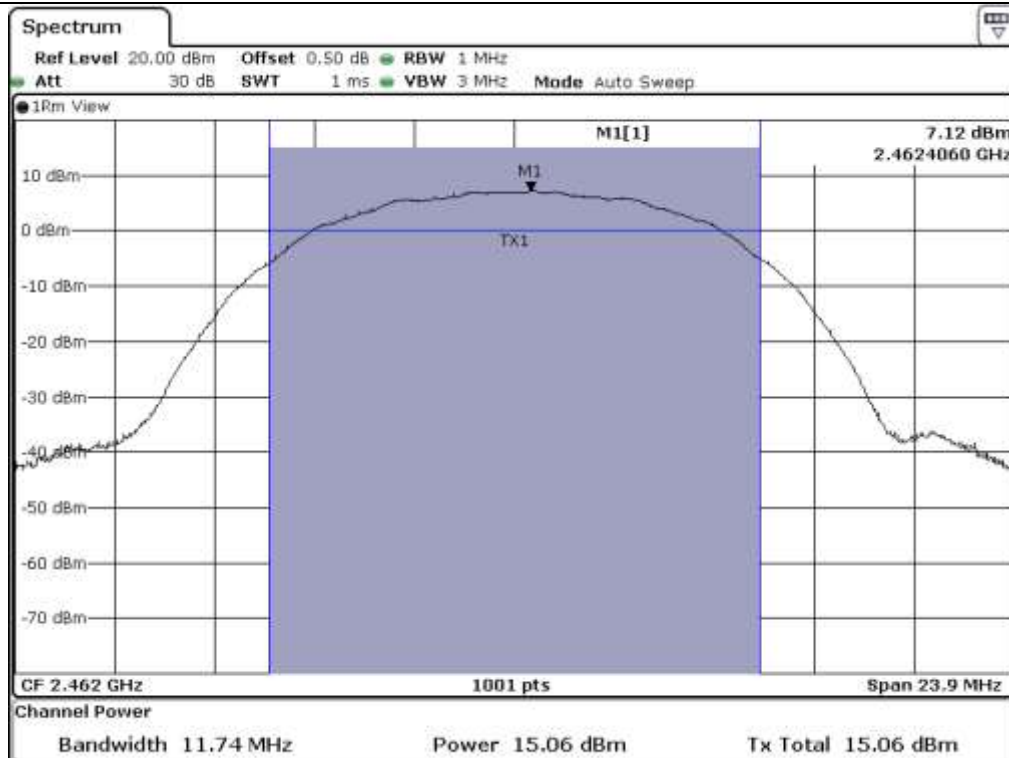

High Channel

9.4.4 Test data for Multiple transmit

-. Test Date : March 21, 2017

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	CALCULATED OUTPUT POWER (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	18.89	29.63	10.74
MIDDLE	2 442.00	21.24	29.63	8.39
HIGH	2 462.00	19.79	29.63	9.84

Remark 1 : Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Remark 2 : Calculated Output Power= $10\log (10^{(\text{Antenna0 Output Power}/10)}+10^{(\text{Antenna1 Output Power}/10)}+10^{(\text{Antenna2 Output Power}/10)})$

Remark 3 : Directional gain = $10*\log[(10^{G0/20}+10^{G1/20}+10^{G2/20})^2/N]$ dBi

Remark 4 : Limit = 30 dBm – Exceeds Antenna gain

Remark 5 : Exceeds Antenna gain = Above the limits is calculated according to antenna gain.

Because antenna gain is higher than 6 dBi.



Tested by: Hyung-Kwon, Oh / Engineer

9.5 Test data for 802.11g WLAN Mode

9.5.1 Test data for Antenna 0

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	99 % Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	16.93	11.51	30.00	18.49
MIDDLE	2 442.00	16.93	20.09	30.00	9.91
HIGH	2 462.00	16.93	8.87	30.00	21.13

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Hyung-Kwon, Oh / Engineer

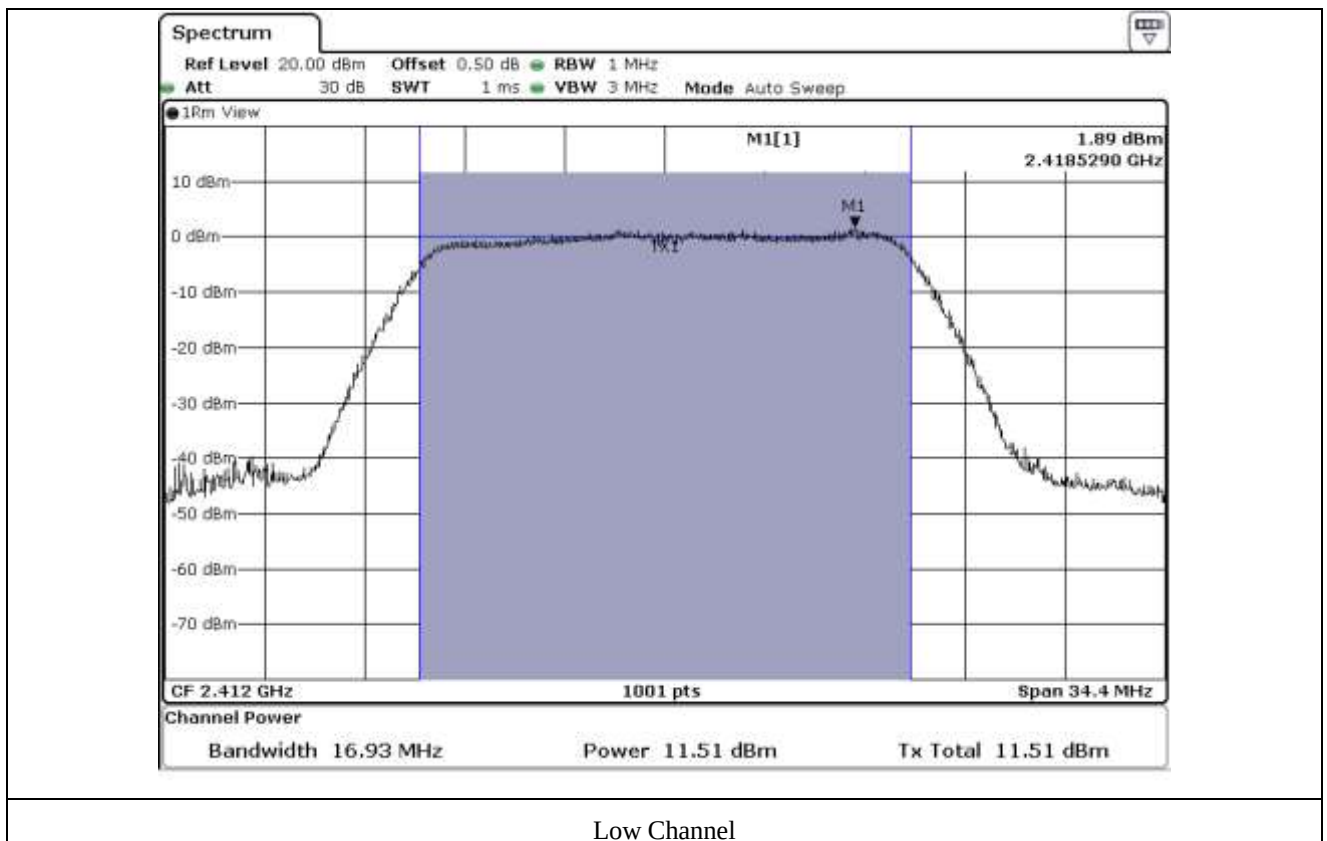

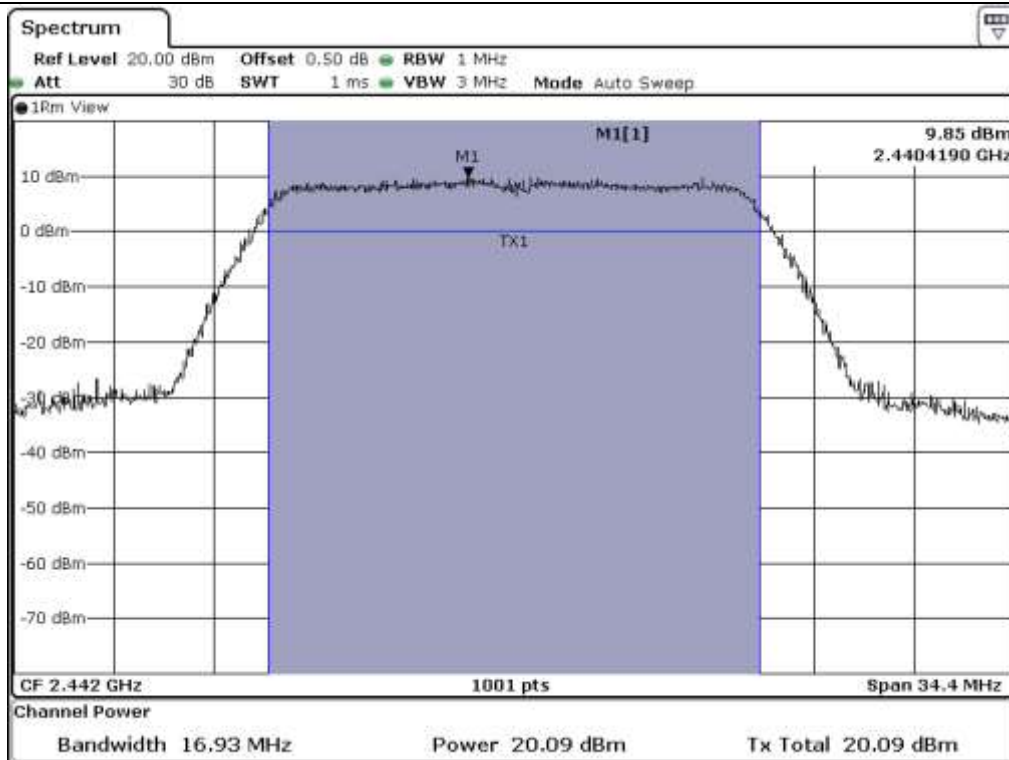

Middle Channel

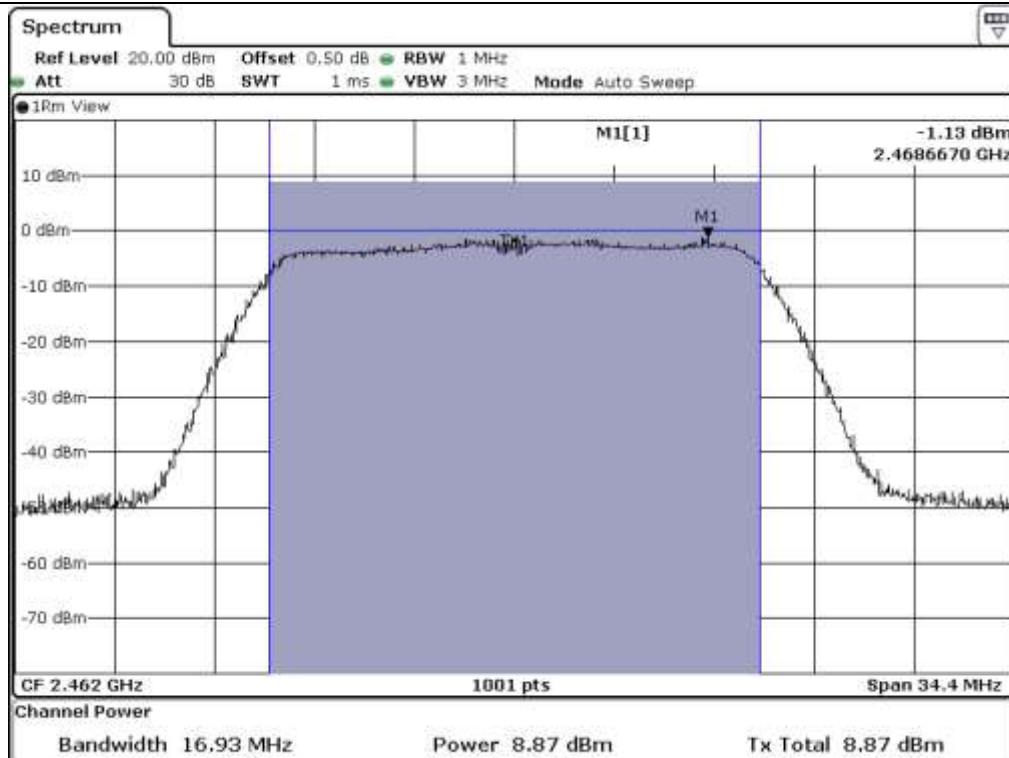

High Channel

9.5.2 Test data for Antenna 1

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	99 % Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	16.73	11.90	30.00	18.10
MIDDLE	2 442.00	16.83	20.26	30.00	9.74
HIGH	2 462.00	16.83	9.95	30.00	20.05

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Hyung-Kwon, Oh / Engineer

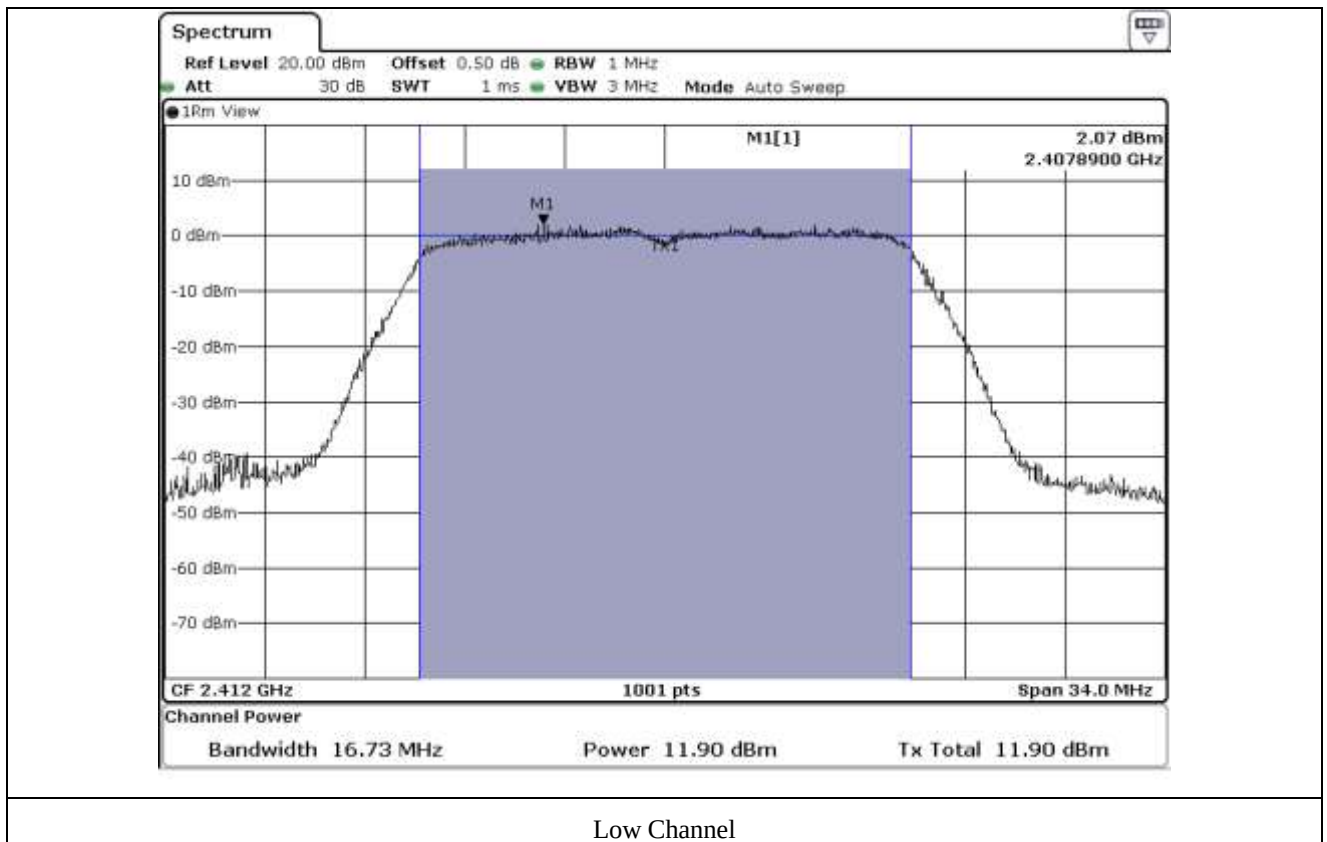

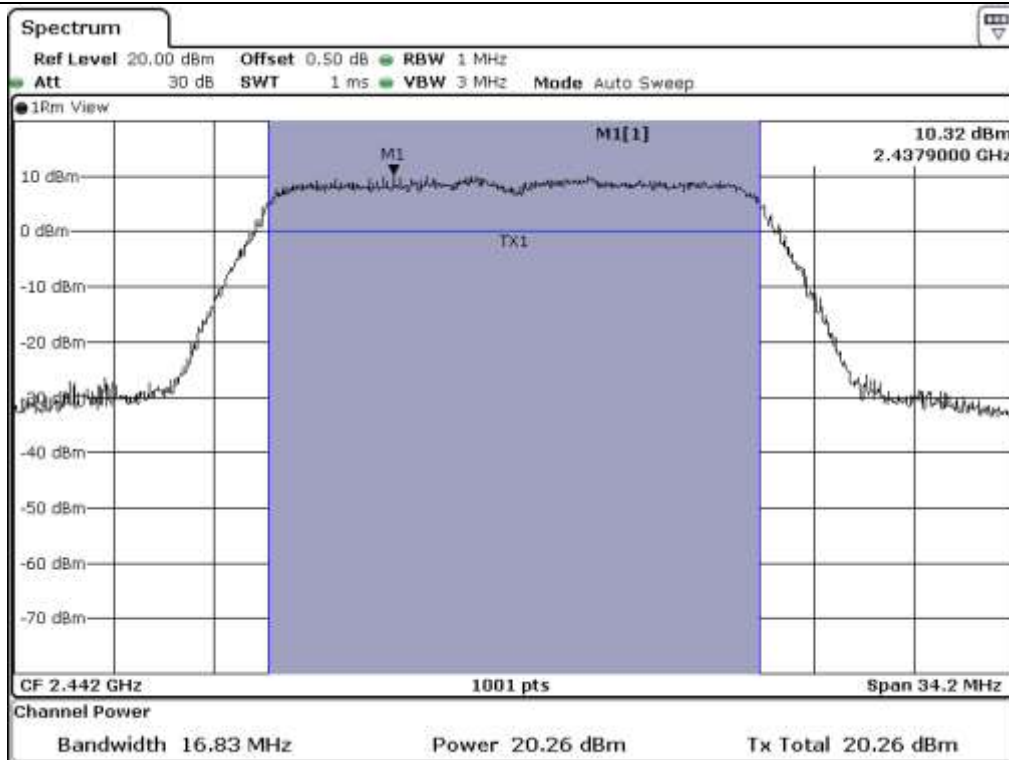

Middle Channel

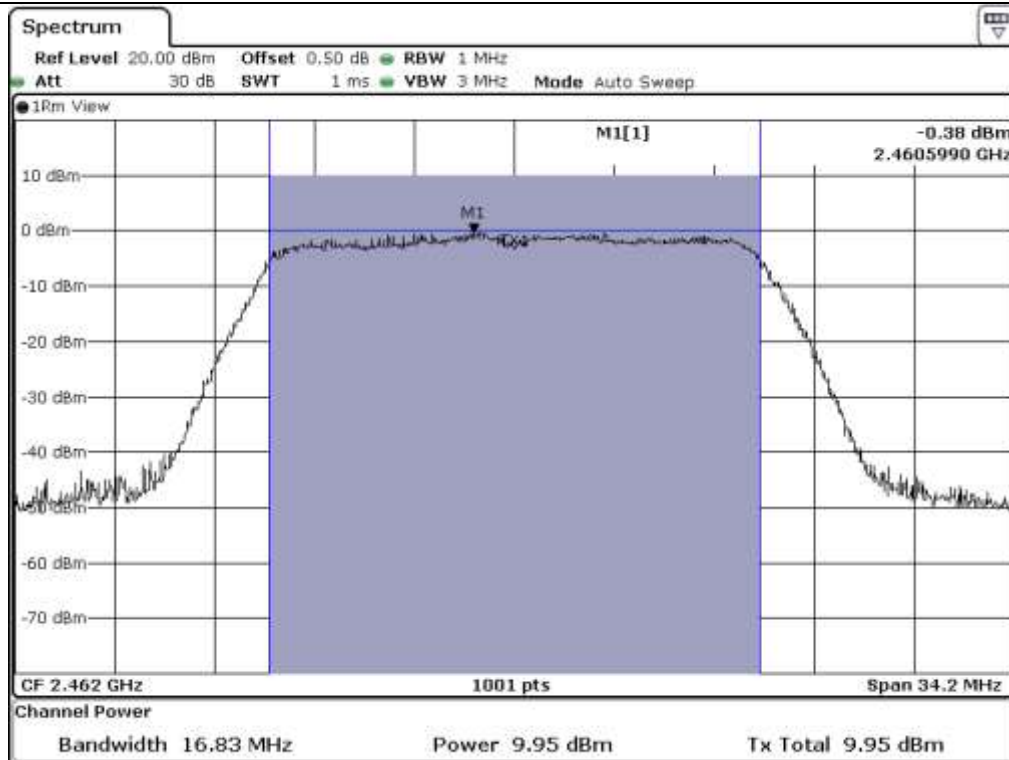

High Channel

9.5.3 Test data for Antenna 2


-. Test Date : March 21, 2017


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	99 % Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	16.83	11.87	30.00	18.13
MIDDLE	2 442.00	16.83	20.99	30.00	9.01
HIGH	2 462.00	16.83	9.61	30.00	20.39


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)


Tested by: Hyung-Kwon, Oh / Engineer

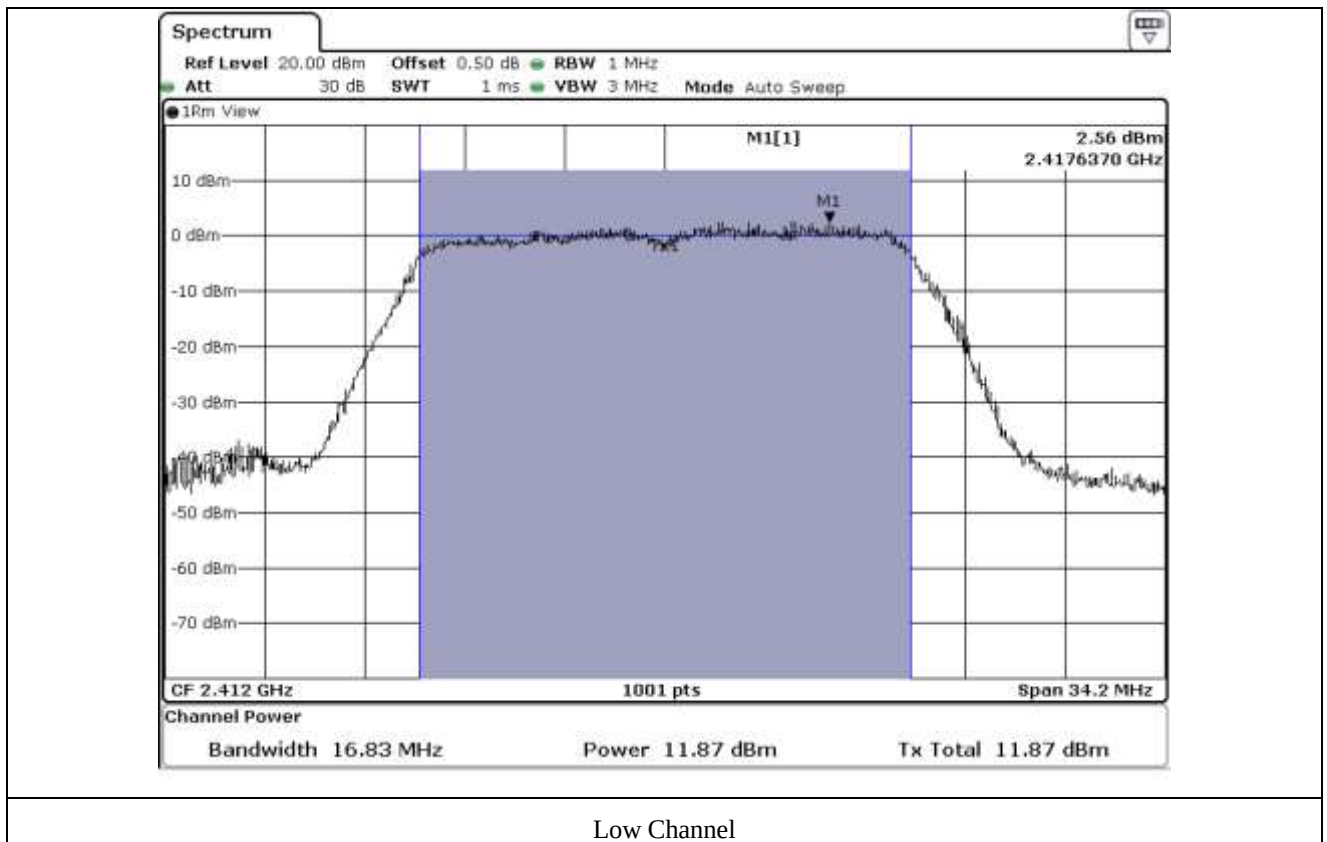

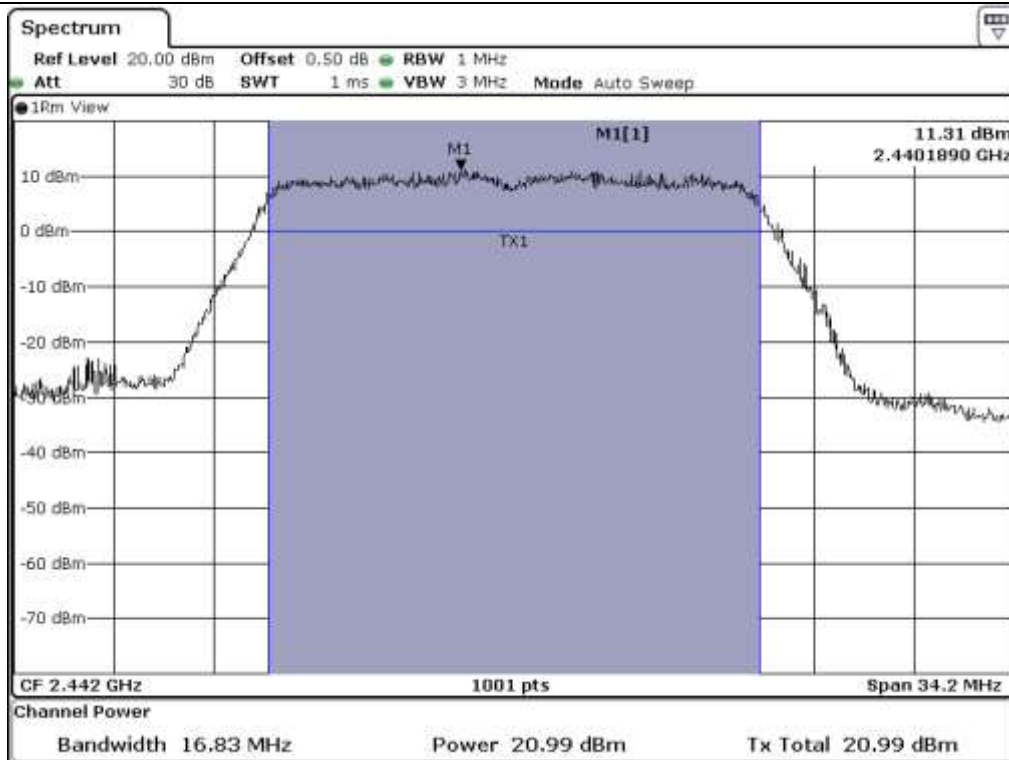

Middle Channel

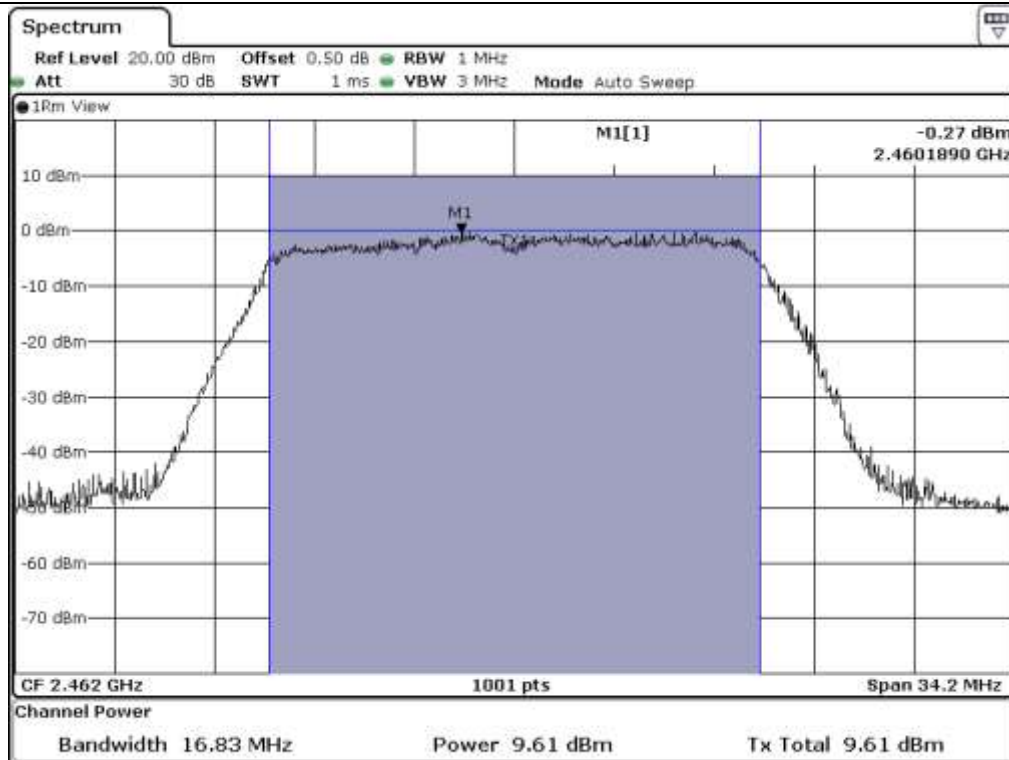

High Channel

9.5.4 Test data for Multiple transmit

-. Test Date : March 21, 2017

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	CALCULATED OUTPUT POWER (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	16.53	29.63	13.10
MIDDLE	2 442.00	25.24	29.63	4.39
HIGH	2 462.00	14.27	29.63	15.36

Remark 1 : Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Remark 2 : Calculated Output Power= $10\log (10^{(\text{Antenna0 Output Power}/10)}+10^{(\text{Antenna1 Output Power}/10)}+10^{(\text{Antenna2 Output Power}/10)})$

Remark 3 : Directional gain = $10*\log[(10^{G0/20}+10^{G1/20}+10^{G2/20})^2/N]$ dBi

Remark 4 : Limit = 30 dBm – Exceeds Antenna gain

Remark 5 : Exceeds Antenna gain = Above the limits is calculated according to antenna gain.

Because antenna gain is higher than 6 dBi.



Tested by: Hyung-Kwon, Oh / Engineer

9.6 Test data for 802.11n_HT20 WLAN Mode

9.6.1 Test data for Antenna 0

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	99 % Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	17.93	11.31	30.00	18.69
MIDDLE	2 442.00	17.93	20.12	30.00	9.88
HIGH	2 462.00	17.93	10.02	30.00	19.98

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Hyung-Kwon, Oh / Engineer

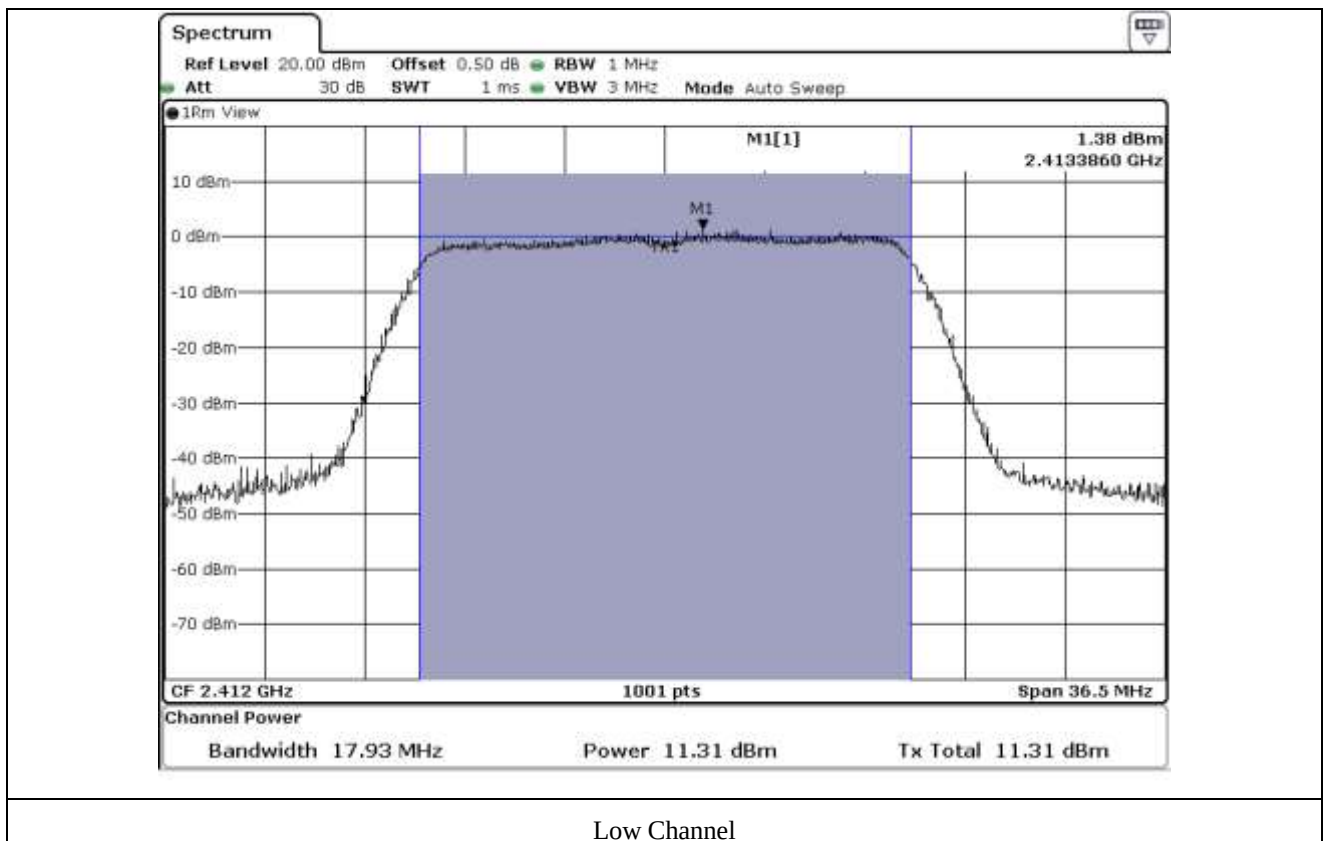

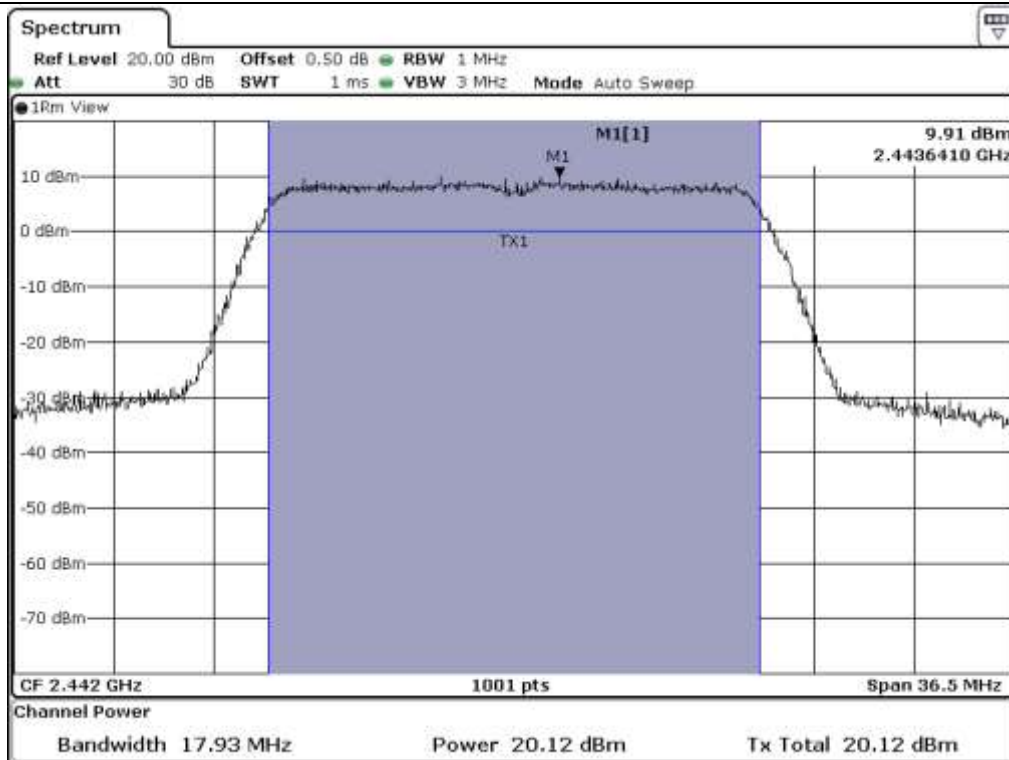

Middle Channel

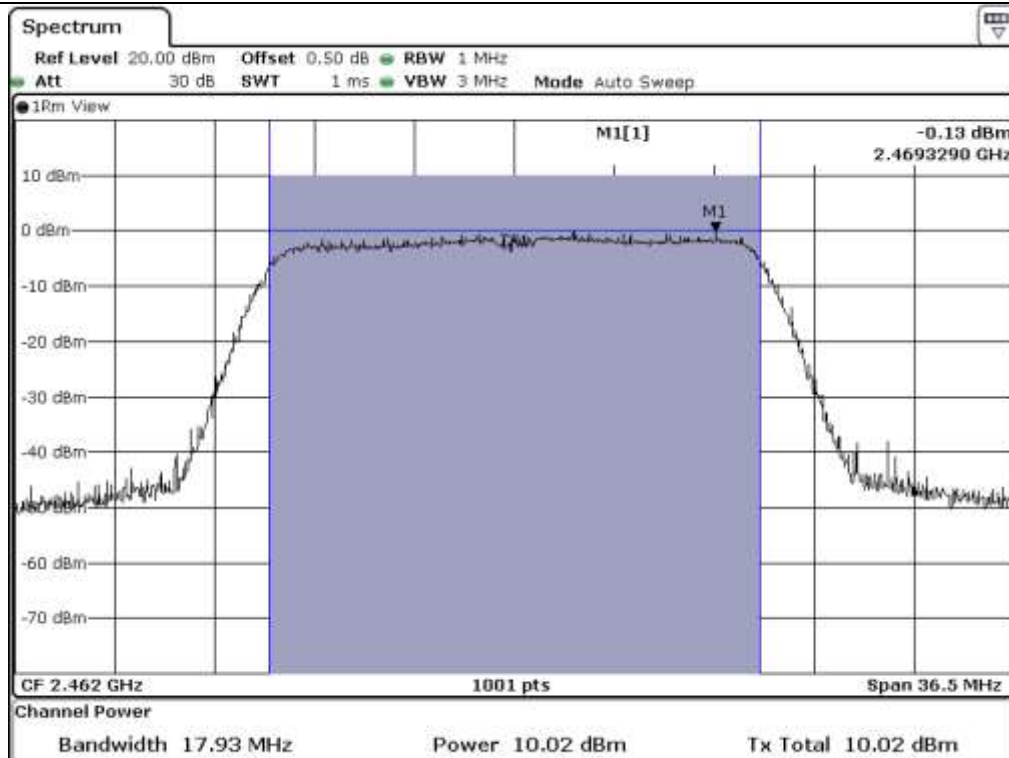

High Channel

9.6.2 Test data for Antenna 1

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	99 % Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	17.73	12.56	30.00	17.44
MIDDLE	2 442.00	17.78	21.20	30.00	8.80
HIGH	2 462.00	17.73	11.69	30.00	18.31

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Hyung-Kwon, Oh / Engineer

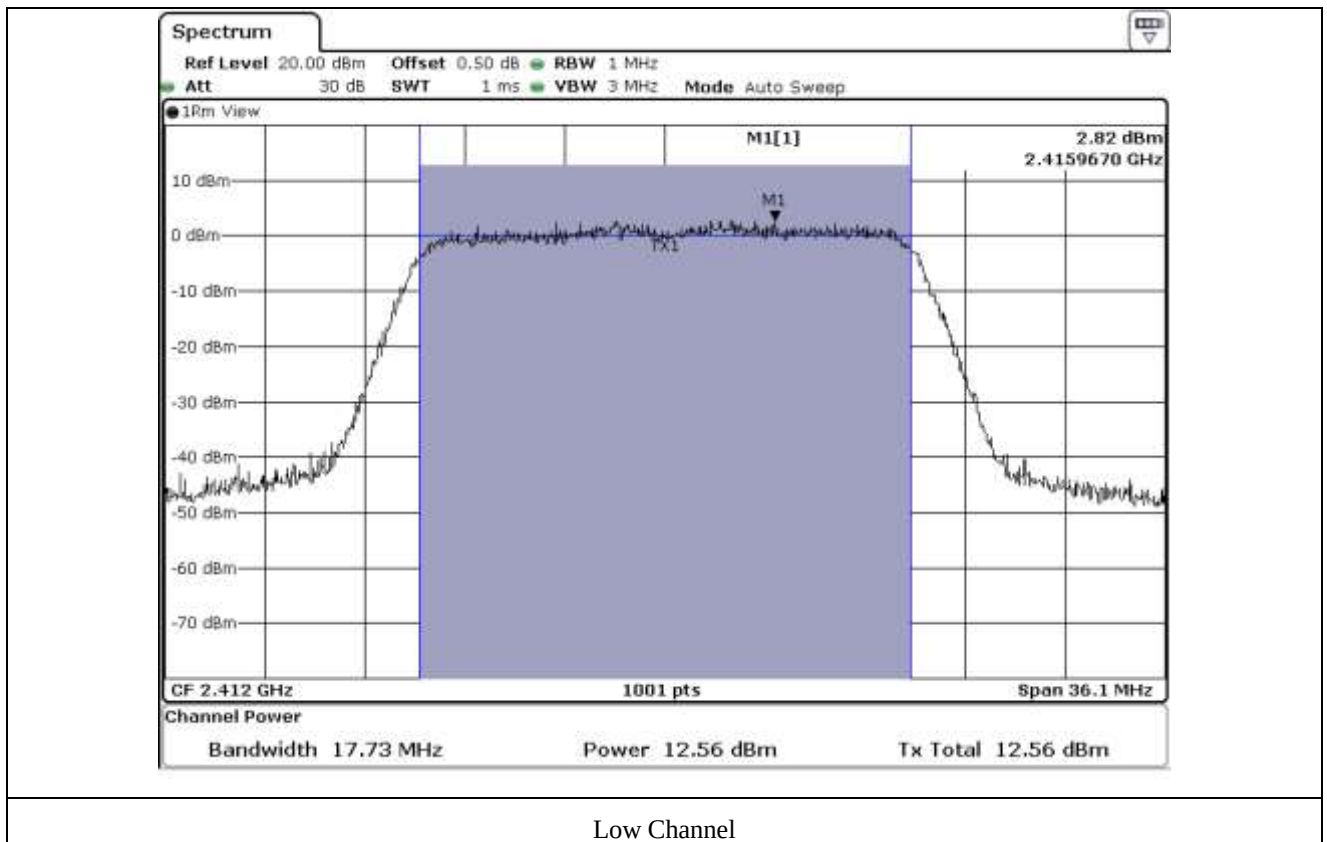

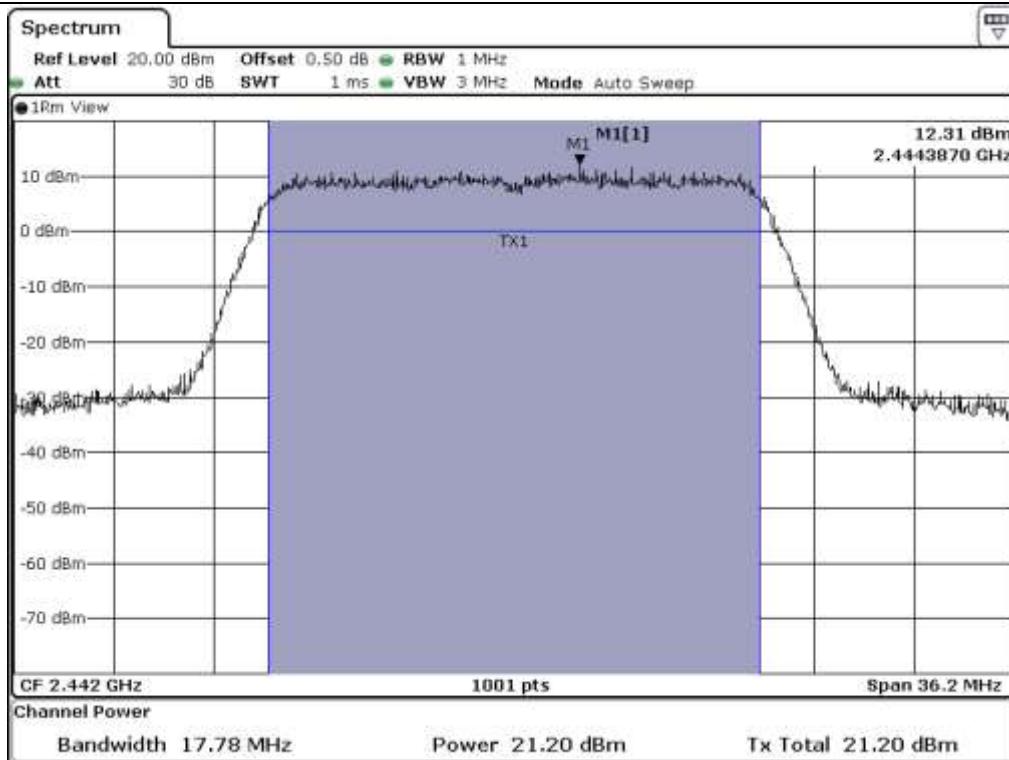

Middle Channel

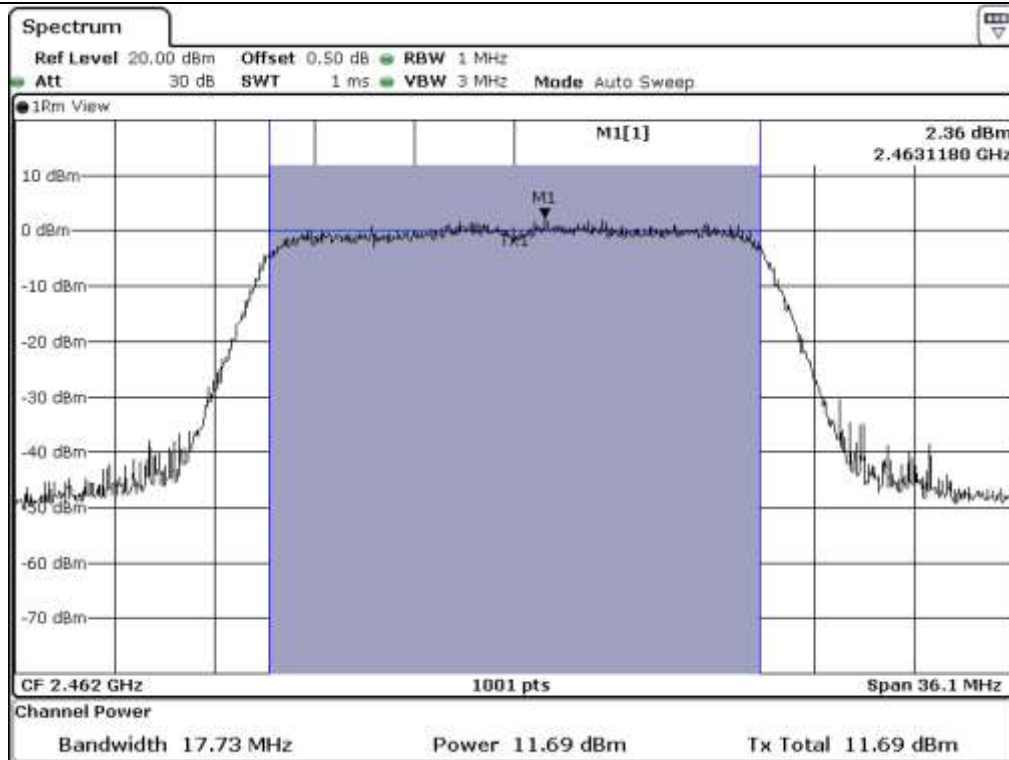

High Channel

9.6.3 Test data for Antenna 2

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	99 % Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	17.83	11.81	30.00	18.19
MIDDLE	2 442.00	17.78	21.28	30.00	8.72
HIGH	2 462.00	17.83	10.72	30.00	19.28

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Hyung-Kwon, Oh / Engineer

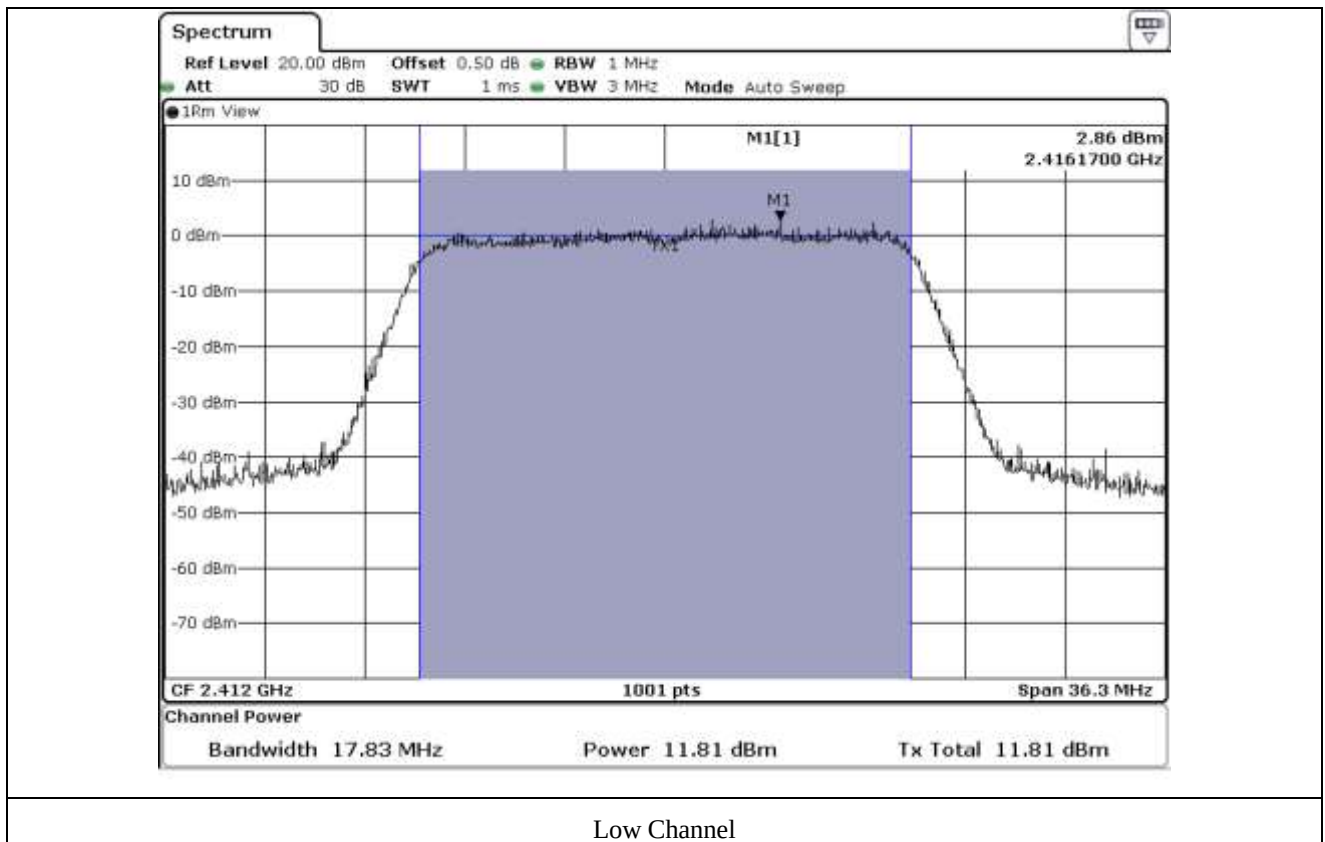

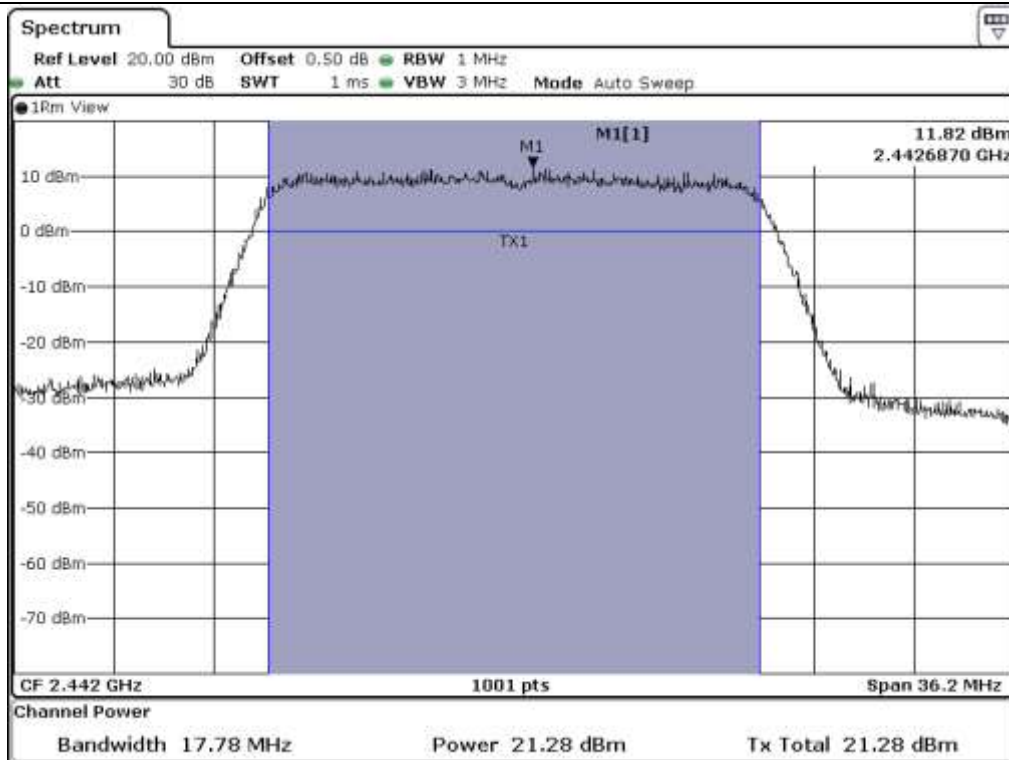

Middle Channel

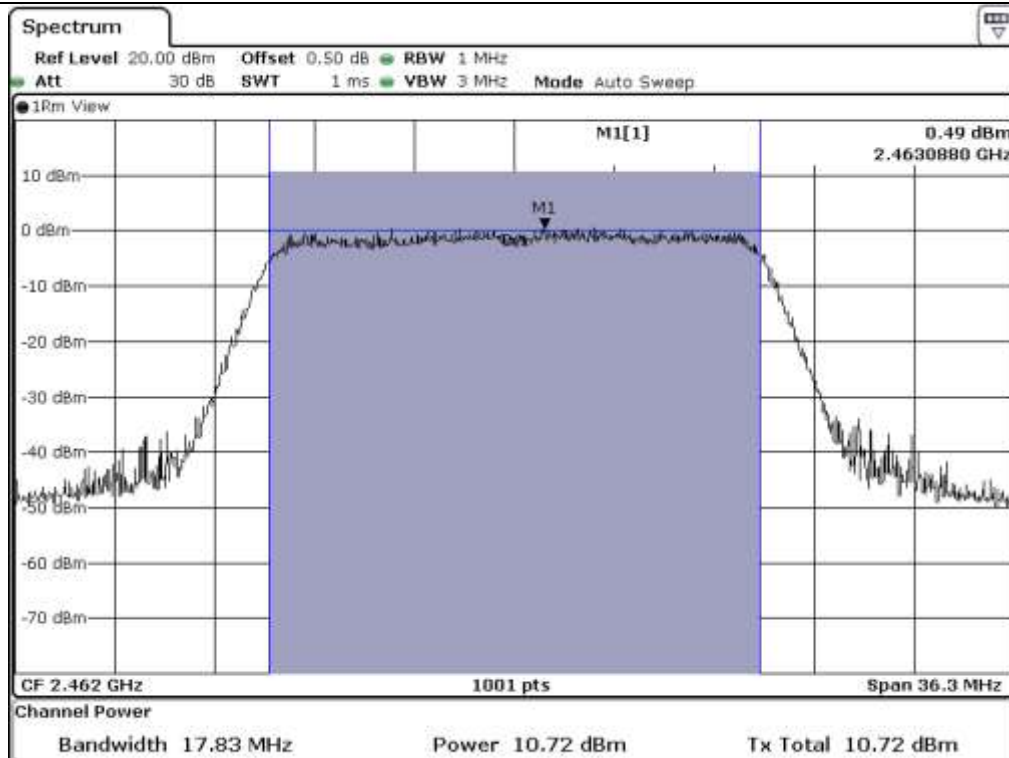

High Channel

9.6.4 Test data for Multiple transmit

-. Test Date : March 21, 2017

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	CALCULATED OUTPUT POWER (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	16.70	29.63	12.93
MIDDLE	2 442.00	25.67	29.63	3.96
HIGH	2 462.00	15.64	29.63	13.99

Remark 1 : Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Remark 2 : Calculated Output Power= $10\log (10^{(\text{Antenna0 Output Power}/10)}+10^{(\text{Antenna1 Output Power}/10)}+10^{(\text{Antenna2 Output Power}/10)})$

Remark 3 : Directional gain = $10*\log[(10^{G0/20}+10^{G1/20}+10^{G2/20})^2/N]$ dBi

Remark 4 : Limit = 30 dBm – Exceeds Antenna gain

Remark 5 : Exceeds Antenna gain = Above the limits is calculated according to antenna gain.

Because antenna gain is higher than 6 dBi.



Tested by: Hyung-Kwon, Oh / Engineer

9.7 Test data for 802.11n_HT40 WLAN Mode

9.7.1 Test data for Antenna 0

-. Test Date : March 21, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	99 % Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 422.00	36.26	8.52	30.00	21.48
MIDDLE	2 442.00	36.46	19.79	30.00	10.21
HIGH	2 452.00	36.46	21.87	30.00	8.13

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Hyung-Kwon, Oh / Engineer

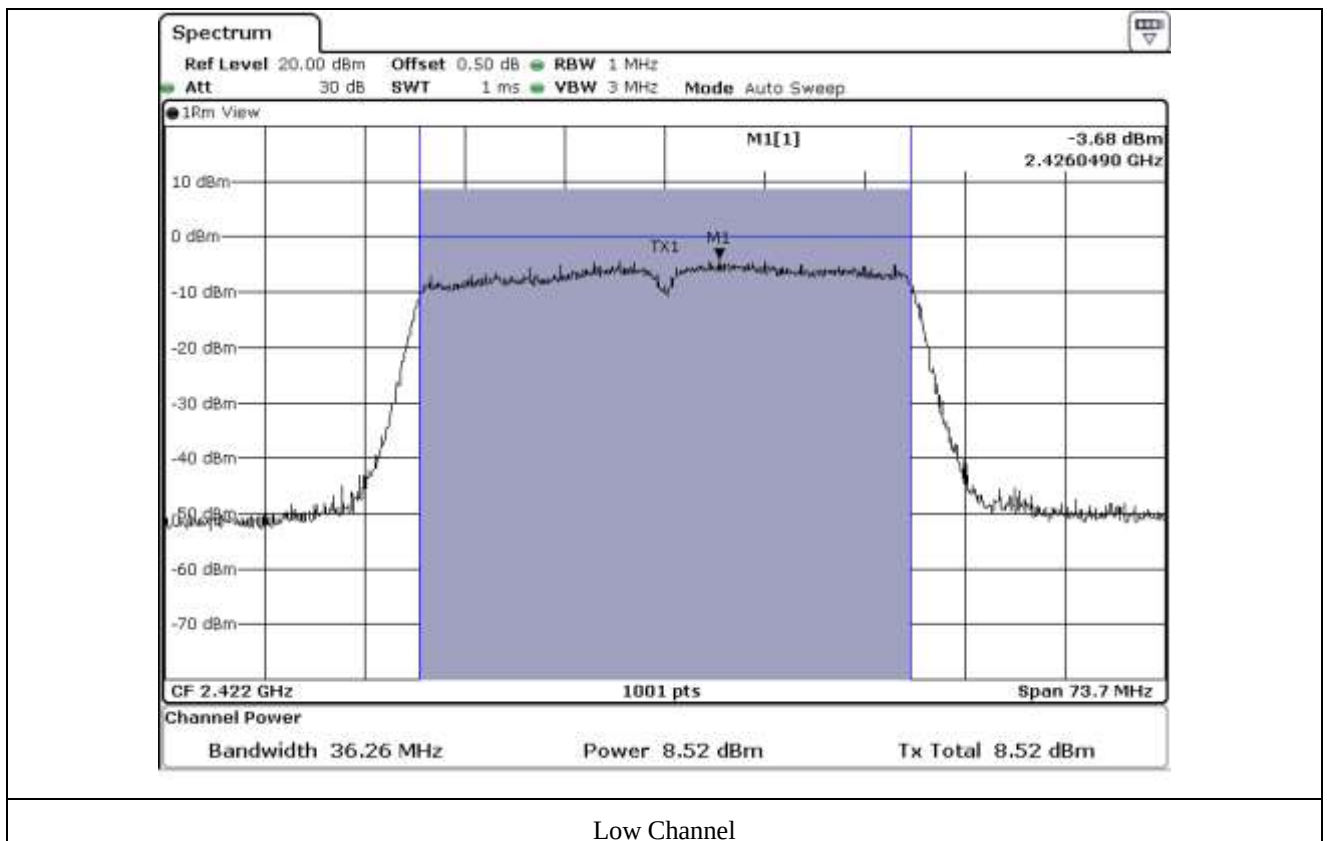

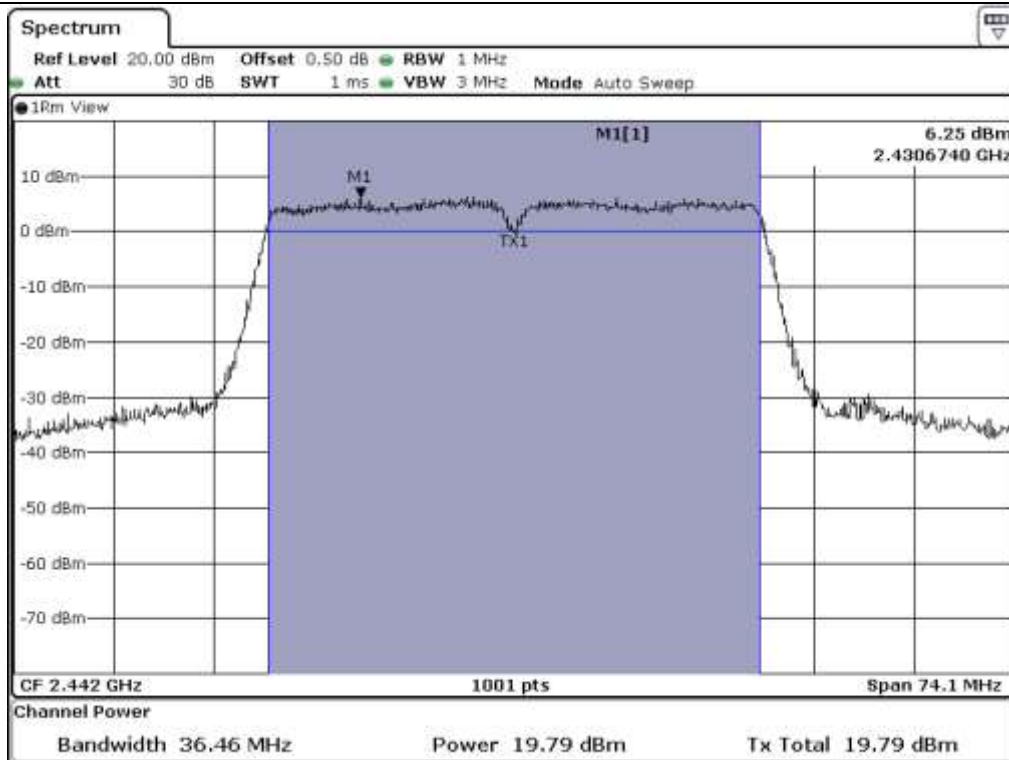

Middle Channel

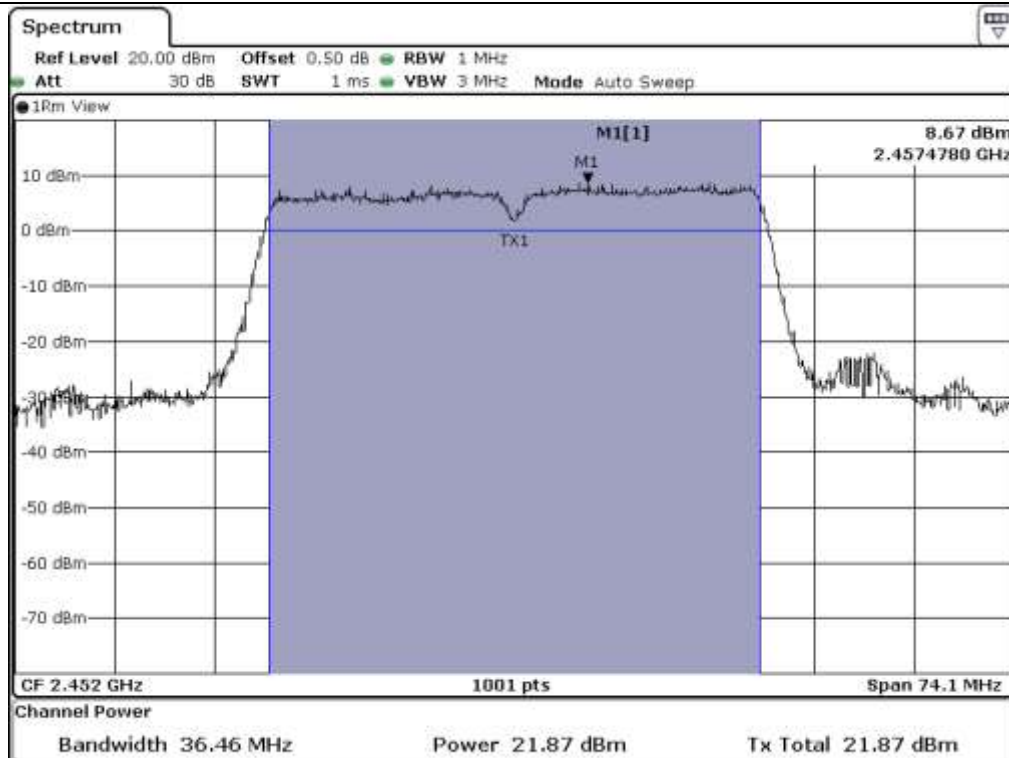

High Channel

9.7.2 Test data for Antenna 1


-. Test Date : March 21, 2017


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	99 % Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 422.00	36.16	10.59	30.00	19.41
MIDDLE	2 442.00	36.36	20.64	30.00	9.36
HIGH	2 452.00	36.36	22.39	30.00	7.61


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)


Tested by: Hyung-Kwon, Oh / Engineer

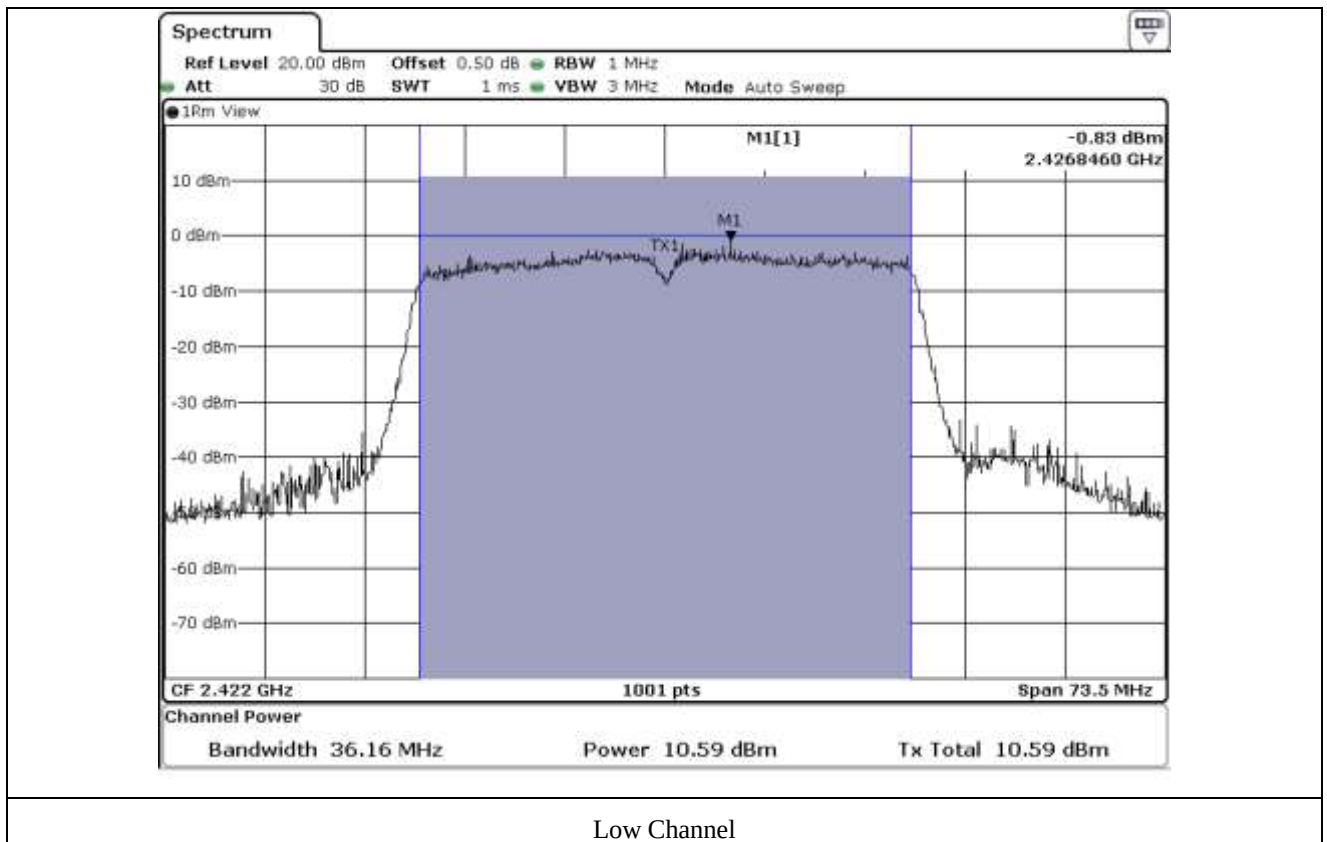

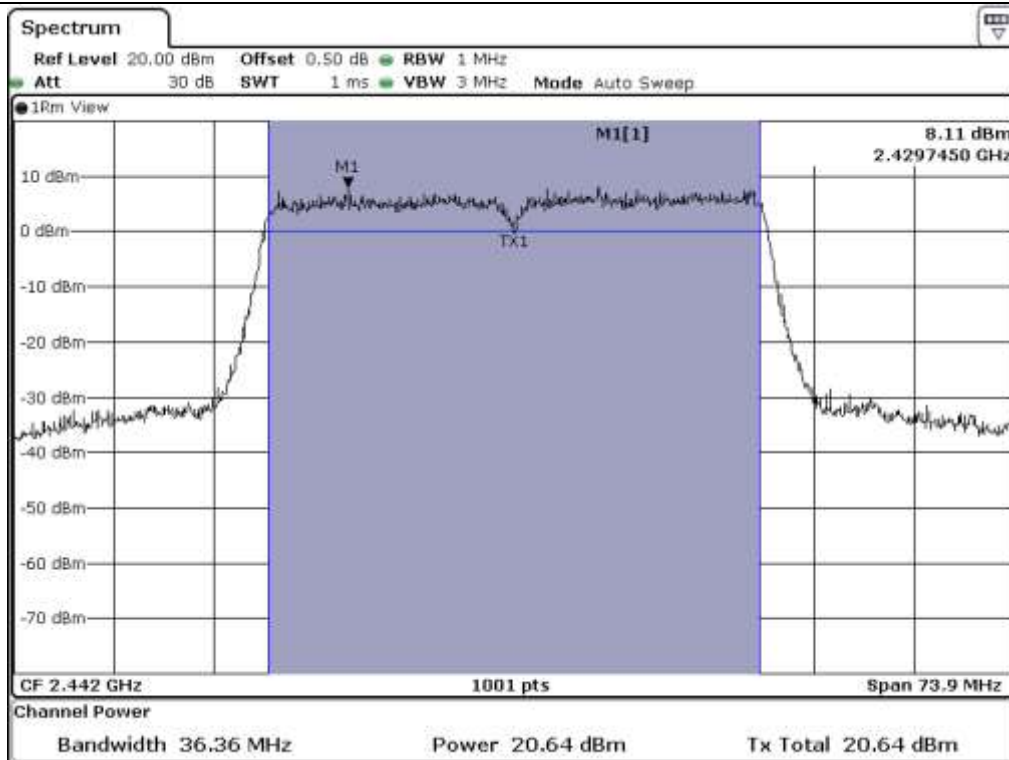

Middle Channel

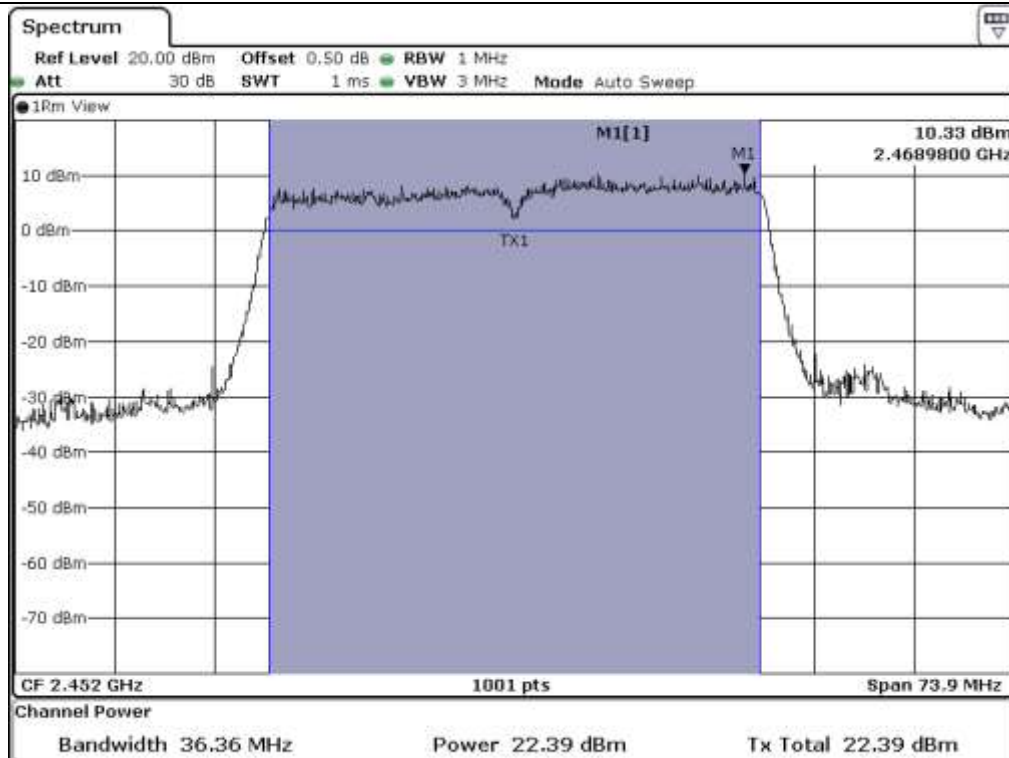

High Channel

9.7.3 Test data for Antenna 2


-. Test Date : March 21, 2017


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	99 % Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 422.00	36.16	9.24	30.00	20.76
MIDDLE	2 442.00	36.36	20.42	30.00	9.58
HIGH	2 452.00	36.36	21.74	30.00	8.26


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)


Tested by: Hyung-Kwon, Oh / Engineer

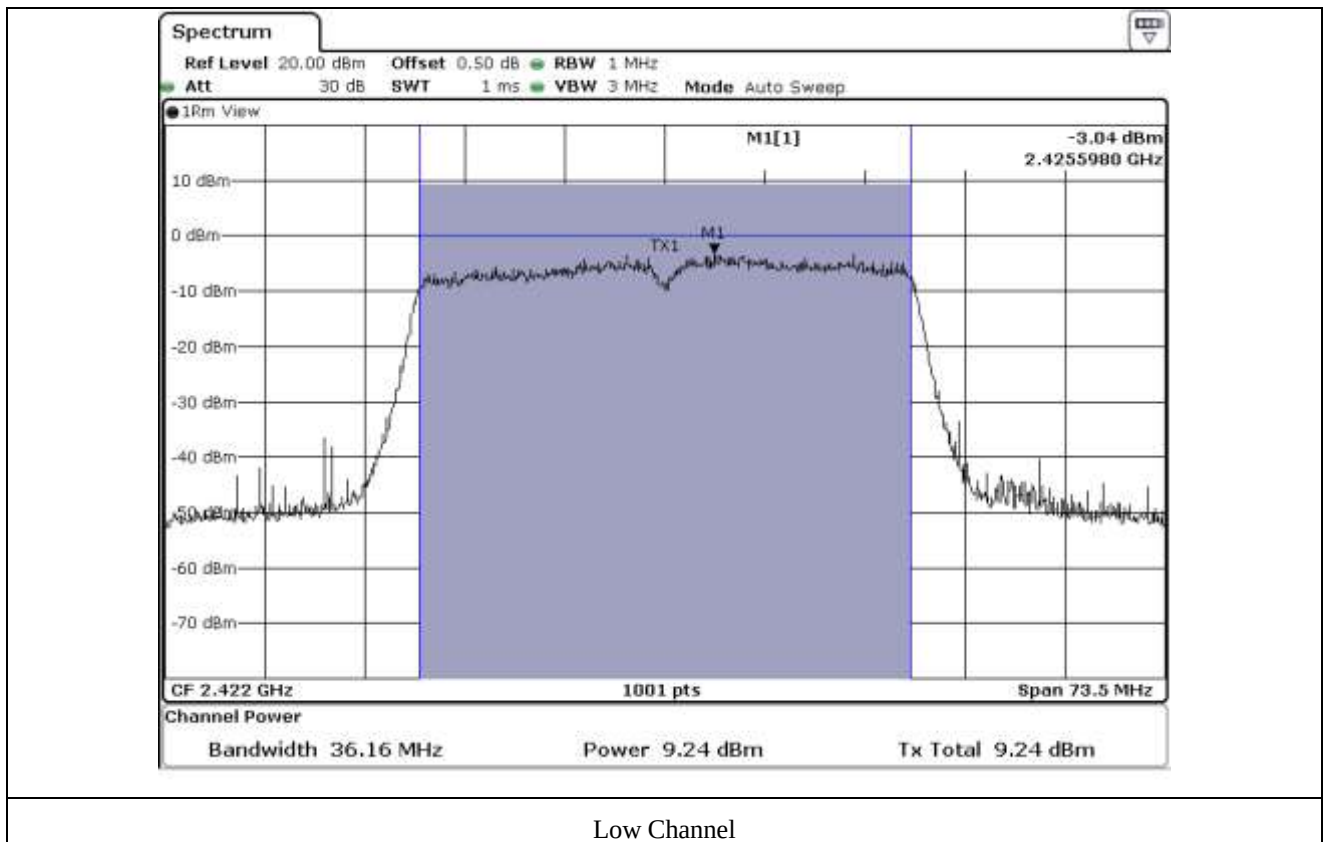

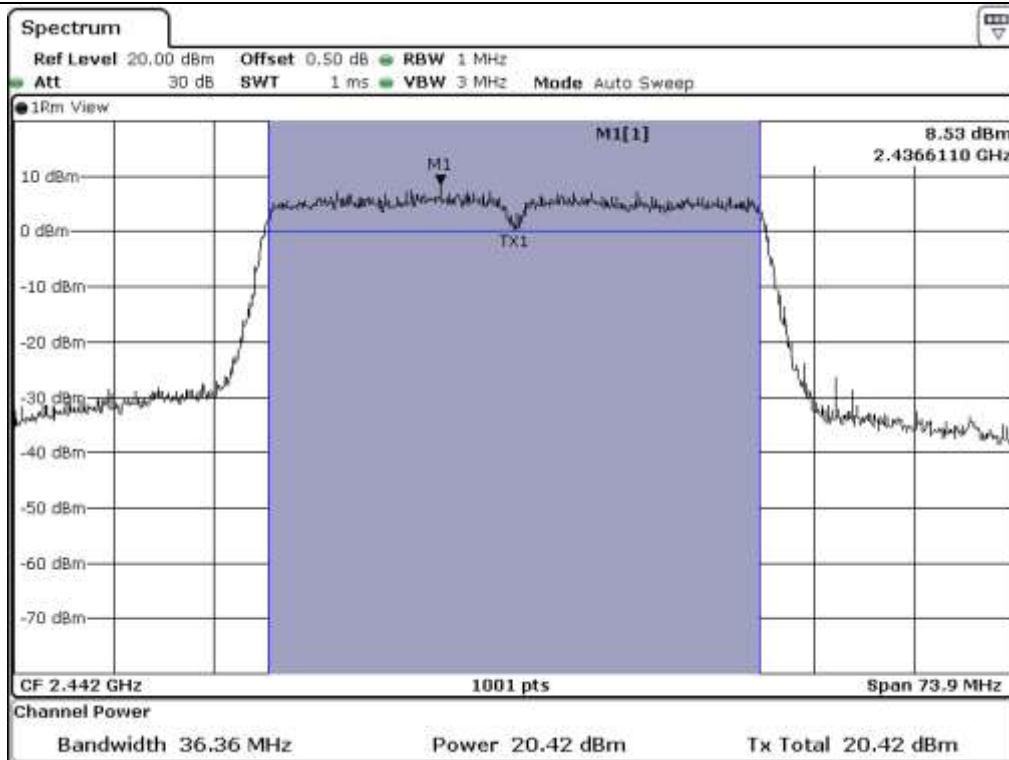

Middle Channel

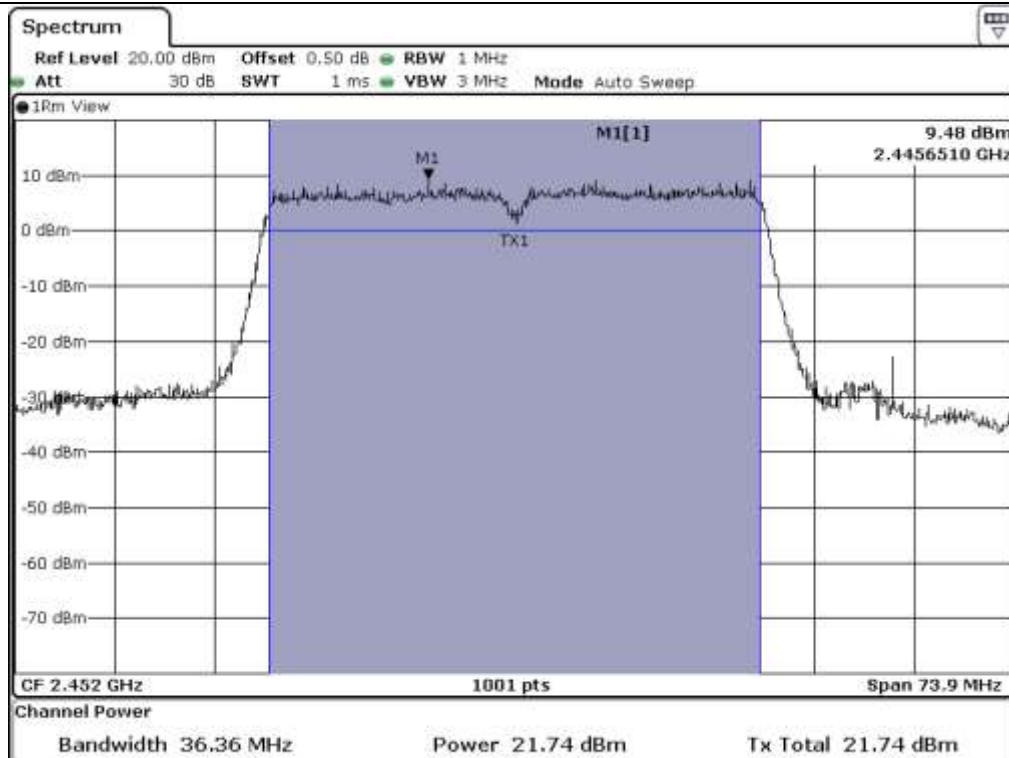

High Channel

9.7.4 Test data for Multiple transmit

-. Test Date : March 21, 2017

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	CALCULATED OUTPUT POWER (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 422.00	14.31	29.63	15.32
MIDDLE	2 442.00	25.07	29.63	4.56
HIGH	2 452.00	26.78	29.63	2.85

Remark 1 : Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Remark 2 : Calculated Output Power= $10\log (10^{(\text{Antenna0 Output Power}/10)}+10^{(\text{Antenna1 Output Power}/10)}+10^{(\text{Antenna2 Output Power}/10)})$

Remark 3 : Directional gain = $10*\log[(10^{G0/20}+10^{G1/20}+10^{G2/20})^2/N]$ dBi

Remark 4 : Limit = 30 dBm – Exceeds Antenna gain

Remark 5 : Exceeds Antenna gain = Above the limits is calculated according to antenna gain.

Because antenna gain is higher than 6 dBi.



Tested by: Hyung-Kwon, Oh / Engineer