



TEST REPORT



KCTL Eurofins KCTL Co.,Ltd.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR23-SRF0058-B
Page (1) of (47)



1. Client

- Name : Samsung Electronics Co., Ltd.
- Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
- Date of Receipt : 2022-12-20

2. Use of Report : Certification

3. Name of Product / Model : BLE Module / ML60-001

4. Manufacturer / Country of Origin : QINGDAO SAMJIN ELECTRONIC CO., LTD / China

5. FCC ID : A3LML60001

6. IC Certificate No. : 649E-ML60001

7. Date of Test : 2023-01-02 to 2023-01-06

8. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing
(Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)

9. Test method used : FCC Part 15 Subpart C, 15.247
RSS-247 Issue 2 February 2017
RSS-Gen Issue 5 February 2021

10. Test Result : Refer to the test result in the test report

Affirmation	Tested by	Technical Manager
	Name : Euijung Kim  (Signature)	Name : Heesu Ahn  (Signature)

The above testing certificate is the accredited test result by Korea Laboratory Accreditation Scheme, which signed the ILAC-MRA.

2023-02-14

Accredited by KOLAS, Republic of KOREA

Eurofins KCTL Co.,Ltd.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Eurofins KCTL Co.,Ltd.

REPORT REVISION HISTORY

Date	Revision	Page No
2023-02-07	Originally issued	-
2023-02-13	updated	4
2023-02-14	updated	14-46

This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

Note. The report No. KR23-SRF0058-A is superseded by the report No. KR23-SRF0058-B.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ Statement not required by the standard or client used for type testing

CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Frequency/channel operations.....	5
2.2.	RF power setting in TEST SW	5
2.3.	Duty Cycle Factor	6
3.	Antenna requirement	8
4.	Summary of tests.....	9
5.	Measurement uncertainty	10
6.	Measurement results explanation example	11
7.	Test results.....	12
7.1.	Maximum peak output power.....	12
7.2.	Peak Power Spectral Density.....	15
7.3.	6 dB Bandwidth(DTS Channel Bandwidth)	18
7.4.	Spurious Emission, Band Edge and Restricted bands.....	23
7.5.	Conducted Spurious Emission.....	42
7.6.	AC Conducted emission	45
8.	Measurement equipment.....	47

1. General information

Client : Samsung Electronics Co., Ltd.
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Manufacturer : QINGDAO SAMJIN ELECTRONIC CO., LTD
Address : No.27 Tongkang Road, Tonghe Town, Pingdu City, Qingdao, China
Laboratory : Eurofins KCTL Co.,Ltd.
Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
CAB Identifier: KR0040
ISED Number: 8035A
KOLAS No.: KT231

2. Device information

Equipment under test : BLE Module
Model : ML60-001
Frequency range : 2 402 MHz ~ 2 480 MHz (Bluetooth Low Energy)
Modulation technique : GFSK (Bluetooth Low Energy)
Number of channels : 40 ch (Bluetooth Low Energy)
Power source : DC 3.3 V
Antenna specification : PCB Pattern antenna
Antenna gain : 1.70 dBi
Software version : V00
Hardware version : REV1.0
Test device serial No. : Conducted: JH840212 683A4843A355
Radiated: JH840291 683A4843A3A4
Operation temperature : -20 °C ~ 50 °C

2.1. Frequency/channel operations

This device contains the following capabilities:

Bluetooth Low Energy

Ch.	Frequency (MHz)
00	2 402
.	.
19	2 440
.	.
39	2 480

Table 2.1.1. Bluetooth Low Energy

2.2. RF power setting in TEST SW


Frequency(MHz)	RF Power setting value
2 402	Default
2 440	
2 480	

2.3. Duty Cycle Factor


Test mode	Period (ms)	On time (ms)	Duty cycle		Duty Cycle Factor (dB)
			(Linear)	(%)	
1M Bits/s, 37 Packet	0.627	0.405	0.645 9	64.59	1.90
1M Bits/s, 255 Packet	2.504	2.147	0.857 4	85.74	0.67
2M Bits/s, 37 Packet	0.630	0.216	0.342 9	34.29	4.65
2M Bits/s, 255 Packet	1.881	1.089	0.578 9	57.89	2.37
125k Bits/s, 37 Packet	3.743	3.109	0.830 5	83.05	0.81
125k Bits/s, 255 Packet	17.549	17.071	0.972 7	97.27	0.12
500k Bits/s, 37 Packet	1.877	1.086	0.578 4	57.84	2.38
500k Bits/s, 255 Packet	5.021	4.590	0.914 1	91.41	0.39

Notes.


1. Duty cycle (Linear) = Ton time / Period
2. DCF(Duty cycle factor) = $10\log(1/\text{duty cycle})$

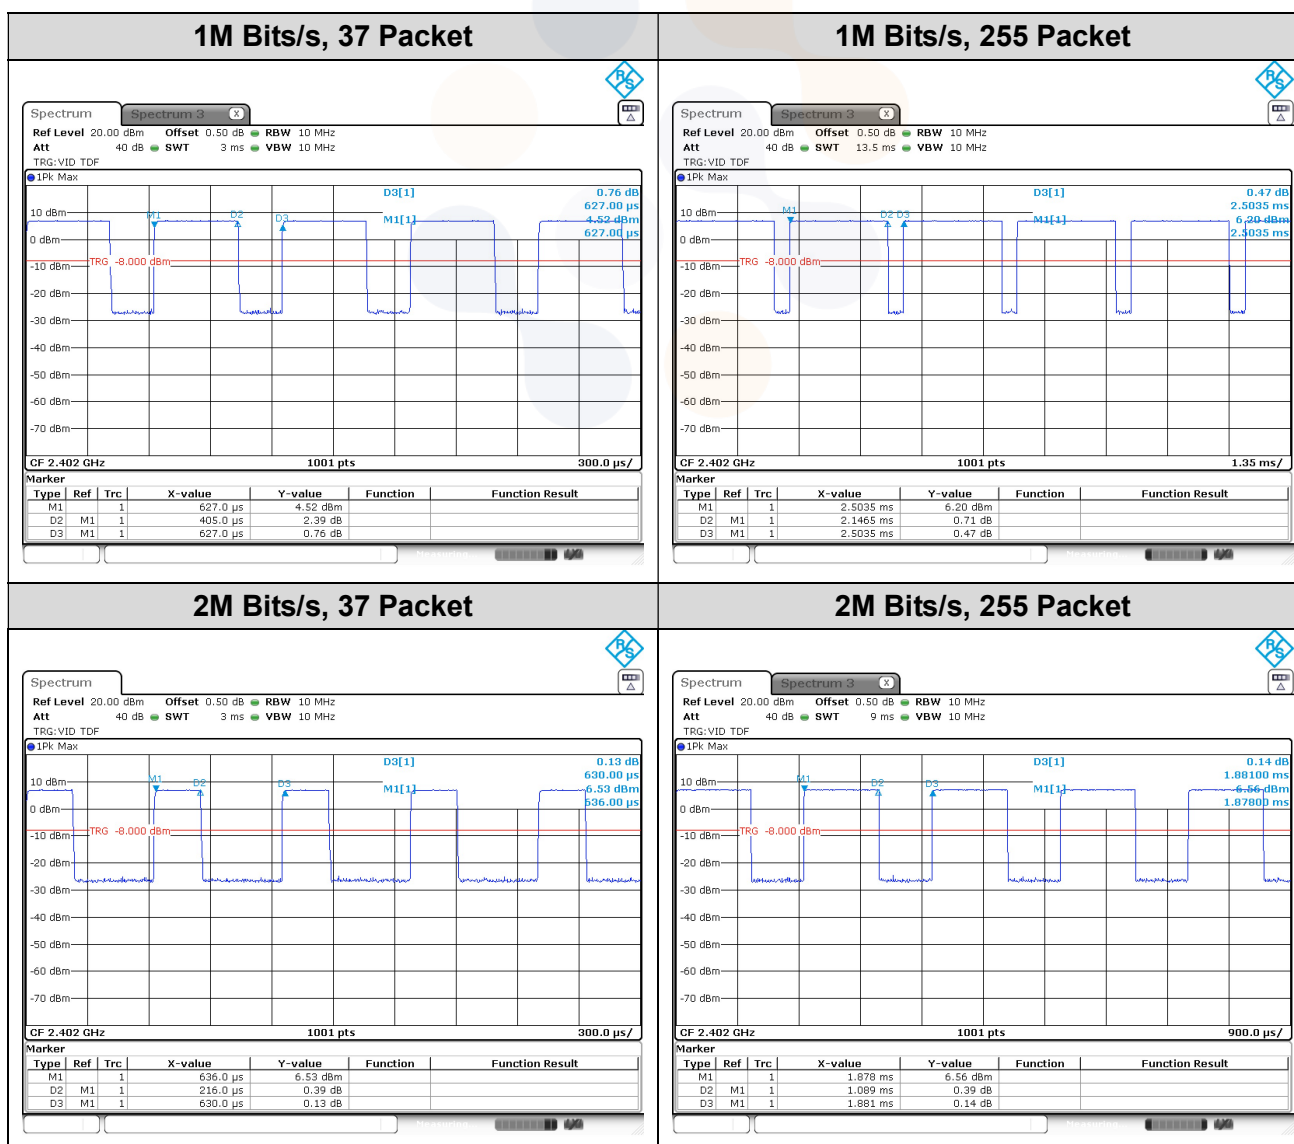


125k Bits/s, 37 Packet

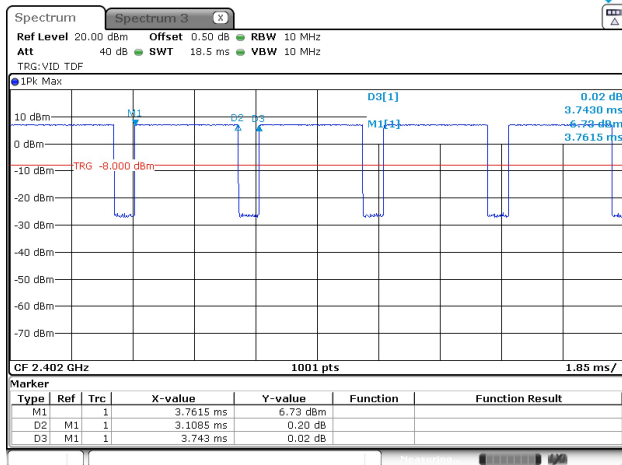


125k Bits/s, 255 Packet

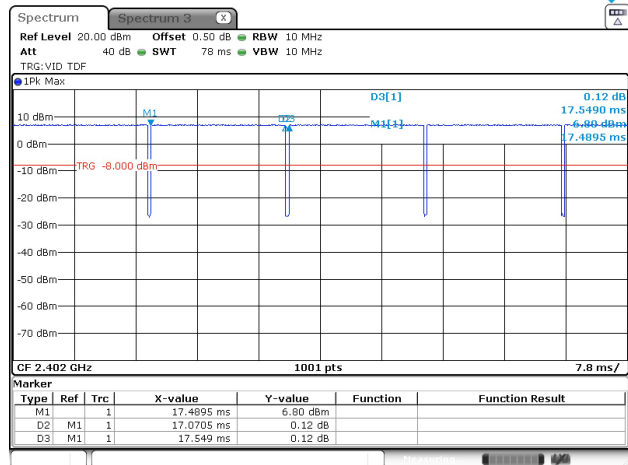

500k Bits/s, 37 Packet

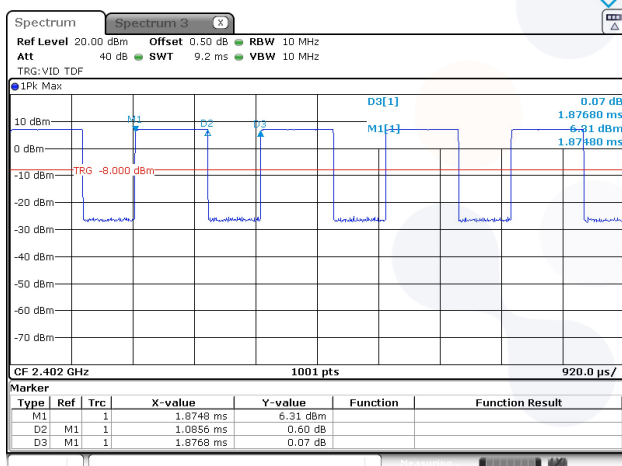

500k Bits/s, 255 Packet

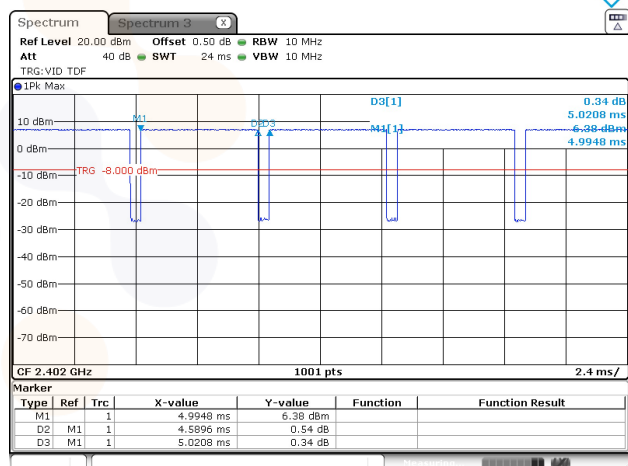

3. Antenna requirement

Requirement of FCC part section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Requirement of RSS-Gen Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

- The transmitter has permanently attached PCB Pattern antenna (internal antenna) on board.
- The E.U.T Complies with the requirement of §15.203, §15.247.

4. Summary of tests

FCC Part section(s)	IC Rule Reference	Parameter	Test mode	Test results
15.247(b)(3)	RSS-247 (5.4)(d)	Maximum Peak Output Power	Conducted	Pass
15.247(e)	RSS-247 (5.2)(b)	Peak Power Spectral Density		Pass
15.247(a)(2)	RSS-247 (5.2)(a)	6 dB Channel Bandwidth		Pass
-	RSS-Gen (6.7)	Occupied Bandwidth		Pass
15.207(a)	RSS-Gen (8.8)	AC Conducted Emissions		Pass
15.247(d), 15.205(a), 15.209(a)	RSS-Gen (8.9), (8.10) RSS-247(5.5)	Spurious emission	Radiated	Pass
		Band-edge, restricted band		Pass

Notes: (N/T: Not Tested, N/A: Not Applicable)

- All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
- The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that **Y** orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in **Y** orientation
- All the radiated tests have been performed two modes (with charger and without charger) and the with charger is the worst case mode.
- The worst-case data rate were: Packet length 37 Bytes
- The test procedure(s) in this report were performed in accordance as following.
 - ANSI C63.10-2013
 - KDB 558074 D01 v05r02

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty ($\pm$)	
Conducted RF power	0.9 dB	
Conducted spurious emissions	1.1 dB	
Radiated spurious emissions	9 kHz ~ 30 MHz	2.4 dB
	30 MHz ~ 1 000 MHz	2.3 dB
	1 000 MHz ~ 18 000 MHz	5.6 dB
	Above 18 GHz	5.7 dB
Conducted emissions	9 kHz ~ 150 kHz	1.6 dB
	150 kHz ~ 30 MHz	1.7 dB

6. Measurement results explanation example


Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	0.16	9 000	2.75
50	0.19	10 000	2.85
100	0.28	11 000	2.68
200	0.42	12 000	2.60
300	0.56	13 000	2.56
400	0.66	14 000	2.68
500	0.77	15 000	2.46
600	0.83	16 000	2.52
700	0.95	17 000	2.76
800	1.03	18 000	2.75
900	1.14	19 000	2.76
1 000	1.23	20 000	2.80
2 000	2.09	21 000	2.72
3 000	2.41	22 000	2.97
4 000	2.55	23 000	3.39
5 000	2.45	24 000	3.15
6 000	2.49	25 000	3.11
7 000	2.52	26 000	3.91
8 000	2.58	26 500	3.67

Note : Offset(dB) = RF cable loss(dB) + Attenuator(dB)

7. Test results

7.1. Maximum peak output power

Test setup



Limit

FCC

According to §15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2 400-2 483.5 MHz, and 5 725-5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC

According to RSS-247 5.4(d), For DTSS employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

Test procedure

ANSI C63.10 - Section 11.9

Used test method is section 11.9.1.3 and 11.9.2.3.1

Test settings

General

Section 15.247 permits the maximum conducted (average) output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth (see ANSI C63.10 for measurement guidance).

When using a spectrum analyzer or EMI receiver to perform these measurements, it shall be capable of utilizing a number of measurement points in each sweep that is greater than or equal to twice the span/RBW to set a bin-to-bin spacing of $\leq \text{RBW}/2$ so that narrowband signals are not lost between frequency bins.

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level. The intent is to test at 100 % duty cycle; however a small reduction in duty cycle (to no lower than 98 %) is permitted, if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

If continuous transmission (or at least 98 % duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level, with the transmit duration as long as possible, and the duty cycle as high as possible during which sweep triggering/signal gating techniques may be used to perform the measurement over the transmission duration.

11.9.1. Maximum peak conducted output power

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

11.9.1.1. RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq [3 \times \text{RBW}]$.
- c) Set span $\geq [3 \times \text{RBW}]$.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

11.9.1.3. PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

11.9.2.3.1. Measurement using a power meter (PM)

Method AVGPM is a measurement using an RF average power meter, as follows:

- a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied:
 - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal as described in 11.6.
- c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- d) Adjust the measurement in dBm by adding $[10 \log(1/D)]$, where D is the duty cycle

Notes:

A peak responding power sensor is used, where the power sensor system video bandwidth is greater than the occupied bandwidth of the EUT.

Test results

Frequency(MHz)	Data rate (Bits/s)	Packet length (Bytes)	Measured output power (dBm)		Limit (dBm)	ANT. (dBi)	E.I.R.P (dBm)		E.I.R.P Limit (dBm)
			Peak	Average			Peak	Average	
2 402	1M	37	6.07	5.71	30	1.70	7.77	7.41	36.02
		255	5.97	5.71			7.67	7.41	
	2M	37	6.07	5.88			7.77	7.58	
		255	5.97	5.73			7.67	7.43	
	125k	37	5.97	5.71			7.67	7.41	
		255	5.97	5.71			7.67	7.41	
	500k	37	5.97	5.68			7.67	7.38	
		255	5.97	5.71			7.67	7.41	
	1M	37	6.17	5.85			7.87	7.55	
		255	6.17	5.84			7.87	7.54	
	2M	37	6.17	6.02			7.87	7.72	
		255	6.17	5.87			7.87	7.57	
2 440	1M	37	6.17	5.84	30	1.70	7.87	7.54	36.02
		255	6.17	5.84			7.87	7.54	
	2M	37	6.17	5.84			7.87	7.54	
		255	6.17	5.84			7.87	7.54	
	125k	37	6.17	5.84			7.87	7.54	
		255	6.17	5.84			7.87	7.54	
	500k	37	6.17	5.86			7.87	7.56	
		255	6.17	5.84			7.87	7.54	
	1M	37	6.17	5.91			7.87	7.61	
		255	6.17	5.90			7.87	7.60	
	2M	37	6.17	6.09			7.87	7.79	
		255	6.17	5.95			7.87	7.65	
2 480	1M	37	6.17	5.91	30	1.70	7.87	7.61	36.02
		255	6.17	5.90			7.87	7.60	
	2M	37	6.17	6.09			7.87	7.79	
		255	6.17	5.95			7.87	7.65	
	125k	37	6.17	5.88			7.87	7.58	
		255	6.17	5.89			7.87	7.59	
	500k	37	6.17	5.88			7.87	7.58	
		255	6.17	5.88			7.87	7.58	
	1M	37	6.17	5.91			7.87	7.61	
		255	6.17	5.90			7.87	7.60	
	2M	37	6.17	6.09			7.87	7.79	
		255	6.17	5.95			7.87	7.65	

Notes:

1. Conducted output power(Average) = reading value of average power + D.C.F
2. e.i.r.p. Calculation: e.i.r.p. (dB m) = Conducted output power (dB m) + Antenna gain (dB i)