



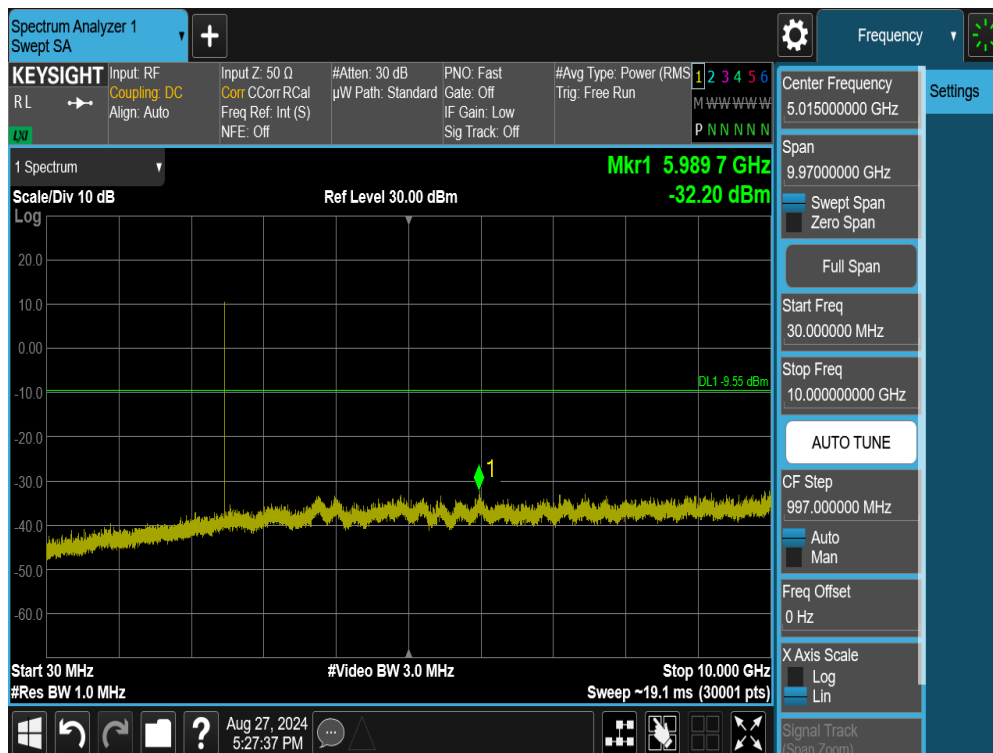


Plot 7-127. Conducted Spurious Plot (Bluetooth (LE), 1Mbps – Ch. 39) – Dual Ant1

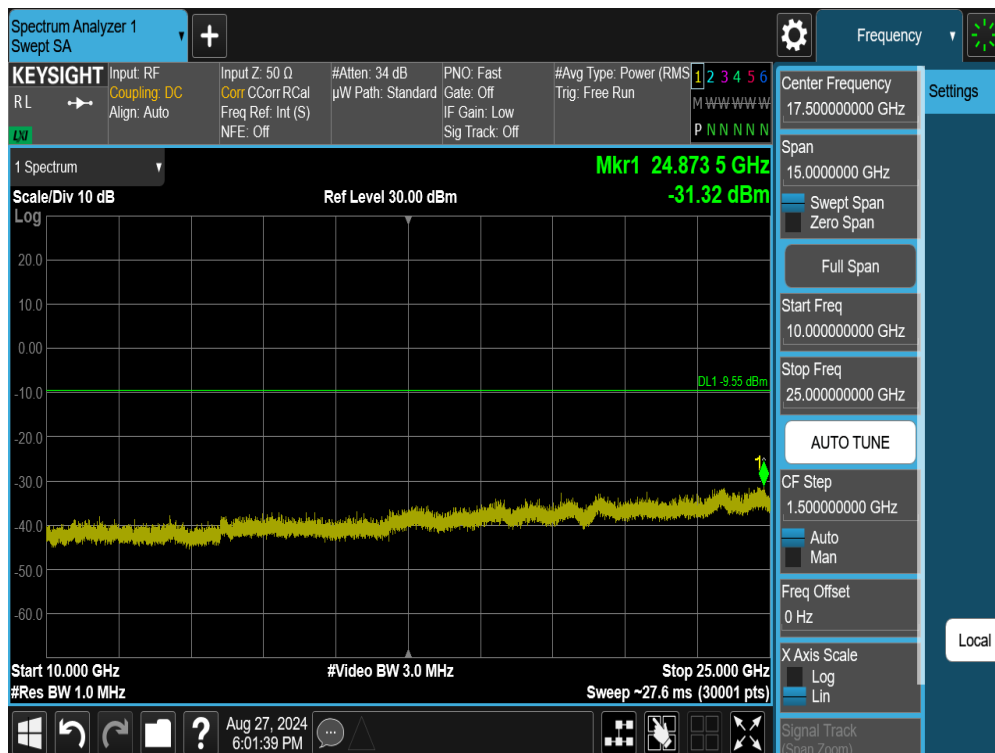


Plot 7-128. Conducted Spurious Plot (Bluetooth (LE), 1Mbps – Ch. 39) – Dual Ant1

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 92 of 114

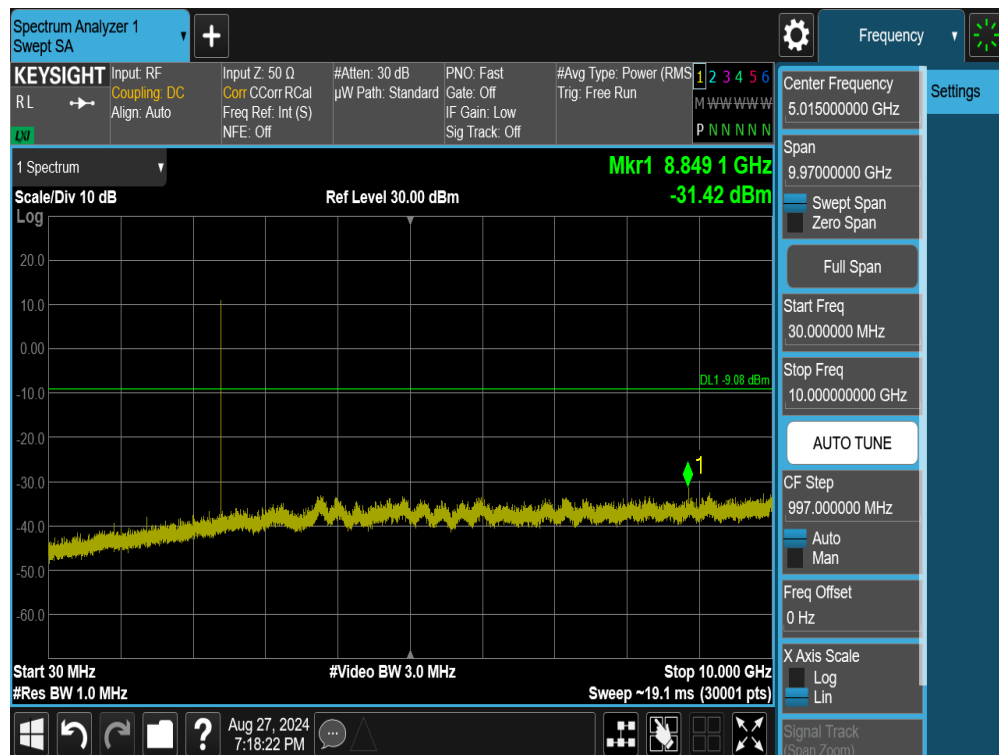


Plot 7-129. Conducted Spurious Plot (Bluetooth (LE), 1Mbps – Ch. 0) – Dual Ant2

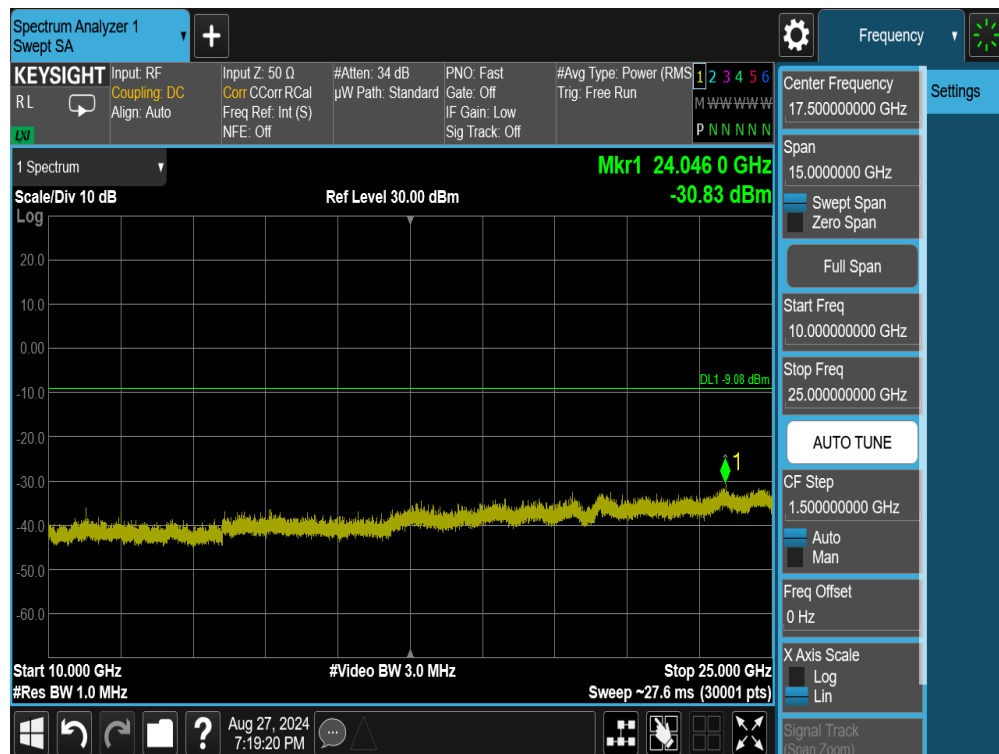


Plot 7-130. Conducted Spurious Plot (Bluetooth (LE), 1Mbps – Ch. 0) – Dual Ant2

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 93 of 114

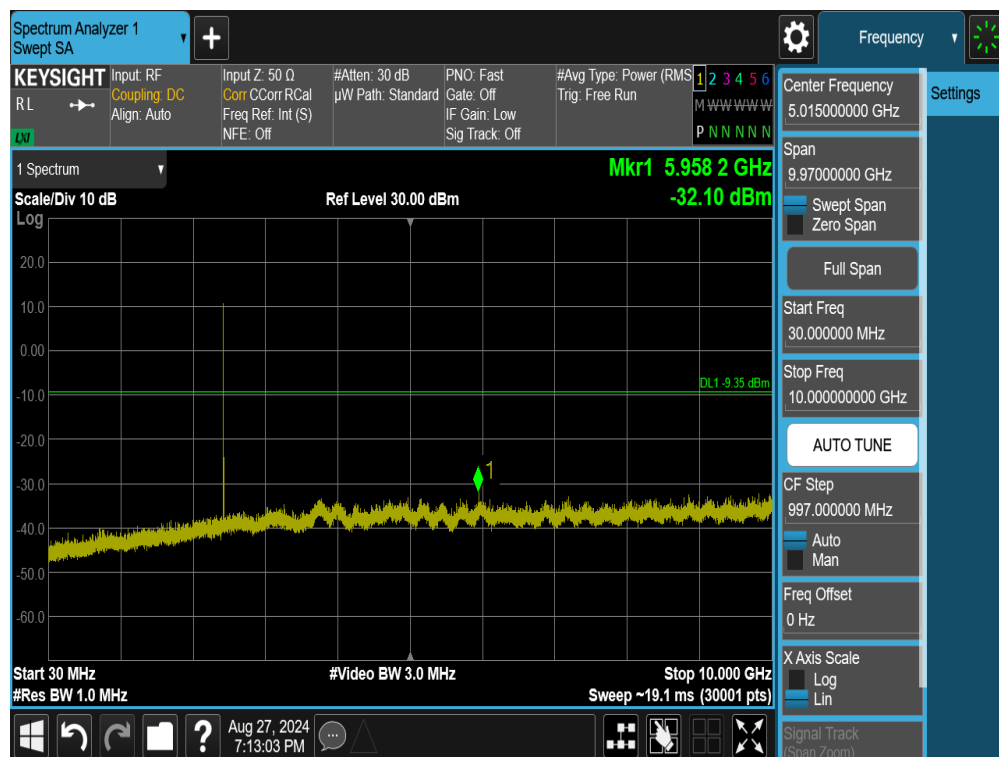


Plot 7-131. Conducted Spurious Plot (Bluetooth (LE), 1Mbps – Ch. 09) – Dual Ant2

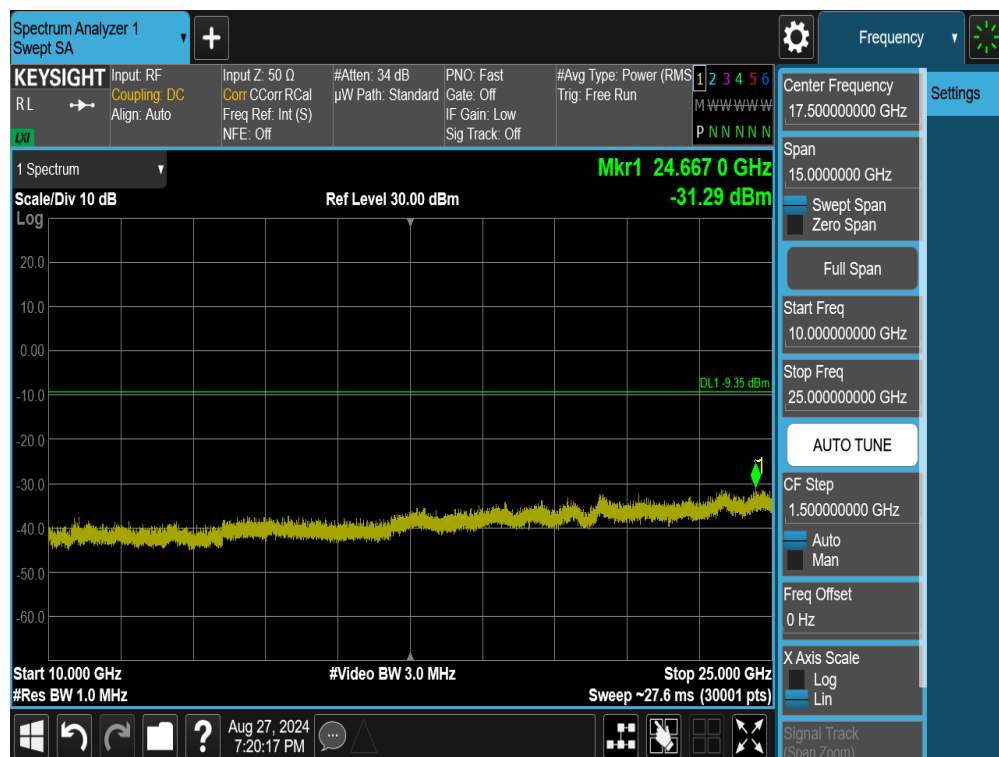


Plot 7-132. Conducted Spurious Plot (Bluetooth (LE), 1Mbps – Ch. 09) – Dual Ant2

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 94 of 114

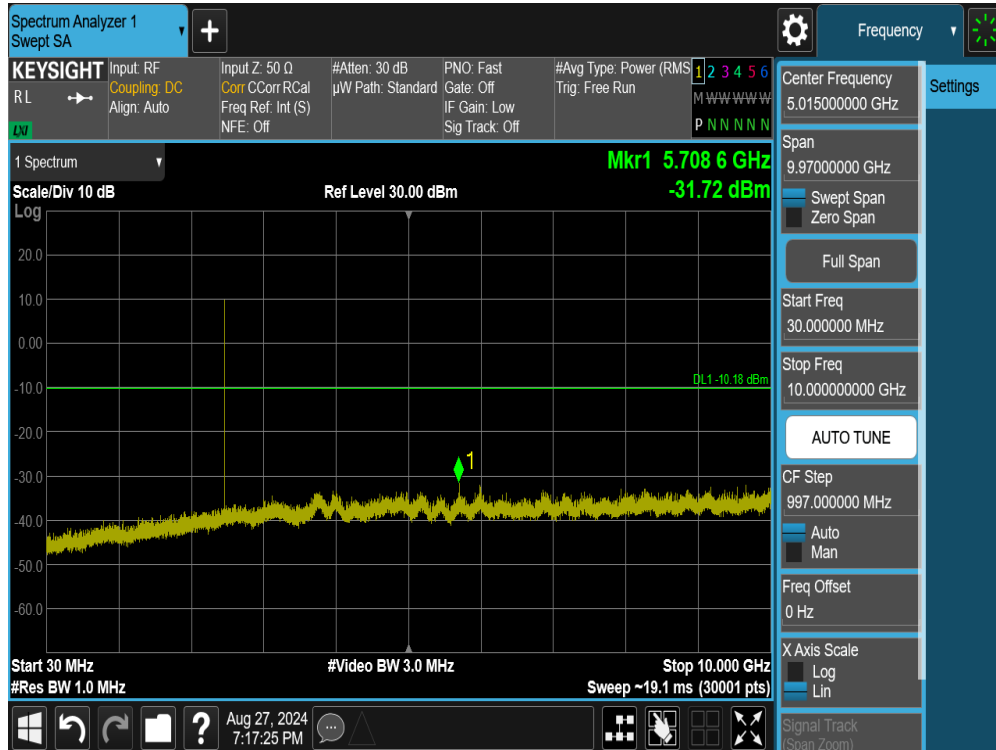

Plot 7-133. Conducted Spurious Plot (Bluetooth (LE), 1Mbps – Ch. 39) – Dual Ant2

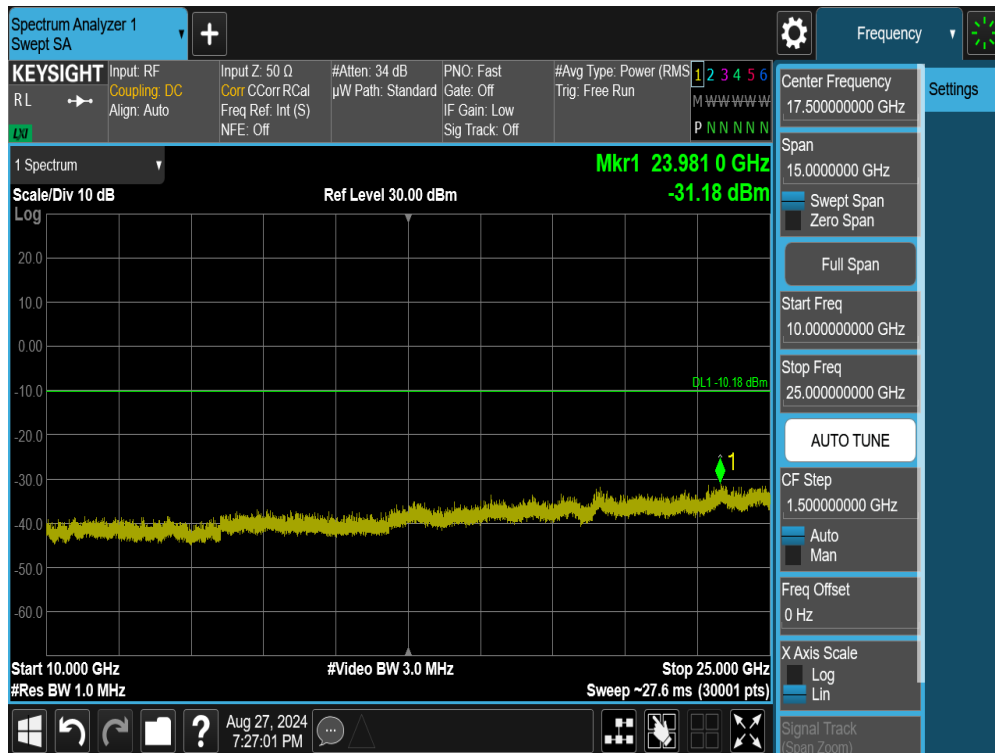

Plot 7-134. Conducted Spurious Plot (Bluetooth (LE), 1Mbps – Ch. 39) – Dual Ant2

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 95 of 114

7.7 Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d)

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-14 per Section 15.209.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-14. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3kHz > 1/T
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to run for at least 50 times (1/duty cycle) traces

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 96 of 114

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in Table 7-15 below
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Frequency	RBW
9 – 150kHz	200 – 300Hz
0.15 – 30MHz	9 – 10kHz
30 – 1000MHz	100 – 120kHz
> 1000MHz	1MHz

Table 7-15. RBW as a Function of Frequency

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

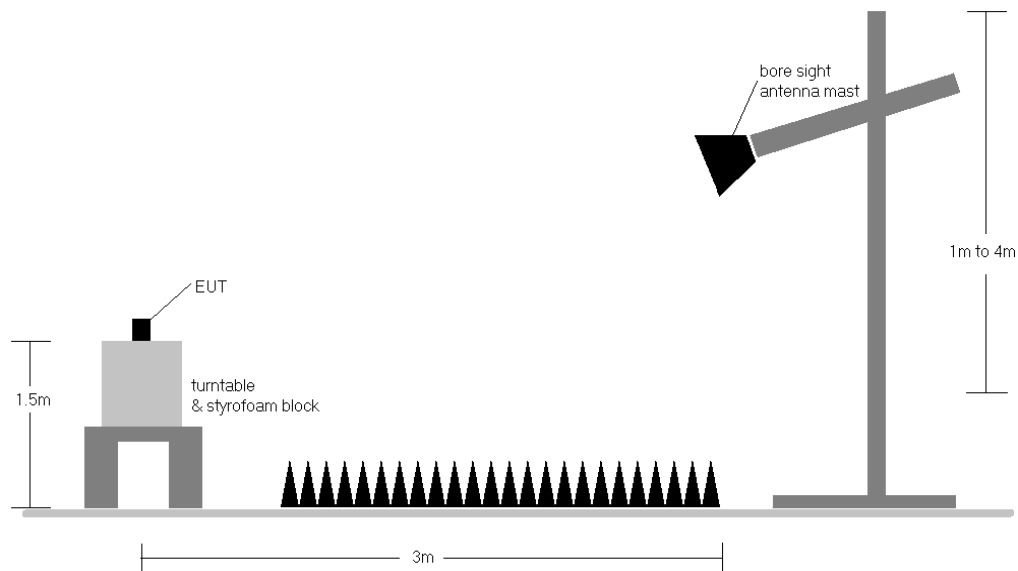


Figure 7-6. Radiated Test Setup >1GHz

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 97 of 114

Test Notes

1. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 below the limit shown in Table 7-14.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Average measurements were recorded using a VBW of 3kHz, per Section 4.1.4.2.3 of ANSI C63.10-2013, since 1/T is equal to just under 3kHz. This method was used because the EUT could not be configured to operate with a duty cycle > 98%. Both average and peak measurements were made using a peak detector
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. No Emission was founded above 18GHz.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB_{\mu V/m}]}$ = Analyzer Level $_{[dBm]}$ + 107 + AFCL $_{[dB/m]}$
- AFCL $_{[dB/m]}$ = Antenna Factor $_{[dB/m]}$ + Cable Loss $_{[dB]}$
- Margin $_{[dB]}$ = Field Strength Level $_{[dB_{\mu V/m}]}$ – Limit $_{[dB_{\mu V/m}]}$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.8 was calculated using the formula:


$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 98 of 114




Radiated Spurious Emission Measurements – Ant1


\$15.205 \$15.209 \$15.247(d)

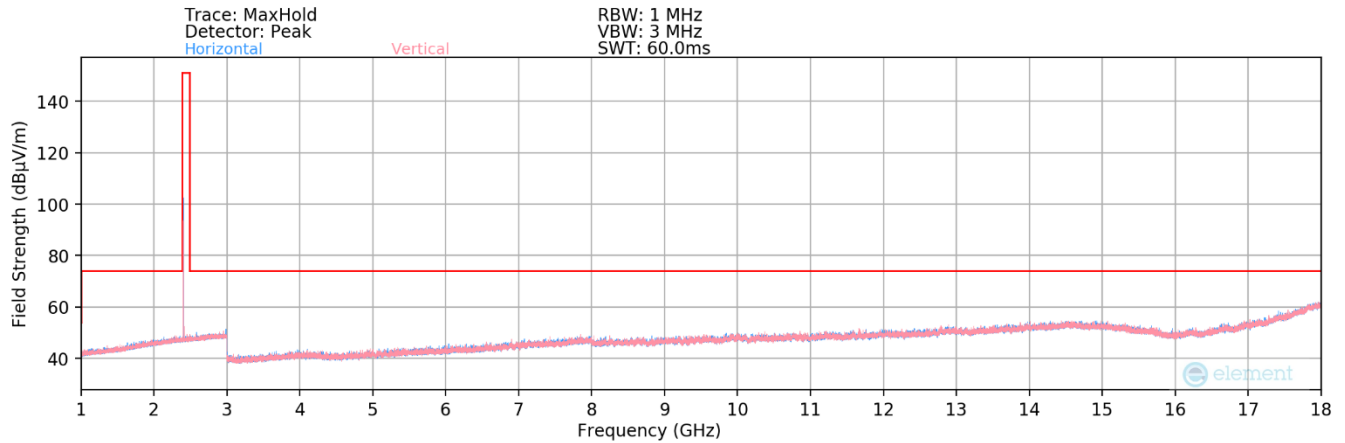

Plot 7-135. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 0) – Ant1

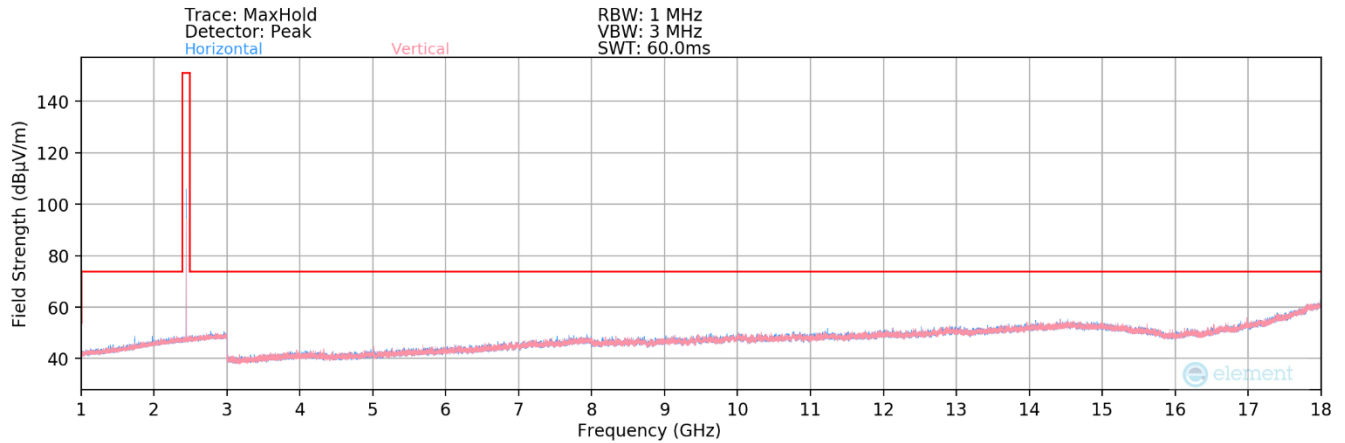

Plot 7-136. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 09) – Ant1

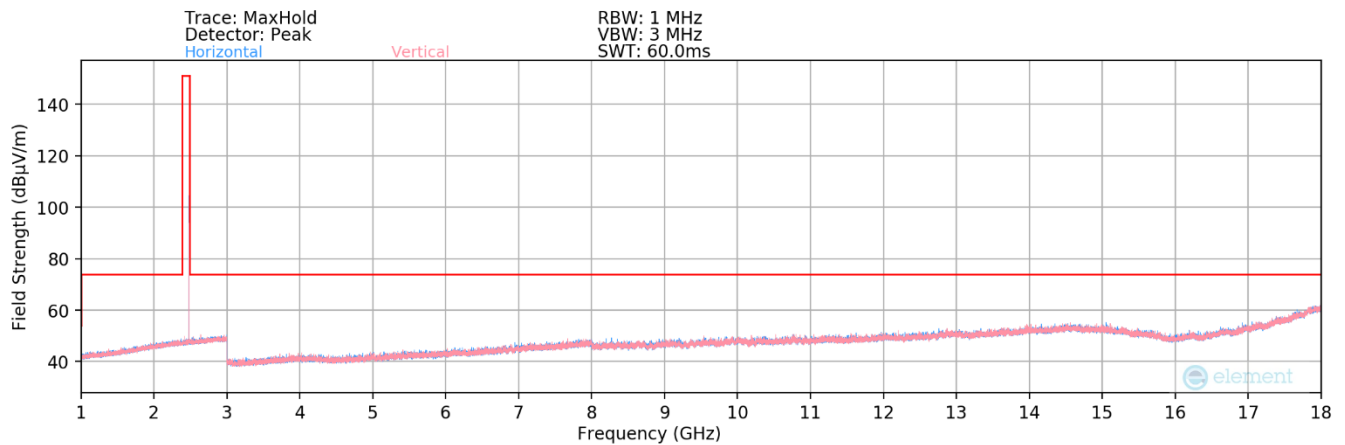

Plot 7-137. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 39) – Ant1

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 99 of 114



Radiated Spurious Emission Measurements – Ant1

§15.205 §15.209 §15.247(d)

Bluetooth Mode: LE
Distance of Measurements: 3 Meters
Operating Frequency: 2402MHz
Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	H	-	-	-76.95	0.13	30.18	53.98	-23.80
4804.00	Peak	H	-	-	-66.84	0.13	40.29	73.98	-33.69
12010.00	Avg	H	-	-	-81.59	12.88	38.29	53.98	-15.69
12010.00	Peak	H	-	-	-70.28	12.88	49.60	73.98	-24.38

Table 7-16. Radiated Measurements – Ant1

Bluetooth Mode: LE
Distance of Measurements: 3 Meters
Operating Frequency: 2440MHz
Channel: 19

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4880.00	Avg	H	-	-	-76.43	0.34	30.91	53.98	-23.07
4880.00	Peak	H	-	-	-66.97	0.34	40.37	73.98	-33.61
7320.00	Avg	H	-	-	-78.45	6.00	34.55	53.98	-19.43
7320.00	Peak	H	-	-	-69.53	6.00	43.47	73.98	-30.51
12200.00	Avg	H	-	-	-80.86	12.77	38.91	53.98	-15.07
12200.00	Peak	H	-	-	-70.53	12.77	49.24	73.98	-24.74

Table 7-17. Radiated Measurements – Ant1

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 100 of 114

Bluetooth Mode: LE
Distance of Measurements: 3 Meters
Operating Frequency: 2480MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	-	-	-76.17	1.41	32.24	53.98	-21.74
4960.00	Peak	H	-	-	-63.69	1.41	44.72	73.98	-29.26
7440.00	Avg	H	-	-	-77.08	6.20	36.12	53.98	-17.86
7440.00	Peak	H	-	-	-65.47	6.20	47.73	73.98	-26.25
12400.00	Avg	H	-	-	-80.36	13.37	40.01	53.98	-13.97
12400.00	Peak	H	-	-	-69.55	13.37	50.82	73.98	-23.16


Table 7-18. Radiated Measurements – Ant1

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 101 of 114




Radiated Spurious Emission Measurements – Ant2


\$15.205 \$15.209 \$15.247(d)

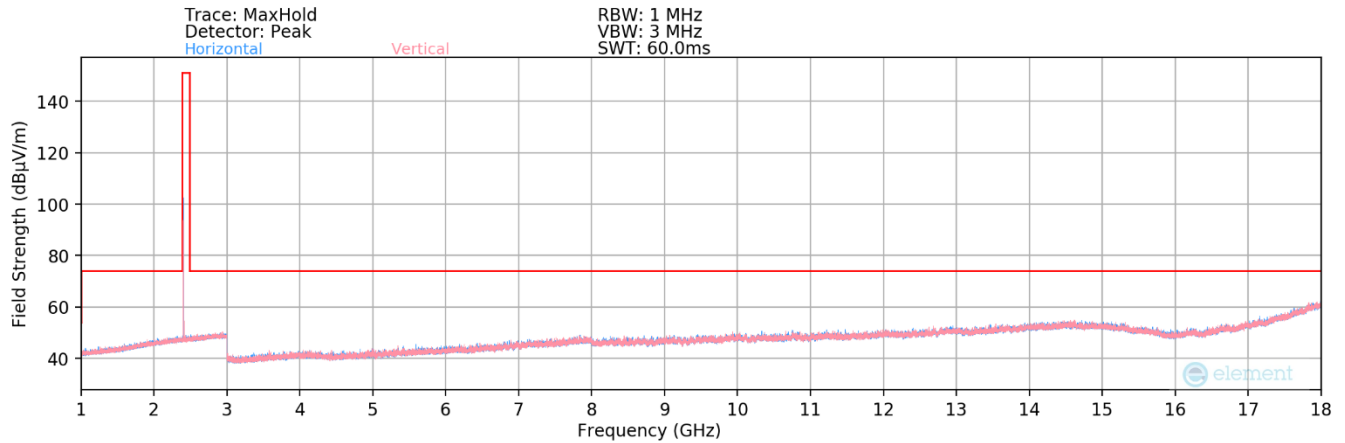

Plot 7-138. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 0) – Ant2

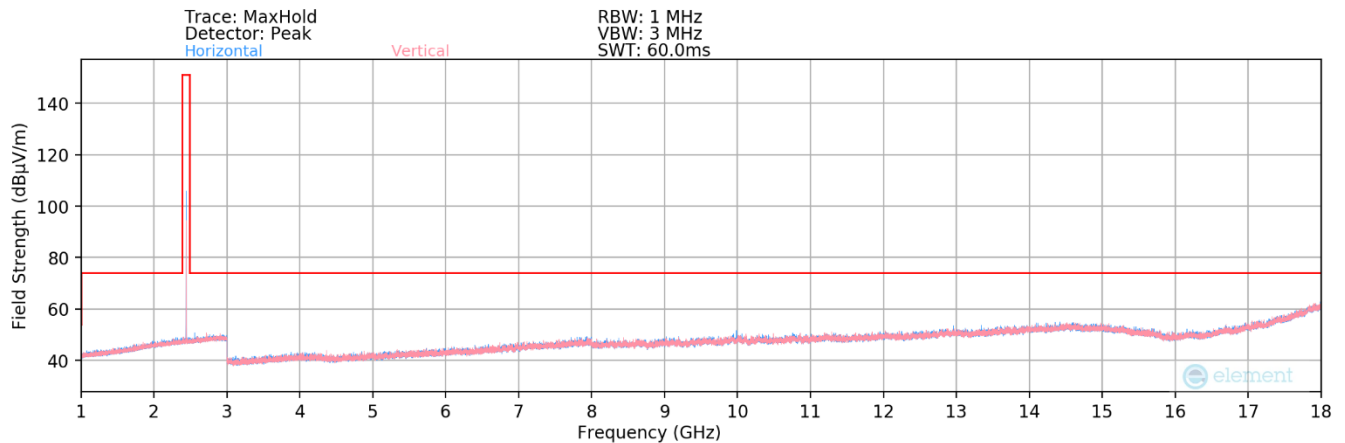

Plot 7-139. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 09) – Ant2

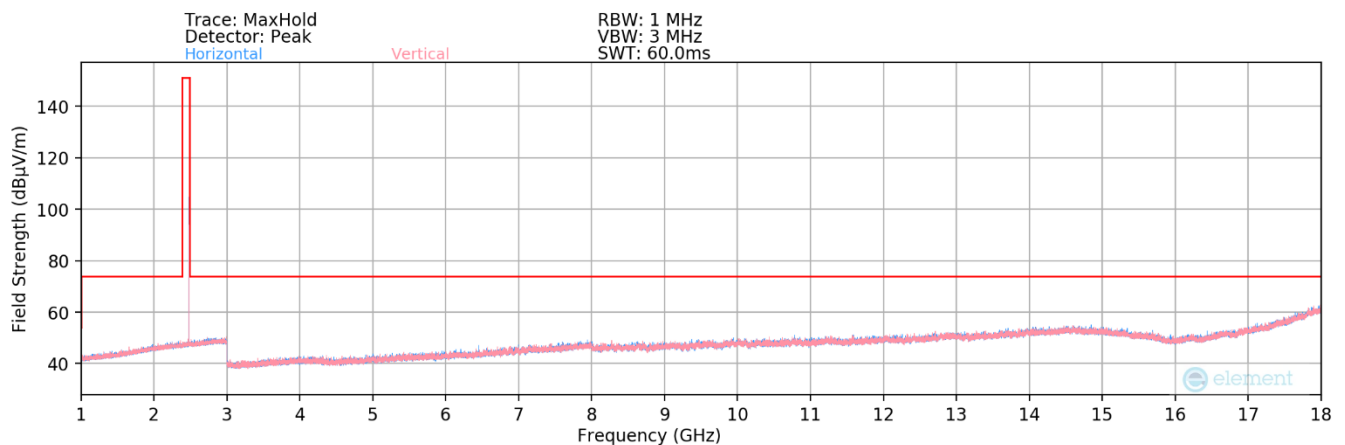

Plot 7-140. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 39) – Ant2

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 102 of 114

© 2024 ELEMENT

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

V3.0 1/4/2022



Radiated Spurious Emission Measurements – Ant2

§15.205 §15.209 §15.247(d)

Bluetooth Mode: LE
Distance of Measurements: 3 Meters
Operating Frequency: 2402MHz
Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	H	-	-	-76.86	0.13	30.27	53.98	-23.71
4804.00	Peak	H	-	-	-66.73	0.13	40.40	73.98	-33.58
12010.00	Avg	H	-	-	-81.84	12.88	38.04	53.98	-15.94
12010.00	Peak	H	-	-	-70.39	12.88	49.49	73.98	-24.49

Table 7-19. Radiated Measurements – Ant2

Bluetooth Mode: LE
Distance of Measurements: 3 Meters
Operating Frequency: 2440MHz
Channel: 19

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4880.00	Avg	H	-	-	-76.71	0.34	30.63	53.98	-23.35
4880.00	Peak	H	-	-	-66.95	0.34	40.39	73.98	-33.59
7320.00	Avg	H	-	-	-78.43	6.00	34.57	53.98	-19.41
7320.00	Peak	H	-	-	-69.89	6.00	43.11	73.98	-30.87
12200.00	Avg	H	-	-	-80.87	12.77	38.90	53.98	-15.08
12200.00	Peak	H	-	-	-70.38	12.77	49.39	73.98	-24.59

Table 7-20. Radiated Measurements – Ant2

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 103 of 114

Bluetooth Mode: LE
Distance of Measurements: 3 Meters
Operating Frequency: 2480MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	-	-	-76.13	1.41	32.28	53.98	-21.70
4960.00	Peak	H	-	-	-65.68	1.41	42.73	73.98	-31.25
7440.00	Avg	H	-	-	-77.29	6.20	35.91	53.98	-18.07
7440.00	Peak	H	-	-	-67.01	6.20	46.19	73.98	-27.79
12400.00	Avg	H	-	-	-80.58	13.37	39.79	53.98	-14.19
12400.00	Peak	H	-	-	-69.64	13.37	50.73	73.98	-23.25


Table 7-21. Radiated Measurements – Ant2

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 104 of 114




Radiated Spurious Emission Measurements – Dual


\$15.205 \$15.209 \$15.247(d)

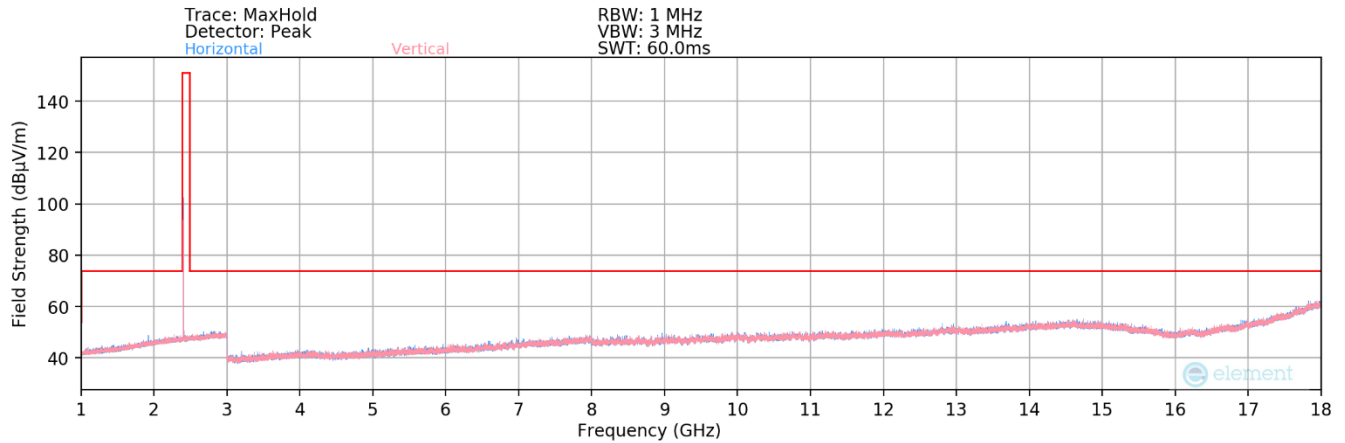

Plot 7-141. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 0) – Dual

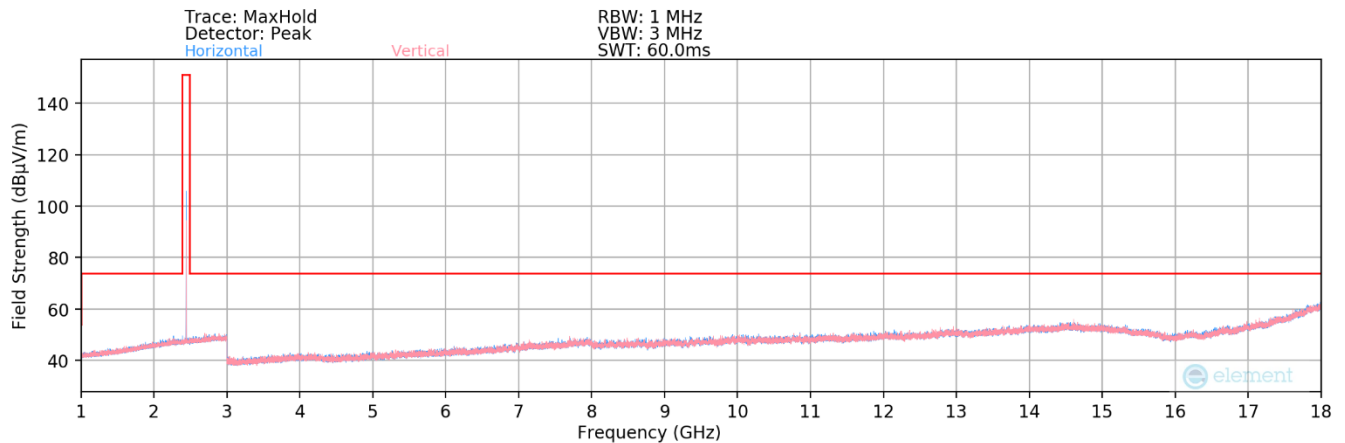

Plot 7-142. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 09) – Dual

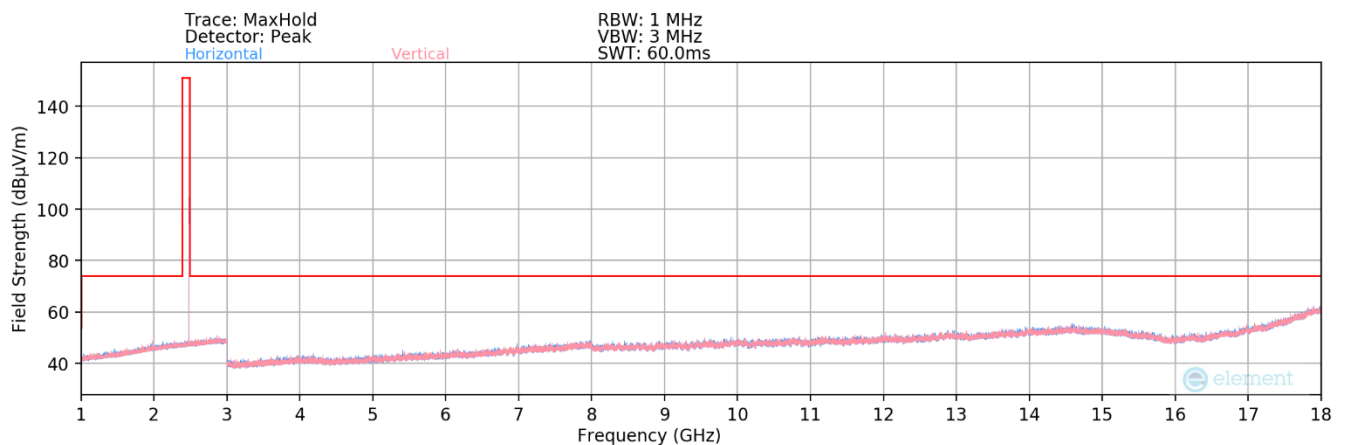

Plot 7-143. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 39) – Dual

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 105 of 114

Radiated Spurious Emission Measurements – Dual

§15.205 §15.209 §15.247(d)

Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	H	-	-	0.13	30.76	53.98	-23.22
4804.00	Peak	H	-	-	0.13	42.62	73.98	-31.36
12010.00	Avg	H	-	-	12.88	38.36	53.98	-15.62
12010.00	Peak	H	-	-	12.88	49.55	73.98	-24.43

Table 7-22. Radiated Measurements – Dual

Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2440MHz
 Channel: 19

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4880.00	Avg	H	-	-	0.34	30.82	53.98	-23.16
4880.00	Peak	H	-	-	0.34	42.48	73.98	-31.50
7320.00	Avg	H	-	-	6.00	35.62	53.98	-18.36
7320.00	Peak	H	-	-	6.00	47.34	73.98	-26.64
12200.00	Avg	H	-	-	12.77	38.93	53.98	-15.05
12200.00	Peak	H	-	-	12.77	50.18	73.98	-23.80

Table 7-23. Radiated Measurements – Dual

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 106 of 114



Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4960.00	Avg	H	-	-	1.41	32.29	53.98	-21.69
4960.00	Peak	H	-	-	1.41	44.61	73.98	-29.37
7440.00	Avg	H	-	-	6.20	35.96	53.98	-18.02
7440.00	Peak	H	-	-	6.20	47.36	73.98	-26.62
12400.00	Avg	H	-	-	13.37	39.41	53.98	-14.57
12400.00	Peak	H	-	-	13.37	51.03	73.98	-22.95

Table 7-24. Radiated Measurements – Dual

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 107 of 114

7.8 Radiated Restricted Band Edge Measurements


\$15.205 \$15.209

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode:	LE
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	39

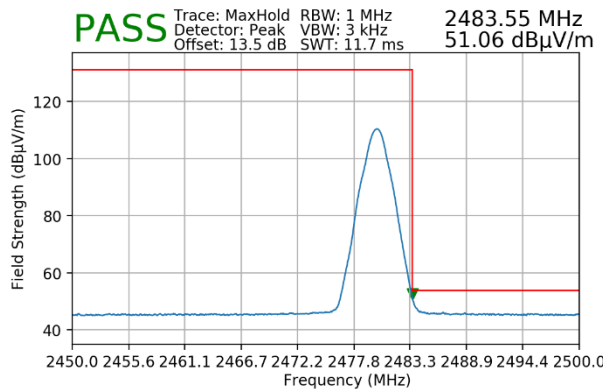


Plot 7-144. Radiated Restricted Lower Band Edge Measurement (Average) – Ant1

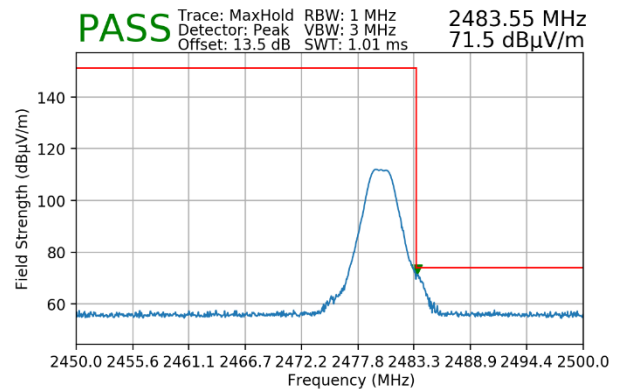


Plot 7-145. Radiated Restricted Lower Band Edge Measurement (Peak) – Ant1

Bluetooth Mode:	LE
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	39

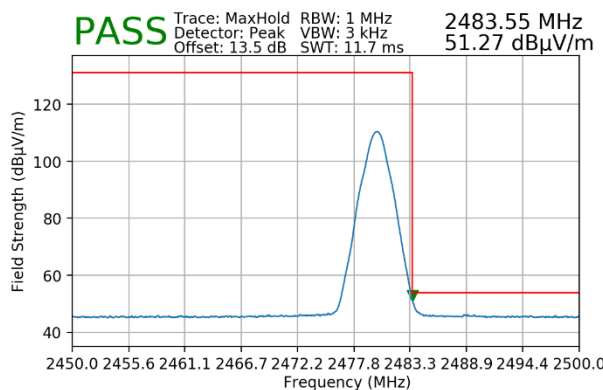

Plot 7-146. Radiated Restricted Upper Band Edge Measurement (Average) – Ant2

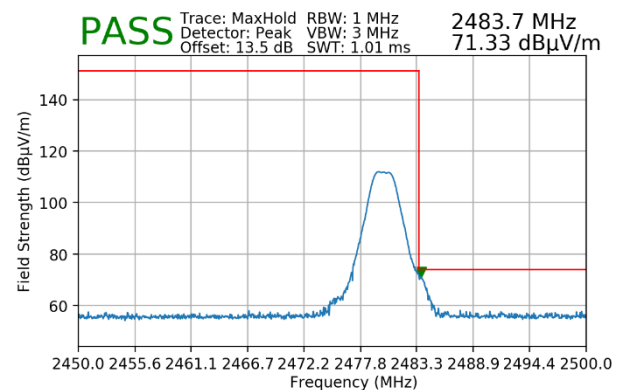


Plot 7-147. Radiated Restricted Upper Band Edge Measurement (Peak) – Ant2


FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 108 of 114



Bluetooth Mode: LE
Measurement Distance: 3 Meters
Operating Frequency: 2480MHz
Channel: 39

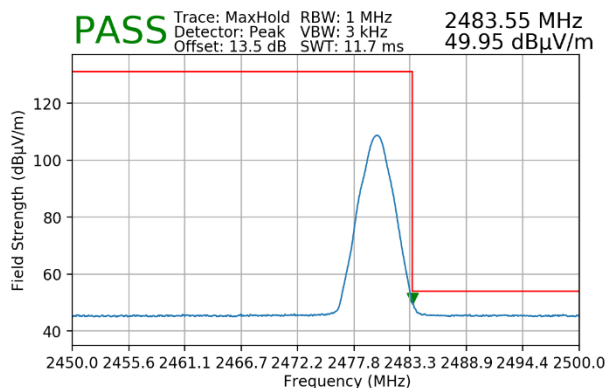

Plot 7-148. Radiated Restricted Upper Band Edge Measurement (Average) – Dual

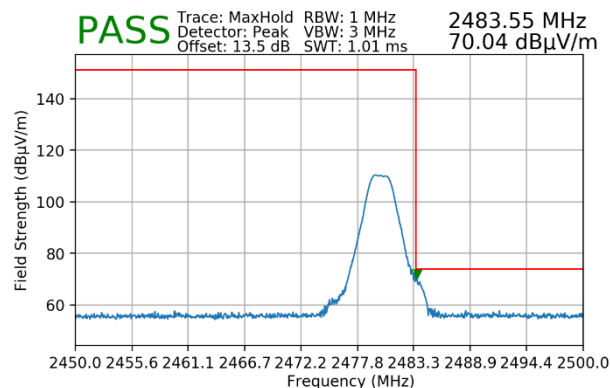

Plot 7-149. Radiated Restricted Upper Band Edge Measurement (Peak) – Dual

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 109 of 114

7.9 Line Conducted Measurement Data

§15.207

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below per Section 15.207.

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-25. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 110 of 114

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


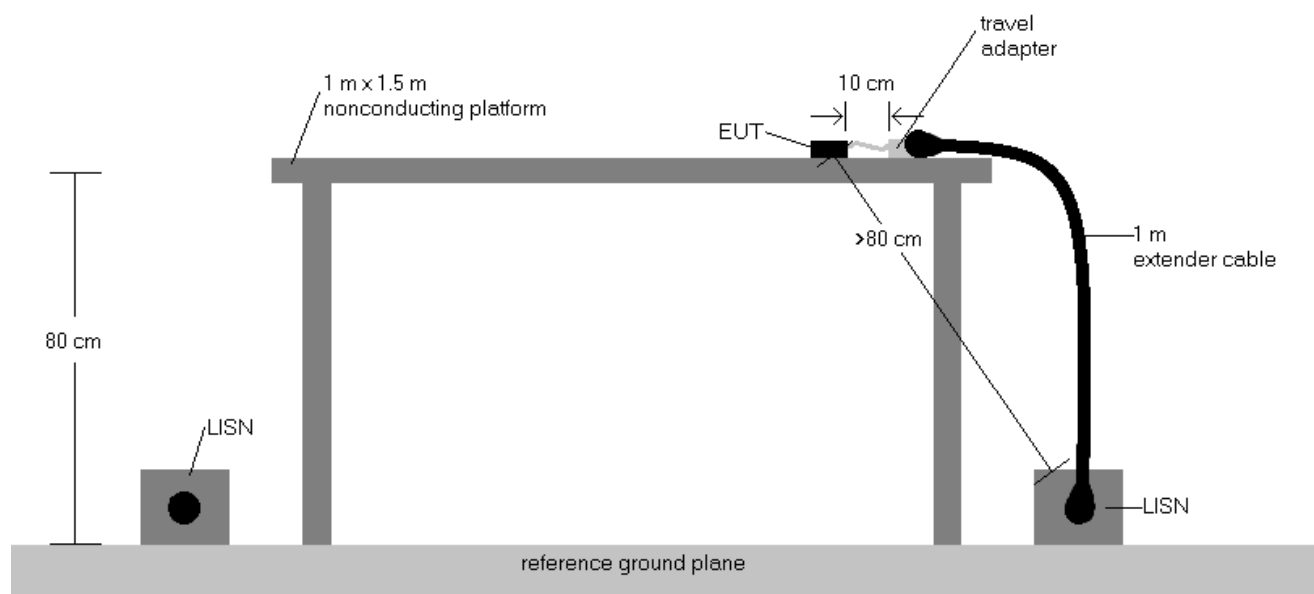


Figure 7-7. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated, and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207.
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 111 of 114

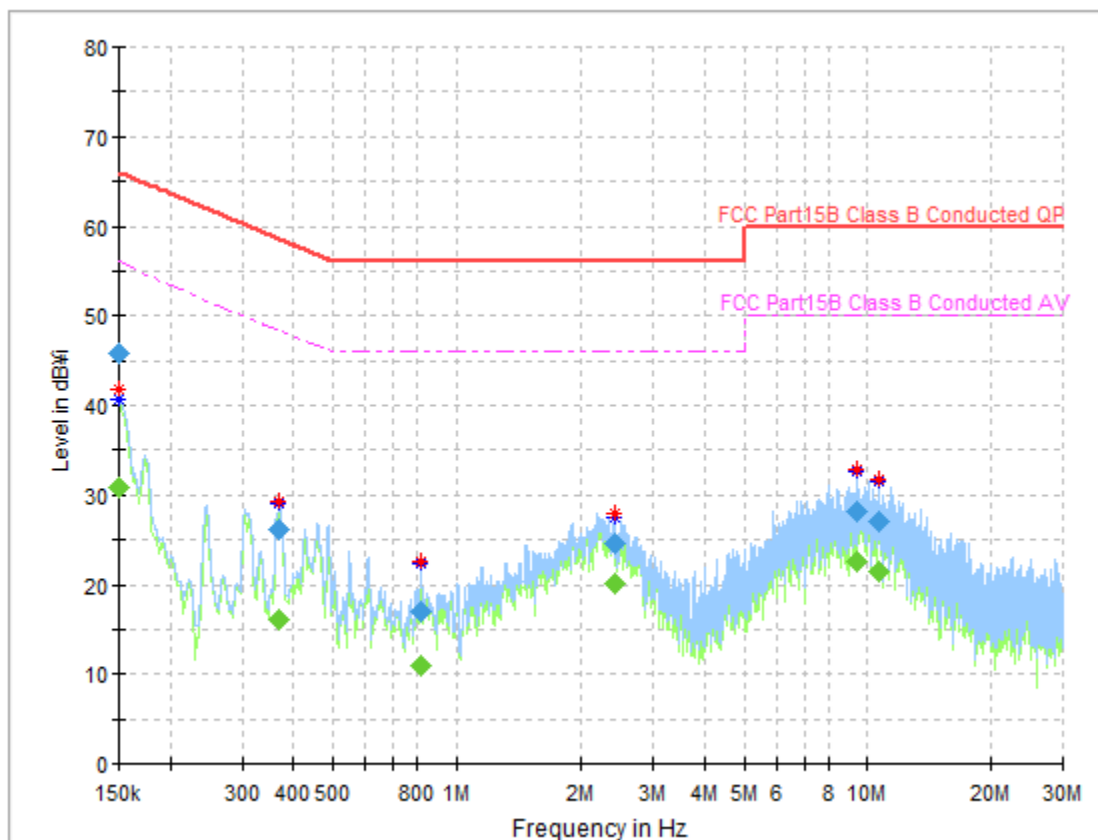


Plot 7-150. Line-Conducted Test Plot (L1)

Frequency (MHz)	Quasi Peak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	30.83	56.00	25.17	1000.0	9.000	L1	9.8
0.150000	45.85	---	66.00	20.15	1000.0	9.000	L1	9.8
0.370890	---	16.13	48.30	32.17	1000.0	9.000	L1	9.8
0.370890	26.06	---	58.48	32.42	1000.0	9.000	L1	9.8
0.818640	---	10.97	46.00	35.03	1000.0	9.000	L1	9.8
0.818640	16.98	---	56.00	39.02	1000.0	9.000	L1	9.8
2.418600	---	20.19	46.00	25.81	1000.0	9.000	L1	9.8
2.418600	24.51	---	56.00	31.49	1000.0	9.000	L1	9.8
9.463200	---	22.65	50.00	27.35	1000.0	9.000	L1	10.1
9.463200	28.17	---	60.00	31.83	1000.0	9.000	L1	10.1
10.669140	---	21.51	50.00	28.49	1000.0	9.000	L1	10.2
10.669140	27.03	---	60.00	32.97	1000.0	9.000	L1	10.2

Table 7-26. Line-Conducted Test Result (L1)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 112 of 114

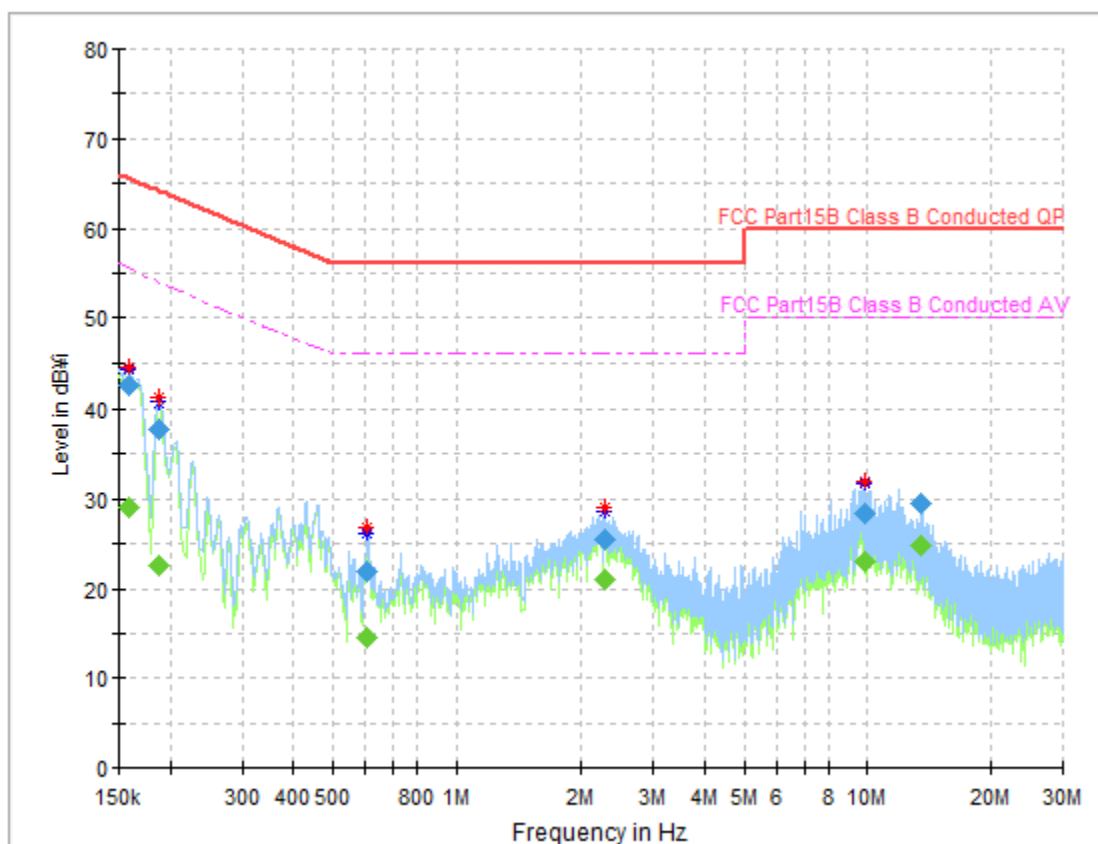

Plot 7-151. Line-Conducted Test Plot (N)

Frequency (MHz)	Quasi Peak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.158955	---	29.02	55.47	26.45	1000.0	9.000	N	9.9
0.158955	42.40	---	65.52	23.12	1000.0	9.000	N	9.9
0.188805	---	22.49	53.93	31.45	1000.0	9.000	N	9.9
0.188805	37.87	---	64.09	26.22	1000.0	9.000	N	9.9
0.606705	---	14.50	46.00	31.50	1000.0	9.000	N	9.9
0.606705	21.88	---	56.00	34.12	1000.0	9.000	N	9.9
2.284275	---	20.92	46.00	25.08	1000.0	9.000	N	9.8
2.284275	25.48	---	56.00	30.52	1000.0	9.000	N	9.8
9.866175	---	23.06	50.00	26.94	1000.0	9.000	N	10.2
9.866175	28.46	---	60.00	31.54	1000.0	9.000	N	10.2
13.558620	---	24.78	50.00	25.22	1000.0	9.000	N	10.5
13.558620	29.61	---	60.00	30.39	1000.0	9.000	N	10.5

Table 7-27. Line-Conducted Test Result (N)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 113 of 114



8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Computing Device** **FCC ID: A3LNP750XQA** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules.

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-03.A3L	Test Dates: 08/19/2024 – 08/28/2024	EUT Type: Portable Computing Device	Page 114 of 114