



ELEMENT SUWON
13, Heungdeok 1-ro, Giheung-gu, Yongin-si,
Gyeonggi-do, 16954 South Korea
Tel. 031.660.7319 / Fax 031.660.7318
<http://www.element.com>

MEASUREMENT REPORT FCC PART 15.247 WLAN OFDMA

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
07/15/2024 – 08/27/2024
Test Report Issue Date:
08/27/2024
Test Site/Location:
Element lab., Gyeonggi-do, South Korea
Test Report Serial No.:
1M2407080057-05.A3L

FCC ID:	A3LNP750XQA
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type:	Certification
Model:	NP750XQA
Additional Model(s)	NP754XQA
EUT Type:	Portable Computing Device
Frequency Range:	2412 – 2472MHz
Modulation Type:	OFDMA
FCC Classification:	Digital Transmission System (DTS)
FCC Rule Part(s):	Part 15 Subpart C (15.247)
Test Procedure(s):	ANSI C63.10-2013, , KDB 484596 D01 v02r03

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Prepared by


Reviewed by

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 1 of 109

TABLE OF CONTENTS

1.0	INTRODUCTION.....	5
1.1	Scope	5
1.2	Element Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Test Configuration	7
2.4	Antenna Description	7
2.5	Software and Firmware	8
2.6	EMI Suppression Device(s)/Modifications	8
3.0	DESCRIPTION OF TESTS	9
3.1	Evaluation Procedure	9
3.2	Radiated Emissions.....	9
3.3	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS	10
5.0	MEASUREMENT UNCERTAINTY.....	11
6.0	TEST EQUIPMENT CALIBRATION DATA.....	12
7.0	TEST RESULTS.....	13
7.1	Summary.....	13
7.2	6dB Bandwidth Measurement	14
7.2.1	SISO Antenna-2 6dB Bandwidth Measurements	15
7.2.2	MIMO 6dB Bandwidth Measurements	19
7.3	Output Power Measurement.....	26
7.4	Power Spectral Density	30
7.4.1	SISO Antenna-2 Power Spectral Density Measurements	31
7.4.2	MIMO Power Spectral Density Measurements	35
7.5	Conducted Band Edge Emissions.....	43
7.5.1	SISO Antenna-2 Conducted Band Edge Emissions.....	44
7.5.2	MIMO Antenna-1 Conducted Band Edge Emissions.....	52
7.5.3	MIMO Antenna-2 Conducted Band Edge Emissions.....	60
7.6	Conducted Spurious Emissions.....	68
7.6.1	SISO Antenna-2 Conducted Spurious Emission	70
7.6.2	MIMO Antenna-1 Conducted Spurious Emission.....	76
7.6.3	MIMO Antenna-2 Conducted Spurious Emissions	82
7.7	Radiated Emission Measurements	88

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 2 of 109



7.7.1 MIMO Radiated Spurious Emission Pre-Scans..... 92

7.7.2 MIMO Radiated Spurious Emission Measurements..... 95

7.7.3 SISO Antenna-2 Radiated Restricted Band Edge Measurements..... 98

7.7.4 MIMO Radiated Restricted Band Edge Measurements..... 102

8.0 CONCLUSION109

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 3 of 109

MEASUREMENT REPORT

Channel Bandwidth [MHz]	IEEE Mode	Tones	Tx Frequency [MHz]	Antenna-2				MIMO			
				Avg. Conducted		Peak Conducted		Avg. Conducted		Peak Conducted	
				Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]
20	802.11ax/be OFDMA	26T	2412 - 2462	30.55	14.85	180.72	22.57	58.64	17.68	356.08	25.52
	802.11ax/be OFDMA	52T	2412 - 2462	31.26	14.95	178.24	22.51	60.11	17.79	371.19	25.70
	802.11be OFDMA	52+26T	2412 - 2462	31.55	14.99	181.13	22.58	58.89	17.70	343.30	25.36
	802.11ax/be OFDMA	106T	2412 - 2462	29.38	14.68	179.47	22.54	59.07	17.71	373.19	25.72
	802.11be OFDMA	106+26T	2412 - 2462	31.48	14.98	195.88	22.92	58.56	17.68	375.57	25.75
	802.11ax/be OFDMA	242T	2412 - 2462	33.96	15.31	219.79	23.42	60.09	17.79	394.19	25.96

EUT Overview

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 4 of 109

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element Suwon Laboratory located at 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16954, South Korea. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology Suwon, Ltd. located in Yongin-si, Gyeonggi-do, 16954, South Korea.

- Element Materials Technology Suwon, Ltd. is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation(A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), and Electromagnetic Compatibility (EMC) & Telecommunications testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon, Ltd. facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
 - Designation Number / CABID: KR0169
 - Test Firm Registration Number of FCC: 417945
 - Test Firm Registration Number of ISRD: 26168

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 5 of 109

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Computing Device FCC ID: A3LNP750XQA**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

Test Device Serial No.: 0633F, 0718K

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ac/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE)

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

Table 2-1. Frequency/ Channel Operations

Notes:

1. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013 and KDB 558074 D01 v05r02. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Band	Bandwidth	Tone Type	Tone Size	ANT2		MIMO (1+2)	
				Duty Cycle [%]	Radiated DCCF [dB]	Duty Cycle [%]	Radiated DCCF [dB]
2.4GHz	20MHz	RU	26T	99.53	N/A	99.29	N/A
			52T	99.51	N/A	99.45	N/A
			106T	99.48	N/A	98.93	N/A
			242T	99.48	N/A	98.96	N/A
		MRU	52+26T	99.36	N/A	99.29	N/A
			106+26T	99.43	N/A	98.86	N/A

Table 2-2. Measured Duty Cycles

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 6 of 109



2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
2.4GHz	11ax	✖	✓	✓	✓	✓	✓
	11be	✖	✓	✓	✓	✓	✓

Table 2-3. Antenna Configuration

✓ = Support ; ✖ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

3. The device supports the following data rates (shown in Mbps):

MCS Index		Spatial Stream	OFDMA (802.11ax/be)												OFDMA (802.11be)					
			26T			52T			106T			242T			52+26T			106+26T		
HE	EHT		0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI
0	0	1	0.9	0.8	0.8	1.8	1.7	1.5	3.8	3.5	3.2	8.6	8.1	7.3	17.2	16.3	14.6	2.6	2.5	2.3
1	1	1	1.8	1.7	1.5	3.5	3.3	3	7.5	7.1	6.4	17.2	16.3	14.6	34.4	32.5	29.3	5.3	5	4.5
2	2	1	2.6	2.5	2.3	5.3	5	4.5	11.3	10.6	9.6	25.8	24.4	21.9	51.6	48.8	43.9	7.9	7.5	6.8
3	3	1	3.5	3.3	3	7.1	6.7	6	15	14.2	12.8	34.4	32.5	29.3	68.8	65	58.5	10.6	10	9
4	4	1	5.3	5	4.5	10.6	10	9	22.5	21.3	19.1	51.6	48.8	43.9	103.2	97.5	87.8	15.9	15	13.5
5	5	1	7.1	6.7	6	14.1	13.3	12	30	28.3	25.5	68.8	65	58.5	137.6	130	117	21.2	20	18
6	6	1	7.9	7.5	6.8	15.9	15	13.5	33.8	31.9	28.7	77.4	73.1	65.8	154.9	146.3	131.6	23.8	22.5	20.3
7	7	1	8.8	8.3	7.5	17.6	16.7	15	37.5	35.4	31.9	86	81.3	73.1	172.1	162.5	146.3	26.5	25	22.5
8	8	1	10.6	10	9	21.2	20	18	45	42.5	38.3	103.2	97.5	87.8	206.5	195	175.5	31.8	30	27
9	9	1	11.8	11.1	10	23.5	22.2	20	50	47.2	42.5	114.7	108.3	97.5	229.4	216.7	195	35.3	33.3	30
10	10	1	13.2	12.5	11.3	26.5	25	22.5	56.3	53.1	47.8	129	121.9	109.7	258.1	243.8	219.4	39.7	37.5	33.8
11	11	1	14.7	13.9	12.5	29.4	27.8	25	62.5	59	53.1	143.4	135.4	121.9	286.8	270.8	243.8	44.1	41.7	37.5
	12	1	15.9	15	13.5	31.8	30	27	67.5	63.8	57.4	154.9	146.3	131.6	309.7	292.5	263.3	47.6	45	40.5
	13	1	17.6	16.7	15	35.3	33.3	30	75	70.8	63.8	172.1	162.5	146.3	344.1	325	292.5	52.9	50	45
0	0	2	1.8	1.7	1.5	3.5	3.3	3	7.5	7.1	6.4	17.2	16.3	14.6	34.4	32.5	29.3	5.3	5	4.5
1	1	2	3.5	3.3	3	7.1	6.7	6	15	14.2	12.8	34.4	32.5	29.3	68.8	65	58.5	10.6	10	9
2	2	2	5.3	5	4.5	10.6	10	9	22.5	21.3	19.1	51.6	48.8	43.9	103.2	97.5	87.8	15.9	15	13.5
3	3	2	7.1	6.7	6	14.1	13.3	12	30	28.3	25.5	68.8	65	58.5	137.6	130	117	21.2	20	18
4	4	2	10.6	10	9	21.2	20	18	45	42.5	38.3	103.2	97.5	87.8	206.5	195	175.5	31.8	30	27
5	5	2	14.1	13.3	12	28.2	26.7	24	60	56.7	51	137.6	130	117	275.3	260	234	42.4	40	36
6	6	2	15.9	15	13.5	31.8	30	27	67.5	63.8	57.4	154.9	146.3	131.6	309.7	292.5	263.3	47.6	45	40.5
7	7	2	17.6	16.7	15	35.3	33.3	30	75	70.8	63.8	172.1	162.5	146.3	344.1	325	292.5	52.9	50	45
8	8	2	21.2	20	18	42.4	40	36	90	85	76.5	206.5	195	175.5	412.9	390	351	63.5	60	54
9	9	2	23.5	22.2	20	47.1	44.4	40	100	94.4	85	229.4	216.7	195	458.8	433.3	390	70.6	66.7	60
10	10	2	26.5	25	22.5	52.9	50	45	112.5	106.3	95.6	258.1	243.8	219.4	516.2	487.5	438.8	79.4	75	67.5
11	11	2	29.4	27.8	25	58.8	55.6	50	125	118.1	106.3	286.8	270.8	243.8	573.5	541.7	487.5	88.2	83.3	75
	12	2	31.8	30	27	63.5	60	54	135	127.5	114.8	309.7	292.5	263.3	619.4	585	526.5	95.3	90	81
	13	2	35.3	33.3	30	70.6	66.7	60	150	141.7	127.5	344.1	325	292.5	688.2	650	585	105.9	100	90

Table 2-4. Supported Data Rates

2.3 Test Configuration

ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Sections 7.5 for radiated emissions test setups, and 7.2, 7.3 and 7.4 for antenna port conducted emissions test setups.

2.4 Antenna Description

This device is only used with its integral antennas as shown in the documentation of this filing. The antenna gains for this device are as shown in the table below:

Frequency [GHz]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Directional Gain [dBi]
2.4	-2.15	-2.41	0.73

Table 2-5. Antenna Peak Gain

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 7 of 109



2.5 Software and Firmware

Testing was performed on device(s) using software/firmware version Windows 11 installed on the EUT.

2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 8 of 109

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 9 of 109

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 10 of 109

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.95
Radiated Disturbance (<1GHz)	4.10
Radiated Disturbance (>1GHz)	4.82
Radiated Disturbance (>18GHz)	4.96

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 11 of 109

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9030A	PXA Signal Analyzer	7/9/2024	Annual	7/9/2025	MY49432391
Anritsu	S820E	Cable and Antenna Analyzer	7/9/2024	Annual	7/9/2025	1839097
Anritsu	TOSLKF50A-40	Calibration Kit	N/A	-	N/A	1825024
Com-Power	AL-130R	Active Loop Antenna	10/21/2022	Biennial	10/20/2024	10160045
Fairview Microwave	FM2CP1122-10	Coupler	7/10/2024	Annual	7/10/2025	1946
Keysight Technologies	N9030B	PXA Signal Analyzer	7/8/2024	Annual	7/8/2025	MY57143276
Mini-Circuits	BW-N10W5+	Attenuator	1/11/2024	Annual	1/10/2025	TEMPNO.01-151
NARDA	180-442A-KF	Horn Antenna (Small)	1/16/2024	Annual	1/15/2025	T058701-03
Rohde & Schwarz	TS-PR1840	Preamplifier	7/10/2024	Annual	7/10/2025	100049
Rohde & Schwarz	ESW43	EMI TEST Receiver	7/9/2024	Annual	7/9/2025	101761
Rohde & Schwarz	TS-SFUNIT-Rx	Shielded Filter Unit	1/11/2024	Annual	1/10/2025	102151
Schwarzbeck	VULB9162	Broadband TRILOG Antenna	6/1/2023	Biennial	5/31/2025	9162-217
Sunol Sciences	DRH-118	Horn Antenna	7/16/2024	Biennial	7/16/2025	A102416-1
Sunol Sciences	DRH-118	Horn Antenna	1/16/2024	Biennial	1/16/2025	A060215

Table 6-1. Test Equipment

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 12 of 109

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics CO., Ltd.

FCC ID: A3LNP750XQA

FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.	CONDUCTED	PASS	Section 7.2
15.247(b)(3)	Transmitter Output Power	shall not exceed 1 W		PASS	Section 7.3
15.247(e)	Transmitter Power Spectral Density	shall not be greater than 8 dBm in any 3 kHz band		PASS	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Section 7.5, 7.6
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "WLAN Automation," Version 3.5 .
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.6.4.
- 6) 802.11ax/be OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 13 of 109

7.2 6dB Bandwidth Measurement

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


1. Based on preliminary measurements, it was determined that, of all the tone configurations, the 26T configuration produced the worst case 6dB Bandwidth measurement. Only the worst case data is included in this section.
2. The 6dB bandwidth for each channel was measured with the RU index showing the highest conducted power.

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 14 of 109

7.2.1 SISO Antenna-2 6dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	ax/be	26T	MCS0	2.735	0.500
2437	6	ax/be	26T	MCS0	2.743	0.500
2462	11	ax/be	26T	MCS0	2.734	0.500
2412	1	ax/be	242T	MCS0	19.100	0.500
2437	6	ax/be	242T	MCS0	19.100	0.500
2462	11	ax/be	242T	MCS0	19.070	0.500

Table 7-2. Conducted 6dB Bandwidth Measurements SISO ANT2

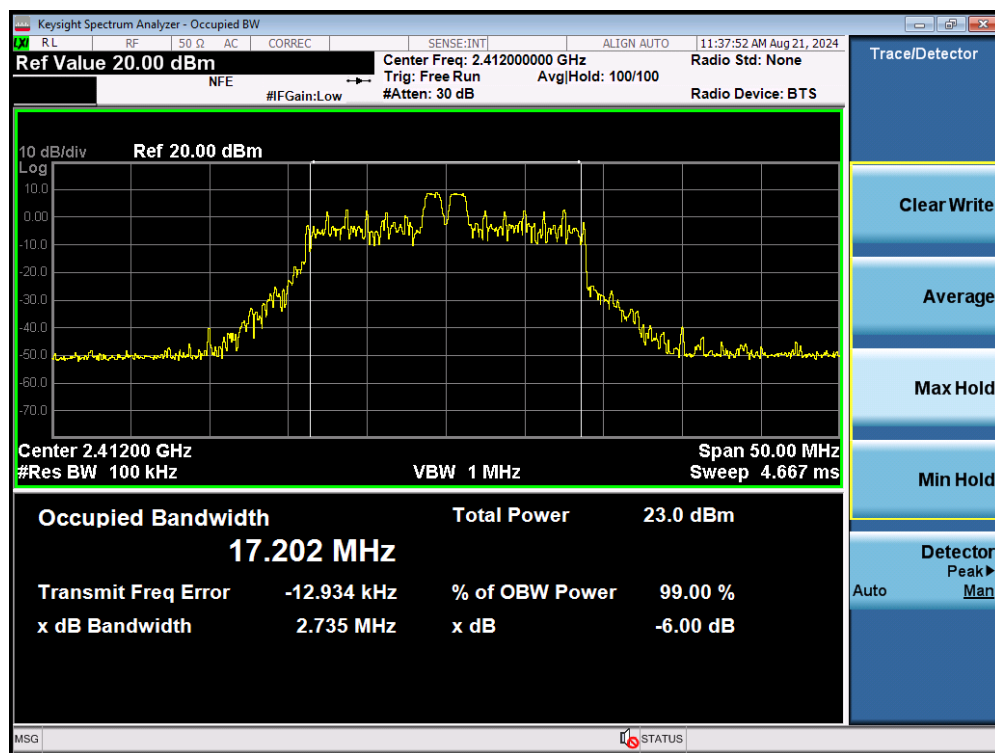


Plot 7-1. 6dB Bandwidth Plot SISO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 1)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 15 of 109

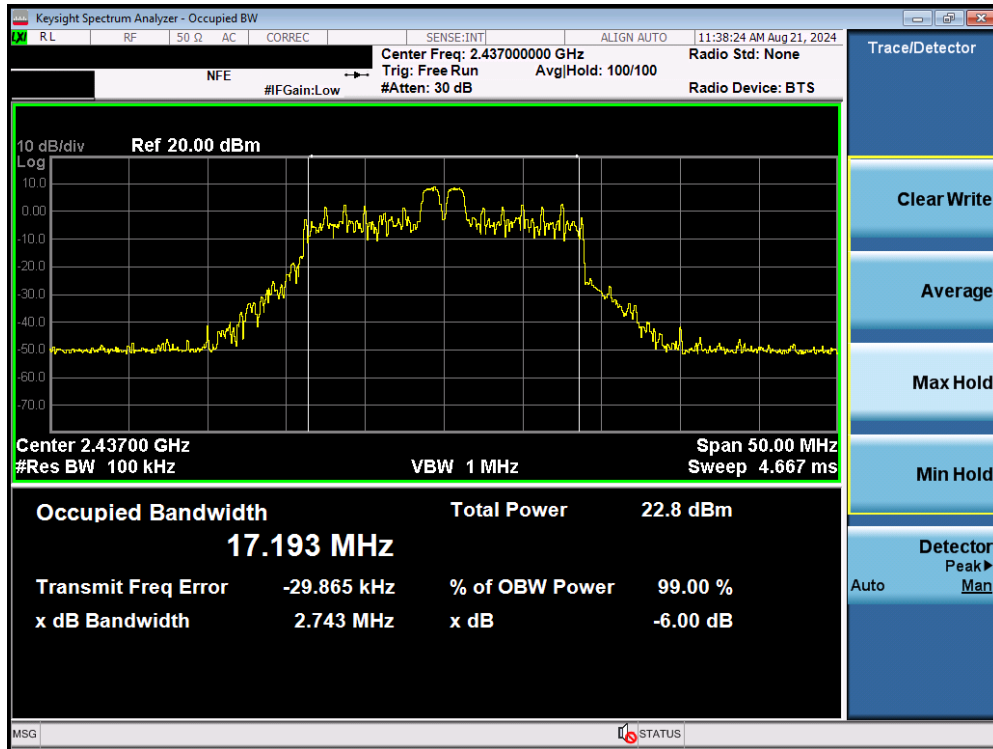


Plot 7-2. 6dB Bandwidth Plot SISO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 6)

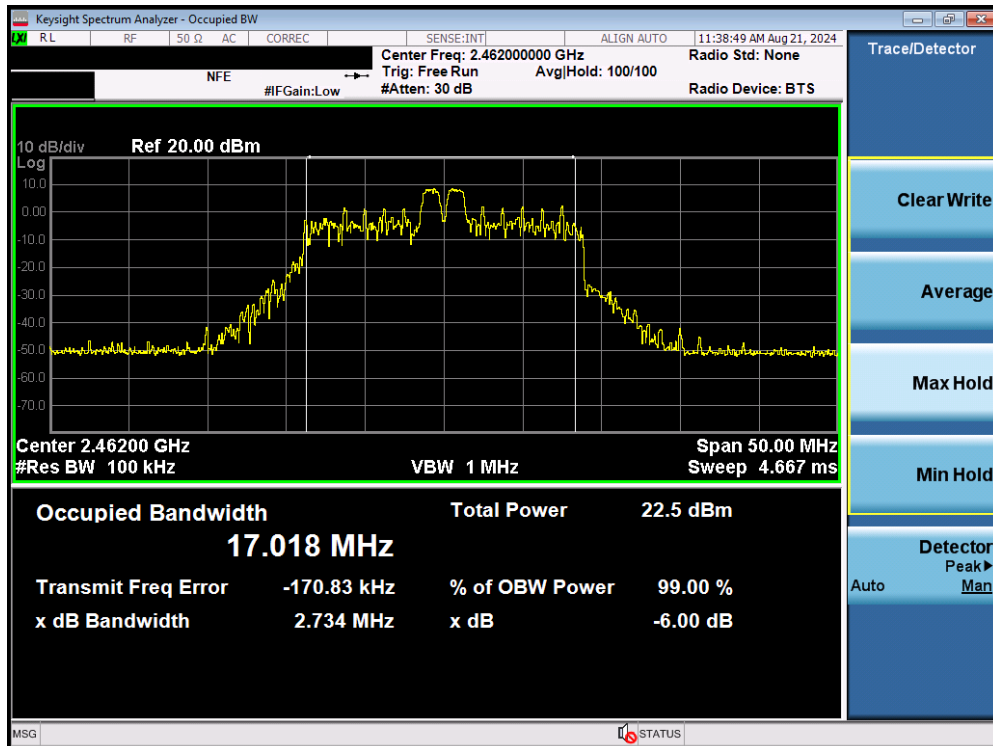


Plot 7-3. 6dB Bandwidth Plot SISO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 16 of 109

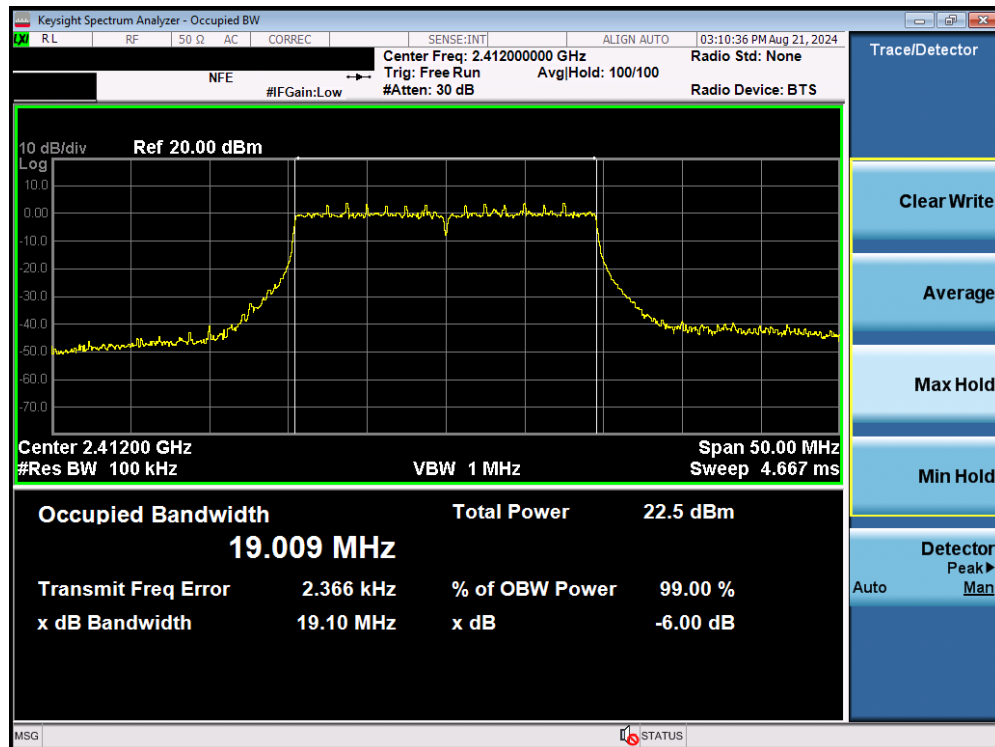


Plot 7-4. 6dB Bandwidth Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 1)

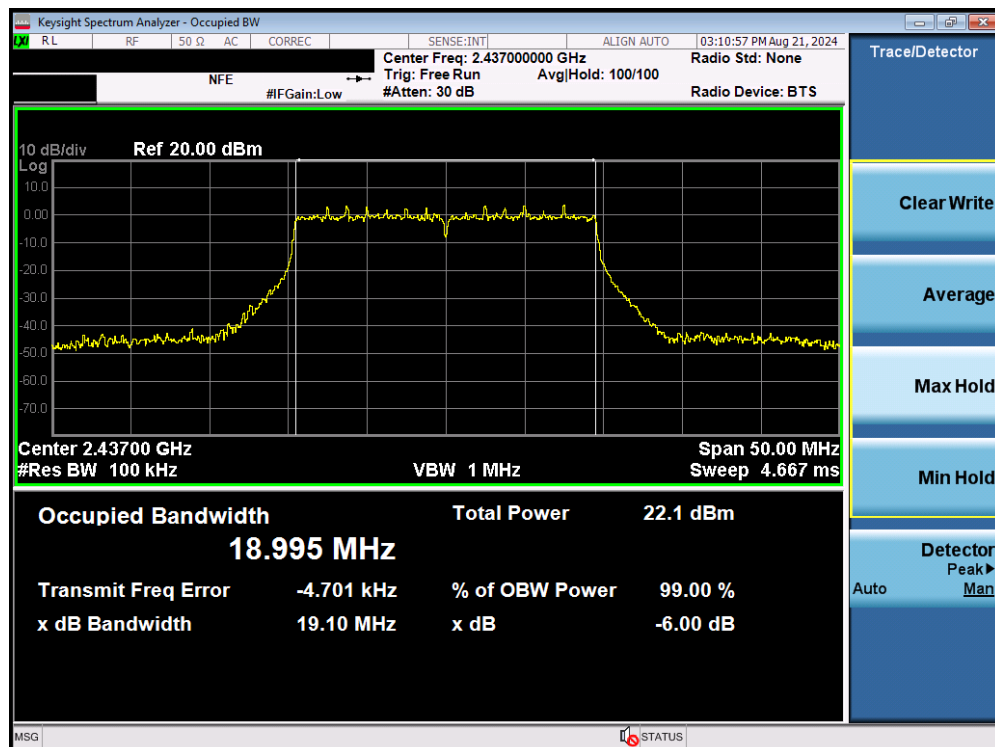

Plot 7-5. 6dB Bandwidth Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 6)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 17 of 109

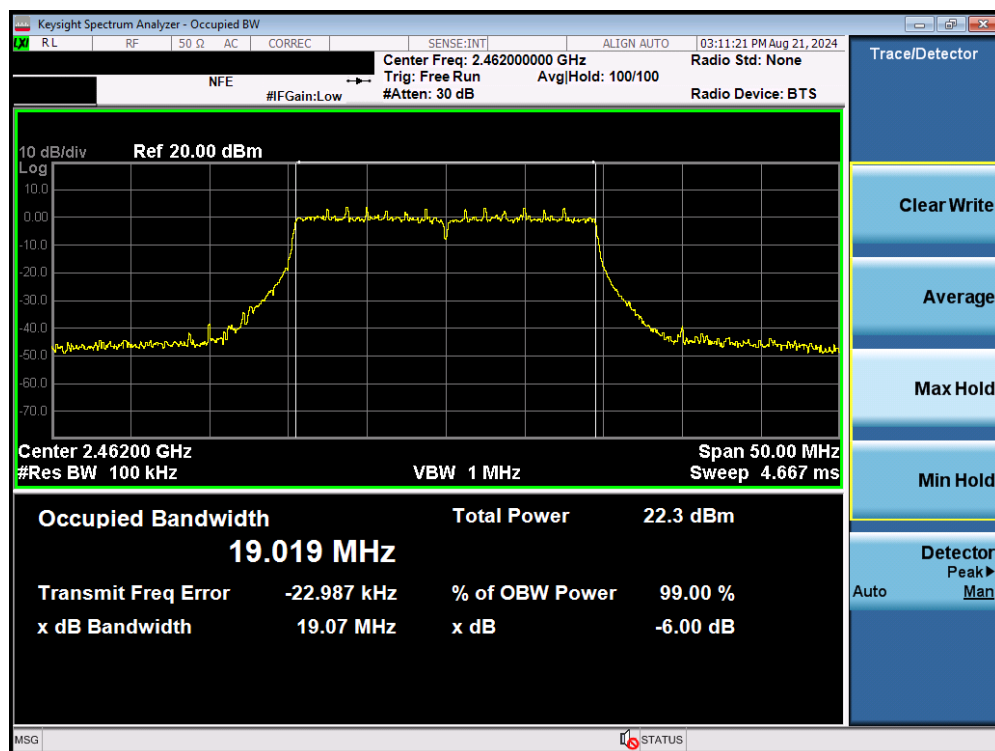


Plot 7-6. 6dB Bandwidth Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 18 of 109

7.2.2 MIMO 6dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Bandwidth [MHz]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	ax/be	26T	MCS0	2.743	2.712	0.500
2437	6	ax/be	26T	MCS0	2.722	2.737	0.500
2462	11	ax/be	26T	MCS0	2.716	2.710	0.500
2412	1	ax/be	242T	MCS0	19.10	19.10	0.500
2437	6	ax/be	242T	MCS0	19.12	19.09	0.500
2462	11	ax/be	242T	MCS0	19.10	19.08	0.500

Table 7-3. Conducted 6dB Bandwidth Measurements MIMO

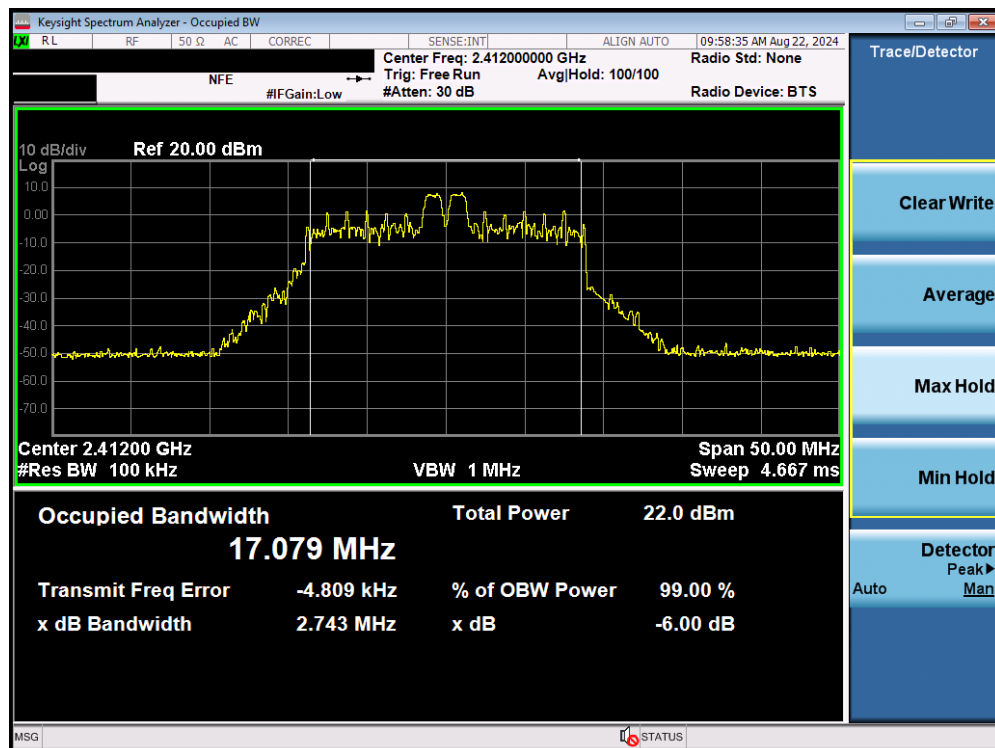


Plot 7-7. 6dB Bandwidth Plot MIMO ANT1 (802.11ax OFDMA – 26Tones – Ch. 1)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 19 of 109

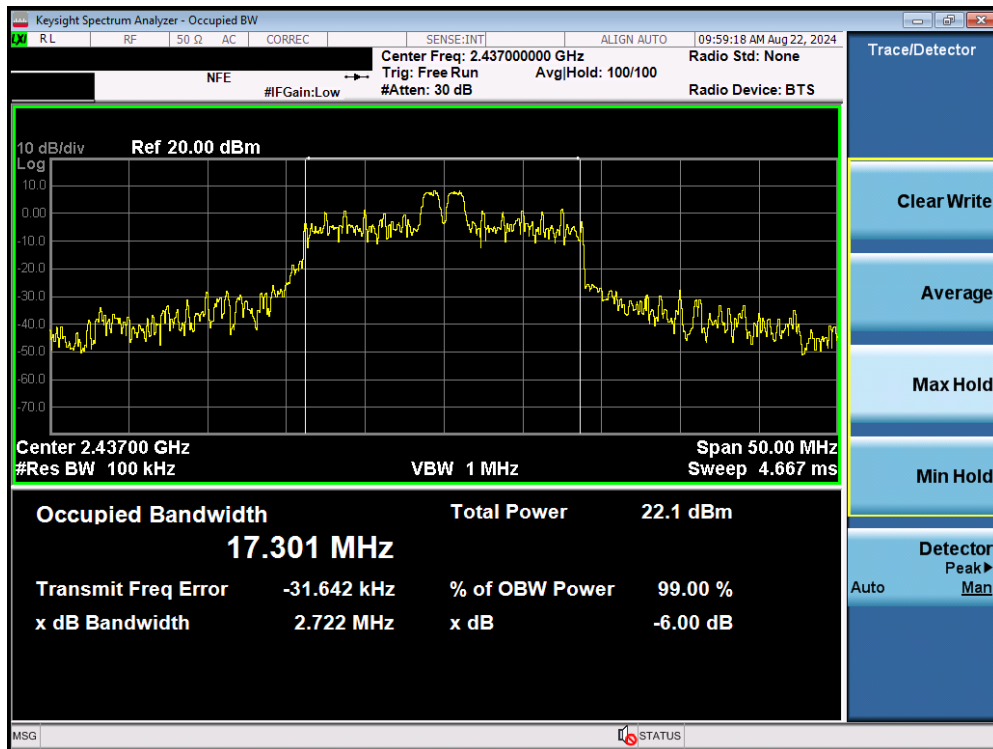


Plot 7-8. 6dB Bandwidth Plot MIMO ANT1 (802.11ax OFDMA – 26Tones – Ch. 6)

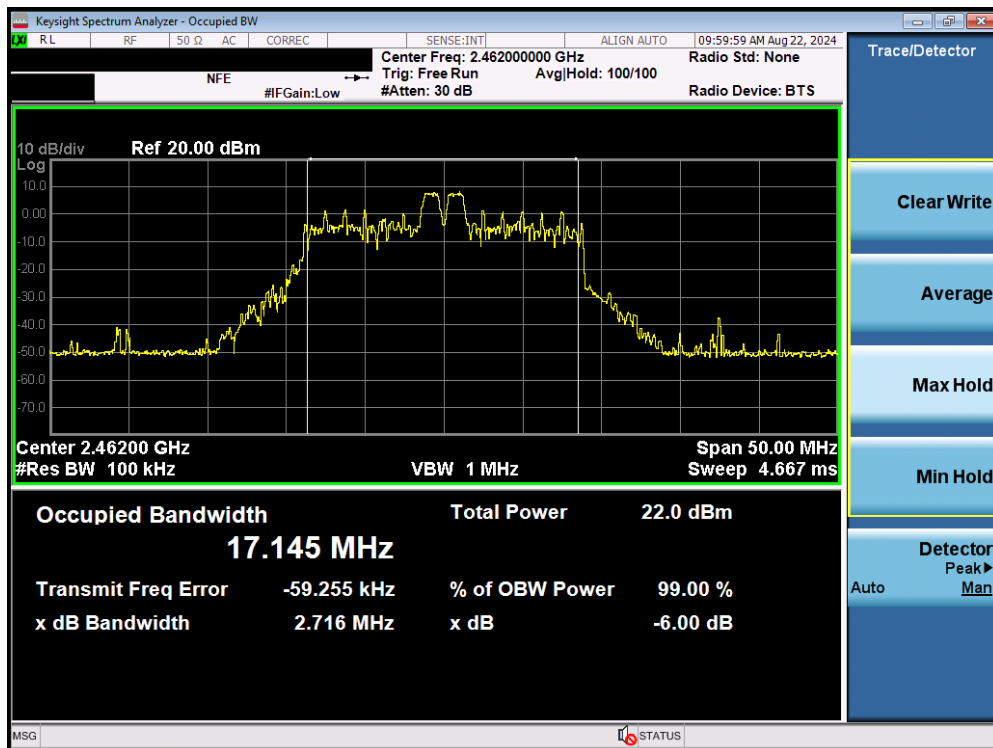


Plot 7-9. 6dB Bandwidth Plot MIMO ANT1 (802.11ax OFDMA – 26Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 20 of 109

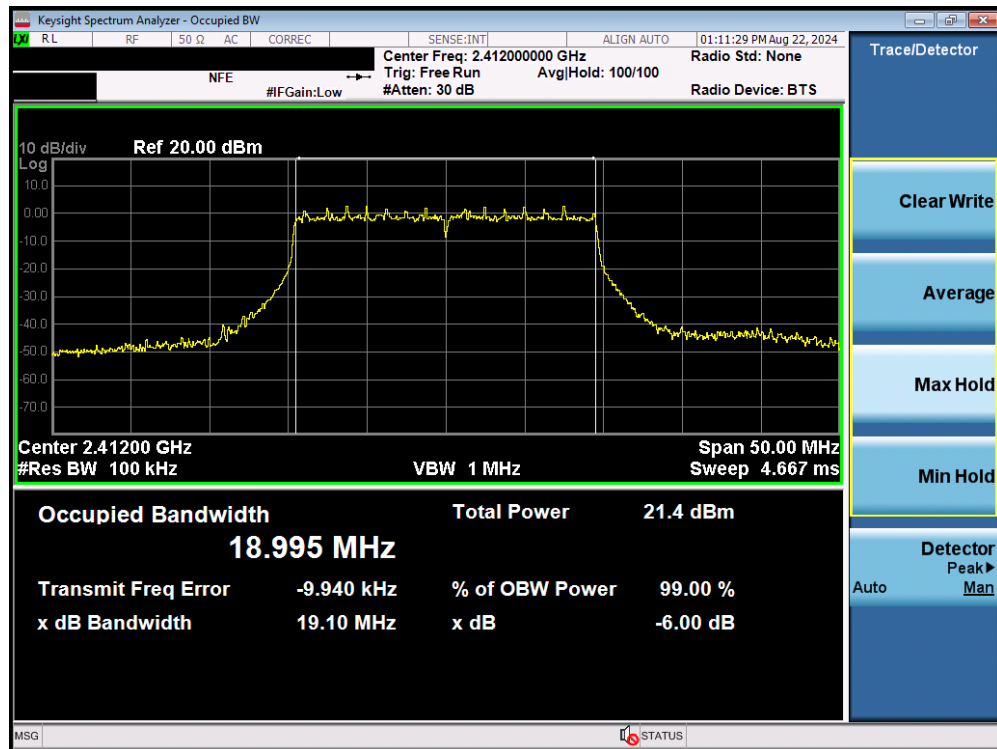


Plot 7-10. 6dB Bandwidth Plot MIMO ANT1 (802.11ax OFDMA – 242Tones – Ch. 1)

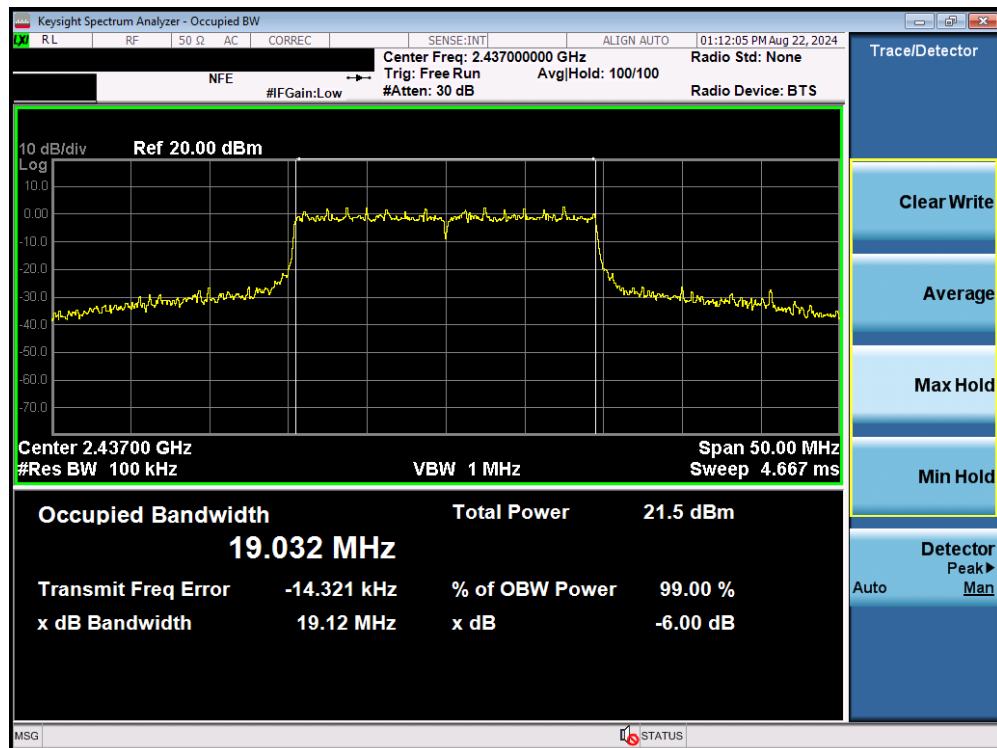

Plot 7-11. 6dB Bandwidth Plot MIMO ANT1 (802.11ax OFDMA – 242Tones – Ch. 6)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 21 of 109

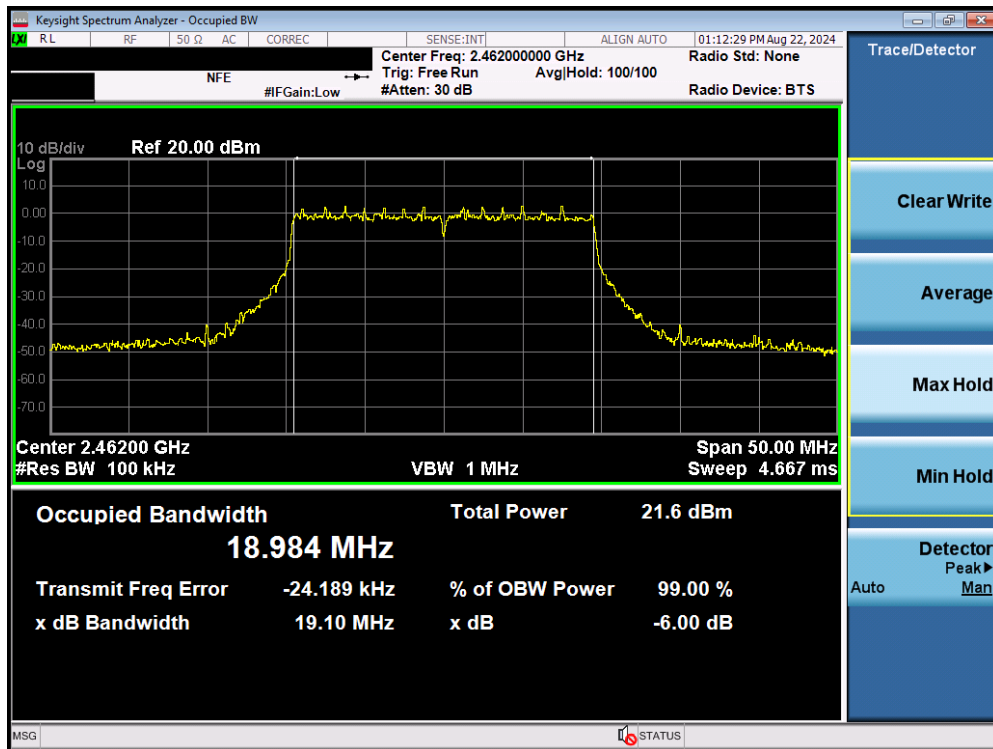


Plot 7-12. 6dB Bandwidth Plot MIMO ANT1 (802.11ax OFDMA – 242Tones – Ch. 11)




Plot 7-13. 6dB Bandwidth Plot MIMO ANT2 (802.11ax OFDMA – 26Tones – Ch. 1)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 22 of 109

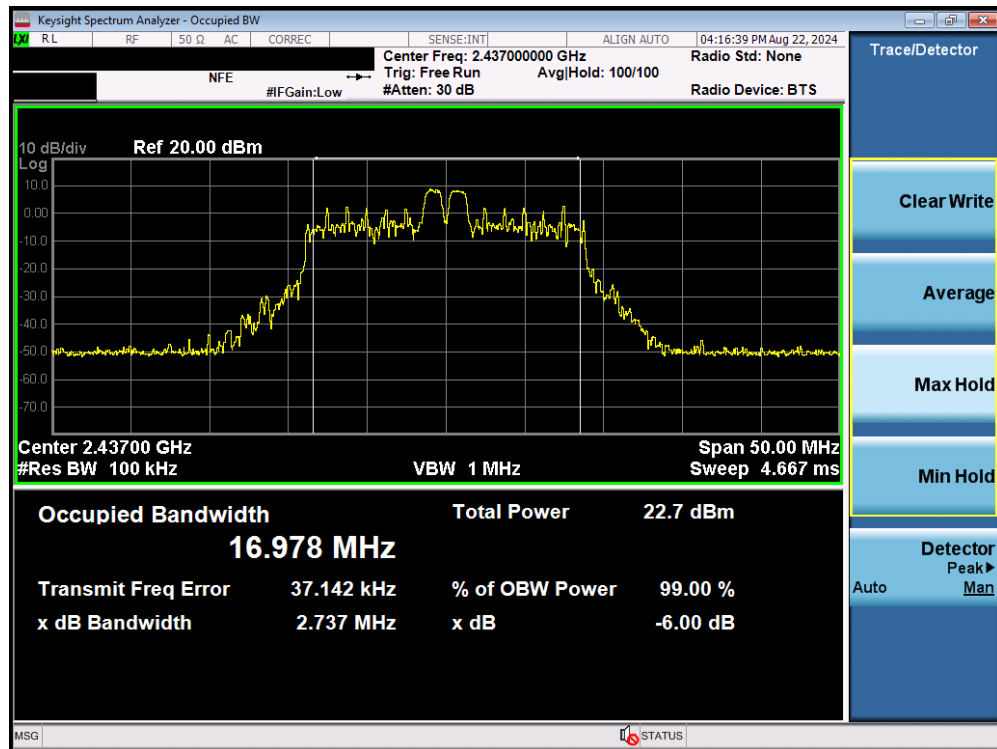


Plot 7-14. 6dB Bandwidth Plot MIMO ANT2 (802.11ax OFDMA – 26Tones – Ch. 6)

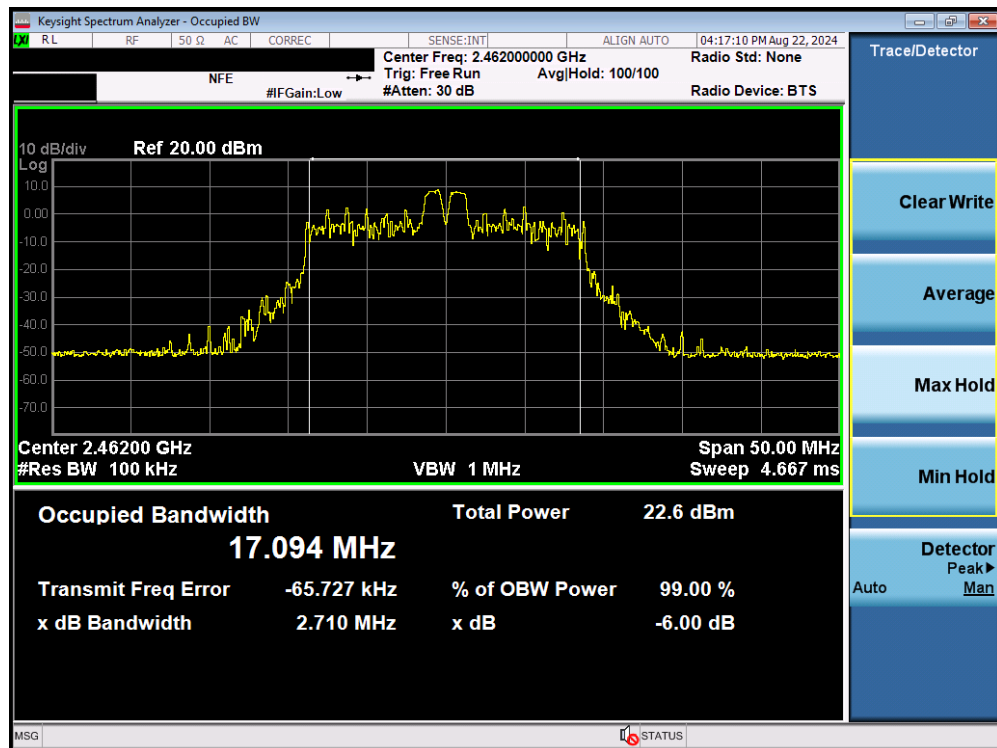


Plot 7-15. 6dB Bandwidth Plot MIMO ANT2 (802.11ax OFDMA – 26Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 23 of 109

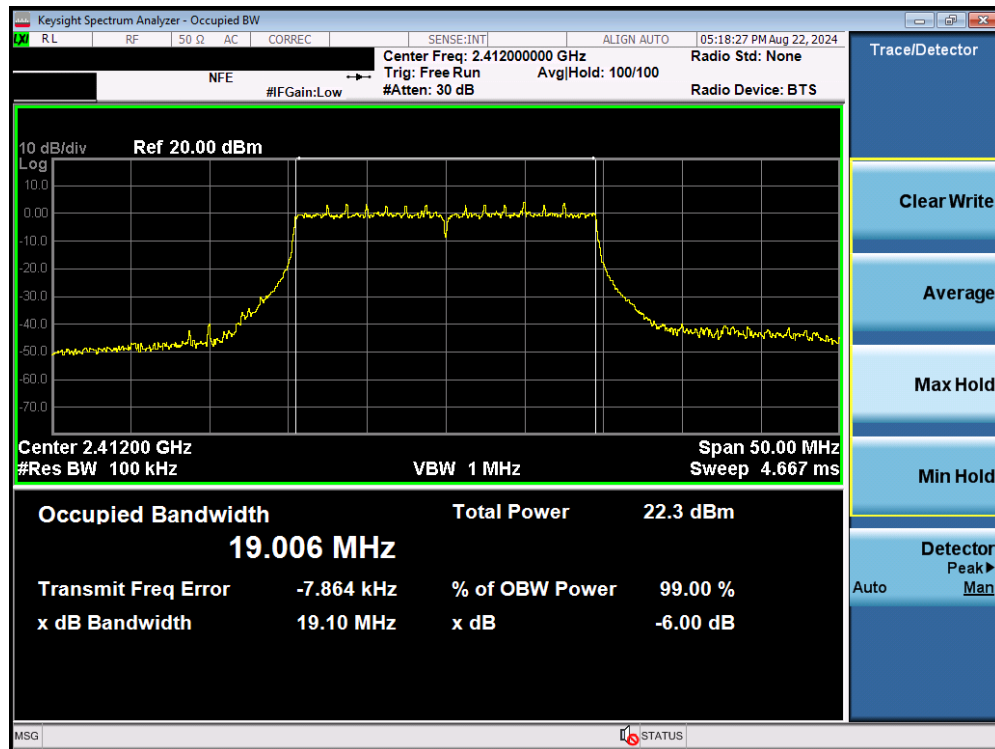


Plot 7-16. 6dB Bandwidth Plot MIMO ANT2 (802.11ax OFDMA – 242Tones – Ch. 1)

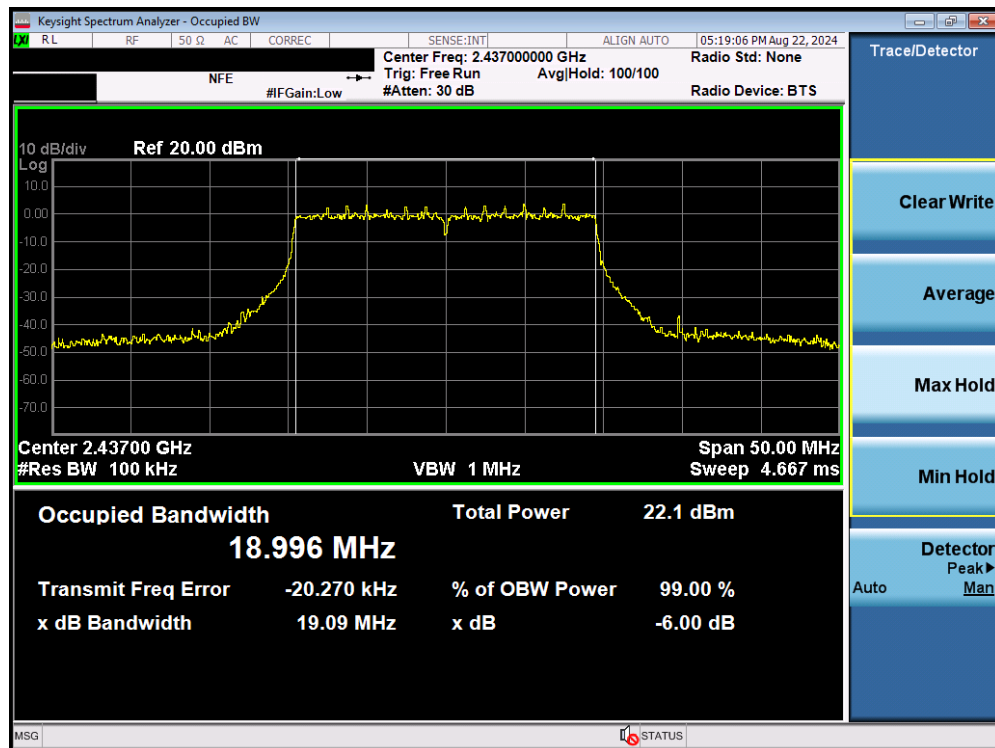

Plot 7-17. 6dB Bandwidth Plot MIMO ANT2 (802.11ax OFDMA – 242Tones – Ch. 6)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 24 of 109

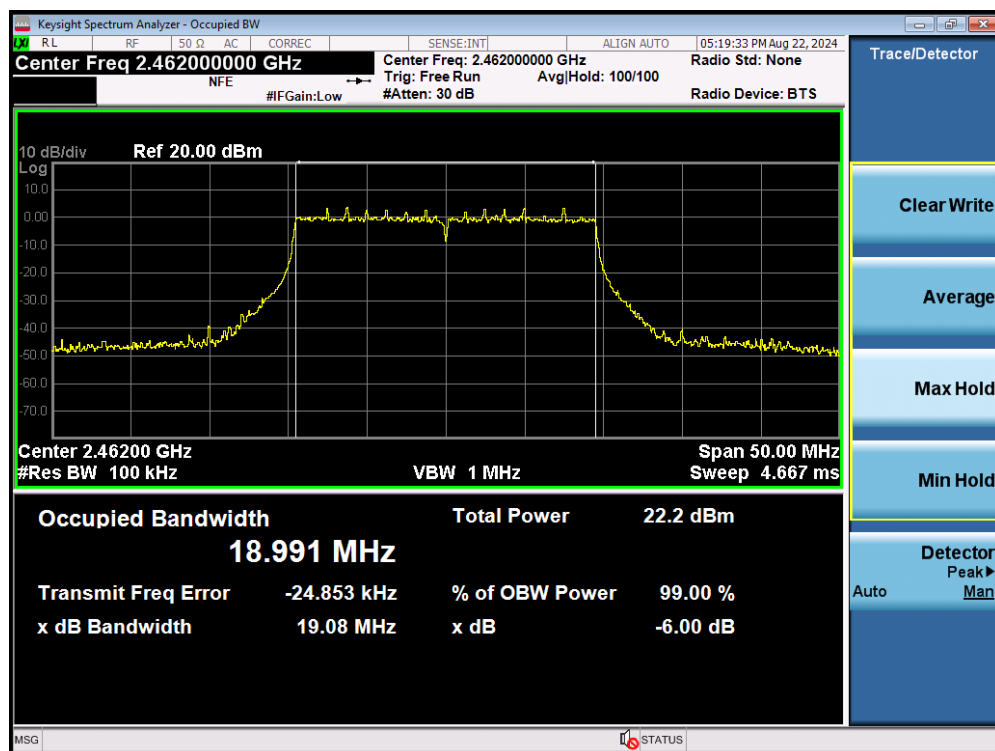

Plot 7-18. 6dB Bandwidth Plot MIMO ANT2 (802.11ax OFDMA – 242Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 25 of 109

7.3 Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt per 15.247.

Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method

ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G

ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

None.

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 26 of 109

26 Tones	Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	2412	1	26T	0	14.31	22.21	30.00	-15.69	-7.79	-2.41	11.90	36.02	-24.12
				4	14.15	22.46	30.00	-15.85	-7.54	-2.41	11.74	36.02	-24.28
				8	14.66	22.56	30.00	-15.34	-7.44	-2.41	12.25	36.02	-23.77
	2437	6	26T	0	14.48	22.34	30.00	-15.52	-7.66	-2.41	12.07	36.02	-23.95
				4	14.33	22.57	30.00	-15.67	-7.43	-2.41	11.92	36.02	-24.10
				8	14.65	22.35	30.00	-15.35	-7.65	-2.41	12.24	36.02	-23.78
	2462	11	26T	0	14.85	22.28	30.00	-15.15	-7.72	-2.41	12.44	36.02	-23.58
				4	14.63	22.35	30.00	-15.37	-7.65	-2.41	12.22	36.02	-23.80
				8	14.69	22.15	30.00	-15.31	-7.85	-2.41	12.28	36.02	-23.74
	2467	12	26T	0	3.51	11.36	30.00	-26.49	-18.64	-2.41	1.10	36.02	-34.92
				4	3.91	12.15	30.00	-26.09	-17.85	-2.41	1.50	36.02	-34.52
				8	3.98	12.47	30.00	-26.02	-17.53	-2.41	1.57	36.02	-34.45
	2472	13	26T	0	-0.32	9.37	30.00	-30.32	-20.63	-2.41	-2.73	36.02	-38.75
				4	-0.18	9.95	30.00	-30.18	-20.05	-2.41	-2.59	36.02	-38.61
				8	-0.09	9.48	30.00	-30.09	-20.52	-2.41	-2.50	36.02	-38.52

Table 7-4. Conducted Output Power Measurements SISO ANT2 (26 Tones)

52 Tones	Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	2412	1	52T	37	14.29	22.12	30.00	-15.71	-7.88	-2.41	11.88	36.02	-24.14
				38	14.19	22.05	30.00	-15.81	-7.95	-2.41	11.78	36.02	-24.24
				40	14.54	22.46	30.00	-15.46	-7.54	-2.41	12.13	36.02	-23.89
	2437	6	52T	37	14.41	22.36	30.00	-15.59	-7.64	-2.41	12.00	36.02	-24.02
				38	14.43	22.29	30.00	-15.57	-7.71	-2.41	12.02	36.02	-24.00
				40	14.67	22.46	30.00	-15.33	-7.54	-2.41	12.26	36.02	-23.76
	2462	11	52T	37	14.71	22.50	30.00	-15.29	-7.50	-2.41	12.30	36.02	-23.72
				38	14.95	22.51	30.00	-15.05	-7.49	-2.41	12.54	36.02	-23.48
				40	14.81	22.34	30.00	-15.19	-7.66	-2.41	12.40	36.02	-23.62
	2467	12	52T	37	3.44	11.64	30.00	-26.56	-18.36	-2.41	1.03	36.02	-34.99
				38	3.71	11.75	30.00	-26.29	-18.25	-2.41	1.30	36.02	-34.72
				40	3.68	11.84	30.00	-26.32	-18.16	-2.41	1.27	36.02	-34.75
	2472	13	52T	37	-0.34	9.32	30.00	-30.34	-20.68	-2.41	-2.75	36.02	-38.77
				38	-0.22	9.11	30.00	-30.22	-20.89	-2.41	-2.63	36.02	-38.65
				40	-0.39	9.56	30.00	-30.39	-20.44	-2.41	-2.80	36.02	-38.82

Table 7-5. Conducted Output Power Measurements SISO ANT2 (52 Tones)

106 Tones	Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	2412	1	106T	53	14.22	22.35	30.00	-15.78	-7.65	-2.41	11.81	36.02	-24.21
				54	14.39	22.39	30.00	-15.61	-7.61	-2.41	11.98	36.02	-24.04
				55	14.38	22.41	30.00	-15.62	-7.59	-2.41	11.97	36.02	-24.05
	2437	6	106T	53	14.47	22.32	30.00	-15.53	-7.68	-2.41	12.06	36.02	-23.96
				54	14.51	22.44	30.00	-15.49	-7.56	-2.41	12.10	36.02	-23.92
				55	14.68	22.54	30.00	-15.32	-7.46	-2.41	12.27	36.02	-23.75
	2462	11	106T	53	3.85	12.41	30.00	-26.15	-17.59	-2.41	1.44	36.02	-34.58
				54	3.75	12.43	30.00	-26.25	-17.57	-2.41	1.34	36.02	-34.68
				55	-0.03	9.64	30.00	-30.03	-20.36	-2.41	-2.44	36.02	-38.46
	2472	13	106T	53	-0.25	9.82	30.00	-30.25	-20.18	-2.41	-2.66	36.02	-38.68
				54	-0.25	9.82	30.00	-30.25	-20.18	-2.41	-2.66	36.02	-38.68
				55	-0.25	9.82	30.00	-30.25	-20.18	-2.41	-2.66	36.02	-38.68

Table 7-6. Conducted Output Power Measurements SISO ANT2 (106 Tones)

242 Tones	Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	2412	1	242T	61	15.28	23.42	30.00	-14.72	-6.58	-2.41	12.87	36.02	-23.15
	2437	6	242T	61	15.31	23.34	30.00	-14.69	-6.66	-2.41	12.90	36.02	-23.12
	2462	11	242T	61	15.37	23.38	30.00	-14.63	-6.62	-2.41	12.96	36.02	-23.06
	2467	12	242T	61	3.98	12.72	30.00	-26.02	-17.28	-2.41	1.57	36.02	-34.45
	2472	13	242T	61	-0.14	10.28	30.00	-30.14	-19.72	-2.41	-2.55	36.02	-38.57

Table 7-7. Conducted Output Power Measurements SISO ANT2 (242 Tones)

52+26 Tones	Freq [MHz]	Channel	Tones	MRU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	2412	1	52+26T	70	14.81	22.24	30.00	-15.19	-7.76	-2.41	12.40	36.02	-23.62
				71	14.87	22.51	30.00	-15.13	-7.49	-2.41	12.46	36.02	-23.56
				72	14.93	22.35	30.00	-15.07	-7.65	-2.41	12.52	36.02	-23.50
	2437	6	52+26T	70	14.97	22.21	30.00	-15.03	-7.79	-2.41	12.56	36.02	-23.46
				71	14.85	22.38	30.00	-15.15	-7.62	-2.41	12.44	36.02	-23.58
				72	14.94	22.58	30.00	-15.06	-7.42	-2.41	12.53	36.02	-23.49
	2462	11	52+26T	70	14.99	22.56	30.00	-15.01	-7.44	-2.41	12.58	36.02	-23.44
				71	14.85	22.45	30.00	-15.15	-7.55	-2.41	12.44	36.02	-23.58
				72	14.75	22.38	30.00	-15.25	-7.62	-2.41	12.34	36.02	-23.68
	2467	12	52+26T	70	3.82	11.84	30.00	-26.18	-18.16	-2.41	1.41	36.02	-34.61
				71	3.67	11.88	30.00	-26.33	-18.12	-2.41	1.26	36.02	-34.76
				72	3.95	11.98	30.00	-26.05	-18.02	-2.41	1.54	36.02	-34.48
	2472	13	52+26T	70	-0.13	11.61	30.00	-30.13	-18.39	-2.41	-2.54	36.02	-38.56
				71	-0.38	11.26	30.00	-30.38	-18.74	-2.41	-2.79	36.02	-38.81
				72	-0.11	11.72	30.00	-30.11	-18.28	-2.41	-2.52	36.02	-38.54

Table 7-8. Conducted Output Power Measurements SISO ANT2 (52+26 Tones)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 27 of 109

106+26 Tones	Freq [MHz]	Channel	Tones	MRU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	2412	1	106+26T	82	14.69	22.36	30.00	-15.31	-7.64	-2.41	12.28	36.02	-23.74
				83	14.96	22.92	30.00	-15.04	-7.08	-2.41	12.55	36.02	-23.47
	2437	6	106+26T	82	14.91	22.57	30.00	-15.09	-7.43	-2.41	12.50	36.02	-23.52
				83	13.95	22.81	30.00	-16.05	-7.19	-2.41	11.54	36.02	-24.48
	2462	11	106+26T	82	14.98	22.84	30.00	-15.02	-7.16	-2.41	12.57	36.02	-23.45
				83	14.72	22.50	30.00	-15.28	-7.50	-2.41	12.31	36.02	-23.71
	2467	12	106+26T	82	3.86	12.36	30.00	-26.14	-17.64	-2.41	1.45	36.02	-34.57
				83	3.75	12.64	30.00	-26.25	-17.36	-2.41	1.34	36.02	-34.68
	2472	13	106+26T	82	-0.12	9.49	30.00	-30.12	-20.51	-2.41	-2.53	36.02	-38.55
				83	-0.09	9.88	30.00	-30.09	-20.12	-2.41	-2.50	36.02	-38.52

Table 7-9. Conducted Output Power Measurements SISO ANT2 (106+26 Tones)

Freq [MHz]	Channel	Tones	RU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
2412	1	26T	0	14.45	21.85	14.14	21.68	17.31	24.78	30.00	-12.69	-5.22	0.73	18.04	36.02	-17.98
			4	14.34	22.19	14.19	22.16	17.28	25.19	30.00	-12.72	-4.81	0.73	18.01	36.02	-18.01
			8	14.58	22.07	14.51	21.85	17.56	24.97	30.00	-12.44	-5.03	0.73	18.29	36.02	-17.73
			0	14.31	22.24	14.88	22.56	17.61	25.41	30.00	-12.39	-4.59	0.73	18.35	36.02	-17.67
2437	6	26T	4	14.12	22.46	14.67	22.55	17.41	25.52	30.00	-12.59	-4.48	0.73	18.15	36.02	-17.87
			8	14.34	22.33	14.98	22.34	17.68	25.35	30.00	-12.32	-4.65	0.73	18.41	36.02	-17.61
			0	14.29	21.71	14.82	22.21	17.57	24.98	30.00	-12.43	-5.02	0.73	18.30	36.02	-17.72
			4	14.02	21.94	14.64	22.52	17.35	25.25	30.00	-12.65	-4.75	0.73	18.08	36.02	-17.94
2462	11	26T	8	13.86	21.25	14.71	22.21	17.32	24.77	30.00	-12.68	-5.23	0.73	18.05	36.02	-17.97
			0	3.22	11.01	3.64	11.27	6.45	14.15	30.00	-23.55	-15.85	0.73	7.18	36.02	-28.84
			4	2.92	11.49	3.76	12.23	6.37	14.89	30.00	-23.63	-15.11	0.73	7.10	36.02	-28.92
			8	2.42	10.62	3.96	11.88	6.27	14.31	30.00	-23.73	-15.69	0.73	7.00	36.02	-29.02
2467	12	26T	0	-0.91	8.35	-0.37	9.36	2.38	11.89	30.00	-27.62	-18.11	0.73	3.11	36.02	-32.91
			4	-1.04	9.62	-0.24	9.94	2.39	12.79	30.00	-27.61	-17.21	0.73	3.12	36.02	-32.90
			8	-1.22	9.17	-0.22	9.51	2.32	12.35	30.00	-27.68	-17.65	0.73	3.05	36.02	-32.97

Table 7-10. Conducted Output Power Measurements MIMO (26 Tones)

Freq [MHz]	Channel	Tones	RU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin	Peak Conducted Power Margin	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
2412	1	52T	37	14.58	21.85	17.24	24.58	30.00	-12.76	-5.42	0.73	17.97	36.02	-18.05		
			38	13.84	21.26	14.68	22.02	17.28	24.76	30.00	-12.72	-5.24	0.73	18.01	36.02	-18.01
			40	13.83	21.74	14.86	22.49	17.39	25.14	30.00	-12.61	-4.86	0.73	18.12	36.02	-17.90
2437	6	52T	37	14.28	22.36	14.98	22.97	17.65	25.69	30.00	-12.35	-4.31	0.73	18.39	36.02	-17.63
			38	13.82	21.36	14.82	22.49	17.36	24.97	30.00	-12.64	-5.03	0.73	18.09	36.02	-17.93
			40	14.24	22.37	14.99	22.98	17.64	25.70	30.00	-12.36	-4.30	0.73	18.37	36.02	-17.65
2462	11	52T	37	14.58	21.98	14.97	22.23	17.79	25.12	30.00	-12.21	-4.88	0.73	18.52	36.02	-17.50
			38	14.27	21.96	14.87	22.54	17.59	25.27	30.00	-12.41	-4.73	0.73	18.32	36.02	-17.70
			40	13.87	21.67	14.61	22.29	17.27	25.00	30.00	-12.73	-5.00	0.73	18.00	36.02	-18.02
2467	12	52T	37	3.11	11.13	3.54	11.51	6.34	14.33	30.00	-23.66	-15.67	0.73	7.07	36.02	-28.95
			38	2.78	10.84	3.71	11.74	6.28	14.32	30.00	-23.72	-15.68	0.73	7.01	36.02	-29.01
			40	2.51	10.67	3.61	11.58	6.11	14.16	30.00	-23.89	-15.84	0.73	6.84	36.02	-29.18
2472	13	52T	37	-1.12	8.79	-0.33	9.16	2.30	11.99	30.00	-27.70	-18.01	0.73	3.03	36.02	-32.99
			38	-1.06	9.25	-0.28	9.04	2.36	12.16	30.00	-27.64	-17.84	0.73	3.09	36.02	-32.93
			40	-1.31	8.43	-0.41	9.41	2.17	11.96	30.00	-27.83	-18.04	0.73	2.90	36.02	-33.12

Table 7-11. Conducted Output Power Measurements MIMO (52 Tones)

Freq [MHz]	Channel	Tones	RU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
2412	1	106T	53	13.82	21.68	14.67	22.16	17.28	24.94	30.00	-12.72	-5.06	0.73	18.01	36.02	-18.01
			54	13.84	22.08	14.83	22.65	17.37	25.38	30.00	-12.63	-4.62	0.73	18.10	36.02	-17.92
2437	6	106T	53	14.23	22.42	14.98	22.98	17.63	25.72	30.00	-12.37	-4.28	0.73	18.36	36.02	-17.66
			54	13.87	22.02	14.88	22.54	17.41	25.30	30.00	-12.59	-4.70	0.73	18.15	36.02	-17.87
2462	11	106T	53	14.42	22.08	14.97	22.46	17.71	25.28	30.00	-12.29	-4.72	0.73	18.45	36.02	-17.57
			54	13.92	21.97	14.64	22.57	17.31	25.29	30.00	-12.69	-4.71	0.73	18.04	36.02	-17.98
2467	12	106T	53	3.02	11.17	3.82	11.89	6.45	14.56	30.00	-23.55	-15.44	0.73	7.18	36.02	-28.84
			54	2.78	11.01	3.67	11.86	6.26	14.47	30.00	-23.74	-15.53	0.73	6.99	36.02	-29.03
2472	13	106T	53	-0.82	8.67	-0.12	9.28	2.55	12.00	30.00	-27.45	-18.00	0.73	3.29	36.02	-32.73
			54	-1.12	8.85	-0.36	9.79	2.29	12.36	30.00	-27.71	-17.64	0.73	3.02	36.02	-33.00

Table 7-12. Conducted Output Power Measurements MIMO (106 Tones)

Freq [MHz]	Channel	Tones	RU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
2412	1	106T	53	13.82	21.68	14.67	22.16	17.28	24.94	30.00	-12.72	-5.06	0.73	18.01	36.02	-18.01
			54	13.84	22.08	14.83	22.65	17.37	25.38	30.00	-12.63	-4.62	0.73	18.10	36.02	-17.92
2437	6	106T	53	14.23	22.42	14.98	22.98	17.63	25.72	30.00	-12.37	-4.28	0.73	18.36	36.02	-17.66
			54	13.87	22.02	14.88	22.54	17.41	25.30	30.00	-12.59	-4.70	0.73	18.15	36.02	-17.87
2462	11	106T	53	14.42	22.08	14.97	22.46	17.71	25.28	30.00	-12.29	-4.72	0.73	18.45	36.02	-17.57
			54	13.92	21.97	14.64	22.57	17.31	25.29	30.00	-12.69	-5.41	0.73	18.04	36.02	-17.98
2467	12	106T	53	3.02	11.17	3.82	11.89	6.45	14.56	30.00	-23.55	-14.44	0.73	7.18	36.02	-28.84
			54	2.78	11.01	3.67	11.36	14.41	6.26	14.67	30.00	-23.74	-15.67	0.73	6.93	36.02
2472	13	106T	53	-0.82	8.67	-0.12	9.28	2.55	12.00	30.00	-27.45	-18.00	0.73	3.29	36.02	-32.73
			54	-1.12	8.85	-0.36	9.79	2.29	12.36	30.00	-27.71	-17.64	0.73	3.02	36.02	-33.00

Freq [MHz]	Channel	Tones	MRU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
2412	1	106+26T	82	13.89	21.87	14.72	22.62	17.34	25.27	30.00	-12.66	-4.73	0.73	18.07	36.02	-17.95
			83	13.78	21.69	14.84	22.74	17.35	25.26	30.00	-12.65	-4.74	0.73	18.08	36.02	-17.94
2437	6	106+26T	82	14.07	22.49	14.98	22.97	17.56	25.75	30.00	-12.44	-4.25	0.73	18.29	36.02	-17.73
			83	14.02	22.45	14.84	22.76	17.46	25.62	30.00	-12.54	-4.38	0.73	18.19	36.02	-17.83
2462	11	106+26T	82	14.35	22.26	14.96	22.83	17.68	25.56	30.00	-12.32	-4.44	0.73	18.41	36.02	-17.61
			83	13.93	21.95	14.68	22.61	17.33	25.30	30.00	-12.67	-4.70	0.73	18.06	36.02	-17.96
2467	12	106+26T	82	2.84	11.32	3.73	12.32	6.32	14.86	30.00	-23.68	-15.14	0.73	7.05	36.02	-28.97
			83	2.95	11.67	3.87	12.66	6.44	15.20	30.00	-23.56	-14.80	0.73	7.18	36.02	-28.84
2472	13	106+26T	82	-0.84	8.51	-0.14	9.38	2.53	11.98	30.00	-27.47	-18.02	0.73	3.27	36.02	-32.75
			83	-0.98	8.78	-0.15	9.93	2.47	12.40	30.00	-27.53	-17.60	0.73	3.20	36.02	-32.82

Table 7-15. Conducted Output Power Measurements MIMO (106+26 Tones)

Note:

Per ANSI C63.10-2013 Section 14.2, the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted output power was measured to be 14.45 dBm for Antenna 1 and 14.14 dBm for Antenna 2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(14.45 \text{ dBm} + 14.14 \text{ dBm}) = (27.86 \text{ mW} + 25.94 \text{ mW}) = 53.80 \text{ mW} = 17.31 \text{ dBm}$$

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 29 of 109

7.4 Power Spectral Density

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tones configurations, and RU indices were investigated and the worst-case configuration results are reported in this section.

The maximum permissible power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD

ANSI C63.10-2013 – Section 14.3.1 Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes


1. Based on preliminary measurements, it was determined that, of all of the tone configurations, the 26T configuration produced the worst case power spectral density measurement for partial loaded case. Therefore, only the 26 Tone configuration and 242 Tone data is included in this section.
2. The power spectral density for each channel was measured with the RU index showing the highest conducted power.

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 30 of 109

7.4.1 SISO Antenna-2 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	ax/be	26T	MCS0	1.82	8.00	-6.18	Pass
2437	6	ax/be	26T	MCS0	1.61	8.00	-6.39	Pass
2462	11	ax/be	26T	MCS0	1.48	8.00	-6.52	Pass
2412	1	ax/be	242T	MCS0	-5.63	8.00	-13.63	Pass
2437	6	ax/be	242T	MCS0	-5.62	8.00	-13.62	Pass
2462	11	ax/be	242T	MCS0	-5.45	8.00	-13.45	Pass

Table 7-16. Conducted Power Spectral Density Measurements SISO ANT2

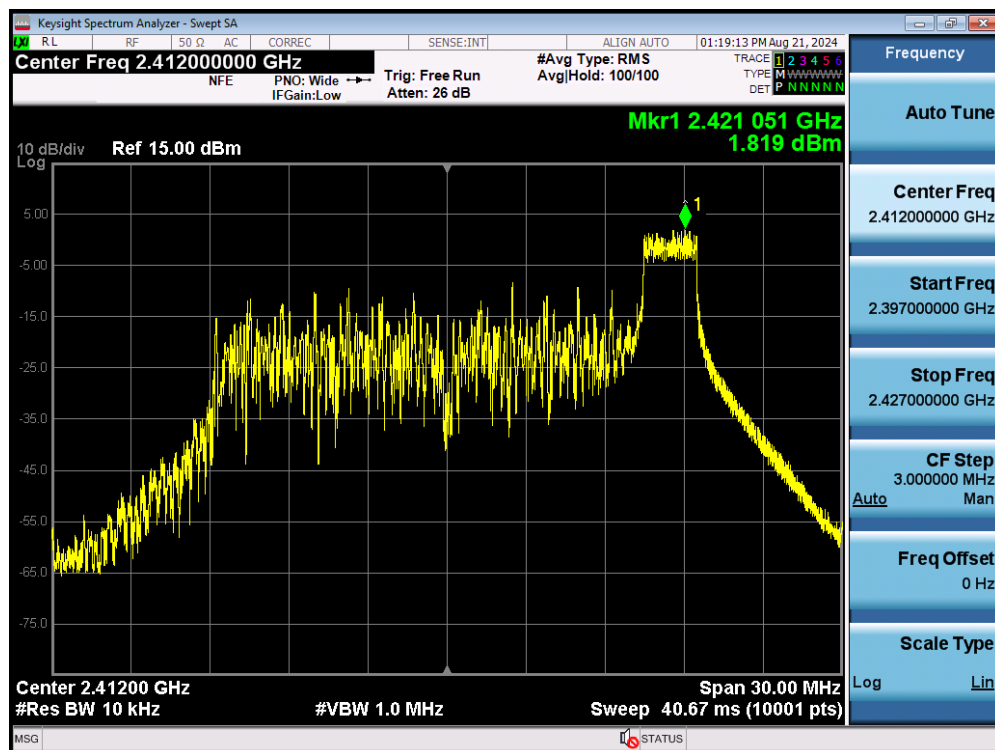


Plot 7-19. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 1)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 31 of 109

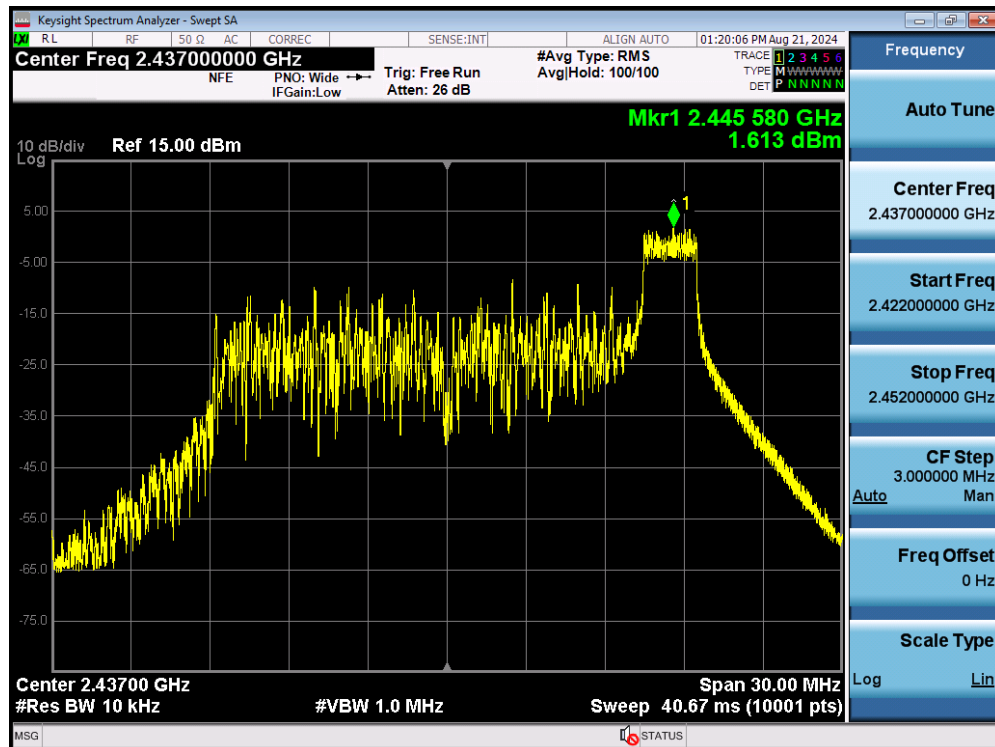


Plot 7-20. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 6)

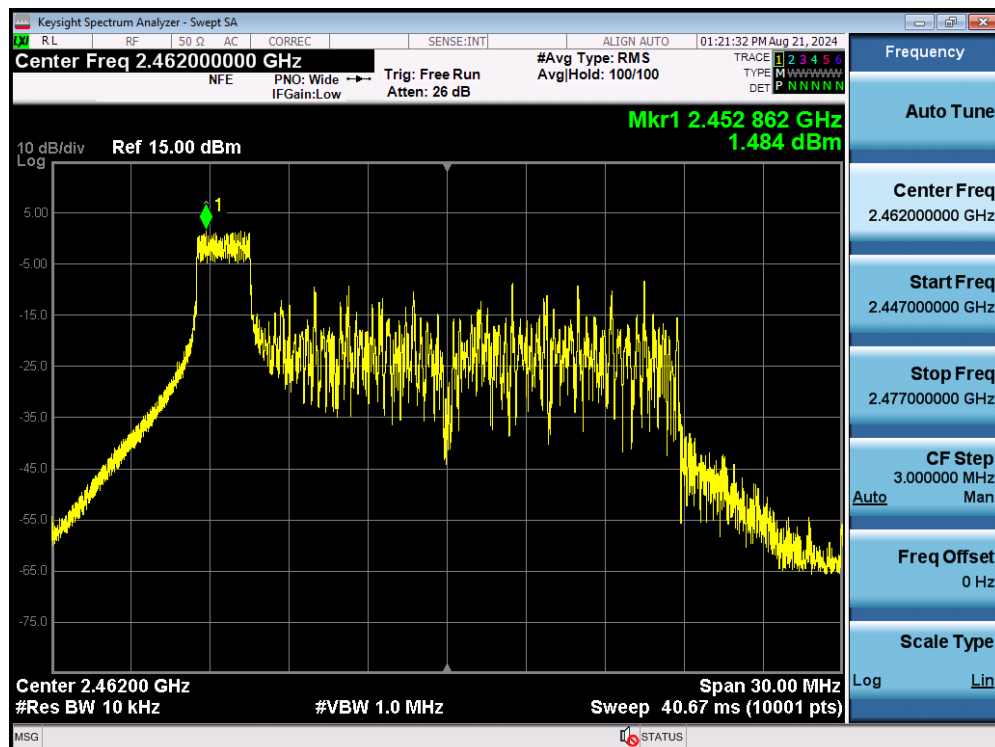


Plot 7-21. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 32 of 109

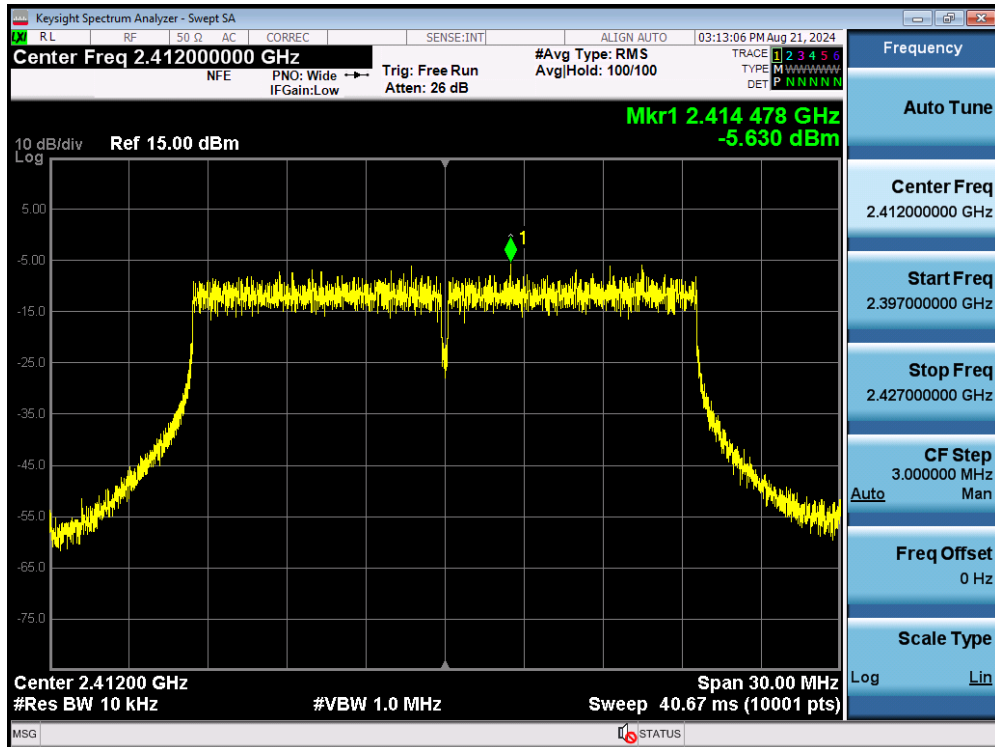


Plot 7-22. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 1)

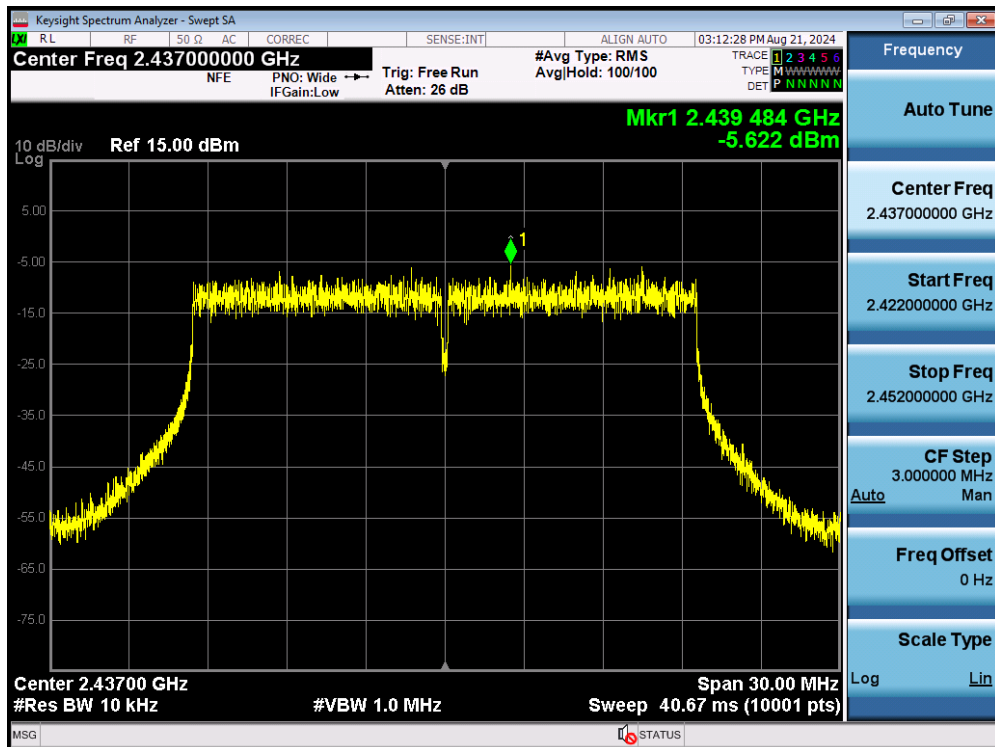

Plot 7-23. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 6)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 33 of 109

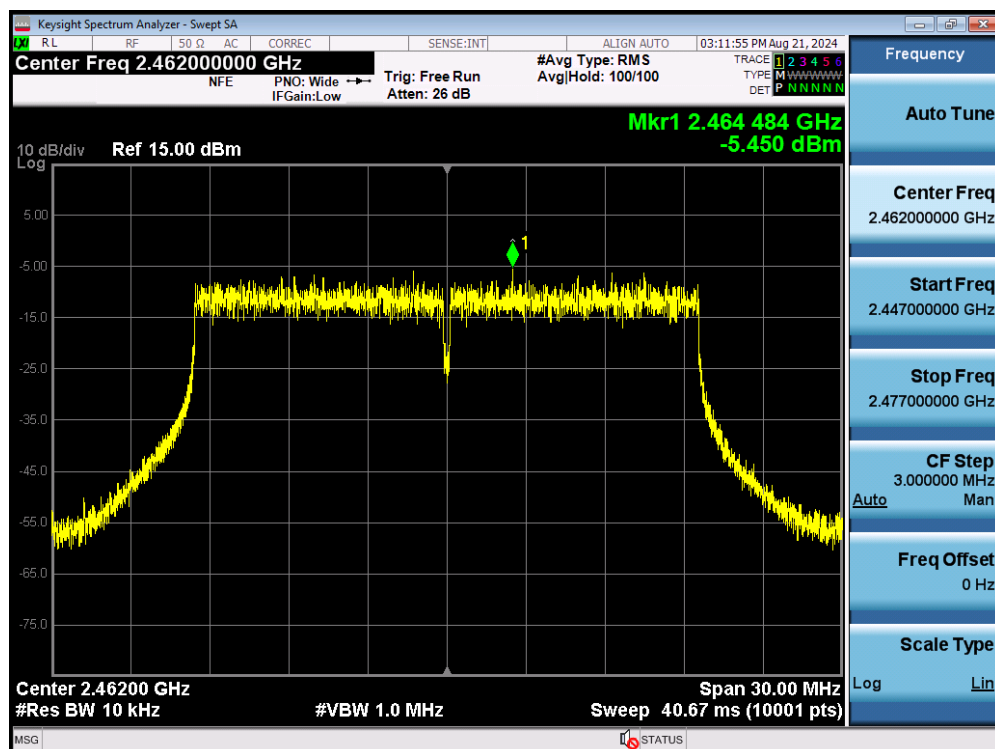


Plot 7-24. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 34 of 109

7.4.2 MIMO Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	ANT 1 Power Spectral Density [dBm]	ANT 2 Power Spectral Density [dBm]	Summed MIMO Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	ax/be	26T	MCS0	0.32	1.82	4.15	8.00	-3.85	Pass
2437	6	ax/be	26T	MCS0	0.57	1.57	4.11	8.00	-3.89	Pass
2462	11	ax/be	26T	MCS0	0.61	1.15	3.90	8.00	-4.10	Pass
2412	1	ax/be	242T	MCS0	-6.25	-4.84	-2.47	8.00	-10.47	Pass
2437	6	ax/be	242T	MCS0	-6.09	-4.75	-2.36	8.00	-10.36	Pass
2462	11	ax/be	242T	MCS0	-5.88	-4.80	-2.30	8.00	-10.30	Pass

Table 7-17. Conducted Power Spectral Density Measurements MIMO

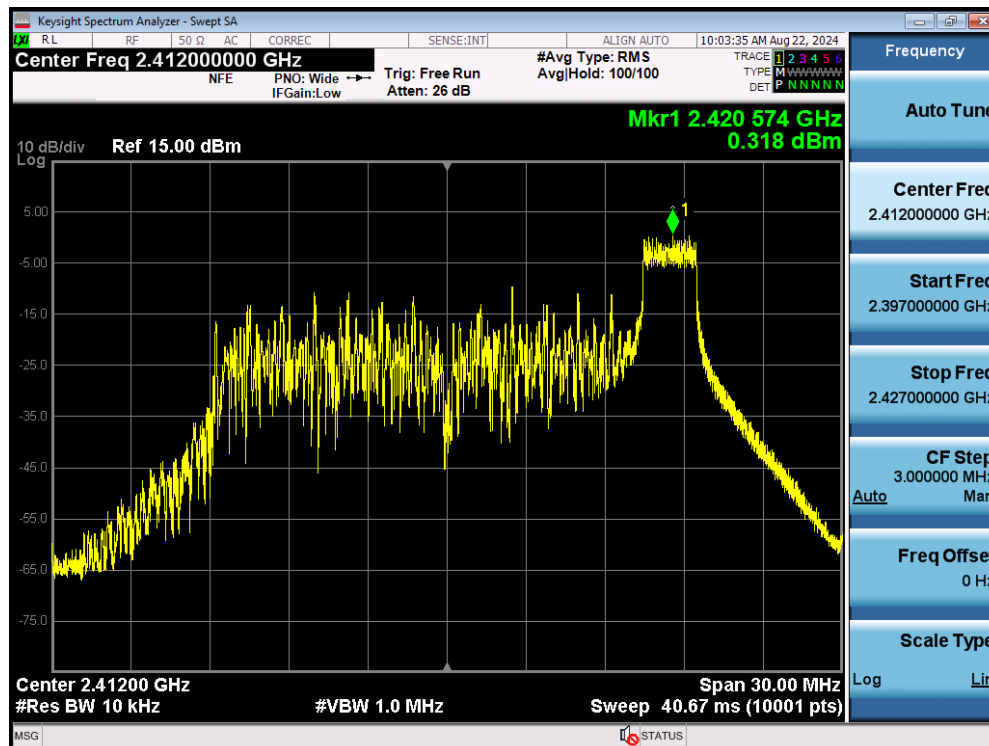


Plot 7-25. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 1)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 35 of 109

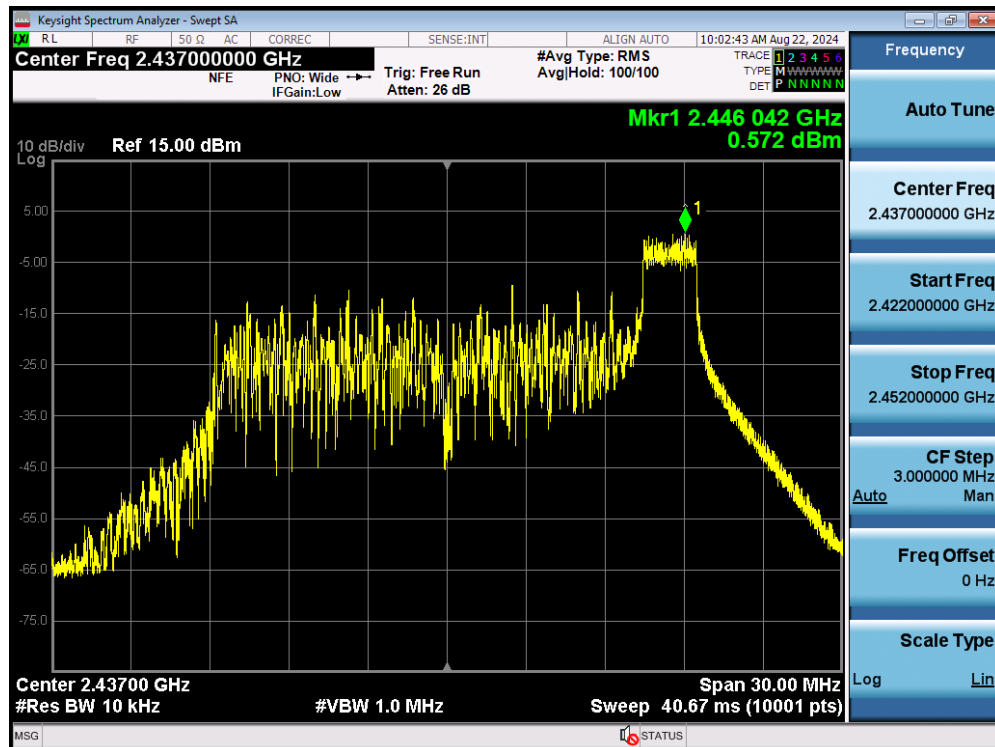


Plot 7-26. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 6)

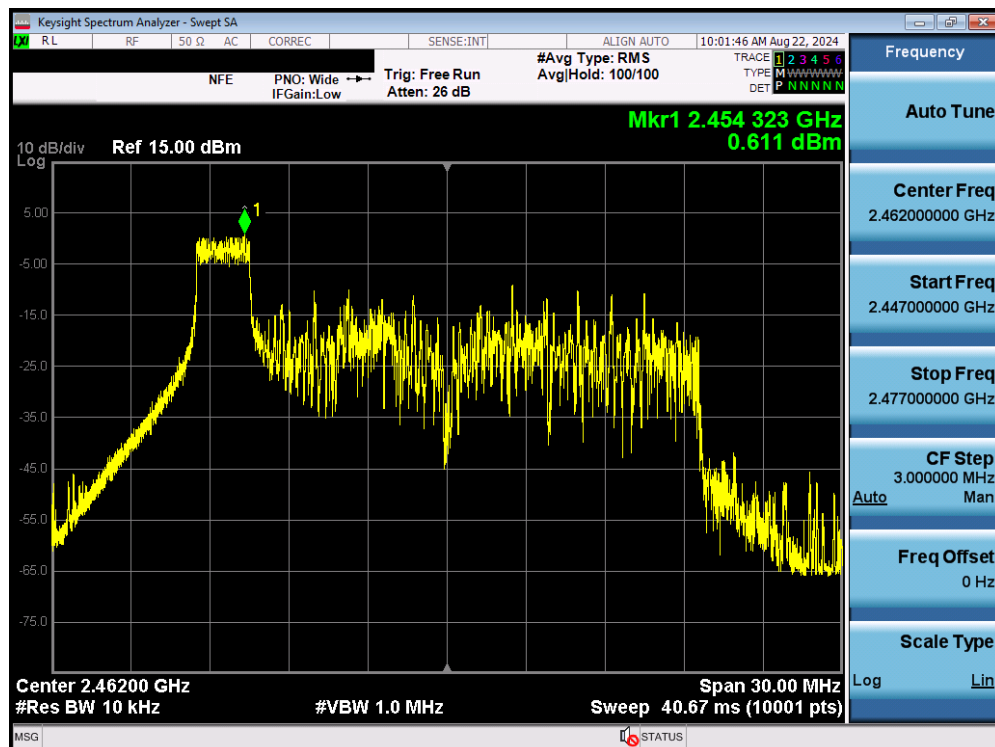


Plot 7-27. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 36 of 109

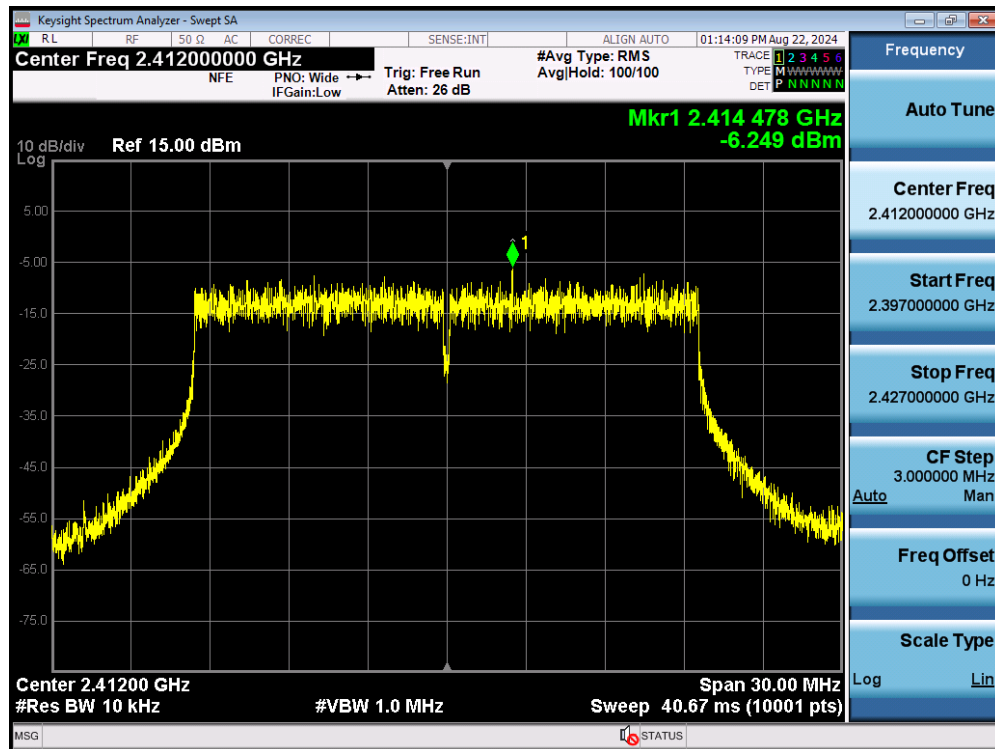


Plot 7-28. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 1)

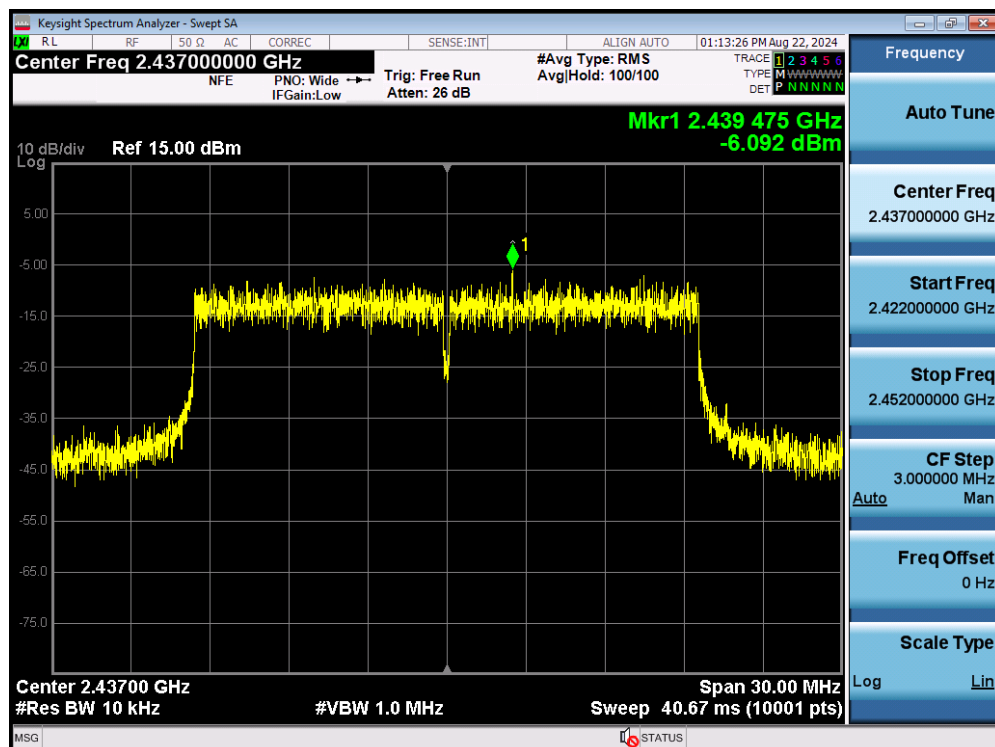


Plot 7-29. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 6)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 37 of 109

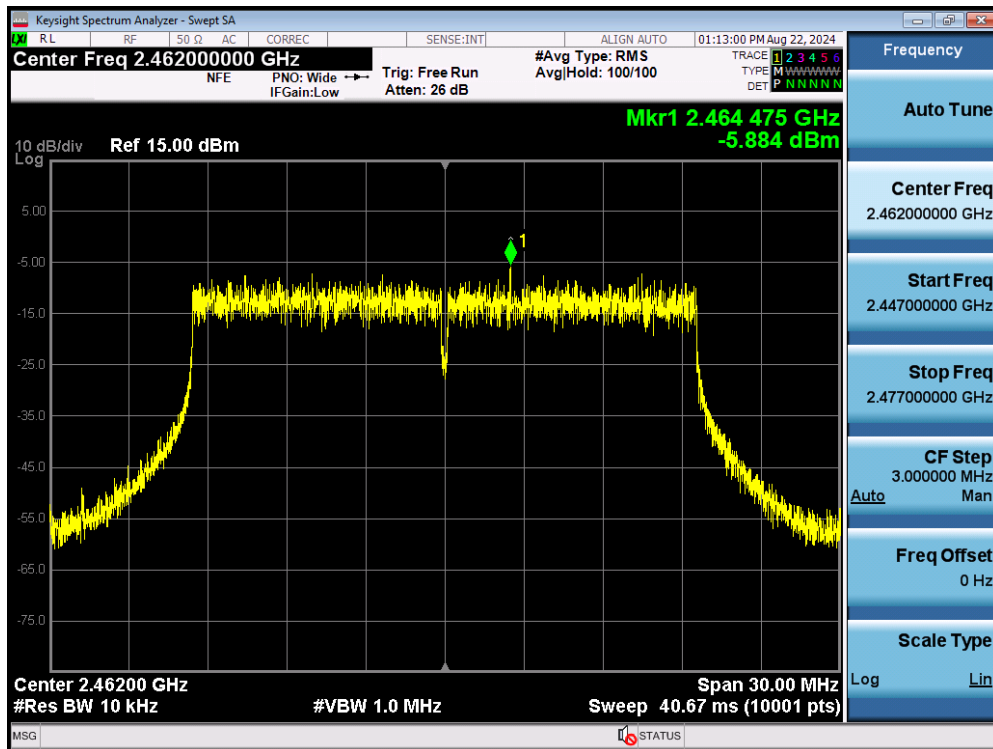


Plot 7-30. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 11)

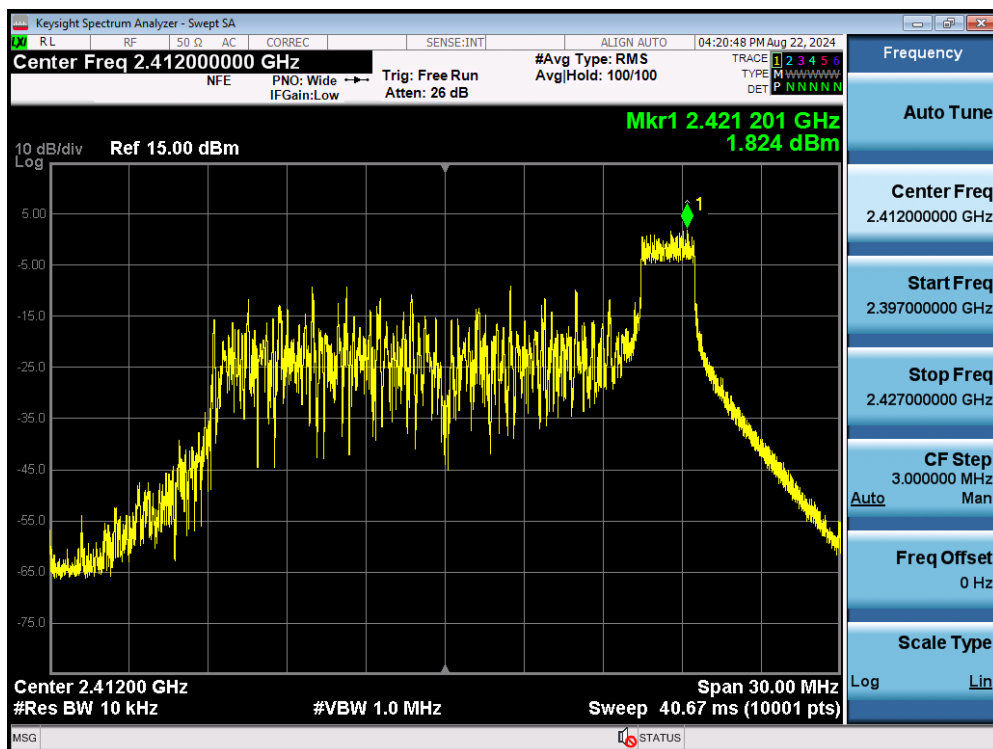


Plot 7-31. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 1)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 38 of 109

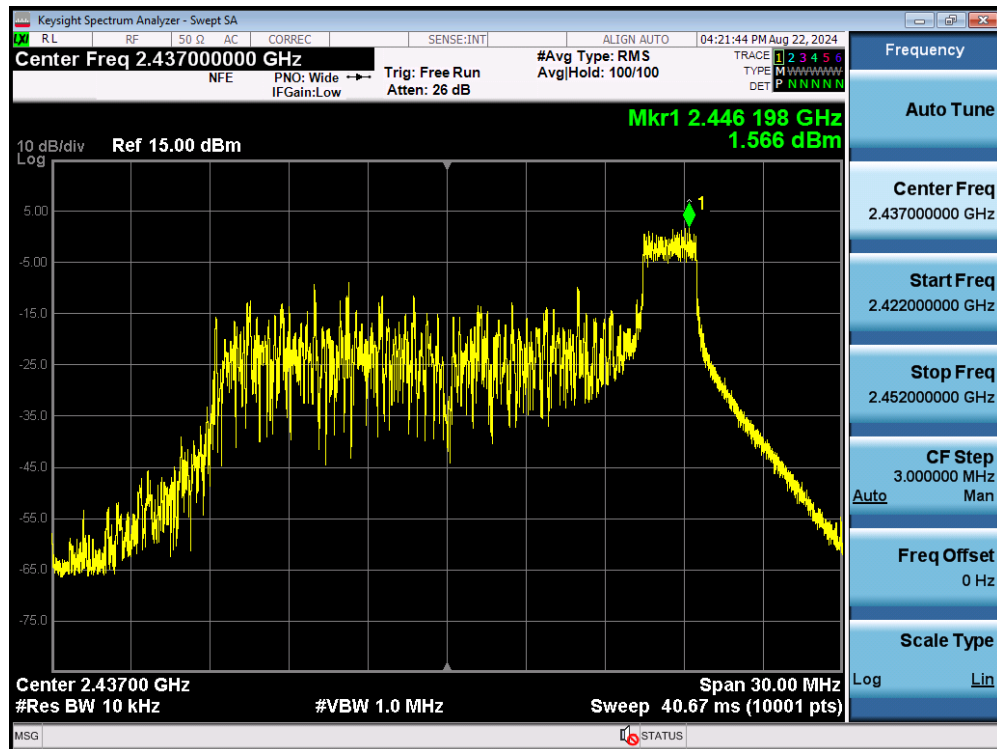


Plot 7-32. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 6)

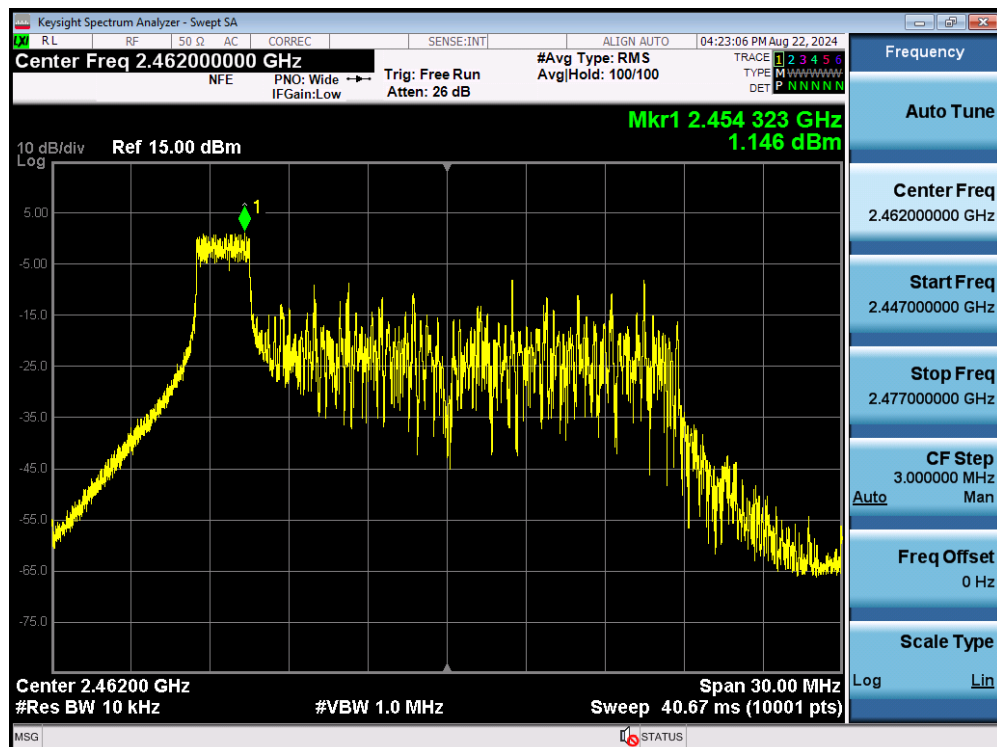


Plot 7-33. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 39 of 109

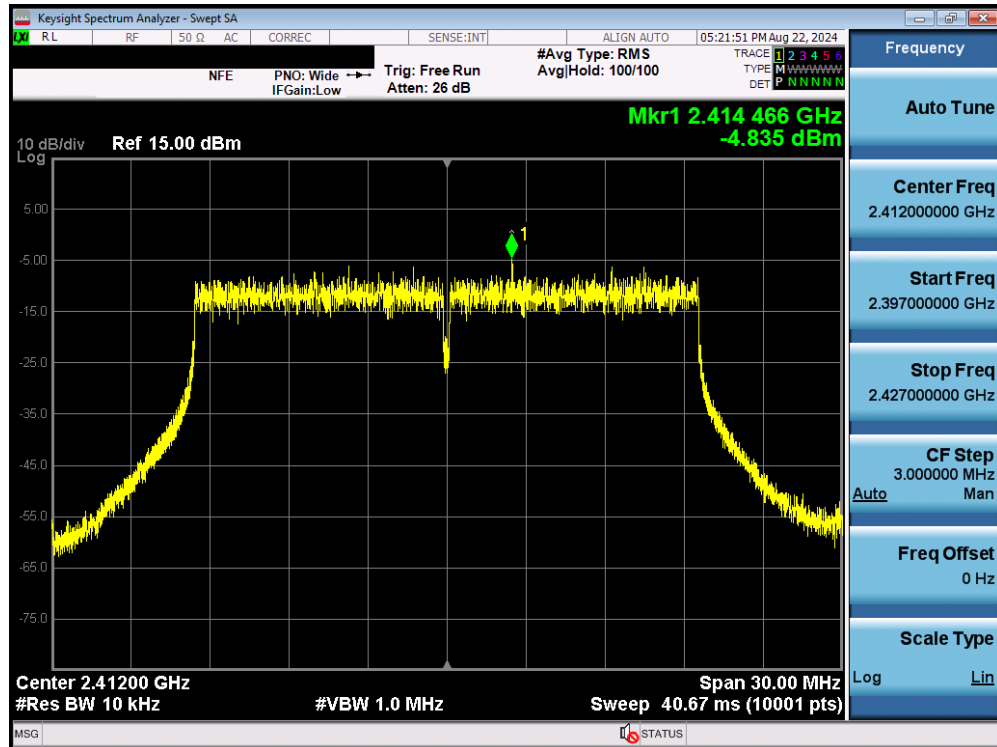


Plot 7-34. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 1)

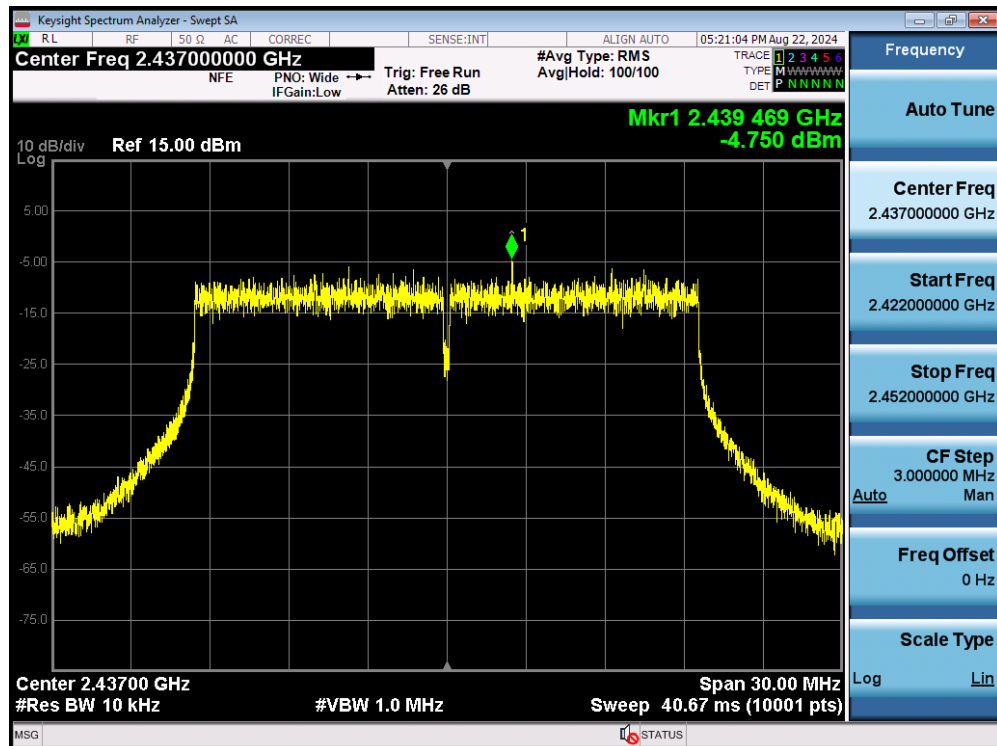

Plot 7-35. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 6)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 40 of 109

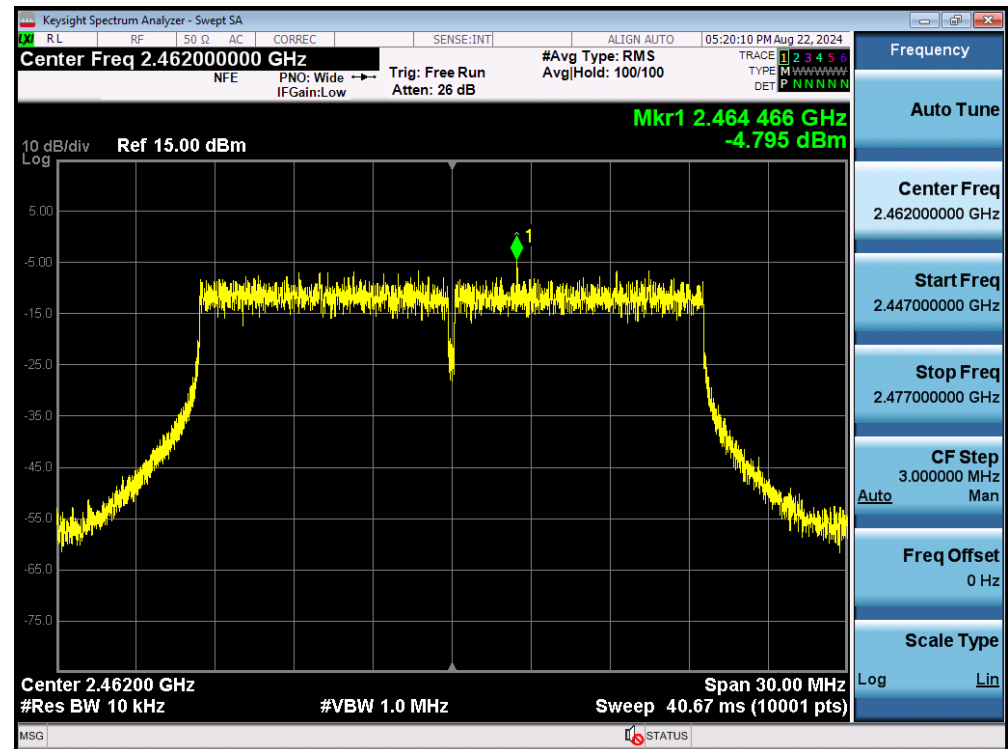

Plot 7-36. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 41 of 109



Note:

Per ANSI C63.10-2013 Section 14.3.1, the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted power spectral density was measured to be 0.32 dBm for Antenna 1 and 1.82 dBm for Antenna 2.

Antenna 1 + Antenna 2 = MIMO

$$(0.32 \text{ dBm} + 1.82 \text{ dBm}) = (1.08 \text{ mW} + 1.52 \text{ mW}) = 2.60 \text{ mW} = 4.15 \text{ dBm}$$

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 42 of 109

7.5 Conducted Band Edge Emissions

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tone configurations, and RU indices were investigated to determine the worst-case configuration. For the following out of band conducted emissions plots at the band edge, the EUT was set to a data rate of MCS0 in 802.11ax mode as this setting produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 43 of 109

7.5.1 SISO Antenna-2 Conducted Band Edge Emissions

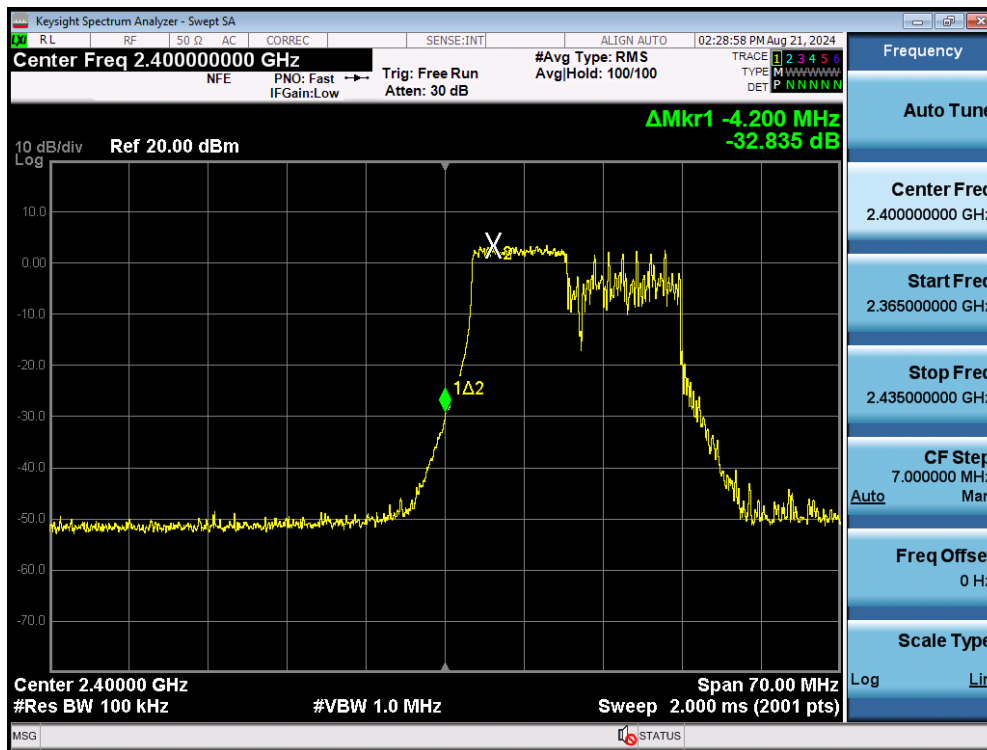


Plot 7-37. Band Edge Plot SISO ANT2 (802.11ax OFDMA – 106 Tones – Ch. 1)

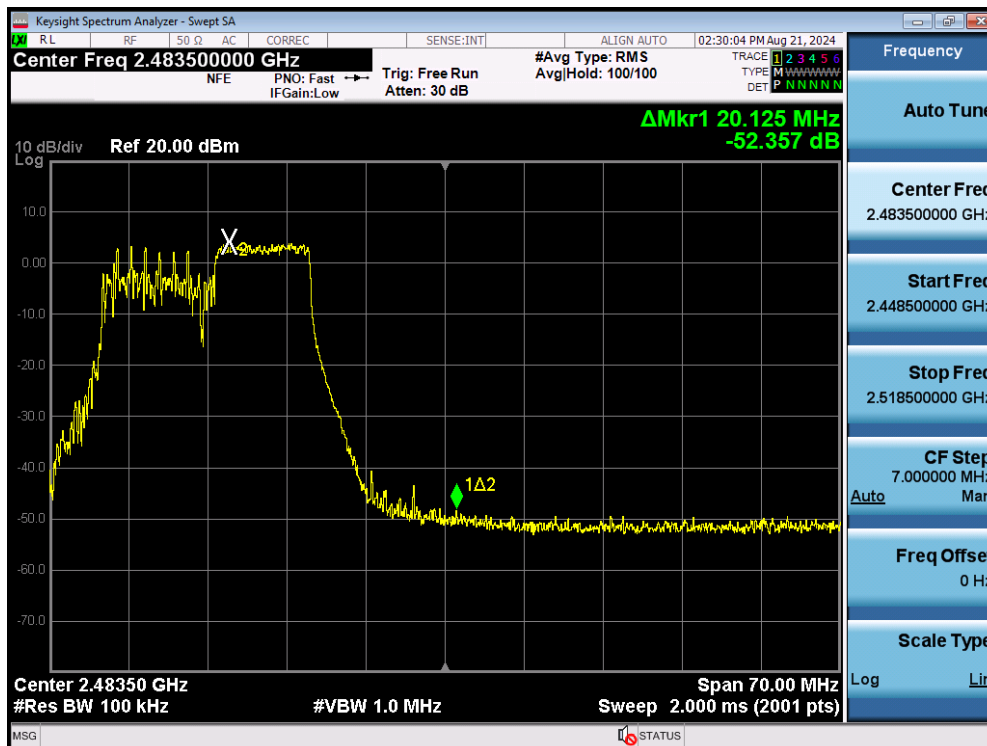


Plot 7-38. Band Edge Plot SISO ANT2 (802.11ax OFDMA – 106 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 44 of 109

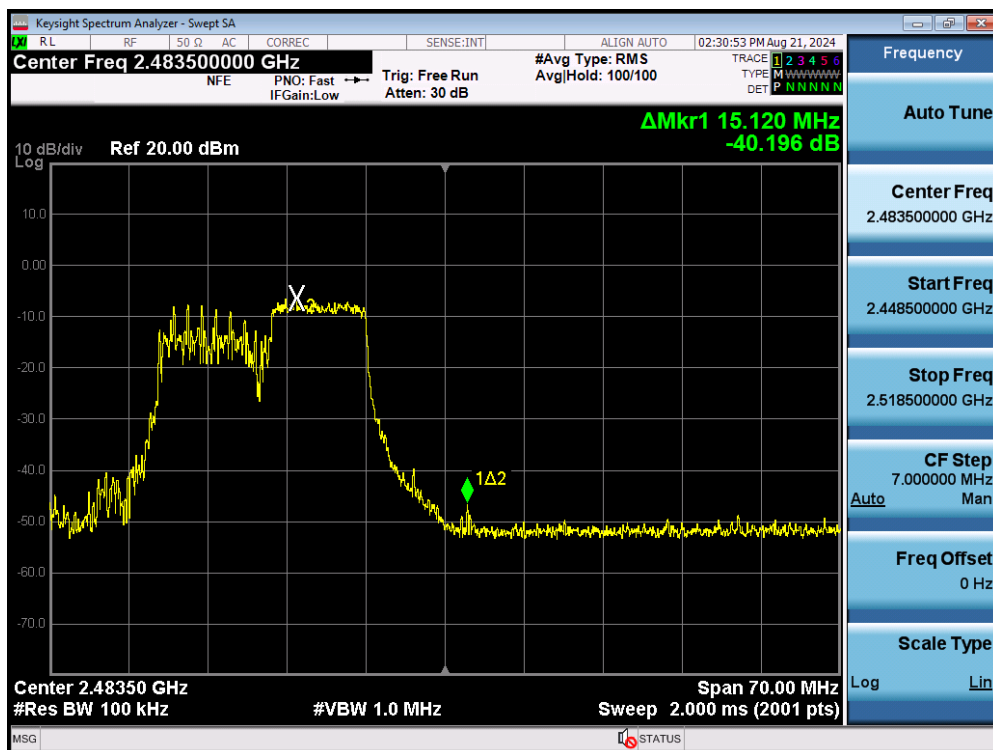


Plot 7-39. Band Edge Plot SISO ANT2 (802.11ax OFDMA – 106 Tones – Ch. 12)

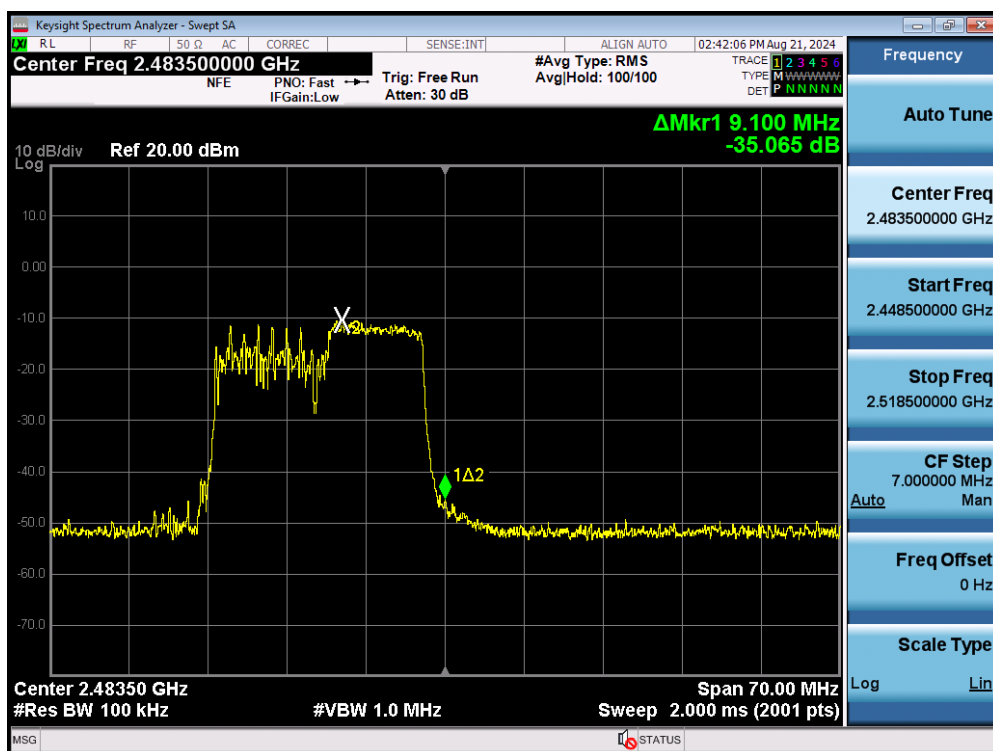


Plot 7-40. Band Edge Plot SISO ANT2 (802.11ax OFDMA – 106 Tones – Ch. 13)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 45 of 109

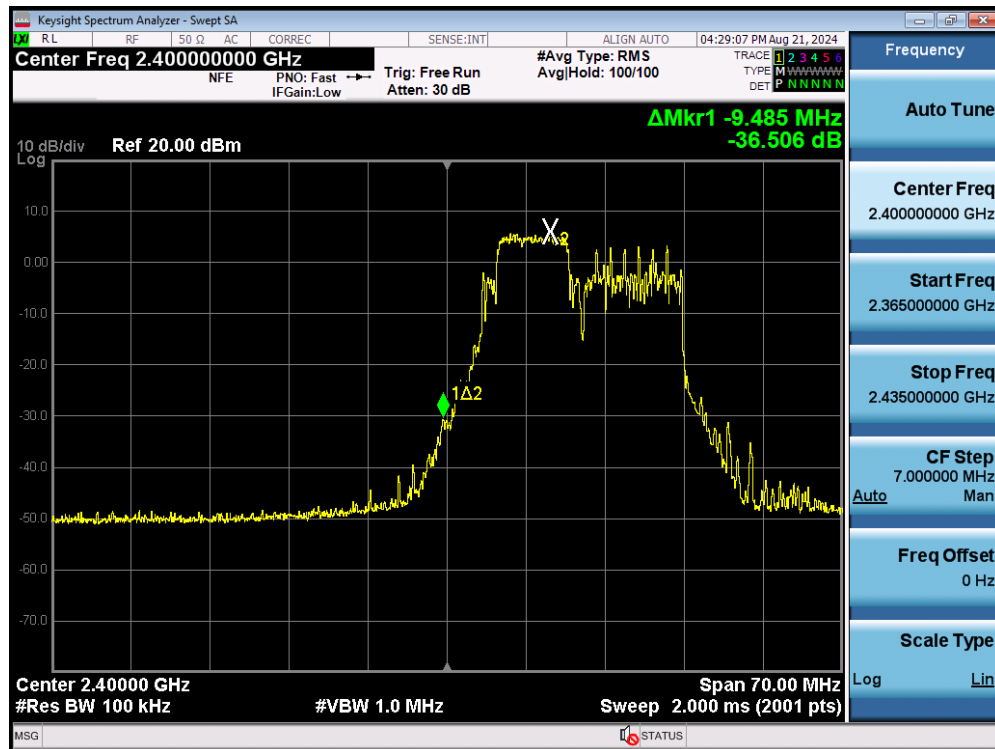


Plot 7-41. Band Edge Plot SISO ANT2 (802.11be OFDMA – 52+26 Tones – Ch. 1)

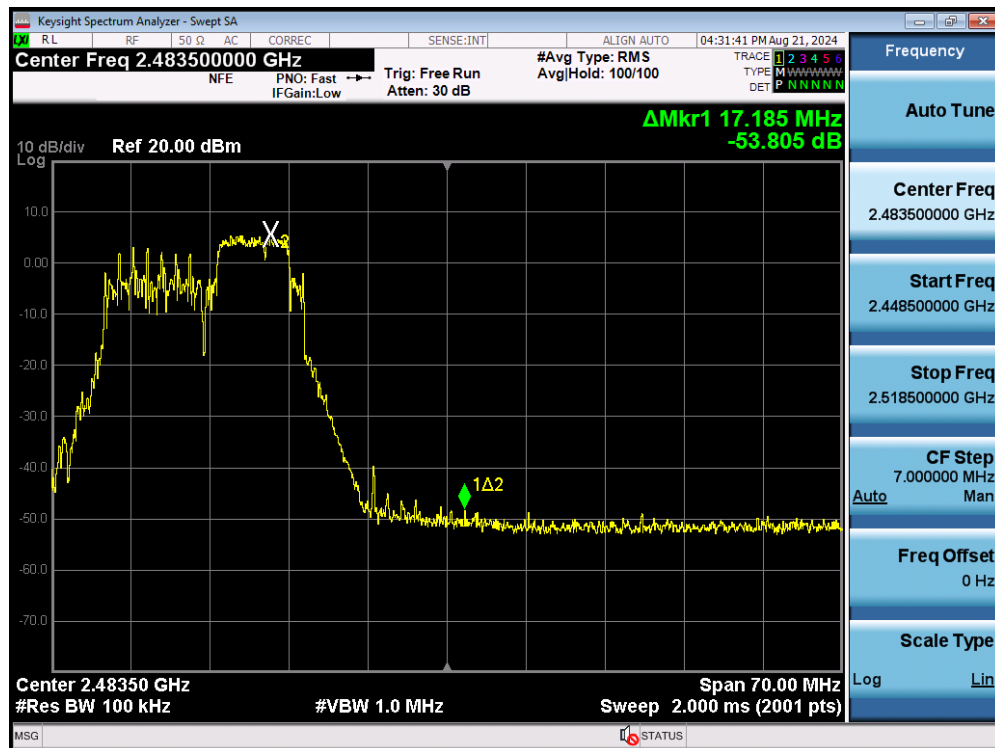


Plot 7-42. Band Edge Plot SISO ANT2 (802.11be OFDMA – 52+26 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 46 of 109

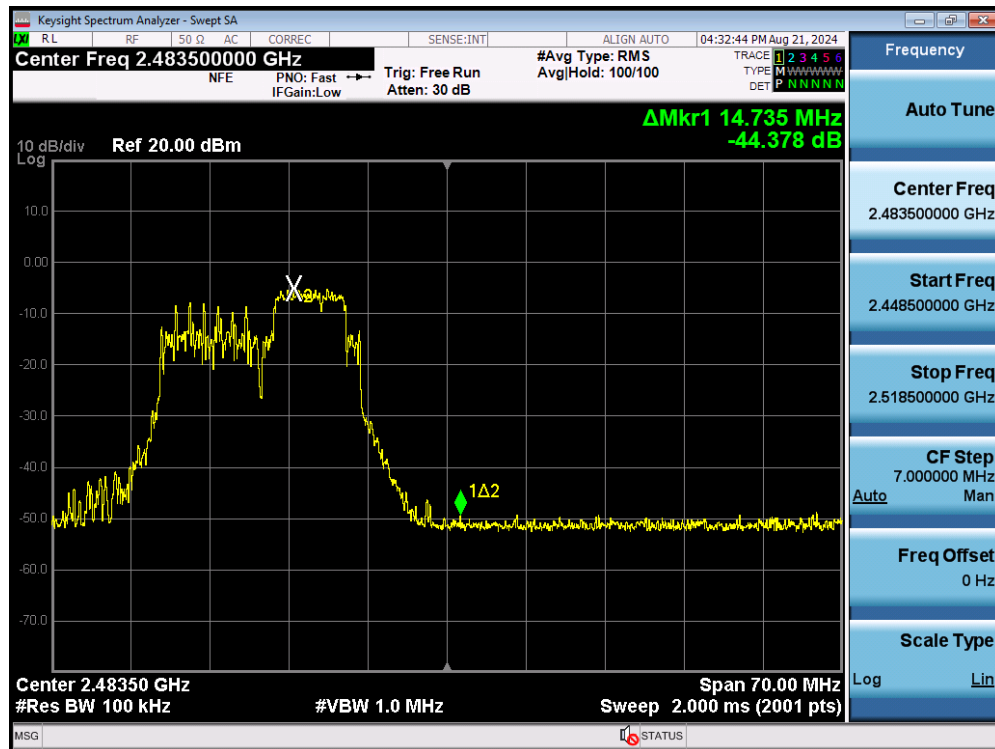


Plot 7-43. Band Edge Plot SISO ANT2 (802.11be OFDMA – 52+26 Tones – Ch. 12)

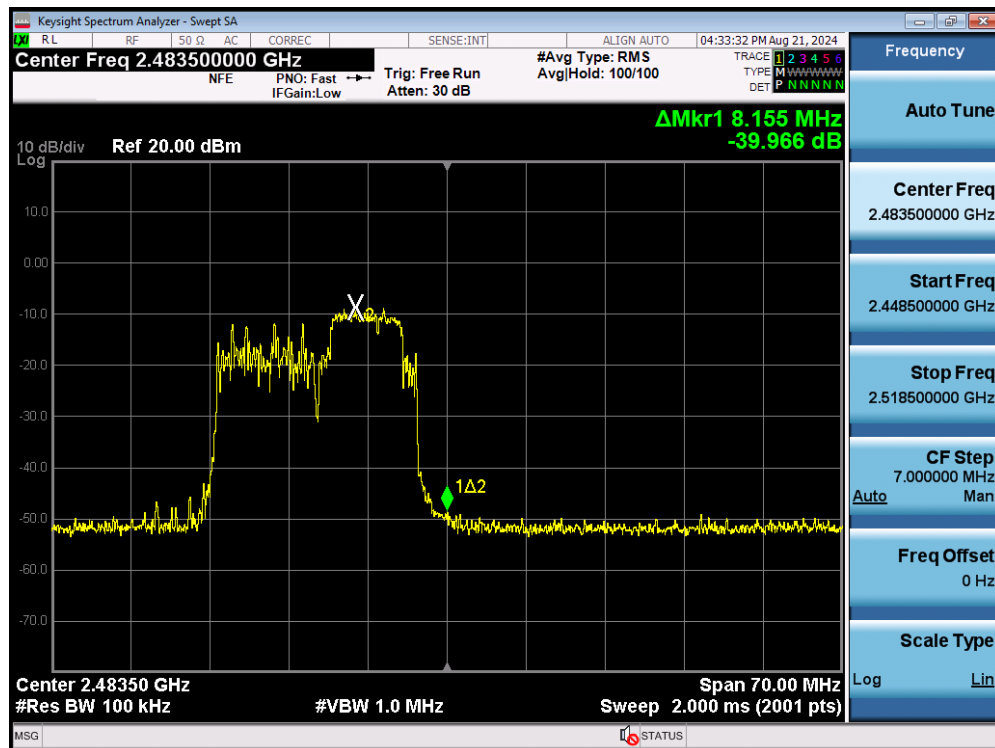


Plot 7-44. Band Edge Plot SISO ANT2 (802.11be OFDMA – 52+26 Tones – Ch. 13)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 47 of 109

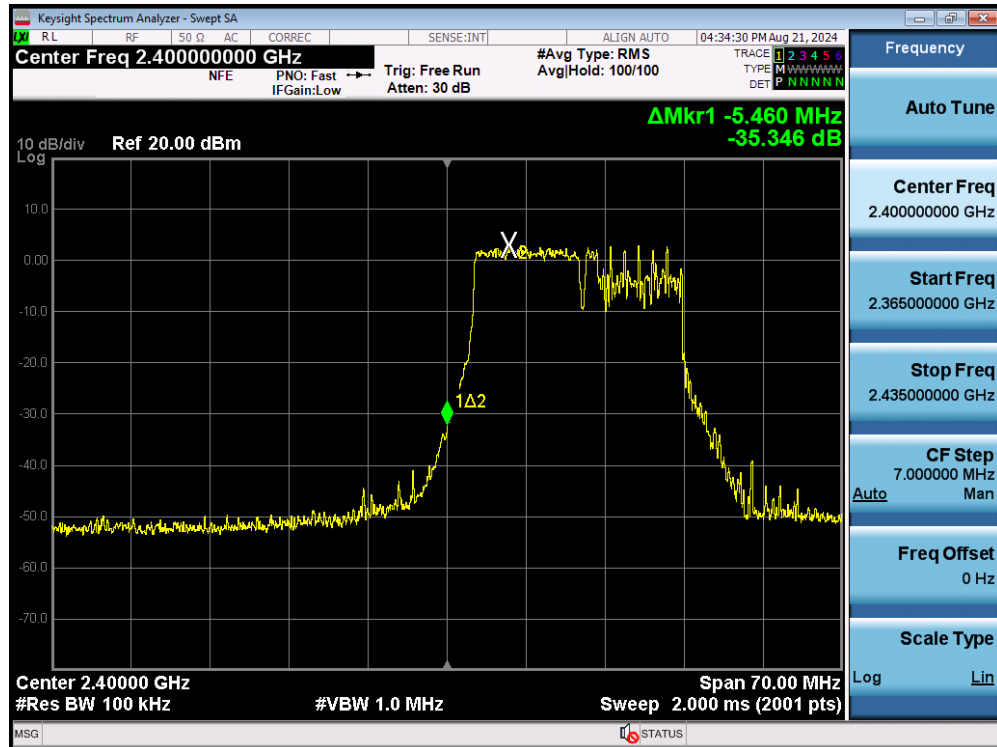


Plot 7-45. Band Edge Plot SISO ANT2 (802.11be OFDMA – 106+26 Tones – Ch. 1)

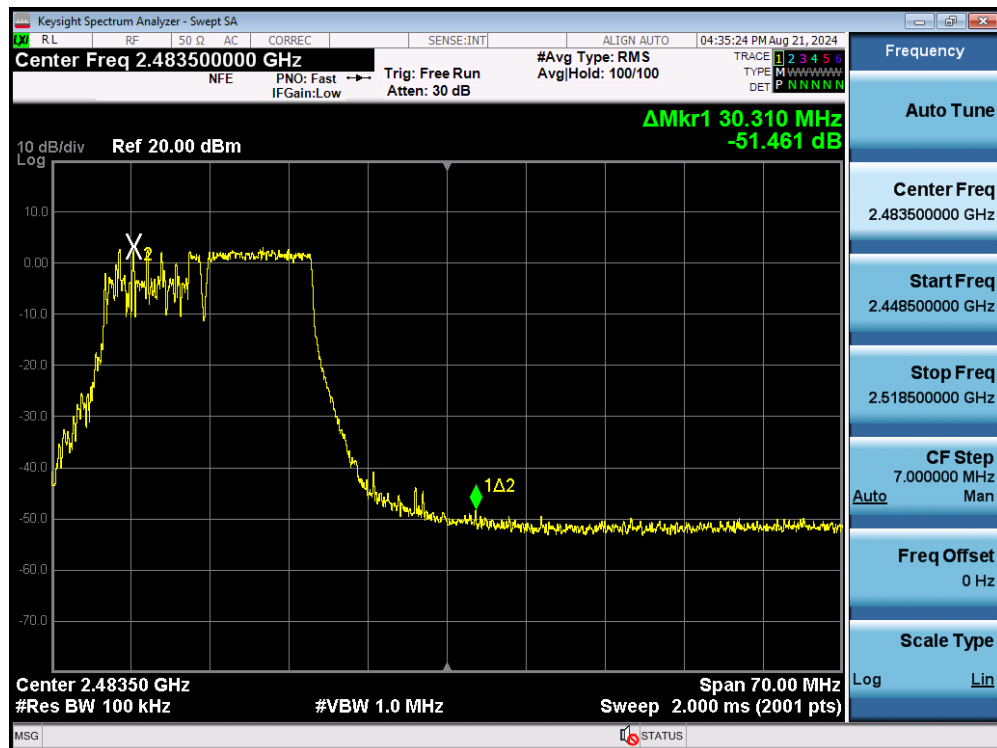


Plot 7-46. Band Edge Plot SISO ANT2 (802.11be OFDMA – 106+26 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 48 of 109

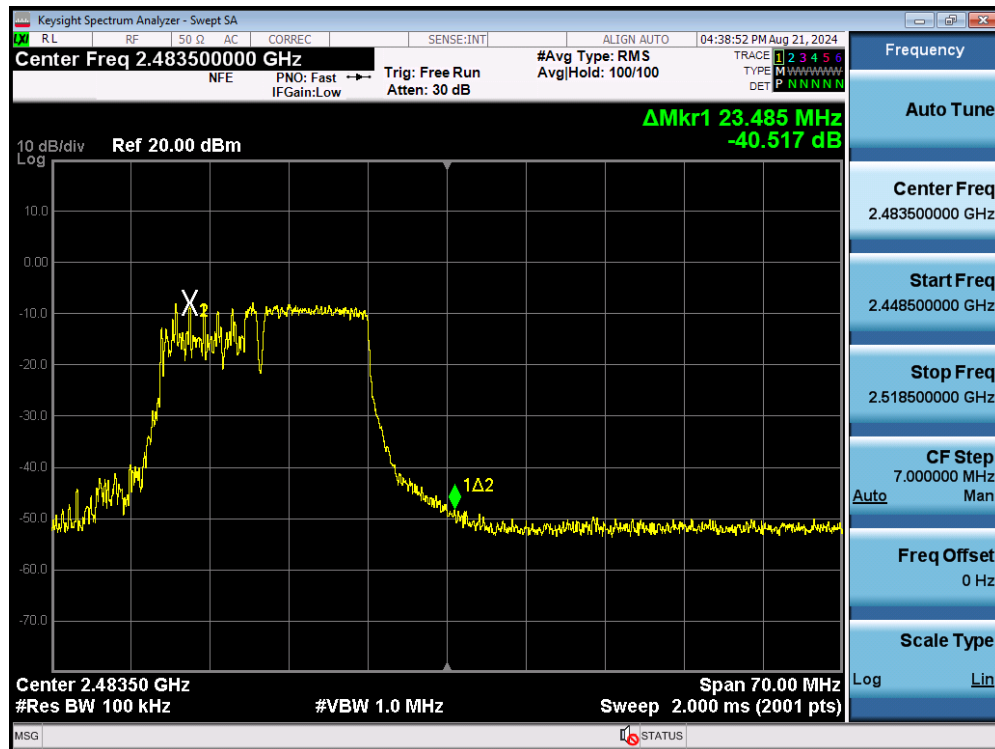


Plot 7-47. Band Edge Plot SISO ANT2 (802.11be OFDMA – 106+26 Tones – Ch. 12)

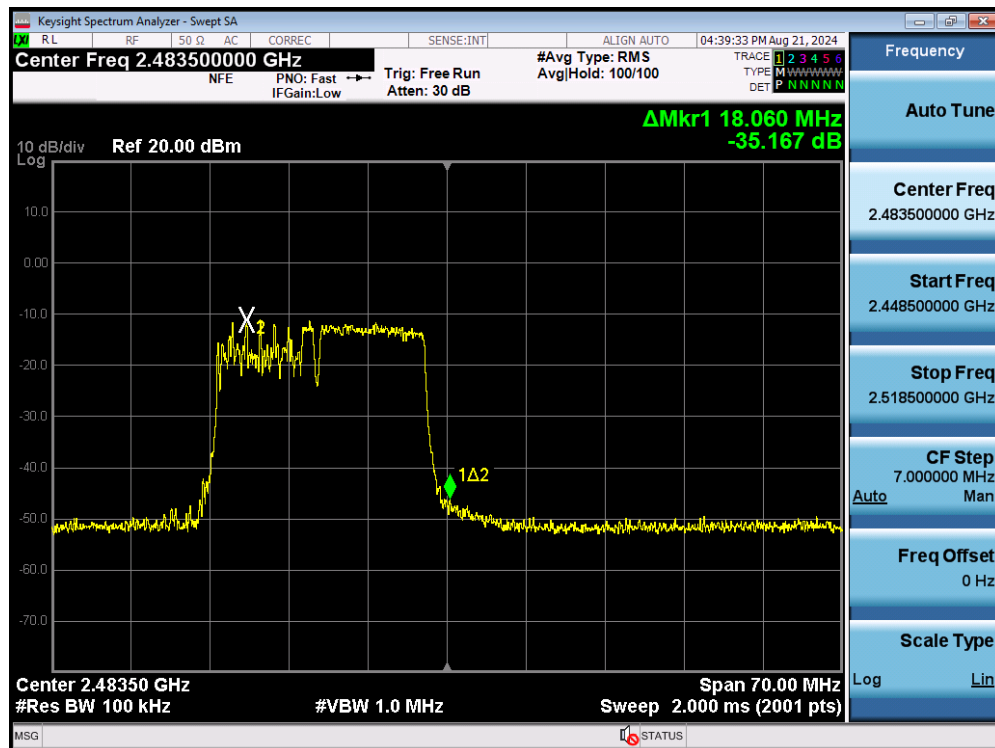


Plot 7-48. Band Edge Plot SISO ANT2 (802.11be OFDMA – 106+26 Tones – Ch. 13)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 49 of 109

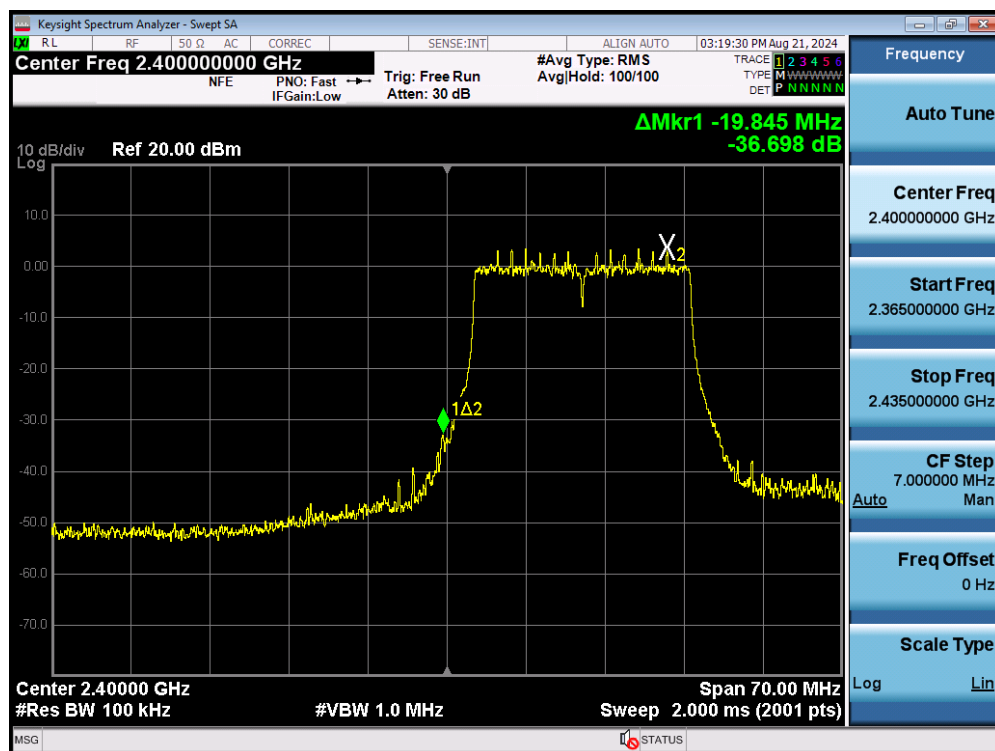


Plot 7-49. Band Edge Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 1)

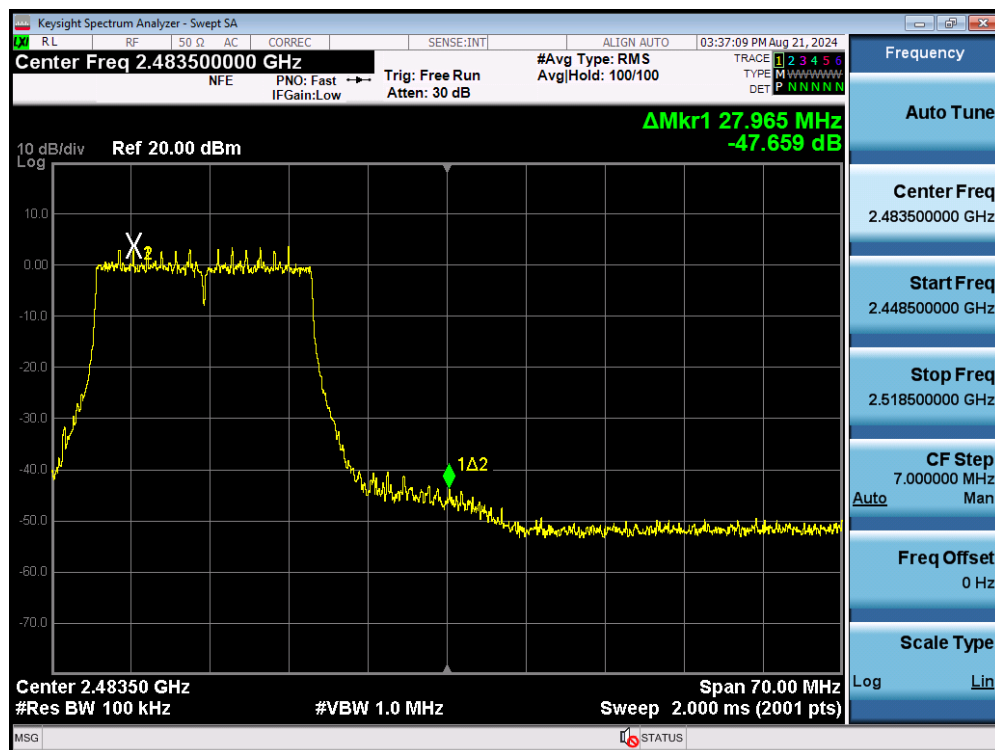


Plot 7-50. Band Edge Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 50 of 109

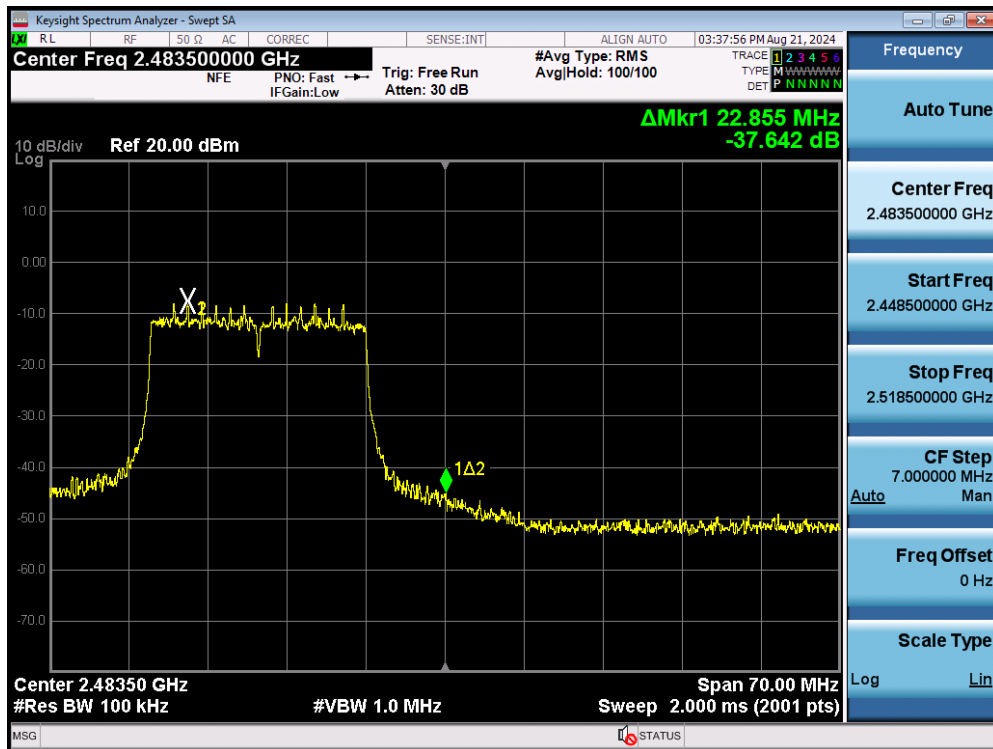


Plot 7-51. Band Edge Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 12)

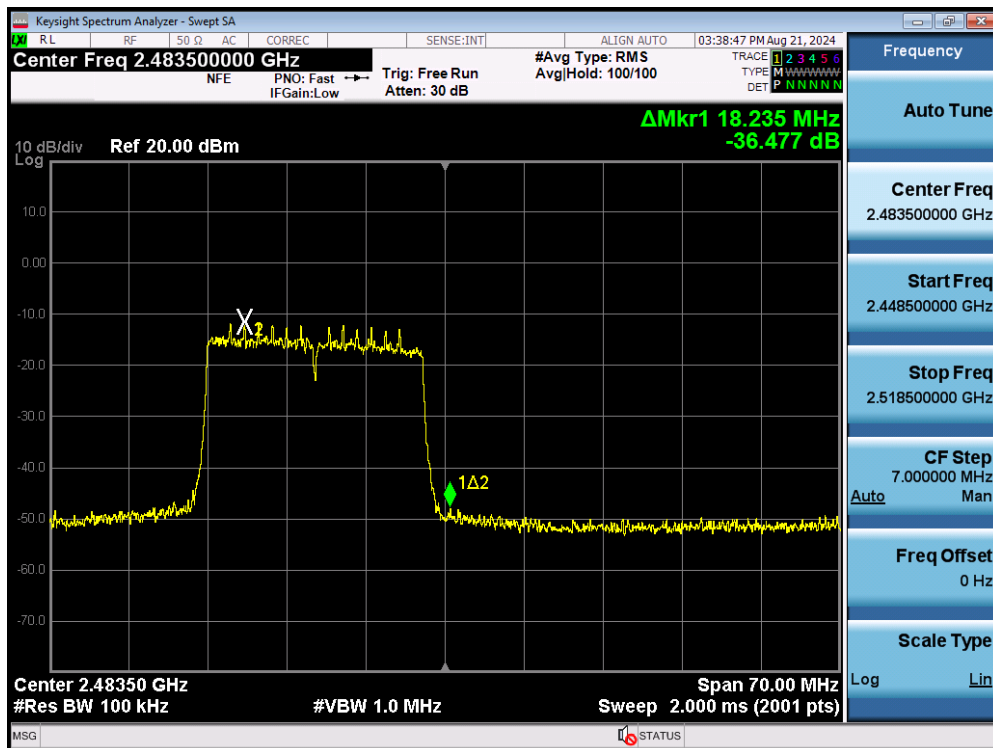


Plot 7-52. Band Edge Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 13)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 51 of 109

7.5.2 MIMO Antenna-1 Conducted Band Edge Emissions

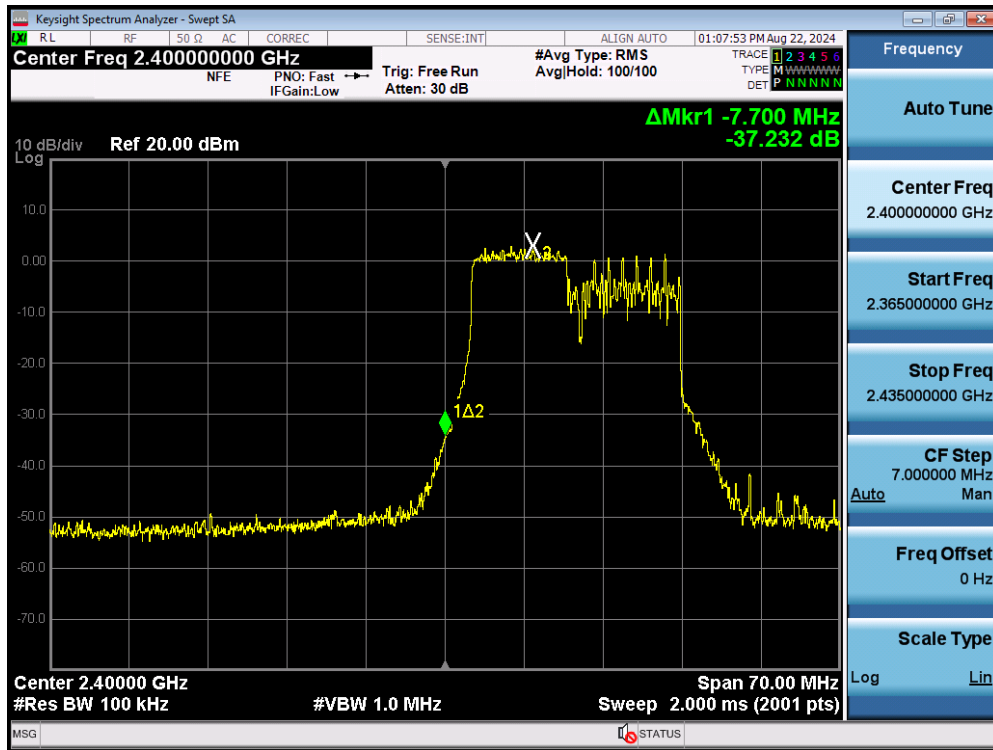


Plot 7-53. Band Edge Plot MIMO ANT1 (802.11ax OFDMA – 106 Tones – Ch. 1)

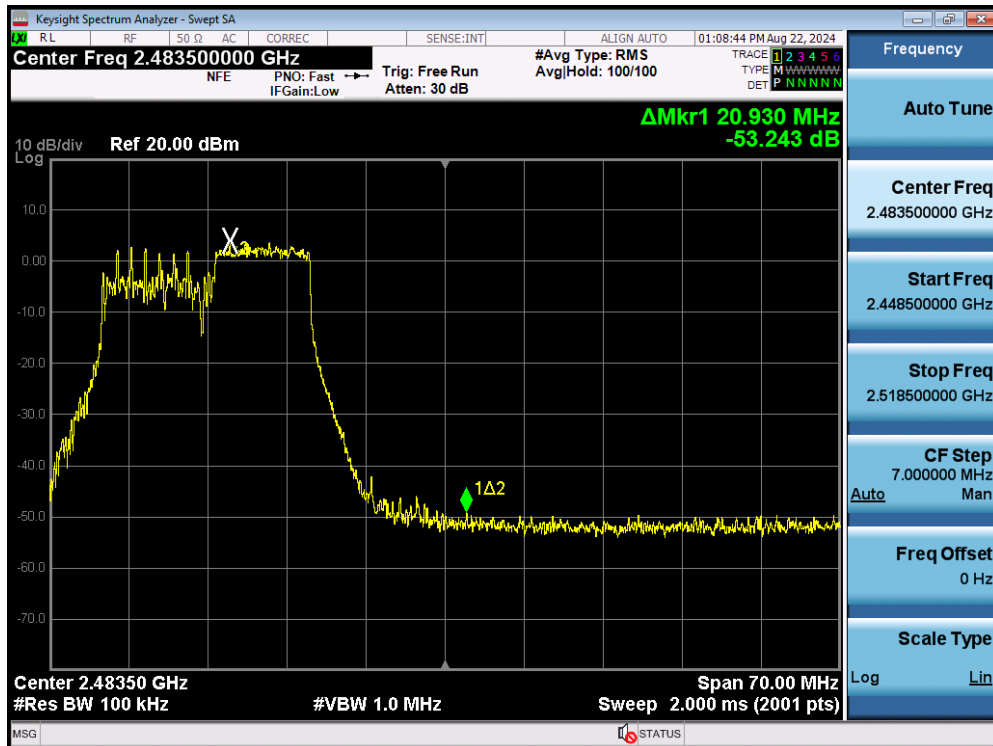


Plot 7-54. Band Edge Plot MIMO ANT1 (802.11ax OFDMA – 106 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 52 of 109

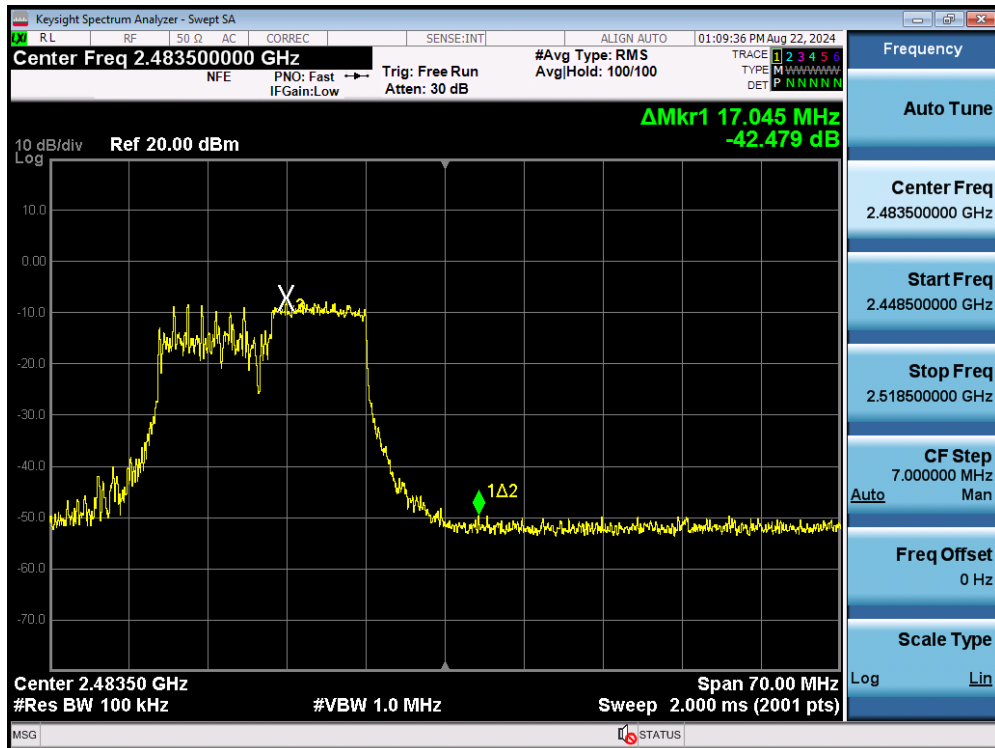


Plot 7-55. Band Edge Plot MIMO ANT1 (802.11ax OFDMA – 106 Tones – Ch. 12)

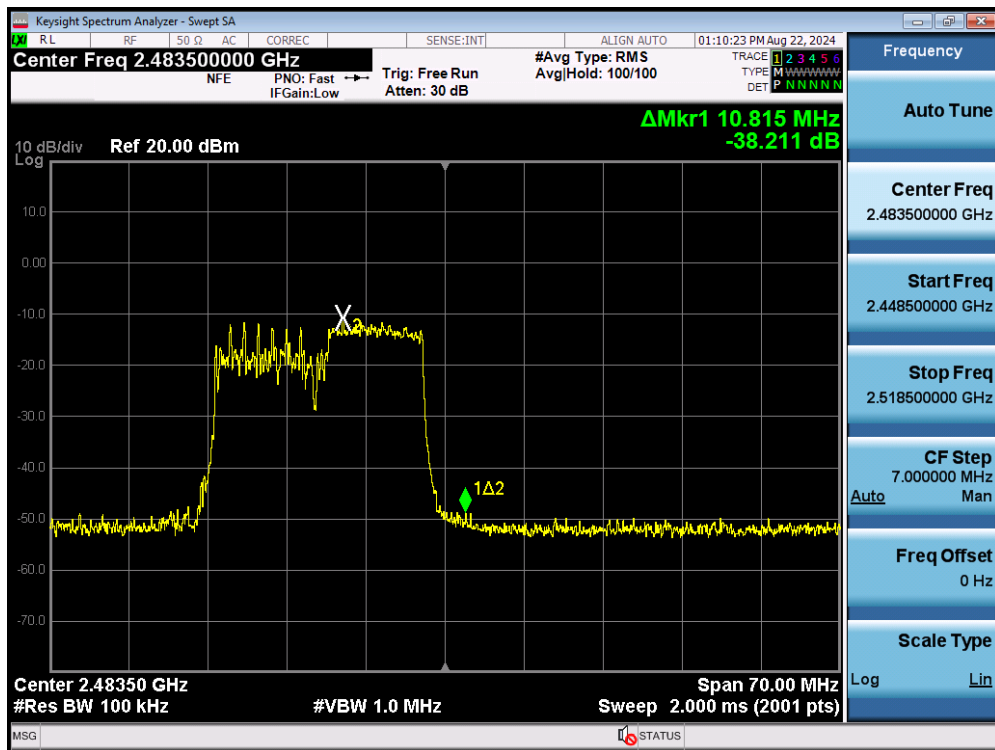


Plot 7-56. Band Edge Plot MIMO ANT1 (802.11ax OFDMA – 106 Tones – Ch. 13)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 53 of 109

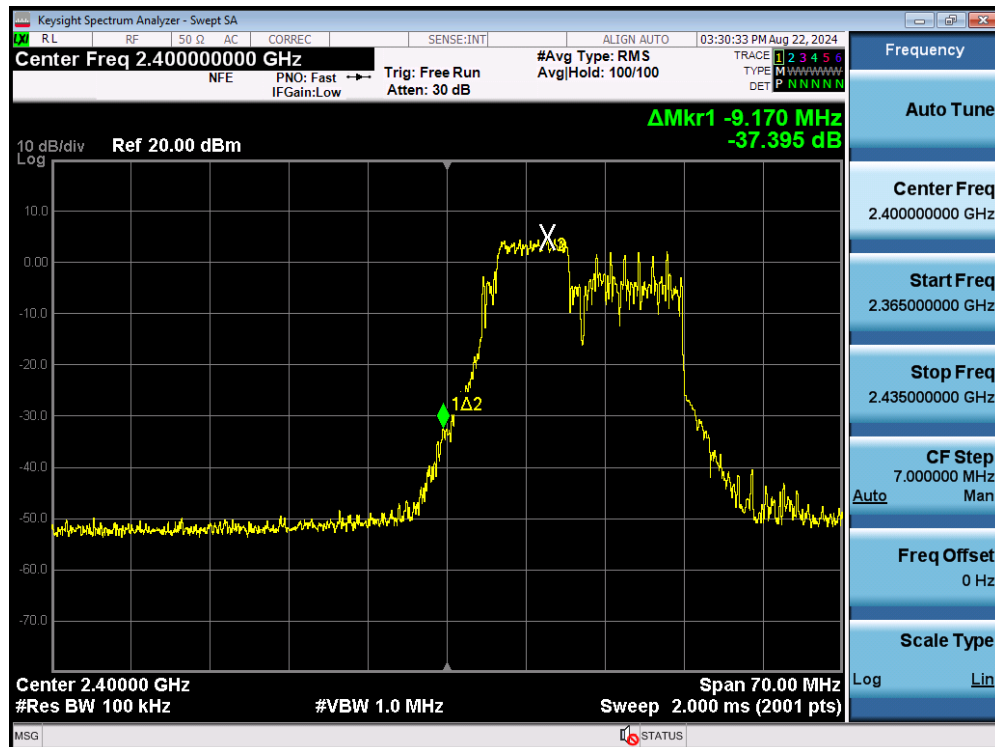


Plot 7-57. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 52+26 Tones – Ch. 1)

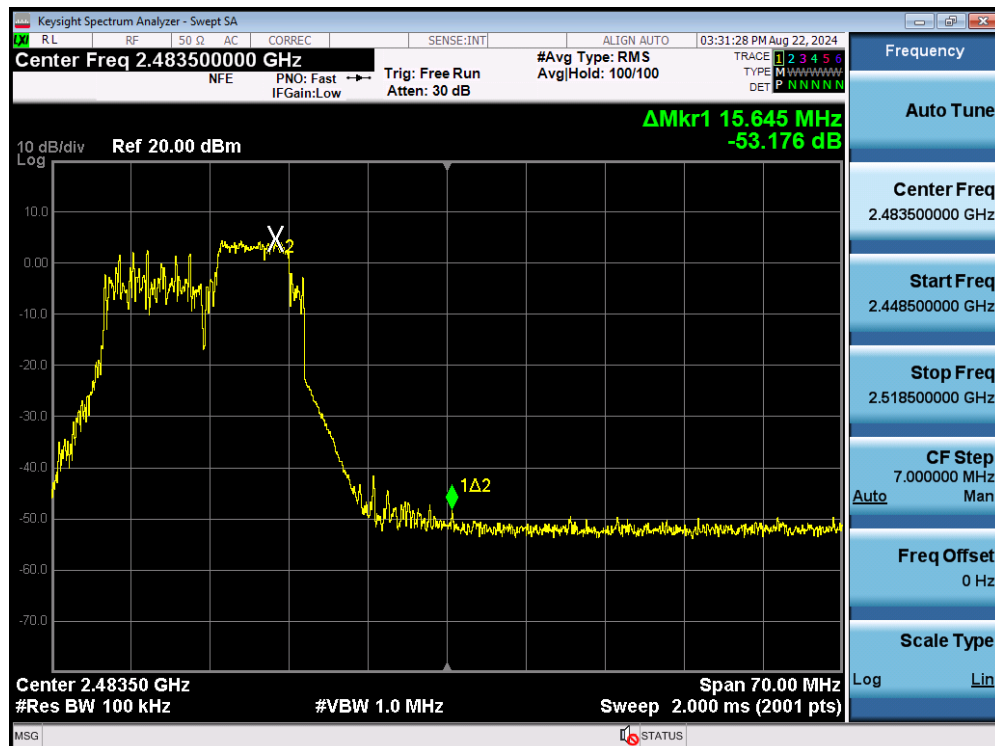


Plot 7-58. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 52+26 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 54 of 109

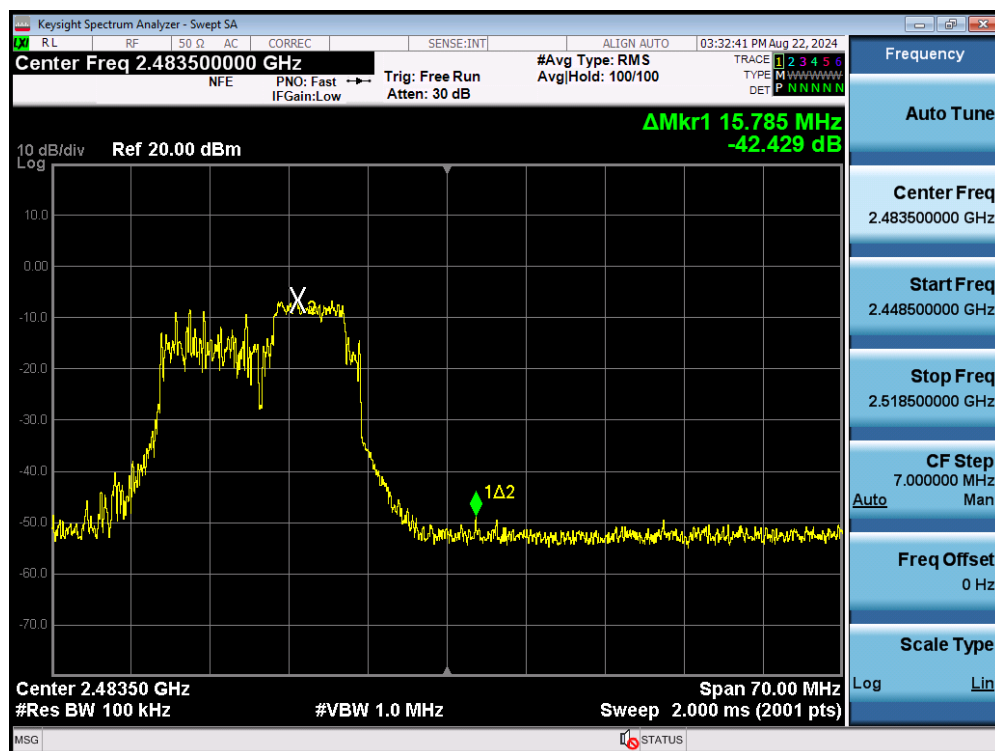


Plot 7-59. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 52+26 Tones – Ch. 12)

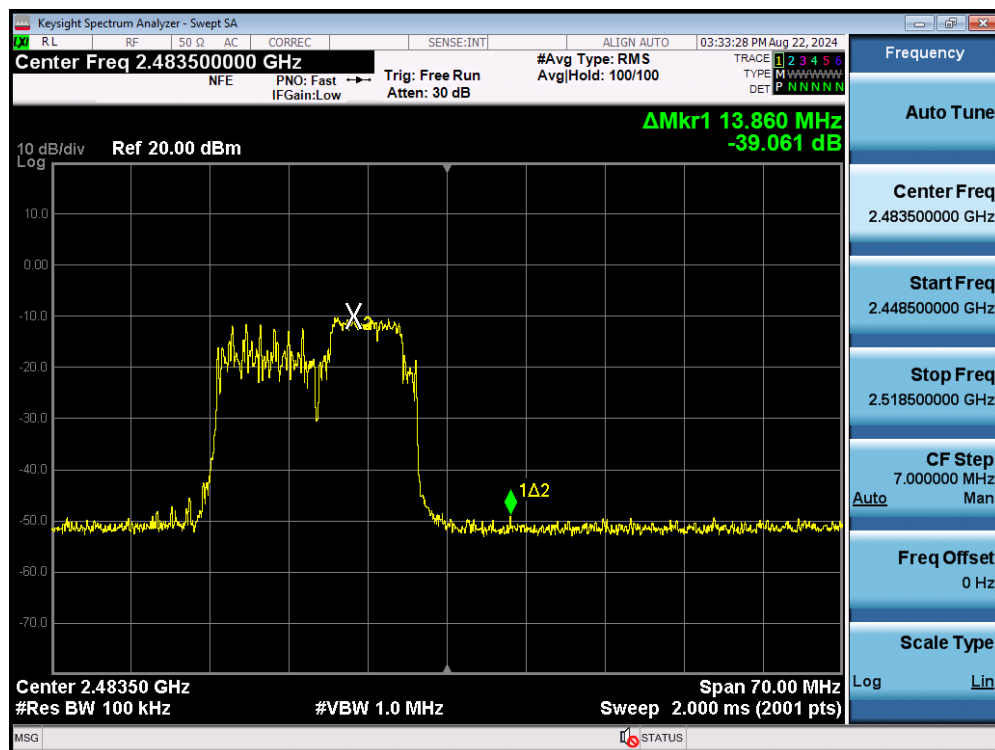


Plot 7-60. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 52+26 Tones – Ch. 13)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 55 of 109

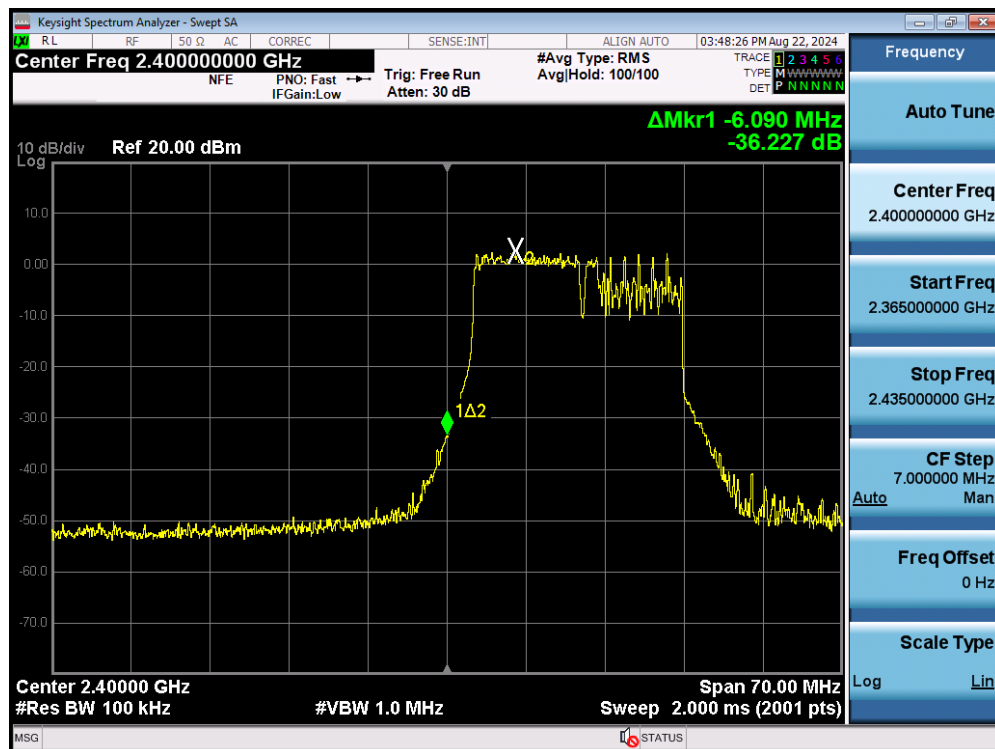


Plot 7-61. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 106+26 Tones – Ch. 1)

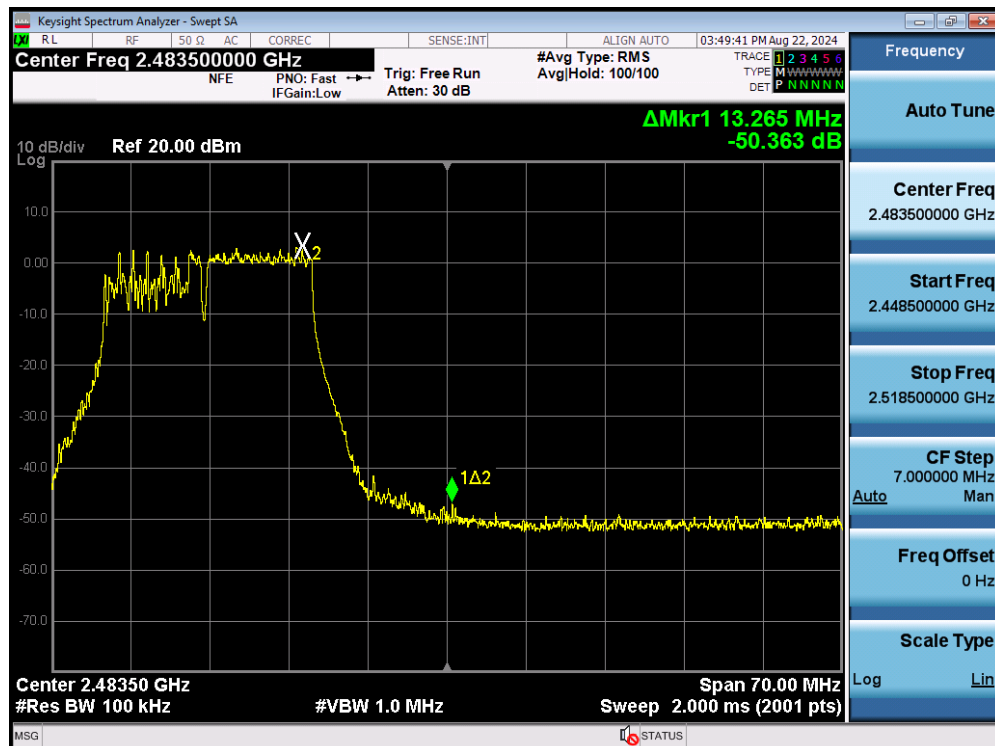


Plot 7-62. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 106+26 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 56 of 109

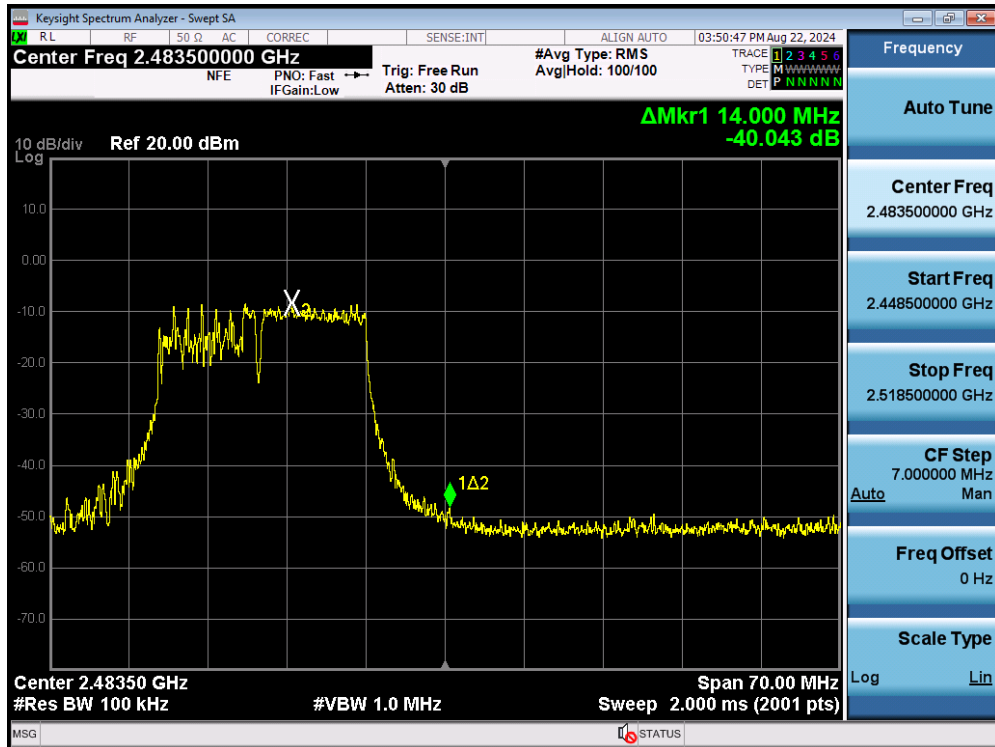


Plot 7-63. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 106+26 Tones – Ch. 12)

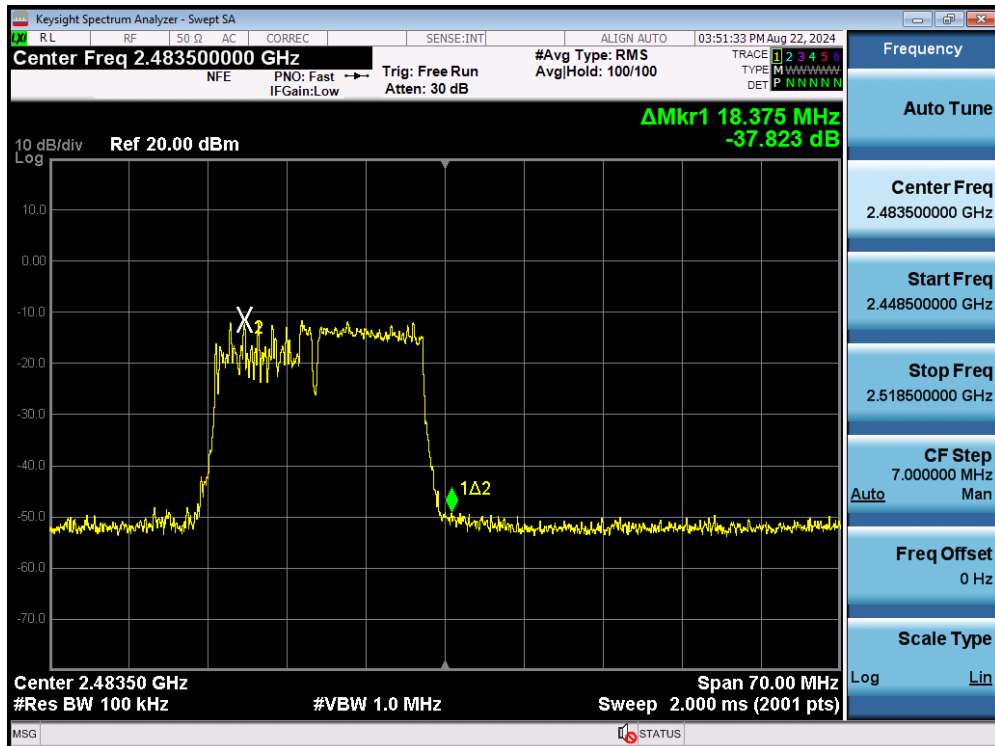


Plot 7-64. Band Edge Plot MIMO ANT1 (802.11be OFDMA – 106+26 Tones – Ch. 13)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 57 of 109


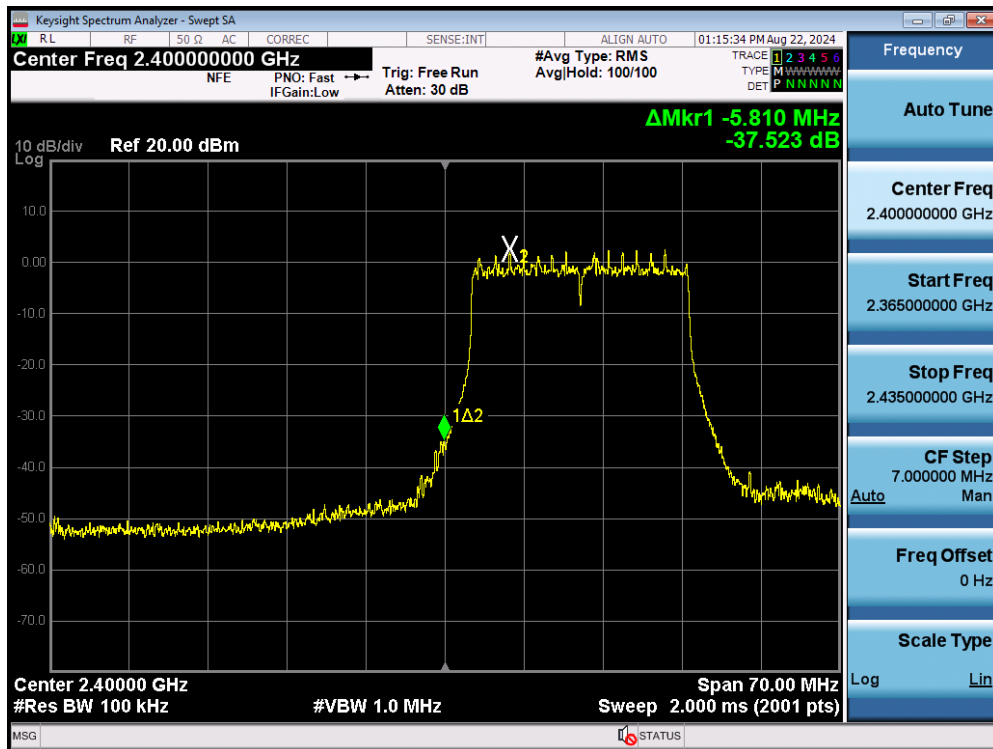


Plot 7-65. Band Edge Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 1)

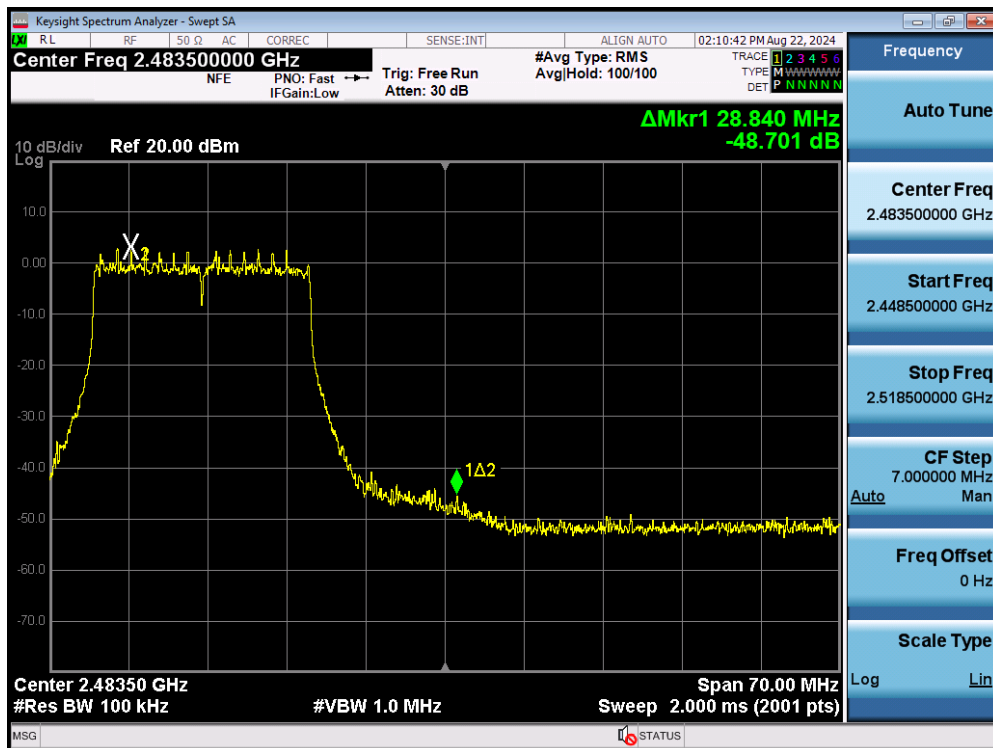


Plot 7-66. Band Edge Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 58 of 109

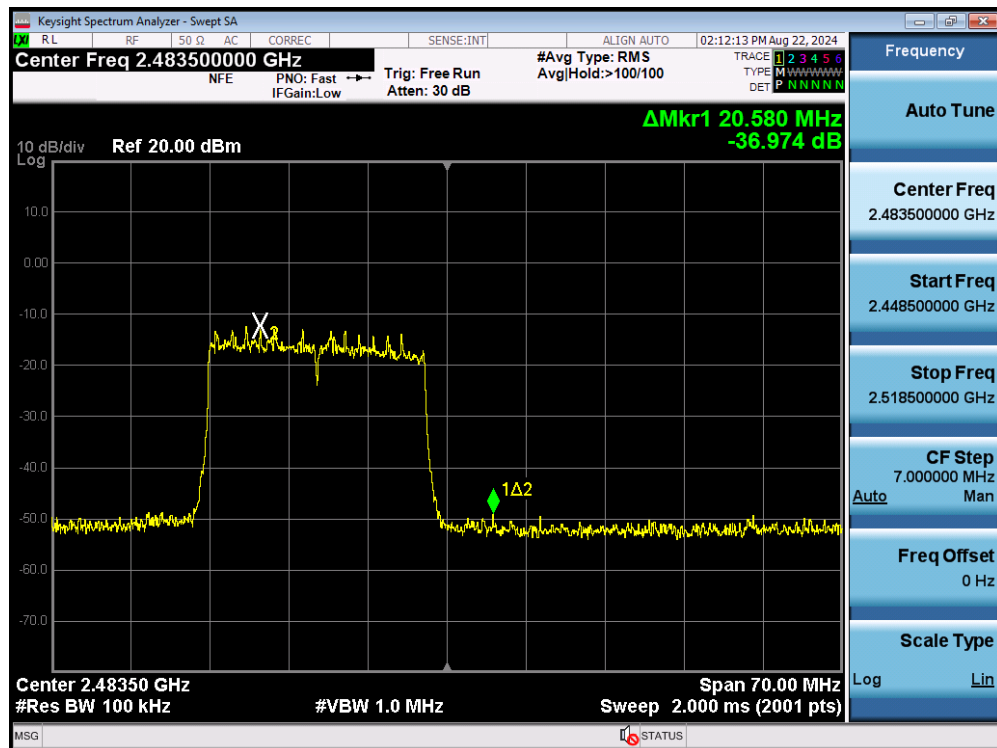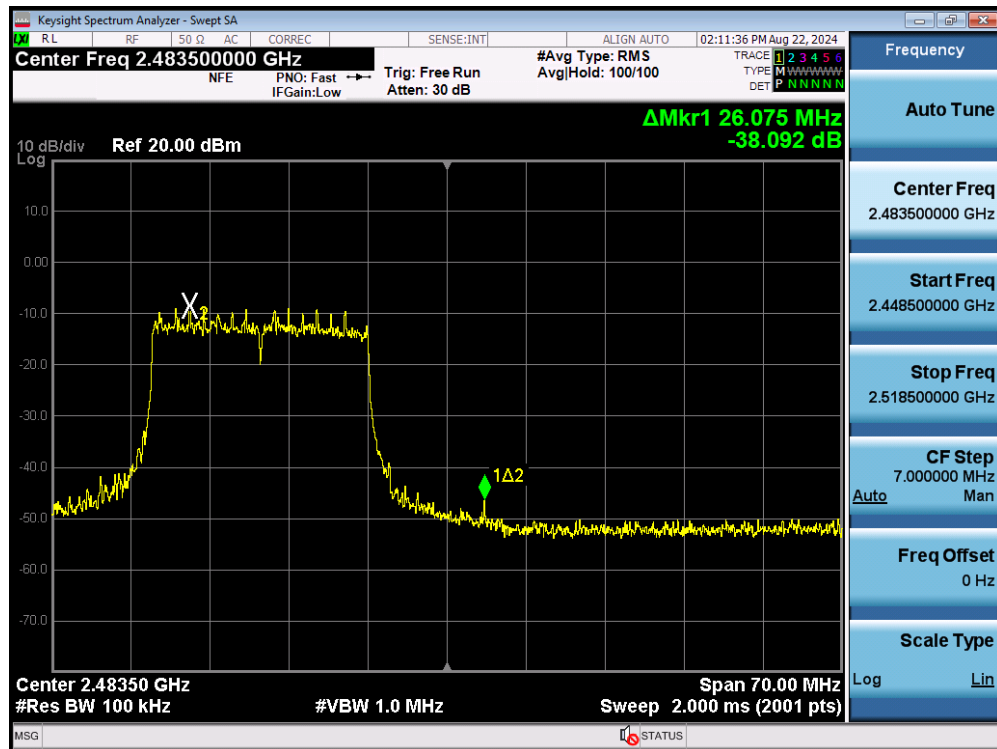


FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 59 of 109

7.5.3 MIMO Antenna-2 Conducted Band Edge Emissions

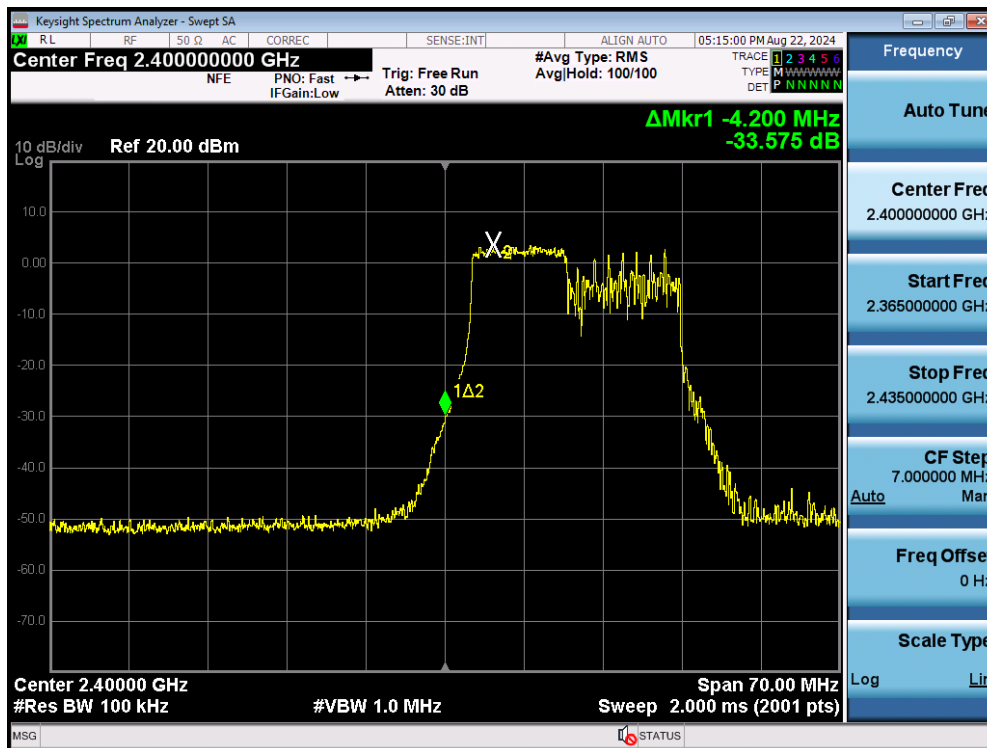


Plot 7-69. Band Edge Plot MIMO ANT2 (802.11ax OFDMA – 106 Tones – Ch. 1)

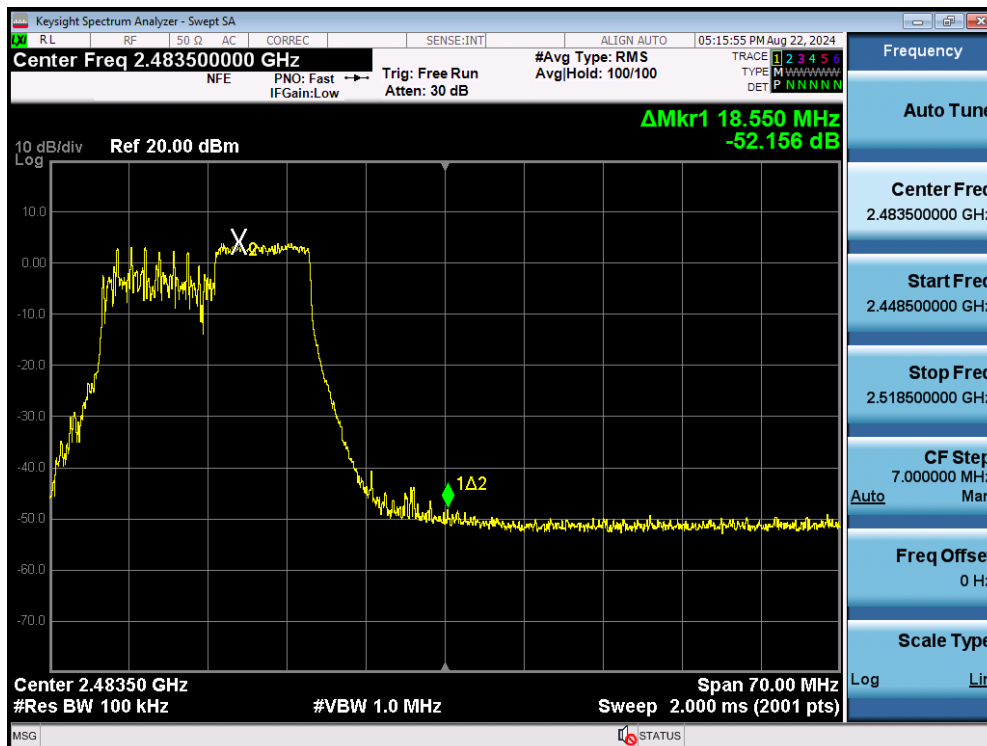


Plot 7-70. Band Edge Plot MIMO ANT2 (802.11ax OFDMA – 106 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 60 of 109

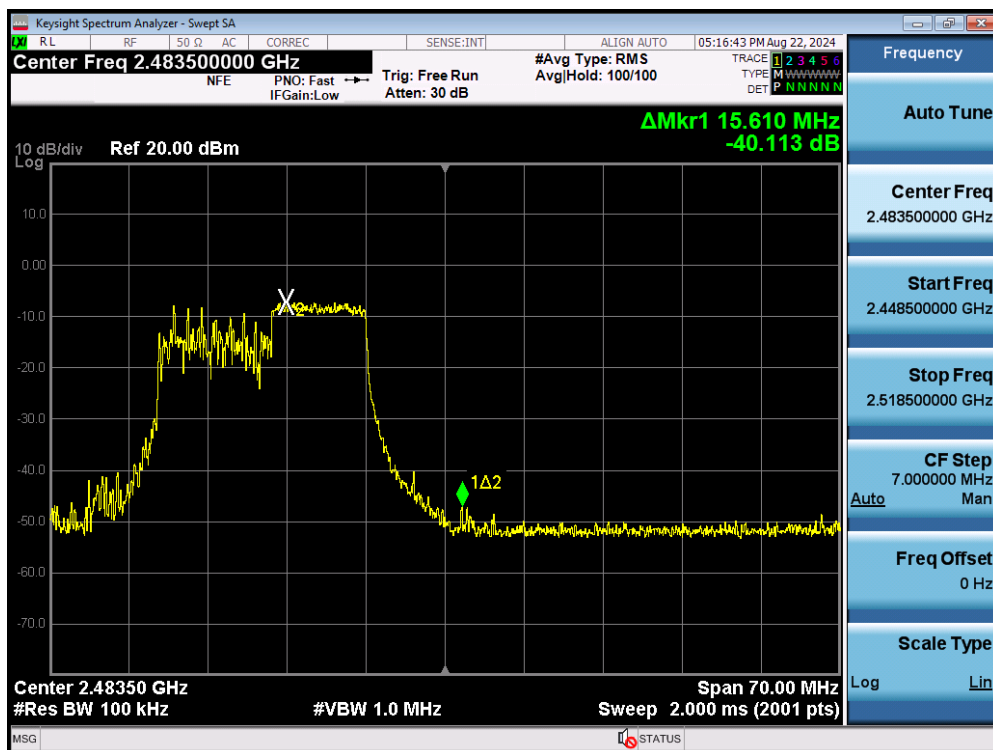


Plot 7-71. Band Edge Plot MIMO ANT2 (802.11ax OFDMA – 106 Tones – Ch. 12)

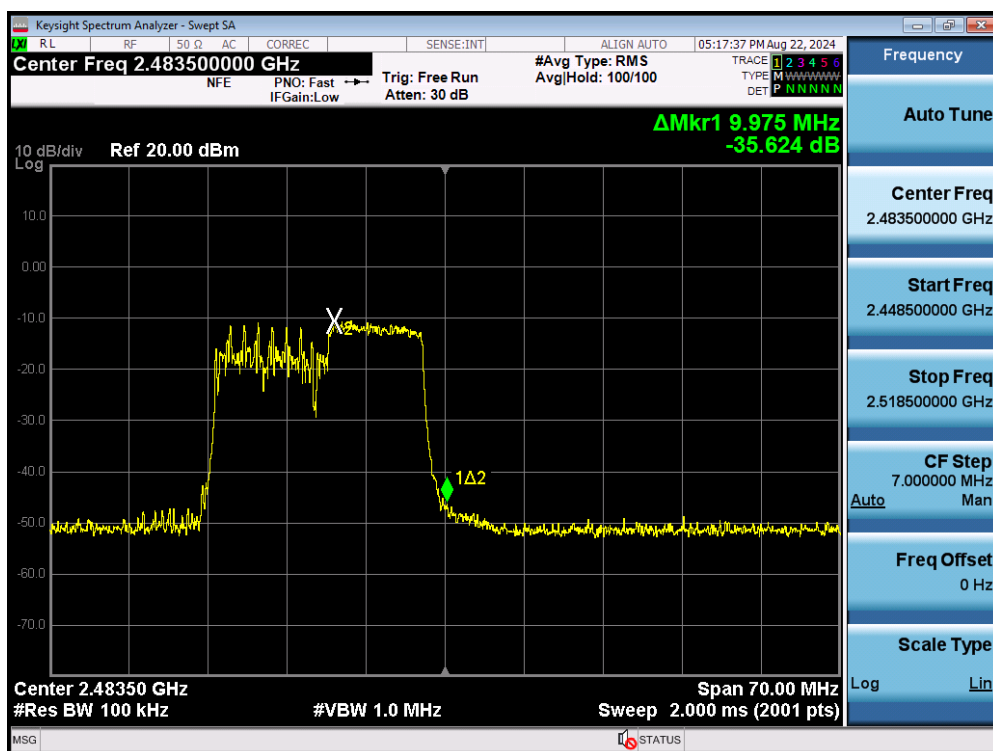


Plot 7-72. Band Edge Plot MIMO ANT2 (802.11ax OFDMA – 106 Tones – Ch. 13)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 61 of 109

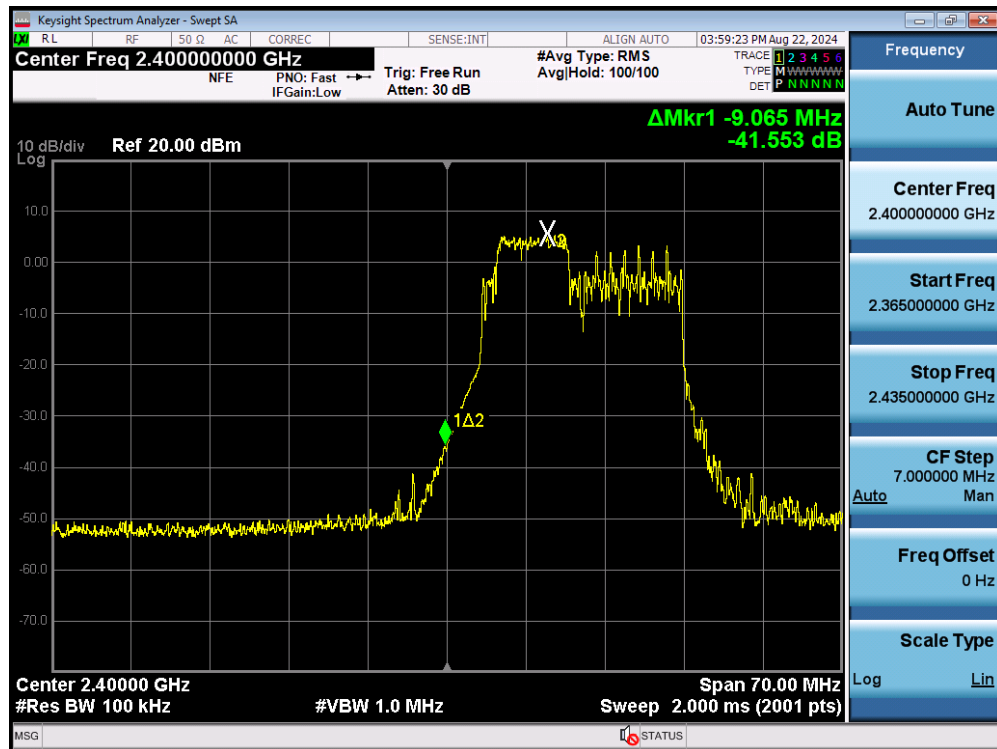


Plot 7-73. Band Edge Plot MIMO ANT2 (802.11be OFDMA – 52+26 Tones – Ch. 1)

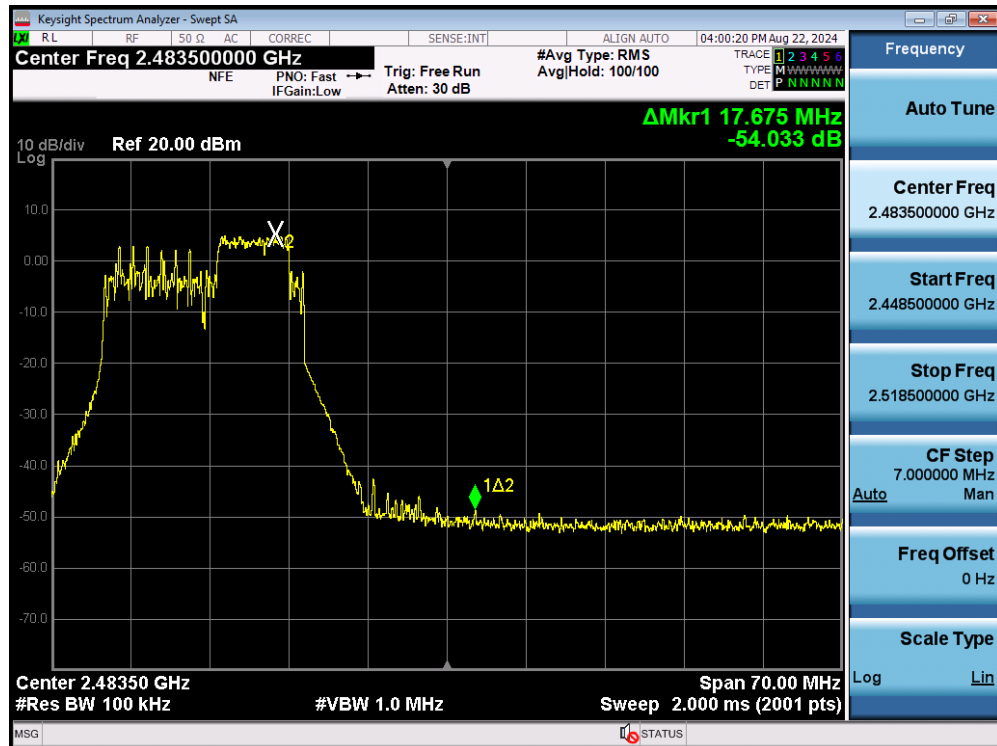


Plot 7-74. Band Edge Plot MIMO ANT2 (802.11be OFDMA – 52+26 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 62 of 109

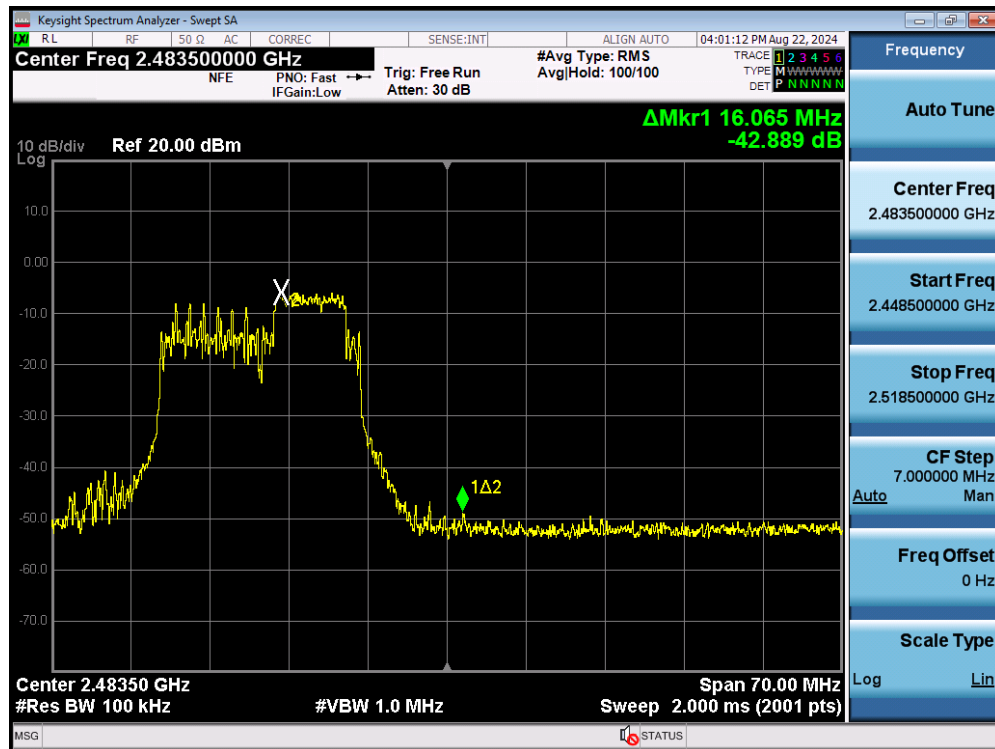


Plot 7-75. Band Edge Plot MIMO ANT2 (802.11be OFDMA – 52+26 Tones – Ch. 12)

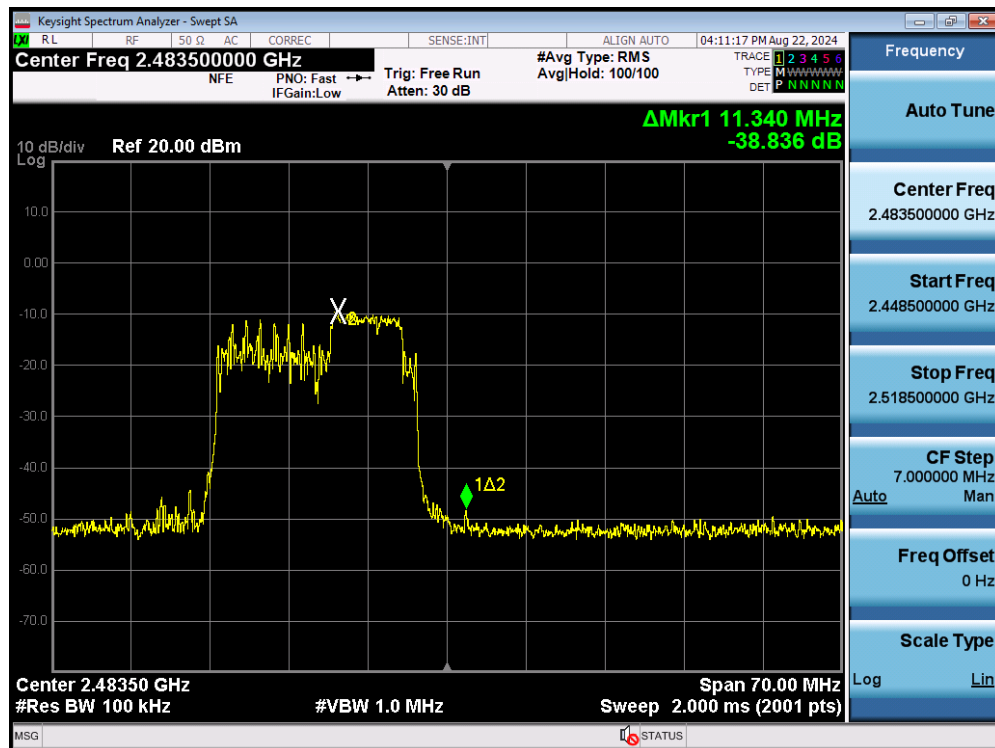


Plot 7-76. Band Edge Plot MIMO ANT2 (802.11be OFDMA – 52+26 Tones – Ch. 13)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 63 of 109

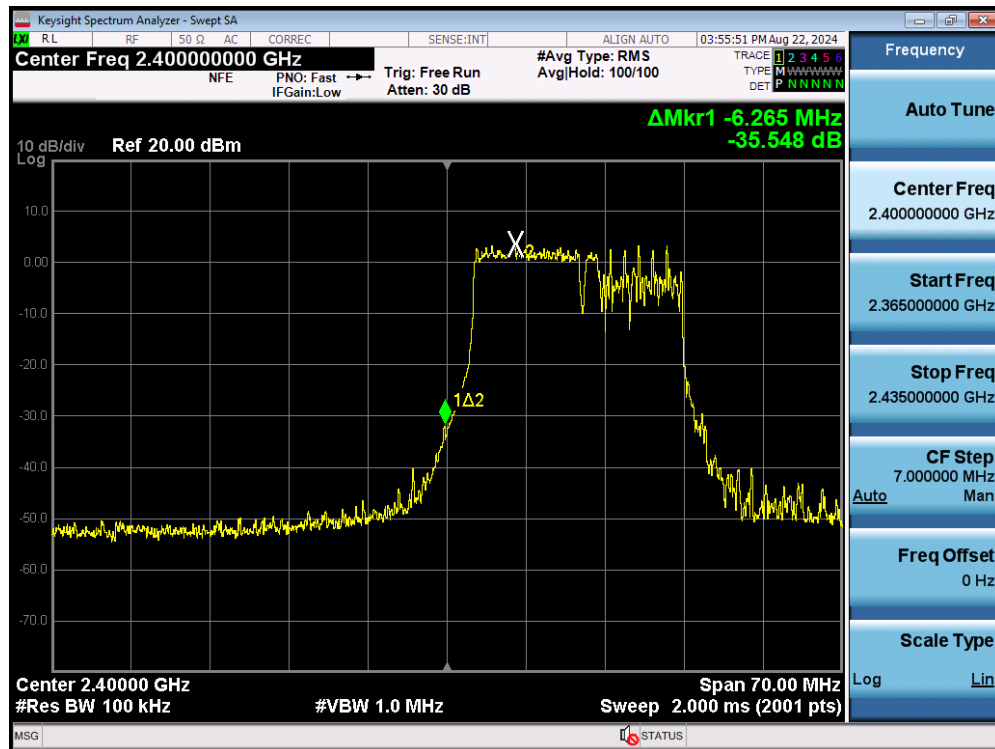



Plot 7-77. Band Edge Plot MIMO ANT2 (802.11be OFDMA – 106+26 Tones – Ch. 1)

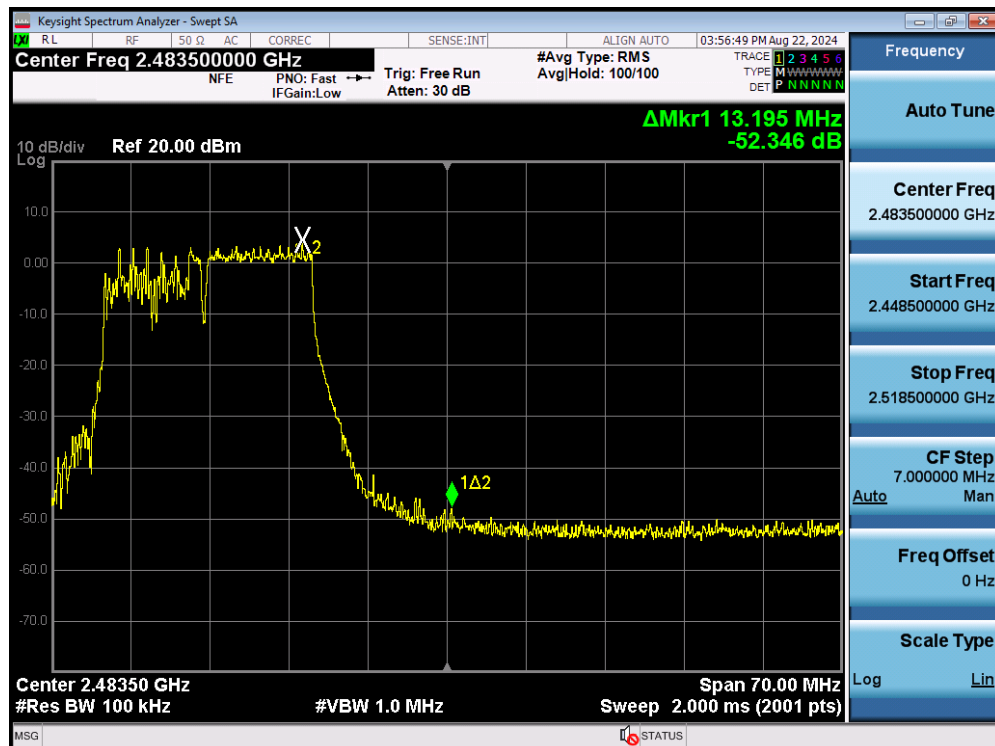


Plot 7-78. Band Edge Plot MIMO ANT2 (802.11be OFDMA – 106+26 Tones – Ch. 11)


FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 64 of 109

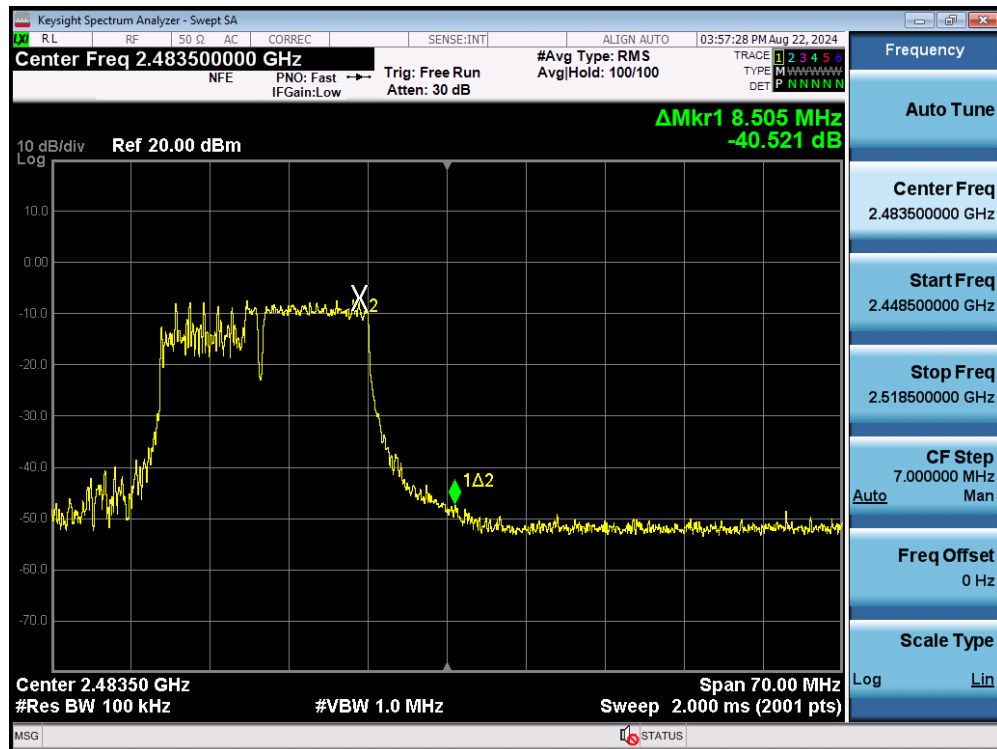

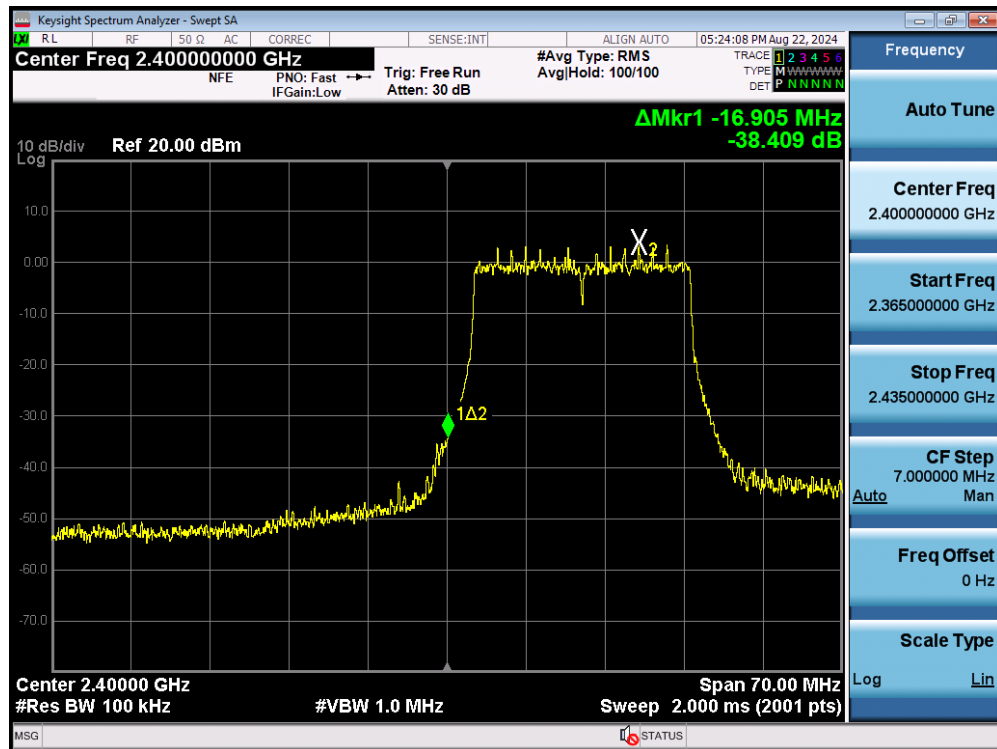

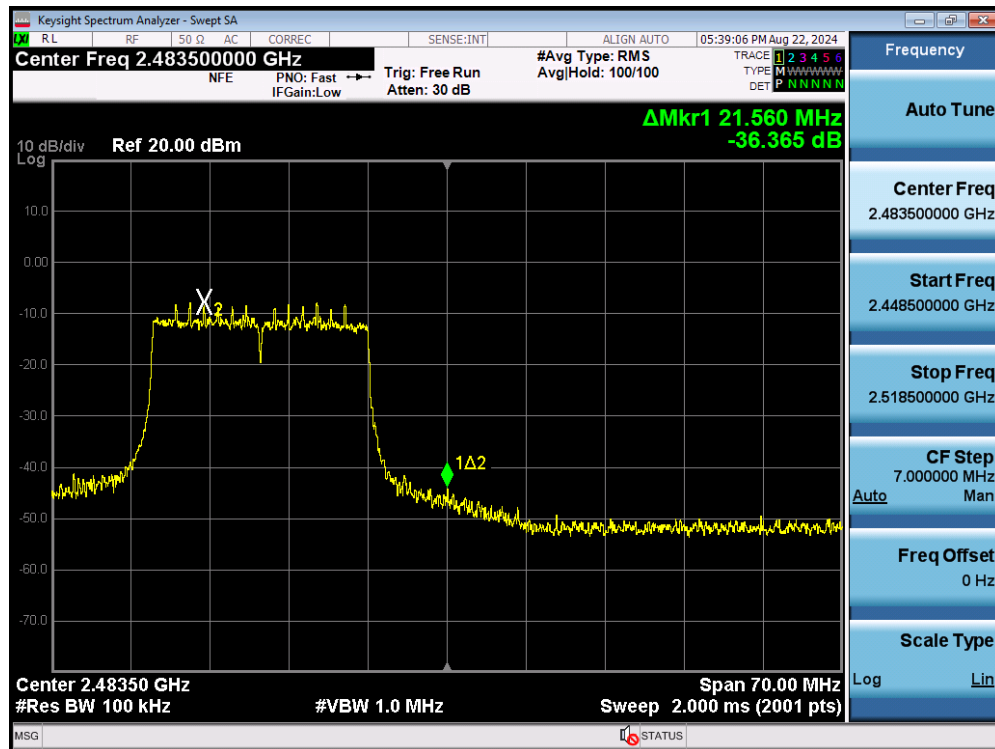

Plot 7-83. Band Edge Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 12)

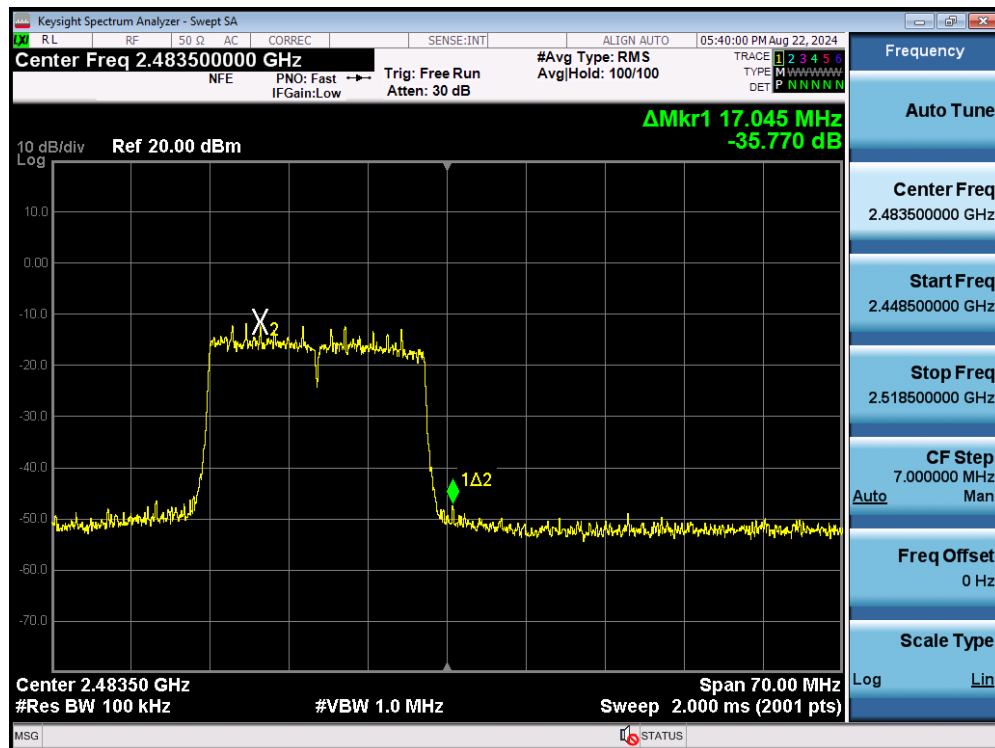

Plot 7-84. Band Edge Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 13)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 67 of 109

7.6 Conducted Spurious Emissions

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tone configurations, and RU indices were investigated to determine the worst-case configuration. For the following out of band conducted emissions plots, the EUT was set to a data rate of MCS0 in 802.11ax mode as this setting produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 30 dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.11.3 of ANSI C63.10-2013.

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
ANSI C63.10-2013 – Section 14.3.3

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. Test Instrument & Measurement Setup


FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 68 of 109

Test Notes


1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30 dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 30 dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The conducted spurious emissions were measured to relative limits. Therefore, in accordance with ANSI C63.10-2013 Section 14.3.3, it was unnecessary to show compliance through the summation of test results of the individual outputs.

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 69 of 109

7.6.1 SISO Antenna-2 Conducted Spurious Emission

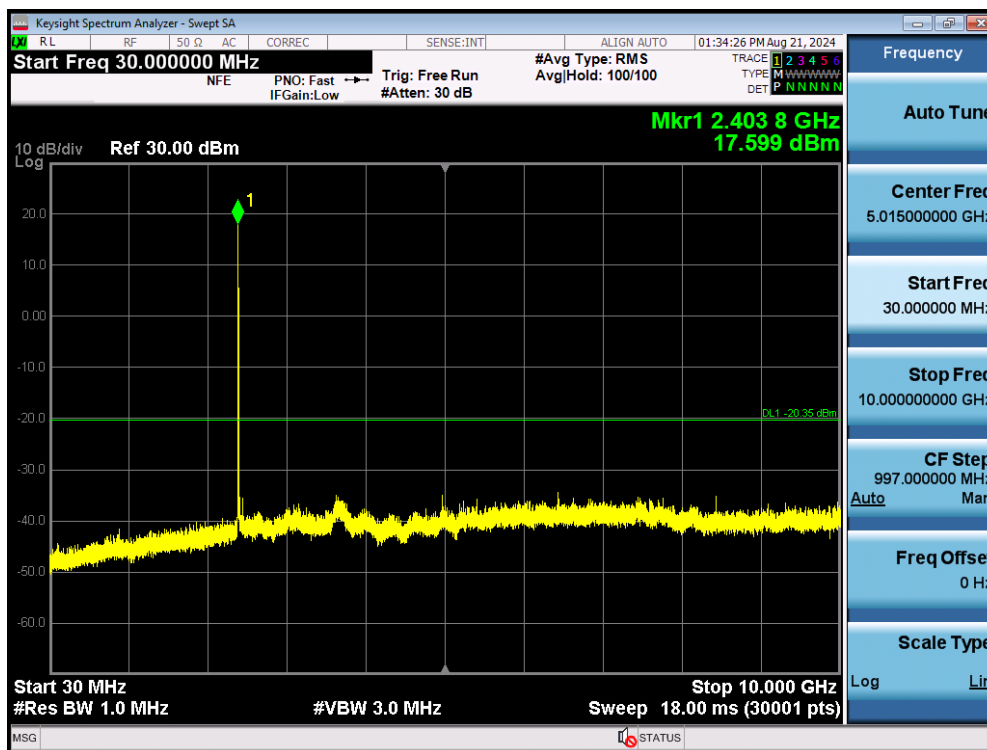


Plot 7-85. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 1)

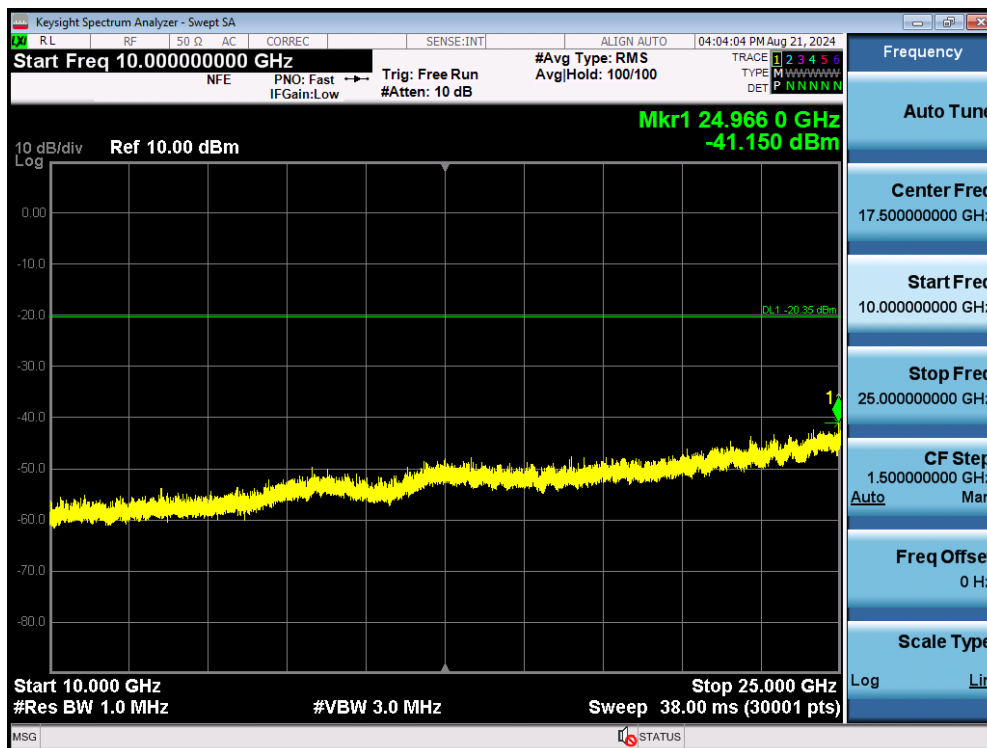


Plot 7-86. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 1)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 70 of 109

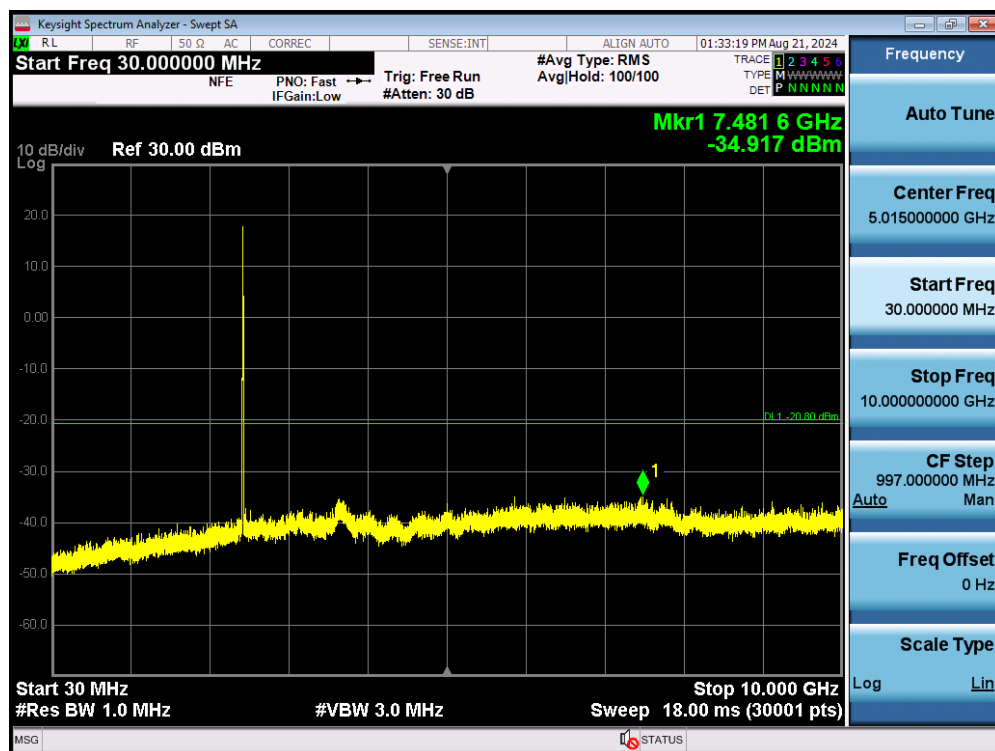


Plot 7-87. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 6)

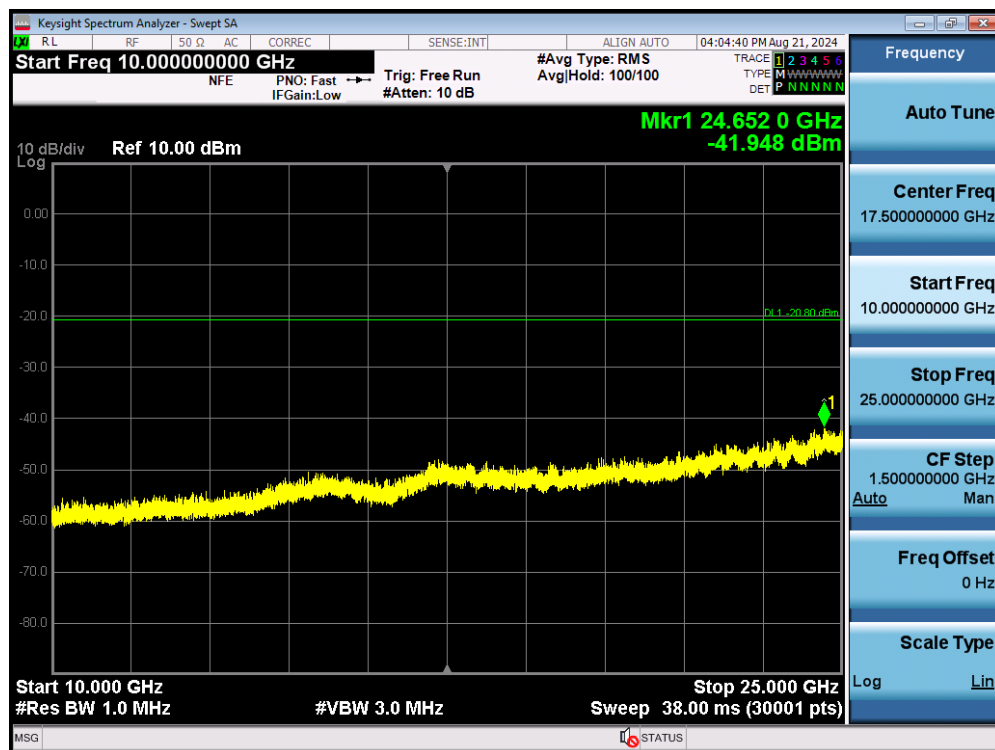


Plot 7-88. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 6)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 71 of 109

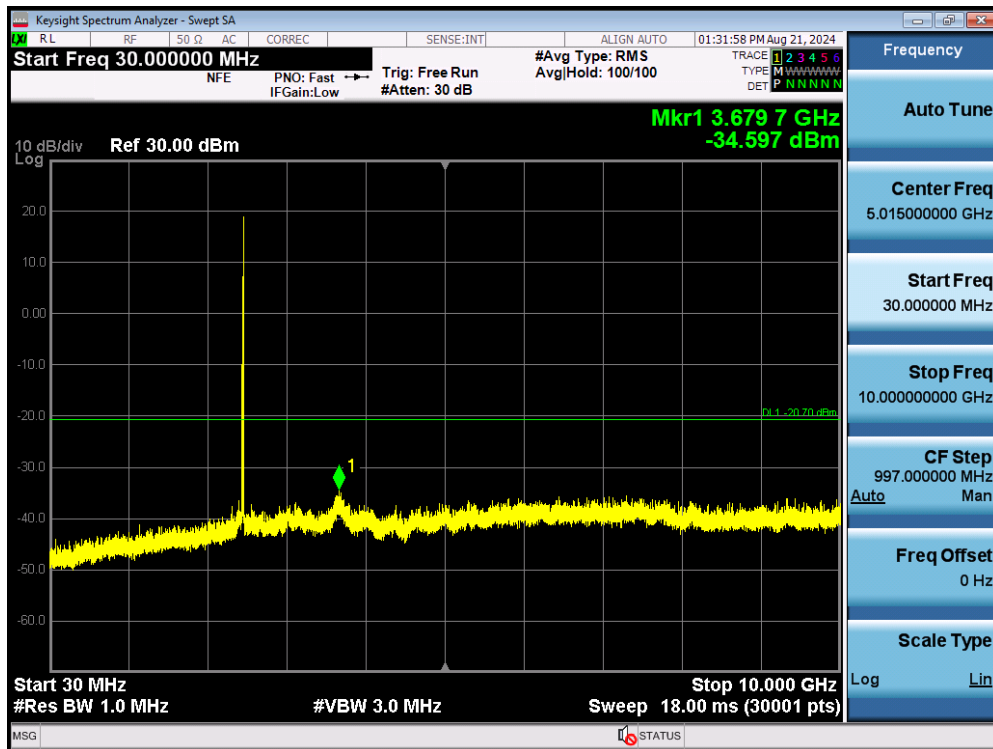


Plot 7-89. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 11)

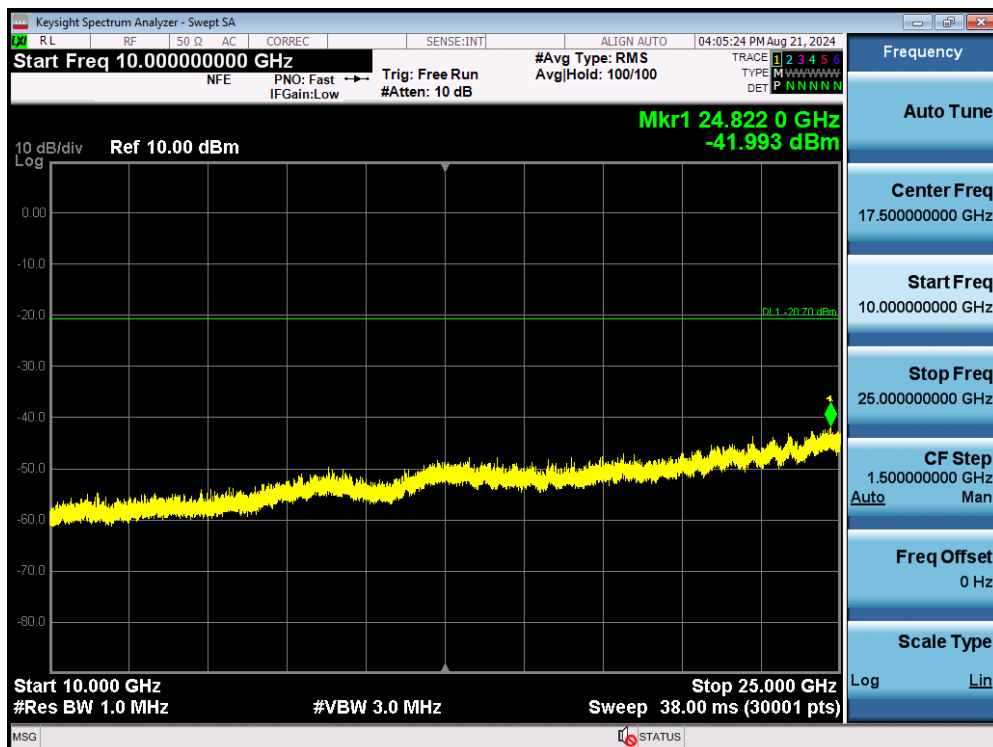


Plot 7-90. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 11)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 72 of 109

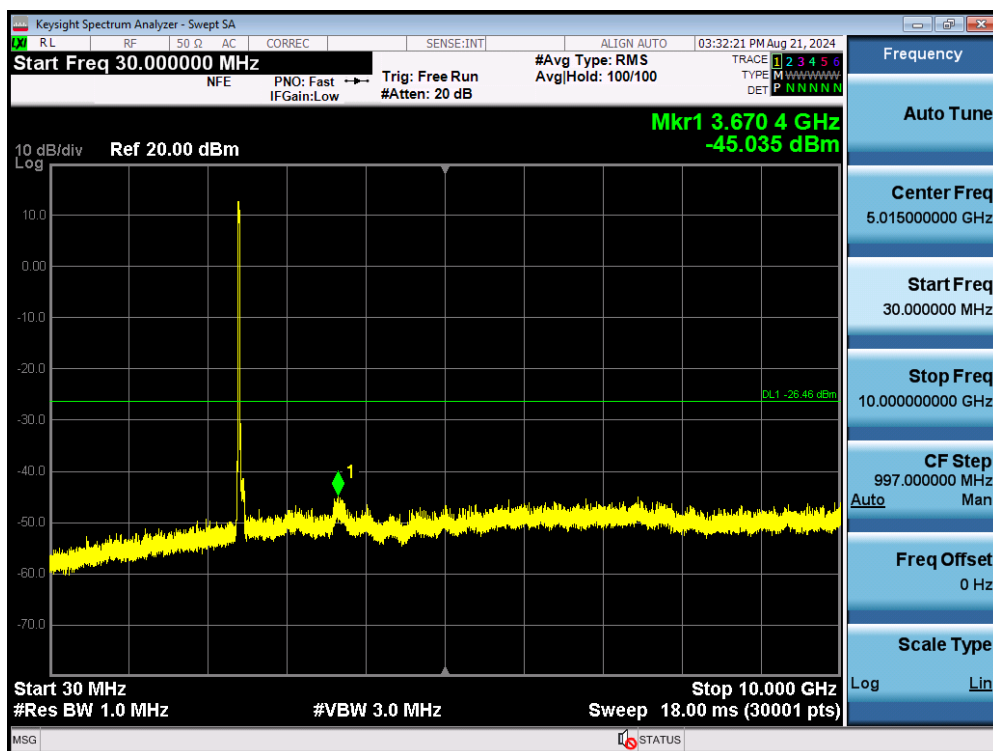

Plot 7-91. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 1)

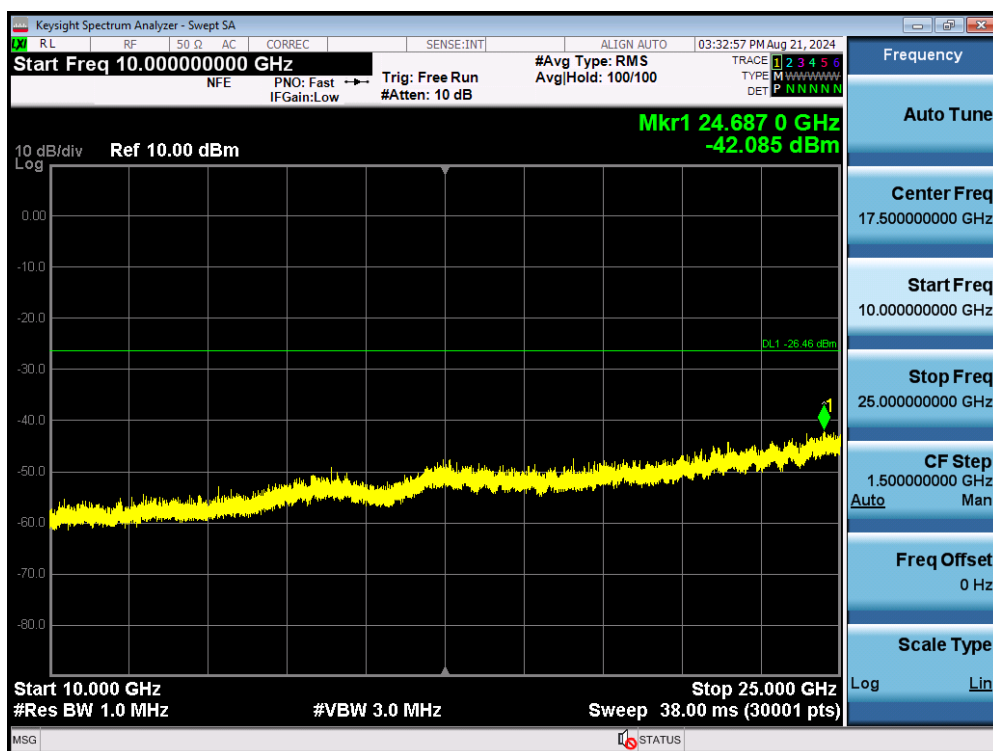

Plot 7-92. Conducted Spurious Plot SISO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 1)

FCC ID: A3LNP750XQA	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407080057-05.A3L	Test Dates: 07/15/2024 – 08/27/2024	EUT Type: Portable Computing Device	Page 73 of 109