




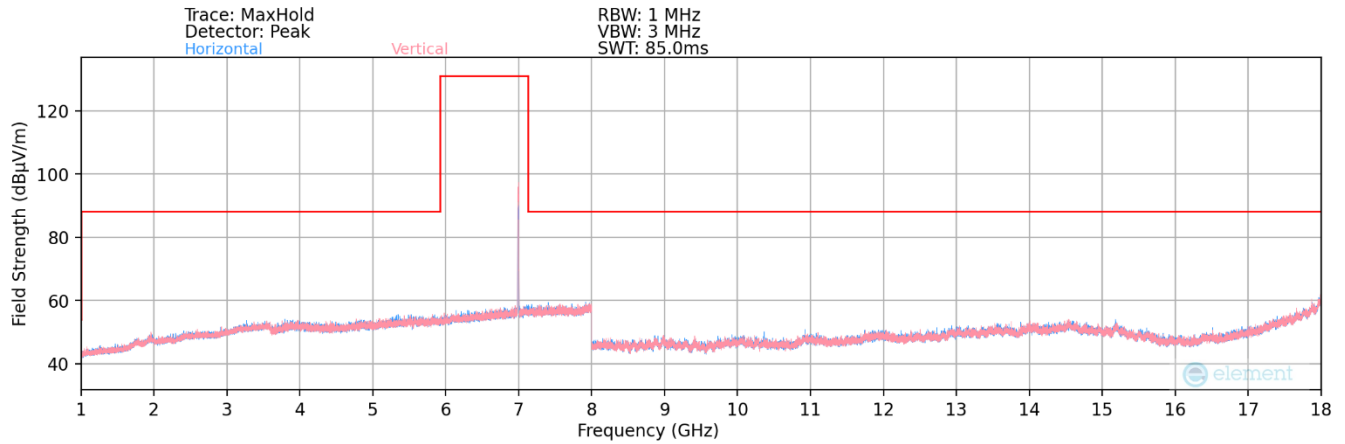

Plot 7-94. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 8 Ch. 209)

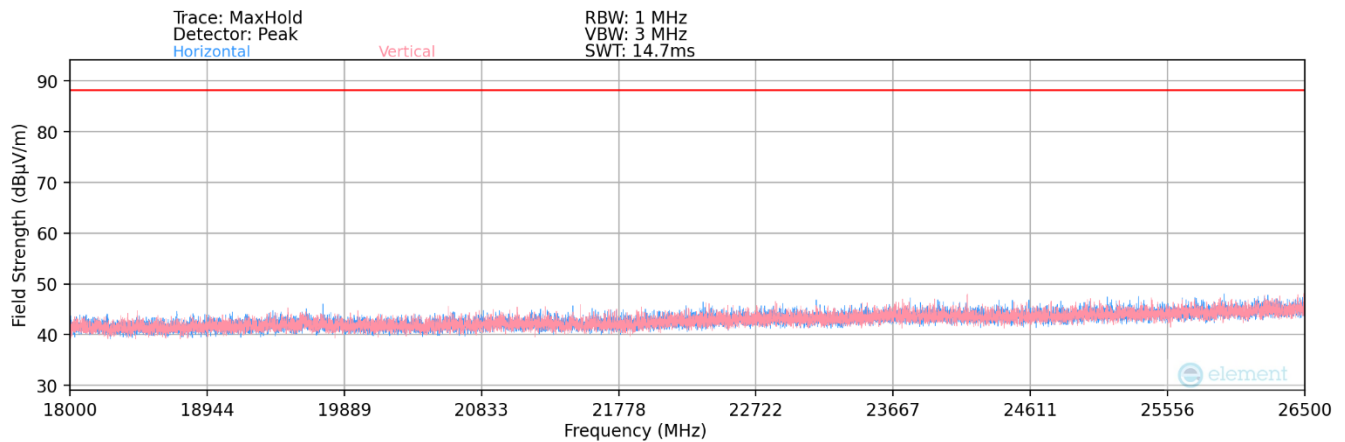

Plot 7-95. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax) – Ch. 149

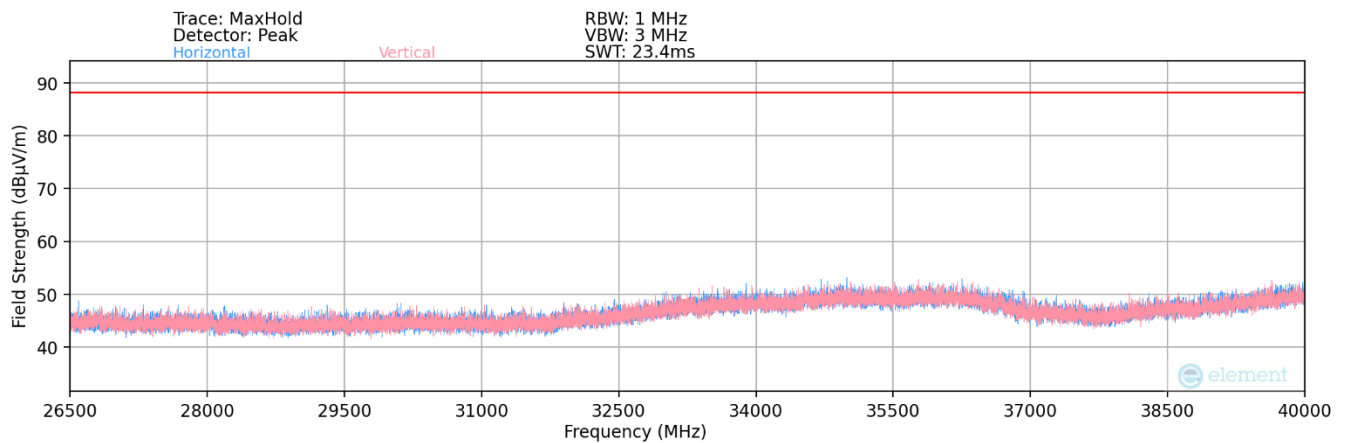

Plot 7-96. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax) – Ch. 149

FCC ID: A3LNP750XQA IC: 649E-NP750XQA	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130047-03.A3L	Test Dates: 05/19/25 - 06/06/25	EUT Type: Portable Computing Device	Page 93 of 108

7.6.2.1 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 5

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11be RU 242T	MIMO	5	2	5935	61	*	11870.00	Average	V	-	-	-78.55	9.86	0.00	38.31	53.98	-15.67
						*	11870.00	Peak	V	-	-	-69.12	9.86	0.00	47.74	73.98	-26.24
						*	17805.00	Average	V	-	-	-77.48	17.15	0.00	46.67	53.98	-7.31
						*	17805.00	Peak	V	-	-	-68.65	17.15	0.00	55.50	73.98	-18.48
						*	23740.00	Average	V	-	-	-65.86	4.02	-9.54	35.62	53.98	-18.36
						*	23740.00	Peak	V	-	-	-56.94	4.02	-9.54	44.54	73.98	-29.44
				29675.00	Peak	V	-	-	-56.20	5.01	-9.54	46.27	68.20	-21.93			
			45	6175	61	*	8234.00	Average	V	-	-	-78.99	5.17	0.00	33.18	53.98	-20.80
						*	8234.00	Peak	V	-	-	-66.74	5.17	0.00	45.43	73.98	-28.55
						*	12350.00	Average	V	-	-	-79.46	9.79	-9.54	27.79	53.98	-26.19
						*	12350.00	Peak	V	-	-	-66.80	9.79	-9.54	40.45	73.98	-33.53
						*	18525.00	Average	V	-	-	-64.25	1.00	-9.54	34.21	53.98	-19.77
						*	18525.00	Peak	V	-	-	-54.68	1.00	-9.54	43.78	73.98	-30.20
				24700.00	Peak	V	-	-	-56.31	4.23	-9.54	45.38	68.20	-22.82			
				30875.00	Peak	V	-	-	-56.45	5.66	-9.54	46.67	68.20	-21.53			
			93	6415	61		12830.00	Peak	V	-	-	-69.54	10.56	0.00	48.02	68.20	-20.18
						*	19245.00	Average	V	-	-	-55.93	1.74	-9.54	43.27	53.98	-10.71
						*	19245.00	Peak	V	-	-	-56.84	1.74	-9.54	42.36	73.98	-31.62
							25660.00	Peak	V	-	-	-55.96	4.69	-9.54	46.19	68.20	-22.01
							32075.00	Peak	V	-	-	-56.48	6.47	-9.54	47.45	68.20	-20.75

Table 7-31. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LNP750XQA IC: 649E-NP750XQA	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130047-03.A3L	Test Dates: 05/19/25 - 06/06/25	EUT Type: Portable Computing Device	Page 94 of 108

7.6.2.2 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 6

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11be RU 242T	MIMO	6	97	6435	61		12870.00	Peak	V	-	-	-69.52	10.44	0.00	47.92	68.20	-20.28
						*	19305.00	Average	V	-	-	-65.34	1.65	-9.54	33.77	53.98	-20.21
						*	19305.00	Peak	V	-	-	-56.28	1.65	-9.54	42.83	73.98	-31.15
							25740.00	Peak	V	-	-	-55.48	4.71	-9.54	46.69	68.20	-21.51
							32175.00	Peak	V	-	-	-57.84	6.76	-9.54	46.38	68.20	-21.82
			105	6475	61		12950.00	Peak	V	-	-	-66.18	10.78	0.00	51.60	68.20	-16.60
						*	19425.00	Average	V	-	-	-66.85	1.76	-9.54	32.37	53.98	-21.61
						*	19425.00	Peak	V	-	-	-57.04	1.76	-9.54	42.18	73.98	-31.80
							25900.00	Peak	V	-	-	-55.85	4.78	-9.54	46.39	68.20	-21.81
							32375.00	Peak	V	-	-	-56.48	6.56	-9.54	47.54	68.20	-20.66
			113	6515	61		13030.00	Peak	V	-	-	-69.52	10.87	0.00	48.35	68.20	-19.85
						*	19545.00	Average	V	-	-	-65.48	1.89	-9.54	33.87	53.98	-20.11
						*	19545.00	Peak	V	-	-	-56.94	1.89	-9.54	42.41	73.98	-31.57
							26060.00	Peak	V	-	-	-56.03	4.92	-9.54	46.35	68.20	-21.85
							32575.00	Peak	V	-	-	-55.89	6.76	-9.54	48.33	68.20	-19.87

Table 7-32. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LNP750XQA IC: 649E-NP750XQA	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130047-03.A3L	Test Dates: 05/19/25 - 06/06/25	EUT Type: Portable Computing Device	Page 95 of 108

7.6.2.3 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 7

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11be RU 242T	MIMO	7	117	6535	61		13070.00	Peak	V	-	-	-70.33	10.96	0.00	47.63	68.20	-20.57
						*	19605.00	Average	V	-	-	-65.34	2.20	-9.54	34.32	53.98	-19.66
						*	19605.00	Peak	V	-	-	-54.89	2.20	-9.54	44.77	73.98	-29.21
							26140.00	Peak	V	-	-	-56.31	4.98	-9.54	46.13	68.20	-22.07
							32675.00	Peak	V	-	-	-56.68	7.14	-9.54	47.92	68.20	-20.28
			149	6695	61	*	13390.00	Average	V	-	-	-78.55	11.06	0.00	39.51	53.98	-14.47
						*	13390.00	Peak	V	-	-	-65.95	11.06	0.00	52.11	73.98	-21.87
						*	20085.00	Peak	V	-	-	-65.48	2.07	-9.54	34.05	53.98	-19.93
						*	20085.00	Average	V	-	-	-56.82	2.07	-9.54	42.71	73.98	-31.27
							26780.00	Peak	V	-	-	-55.41	5.18	-9.54	47.23	68.20	-20.97
							33475.00	Peak	V	-	-	-55.83	8.48	-9.54	50.12	68.20	-18.08
			185	6875	61		13750.00	Peak	V	-	-	-68.62	11.75	0.00	50.13	68.20	-18.07
						*	20625.00	Average	V	-	-	-65.61	2.36	-9.54	34.21	53.98	-19.77
						*	20625.00	Peak	V	-	-	-56.84	2.36	-9.54	42.98	73.98	-31.00
							27500.00	Peak	V	-	-	-56.50	5.00	-9.54	45.97	68.20	-22.23
							34375.00	Peak	V	-	-	-56.88	9.46	-9.54	50.04	68.20	-18.16

Table 7-33. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LNP750XQA IC: 649E-NP750XQA	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130047-03.A3L	Test Dates: 05/19/25 - 06/06/25	EUT Type: Portable Computing Device	Page 96 of 108

7.6.2.4 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 8


Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11be RU 242T	MIMO	8	189	6895	61		13790.00	Peak	V	-	-	-68.62	11.61	0.00	49.99	68.20	-18.21
						*	20685.00	Average	V	-	-	-64.89	2.33	-9.54	34.90	53.98	-19.08
						*	20685.00	Peak	V	-	-	-56.12	2.33	-9.54	43.67	73.98	-30.31
							27580.00	Peak	V	-	-	-56.32	5.33	-9.54	46.47	68.20	-21.73
							34475.00	Peak	V	-	-	-56.48	9.33	-9.54	50.31	68.20	-17.89
			209	6995	61		13990.00	Peak	V	-	-	-66.00	11.81	0.00	52.81	68.20	-15.39
						*	20985.00	Average	V	-	-	-65.23	2.83	-9.54	35.06	53.98	-18.92
						*	20985.00	Peak	V	-	-	-56.54	2.83	-9.54	43.75	73.98	-30.23
							27980.00	Peak	V	-	-	-56.41	5.30	-9.54	46.35	68.20	-21.85
							34975.00	Peak	V	-	-	-57.81	9.79	-9.54	49.44	68.20	-18.76
			233	7115	61		14230.00	Peak	V	-	-	-69.33	12.55	0.00	50.22	68.20	-17.98
						*	21345.00	Average	V	-	-	-65.23	2.85	-9.54	35.08	53.98	-18.90
						*	21345.00	Peak	V	-	-	-56.61	2.85	-9.54	43.70	73.98	-30.28
							28460.00	Peak	V	-	-	-56.28	5.34	-9.54	46.52	68.20	-21.68
							35575.00	Peak	V	-	-	-56.48	9.53	-9.54	50.51	68.20	-17.69

Table 7-34. Radiated Measurements MIMO (242 Tones)


FCC ID: A3LNP750XQA IC: 649E-NP750XQA	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130047-03.A3L	Test Dates: 05/19/25 - 06/06/25	EUT Type: Portable Computing Device	Page 97 of 108

7.6.3 MIMO Radiated Band Edge Measurements (20MHz BW – Partial Tone – 106T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	53
Distance of Measurements:	3 Meters
Operating Frequency:	5935MHz
Channel:	2

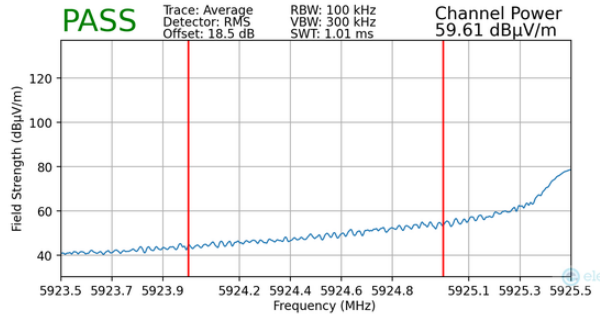


Plot 7-97. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 106T)

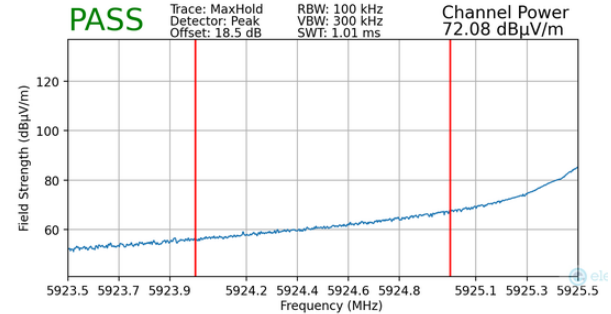


Plot 7-98. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 106T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	54
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

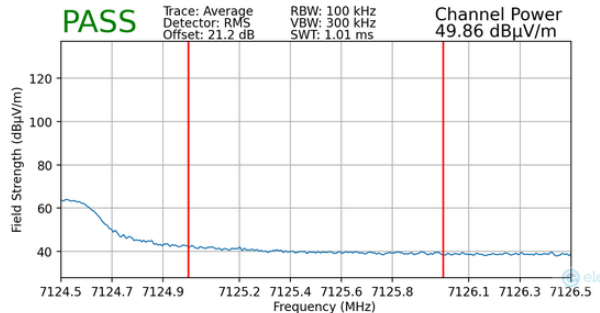

Plot 7-99. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 106T)

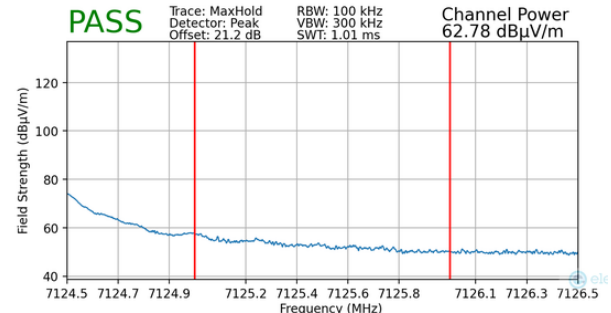


Plot 7-100. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 106T)


FCC ID: A3LNP750XQA IC: 649E-NP750XQA	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130047-03.A3L	Test Dates: 05/19/25 - 06/06/25	EUT Type: Portable Computing Device	Page 98 of 108

7.6.4 MIMO Radiated Band Edge Measurements (20MHz BW – MRU – 106+26T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	82
Distance of Measurements:	3 Meters
Operating Frequency:	5935MHz
Channel:	2

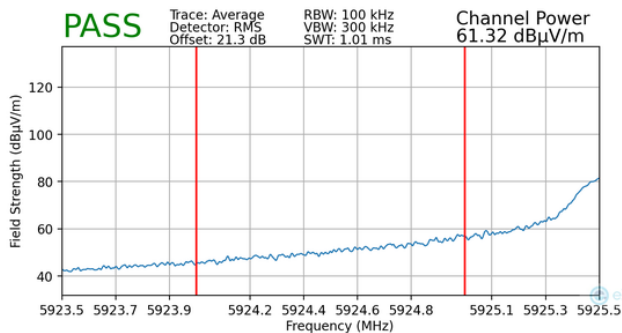


Plot 7-101. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 106+26T)

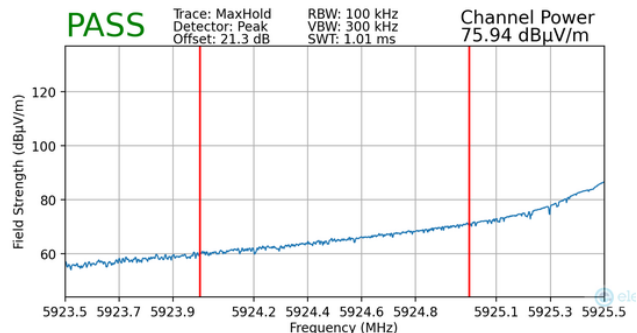


Plot 7-102. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 106+26T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	82
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

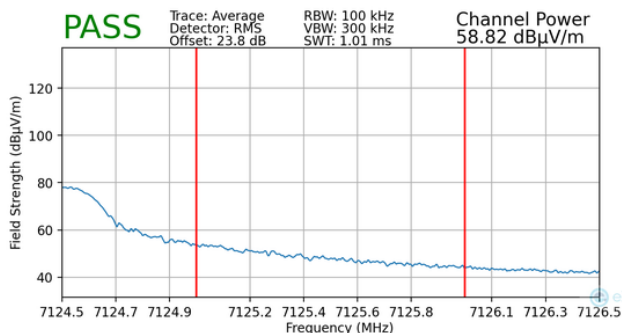

Plot 7-103. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 106+26T)

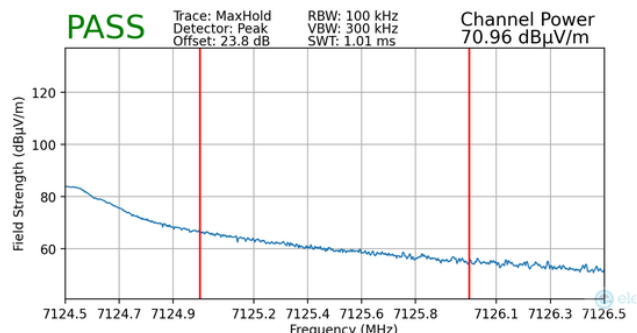


Plot 7-104. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 106+26T)


FCC ID: A3LNP750XQA IC: 649E-NP750XQA	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130047-03.A3L	Test Dates: 05/19/25 - 06/06/25	EUT Type: Portable Computing Device	Page 99 of 108

7.6.5 MIMO Radiated Band Edge Measurements (20MHz BW – Full Tone – 242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	5935MHz
Channel:	2

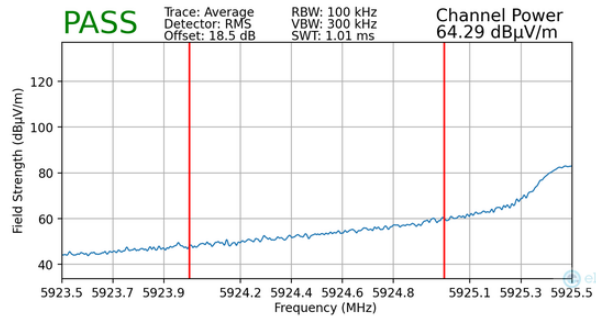


Plot 7-105. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 242T)

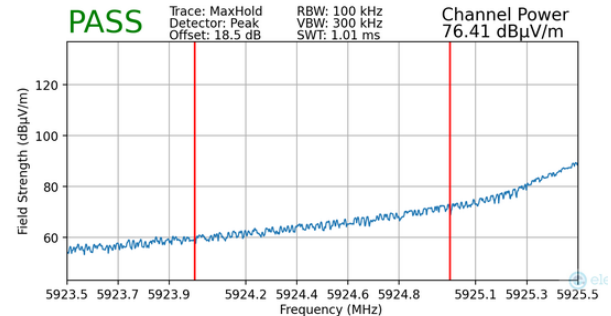


Plot 7-106. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

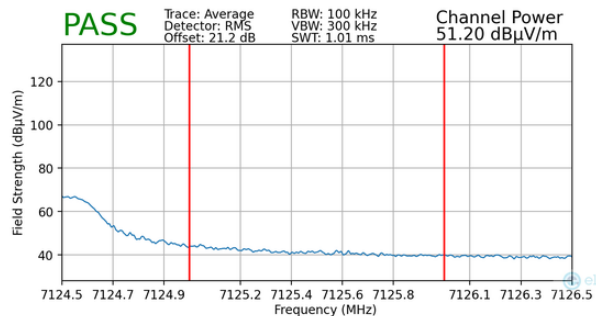

Plot 7-107. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 242T)

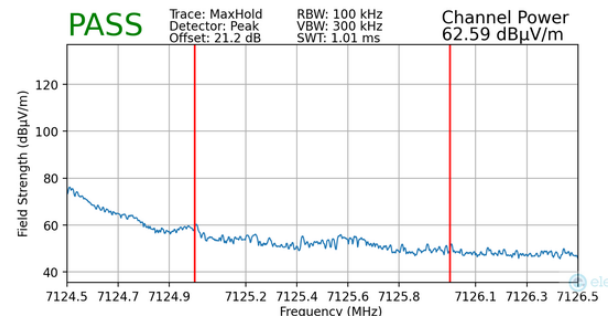


Plot 7-108. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 242T)


FCC ID: A3LNP750XQA IC: 649E-NP750XQA	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130047-03.A3L	Test Dates: 05/19/25 - 06/06/25	EUT Type: Portable Computing Device	Page 100 of 108

7.6.6 MIMO Radiated Band Edge Measurements (40MHz BW – Full Tone – 484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	65
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

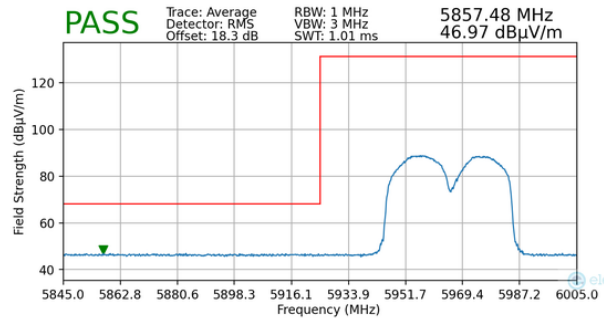


Plot 7-109. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 484T)

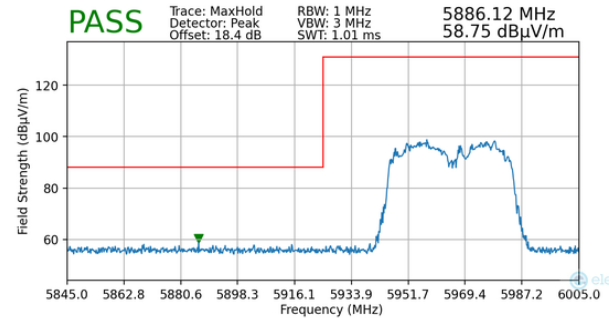


Plot 7-110. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	65
Distance of Measurements:	3 Meters
Operating Frequency:	7085MHz
Channel:	227

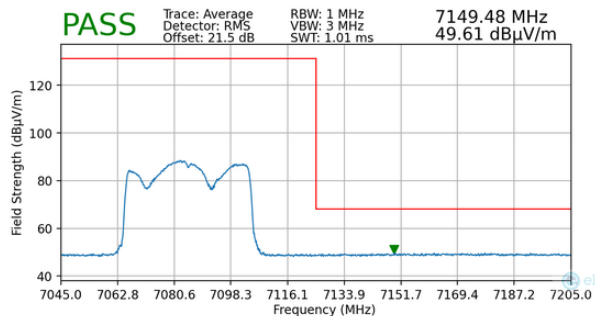

Plot 7-111. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 484T)

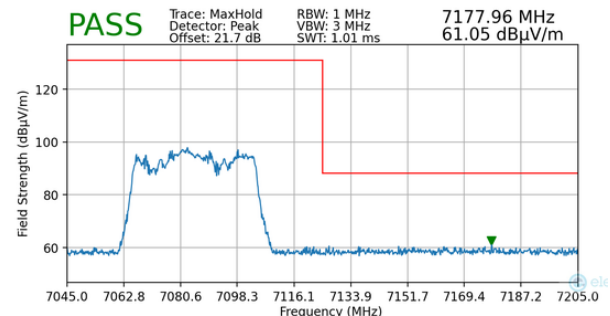


Plot 7-112. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 484T)


FCC ID: A3LNP750XQA IC: 649E-NP750XQA	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130047-03.A3L	Test Dates: 05/19/25 - 06/06/25	EUT Type: Portable Computing Device	Page 101 of 108

7.6.7 MIMO Radiated Band Edge Measurements (80MHz BW – Full Tone – 996T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	67
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

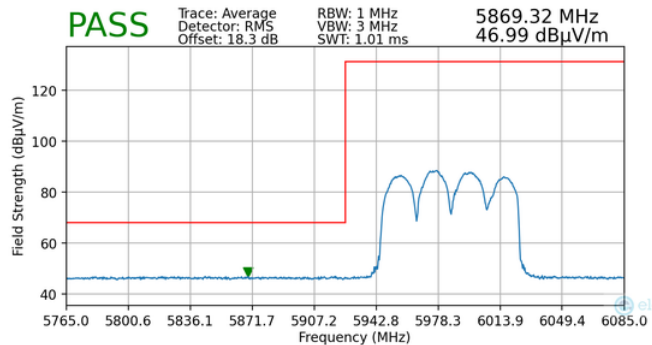


Plot 7-113. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 996T)

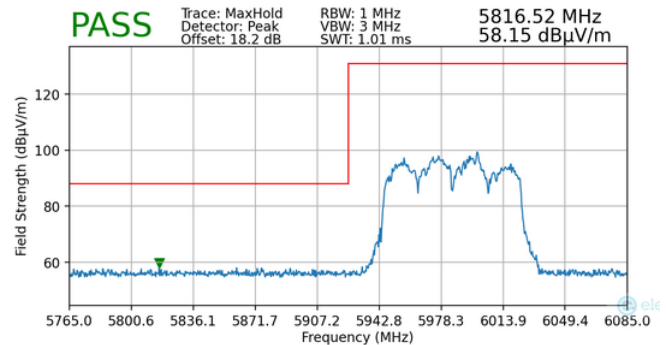


Plot 7-114. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 996T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	67
Distance of Measurements:	3 Meters
Operating Frequency:	7025MHz
Channel:	215

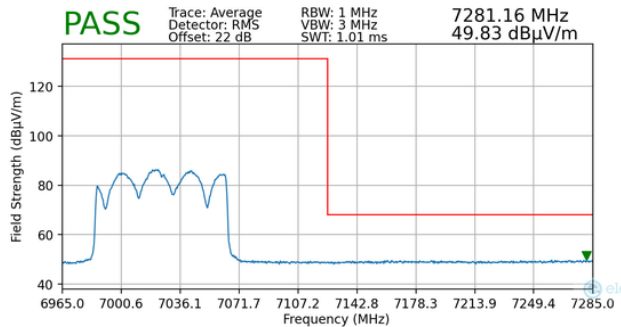

Plot 7-115. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 996T)

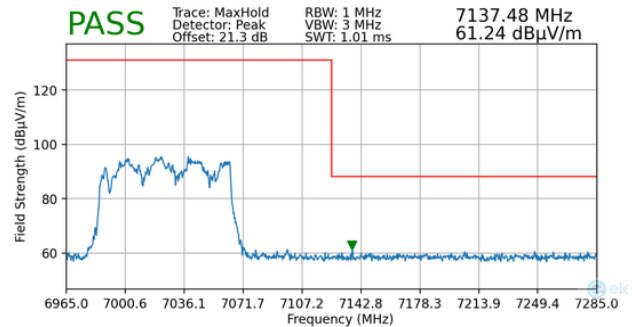


Plot 7-116. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 996T)


FCC ID: A3LNP750XQA IC: 649E-NP750XQA	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130047-03.A3L	Test Dates: 05/19/25 - 06/06/25	EUT Type: Portable Computing Device	Page 102 of 108

7.6.8 MIMO Radiated Band Edge Measurements (80MHz BW – MRU – 484+242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	91
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

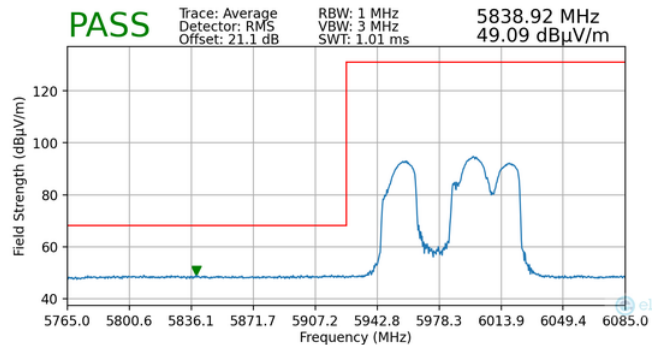


Plot 7-117. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 484+242T)

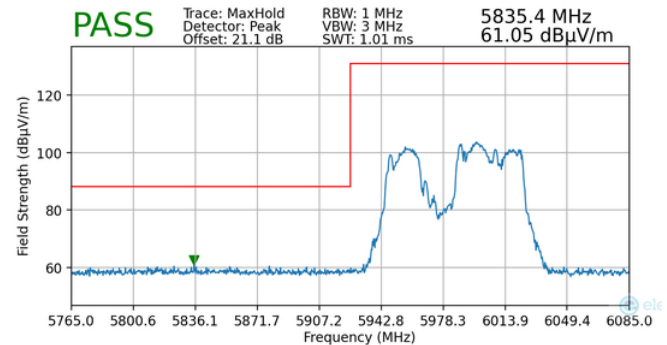


Plot 7-118. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 484+242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	91
Distance of Measurements:	3 Meters
Operating Frequency:	7025MHz
Channel:	233

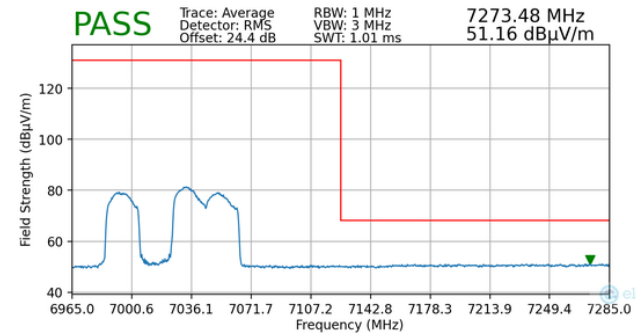

Plot 7-119. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 484+242T)

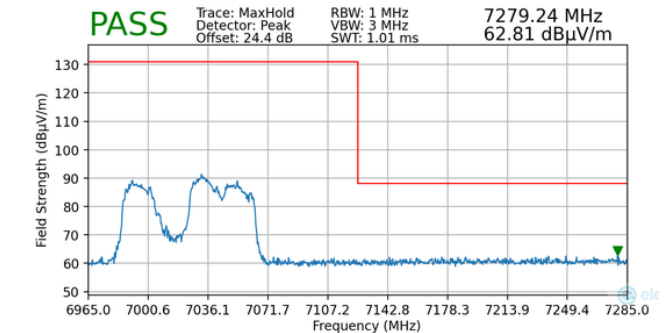


Plot 7-120. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 484+242T)


FCC ID: A3LNP750XQA IC: 649E-NP750XQA	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130047-03.A3L	Test Dates: 05/19/25 - 06/06/25	EUT Type: Portable Computing Device	Page 103 of 108

7.6.9 MIMO Radiated Band Edge Measurements (160MHz BW – Full Tone – 2x996T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	68
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

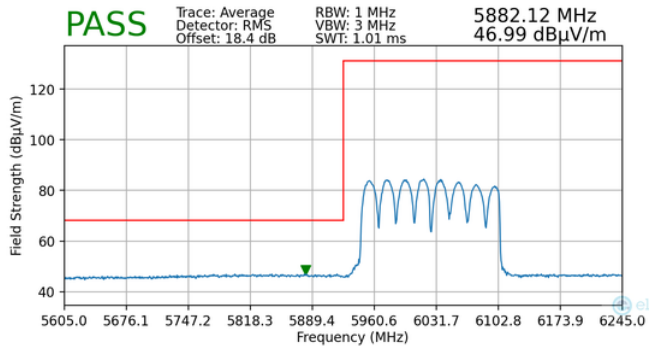


Plot 7-121. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 2x996T)

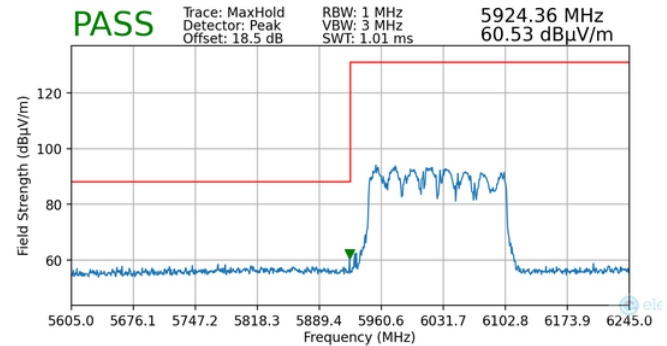


Plot 7-122. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 2x996T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	68
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	207

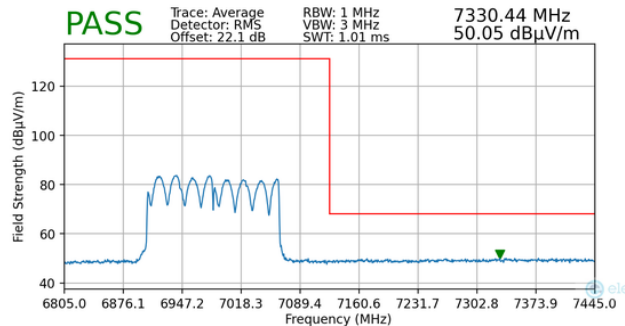

Plot 7-123. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 2x996T)

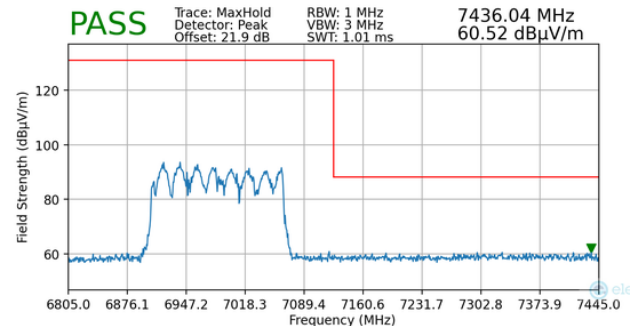


Plot 7-124. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 2x996T)


FCC ID: A3LNP750XQA IC: 649E-NP750XQA	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130047-03.A3L	Test Dates: 05/19/25 - 06/06/25	EUT Type: Portable Computing Device	Page 104 of 108

7.6.10 MIMO Radiated Band Edge Measurements (160MHz BW – MRU – 996+484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	1094
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

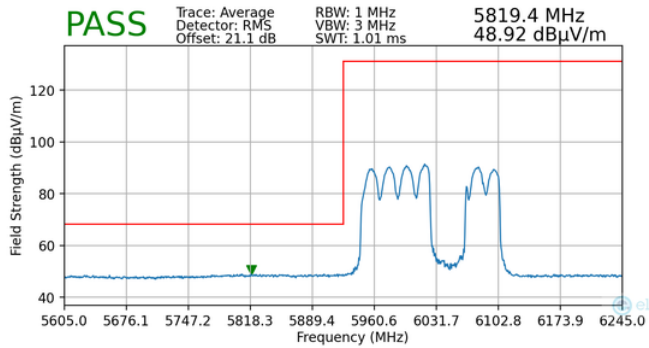


Plot 7-125. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 996+484T)

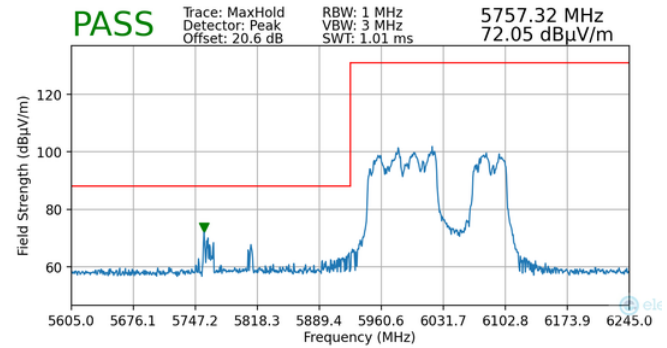


Plot 7-126. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 996+484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	1095
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

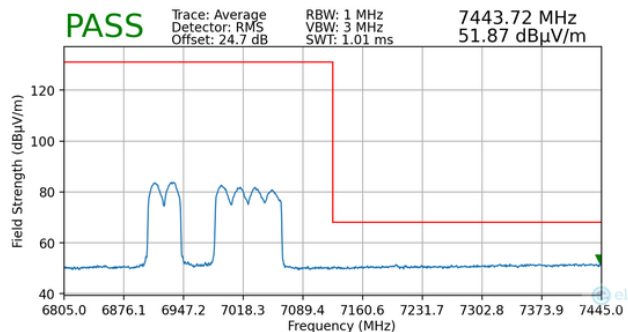

Plot 7-127. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 996+484T)

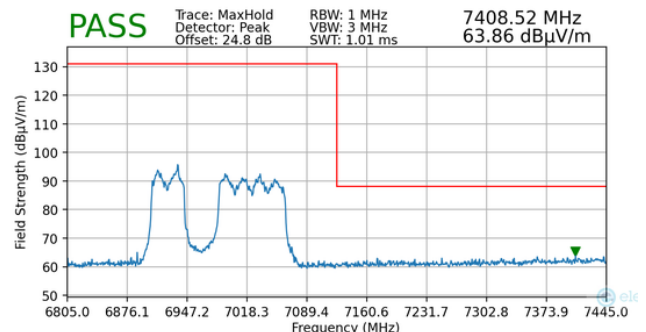


Plot 7-128. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 996+484T)


FCC ID: A3LNP750XQA IC: 649E-NP750XQA	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130047-03.A3L	Test Dates: 05/19/25 - 06/06/25	EUT Type: Portable Computing Device	Page 105 of 108

7.6.11 MIMO Radiated Band Edge Measurements (320MHz BW – 2*996T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	68
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

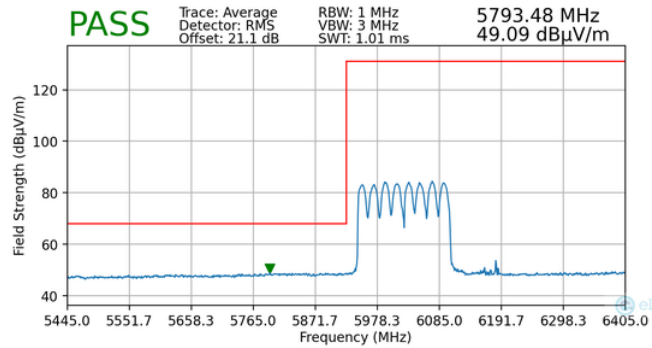


Plot 7-129. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 2*996T)

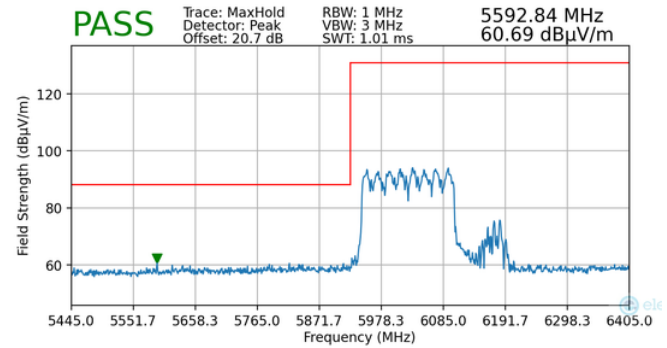


Plot 7-130. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 2*996T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	68
Distance of Measurements:	3 Meters
Operating Frequency:	6905MHz
Channel:	191

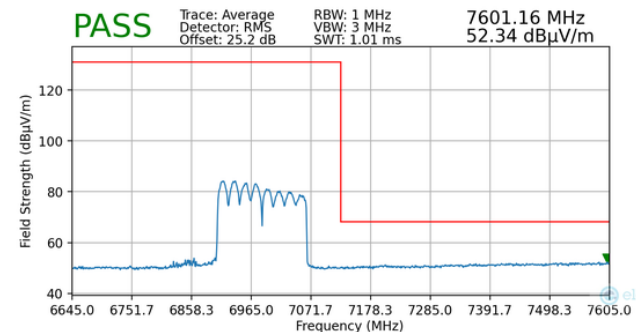

Plot 7-131. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 2*996T)

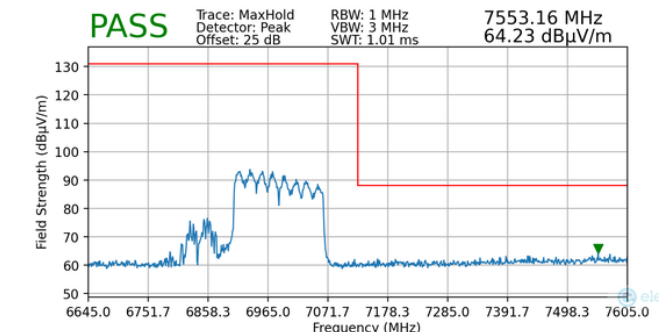


Plot 7-132. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 2*996T)


FCC ID: A3LNP750XQA IC: 649E-NP750XQA	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130047-03.A3L	Test Dates: 05/19/25 - 06/06/25	EUT Type: Portable Computing Device	Page 106 of 108

7.6.12 MIMO Radiated Band Edge Measurements (320MHz BW – MRU – 3*996+484T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	10106
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

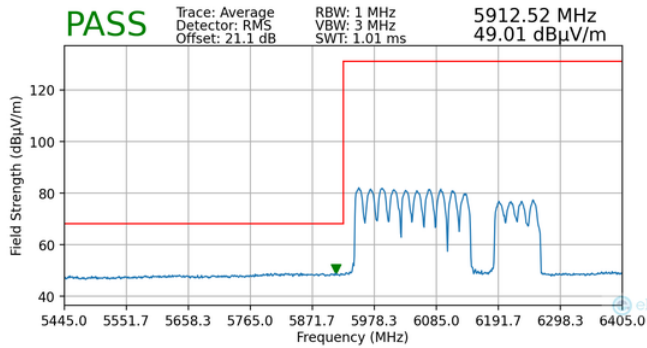


Plot 7-133. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 3*996+484T)

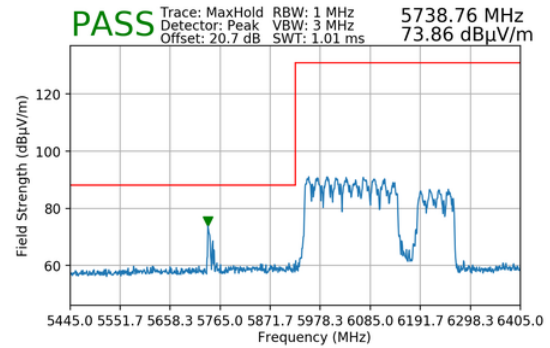


Plot 7-134. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 3*996+484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	106
Distance of Measurements:	3 Meters
Operating Frequency:	6905MHz
Channel:	191

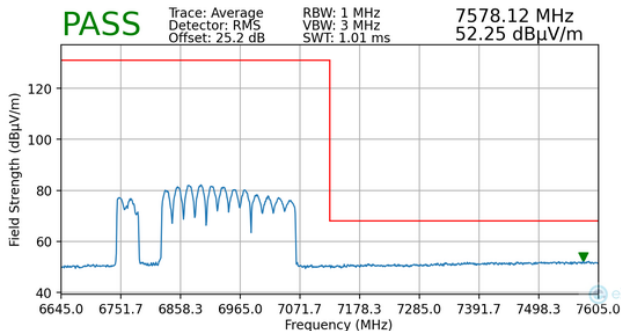

Plot 7-135. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 3*996+484T)

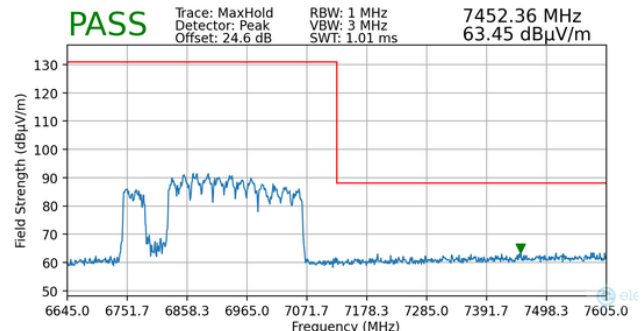

Plot 7-136. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 3*996+484T)

FCC ID: A3LNP750XQA IC: 649E-NP750XQA	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130047-03.A3L	Test Dates: 05/19/25 - 06/06/25	EUT Type: Portable Computing Device	Page 107 of 108

8 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Computing Device FCC ID: A3LNP750XQA, IC: 649E-NP750XQA** is in compliance with FCC Part Subpart E (15.407) of the FCC rules and RSS-248 of the ISED Canada Rules.

FCC ID: A3LNP750XQA IC: 649E-NP750XQA	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130047-03.A3L	Test Dates: 05/19/25 - 06/06/25	EUT Type: Portable Computing Device	Page 108 of 108