

TEST REPORT

Testing laboratory:

SK Tech Co., Ltd.

88, Geulgaetul-ro, 81beon-gil,

Wabu-eup, Namyangju-si,

Gyeonggi-do, Korea

TEL: +82-31-576-2204

FAX: +82-31-576-2205

Test Report Number: SKT-RFC-260002

Date of issue: 2026.1.9

Applicant:

Samsung Electronics Co., Ltd.

Model:

NP960XRD

Add Model:

NP964XRD

FCC ID:

A3LNP960XRD

Project number:

SKTEU25-1464

Date of Testing

2025.11.27 ~ 2026.1.9

Applied standards:

ANSI C63.10-2020

789033 D02 General U-NII Test Procedures New Rules v02r01

905462 D02 UNII DFS Compliance Procedures New Rules v02

Rule parts:

Part 15 Subpart E (15.407)

Equipment Class:

Unlicensed National Information Infrastructure TX (NII)

The above equipment has been tested by SK Tech Co., Ltd., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product or system, which was tested.



MinJae Song / **Testing Engineer**



JungWoo Kim / **Technical Manager**

This report shall not be reproduced except in full, without the written approval of SK Tech Co., Ltd. The client should not use it to claim product endorsement by any government agencies.



Revision History of Test Report

Rev.	Revisions	Effect page	Approved by	Date
-	Initial issue	All	Jungwoo Kim	2026.1.9



Table of Contents

Table of Contents	3
1 Summary of Test Results.....	4
1.1 Measurement Uncertainty	5
2 General Information	6
2.1 General Description of EUT	6
2.2 Antenna Configurations	6
2.3 Tested sample and Tested companion device information	7
2.4 Description of Test Mode	7
2.5 INSTRUMENT CALIBRATION.....	9
2.6 EUT CONFIGURATION.....	9
2.7 General Description of Applied Standards	9
2.8 Information of the Testing Laboratories.....	9
2.9 Test Equipment.....	10
3 Test Results	11
3.1 Antenna Requirement.....	11
3.2 26 dB Bandwidth & 6 dB Bandwidth & 99 % Bandwidth	12
3.3 Maximum Conducted Output Power	54
3.4 Maximum Power Spectral Density	68
3.5 Dynamic Frequency Selection	128
3.6 Duty Cycle.....	135
3.7 Spurious Emission, Band edge and Restricted Bands	137
3.8 AC Conducted Emissions (150 kHz to 30 MHz).....	182



1 Summary of Test Results

The EUT has been tested according to the following specifications

Applied Standard : FCC Part 15, Subpart E 15.407 (UNII)					
FCC Part Section(s)	Test Description	Limit	Test Condition	Test Result	Reference
15.407(e)	26 dB Bandwidth	NA	Conducted	PASS	Section 3.2
15.407(e)	6 dB Bandwidth	> 500 kHz (5725-5850 MHz and 5850-5895 MHz)		PASS	Section 3.2
15.407(a)	Maximum Output Power	Maximum conducted powers must meet the limits detailed in 15.407(a)		PASS	Section 3.3
15.407(a)	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407(a)		PASS	Section 3.4
15.407(h)	DFS	See the section 3.5		PASS	Section 3.5
15.205 15.209 15.407(b)	Undesirable emission	Undesirable emission must meet the limits detailed in 15.407(b)	Radiated	PASS	Section 3.7
15.205 15.209 15.407(b)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 3.7
15.207	AC Conducted Emissions (150 kHz – 30 MHz)	< FCC 15.207 limits	AC Line Conducted	PASS	Section 3.8
15.203	Antenna Requirement	FCC 15.203	-	PASS	Section 3.1

NOTES

- 1) The general test methods used to test on this devices are ANSI C63.10.



1.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2

Measurement Items	Frequency Range	Expanded Uncertainty $U = kU_c (k = 2)$
Radiated Spurious Emissions	< 1 GHz	3.08
	> 1 GHz	5.06
	> 18 GHz	5.39
Measurement Items		Expanded Uncertainty $U = kU_c (k = 2)$
Conducted	Maximum Output Power	1.28
Measurement Items	Frequency Range	Expanded Uncertainty $U = kU_c (k = 2)$
AC Conducted Emissions	150 kHz ~ 30 MHz	3.34

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of $k = 2$.



2 General Information

2.1 General Description of EUT

Equipment Class	Unlicensed National Information Infrastructure (UNII)		
EUT Type	Portable Computing Device		
FCC ID	A3LNP960XRD		
Model	NP960XRD		
Additional model name	NP964XRD		
Operating Frequency	NII 1: 5 150MHz to 5 250 MHz NII 2A: 5 250 MHz to 5 350 MHz NII 2C: 5 470 MHz to 5 725 MHz NII 3: 5 725 MHz to 5 850 MHz NII 4: 5 850 MHz to 5 895 MHz		
Antenna Gain	ANT 1	ANT 2	Direction gain NOTE3
	NII 1: 1.21 dBi NII 2A: 2.30 dBi NII 2C: 1.87 dBi NII 3: 2.70 dBi NII 4: 3.39 dBi	NII 1: 2.78 dBi NII 2A: 3.07 dBi NII 2C: 2.57 dBi NII 3: 2.73 dBi NII 4: 3.21 dBi	NII 1: 5.04 dBi NII 2A: 5.70 dBi NII 2C: 5.24 dBi NII 3: 5.73 dBi NII 4: 6.31 dBi
H/W Version	REV1.0		
S/W Version	NP960XRD		
EUT Capabilities	802.11b/g/a/n/ac/ax/be WLAN, Bluetooth (BDR, EDR, LE)		

NOTE 1: For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

NOTE 2: For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

NOTE 3: Directional gain (completely uncorrelated signal with unequal antenna gain and equal transmit power)
 $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi

2.2 Antenna Configurations

WIFI Configurations		SISO		MIMO	
		ANT1	ANT2	ANT1	ANT2
5GHz	11a	Not Support	Not Support	Support	Support
	11n/ac	Not Support	Not Support	Support	Support
	11ax/be	Not Support	Not Support	Support	Support



2.3 Tested sample and Tested companion device information

Type	Model	Note
Test sample (Conducted)	NP960XRD	S/N: LVVE930YA00240X
Test sample (Radiated)	NP960XRD	S/N: LVVE930YA00217Y
Test sample (Radiated)	NP960XRD	S/N: LVVE930YA00075V
AP Master (DFS)	FCC ID: PY311100154	S/N: 2RJ6445S00514

2.4 Description of Test Mode

The EUT has been tested with all modes of operating conditions to determine the worst case emission characteristics.

[Test Mode & Frequency]

5 GHz Band	Mode	Tested Frequency (MHz)		
NII 1	a/n20/ac20/ax20/be20	5180	5200	5240
	n40/ac40/ax40/be40	5190	5230	-
	ac80/ax80/be80	5210	-	-
	ac160/ax160/be160	5250	-	-
NII 2A	a/n20/ac20/ax20/be20	5260	5300	5320
	n40/ac40/ax40/be40	5270	5310	-
	ac80/ax80/be80	5290	-	-
NII 2C	a/n20/ac20/ax20/be20	5500	5600	5720
	n40/ac40/ax40/be40	5510	5590	5710
	ac80/ax80/be80	5530	5610	5690
	ac160/ax160/be160	5570	-	-
NII 3	a/n20/ac20/ax20/be20	5745	5785	5825
	n40/ac40/ax40/be40	5755	5795	-
	ac80/ax80/be80	5775	-	-
	ac160/ax160/be160	5815	-	-
NII 4	a/n20/ac20/ax20/be20	5845	5865	5885
	n40/ac40/ax40/be40	5835	5875	-
	ac80/ax80/be80	5855	-	-



Based on pre-testing results, the 802.11be mode was identified as representing a worse-case condition compared to the 802.11ax mode. In addition, the MRU mode was found to be more conservative than the punctured mode.

Accordingly, final testing was performed using MRU modes, with the exception of the 996T + 484T + 242T cases.

Furthermore, the 802.11 HT20 and HT40 modes were evaluated to provide coverage for the corresponding 802.11ac VHT20 and VHT40 modes. Both sets of modes were observed to operate at identical output power levels and exhibited no differences in emission characteristics.

[RU & MRU Support]

Tone \ BW	20 MHz	40 MHz	80 MHz	160 MHz
26T	O	O	O	O
52T	O	O	O	O
106T	O	O	O	O
242T	O	O	O	O
484T	X	O	O	O
996T	X	X	O	O
996X2T	X	X	X	O
52+26T	O	O	O	O
106+26T	O	O	O	O
484+242T	X	X	O	O
996+484T	X	X	X	O
996+484+242T	X	X	X	O

X = Not Support

O = Support

Note: 996T+484T+242T is supported only in Non-OFDMA



2.5 INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

2.6 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.7 General Description of Applied Standards

Generally the tests were performed according to the specifications of the standard, it must comply with the requirements of the following standards.

FCC CFR 47 Part 15, Subpart E (§15.407)

789033 D02 General U-NII Test Procedures New Rules v02r01

905462 D02 UNII DFS Compliance Procedures New Rules v02

ANSI C63.10-2020

All test items in this test report have been performed and recorded as per the above standards.

2.8 Information of the Testing Laboratories

Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

Test Firm Name : SK Tech Co., LTD.

Address : 88, Geulgaetul-ro 81beon-gil, wabu-eup Namyangju-si, Gyeonggi-do, 12203, Rep. of Korea

FCC

Designation Number : KR0007

Test Firm Registration Number : 938639

ISED

Designation Number : KR0007

Test Firm Registration Number : 5429A



2.9 Test Equipment

Test Equipment is traceable to the National Institute of Standards and Technology (NIST). Measurement antenna used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	Keysight Technologies	N9020B	MY63471160	2026-10-31
Spectrum Analyzer	Keysight Technologies	N9020B	MY63471163	2026-11-26
EMC Analyzer	Agilent	E7405A	US40240203	2026-03-10
EMI TEST RECEIVER	R & S	ESR 26	101441	2026-07-07
Vector Signal Generator	R & S	SMBV100B	101179	2026-03-13
Signal Generator	R & S	SMB100A	180704	2026-11-13
Power Meter	Agilent	E4418B	US39402176	2026-06-11
Power Meter	Agilent	E4417A	MY45100426	2026-03-12
Power Sensor	HP	8485A	3318A13916	2026-03-12
Power Sensor	Agilent	E9327A	MY44420696	2026-03-12
Attenuator	JFW	50HFAR-006-2.9MM	N/A	2026-06-12
Attenuator	JFW	50HFAR-006-2.9MM	N/A	2026-06-12
Attenuator	JFW	50HFAR-010-2.9MM	N/A	2026-06-12
Attenuator	JFW	50HFAR-010-2.9MM	N/A	2026-06-12
Attenuator	JFW	50HFAR-020-2.9MM	N/A	2026-06-12
TRILOG-Broadband Antenna	Schwarzbeck	ULB9168	9168-230	2027-05-12
Double Ridged guide Horn Antenna	ETS-LINDGREN	3117	00205960	2026-05-16
Horn Antenna	FLANN MICROWAVE	20240-20	273364	2026-10-19
Horn Antenna	FLANN MICROWAVE	22240-20	274186	2026-10-19
Low Noise Pre-Amplifier	TSJ	MLA-0118-J01-40	14879	2026-03-11
Preamplifier	TSJ	MLA-1840-A01-50	2610050	2026-03-13
Pre-Amplifier	TSJ	MLA-10K01-B01-27	2005350	2026-03-11
High Pass Filter	Wainwright	WHKX 3.0/18G-12SS	8	2026-03-12
High Pass Filter	Wainwright	WHKX10-5850-6500-18000-40SS	36	2026-06-11
High Pass Filter	Mini-Circuits	ZHFW-K7000+	2540	2026-12-01
High Pass Filter	Wainwright	WHKX10-3698-4300-18000-60SS	1	2026-06-11
EMI RECEIVER	Narda	PMM9010F	020WW40105	2026-11-12
Two-Line V-Network	R & S	ENV 216	102047	2026-01-22
Pulse Limiter	R & S	ESH3-Z2	100604	2026-11-12
Power Divider	HP	11636A	08476	2026-11-13
Power Splitter	Agilent	11667B	06036	2026-03-13
Signal and Spectrum Analyzer	R & S	FSW67	101371	2026-06-19



3 Test Results

3.1 Antenna Requirement

Except from §15.203 of the FCC Rules/Regulations:

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of the section.

- The antenna of the EUT is attached to the inside.

Result

The EUT complies with the requirement of §15.203



3.2 26 dB Bandwidth & 6 dB Bandwidth & 99 % Bandwidth

3.2.1 Regulation

Part. 15.407(e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.2.2 26 dB Bandwidth Test Procedure

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of ANSI C63.10-2020

1. Set resolution bandwidth (RBW) = approximately 1 % ~ 5 % of the EBW.
2. Set the video bandwidth (VBW) > RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

3.2.3 6 dB Bandwidth Test Procedure

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of ANSI c63.10-2020

1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW) > = 3 X RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = No faster than coupled (auto) time.
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.




3.2.4 99 % Bandwidth Test Procedure

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of ANSI c63.10

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW $\geq 3 \times$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99% power bandwidth function of the instrument (if available).

3.2.5 Test Setup

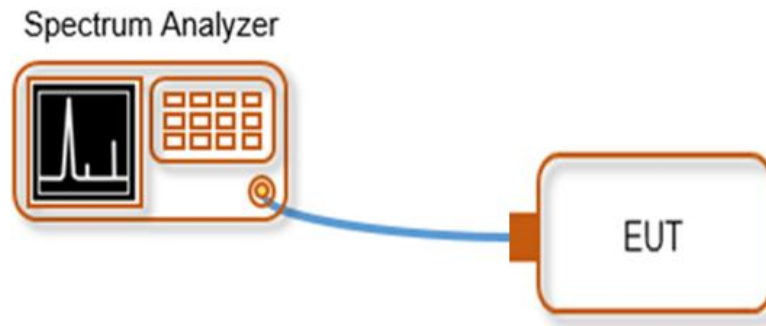



3.2.6 Test Result

[Test Data of 26 dB Bandwidth & 99 % Bandwidth]

Test Mode	Band	Tested Frequency [MHz]	26 dB Bandwidth [MHz]		99 % Bandwidth [MHz]	
			ANT1	ANT2	ANT1	ANT2
802.11 a	UNII-1	5180	20.99	20.62	16.783	16.692
		5200	20.77	20.96	16.756	16.649
		5240	20.73	20.52	16.791	16.703
	UNII-2A	5260	20.92	20.85	16.777	16.734
		5300	21.22	20.9	16.748	16.752
		5320	20.83	20.12	16.82	16.707
	UNII-2C	5500	21.03	20.94	16.846	16.716
		5600	20.87	21.09	16.781	16.68
		5720	21.07	20.42	16.808	16.707
802.11 ac(VHT20)	UNII-1	5180	21.76	21.01	17.939	17.816
		5200	21.89	21.08	17.879	17.824
		5240	21.85	20.99	17.918	17.788
	UNII-2A	5260	21.64	20.8	17.906	17.845
		5300	21.71	21	17.943	17.817
		5320	21.23	21.16	17.916	17.818
	UNII-2C	5500	21.48	21.68	17.919	17.836
		5600	21.41	21.25	17.967	17.824
		5720	21.48	21.58	17.887	17.853
802.11 be(EHT20)	UNII-1	5180	21.26	21.87	19.056	19.056
		5200	21.78	21.1	19.11	19.039
		5240	21.39	21.31	19.092	19.036
	UNII-2A	5260	21.33	21.21	19.039	19.044
		5300	21.07	21.73	19.019	19.062
		5320	21.35	21.56	19.033	19.038
	UNII-2C	5500	21.21	21.28	19.027	19.075
		5600	21.62	21.47	19.067	19.016
		5720	21.49	21.39	19.113	19.067



Test Mode	Band	Tested Frequency [MHz]	26 dB Bandwidth [MHz]		99 % Bandwidth [MHz]	
			ANT1	ANT2	ANT1	ANT2
802.11 ac(VHT40)	UNII-1	5190	42.9	42.81	36.618	36.513
		5230	43.56	42.89	36.542	36.479
	UNII-2A	5270	43.11	42.21	36.653	36.567
		5310	43.23	41.77	36.523	36.487
	UNII-2C	5510	43.27	42.03	36.653	36.536
		5590	43.15	42.74	36.649	36.542
		5710	42.97	41.75	36.567	36.455
802.11 be(EHT40)	UNII-1	5190	42.39	41.17	38.041	37.812
		5230	42.14	41.46	38.079	37.889
	UNII-2A	5270	42.67	41.71	38.129	37.832
		5310	42.98	42.58	38.134	37.92
	UNII-2C	5510	42.65	41.82	38.099	37.81
		5590	41.63	41.52	38.037	37.774
		5710	42.67	40.98	38.011	37.766
802.11 ac(VHT80)	UNII-1	5210	91.91	91.16	76.72	76.631
	UNII-2A	5290	92.45	90.09	76.832	76.599
	UNII-2C	5530	92.55	90.98	76.765	76.629
		5610	91.87	91.53	76.883	76.574
		5690	91.61	91.14	76.657	76.558
802.11 be(EHT80)	UNII-1	5210	87.62	89.86	77.929	78.013
	UNII-2A	5290	90.56	87.53	77.975	78.022
	UNII-2C	5530	88.19	88.42	77.898	77.902
		5610	86.01	90.22	77.934	77.843
		5690	90.31	89.45	77.909	77.946
802.11 ac(VHT160)	UNII-1/2A	5250	175.6	175	156.12	155.7
	UNII-2C	5570	176.6	173.3	156.47	155.59
802.11 be(EHT160)	UNII-1/2A	5250	179	177.4	157.47	157.47
	UNII-2C	5570	172.3	176.1	157.19	157.22



Test Mode	Band	Tested Frequency [MHz]	RU offset	26 dB Bandwidth [MHz]		99 % Bandwidth [MHz]	
				ANT1	ANT2	ANT1	ANT2
802.11 be(EHT20) 26 Tones	UNII-1	5180	0	19.741	19.24	18.329	18.006
			4	17.42	18.16	16.236	17.108
			8	19.75	19.65	18.285	18.247
		5200	0	19.81	19.08	18.381	17.846
			4	18.03	18.11	16.732	16.251
			8	19.21	19.79	17.969	18.005
		5240	0	19.67	19.64	18.366	18.229
			4	18.13	18.08	15.646	16.338
			8	19.87	19.63	18.231	18.344
	UNII-2A	5260	0	19.71	19.52	18.358	17.443
			4	18.14	18.22	16.918	16.126
			8	19.65	19.36	17.754	18.021
		5300	0	19.12	19.81	17.846	17.753
			4	18.18	18.09	15.843	16.537
			8	19.65	19.08	18.243	17.809
		5320	0	19.05	19.68	17.936	18.332
			4	18.16	18.55	16.506	16.734
			8	19.09	19.92	17.674	18.349
	UNII-2C	5500	0	19.72	19.25	18.271	18.195
			4	18.06	17.84	16.334	15.994
			8	19.09	19.92	17.704	17.375
		5600	0	19.61	19.91	18.265	18.11
			4	18.28	18.13	16.745	16.779
			8	19.23	19.81	18.022	18.426
		5720	0	19.41	19.03	18.126	17.859
			4	18.51	18.19	16.171	16.964
			8	19.64	19.92	18.271	18.364



Test Mode	Band	Tested Frequency [MHz]	26 dB Bandwidth [MHz]		99 % Bandwidth [MHz]	
			ANT1	ANT2	ANT1	ANT2
802.11 be(EHT20) 242 Tones	UNII-1	5180	21.48	20.98	19.089	19.031
		5200	21.1	21.16	19.076	18.99
		5240	21.49	20.98	19.103	19.047
	UNII-2A	5260	21.4	20.93	19.091	19.053
		5300	21.55	20.96	19.106	19.01
		5320	21.3	20.86	19.079	19.039
	UNII-2C	5500	21.4	21.27	19.14	19.035
		5600	21.27	20.97	19.14	19.045
		5720	21.23	20.86	19.101	19.066
802.11 be(EHT40) 484 Tones	UNII-1	5190	42.58	41.75	38.201	37.878
		5230	42.17	41.5	38.166	37.895
	UNII-2A	5270	42.27	41.56	38.118	37.79
		5310	42.25	41.72	38.035	37.96
	UNII-2C	5510	41.69	42.01	38.074	37.925
		5590	42.35	41.92	38.075	37.801
		5710	42.36	41.8	38.097	37.786
802.11 be(EHT80) 996 Tones	UNII-1	5210	91.23	91.24	78.104	78.17
	UNII-2A	5290	91.53	89.66	77.999	78.375
	UNII-2C	5530	92.3	90.45	78.1	77.864
		5610	90.94	89.12	77.993	78.059
		5690	90.88	89.37	77.974	77.959
802.11 be(EHT160) 996X2 Tones	UNII-1/2A	5250	179.6	174.5	157.45	157.13
	UNII-2C	5570	178.7	178.5	157.38	157.28



[Test Data of 6 dB Bandwidth & 99 % Bandwidth]

Test Mode	Band	Tested Frequency [MHz]	6 dB Bandwidth [MHz]		99 % Bandwidth [MHz]	
			ANT1	ANT2	ANT1	ANT2
802.11 a	UNII 3	5745	16.37	16.38	16.799	16.758
		5785	16.39	16.39	16.817	16.721
		5825	16.36	16.39	16.773	16.723
	UNII 4	5845	16.33	16.39	16.751	16.748
		5865	16.37	16.37	16.729	16.74
		5885	16.38	16.4	16.832	16.72
802.11 ac(VHT20)	UNII 3	5745	17.69	17.76	17.878	17.853
		5785	17.63	17.62	17.893	17.812
		5825	17.63	17.66	17.938	17.864
	UNII 4	5845	17.63	17.65	17.888	17.812
		5865	17.73	17.63	17.917	17.813
		5885	17.61	17.67	17.898	17.822
802.11 be(EHT20)	UNII 3	5745	18.77	18.87	19.106	18.998
		5785	18.87	18.88	19.104	19.042
		5825	19.06	18.86	19.071	19.046
	UNII 4	5845	17.13	18.65	19.089	19.045
		5865	18.85	18.98	19.084	19.046
		5885	19.06	19.1	19.096	19.027
802.11 ac(VHT40)	UNII 3	5755	36.41	36.45	36.65	36.524
		5795	36.42	36.44	36.631	36.546
	UNII 4	5835	36.43	36.44	36.649	36.514
		5875	36.45	36.43	36.542	36.482
802.11 be(EHT40)	UNII 3	5755	38.05	37.57	38.041	37.818
		5795	38.11	37.89	38.124	37.84
	UNII 4	5835	38.14	38.09	38.061	37.771
		5875	38.2	36.41	38.07	37.836
802.11 ac(VHT80)	UNII 3	5775	76.42	76.47	76.768	76.615
	UNII 4	5855	76.41	76.44	76.636	76.601
802.11 be(EHT80)	UNII 3	5775	78.2	78.08	77.875	77.919
	UNII 4	5855	78.04	78.13	77.911	77.874
802.11 ac(VHT160)	UNII 3/4	5815	156.5	156.5	156.39	156.09
802.11 be(EHT160)	UNII 3/4	5815	158.2	158.1	157.55	157.2



Test Mode	Band	Tested Frequency [MHz]	RU offset	6 dB Bandwidth [MHz]		99 % Bandwidth [MHz]	
				ANT1	ANT2	ANT1	ANT2
802.11 be(EHT20) 26 Tones	UNII 3	5745	0	2.1	2.086	18.242	18.166
			4	2.645	2.622	16.85	17.319
			8	2.013	2.082	18.229	17.792
		5785	0	2.083	2.093	18.219	18.104
			4	2.626	2.622	16.669	15.813
			8	2.074	2.107	17.672	18.369
		5825	0	2.121	2.12	19.197	18.239
			4	2.646	2.652	16.65	16.302
			8	2.113	2.123	17.689	18.309
	UNII 4	5845	0	2.101	2.132	18.108	17.926
			4	2.653	2.684	16.429	15.966
			8	2.075	2.062	17.952	18.034
		5865	0	2.06	2.057	18.271	18.377
			4	2.631	2.627	15.864	16.375
			8	2.072	2.12	18.19	18.337
		5885	0	2.059	2.089	18.015	17.322
			4	2.666	2.68	16.559	16.836
			8	2.072	2.095	17.711	18.346
802.11 be(EHT20) 242 Tones	UNII 3	5745	61	18.85	18.82	19.027	19.025
		5785		19.07	19.02	19.082	19.069
		5825		19.04	18.96	19.117	19.03
	UNII 4	5845		19.01	19.08	19.082	19.08
		5865		19.06	18.98	19.092	19.127
		5885		19.03	19.01	19.089	19.025
802.11 be(EHT40) 484 Tones	UNII 3	5755	65	38.22	37.1	38.138	37.839
		5795		38.04	38.09	38.161	38.044
	UNII 4	5835		38.09	38.13	38.065	38.118
		5875		38.23	37.64	38.067	38.216
802.11 be(EHT80) 996 Tones	UNII 3	5775	67	78.11	78.12	78.015	77.858
	UNII 4	5855		78.01	77.97	78.072	77.912
802.11 be(EHT160) 996X2 Tones	UNII 3/4	5815	68	158.2	158	157.82	157.12



[Test Plot of 26 dB Bandwidth & 99 % Bandwidth]

