


SCHEMATIC DIAGRAM

WARNING

POWER MUST BE DISCONNECTED
BEFORE SERVICING THIS APPLIANCE

OTR7

MODEL NO. : JVM1650,JVM1651,JVM1653,
JVM1660,JVM1661,EMO3000C

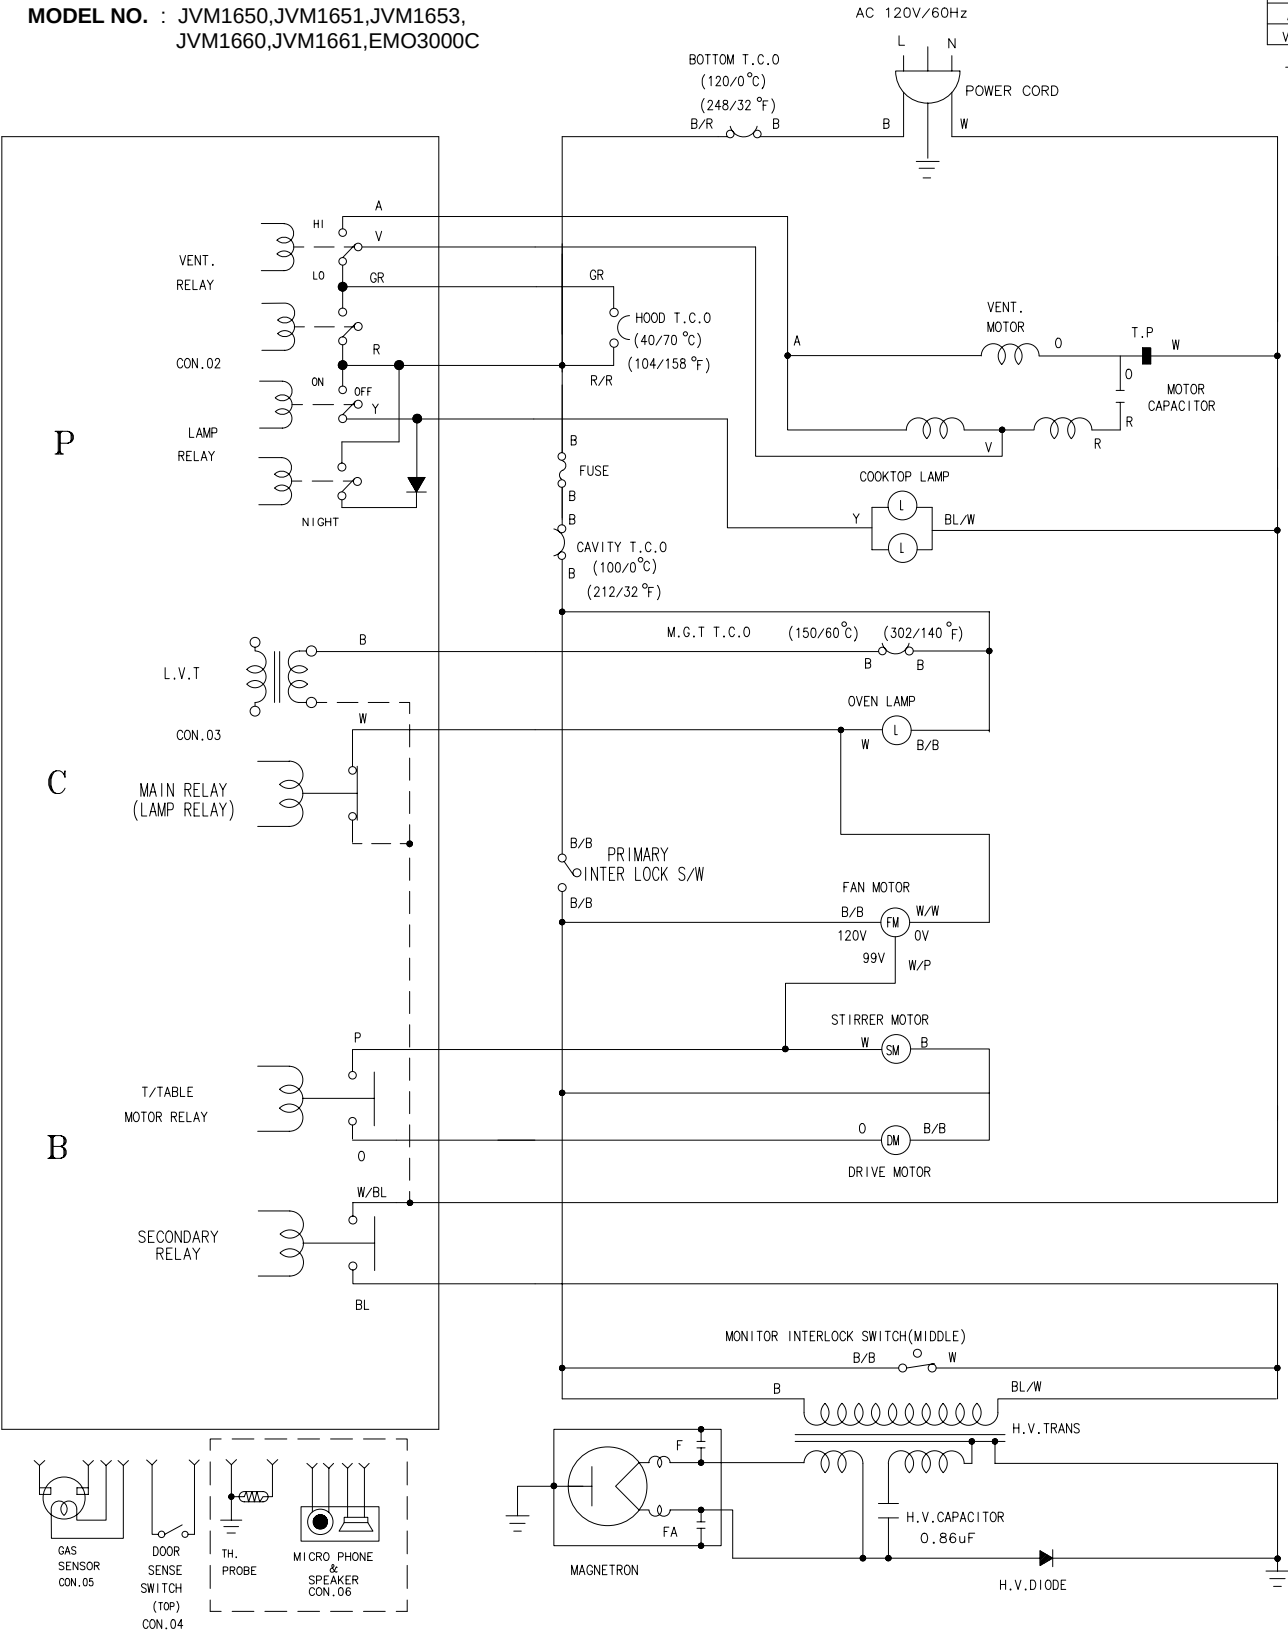

COLOR	SYMBOL
GRAY	GR
WHITE	W
BLACK	B
RED	R
BLUE	BL
ORANGE	O
YELLOW	Y
GREEN	G
PINK	P
AZURE	A
VIOLET	V

GROUND

NOTE: DOOR IS OPEN.

PROBE SWITCH IS CLOSED.

Used in JVM1660,61

WIRING DIAGRAM

WARNING

POWER MUST BE DISCONNECTED
BEFORE SERVICING THIS APPLIANCE


OTR7

MODEL NO. : JVM1650,JVM1651,JVM1653,
JVM1660,JVM1661,EMO3000C

COLOR	SYMBOL
GRAY	GR
WHITE	W
BLACK	B
RED	R
BLUE	BL
ORANGE	O
YELLOW	Y
GREEN	G
PINK	P
AZURE	A
VIOLET	V

GROUND

HARNESS LEADS
PARTS LEADS

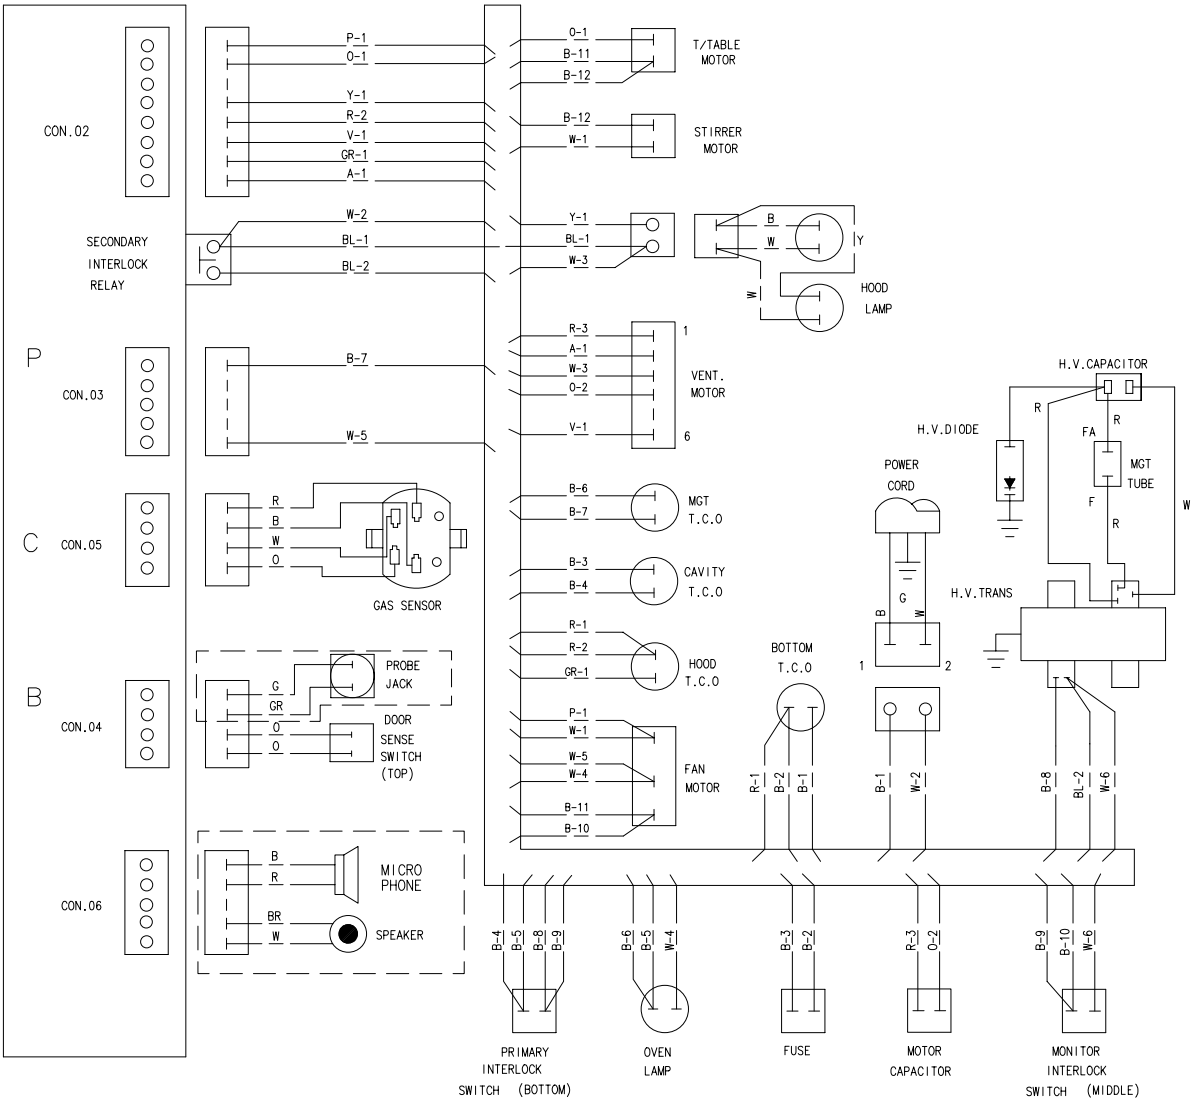

NOTE: FOR SERVICING REPLACEMENT USE 16GA, 105 °C

THERMOPLASTIC COVERED WIRE EXCEPT FOR
HIGH VOLTAGE LEADS OR AS NOTED ON SPECIAL LEADS.

Used in JVM1660,61

Printed in Korea