

Nemko Korea Co., Ltd.

300-2, Osan-Ri, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, KOREA

TEL:+82 31 322 2333

FAX:+82 31 322 2332

FCC and IC EVALUATION REPORT FOR CERTIFICATION**Applicant :**

Samsung Electronics Co., Ltd.
416, Maetan-3Dong, Yeongtong-Gu,
Suwon-Si, Gyeonggi-Do, Korea.
(Post code : 443-742)
Attn. : Mr. Jaywoo. Lee

Dates of Issue : January 6, 2011
Test Report No. : NK-10-R-374
Test Site : Nemko Korea Co., Ltd.

FCC ID
IC ID

A3LRMC30D1
649E-RMC30D1

Brand Name

SAMSUNG

Contact Person

Samsung Electronics Co., Ltd.
416, Maetan-3Dog, Yeongtong-Gu,
Suwon-Si, Gyeonggi-Do, Korea, 442-742.
Mr. Jaywoo. Lee
Telephone No. : +82-31-277-2569

Applied Standard: FCC 47 CFR Part 15C and IC RSS-210
Classification: Digital transmission system
EUT Type: 3 inch Touch remote control

The device bearing the brand name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Jan 6, 2011
Tested By : Jinha Ko
Engineer


Jan 06, 2011
Reviewed By : H.H. Kim
Manager & Chief Engineer

TABLE OF CONTENTS

1.	Scope	4
2.	Introduction (Site Description)	5
	2.1 Test facility	5
	2.2 Accreditation and listing	6
3.	Test Conditions & EUT Information	7
	3.1 Operation During Test	7
	3.2 Support Equipment	8
	3.3 Setup Drawing	8
	3.4 EUT Information	9
4.	Summary of Test Results	10
5.	Recommendation / Conclusion	11
6.	Antenna Requirements	11
7.	Description of Test	12
	7.1 Conducted Emissions	12
	7.2 Radiated Emissions	13
	7.3 6 dB Bandwidth	14
	7.4 Maximum Peak Output Power	14
	7.5 Peak Power Spectral Density	15
	7.6 Conducted Spurious Emissions	15
8.	Test Data	16
	8.1 Conducted Emissions	16
	8.2 Radiated Emissions	19
	8.3 6 dB Modulated Bandwidth	21
	8.4 Peak Output Power	27
	8.5 Power Spectral Density	28
	8.6 Conducted Spurious Emissions	34

8.7 Radiated Spurious Emissions	47
8.8 Receiver Spurious Emissions	59
9 Accuracy of Measurement	60
10. Test Equipment	62
Appendix A: Labelling Requirement	63
Appendix B: Photographs of Test Set-up	64
Appendix C: EUT Photographs	67

1. SCOPE

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15 and IC RSS-210.

Responsible Party :	Samsung Electronics Co., Ltd.
Contact Person :	Mr. Jaywoo. Lee
Manufacturer :	Samsung Electronics Co., Ltd. 416 Maetan-3Dong, Yeongtong-Gu, Suwon-Si, Gyeonggi-Do, 443-742 KOREA

- FCC ID: A3LRMC30D1
- Model: RMC30D1
- Brand Name: SAMSUNG
- EUT Type: 3 inch Touch remote control
- Classification: Digital transmission system
- Applied Standard: FCC 47 CFR Part 15 subpart C and IC RSS-210
- Test Procedure(s): ANSI C63.4 (2003)
- Dates of Test: Nov. 15, 2010 ~ Jan. 5, 2011
- Place of Tests: Nemko Korea Co., Ltd.

2. INTRODUCTION

2.1 Test facility

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) was used in determining radiated and conducted emissions emanating from **Samsung Electronics Co., Ltd.**

FCC ID : **A3LRMC30D1** and IC ID : **649E-RMC30D1**

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory**.

The site address is 300-2, Osan-Ri, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, KOREA.

The area of Nemko Korea Corporation Ltd. EMC Test Site is located in a mountain area at 80 kilo-meters (48 miles) southeast and Incheon International Airport (Incheon Airport), 30 kilometers (18miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 2003.



Nemko Korea Co., Ltd.
EMC Lab.
300-2, Osan-Ri, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do,
KOREA 449-852
Tel)+82-31-322-2333

Fig. 1. The map above shows the Seoul in Korea vicinity area.
The map also shows Nemko Korea Corporation Ltd. EMC Lab. and Incheon Airport.

2.2 Accreditation and listing

Accreditation type		Accreditation number
	FCC part 15/18 Filing site	Registration No. 97992
	CAB Accreditation for DOC	Designation No. KR0026
	KOLAS Accredited Lab. (Korea Laboratory Accreditation Scheme)	Registration No. 155
	Canada IC Registered site	Site No. 2040E-1
	VCCI registration site(RE/CE/Telecom CE)	Member No. 2118
	EMC CBTL	-
	KCC(RRL)Designated Lab.	Registration No. KR0026
	SASO registered Lab and Certification Body	Registration No. 2008-15

3. TEST CONDITIONS & EUT INFORMATION

3.1 Operation During Test

The EUT was tested at the lowest channel, middle channel and the highest channel with the maximum RF power and all test data recorded in the report.
During the test, a test program was executed to operate EUT continuously.

The EUT is programmed with the following setting during the testing:

Test frequency		2412 MHz	2437 MHz	2462 MHz
802.11b	Programed Level	13	13	13
	Data rate (Mbps)	11	11	11
802.11g	Programed Level	11	11	11
	Data rate (Mbps)	54	54	54
802.11n(HT20)	Programed Level	11	11	11
	Data rate (Mbps)	6.5(MCS0)	6.5(MCS0)	6.5(MCS0)


Table of test modes

Test Items	Mode	Data rate (Mbps)
Conducted Emissions	802.11b	11
Radiated Emissions	802.11b	11
6 dB Bandwidth	802.11b	11
	802.11g	54
	802.11n	6.5
Peak Output Power	802.11b	11
	802.11g	54
	802.11n	6.5
Power Spectral Density	802.11b	11
	802.11g	54
	802.11n	6.5
Conducted Spurious Emission, Radiated Spurious Emission, Bandedge Emission	802.11b	11
	802.11g	54
	802.11n	6.5

3.2 Support Equipment

3 inch Touch remote control (EUT)	Samsung Electronics Co., Ltd. FCC ID: A3LRMC30D1	S/N: N/A
TRAVEL ADAPTER	Samsung Electronics Co., Ltd. Model : ATADU10EBE 1.5 m shielded power cable	FCC Verification S/N: DK6Z912TS/7-B
Earphone	NOKIA 0.9 m shielded earphone cable	S/N: 06942359095C1B14880

3.3 Setup Drawing

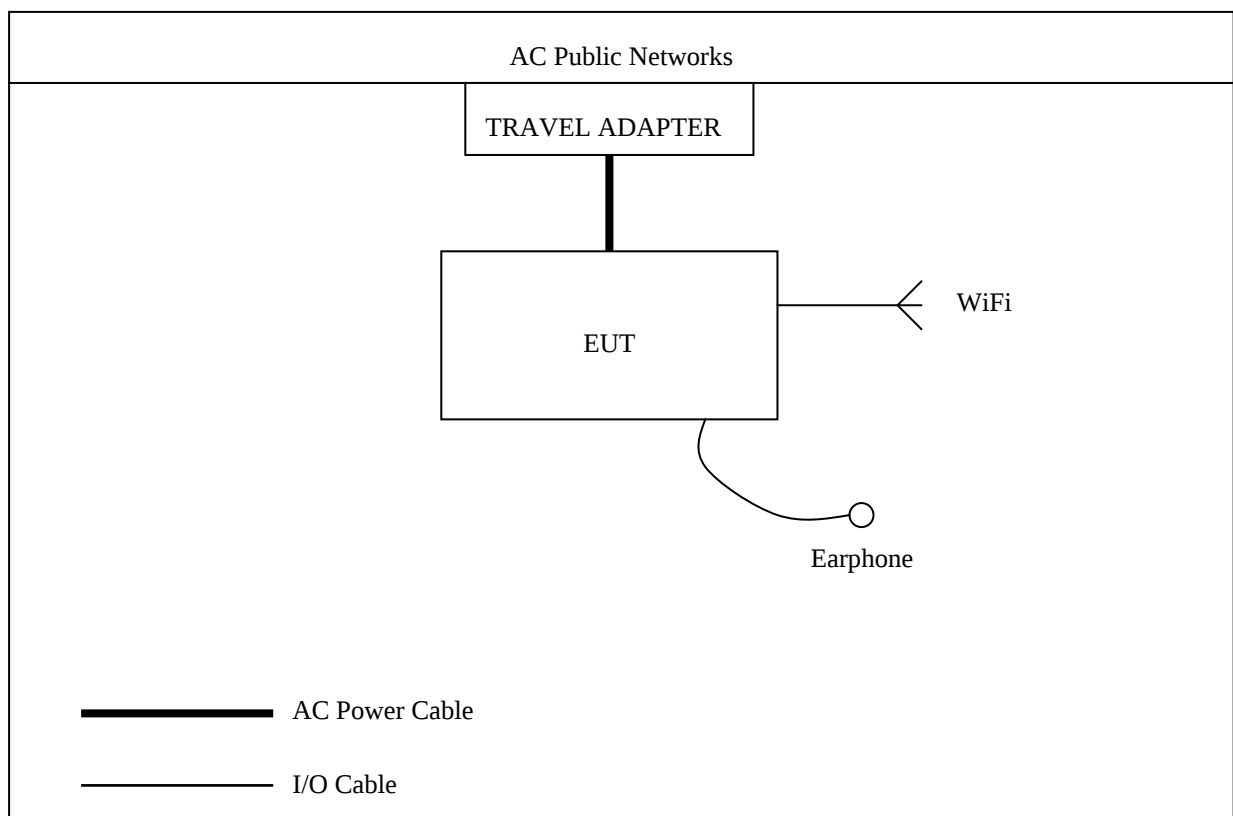

3.4 EUT Information

The EUT is the **Samsung 3 inch Touch remote control FCC ID: A3LRMC30D1, IC ID: 649E-RMC30D1.**

Specifications:

EUT Type	3 inch Touch remote control
Model Name	RMC30D1
Brand Name	SAMSUNG
Frequency of Operation	2412 MHz to 2462 MHz
Peak Power Output (Conducted)	802.11b : 16.25 dBm 802.11g : 22.51 dBm 802.11n(HT20) : 21.37 dBm
Channels	802.11b, g, n(HT20) : 11 CH
Antenna Gain	3.15 dBi
Spreading	DSSS, OFDM
Modulations	BPSK, QPSK, 16QAM, 64QAM
Temperature Range	0 ~ + 35
Voltage	DC 3.7 V
Dimension(W x D x H)	58 mm x 120 mm x 8 mm
Weight	125 g
Remarks	-

4. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specification:

Name of Test	FCC Paragraph No.	IC Paragraph No.	Result	Remark
Conducted Emission	15.207	RSS-GEN 7.2.4	Complies	
Radiated Emission	15.209	RSS-210 A8.5	Complies	
6 dB Bandwidth	15.247(a)(2)	RSS-210 A8.2	Complies	
Peak Power Output	15.247(b)(3)	RSS-210 A8.4	Complies	
Power Spectral Density	15.247(e)	RSS-210 A8.2	Complies	
Conducted Spurious Emission	15.247(d)	RSS-210 A8.5	Complies	
Radiated Spurious Emission	15.247(d)	RSS-210 A8.5	Complies	

5. RECOMMENDATION/CONCLUSION

The data collected shows that the **Samsung 3 inch Touch remote control FCC ID: A3LRMC30D1, IC ID: 649E-RMC30D1** is in compliance with Part 15 Subpart C 15.247 of the FCC Rules.

6. ANTENNA REQUIREMENTS

§15.203 of the FCC Rules part 15 Subpart C

: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The antenna of the **Samsung 3 inch Touch remote control FCC ID: A3LRMC30D1, IC ID: RMC30D1** is **unique coupling** and there are no provisions for connection to an external antenna. It complies with the requirement of §15.203.

7. DESCRIPTION OF TESTS

7.1 Conducted Emissions

The Line conducted emission test facility is located inside a 4 x 7 x 2.5 meter shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1 m x 1.5 m wooden table 0.8 m height is placed 0.4 m away from the vertical wall and 1.5 m away from the side of wall of the shielded room Rohde & Schwarz (ESH3-Z5) and room Rohde & Schwarz (ESH2-Z5) of the 50ohm/50uH Line Impedance Stabilization Network(LISN) are bonded to the shielded room.

The EUT is powered from the Rohde & Schwarz LISN and the support equipment is powered from the Rohde & Schwarz (ESH3-Z5) LISN. Power to the LISNs are filtered by high-current high insertion loss Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1 / 2 ".

If DC power device, power will be derived from the source power supply it normally will be powered from the supply lines will be connected to the LISNs, All interconnecting cables more than 1 meter were shortened by non inductive bundling (serpentine fashion) to a 1 meter length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150 kHz to 30 MHz with 200 ms sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCS30).

The detector function were set to CISPR quasi-peak mode & average mode.

The bandwidth of receiver was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

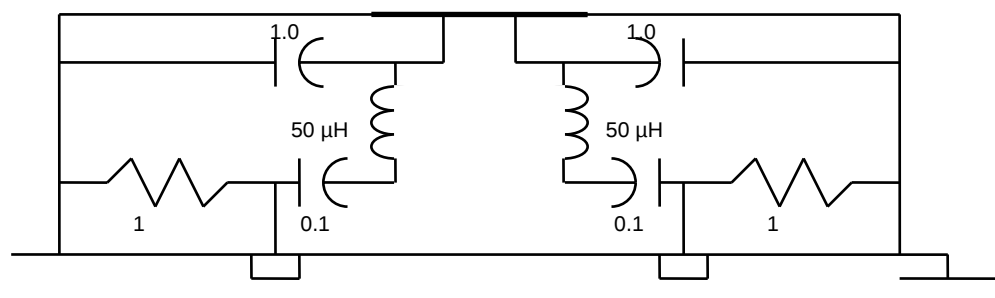


Fig. 2. LISN Schematic Diagram

7.2 Radiated Emissions

Preliminary measurements were made indoors at 3 meter using broad band antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The Technology configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was note for each frequency found. The spectrum was scanned from 9 kHz to 30 MHz using Loop Antenne(EMCO, 6502) and 30 to 1000 MHz using Bi-conical log Antenna(ARA, LPB-2520/A). Above 1 GHz, Horn antenna (Schwarzbeck BBHA 9120D: up to 18 GHz , Q-par Angus QSH20S20 : 18 to 26.5 GHz, QSH22K20: up to 40 GHz) was used. Final Measurements were made outdoors at 3 or 10 m test range using Loop Antenne(EMCO, 6502) and Logbicon Super Antenna (Schwarzbeck, VULB9168) or Horn antenna.(Schwarzbeck BBHA 9120D: up to 18 GHz , Q-par Angus QSH20S20 : 18 to 26.5 GHz, QSH22K20: up to 40 GHz).

The test equipment was placed on a wooden table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was reexamined and investigated using EMI test receiver (ESCS30) & (FSP40). The detector function was set to CISPR peak mode or quasi-peak mode or average mode and the band-width of the receiver was set to 120 kHz or 1 MHz depending on the frequency or type of signal. The half wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT support equipment and interconnecting cables were re configured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non- metallic 1.0 x 1.5 meter table. The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turn table containing the Technology was rotated; the antenna height was varied 1 to 4meter and stopped at the azimuth or height producing the maximum emission Each emission was maximized by : switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R/S signal generator.


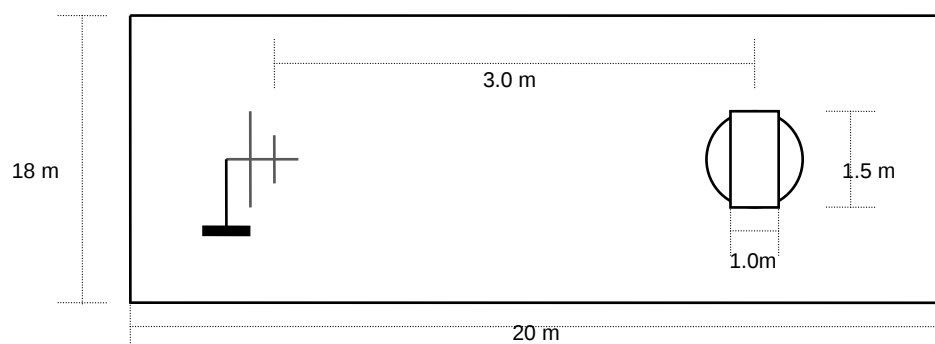


Fig. 3. Dimensions of Outdoor Test Site

7.3 6 dB Bandwidth

Test Setup




Test Procedure

The transmitter is set to the Low, Middle, High channels connected to the spectrum analyzer.
The RBW and VBW of spectrum analyzer are set to 100 kHz.
The sweep time is coupled.

7.4 Maximum Peak Output Power

Test Setup




Test Procedure

The transmitter is set to the Lowest, Middle, Highest channels connected to the Peak Power Meter.

7.5 Peak Power Spectral Density

Test Setup



Test Procedure

The transmitter is connected to the Spectrum analyzer.

The maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer.


The RBW of spectrum analyzer is set to 3 kHz and VBW is set to 3 kHz.

The sweep time is set to Span/3 kHz and video averaging is turned off.

The PPSD is the highest level found across the emission in any 3 kHz band.

7.6 Conducted Spurious Emissions

Test Setup



Test Procedure

The transmitter is connected to the spectrum analyzer.

The RBW of spectrum analyzer is set to 1 MHz and VBW is set to the 1 MHz.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the Lowest, Middle and highest channels.

8. TEST DATA

8.1 Conducted Emissions

FCC §15.207, RSS-Gen 7.2.4

Frequency (MHz)	Level(dB)		*)Factor (dB)	**) Line	Limit(dB)		Margin(dB)	
	Q-Peak	Average			Q-Peak	Average	Q-Peak	Average
1.35	33.2	24.0	0.2	L	56.0	46.0	22.8	22.0
1.38	31.9	22.9	0.2	L	56.0	46.0	24.1	23.1
2.19	33.1	24.4	0.2	L	56.0	46.0	22.9	21.6
3.29	34.4	26.4	0.2	L	56.0	46.0	21.6	19.6
3.68	33.6	25.6	0.2	L	56.0	46.0	22.4	20.4
21.09	33.0	21.9	1.6	N	60.0	50.0	27.0	28.1


Line Conducted Emissions Tabulated Data

NOTES:

1. Measurements using CISPR quasi-peak mode & average mode.
2. All modes of operation were investigated and the worst -case emission were reported. See attached Plots.
3. *) Factor = LISN + Cable Loss
4. **) LINE : L =Line , N = Neutral
5. The limit is on the FCC Part section 15.207(a).
6. During the test, the EUT was set with 802.11b mode and 11 Mbps data rate.


PLOTS OF EMISSIONS

- Conducted Emission at the Mains port (Line)

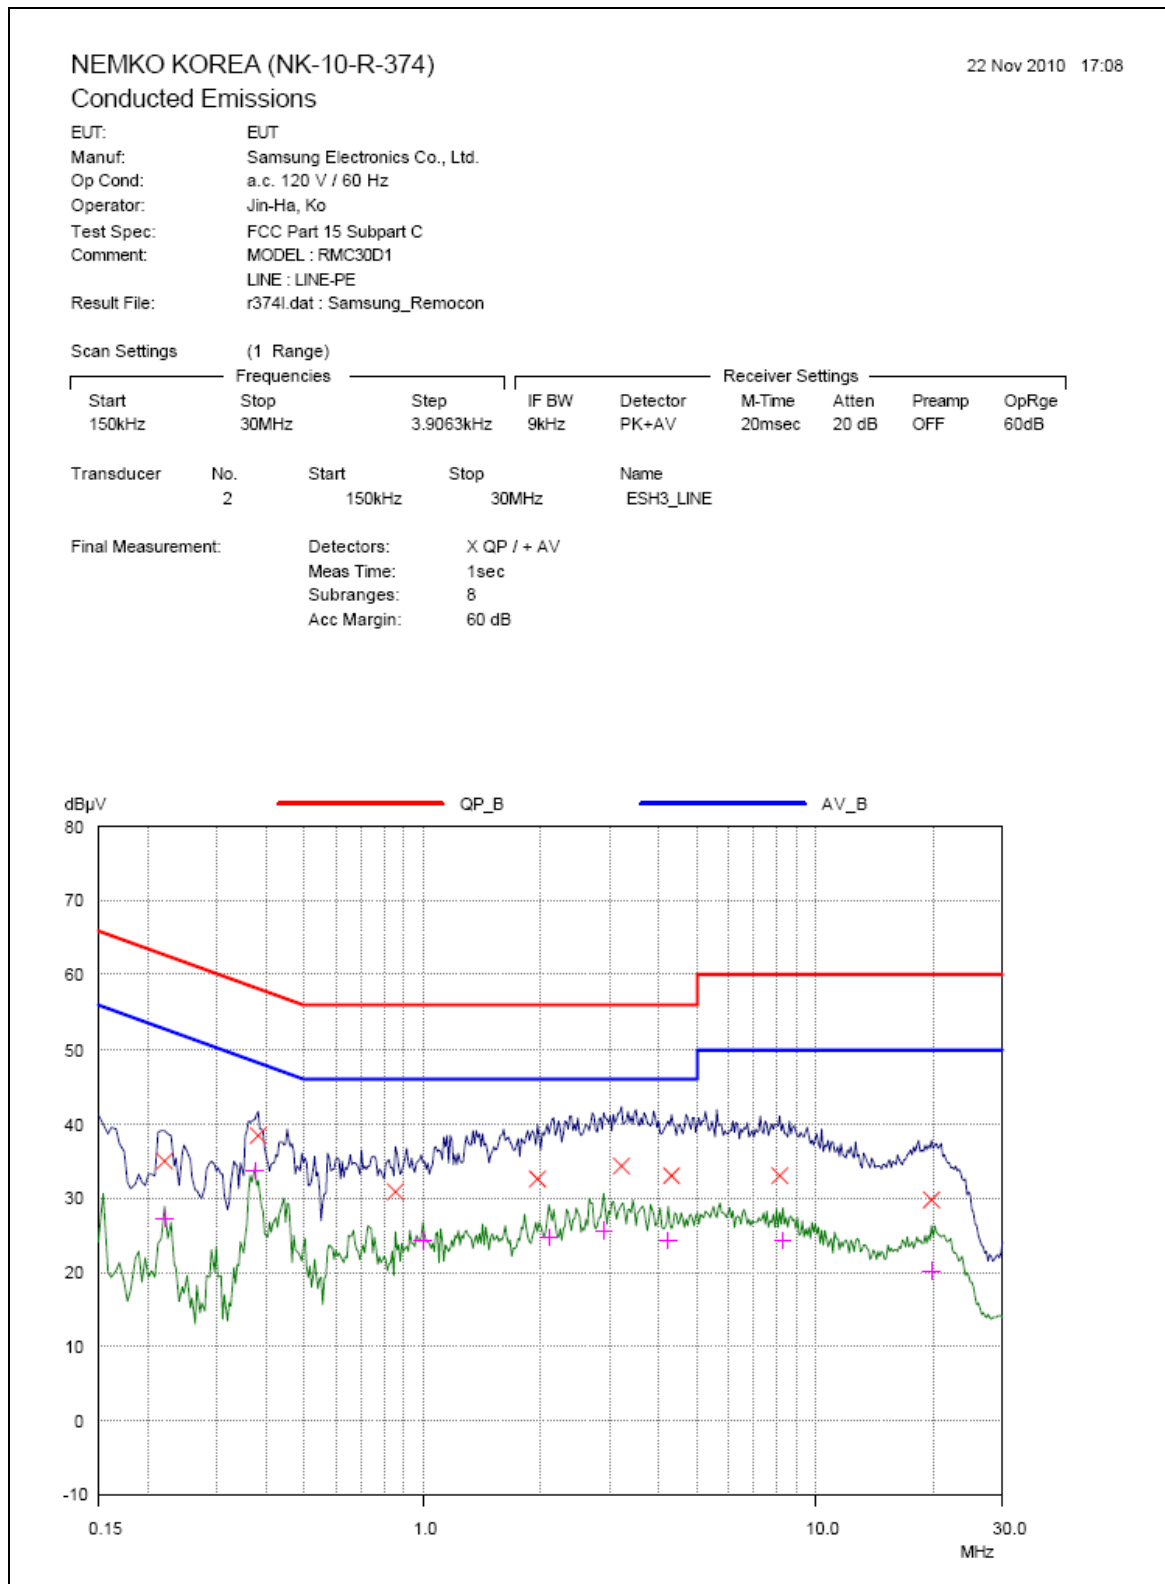

PLOTS OF EMISSIONS

- Conducted Emission at the Mains port (Neutral)

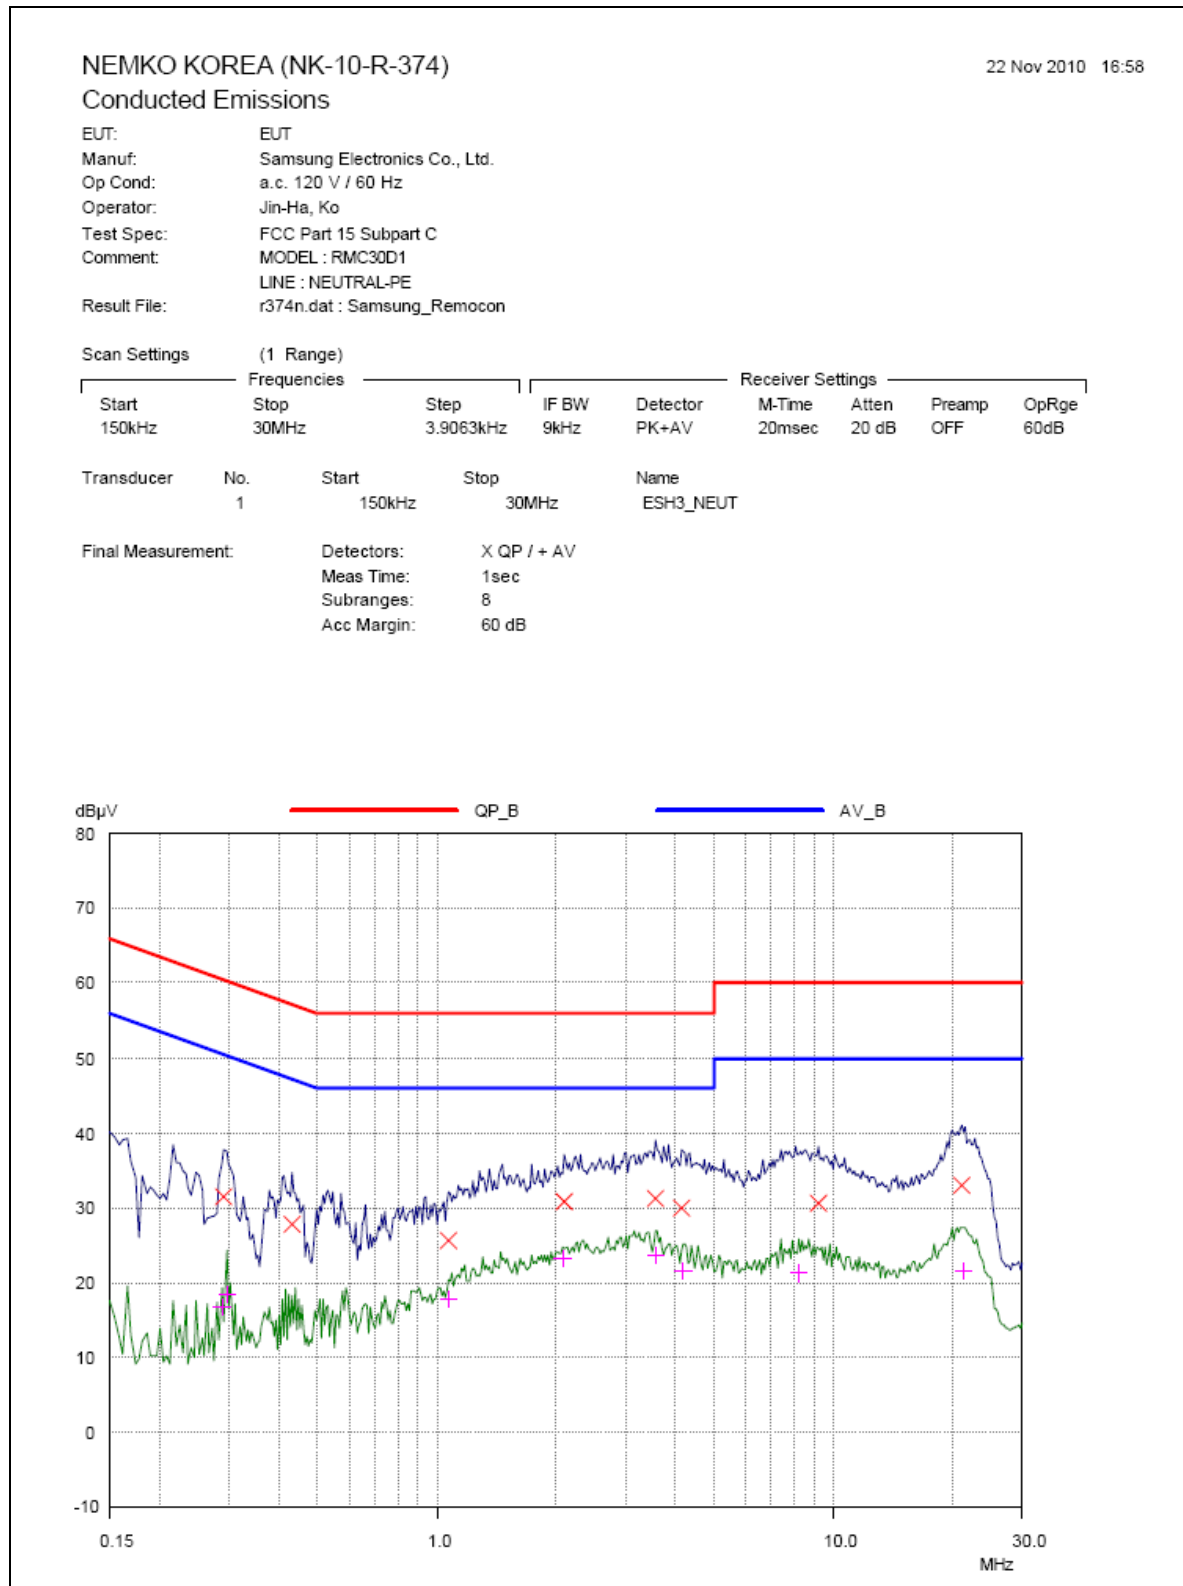

TEST DATA

8.2 Radiated Emissions

FCC §15.209, RSS-210 A8.5

EUT Position : Z-Axis (a.c. 120 V/60 Hz)

Frequency (MHz)	Reading (dB /m)	Pol* (H/V)	Antenna Height (cm)	Turntable Angles (°)	AF+CL+Amp (dB)**	Result (dB /m)	Limit (dB /m)	Margin (dB)
144.00	52.2	H	227	243	-17.1	35.1	43.5	8.4
225.00	47.3	H	164	274	-19.1	28.2	46.0	17.8
288.00	46.3	H	135	16	-15.5	30.8	46.0	15.2
336.00	55.0	H	126	17	-13.6	41.4	46.0	4.6
432.00	50.7	H	100	279	-11.1	39.6	46.0	6.4
528.00	47.9	H	100	292	-8.9	39.0	46.0	7.0

Radiated Measurements at 3 meters

EUT Position : X-Axis (d.c. 3.7 V, Battery operating)

Frequency (MHz)	Reading (dB /m)	Pol* (H/V)	Antenna Height (cm)	Turntable Angles (°)	AF+CL+Amp (dB)**	Result (dB /m)	Limit (dB /m)	Margin (dB)
144.00	53.1	H	220	245	-17.1	36.0	43.5	7.5
225.00	46.2	H	163	205	-19.1	27.1	46.0	18.9
288.00	48.7	H	124	20	-15.5	33.2	46.0	12.8
336.00	53.5	H	120	12	-13.6	39.9	46.0	6.1
432.00	51.9	H	100	286	-11.1	40.8	46.0	5.2
528.00	46.7	H	100	73	-8.9	37.8	46.0	8.2

Radiated Measurements at 3 meters

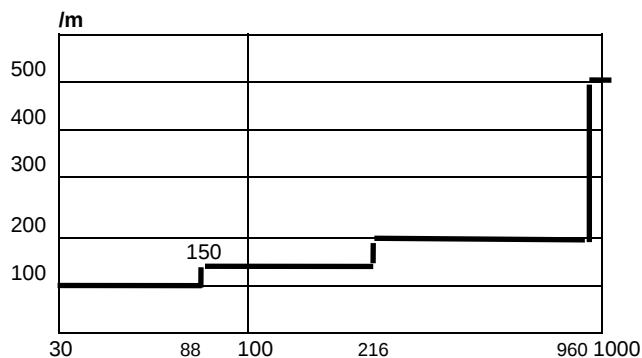


Fig. 4. Limits at 3 meters

NOTES:

1. All modes were measured and the worst-case emission was reported.

2 The radiated limits are shown on Figure 4.

Above 1 GHz the limit is 500 dBm.

1. *Pol. H = Horizontal, V = Vertical

2. **AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.

3. Measurements using CISPR quasi-peak mode below 1 GHz.

4. The radiated emissions testing were made by rotating through three orthogonal axes.

The worst date was recorded.

5. The limit is on the FCC Part section 15.209(a).

6. During the test, the EUT was set with 802.11b mode and 11 Mbps data rate.

TEST DATA

8.3 6 dB Modulated Bandwidth

FCC §15.247(a)(2), RSS-210 A8.2

Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result:

802.11b mode

Channel	Frequency(MHz)	Result(MHz)	Limit(MHz)
Low	2412	10.02	0.5
Middle	2437	10.01	0.5
High	2462	9.97	0.5

802.11g mode

Channel	Frequency(MHz)	Result(MHz)	Limit(MHz)
Low	2412	16.44	0.5
Middle	2437	16.48	0.5
High	2462	16.46	0.5


802.11n(HT20) mode

Channel	Frequency(MHz)	Result(MHz)	Limit(MHz)
Low	2412	16.86	0.5
Middle	2437	16.94	0.5
High	2462	17.18	0.5


PLOTS OF EMISSIONS

802.11b mode

6 dB Bandwidth, 802.11b mode, Lowest Channel

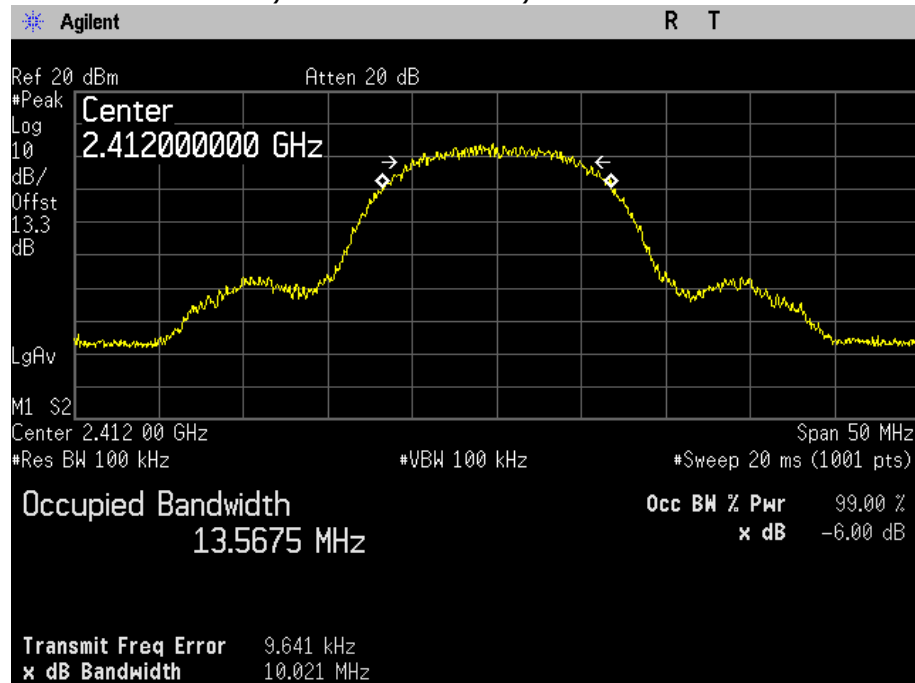


6 dB Bandwidth, 802.11b mode, Middle Channel

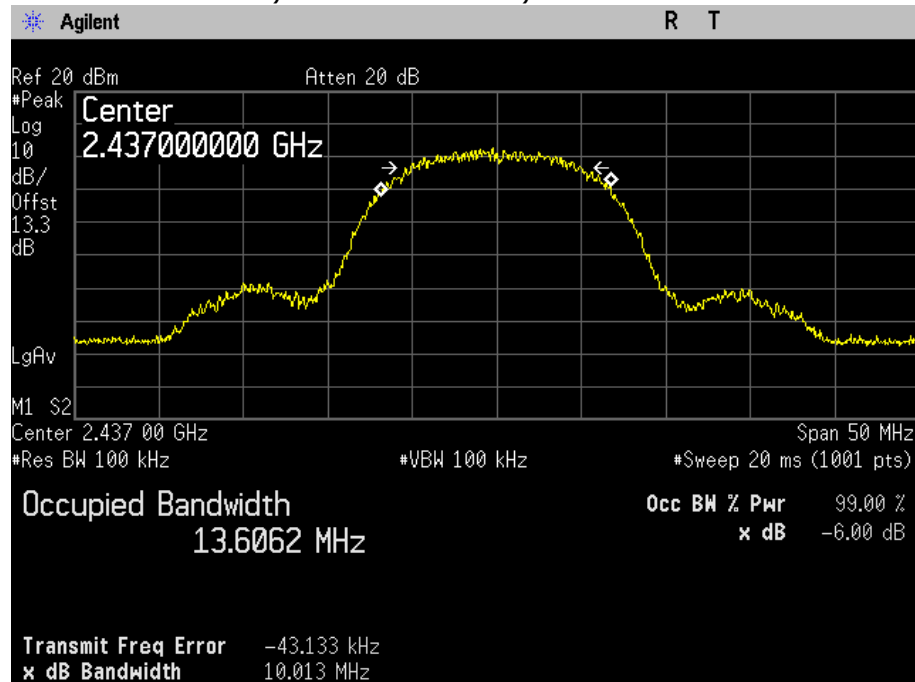


PLOTS OF EMISSIONS

6 dB Bandwidth, 802.11b mode, Highest Channel

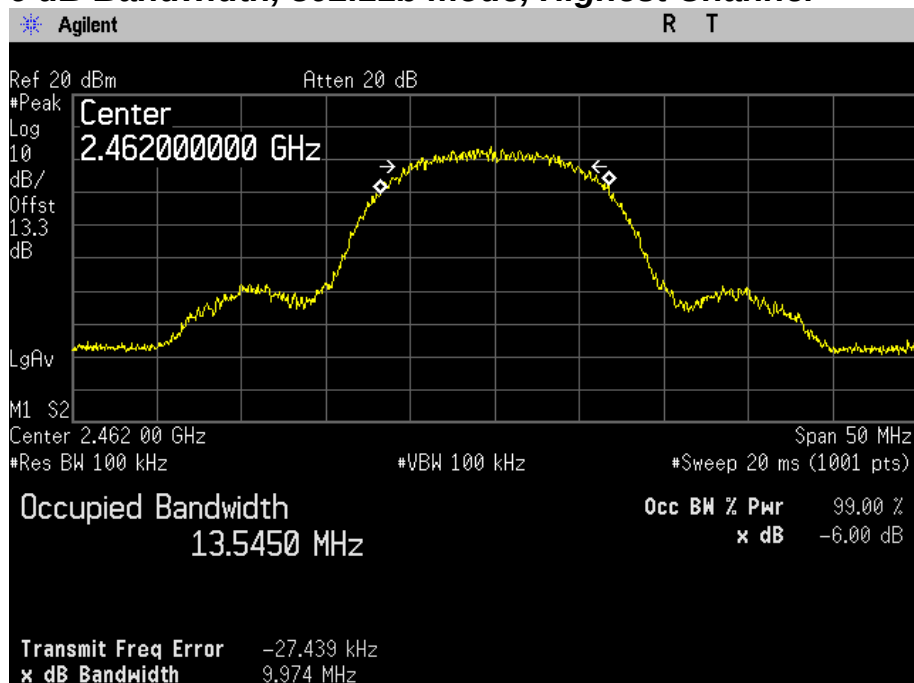


802.11g mode

6 dB Bandwidth, 802.11g mode, Lowest Channel

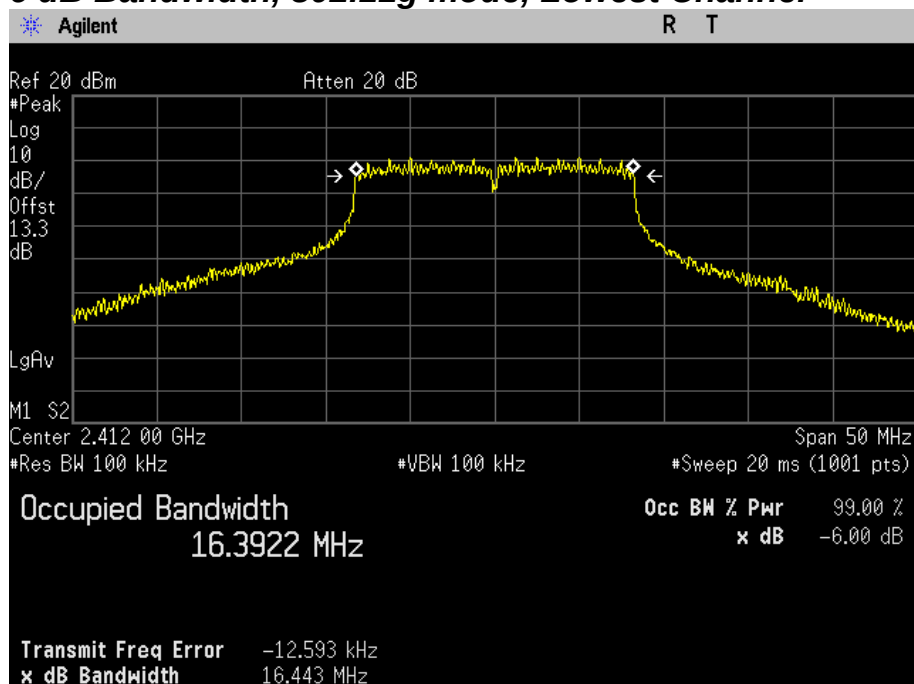


PLOTS OF EMISSIONS

6 dB Bandwidth, 802.11g mode, Middle Channel

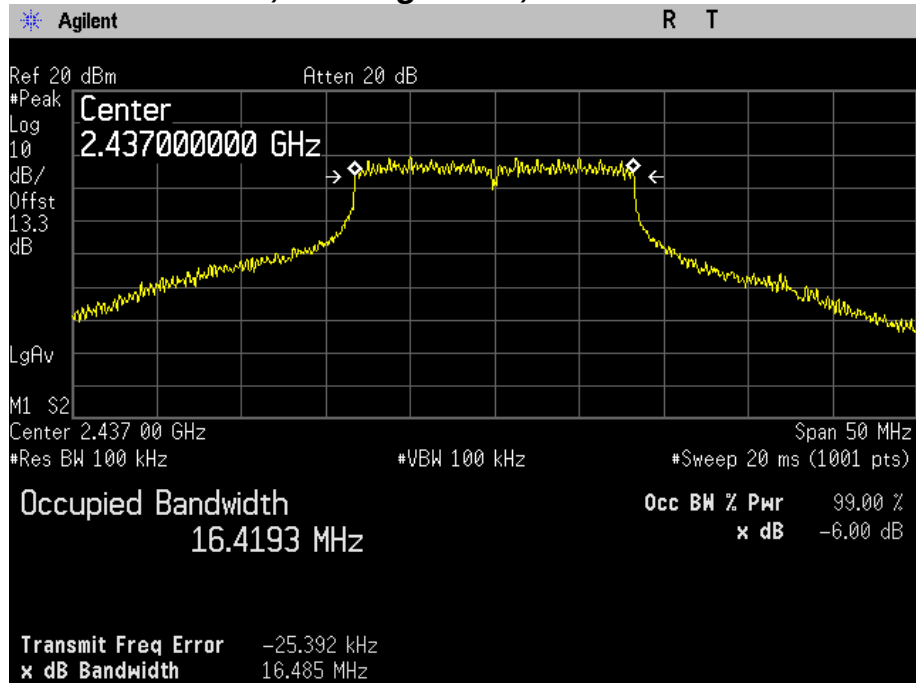


6 dB Bandwidth, 802.11g mode, Highest Channel

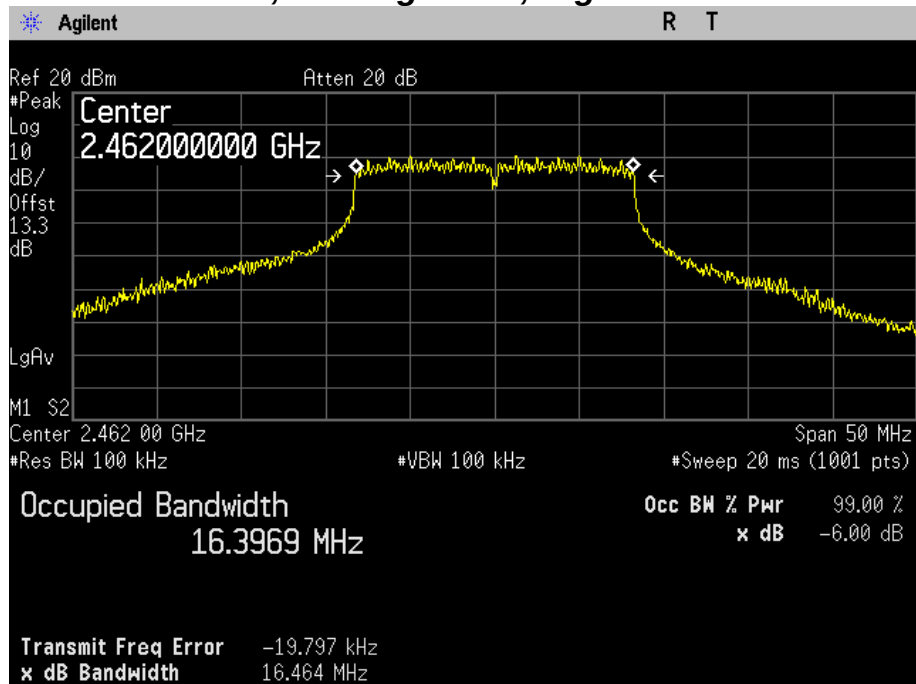


PLOTS OF EMISSIONS

802.11n(HT20) mode


6 dB Bandwidth, 802.11n(HT20) mode, Lowest Channel

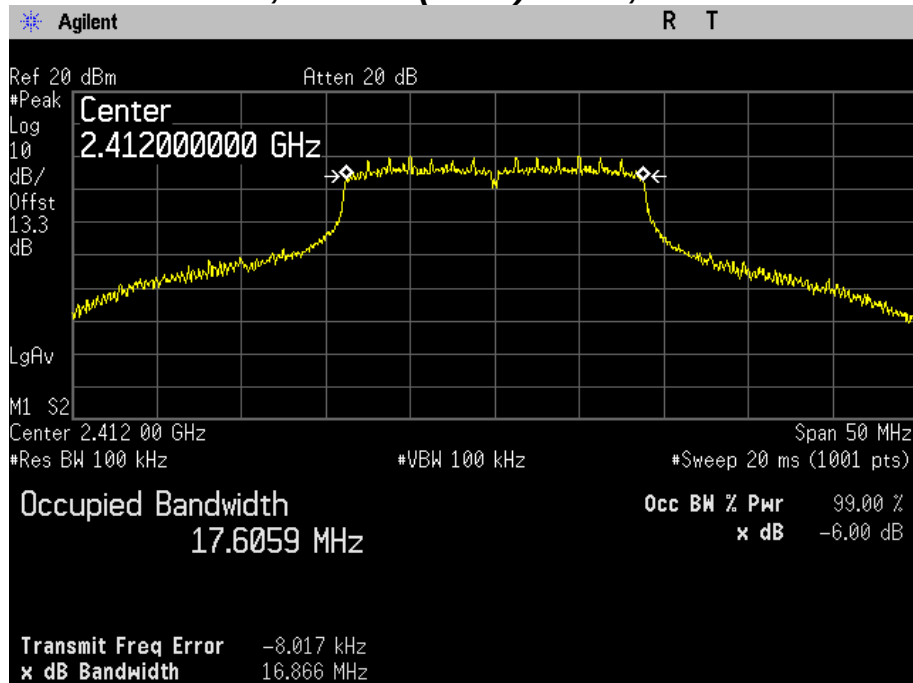

6 dB Bandwidth, 802.11n(HT20) mode, Middle Channel

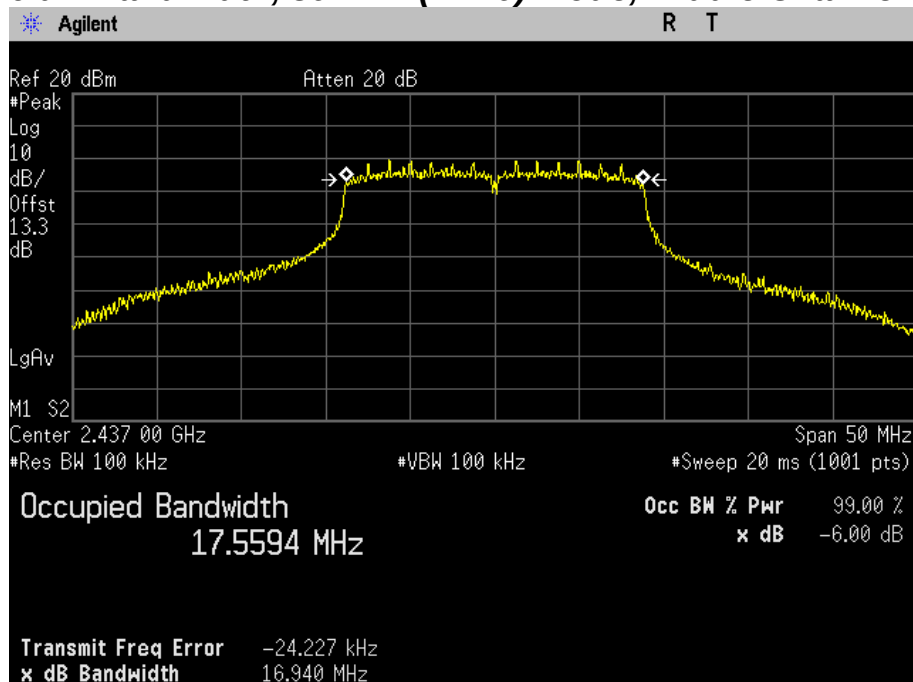

6 dB Bandwidth, 802.11n(HT20) mode, Highest Channel

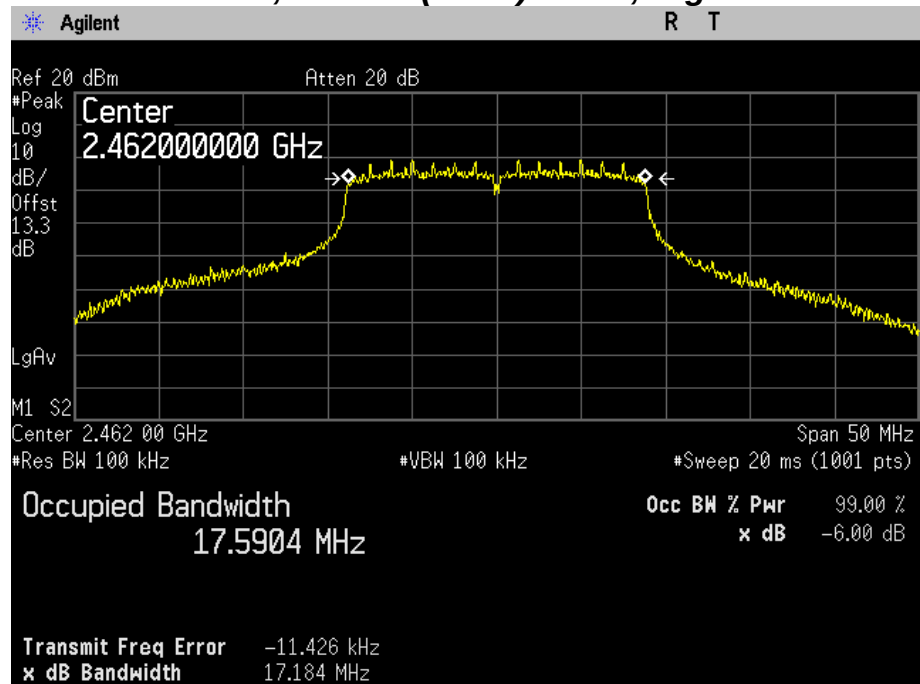

TEST DATA

8.4 Peak Output Power

FCC §15.247(b)(3), RSS-210 A8.4

Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result:

802.11b mode

Channel	Frequency(MHz)	Peak Power(dBm)	Limit(dBm)
Low	2412	16.25	30
Middle	2437	16.13	30
High	2462	15.94	30

802.11g mode

Channel	Frequency(MHz)	Peak Power(dBm)	Limit(dBm)
Low	2412	22.30	30
Middle	2437	22.51	30
High	2462	22.06	30

802.11n(HT20) mode

Channel	Frequency(MHz)	Peak Power(dBm)	Limit(dBm)
Low	2412	21.37	30
Middle	2437	21.19	30
High	2462	20.94	30

TEST DATA

8.5 Power Spectral Density

FCC §15.247(e), RSS-210 A8.2

Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result:

802.11b mode

Channel	Frequency(MHz)	PPSD(dBm)	Limit(dBm)
Low	2412	-11.38	8
Middle	2437	-12.77	8
High	2462	-11.70	8

802.11g mode

Channel	Frequency(MHz)	PPSD(dBm)	Limit(dBm)
Low	2412	-12.02	8
Middle	2437	-10.92	8
High	2462	-13.70	8


802.11n(HT20) mode

Channel	Frequency(MHz)	PPSD(dBm)	Limit(dBm)
Low	2412	-10.57	8
Middle	2437	-11.34	8
High	2462	-13.74	8


PLOTS OF EMISSIONS

802.11b mode

Power Spectral Density, 802.11b mode, Lowest Channel

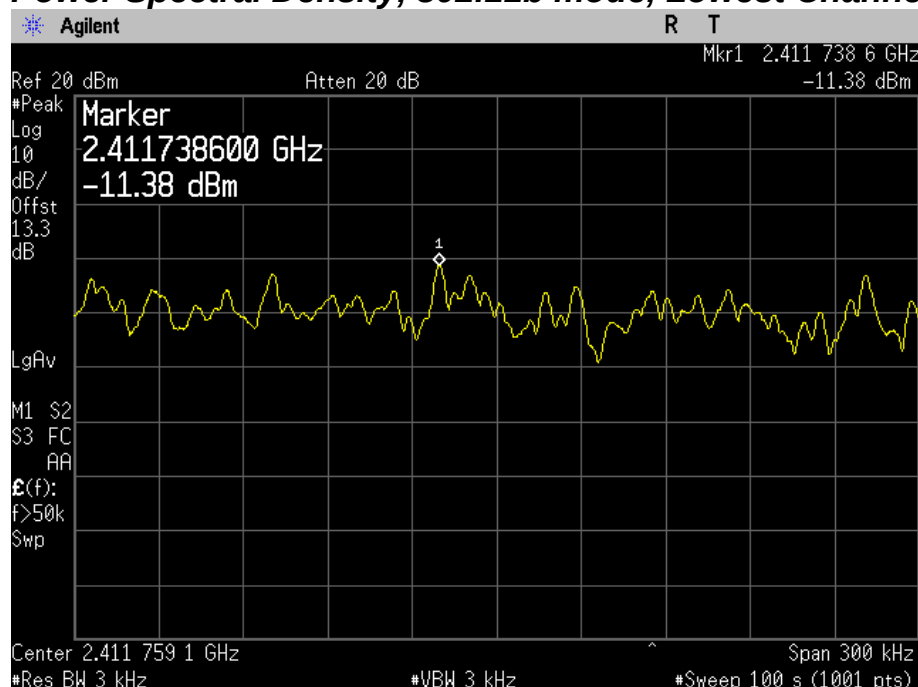


Power Spectral Density, 802.11b mode, Middle Channel

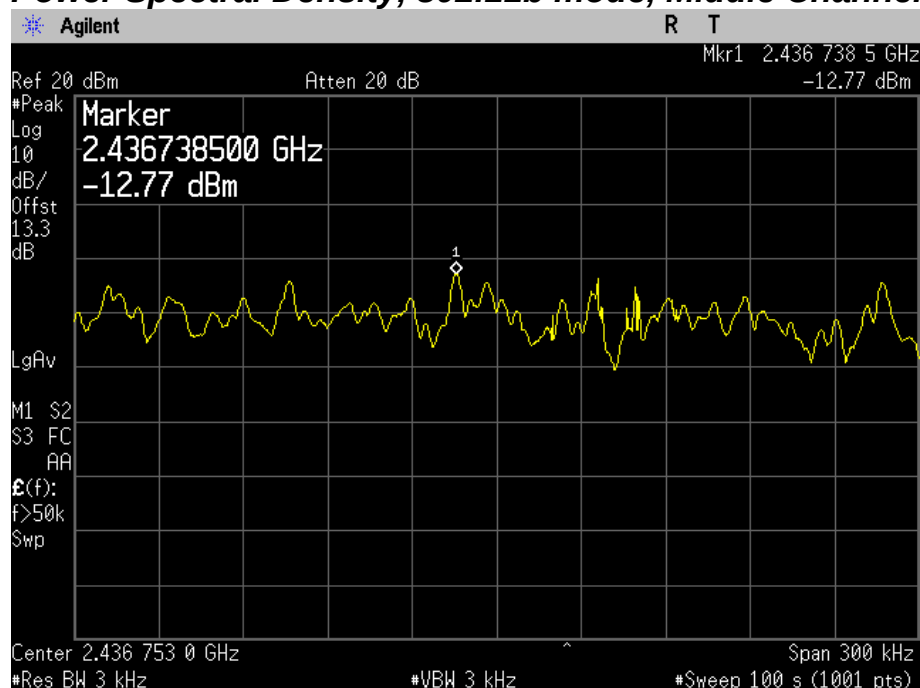


PLOTS OF EMISSIONS

Power Spectral Density, 802.11b mode, Highest Channel

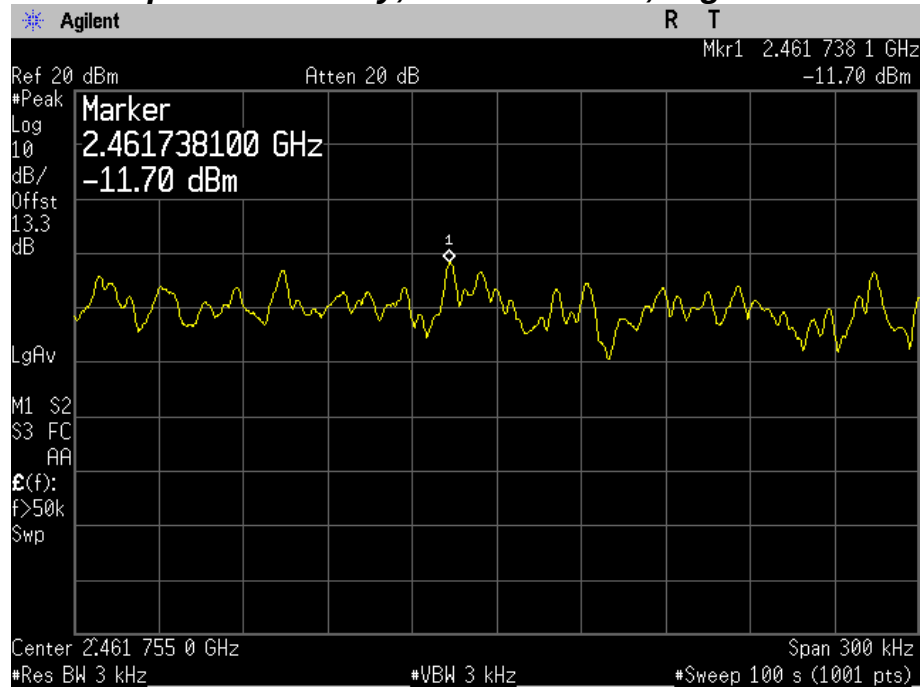


802.11g mode

Power Spectral Density, 802.11g mode, Lowest Channel

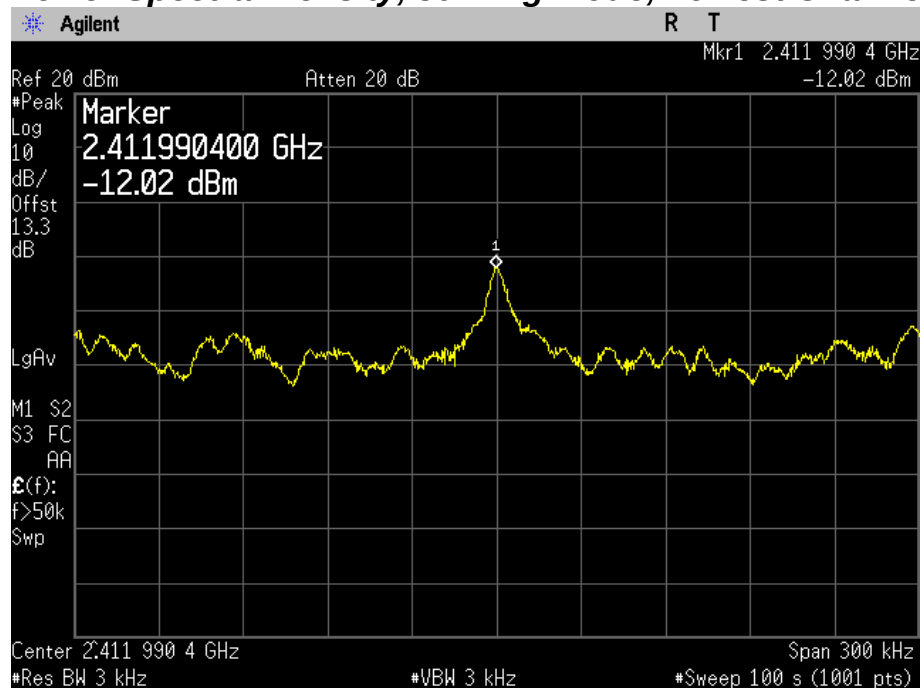


PLOTS OF EMISSIONS

Power Spectral Density, 802.11g mode, Middle Channel

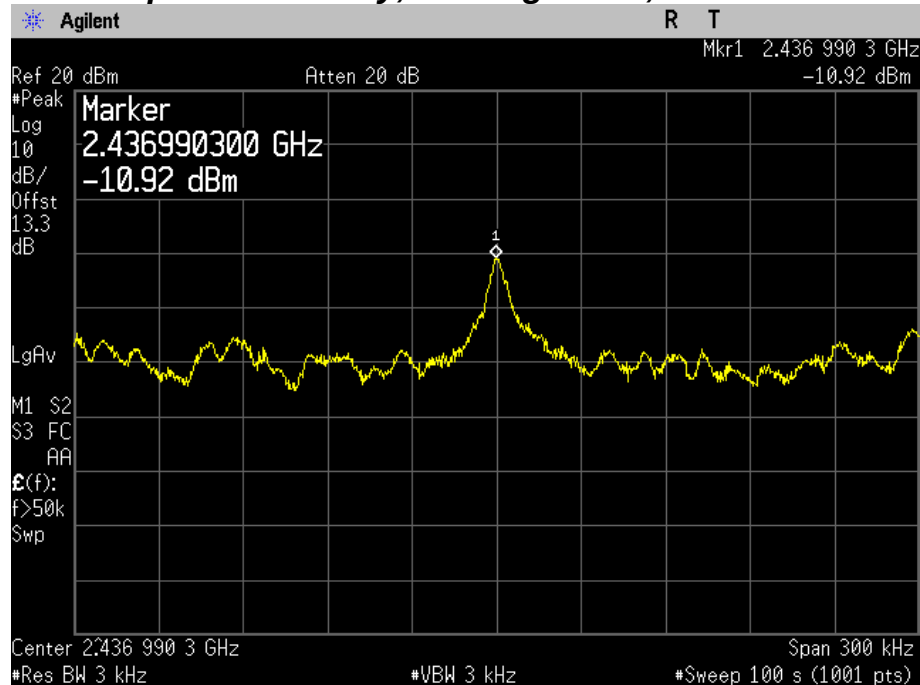


Power Spectral Density, 802.11g mode, Highest Channel

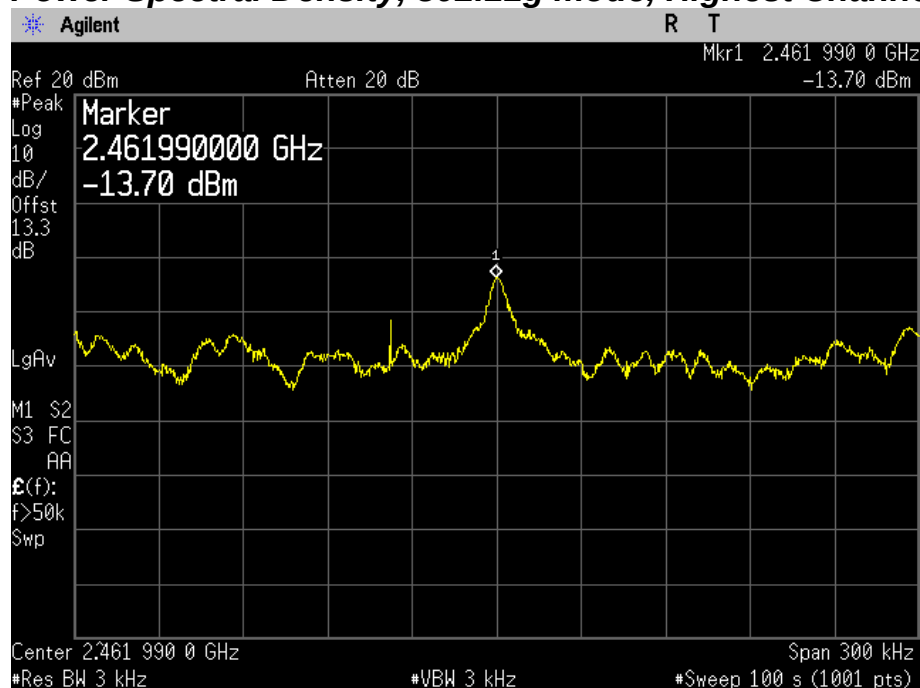


PLOTS OF EMISSIONS

802.11n(HT20) mode

Power Spectral Density, 802.11n(HT20) mode, Lowest Channel

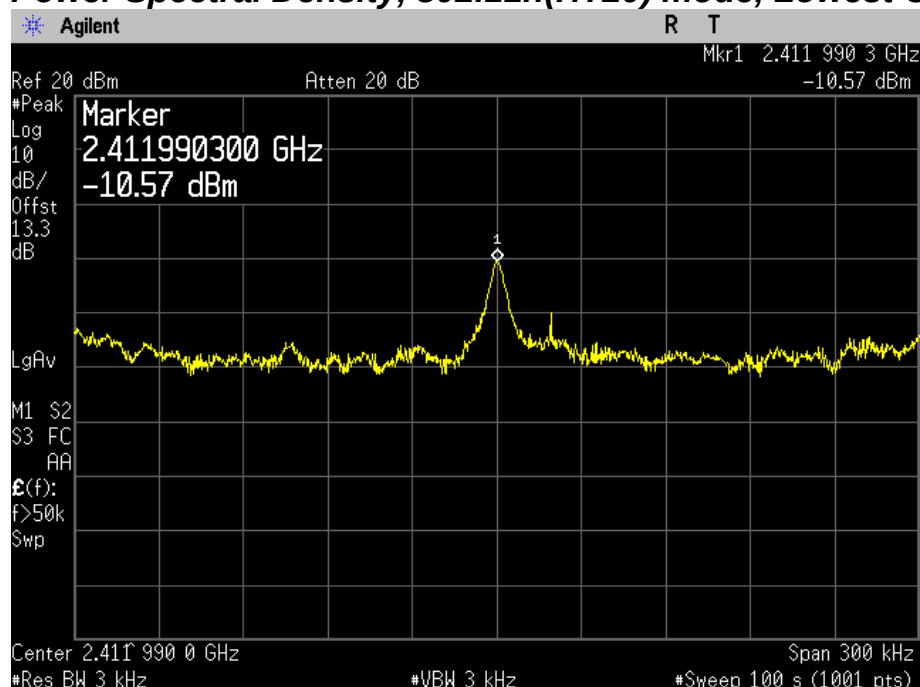


Power Spectral Density, 802.11n(HT20) mode, Middle Channel

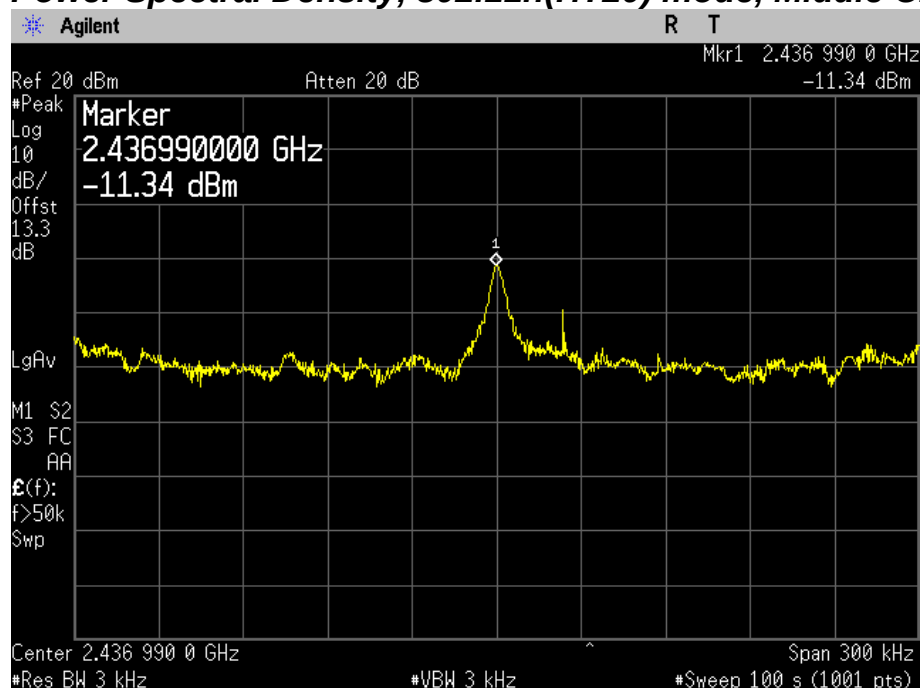

PLOTS OF EMISSIONS

Power Spectral Density, 802.11n(HT20) mode, Highest Channel

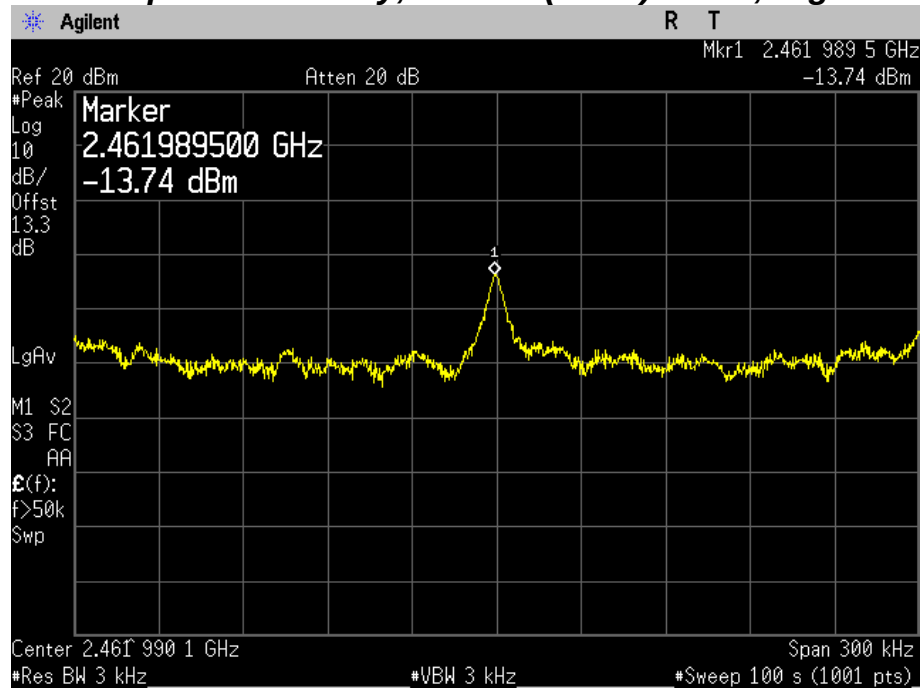

TEST DATA

8.6 Conducted Spurious Emissions

FCC §15.247(d), RSS-210 A8.5

Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result:


802.11b/g/n(HT20) mode

Channel	Frequency(MHz)	Result(dBc)	Limit(dBc)
Low	2412	More than 20 dBc	20
Middle	2437	More than 20 dBc	20
High	2462	More than 20 dBc	20


PLOT OF TEST DATA

802.11b mode

Conducted Spurious Emissions, 802.11b mode, 30 MHz ~ 10 GHz, Lowest Channel

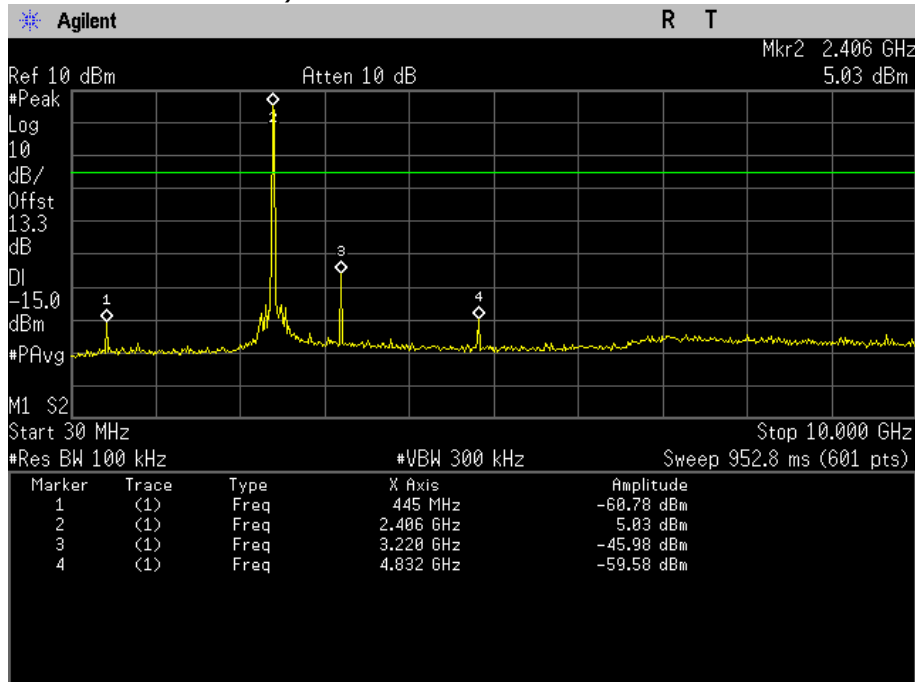


Conducted Spurious Emissions, 802.11b mode, 10 GHz ~ 25 GHz, Lowest Channel

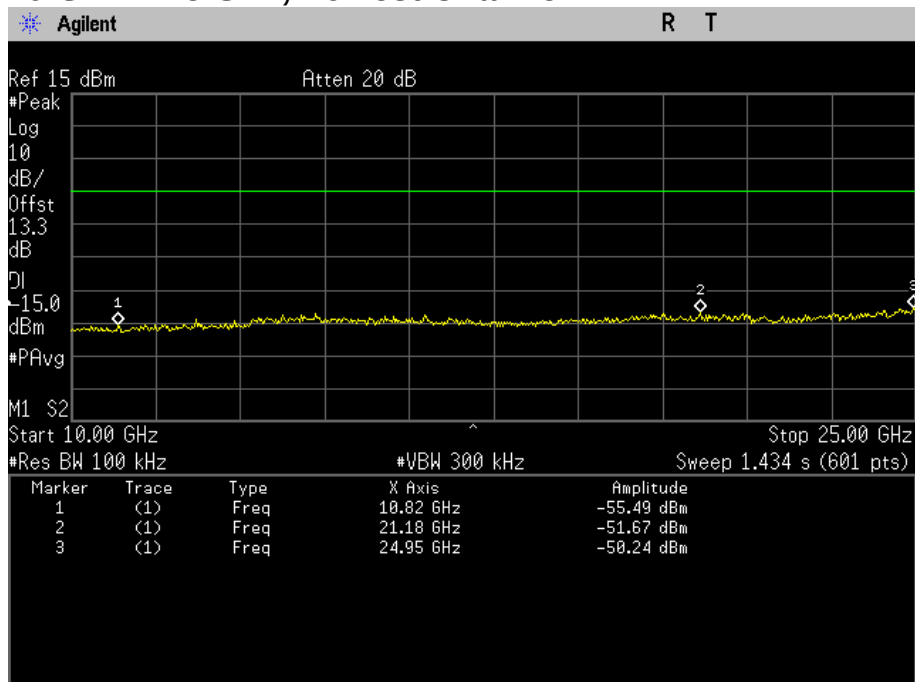


PLOT OF TEST DATA

Conducted Spurious Emissions, 802.11b mode, 30 MHz ~ 10 GHz, Middle Channel

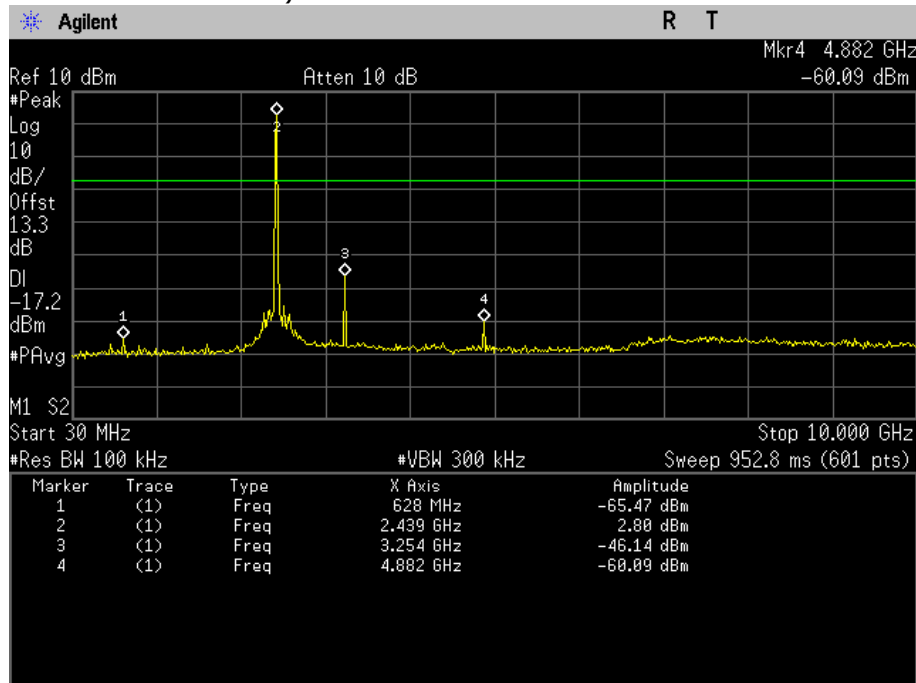


Conducted Spurious Emissions, 802.11b mode, 10 GHz ~ 25 GHz, Middle Channel

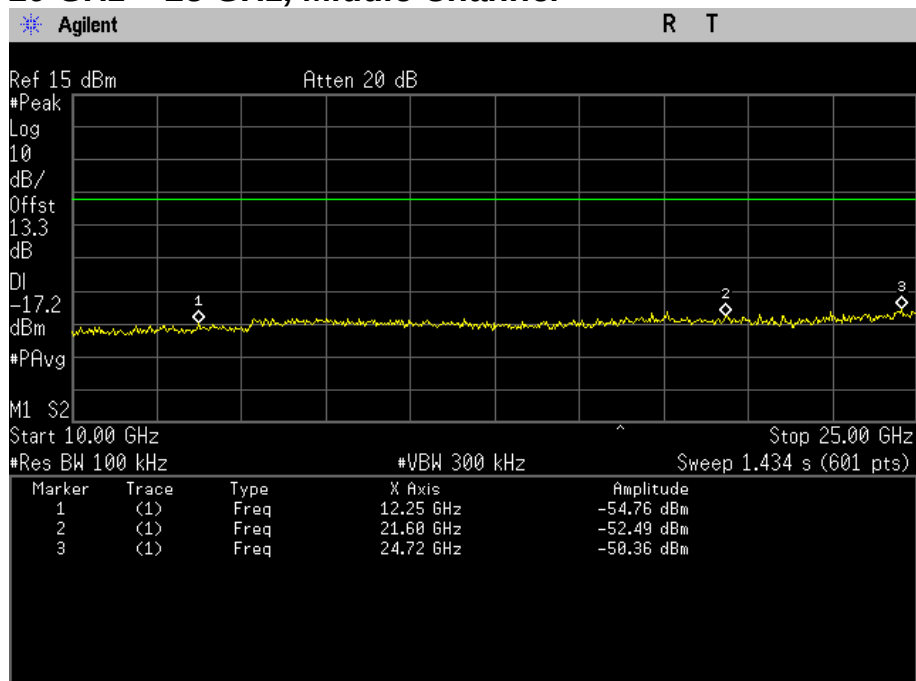


PLOT OF TEST DATA

Conducted Spurious Emissions, 802.11b mode, 30 MHz ~ 10 GHz, Highest Channel

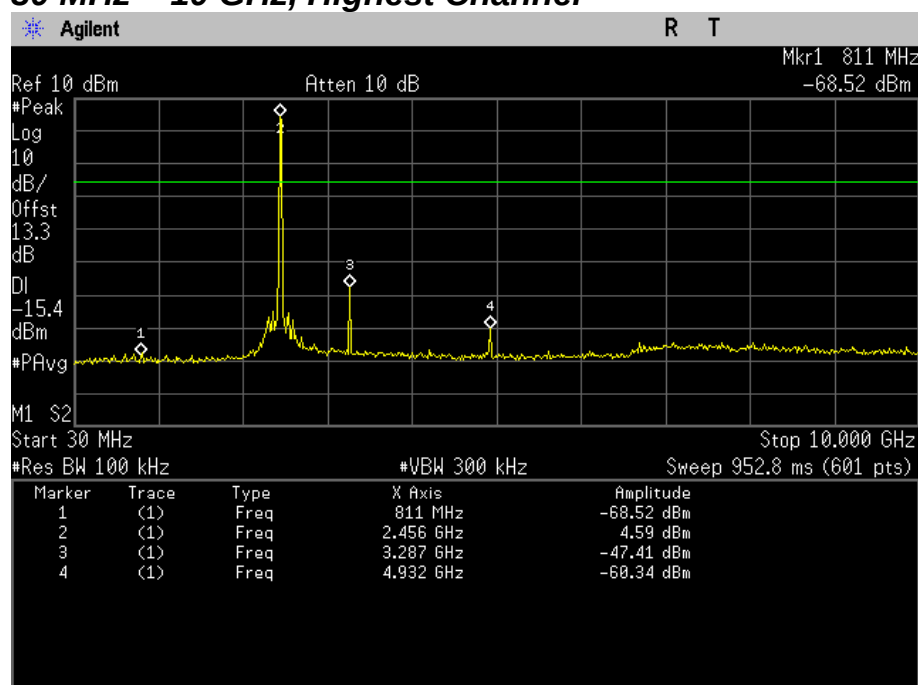


Conducted Spurious Emissions, 802.11b mode, 10 GHz ~ 25 GHz, Highest Channel

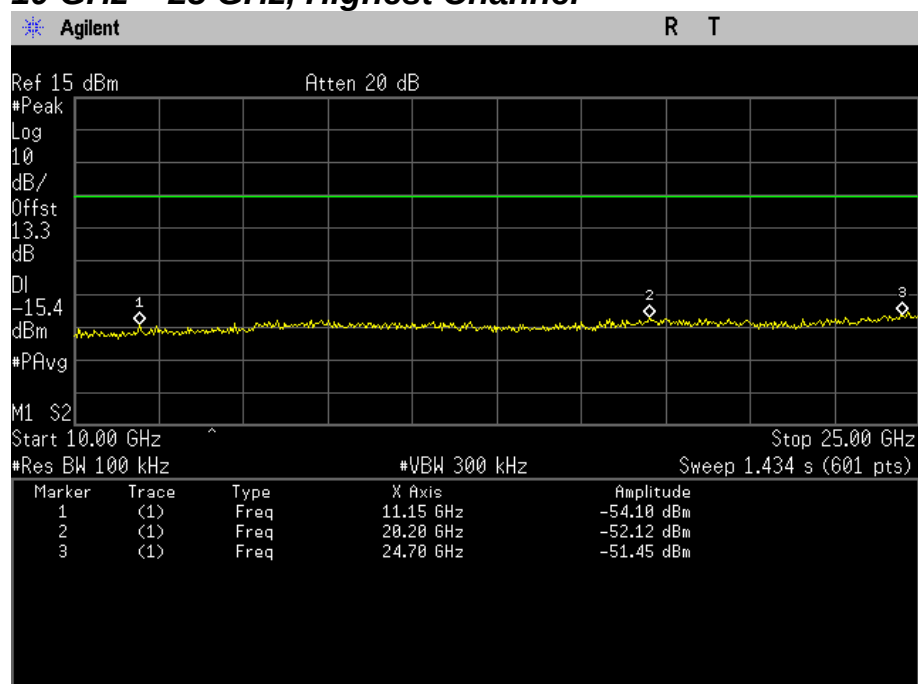


PLOT OF TEST DATA

802.11g mode

Conducted Spurious Emissions, 802.11g mode, 30 MHz ~ 10 GHz, Lowest Channel

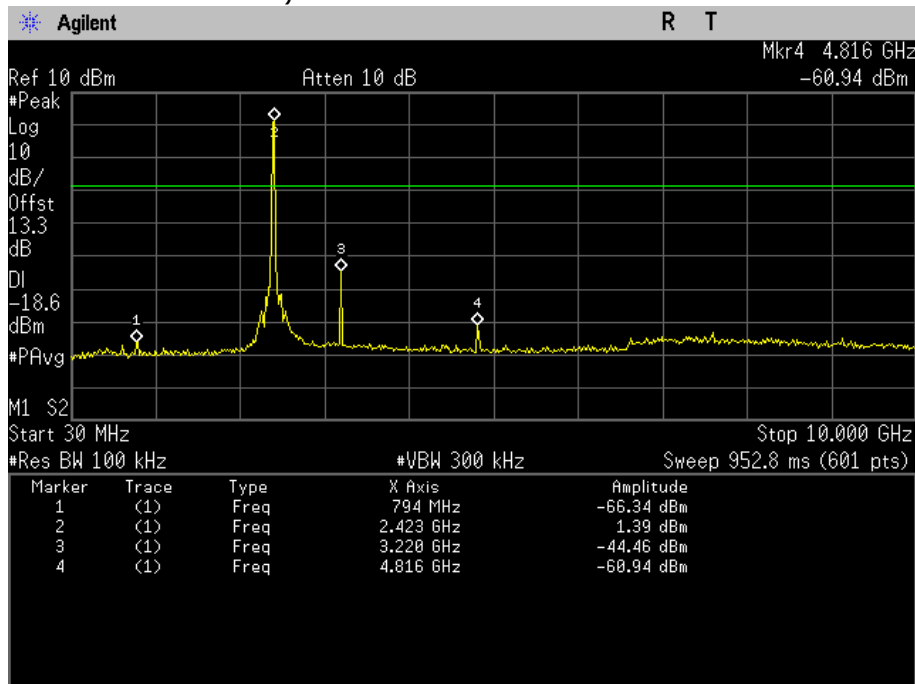


Conducted Spurious Emissions, 802.11g mode, 10 GHz ~ 25 GHz, Lowest Channel

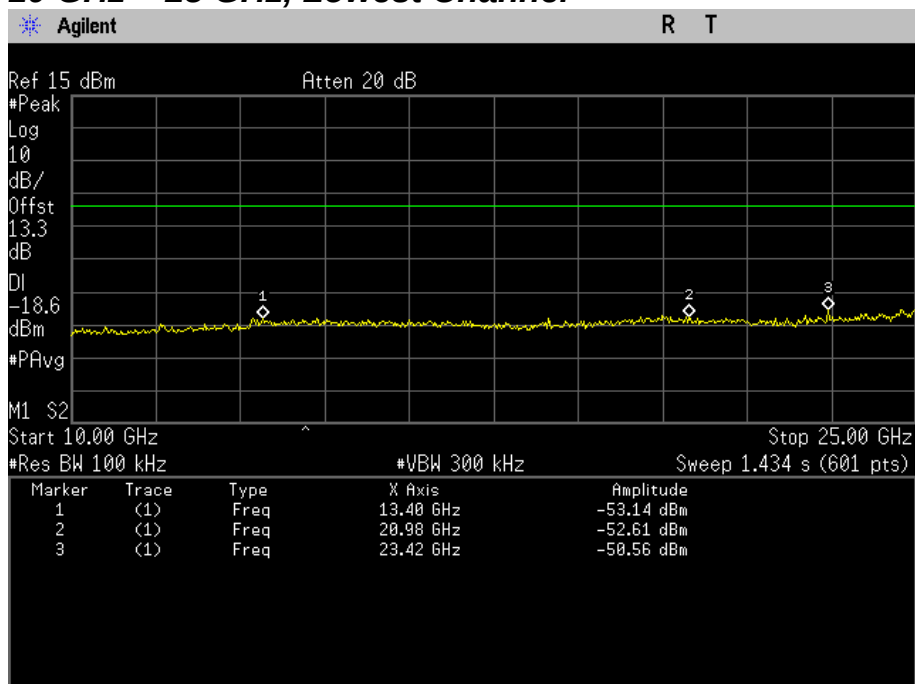


PLOT OF TEST DATA

Conducted Spurious Emissions, 802.11g mode, 30 MHz ~ 10 GHz, Middle Channel

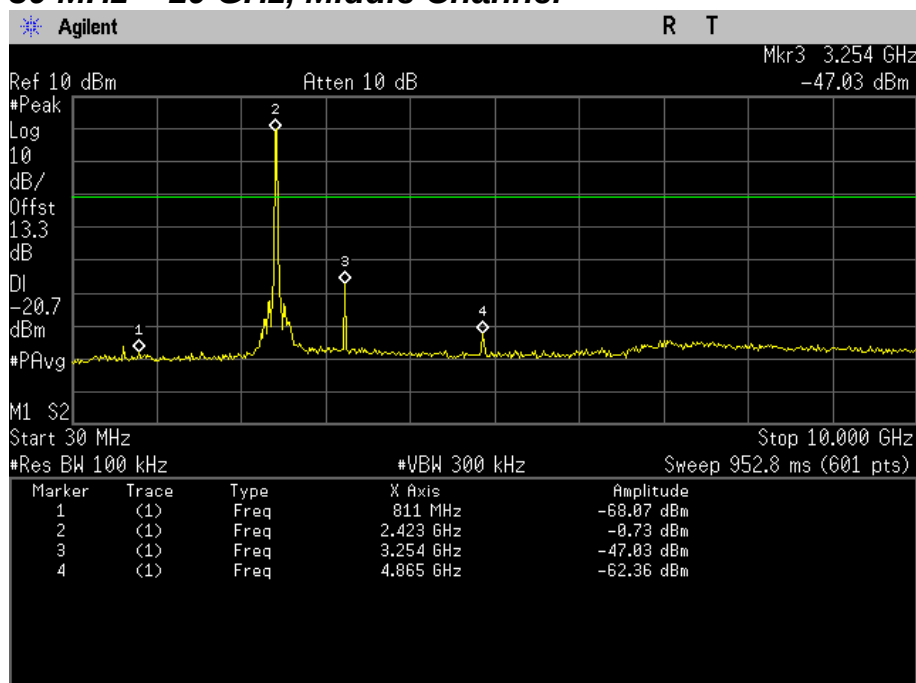


Conducted Spurious Emissions, 802.11g mode, 10 GHz ~ 25 GHz, Middle Channel

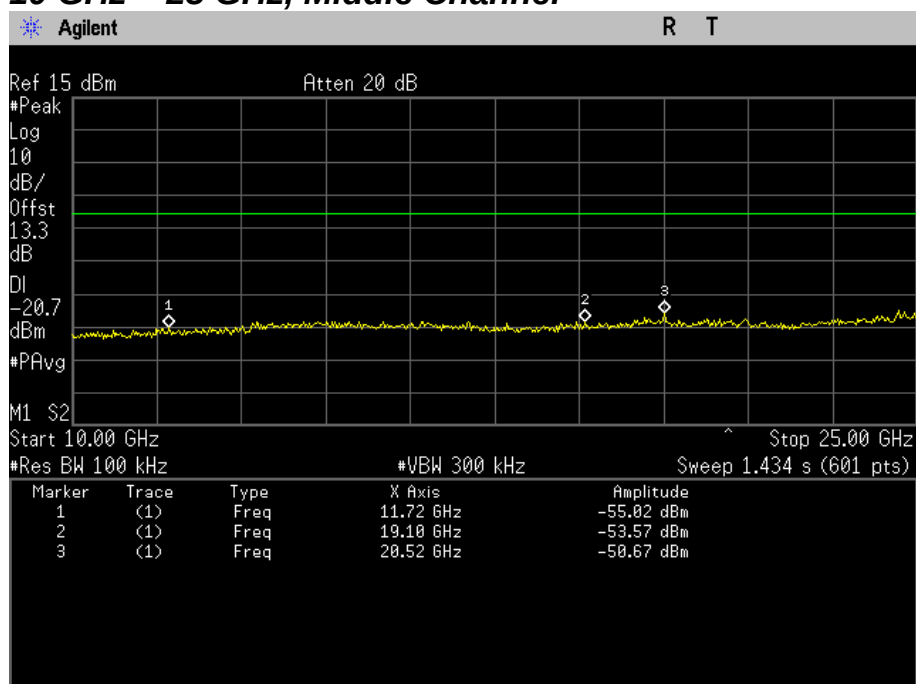


PLOT OF TEST DATA

Conducted Spurious Emissions, 802.11g mode, 30 MHz ~ 10 GHz, Highest Channel

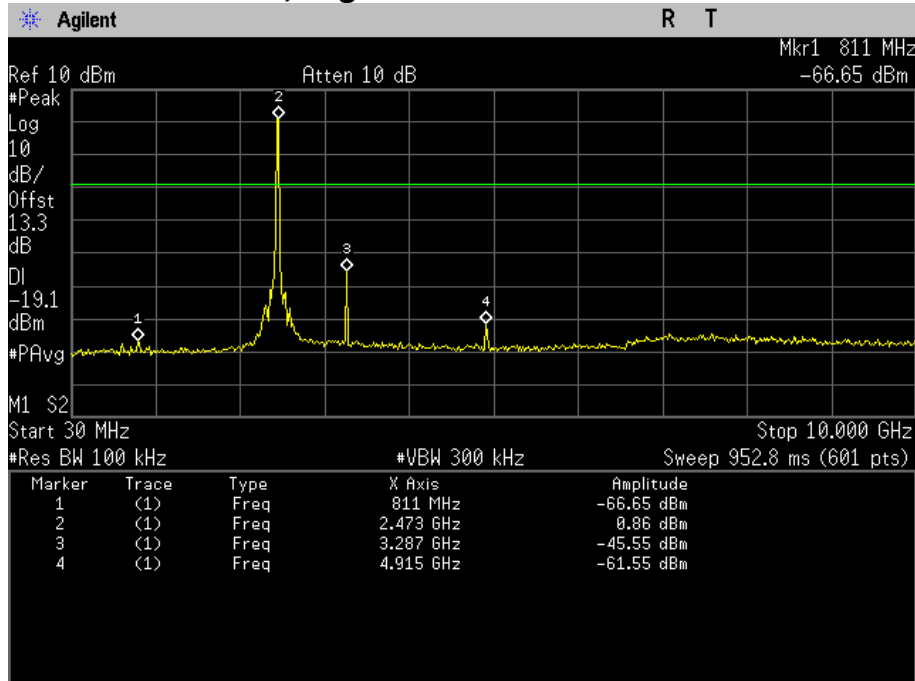


Conducted Spurious Emissions, 802.11g mode, 10 GHz ~ 25 GHz, Highest Channel

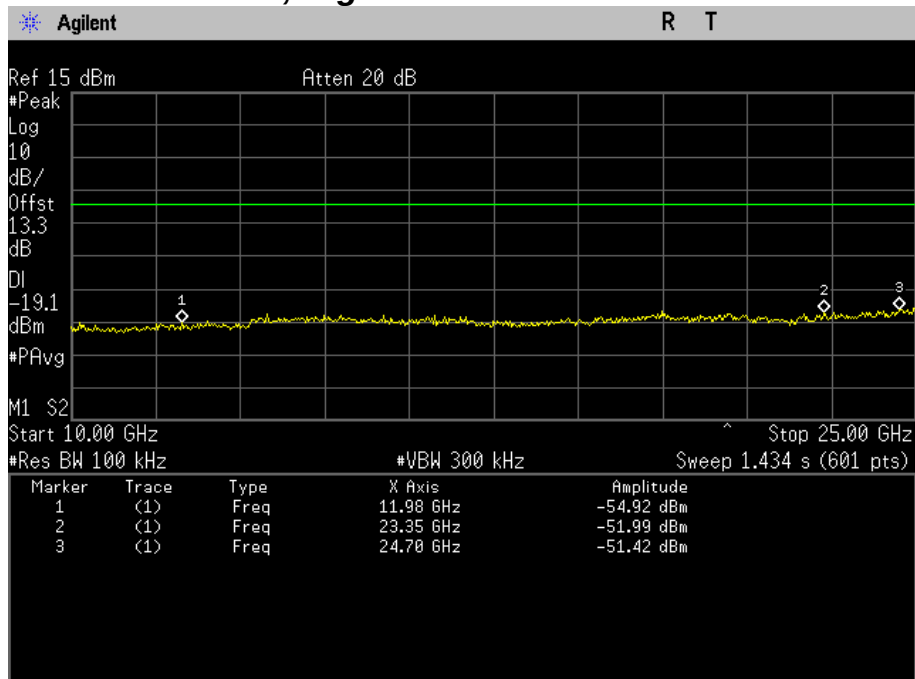


PLOT OF TEST DATA

802.11n(HT20) mode

Conducted Spurious Emissions, 802.11n(HT20) mode, 30 MHz ~ 10 GHz, Lowest Channel

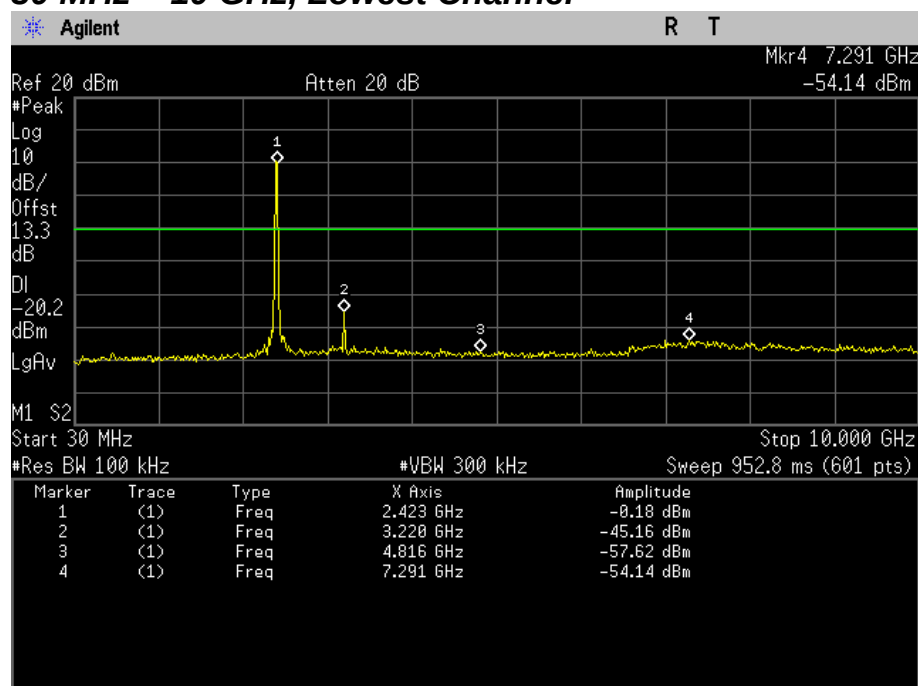


Conducted Spurious Emissions, 802.11n(HT20) mode, 10 GHz ~ 25 GHz, Lowest Channel

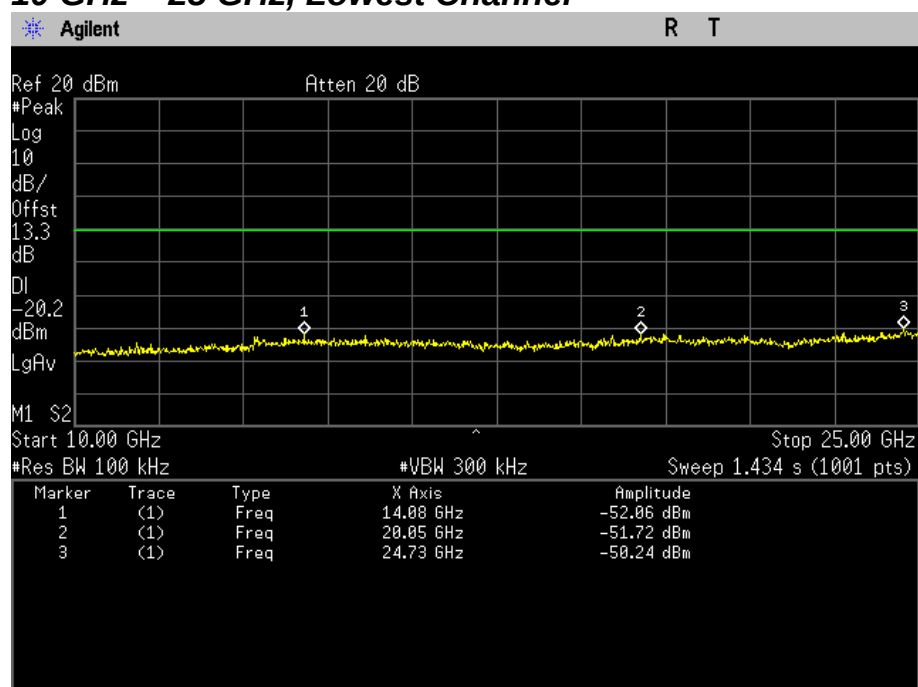


PLOT OF TEST DATA

Conducted Spurious Emissions, 802.11n(HT20) mode, 30 MHz ~ 10 GHz, Middle Channel

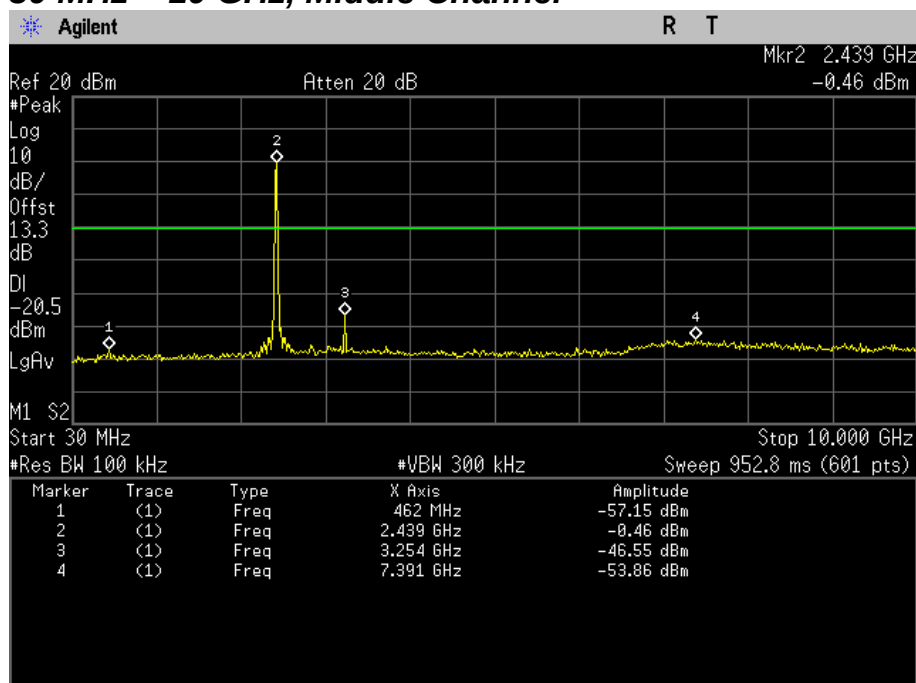


Conducted Spurious Emissions, 802.11n(HT20) mode, 10 GHz ~ 25 GHz, Middle Channel

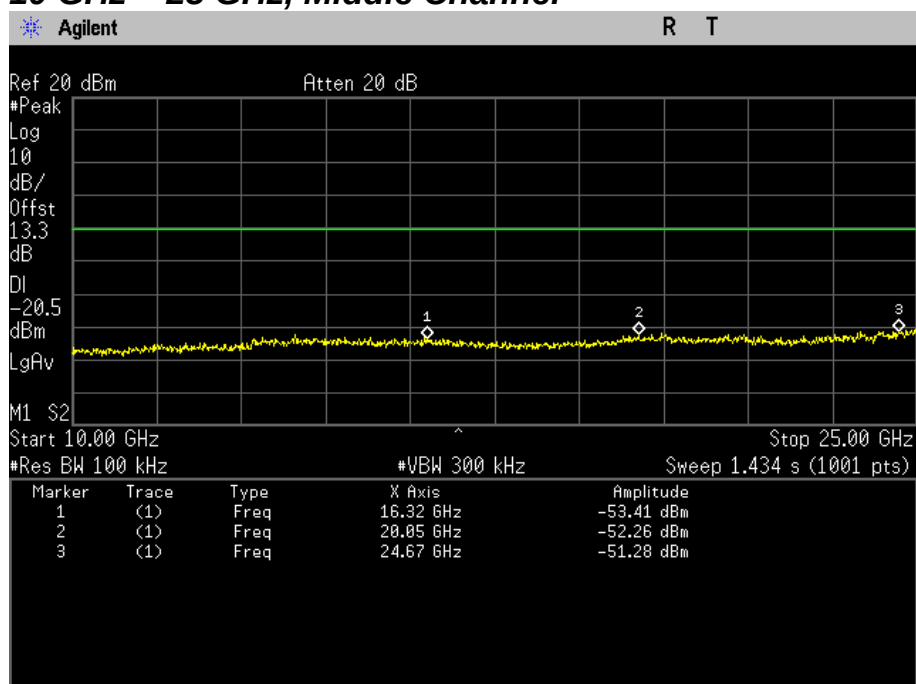


PLOT OF TEST DATA

Conducted Spurious Emissions, 802.11n(HT20) mode, 30 MHz ~ 10 GHz, Highest Channel

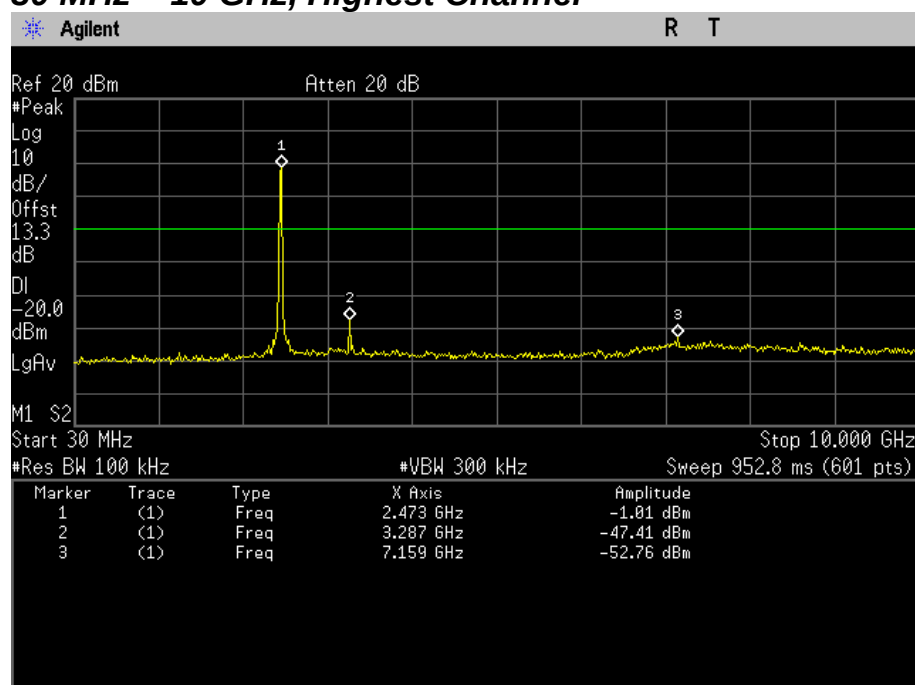


Conducted Spurious Emissions, 802.11n(HT20) mode, 10 GHz ~ 25 GHz, Highest Channel

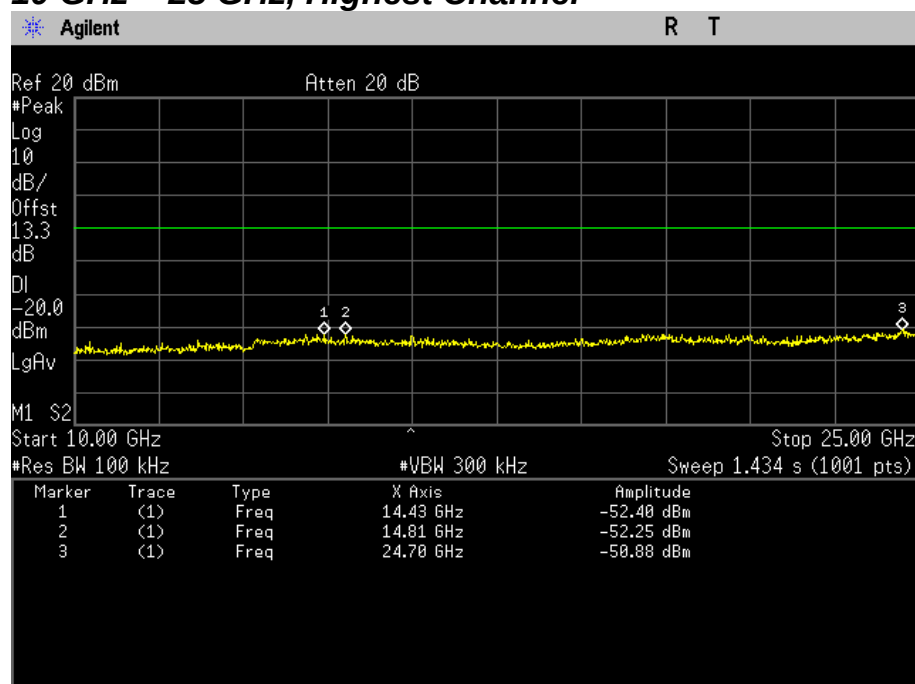


PLOT OF TEST DATA

802.11b mode

Band Edge, 802.11b mode, Lowest Channel

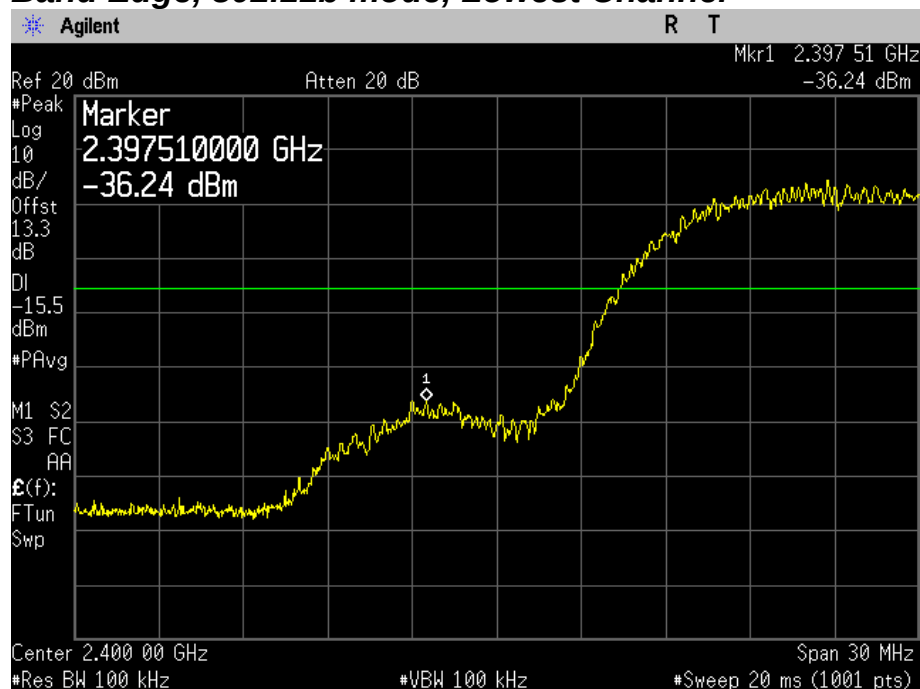


Band Edge, 802.11b mode Highest Channel

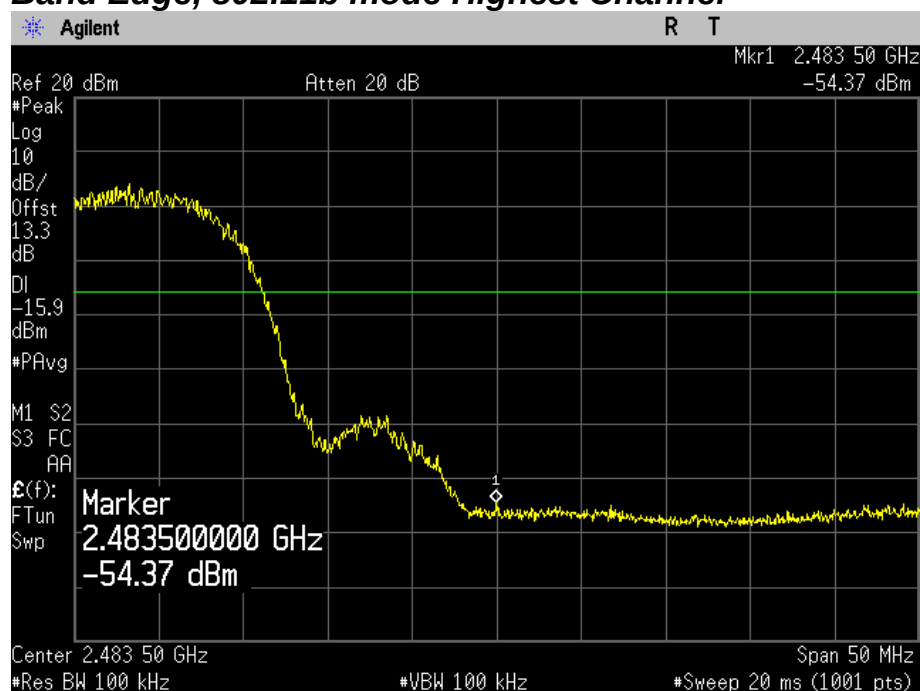


PLOT OF TEST DATA

802.11g mode

Band Edge, 802.11g mode, Lowest Channel

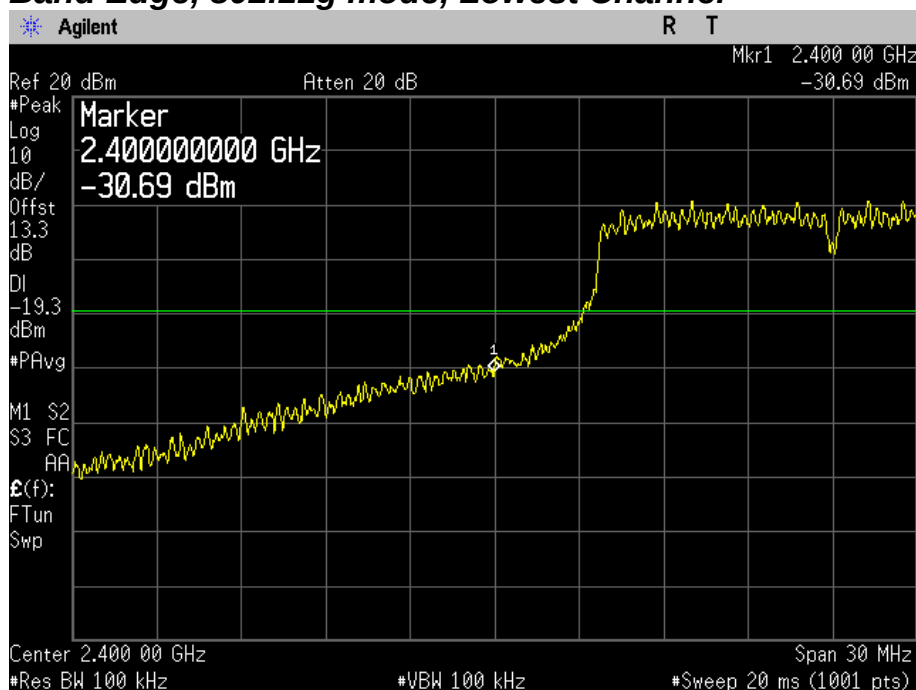


Band Edge, 802.11g mode Highest Channel

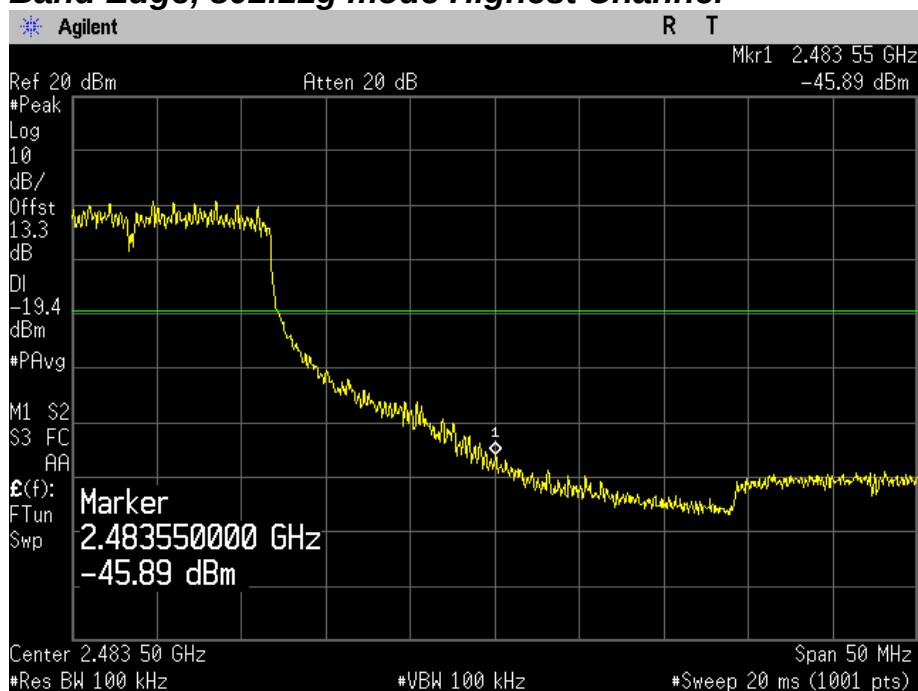


PLOT OF TEST DATA

802.11n(HT20) mode

Band Edge, 802.11n(HT20) mode, Lowest Channel

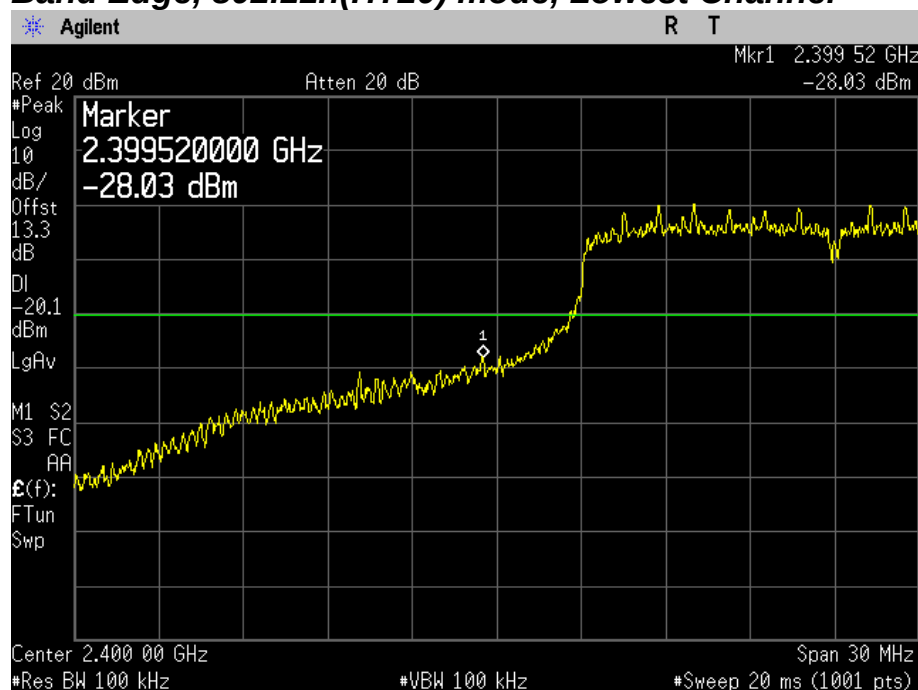

Band Edge, 802.11n(HT20) mode Highest Channel

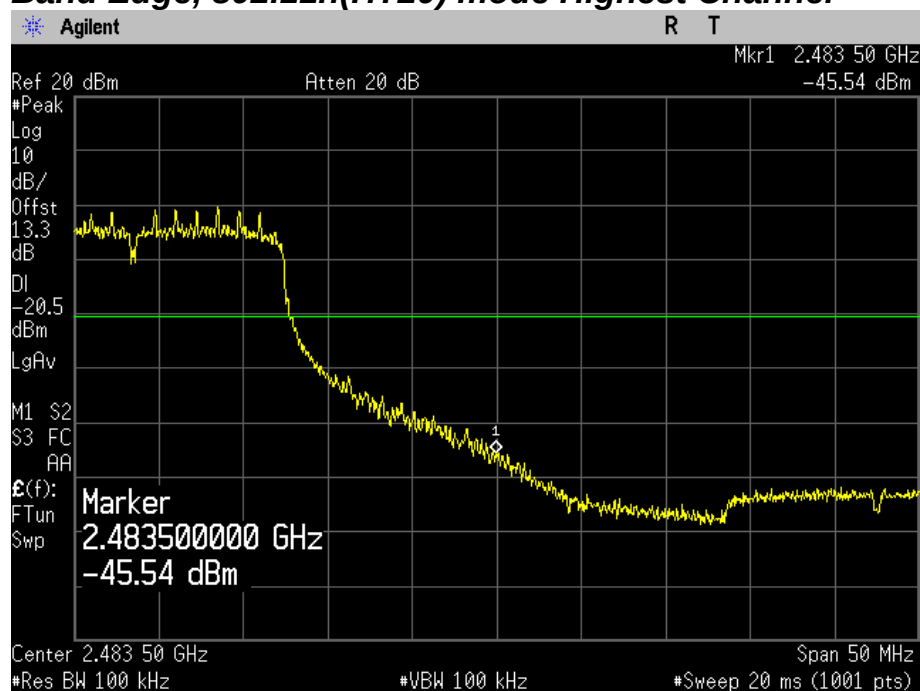

TEST DATA

8.7 Radiated Spurious Emissions

FCC §15.247(d), RSS-210 A8.5

Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result:

802.11b mode

Lowest Channel

Frequency (MHz)	Reading (dB)	Pol* (H/V)	Detector	AF+CL+Amp (dB)**	Result (dB /m)	Limit (dB /m)	Margin (dB)
2268.00	49.6	V	PK	-2.4	47.2	74.0	26.8
2268.00	41.1	V	AV	-2.4	38.7	54.0	15.3
2326.00	45.0	V	PK	2.1	47.1	74.0	26.9
2326.00	34.2	V	AV	2.1	36.3	54.0	17.7
4824.00	48.3	V	PK	8.3	56.6	74.0	17.4
4824.00	38.6	V	AV	8.3	46.9	54.0	7.1

TEST DATA

Middle Channel

Frequency (MHz)	Reading (dB)	Pol* (H/V)	Detector	AF+CL+Amp (dB)**	Result (dB /m)	Limit (dB /m)	Margin (dB)
2293.00	49.9	V	PK	-2.4	47.5	74.0	26.5
2293.00	41.0	V	AV	-2.4	38.6	54.0	15.4
2350.00	47.8	V	PK	-1.9	45.9	74.0	28.1
2350.00	38.1	V	AV	-1.9	36.2	54.0	17.8
4874.00	49.3	V	PK	8.4	57.7	74.0	16.3
4874.00	41.5	V	AV	8.4	49.9	54.0	4.1

Highest Channel

Frequency (MHz)	Reading (dB)	Pol* (H/V)	Detector	AF+CL+Amp (dB)**	Result (dB /m)	Limit (dB /m)	Margin (dB)
2317.00	49.0	V	PK	-2.2	46.8	74.0	27.2
2317.00	40.1	V	AV	-2.2	37.9	54.0	16.1
3282.00	42.3	H	PK	4.0	46.3	74.0	27.7
3282.00	32.5	H	AV	4.0	36.5	54.0	17.5
4924.00	48.9	V	PK	8.6	57.5	74.0	16.5
4924.00	39.9	V	AV	8.6	48.5	54.0	5.5

TEST DATA

802.11g mode

Lowest Channel

Frequency (MHz)	Reading (dB)	Pol* (H/V)	Detector	AF+CL+Amp (dB)**	Result (dB /m)	Limit (dB /m)	Margin (dB)
2275.00	51.4	V	PK	-2.4	49.0	74.0	25.0
2275.00	39.8	V	AV	-2.4	37.4	54.0	16.6
2319.00	51.8	V	PK	-2.2	49.6	74.0	24.4
2319.00	40.9	V	AV	-2.2	38.7	54.0	15.3
2363.00	53.1	V	PK	-1.9	51.2	74.0	22.8
2363.00	42.2	V	AV	-1.9	40.3	54.0	13.7
4824.00	48.2	V	PK	8.3	56.5	74.0	17.5
4824.00	37.2	V	AV	8.3	45.5	54.0	8.5

Middle Channel

Frequency (MHz)	Reading (dB)	Pol* (H/V)	Detector	AF+CL+Amp (dB)**	Result (dB /m)	Limit (dB /m)	Margin (dB)
2348.00	51.3	V	PK	-1.9	49.4	74.0	24.6
2348.00	40.3	V	AV	-1.9	38.4	54.0	15.6
2391.00	52.1	V	PK	-1.9	50.2	74.0	23.8
2391.00	42.0	V	AV	-1.9	40.1	54.0	13.9
2520.00	49.2	V	PK	-1.4	47.8	74.0	26.2
2520.00	37.7	V	AV	-1.4	36.3	54.0	17.7
4874.00	48.1	V	PK	8.4	56.5	74.0	17.5
4874.00	37.2	V	AV	8.4	45.6	54.0	8.4

TEST DATA

Highest Channel

Frequency (MHz)	Reading (dB)	Pol* (H/V)	Detector	AF+CL+Amp (dB)**	Result (dB /m)	Limit (dB /m)	Margin (dB)
2324.00	50.0	V	PK	-2.1	47.9	74.0	26.1
2324.00	39.6	V	AV	-2.1	37.5	54.0	16.5
2370.00	50.4	V	PK	-1.9	48.5	74.0	25.5
2370.00	40.1	V	AV	-1.9	38.2	54.0	15.8
2501.00	51.0	V	PK	-1.4	49.6	74.0	24.4
2501.00	39.9	V	AV	-1.4	38.5	54.0	15.5
4924.00	49.7	V	PK	8.6	58.3	74.0	15.7
4924.00	37.8	V	AV	8.6	46.4	54.0	7.6

802.11n(HT20) mode

Lowest Channel

Frequency (MHz)	Reading (dB)	Pol* (H/V)	Detector	AF+CL+Amp (dB)**	Result (dB /m)	Limit (dB /m)	Margin (dB)
2328.00	50.8	V	PK	-2.1	48.7	74.0	25.3
2328.00	40.3	V	AV	-2.1	38.2	54.0	15.8
2365.00	51.7	V	PK	-1.9	49.8	74.0	24.2
2365.00	41.5	V	AV	-1.9	39.6	54.0	14.4
2496.00	49.5	V	PK	-1.5	48.0	74.0	26.0
2496.00	38.1	V	AV	-1.5	36.6	54.0	17.4
4824.00	49.0	V	PK	8.3	57.3	74.0	16.7
4824.00	36.5	V	AV	8.3	44.8	54.0	9.2

TEST DATA

Middle Channel

Frequency (MHz)	Reading (dB)	Pol* (H/V)	Detector	AF+CL+Amp (dB)**	Result (dB /m)	Limit (dB /m)	Margin (dB)
2347.00	51.0	V	PK	-1.9	49.1	74.0	24.9
2347.00	40.3	V	AV	-1.9	38.4	54.0	15.6
2521.00	50.1	V	PK	-1.3	48.8	74.0	25.2
2521.00	38.1	V	AV	-1.3	36.8	54.0	17.2
3249.00	42.4	H	PK	3.8	46.2	74.0	27.8
3249.00	33.3	H	AV	3.8	37.1	54.0	16.9
4874.00	47.4	V	PK	8.4	55.8	74.0	18.2
4874.00	34.6	V	AV	8.4	43.0	54.0	11.0

Highest Channel


Frequency (MHz)	Reading (dB)	Pol* (H/V)	Detector	AF+CL+Amp (dB)**	Result (dB /m)	Limit (dB /m)	Margin (dB)
2371.00	50.7	V	PK	-1.9	48.8	74.0	25.2
2371.00	40.4	V	AV	-1.9	38.5	54.0	15.5
2502.00	51.4	V	PK	-1.4	50.0	74.0	24.0
2502.00	39.9	V	AV	-1.4	38.5	54.0	15.5
3282.00	42.2	H	PK	4.0	46.2	74.0	27.8
3282.00	33.3	H	AV	4.0	37.3	54.0	16.7
4924.00	48.8	V	PK	8.6	57.4	74.0	16.6
4924.00	35.2	V	AV	8.6	43.8	54.0	10.2

1. **Pol. H = Horizontal V = Vertical*
2. ***AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.*
3. *Other spurious are 20 dB below than Fundamental.*
4. *The radiated emissions testing were made by rotating through three orthogonal axes.
The worst date was recorded.*
5. *For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.*
6. *The spectrum is measured from 9 kHz to 10th harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.*


PLOT OF TEST DATA

802.11b mode

Restricted Band Spurious Emissions, 802.11b, Lowest channel Peak

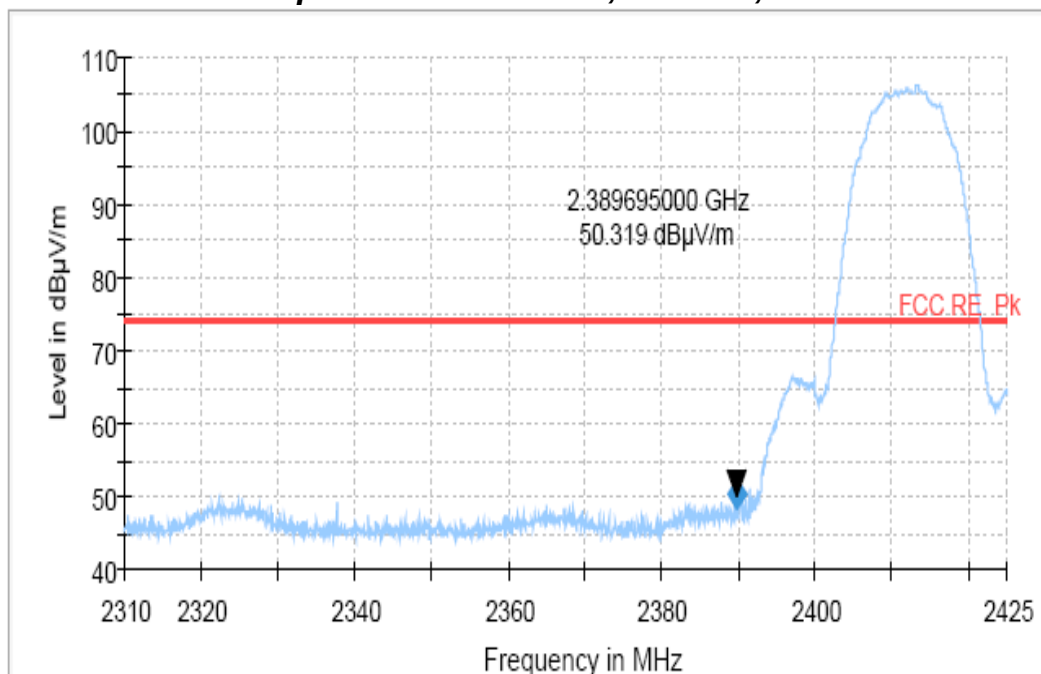


Restricted Band Spurious Emissions, 802.11b, Lowest channel Average

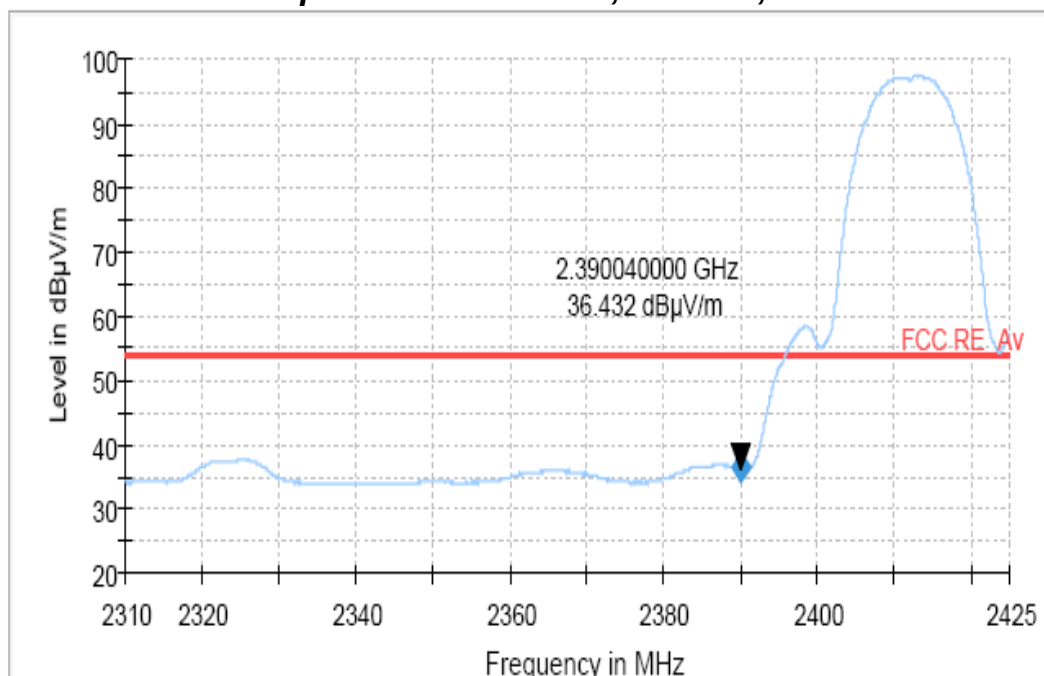


PLOT OF TEST DATA

Restricted Band Spurious Emissions, 802.11b, Highest channel Peak

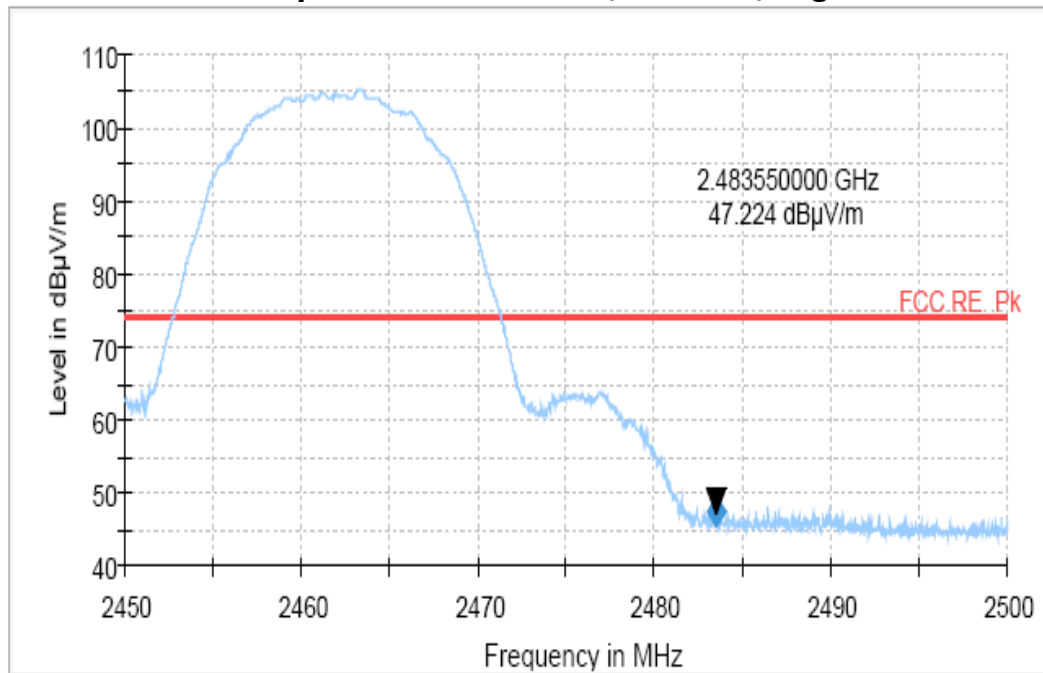


Restricted Band Spurious Emissions, 802.11b, Highest channel Average

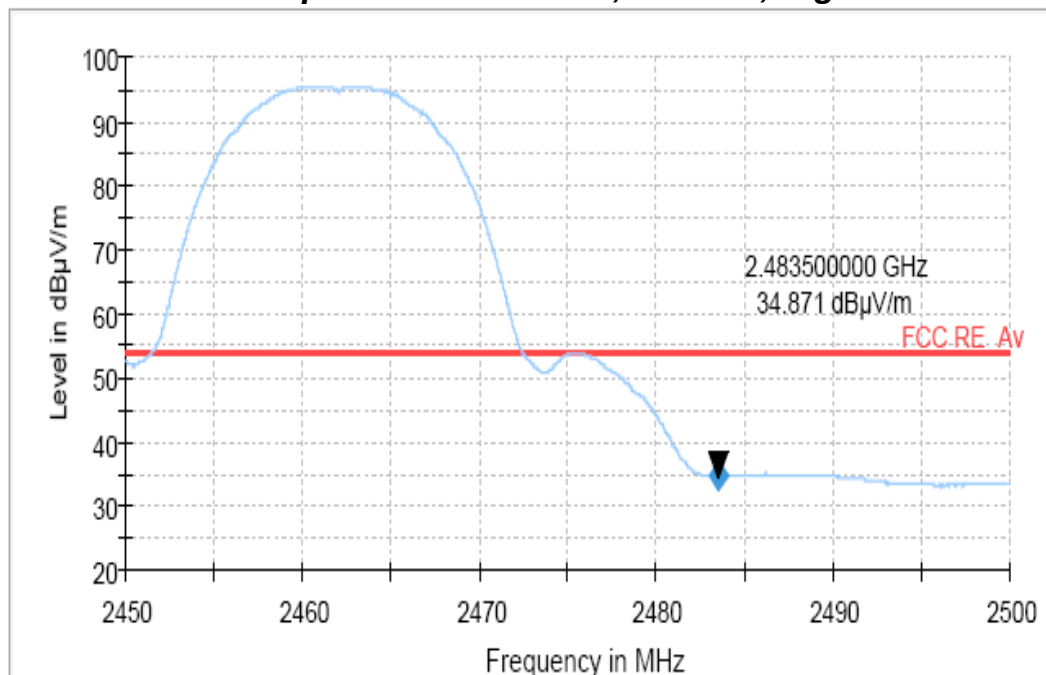


PLOT OF TEST DATA

802.11g mode

Restricted Band Spurious Emissions, 802.11g, Lowest channel Peak

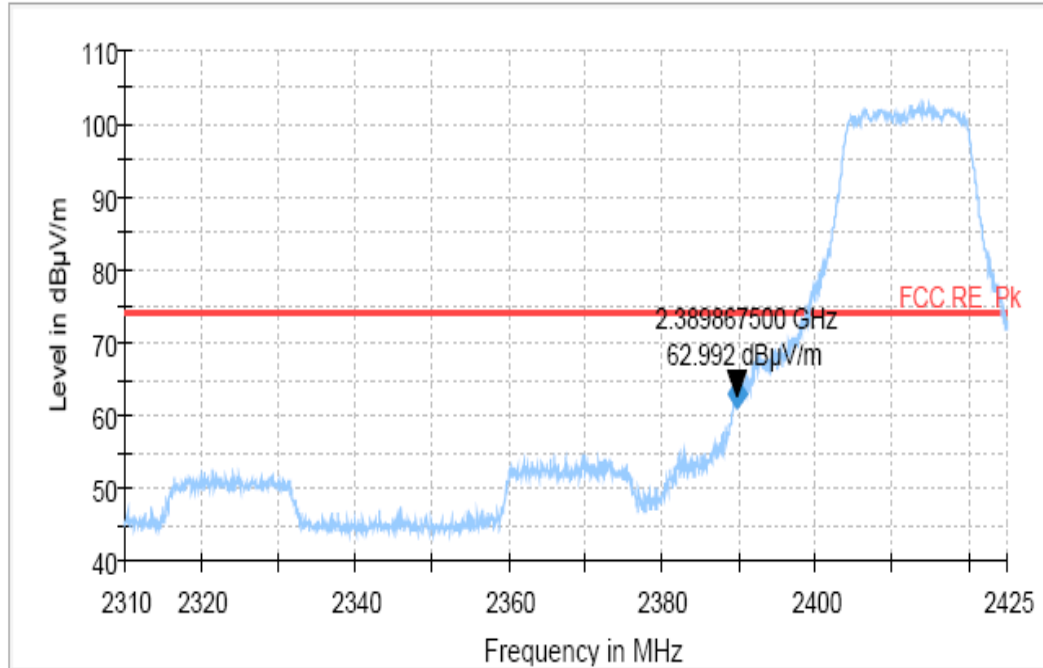


Restricted Band Spurious Emissions, 802.11g, Lowest channel Average

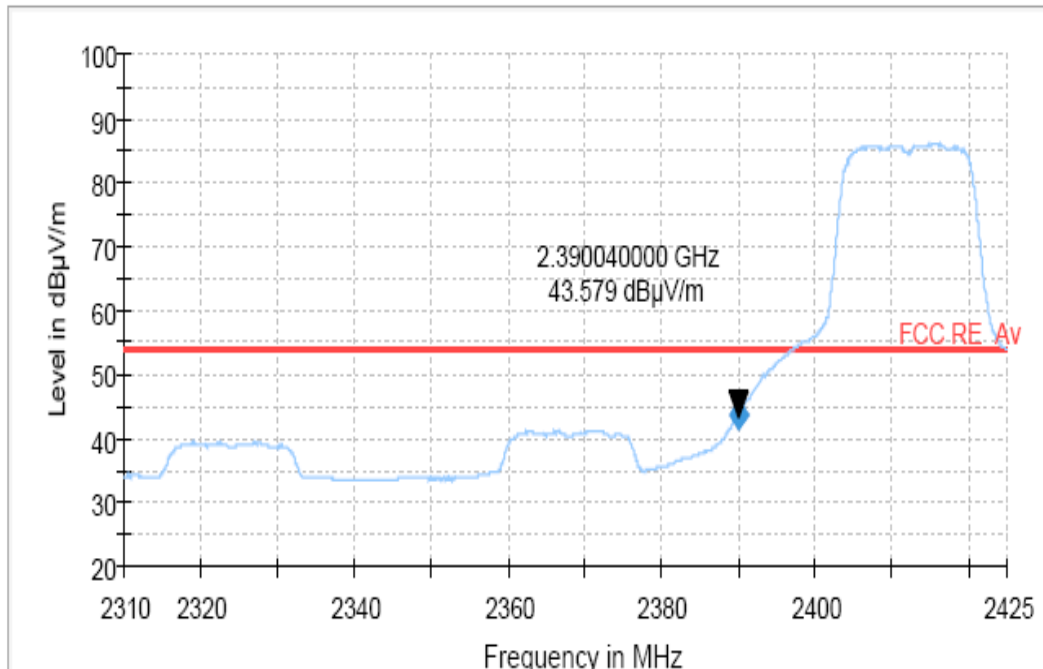


PLOT OF TEST DATA

Restricted Band Spurious Emissions, 802.11g, Highest channel Peak

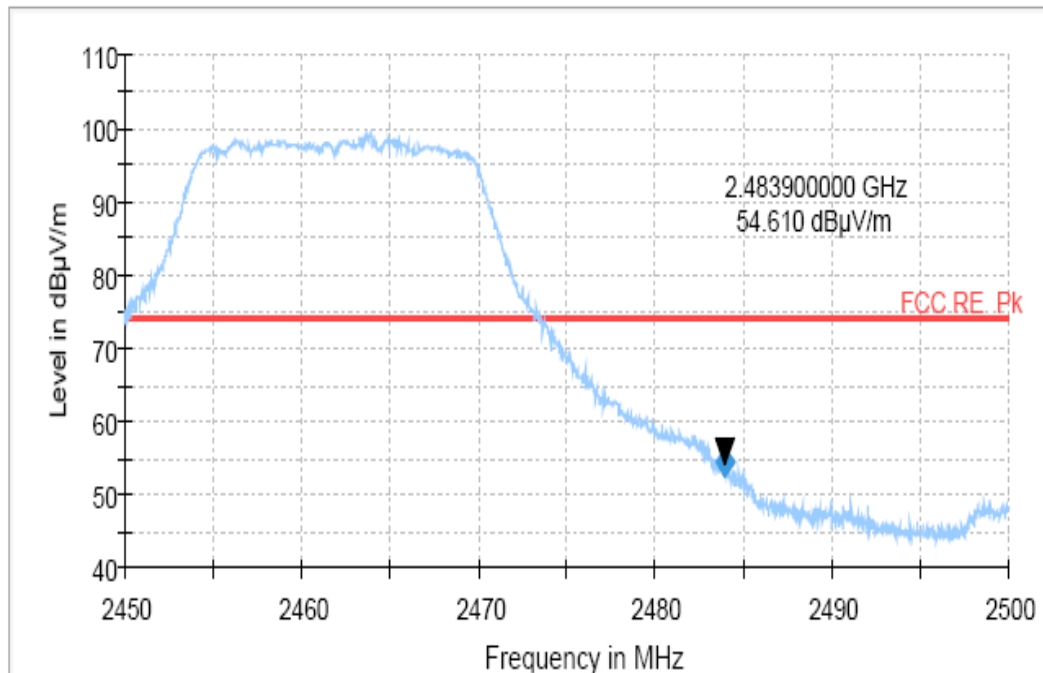


Restricted Band Spurious Emissions, 802.11g, Highest channel Average

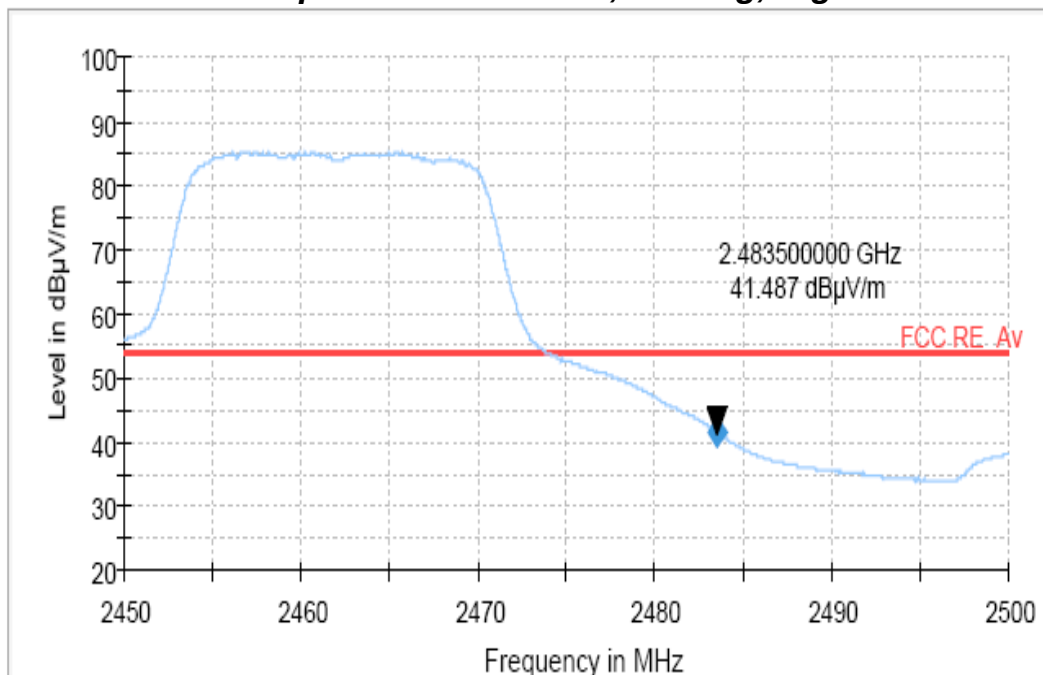


PLOT OF TEST DATA

802.11n(HT20) mode

Restricted Band Spurious Emissions, 802.11n(HT20), Lowest channel Peak

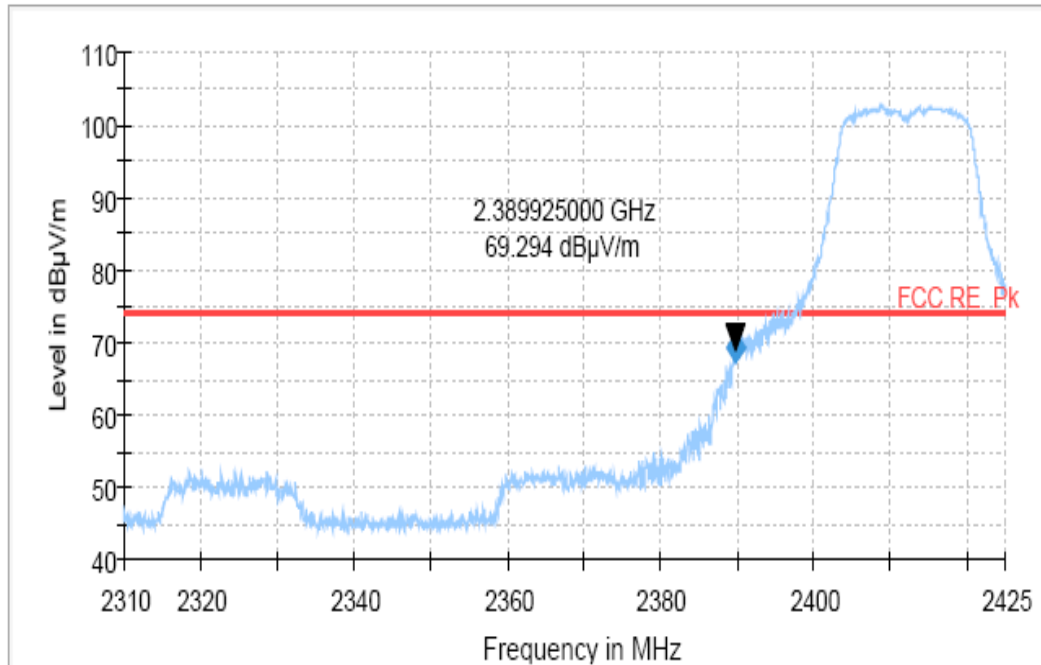


Restricted Band Spurious Emissions, 802.11n(HT20), Lowest channel Average

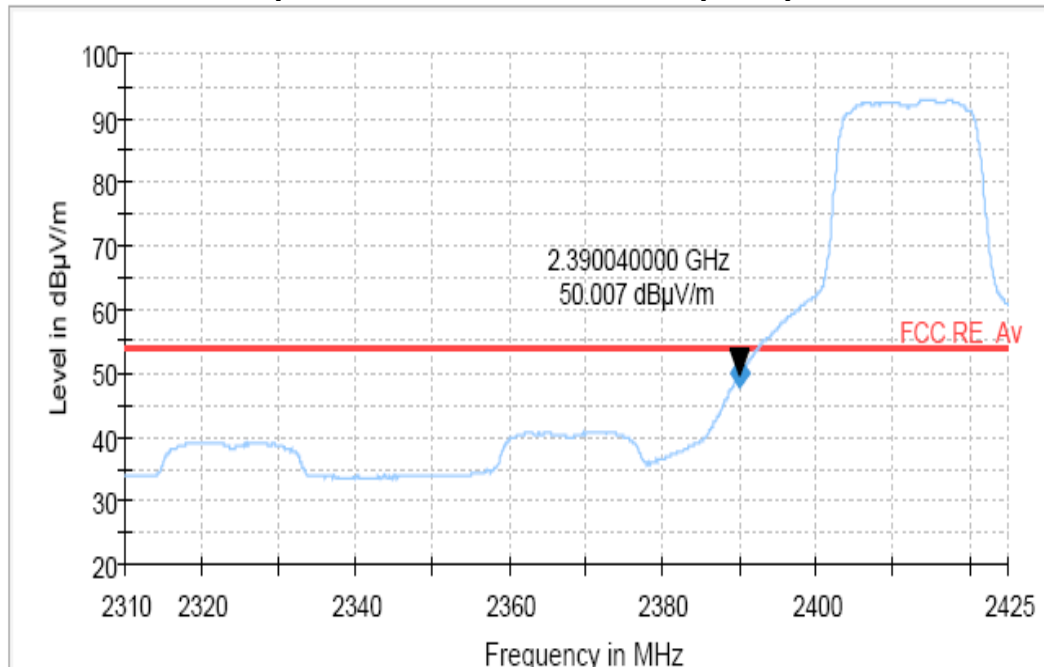


PLOT OF TEST DATA

Restricted Band Spurious Emissions, 802.11n(HT20), Highest channel Peak

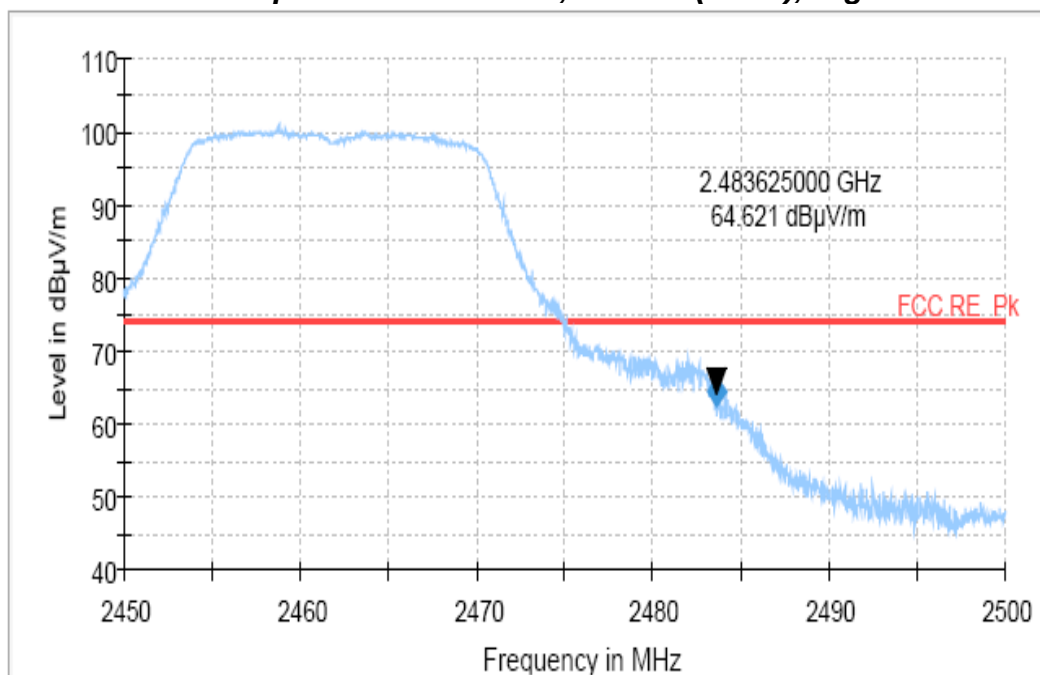

Restricted Band Spurious Emissions, 802.11n(HT20), Highest channel Average

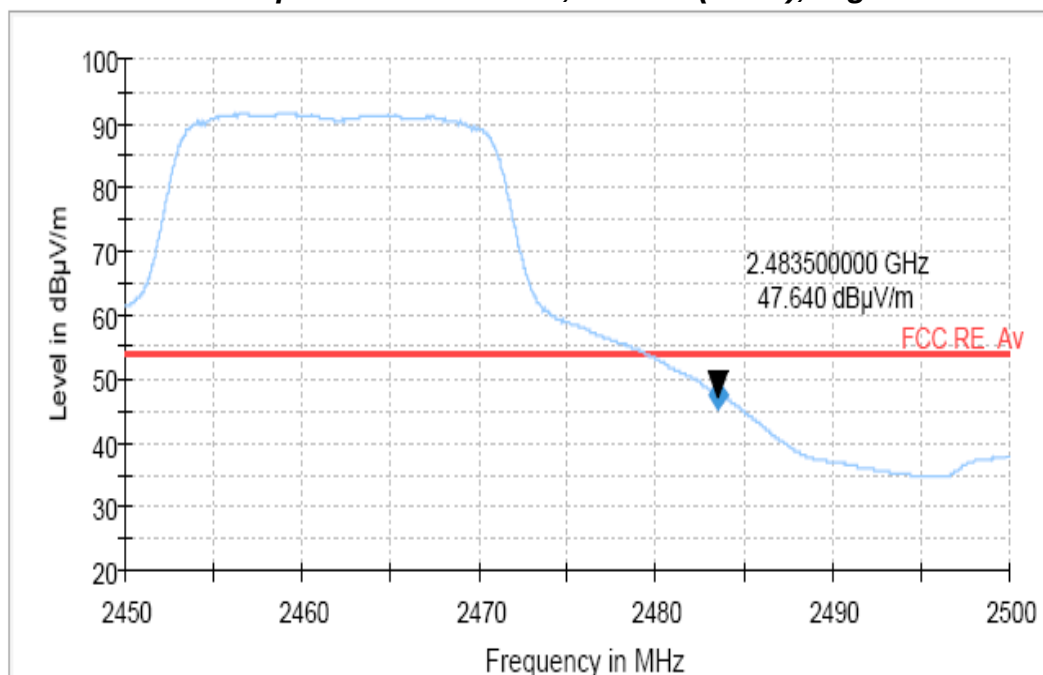

Note: For the radiated emission field strength measurements at the bandedges, the resolution bandwidth and video bandwidth were set to 1 MHz. Peak detector was used.

TEST DATA

8.8 Receiver Spurious Emissions

RSS-GEN 7.2.5

Frequency (MHz)	Reading (dB /m)	Pol* (H/V)	Antenna Height (cm)	Turntable Angles (°)	AF+CL+Amp (dB)**	Result (dB /m)	Limit (dB /m)	Margin (dB)
144.00	52.8	H	221	243	-17.1	35.7	43.5	7.8
225.00	46.4	H	164	208	-19.1	27.3	46.0	18.7
288.00	48.2	H	127	24	-15.5	32.7	46.0	13.3
336.00	52.8	H	125	13	-13.6	39.2	46.0	6.8
432.00	50.6	H	100	284	-11.1	39.5	46.0	6.5
528.00	47.6	H	100	76	-8.9	38.7	46.0	7.3

Radiated Measurements at 3 meters

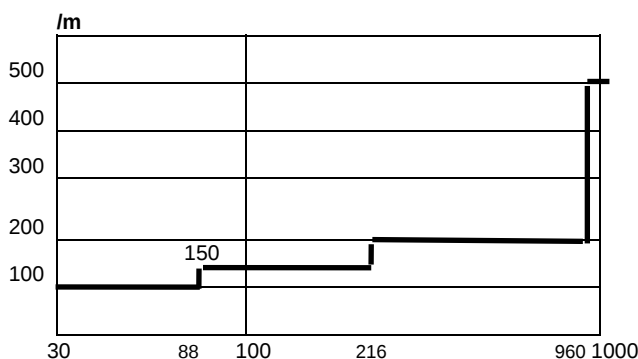


Fig. 5. Limits at 3 meters

NOTES:

1. All modes were measured and the worst-case emission was reported.

2 The radiated limits are shown on Figure 5.

Above 1GHz the limit is 500 /m.

NOTES:

- *Pol. H = Horizontal, V = Vertical
- **AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
- Measurements using CISPR quasi-peak mode.
- The radiated emissions testing were made by rotating through three orthogonal axes.
The worst date was recorded.
- The limit is on the IC RSS GEN Clause 6.

9. ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of measurement uncertainty contained in CISPR 16-4-2 with the confidence level of 95%

1. Conducted Uncertainty Calculation

Source of Uncertainty	X_i	Uncertainty of X_i		Coverage factor k	$u(X_i)$ (dB)	C_i	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Receiver reading	RI	± 0.1	normal 1	1.000	0.1	1	0.1
Attenuation AMN-Receiver	LC	± 0.08	normal 2	2.000	0.04	1	0.04
AMN Voltage division factor	LAMN	± 0.8	normal 2	2.000	0.4	1	0.4
Sine wave voltage	dVSW	± 2.00	normal 2	2.000	1.00	1	1.00
Pulse amplitude response	dVPA	± 1.50	rectangular	1.732	0.87	1	0.87
Pulse repetition rate response	dVPR	± 1.50	rectangular	1.732	0.87	1	0.87
Noise floor proximity	dVNF	± 0.00	-	-	0.00	1	0.00
AMN Impedance	dZ	± 1.80	triangular	2.449	0.73	1	0.73
Mismatch	M	+ 0.70	U-Shaped	1.414	0.49	1	0.49
Mismatch	M	- 0.80	U-Shaped	1.414	- 0.56	1	- 0.56
Measurement System Repeatability	RS	0.05	normal 1	1.000	0.05	1	0.05
Remark	: AMN-Receiver Mismatch : + : AMN-Receiver Mismatch : -						
Combined Standard Uncertainty	Normal			± 1.88			
Expanded Uncertainty U	Normal ($k = 2$)			± 3.76			

2. Radiation Uncertainty Calculation

Source of Uncertainty	X_i	Uncertainty of X_i		Coverage factor k	$u(X_i)$ (dB)	C_i	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Receiver reading	RI	± 0.10	normal 1	1.000	0.10	1	0.10
Sine wave voltage	dVsw	± 2.00	normal 2	2.000	1.00	1	1.00
Pulse amplitude response	dVpa	± 1.50	rectangular	1.732	0.87	1	0.87
Pulse repetition rate response	dVpr	± 1.50	rectangular	1.732	0.87	1	0.87
Noise floor proximity	dVnf	± 0.50	normal 2	2.000	0.25	1	0.25
Antenna Factor Calibration	AF	± 1.50	normal 2	2.000	0.75	1	0.75
Attenuation Antenna-receiver	CL	± 0.52	normal 2	2.000	0.26	1	0.26
Antenna Directivity	AD	± 1.00	rectangular	1.732	0.58	1	0.58
Antenna Factor Height Dependence	AH	± 0.50	rectangular	1.732	0.29	1	0.29
Antenna Phase Centre Variation	AP	± 0.30	rectangular	1.732	0.17	1	0.17
Antenna Factor Frequency Interpolation	AI	± 0.30	rectangular	1.732	0.17	1	0.17
Site Imperfections	SI	± 4.00	triangular	2.449	1.63	1	1.63
Measurement Distance Variation	DV	± 0.10	rectangular	1.732	0.06	1	0.06
Antenna Balance	Dbal	± 0.90	rectangular	1.732	0.52	1	0.52
Cross Polarisation	DCross	± 0.90	rectangular	1.732	0.52	1	0.52
Mismatch	M	+ 0.25	U-Shaped	1.414	0.18	1	0.18
Mismatch	M	- 0.26	U-Shaped	1.414	- 0.18	1	- 0.18
Mismatch	M	+ 0.98	U-Shaped	1.414	0.69	1	0.69
Mismatch	M	- 1.11	U-Shaped	1.414	- 0.79	1	- 0.79
Measurement System Repeatability	RS	0.09	normal 1	1.000	0.09	1	0.09
Remark	: Biconical Antenna-receiver Mismatch : + (< 200 MHz) : Biconical Antenna-receiver Mismatch : - (< 200 MHz) : Log Periodic Antenna-receiver Mismatch : + ($\geq$ 200 MHz) : Log Periodic Antenna-receiver Mismatch : - ($\geq$ 200 MHz)						
Combined Standard Uncertainty	Normal			± 2.63 (< 200 MHz) ± 2.74 ($\geq$ 200 MHz)			
Expanded Uncertainty U	Normal ($k = 2$)			± 5.26 (< 200 MHz) ± 5.48 ($\geq$ 200 MHz)			

10. TEST EQUIPMENT

No.	Instrument	Manufacturer	Model	Serial No.	Calibration Date	Calibration Interval
1	*Test Receiver	R & S	ESCS 30	833364/020	Mar. 24 2010	1 year
2	*Test Receiver	R & S	ESCS 30	100302	Nov. 10 2010	1 year
3	*Amplifier	HP	8447F	2805A03427	Jul. 20 2010	1 year
4	*Amplifier	Sonoma Instrument	310N	291916	Jul. 20 2010	1 year
5	*Amplifier	R & S	SCU-26	10011	Jun. 11 2010	1 year
6	*Pre Amplifier	HP	8449B	3008A00107	Feb. 03 2010	1 year
7	*Pre Amplifier	HP	8447F	2805A03351	Oct. 06 2010	1 year
8	*Spectrum Analyzer	Agilent	E4440A	MY44303257	Jul. 20 2010	1 year
9	*Spectrum Analyzer	Agilent	E4440A	MY44022567	Jun. 03 2010	1 year
10	*Spectrum Analyzer	R & S	FSP40	100361	Sep. 02 2010	1 year
11	*Loop Antenna	EMCO	6502	8911-2436	Jan. 11 2009	2 year
12	Power Meter	R & S	NRVS	835360/002	Jan. 15 2010	1 year
13	*Wideband Power Sensor	R & S	NRP-Z81	100634	May. 26 2010	1 year
14	*Biconical Log Antenna	ARA	LPB-2520/A	1180	Apr. 14 2010	2 year
15	*Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-508	Dec.24 2010	2 year
16	*Horn Antenna	Q-par Angus	QSH20S20	8179	Apr. 12 2010	2 year
17	*Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-257	Apr. 14 2010	2 year
18	Logbicon Antenna	SCHWARZBECK	VULB9166	1067	Jul. 14 2010	2 year
19	*LISN	R & S	ESH3-Z5	833874/006	Nov. 10 2010	1 year
20	LISN	R & S	ESH2-Z5	100227	Feb. 03 2010	1 year
21	*Position Controller	DAEIL EMC	N/A	N/A	N/A	N/A
22	*Turn Table	DAEIL EMC	N/A	N/A	N/A	N/A
23	*Antenna Mast	DAEIL EMC	N/A	N/A	N/A	N/A
24	*Anechoic Chamber	EM Eng.	N/A	N/A	N/A	N/A
25	*Shielded Room	EM Eng.	N/A	N/A	N/A	N/A
26	*Position Controller	Seo-Young EMC	N/A	N/A	N/A	N/A
27	*Turn Table	Seo-Young EMC	N/A	N/A	N/A	N/A
28	*Antenna Mast	Seo-Young EMC	N/A	N/A	N/A	N/A
29	*Anechoic Chamber	Seo-Young EMC	N/A	N/A	N/A	N/A
30	*Shielded Room	Seo-Young EMC	N/A	N/A	N/A	N/A

*) Test equipment used during the test