




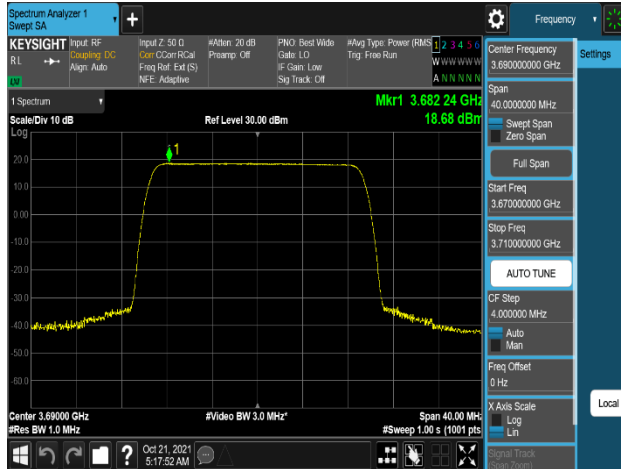


Plot 8-53. Power Spectral Density Plot
(NR_n48_1C_20M_64QAM - High Channel, Port 2)

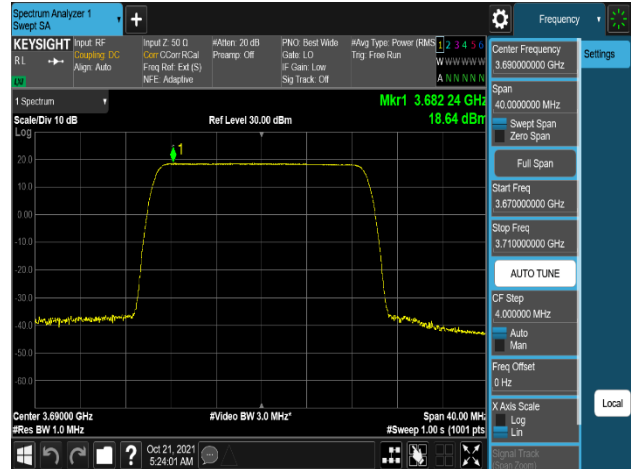


Plot 8-54. Power Spectral Density Plot
(NR_n48_1C_20M_64QAM - High Channel, Port 3)

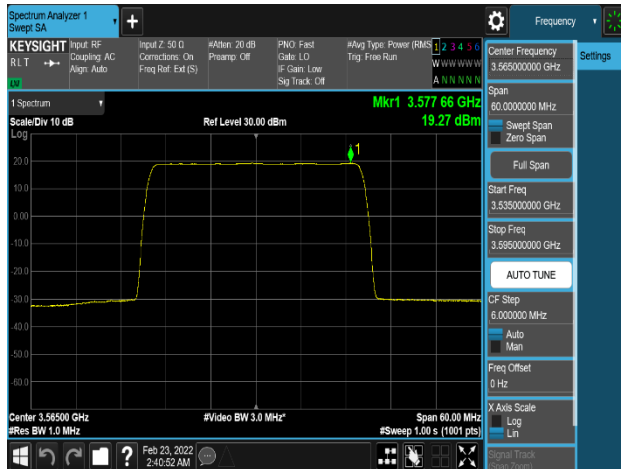


Plot 8-55. Power Spectral Density Plot
(NR_n48_1C_30M_16QAM - Low Channel, Port 0)

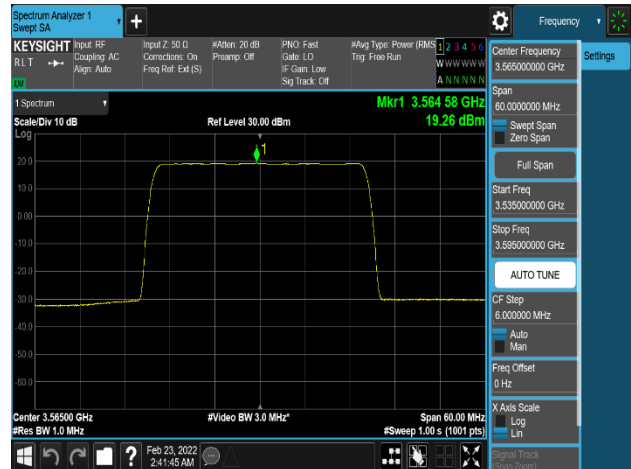

Plot 8-56. Power Spectral Density Plot
(NR_n48_1C_30M_16QAM - Low Channel, Port 1)

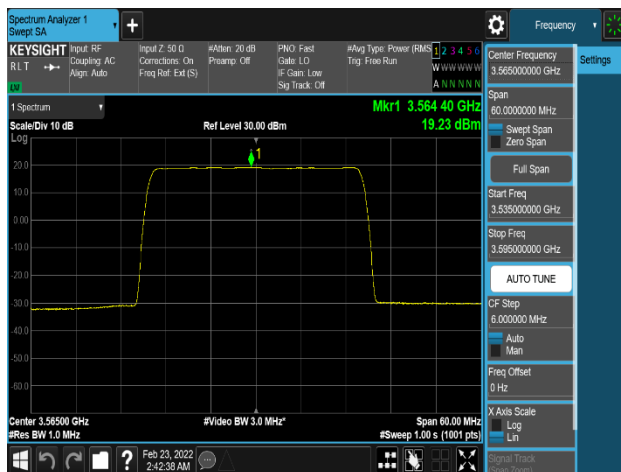


Plot 8-57. Power Spectral Density Plot
(NR_n48_1C_30M_16QAM - Low Channel, Port 2)

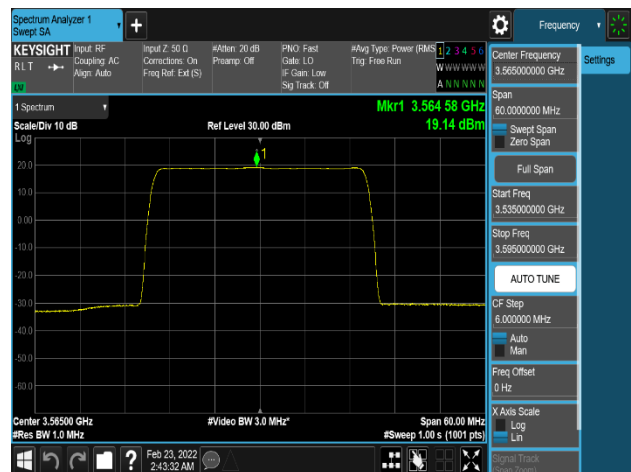


Plot 8-58. Power Spectral Density Plot
(NR_n48_1C_30M_16QAM - Low Channel, Port 3)


FCC: A3LRT4401-48A	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (Class II Permissive Change)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)		Page 49 of 175

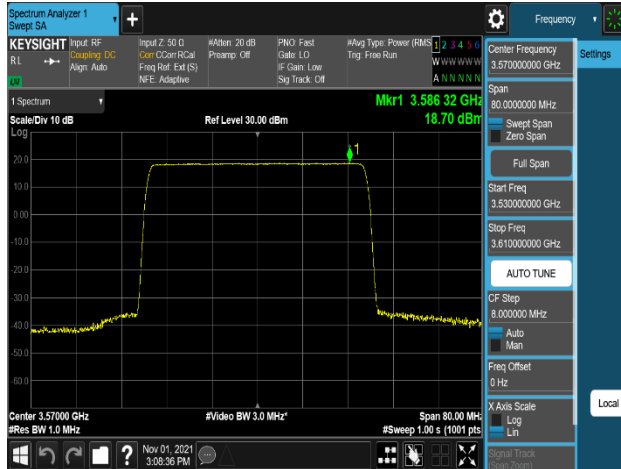


Plot 8-59. Power Spectral Density Plot
(NR_n48_1C_40M_256QAM - Low Channel, Port 0)

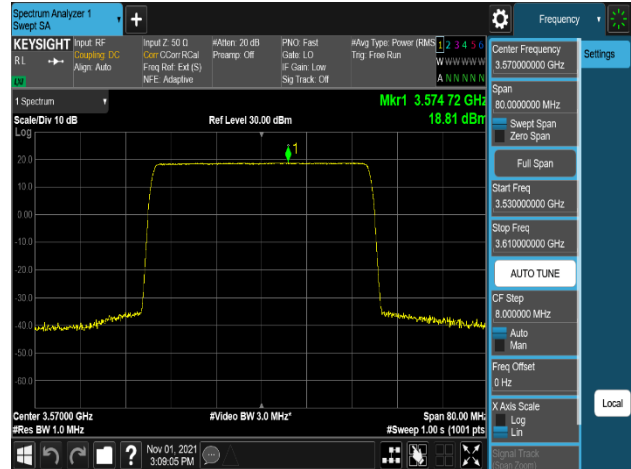


Plot 8-60. Power Spectral Density Plot
(NR_n48_1C_40M_256QAM - Low Channel, Port 1)

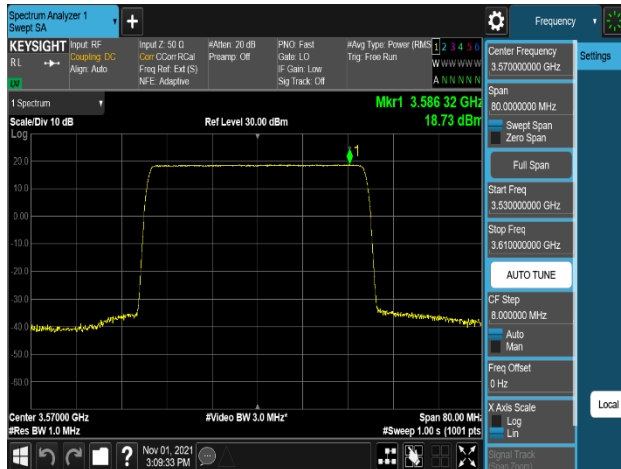


Plot 8-61. Power Spectral Density Plot
(NR_n48_1C_40M_256QAM - Low Channel, Port 2)

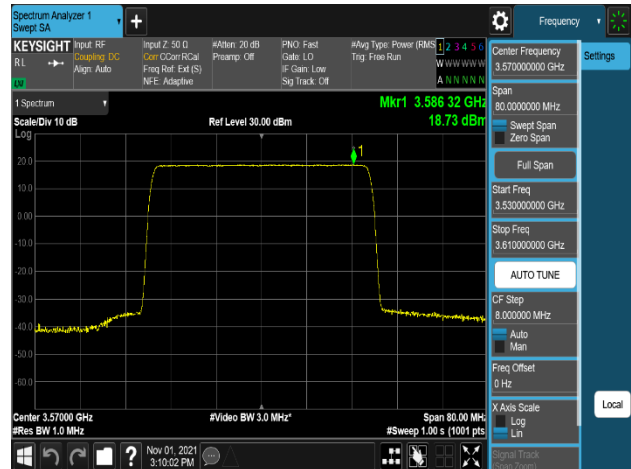

Plot 8-62. Power Spectral Density Plot
(NR_n48_1C_40M_256QAM - Low Channel, Port 3)

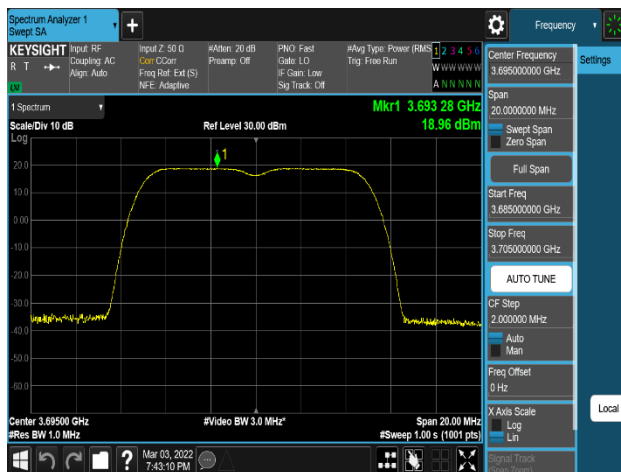


Plot 8-63. Power Spectral Density Plot
(LTE_B48_2C_5M+5M_16QAM - High Channel, Port 0)

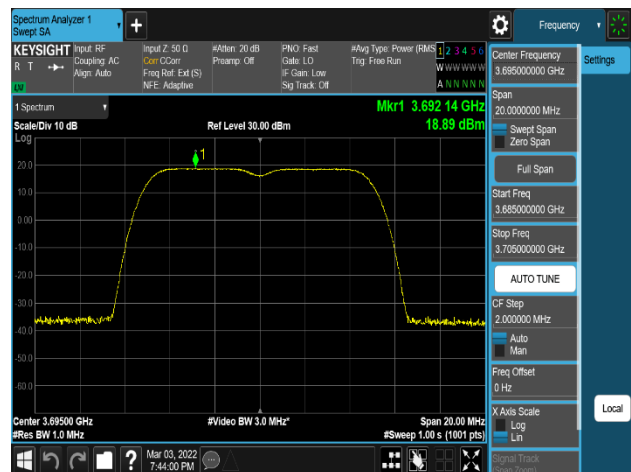


Plot 8-64. Power Spectral Density Plot
(LTE_B48_2C_5M+5M_16QAM - High Channel, Port 1)


FCC: A3LRT4401-48A	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (Class II Permissive Change)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)		Page 50 of 175

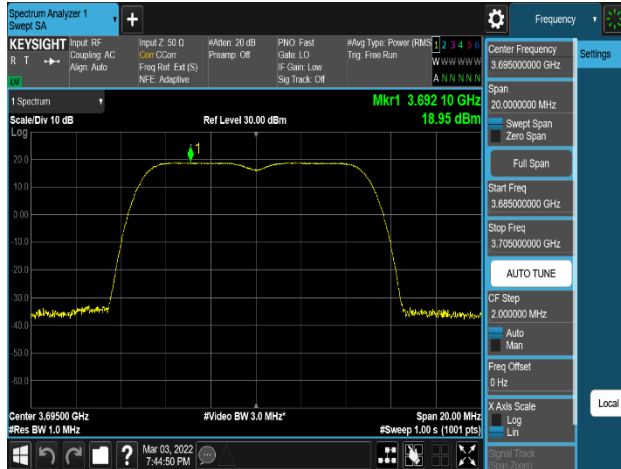


Plot 8-65. Power Spectral Density Plot
(LTE_B48_2C_5M+5M_16QAM - High Channel, Port 2)

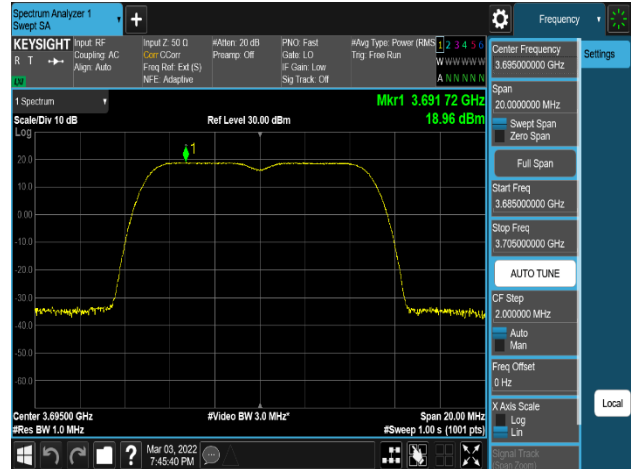


Plot 8-66. Power Spectral Density Plot
(LTE_B48_2C_5M+5M_16QAM - High Channel, Port 3)

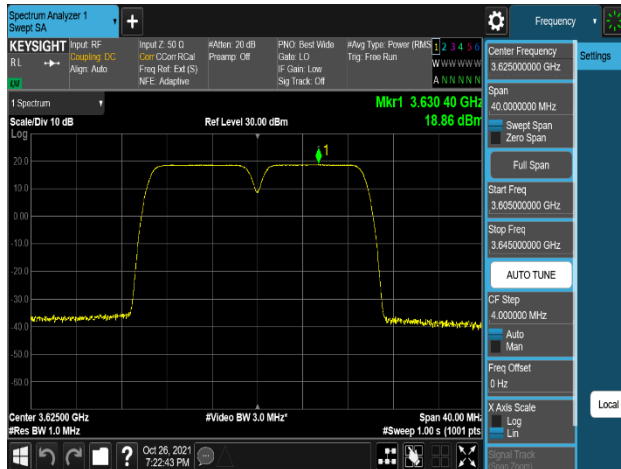


Plot 8-67. Power Spectral Density Plot
(NR_n48_2C_10M+10M_256QAM - Mid Channel, Port 0)

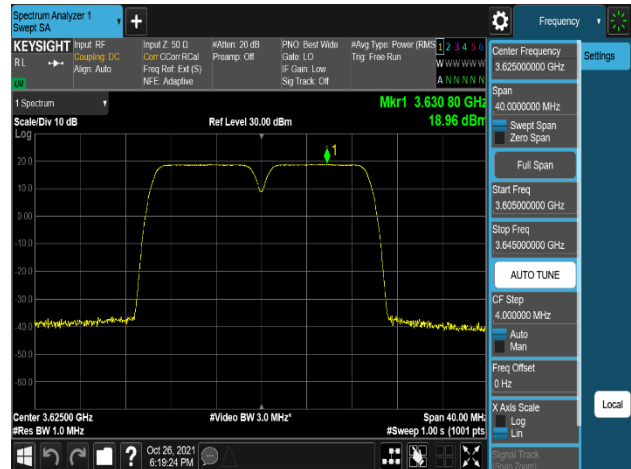

Plot 8-68. Power Spectral Density Plot
(NR_n48_2C_10M+10M_256QAM - Mid Channel, Port 1)

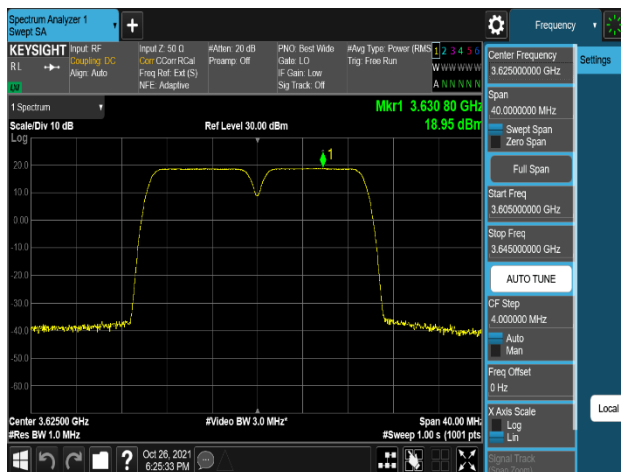


Plot 8-69. Power Spectral Density Plot
(NR_n48_2C_10M+10M_256QAM - Mid Channel, Port 2)

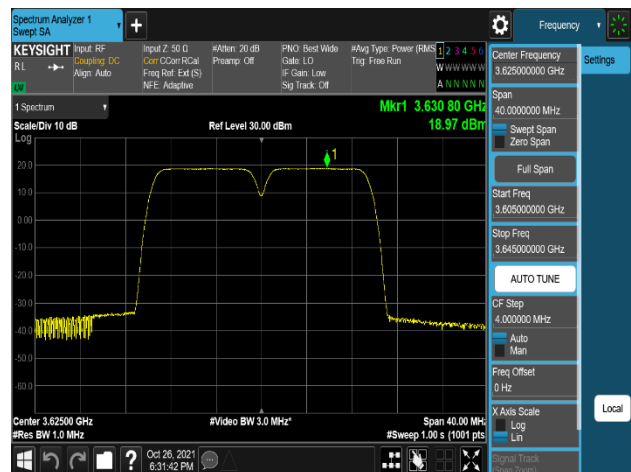


Plot 8-70. Power Spectral Density Plot
(NR_n48_2C_10M+10M_256QAM - Mid Channel, Port 3)


FCC: A3LRT4401-48A	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (Class II Permissive Change)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)		Page 51 of 175

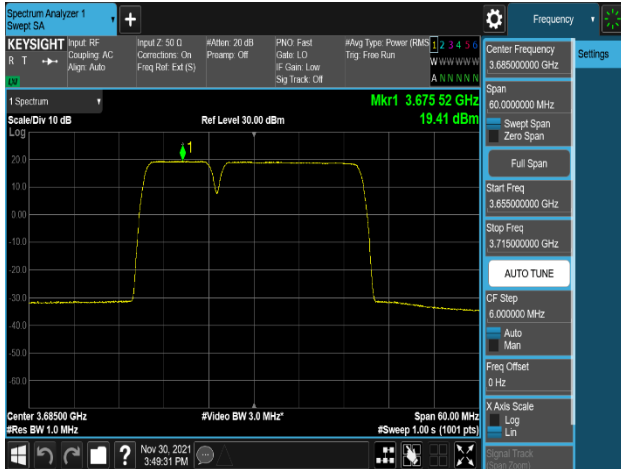


Plot 8-71. Power Spectral Density Plot
(NR_n48_2C_10M+20M_256QAM – High Channel, Port 0)

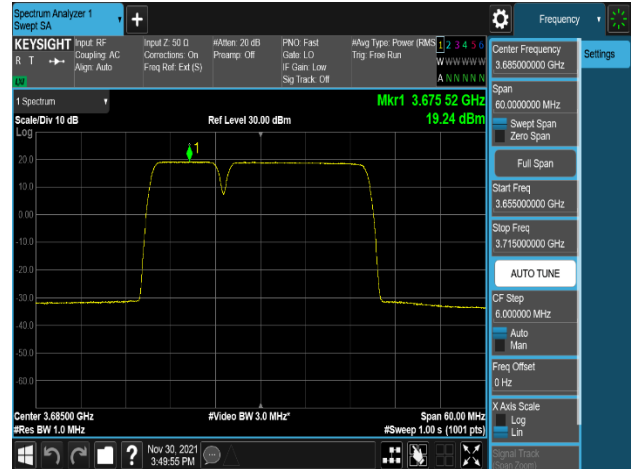


Plot 8-72. Power Spectral Density Plot
(NR_n48_2C_10M+20M_256QAM – High Channel, Port 1)

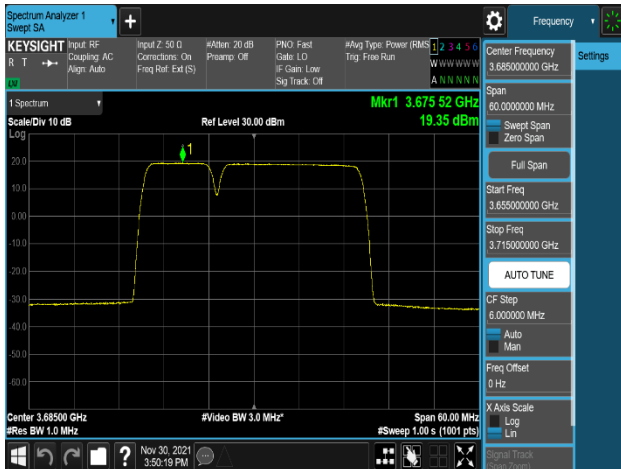


Plot 8-73. Power Spectral Density Plot
(NR_n48_2C_10M+20M_256QAM – High Channel, Port 2)

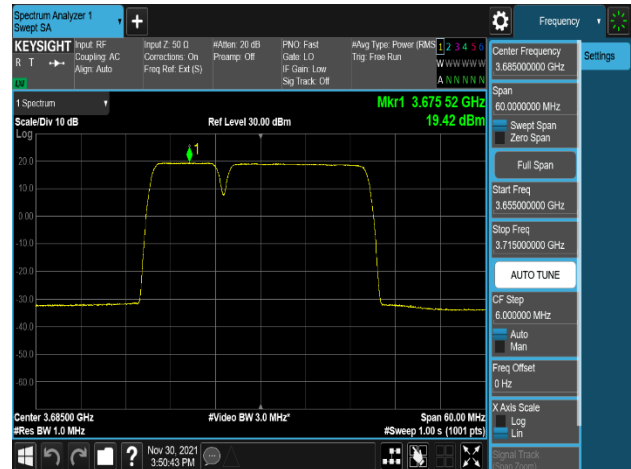

Plot 8-74. Power Spectral Density Plot
(NR_n48_2C_10M+20M_256QAM – High Channel, Port 3)

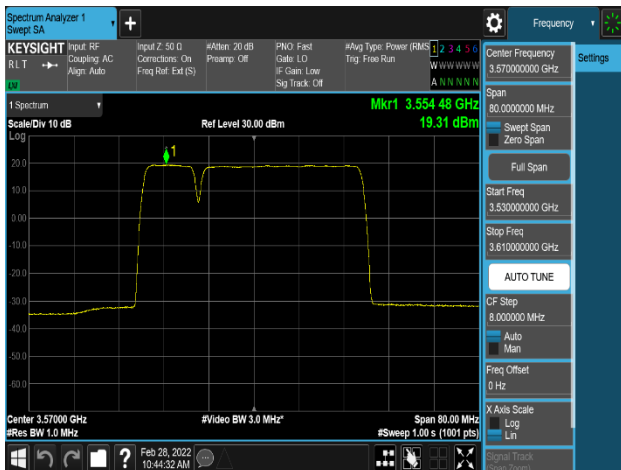


Plot 8-75. Power Spectral Density Plot
(NR_n48_2C_10M+30M_16QAM – Low Channel, Port 0)

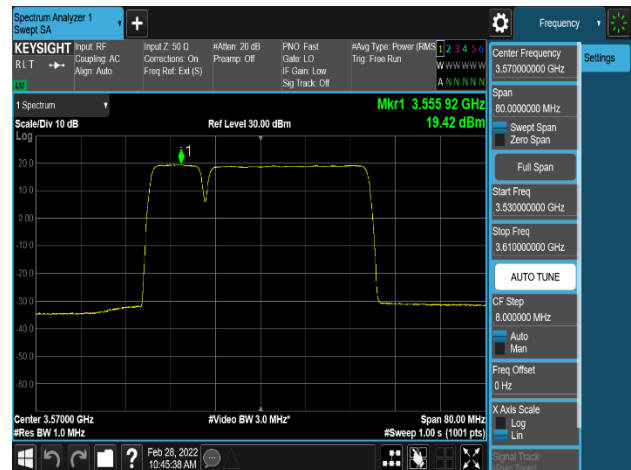


Plot 8-76. Power Spectral Density Plot
(NR_n48_2C_10M+30M_16QAM – Low Channel, Port 1)


FCC: A3LRT4401-48A	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (Class II Permissive Change)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: BK21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)		Page 52 of 175

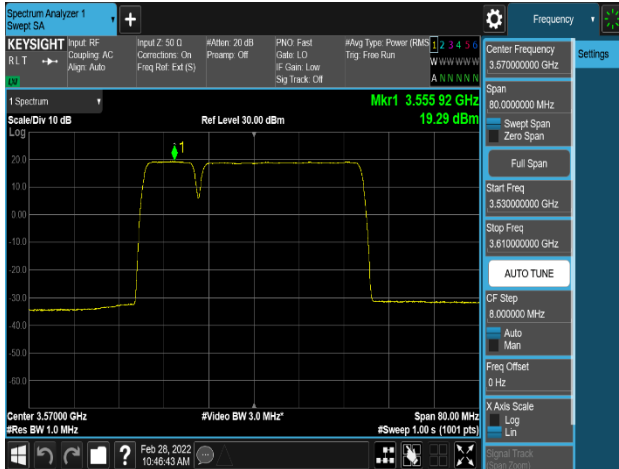


Plot 8-77. Power Spectral Density Plot
(NR_n48_2C_10M+30M_16QAM – Low Channel, Port 2)

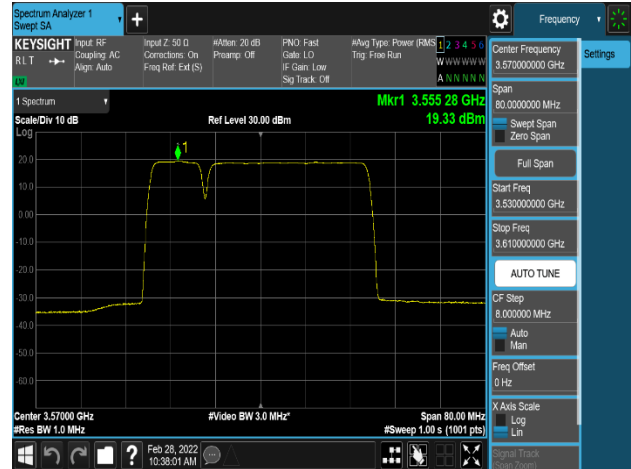


Plot 8-78. Power Spectral Density Plot
(NR_n48_2C_10M+30M_16QAM – Low Channel, Port 3)

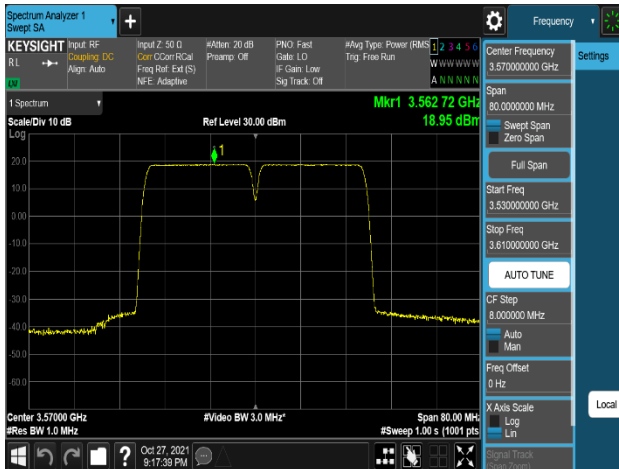


Plot 8-79. Power Spectral Density Plot
(NR_n48_2C_20M+20M_64QAM – Low Channel, Port 0)

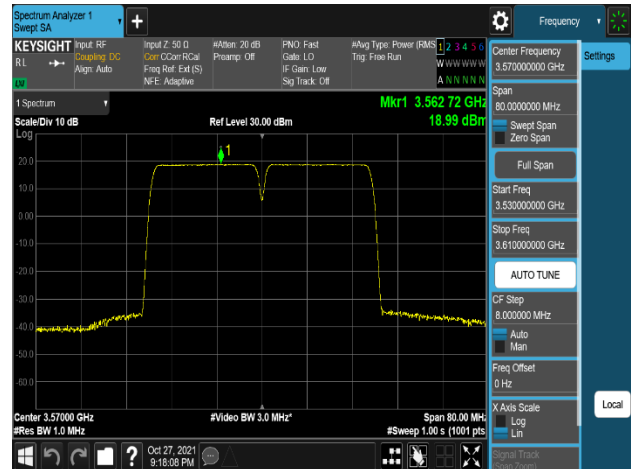

Plot 8-80. Power Spectral Density Plot
(NR_n48_2C_20M+20M_64QAM – Low Channel, Port 1)

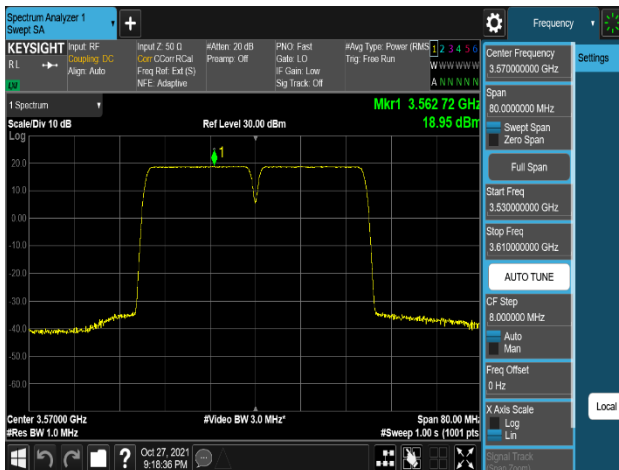


Plot 8-81. Power Spectral Density Plot
(NR_n48_2C_20M+20M_64QAM – Low Channel, Port 2)

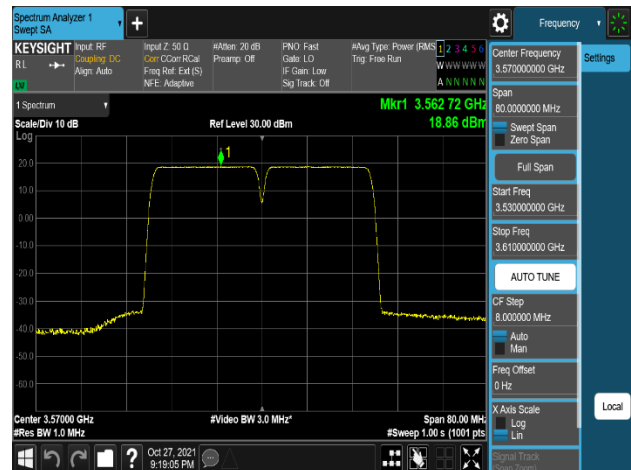


Plot 8-82. Power Spectral Density Plot
(NR_n48_2C_20M+20M_64QAM – Low Channel, Port 3)


FCC: A3LRT4401-48A	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (Class II Permissive Change)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: BK21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)		Page 53 of 175

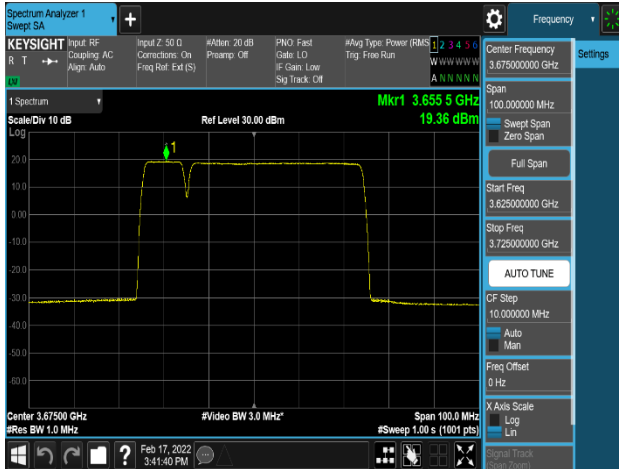


Plot 8-83. Power Spectral Density Plot
(NR_n48_2C_10M+40M_64QAM – High Channel, Port 0)

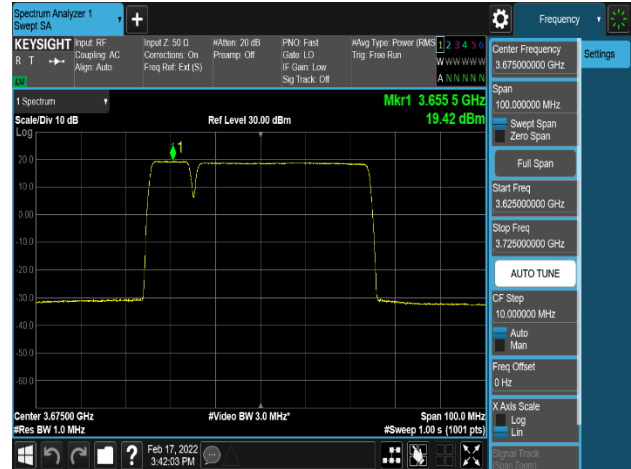


Plot 8-84. Power Spectral Density Plot
(NR_n48_2C_10M+40M_64QAM – High Channel, Port 0)

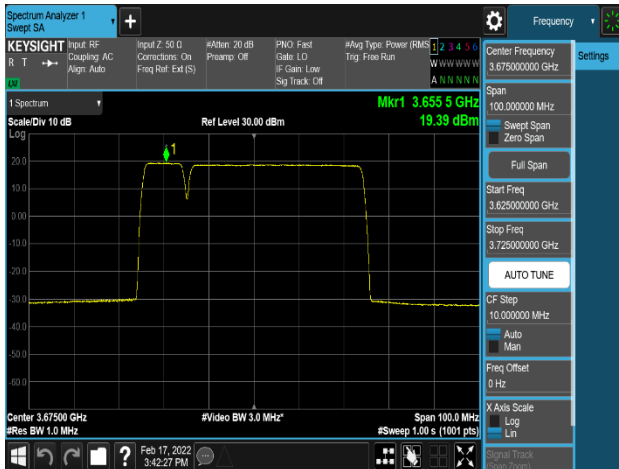


Plot 8-85. Power Spectral Density Plot
(NR_n48_2C_10M+40M_64QAM – High Channel, Port 0)

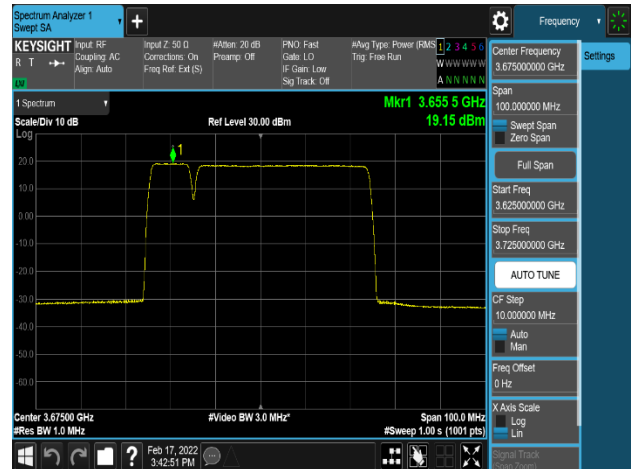

Plot 8-86. Power Spectral Density Plot
(NR_n48_2C_10M+40M_64QAM – High Channel, Port 0)

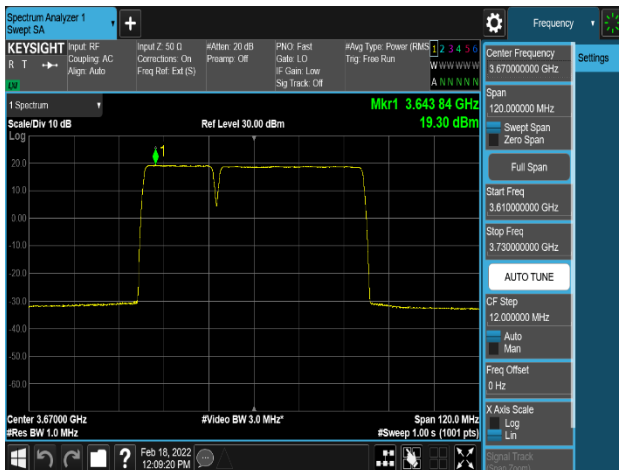


Plot 8-87. Power Spectral Density Plot
(NR_n48_2C_20M+40M_256QAM – High Channel, Port 0)

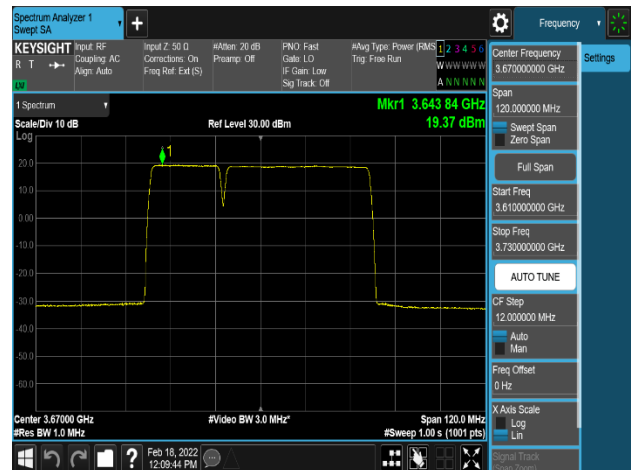


Plot 8-88. Power Spectral Density Plot
(NR_n48_2C_20M+40M_256QAM – High Channel, Port 1)


FCC: A3LRT4401-48A	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (Class II Permissive Change)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: BK21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)		Page 54 of 175

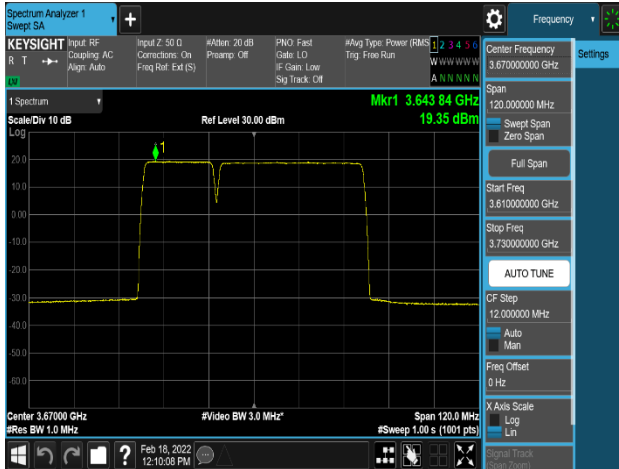


Plot 8-89. Power Spectral Density Plot
(NR_n48_2C_20M+40M_256QAM – High Channel, Port 2)

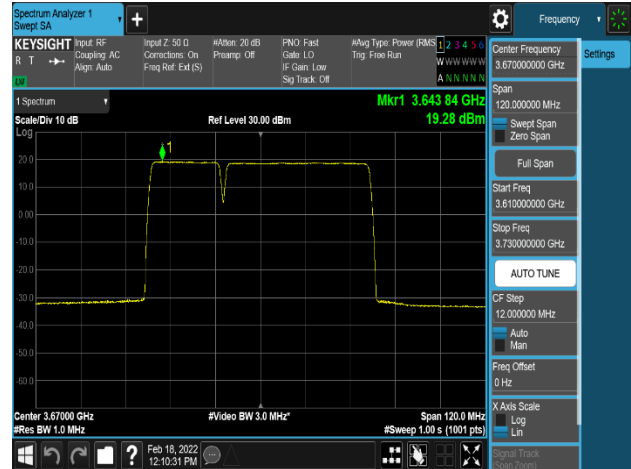


Plot 8-90. Power Spectral Density Plot
(NR_n48_2C_20M+40M_256QAM – High Channel, Port 3)

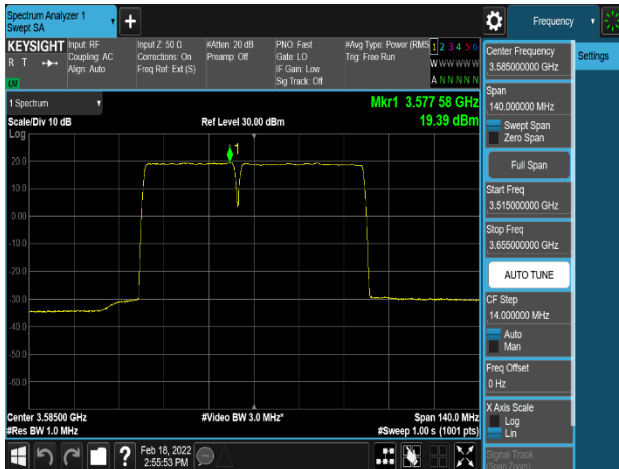


Plot 8-91. Power Spectral Density Plot
(NR_n48_2C_30M+40M_16QAM – Low Channel, Port 0)

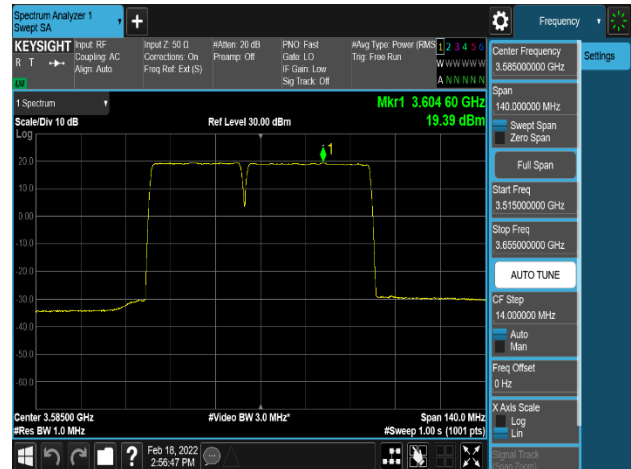

Plot 8-92. Power Spectral Density Plot
(NR_n48_2C_30M+40M_16QAM – Low Channel, Port 1)

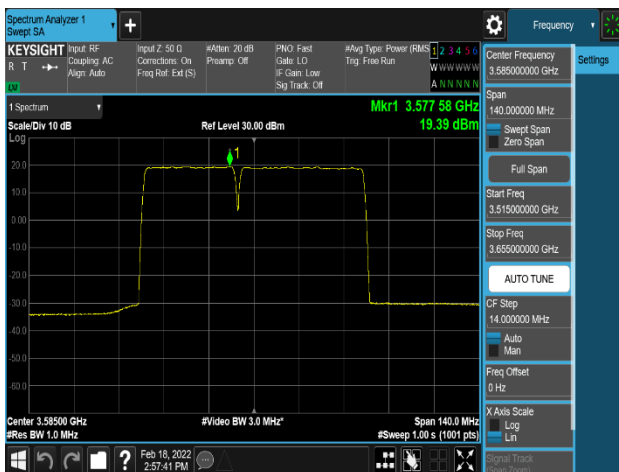


Plot 8-93. Power Spectral Density Plot
(NR_n48_2C_30M+40M_16QAM – Low Channel, Port 2)

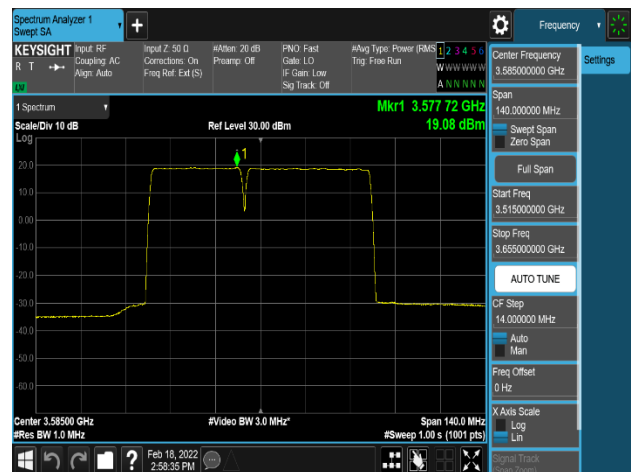


Plot 8-94. Power Spectral Density Plot
(NR_n48_2C_30M+40M_16QAM – Low Channel, Port 3)


FCC: A3LRT4401-48A	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (Class II Permissive Change)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)		Page 55 of 175

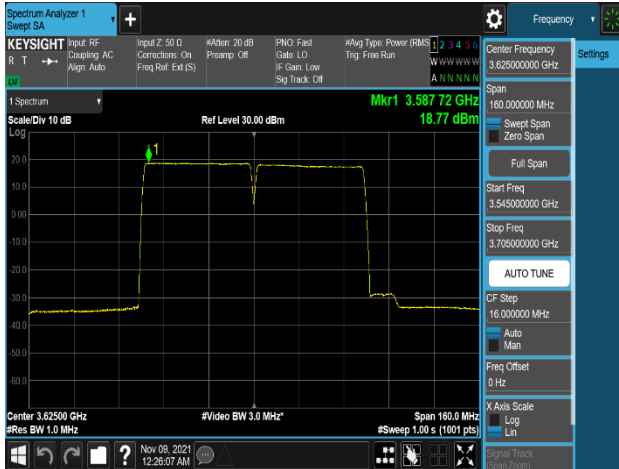


Plot 8-95. Power Spectral Density Plot
(NR_n48_2C_40M+40M_64QAM – Mid Channel, Port 0)

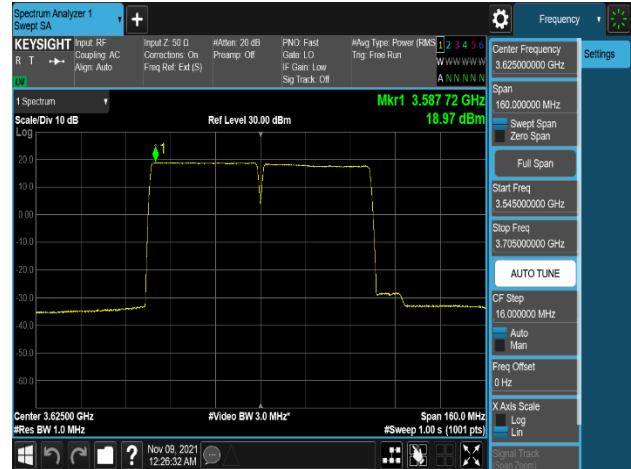


Plot 8-96. Power Spectral Density Plot
(NR_n48_2C_40M+40M_64QAM – Mid Channel, Port 1)

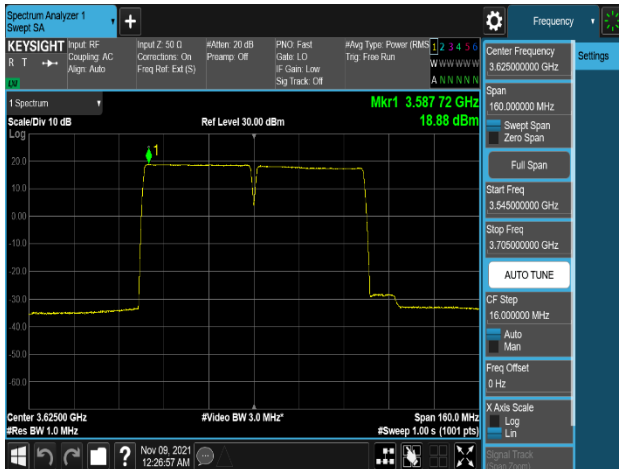


Plot 8-97. Power Spectral Density Plot
(NR_n48_2C_40M+40M_64QAM – Mid Channel, Port 2)

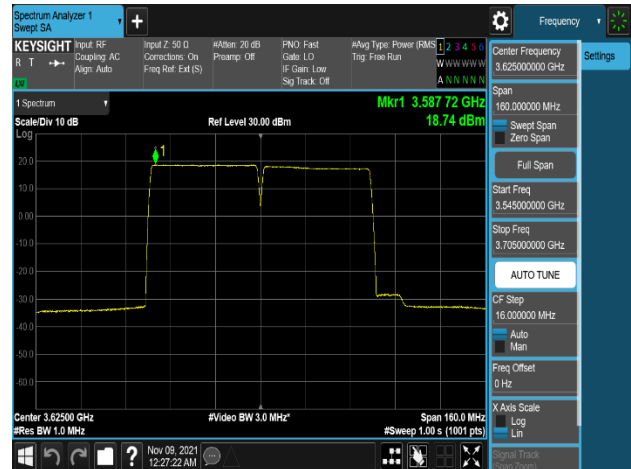

Plot 8-98. Power Spectral Density Plot
(NR_n48_2C_40M+40M_64QAM – Mid Channel, Port 3)

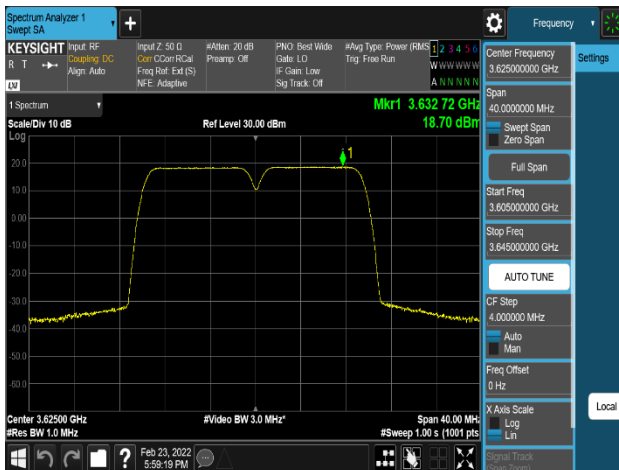


Plot 8-99. Power Spectral Density Plot
(LTE_1C+NR_1C_10M+10M_64QAM - Mid Channel, Port 0)

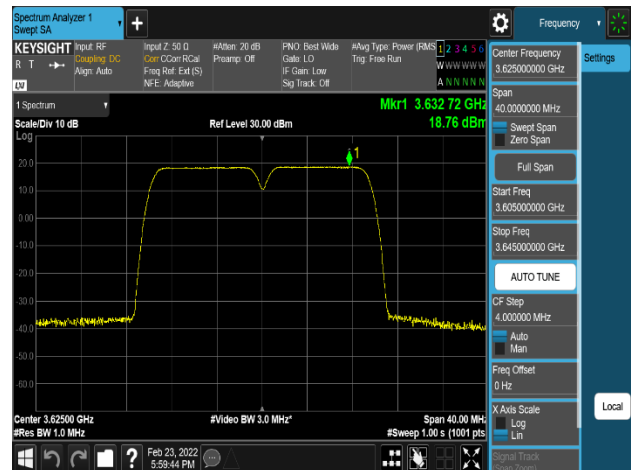


Plot 8-100. Power Spectral Density Plot
(LTE_1C+NR_1C_10M+10M_64QAM - Mid Channel, Port 1)


FCC: A3LRT4401-48A	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (Class II Permissive Change)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: BK21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)		Page 56 of 175

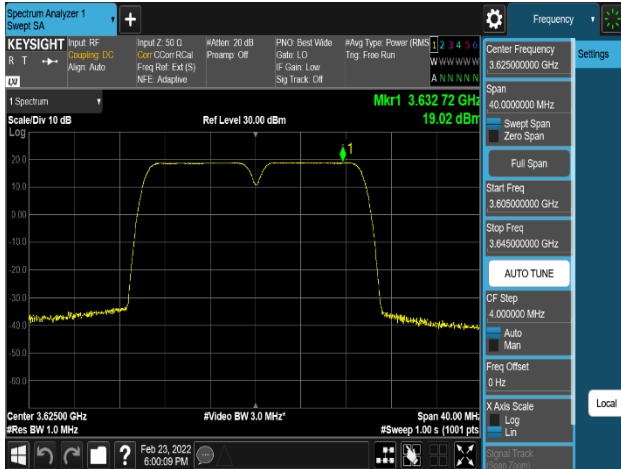


Plot 8-101. Power Spectral Density Plot
(LTE_1C+NR_1C_10M+10M_64QAM - Mid Channel, Port 2)

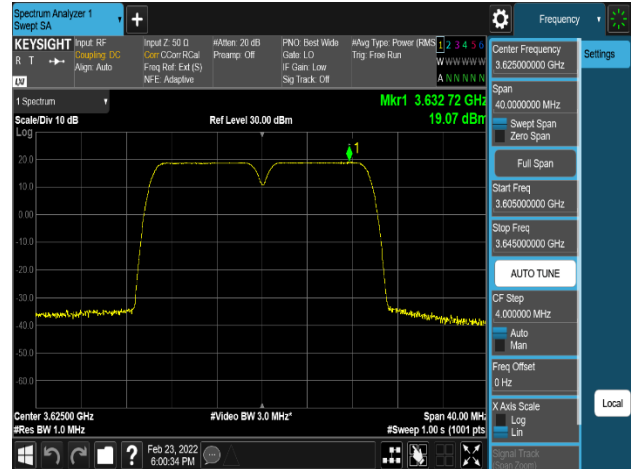


Plot 8-102. Power Spectral Density Plot
(LTE_1C+NR_1C_10M+10M_64QAM - Mid Channel, Port 3)

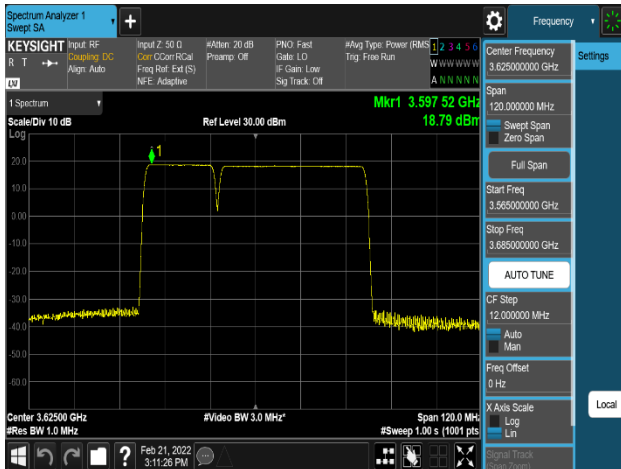


Plot 8-103. Power Spectral Density Plot
(LTE_1C+NR_1C_20M+40M_QPSK - Mid Channel, Port 0)

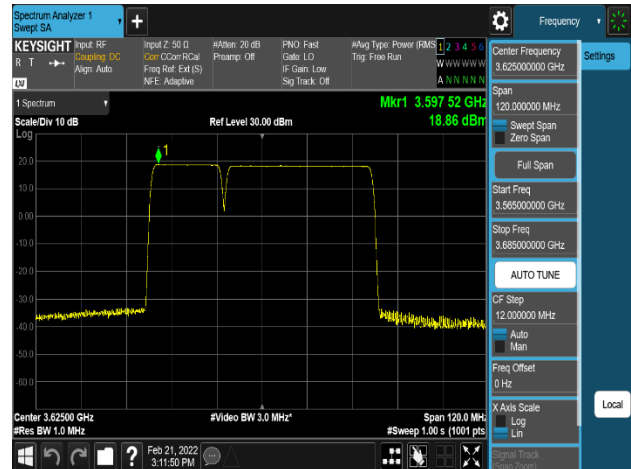

Plot 8-104. Power Spectral Density Plot
(LTE_1C+NR_1C_20M+40M_QPSK - Mid Channel, Port 1)

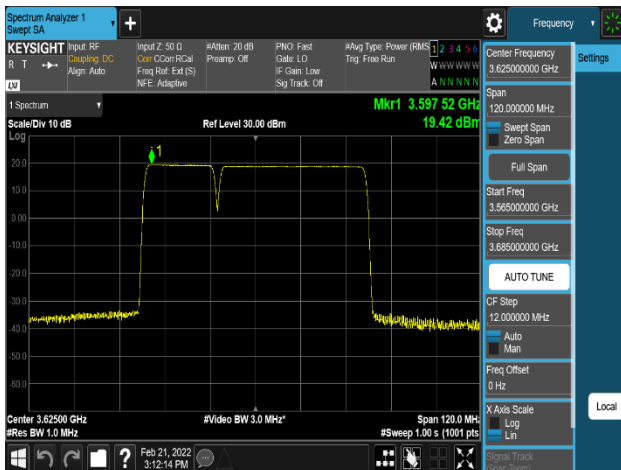


Plot 8-105. Power Spectral Density Plot
(LTE_1C+NR_1C_20M+40M_QPSK - Mid Channel, Port 2)

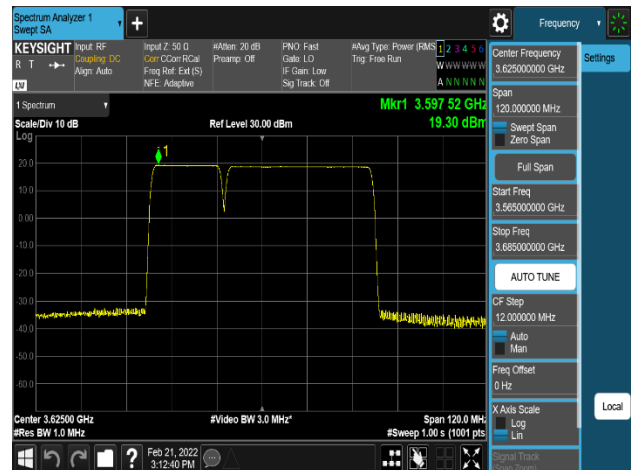


Plot 8-106. Power Spectral Density Plot
(LTE_1C+NR_1C_20M+40M_QPSK - Mid Channel, Port 3)


FCC: A3LRT4401-48A	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (Class II Permissive Change)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: BK21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)		Page 57 of 175

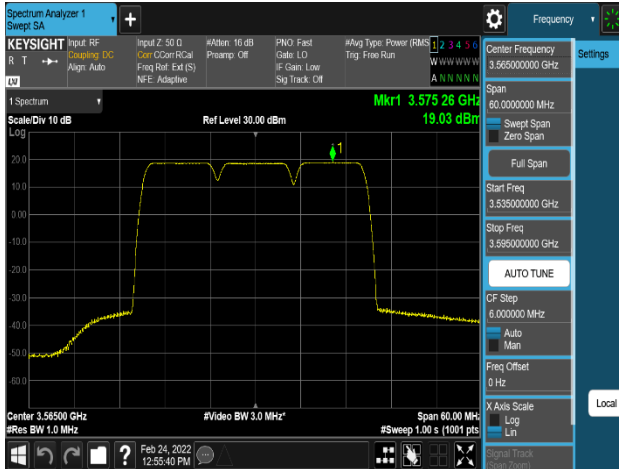


Plot 8-107. Power Spectral Density Plot
(LTE_2C+NR_1C_10M+10M+10M_256QAM-Low Channel, Port 0)

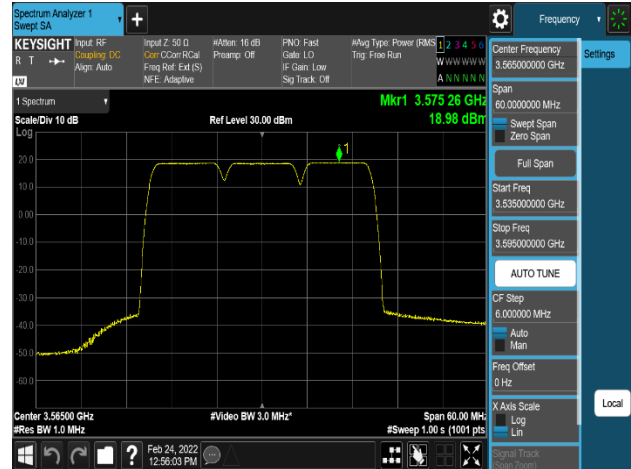

Plot 8-108. Power Spectral Density Plot
(LTE_2C+NR_1C_10M+10M+10M_256QAM-Low Channel, Port 1)

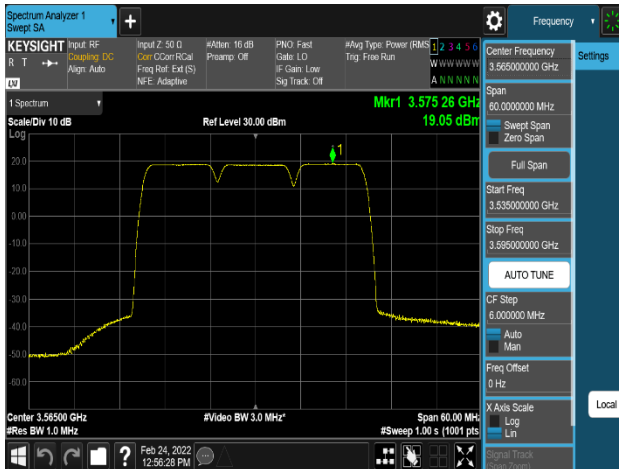


Plot 8-109. Power Spectral Density Plot
(LTE_2C+NR_1C_10M+10M+10M_256QAM-Low Channel, Port 2)

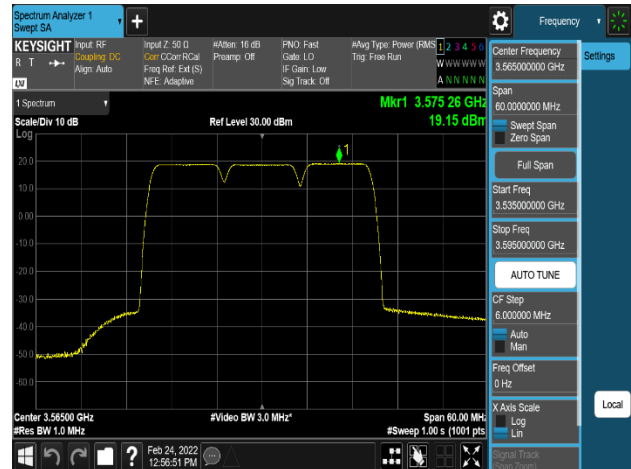

Plot 8-110. Power Spectral Density Plot
(LTE_2C+NR_1C_10M+10M+10M_256QAM-Low Channel, Port 3)



Plot 8-111. Power Spectral Density Plot
(LTE_2C+NR_1C_20M+20M+40M_16QAM-Low Channel, Port 0)

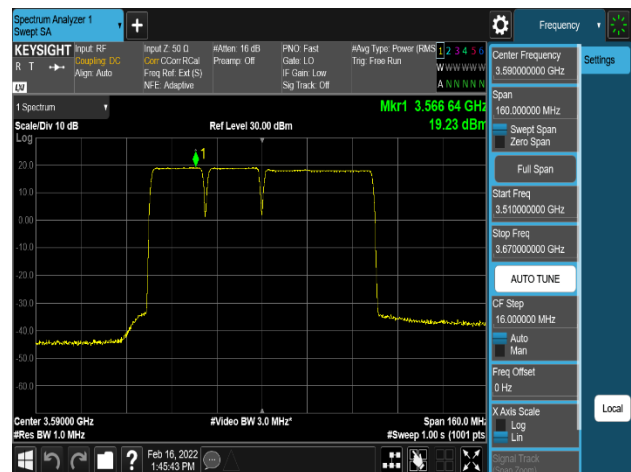


Plot 8-112. Power Spectral Density Plot
(LTE_2C+NR_1C_20M+20M+40M_16QAM-Low Channel, Port 1)

FCC: A3LRT4401-48A	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (Class II Permissive Change)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: BK21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)		Page 58 of 175



Plot 8-113. Power Spectral Density Plot
(LTE_2C+NR_1C_20M+20M+40M_16QAM-Low Channel, Port 2)

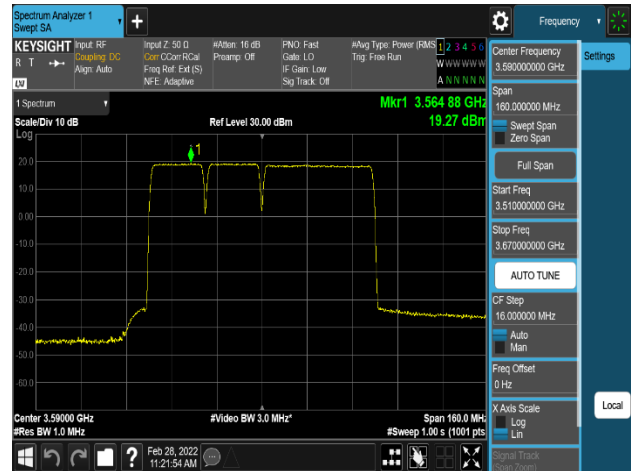

Plot 8-114. Power Spectral Density Plot
(LTE_2C+NR_1C_20M+20M+40M_16QAM-Low Channel, Port 3)

FCC: A3LRT4401-48A	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (Class II Permissive Change)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)		Page 59 of 175

8.5 Equivalent Isotropic Radiated Power (EIRP)

Test Overview

A transmitter port of EUT is connected to the input of a signal analyzer. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Description

KDB 971168 D01 v03r01 – Section 5.4

KDB 662911 D01 v02r01 – Section E)1) In-Band Power Measurements

ANSI C63.26-2015 – Section 5.2.4

ANSI C63.26 - Section 5.2.5

The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The spectrum analyzer settings were as follows:

1. Conducted power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. IBW = 10 MHz (the reference bandwidth)
3. RBW = 1 – 5% of the expected OBW
4. VBW $\geq 3 \times$ RBW
5. Span = 1.5 times the OBW
6. No. of sweep points $\geq 2 \times$ span / RBW
7. Detector = RMS
8. Trace mode = Trace-Averaging (RMS) set to average over 100 sweeps
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 8-4. Test Instrument & Measurement Setup

Limit

Category B CBSD: 47dBm/10 MHz

FCC: A3LRT4401-48A	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (Class II Permissive Change)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)		Page 60 of 175

Note

- Periodic trigger was used with gating ON. Gate sweep time, Gate delay and gate length were set accordingly to capture ON time of the transmission.
- MIMO Calculations are done considering output channel power for all ports and respective margins are calculated according to procedures in section 6.4 of ANSI C63.26 and section D of KDB 971168 D01 v03r01.
- Consider the following factors for MIMO Power:
 - Conducted power for each port is measured in dBm.
 - Powers are summed up in linear using the measure-and-sum technique defined in KDB 971168 D01 v03r01- Section D.
 - Conducted power per port (dBm) is converted to a linear value (mW). A summation of linear powers for all ports gives us the total MIMO conducted power in milliwatts (mW).
- The EUT have multiple antennas transmitting correlated signals with the equal antenna gains and two outputs driving a cross-polarized antennas with $N_{ANT}=2$.
 Directional gain is to be computed as follows;
 * Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi
- Worst e.i.r.p Case Scenario gain antenna was selected to perform all RF testing that can get maximum power setting. And High gain antenna power setting will be reduced according to difference value of antenna gain declared by applicant.
- Applied antenna gain as below:

Bandwidth	Antenna gain (dBi)	Directional gain (dBi)
All Bandwidth	8.5	11.5

- Sample Calculation:
 Let us assume the following numbers:
 - Total MIMO Conducted Power as 2597.54 mW
 - Antenna Gain = 11.50 dBi

Factors	Value	Unit
Summed MIMO Conducted Power (linear sum)	2597.54	mW
Summed MIMO Conducted Power (dBm) = $10 * \log(2597.54) =$	34.15	dBm/10MHz
Antenna Gain	11.50	dBi
Total MIMO EIRP	45.65	dBm/10MHz
Limit	47.00	dBm/10 MHz
Margin = Limit - Total MIMO EIRP = $45.65 - 47.00 =$	-1.35	dB

FCC: A3LRT4401-48A	 MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)	Page 61 of 175

Low Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.10	28.06	28.14	28.02
	1	28.13	27.99	28.17	28.02
	2	28.13	28.23	28.19	28.19
	3	28.14	28.20	28.38	28.15
Total MIMO Conducted Power (mW)		2597.54	2595.21	2655.60	2580.04
Total MIMO Conducted Power (dBm/10MHz)		34.15	34.14	34.24	34.12
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.65	45.64	45.74	45.62
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.35	-1.36	-1.26	-1.38
Mid Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.14	28.22	28.07	28.08
	1	27.97	27.98	27.91	27.96
	2	27.98	28.01	27.93	27.97
	3	28.18	28.18	28.02	28.00
Total MIMO Conducted Power (mW)		2563.96	2581.87	2513.96	2525.43
Total MIMO Conducted Power (dBm/10MHz)		34.09	34.12	34.00	34.02
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.59	45.62	45.50	45.52
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.41	-1.38	-1.50	-1.48
High Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.11	28.16	28.23	28.17
	1	28.03	28.12	28.26	28.00
	2	28.18	28.09	28.22	28.07
	3	28.17	28.19	28.14	28.07
Total MIMO Conducted Power (mW)		2596.28	2606.61	2650.53	2569.52
Total MIMO Conducted Power (dBm/10MHz)		34.14	34.16	34.23	34.10
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.64	45.66	45.73	45.60
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.36	-1.34	-1.27	-1.40

Table 8-26. Equivalent Isotropic Radiated Power Table (NR_n48_1C_10M)

FCC: A3LRT4401-48A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)	Page 62 of 175	

Low Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.01	28.00	28.02	28.14
	1	28.01	27.97	27.99	28.11
	2	28.11	27.99	28.12	28.02
	3	28.18	27.97	28.03	28.21
Total MIMO Conducted Power (mW)		2569.62	2513.69	2547.34	2594.86
Total MIMO Conducted Power (dBm/10MHz)		34.10	34.00	34.06	34.14
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.60	45.50	45.56	45.64
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.40	-1.50	-1.44	-1.36
Mid Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.03	28.19	28.24	28.24
	1	28.02	28.00	28.23	28.08
	2	28.00	28.01	28.09	28.04
	3	28.00	28.01	28.06	28.12
Total MIMO Conducted Power (mW)		2531.12	2554.95	2615.98	2594.92
Total MIMO Conducted Power (dBm/10MHz)		34.03	34.07	34.18	34.14
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.53	45.57	45.68	45.64
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.47	-1.43	-1.32	-1.36
High Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.14	28.05	28.00	27.99
	1	28.00	28.17	28.01	27.99
	2	28.25	28.22	28.05	28.06
	3	28.09	28.29	28.01	28.02
Total MIMO Conducted Power (mW)		2595.10	2632.68	2534.04	2532.62
Total MIMO Conducted Power (dBm/10MHz)		34.14	34.20	34.04	34.04
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.64	45.70	45.54	45.54
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.36	-1.30	-1.46	-1.46

Table 8-27. Equivalent Isotropic Radiated Power Table (NR_n48_1C_20M)

FCC: A3LRT4401-48A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)	Page 63 of 175	

Low Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.52	28.75	28.68	28.36
	1	28.58	28.76	28.85	28.40
	2	28.55	28.73	28.72	28.39
	3	28.30	28.62	28.48	28.10
Total MIMO Conducted Power (mW)		2824.55	2975.75	2954.69	2713.21
Total MIMO Conducted Power (dBm/10MHz)		34.51	34.74	34.71	34.33
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		46.01	46.24	46.21	45.83
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-0.99	-0.76	-0.79	-1.17
Mid Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.48	28.37	28.70	28.40
	1	28.67	28.44	28.82	28.55
	2	28.45	28.33	28.56	28.37
	3	28.39	28.23	28.52	28.39
Total MIMO Conducted Power (mW)		2830.98	2731.34	2932.40	2785.28
Total MIMO Conducted Power (dBm/10MHz)		34.52	34.36	34.67	34.45
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		46.02	45.86	46.17	45.95
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-0.98	-1.14	-0.83	-1.05
High Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.45	28.12	28.48	28.48
	1	28.54	28.21	28.56	28.59
	2	28.39	28.14	28.41	28.51
	3	28.25	28.00	28.27	28.38
Total MIMO Conducted Power (mW)		2772.92	2593.44	2787.34	2825.69
Total MIMO Conducted Power (dBm/10MHz)		34.43	34.14	34.45	34.51
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.93	45.64	45.95	46.01
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.07	-1.36	-1.05	-0.99

Table 8-28. Equivalent Isotropic Radiated Power Table (NR_n48_1C_30M)

FCC: A3LRT4401-48A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)	Page 64 of 175	

Low Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.17	28.09	28.18	28.04
	1	28.14	28.05	28.17	28.07
	2	28.13	28.08	28.10	28.02
	3	28.10	28.03	28.17	27.98
Total MIMO Conducted Power (mW)		2603.56	2560.45	2615.60	2539.93
Total MIMO Conducted Power (dBm/10MHz)		34.16	34.08	34.18	34.05
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.66	45.58	45.68	45.55
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.34	-1.42	-1.32	-1.45
Mid Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.16	28.20	28.09	28.01
	1	28.05	28.09	27.98	27.89
	2	28.05	28.19	27.98	27.88
	3	28.12	28.16	28.03	27.92
Total MIMO Conducted Power (mW)		2579.80	2618.67	2535.62	2480.79
Total MIMO Conducted Power (dBm/10MHz)		34.12	34.18	34.04	33.95
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.62	45.68	45.54	45.45
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.38	-1.32	-1.46	-1.55
High Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.17	28.08	28.10	28.00
	1	28.09	28.10	28.02	28.03
	2	28.17	28.16	28.18	28.11
	3	28.16	28.07	28.08	28.00
Total MIMO Conducted Power (mW)		2611.10	2584.19	2579.87	2544.39
Total MIMO Conducted Power (dBm/10MHz)		34.17	34.12	34.12	34.06
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.67	45.62	45.62	45.56
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.33	-1.38	-1.38	-1.44

Table 8-29. Equivalent Isotropic Radiated Power Table (NR_n48_1C_40M)

FCC: A3LRT4401-48A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)	Page 65 of 175	

Low Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	27.88	27.63	27.79	27.70
	1	27.87	27.71	27.79	27.72
	2	28.07	27.81	27.89	27.84
	3	28.03	27.86	27.82	27.88
Total MIMO Conducted Power (mW)		2502.65	2384.52	2422.87	2402.30
Total MIMO Conducted Power (dBm/10MHz)		33.98	33.77	33.84	33.81
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.48	45.27	45.34	45.31
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.52	-1.73	-1.66	-1.69
Mid Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	27.90	27.65	27.86	27.87
	1	27.87	27.64	27.71	27.76
	2	27.89	27.62	27.74	27.79
	3	27.87	27.74	27.80	27.83
Total MIMO Conducted Power (mW)		2456.47	2335.26	2397.99	2417.30
Total MIMO Conducted Power (dBm/10MHz)		33.90	33.68	33.80	33.83
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.40	45.18	45.30	45.33
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.60	-1.82	-1.70	-1.67
High Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	27.88	28.01	27.97	27.74
	1	28.01	28.04	28.03	28.03
	2	27.99	28.07	27.94	28.02
	3	28.09	28.14	28.04	28.07
Total MIMO Conducted Power (mW)		2519.85	2562.05	2521.04	2504.70
Total MIMO Conducted Power (dBm/10MHz)		34.01	34.09	34.02	33.99
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.51	45.59	45.52	45.49
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.49	-1.41	-1.48	-1.51

Table 8-30. Equivalent Isotropic Radiated Power Table (LTE_B48_2C_5M+5M)

FCC: A3LRT4401-48A	 MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)		Page 66 of 175

Low Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.36	28.22	28.01	28.22
	1	28.48	28.32	28.29	28.12
	2	28.54	28.23	28.08	28.31
	3	28.56	28.16	28.34	27.90
Total MIMO Conducted Power (mW)		2822.47	2662.86	2631.97	2606.61
Total MIMO Conducted Power (dBm/10MHz)		34.51	34.25	34.20	34.16
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		46.01	45.75	45.70	45.66
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-0.99	-1.25	-1.30	-1.34
Mid Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.72	27.91	28.42	28.36
	1	28.64	28.31	28.20	28.36
	2	28.62	28.00	27.81	28.18
	3	28.74	28.15	28.42	28.87
Total MIMO Conducted Power (mW)		2951.82	2579.75	2654.69	2799.54
Total MIMO Conducted Power (dBm/10MHz)		34.70	34.12	34.24	34.47
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		46.20	45.62	45.74	45.97
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-0.80	-1.38	-1.26	-1.03
High Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.07	27.93	28.11	28.01
	1	28.13	27.88	27.87	28.04
	2	28.07	27.94	27.95	28.02
	3	28.08	27.59	28.34	28.01
Total MIMO Conducted Power (mW)		2575.24	2431.05	2565.57	2535.49
Total MIMO Conducted Power (dBm/10MHz)		34.11	33.86	34.09	34.04
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.61	45.36	45.59	45.54
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.39	-1.64	-1.41	-1.46

Table 8-31. Equivalent Isotropic Radiated Power Table (NR_n48_2C_10M+10M)

FCC: A3LRT4401-48A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)	Page 67 of 175	

Low Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.09	28.43	28.04	28.14
	1	28.20	28.47	27.87	28.15
	2	28.18	28.46	28.04	28.11
	3	28.14	28.46	27.91	28.15
Total MIMO Conducted Power (mW)		2614.15	2802.61	2503.96	2605.03
Total MIMO Conducted Power (dBm/10MHz)		34.17	34.48	33.99	34.16
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.67	45.98	45.49	45.66
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.33	-1.02	-1.51	-1.34
Mid Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	27.99	28.43	28.36	28.13
	1	28.02	28.48	28.34	28.04
	2	27.80	28.18	28.10	27.86
	3	27.95	28.43	28.31	28.05
Total MIMO Conducted Power (mW)		2489.67	2755.60	2691.12	2536.13
Total MIMO Conducted Power (dBm/10MHz)		33.96	34.40	34.30	34.04
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.46	45.90	45.80	45.54
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.54	-1.10	-1.20	-1.46
High Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.39	28.12	28.14	28.20
	1	28.34	27.99	28.07	28.10
	2	28.30	27.95	27.98	28.14
	3	28.32	28.02	28.04	28.20
Total MIMO Conducted Power (mW)		2727.87	2535.75	2557.69	2618.67
Total MIMO Conducted Power (dBm/10MHz)		34.36	34.04	34.08	34.18
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.86	45.54	45.58	45.68
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.14	-1.46	-1.42	-1.32

Table 8-32. Equivalent Isotropic Radiated Power Table (NR_n48_2C_10M+20M)

FCC: A3LRT4401-48A	 MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)		Page 68 of 175

Low Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.38	28.31	28.45	28.30
	1	28.38	28.59	28.61	28.55
	2	28.32	28.53	28.55	28.50
	3	28.06	28.25	28.37	28.22
Total MIMO Conducted Power (mW)		2696.24	2781.61	2829.16	2763.92
Total MIMO Conducted Power (dBm/10MHz)		34.31	34.44	34.52	34.42
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.81	45.94	46.02	45.92
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.19	-1.06	-0.98	-1.08
Mid Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.25	28.52	27.88	27.95
	1	28.49	28.63	27.98	27.85
	2	28.42	28.55	27.77	27.66
	3	28.08	28.31	27.78	27.37
Total MIMO Conducted Power (mW)		2712.37	2834.46	2440.02	2362.47
Total MIMO Conducted Power (dBm/10MHz)		34.33	34.52	33.87	33.73
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.83	46.02	45.37	45.23
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.17	-0.98	-1.63	-1.77
High Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.04	28.28	27.74	28.36
	1	28.10	28.30	27.79	28.46
	2	27.96	28.14	27.64	28.30
	3	27.89	28.11	27.54	28.02
Total MIMO Conducted Power (mW)		2522.80	2647.83	2343.77	2696.90
Total MIMO Conducted Power (dBm/10MHz)		34.02	34.23	33.70	34.31
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.52	45.73	45.20	45.81
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.48	-1.27	-1.80	-1.19

Table 8-33. Equivalent Isotropic Radiated Power Table (NR_n48_2C_10M+30M)

FCC: A3LRT4401-48A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)	Page 69 of 175	

Low Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.31	28.24	27.62	28.43
	1	28.36	28.35	28.23	27.96
	2	28.24	28.27	28.45	28.31
	3	28.32	28.31	28.13	28.27
Total MIMO Conducted Power (mW)		2709.14	2699.79	2593.34	2670.87
Total MIMO Conducted Power (dBm/10MHz)		34.33	34.31	34.14	34.27
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.83	45.81	45.64	45.77
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.17	-1.19	-1.36	-1.23
Mid Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.24	28.40	28.26	28.11
	1	28.39	28.48	28.38	28.26
	2	28.23	28.36	28.28	28.19
	3	28.29	28.39	28.32	28.24
Total MIMO Conducted Power (mW)		2696.85	2772.25	2710.72	2643.01
Total MIMO Conducted Power (dBm/10MHz)		34.31	34.43	34.33	34.22
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.81	45.93	45.83	45.72
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.19	-1.07	-1.17	-1.28
High Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	27.92	27.93	28.46	28.17
	1	28.10	28.00	28.55	28.05
	2	28.04	28.05	28.49	28.00
	3	27.98	27.84	28.50	28.20
Total MIMO Conducted Power (mW)		2529.95	2498.22	2831.86	2586.06
Total MIMO Conducted Power (dBm/10MHz)		34.03	33.98	34.52	34.13
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.53	45.48	46.02	45.63
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.47	-1.52	-0.98	-1.37

Table 8-34. Equivalent Isotropic Radiated Power Table (NR_n48_2C_20M+20M)

FCC: A3LRT4401-48A	 MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)		Page 70 of 175

Low Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.50	28.07	28.73	28.94
	1	28.48	28.19	28.72	28.88
	2	28.39	27.99	28.42	28.91
	3	28.37	28.05	28.62	28.75
Total MIMO Conducted Power (mW)		2789.95	2568.15	2913.98	3084.04
Total MIMO Conducted Power (dBm/10MHz)		34.46	34.10	34.64	34.89
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.96	45.60	46.14	46.39
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.04	-1.40	-0.86	-0.61
Mid Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.56	28.02	28.62	28.34
	1	28.63	28.18	28.67	28.35
	2	28.26	27.88	28.52	28.31
	3	27.99	27.55	28.25	27.92
Total MIMO Conducted Power (mW)		2746.64	2474.14	2843.54	2663.33
Total MIMO Conducted Power (dBm/10MHz)		34.39	33.93	34.54	34.25
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.89	45.43	46.04	45.75
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.11	-1.57	-0.96	-1.25
High Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.23	28.13	27.65	27.62
	1	28.17	28.25	27.77	27.58
	2	28.10	28.25	27.85	27.51
	3	27.80	28.05	27.76	27.37
Total MIMO Conducted Power (mW)		2569.63	2625.08	2387.09	2260.29
Total MIMO Conducted Power (dBm/10MHz)		34.10	34.19	33.78	33.54
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.60	45.69	45.28	45.04
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.40	-1.31	-1.72	-1.96

Table 8-35. Equivalent Isotropic Radiated Power Table (NR_n48_2C_10M+40M)

FCC: A3LRT4401-48A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)	Page 71 of 175	

Low Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.18	28.36	28.59	28.36
	1	28.52	28.44	28.82	28.55
	2	28.31	28.57	28.80	28.57
	3	28.10	28.27	28.60	28.29
Total MIMO Conducted Power (mW)		2692.17	2774.60	2967.86	2795.61
Total MIMO Conducted Power (dBm/10MHz)		34.30	34.43	34.72	34.46
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.80	45.93	46.22	45.96
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.20	-1.07	-0.78	-1.04
Mid Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.54	27.83	27.91	27.86
	1	28.74	27.86	27.91	27.84
	2	28.40	27.94	27.89	27.86
	3	28.13	27.77	27.66	27.52
Total MIMO Conducted Power (mW)		2804.63	2438.39	2434.65	2394.96
Total MIMO Conducted Power (dBm/10MHz)		34.48	33.87	33.86	33.79
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.98	45.37	45.36	45.29
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.02	-1.63	-1.64	-1.71
High Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.09	28.30	28.28	27.99
	1	28.16	28.37	28.38	28.07
	2	28.21	28.46	28.44	28.09
	3	28.11	28.25	28.25	27.93
Total MIMO Conducted Power (mW)		2608.16	2732.95	2728.21	2535.75
Total MIMO Conducted Power (dBm/10MHz)		34.16	34.37	34.36	34.04
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.66	45.87	45.86	45.54
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.34	-1.13	-1.14	-1.46

Table 8-36. Equivalent Isotropic Radiated Power Table (NR_n48_2C_20M+40M)

FCC: A3LRT4401-48A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)	Page 72 of 175	

Low Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.76	28.35	28.28	28.83
	1	28.65	28.19	28.55	28.87
	2	28.83	28.31	28.47	28.88
	3	28.46	28.05	28.12	28.63
Total MIMO Conducted Power (mW)		2949.74	2658.99	2740.83	3036.88
Total MIMO Conducted Power (dBm/10MHz)		34.70	34.25	34.38	34.82
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		46.20	45.75	45.88	46.32
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-0.80	-1.25	-1.12	-0.68
Mid Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	28.85	28.43	27.96	28.45
	1	28.96	28.45	28.08	28.36
	2	28.81	28.33	28.03	28.35
	3	28.67	28.26	27.98	28.35
Total MIMO Conducted Power (mW)		3050.94	2747.12	2531.25	2753.15
Total MIMO Conducted Power (dBm/10MHz)		34.84	34.39	34.03	34.40
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		46.34	45.89	45.53	45.90
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-0.66	-1.11	-1.47	-1.10
High Channel	Port	QPSK	16QAM	64QAM	256QAM
Conducted Power (dBm/10MHz)	0	27.97	28.12	28.04	28.34
	1	27.89	27.96	27.98	28.10
	2	28.01	27.98	28.09	28.09
	3	27.94	27.91	27.90	28.10
Total MIMO Conducted Power (mW)		2496.50	2519.88	2525.62	2617.82
Total MIMO Conducted Power (dBm/10MHz)		33.97	34.01	34.02	34.18
Ant. Gain (dBi)		11.50	11.50	11.50	11.50
e.i.r.p (dBm/10MHz)		45.47	45.51	45.52	45.68
e.i.r.p Limit(dBm/10MHz)		47.00	47.00	47.00	47.00
Margin (dB)		-1.53	-1.49	-1.48	-1.32

Table 8-37. Equivalent Isotropic Radiated Power Table (NR_n48_2C_30M+40M)

FCC: A3LRT4401-48A	 MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 8K21101307-R3.A3L	Test Dates: 10/15/2021 – 03/04/2022	EUT Type: RRU(RT4401)	Page 73 of 175	