

MEASUREMENT REPORT

FCC Part 15.247 WLAN 802.11b/g/n

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
7/21-8/25/2017
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
1M1707170219-04-R2.A3L

FCC ID:	A3LSC01K
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: SC-01K
EUT Type: Portable Handset
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15.247
Test Procedure(s): KDB 558074 D01 v04, KDB 662911 D01 v02r01, KDB 648474 D03 v01r04

Mode	Tx Frequency (MHz)	ANT1				ANT2				MIMO/CDD			
		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted	
		Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
802.11b	2412 - 2472	76.736	18.85	170.216	22.31	86.896	19.39	159.956	22.04	N/A			
802.11g	2412 - 2472	49.317	16.93	258.821	24.13	56.105	17.49	246.604	23.92	49.860	16.98	293.634	24.68
802.11n	2412 - 2472	47.206	16.74	247.742	23.94	55.335	17.43	249.459	23.97	49.276	16.93	312.270	24.95

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01 v04. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M1707170219-04-R2.A3L) supersedes and replaces the previously issued test report (S/N: 1M1707170219-04-R1.A3L) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President



FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 1 of 125

TABLE OF CONTENTS

FCC PART 15.247 MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 Scope	4
1.2 PCTEST Test Location	4
2.0 PRODUCT INFORMATION	5
2.1 Equipment Description	5
2.2 Device Capabilities	5
2.3 Test Configuration	7
2.4 EMI Suppression Device(s)/Modifications	7
3.0 DESCRIPTION OF TESTS	8
3.1 Evaluation Procedure	8
3.2 AC Line Conducted Emissions	8
3.3 Radiated Emissions	9
3.4 Environmental Conditions	9
4.0 ANTENNA REQUIREMENTS	10
5.0 MEASUREMENT UNCERTAINTY	11
6.0 TEST EQUIPMENT CALIBRATION DATA	12
7.0 TEST RESULTS	13
7.1 Summary	13
7.2 6dB Bandwidth Measurement	14
7.3 Output Power Measurement	25
7.4 Power Spectral Density	28
7.5 Conducted Emissions at the Band Edge	40
7.6 Conducted Spurious Emissions	53
7.7 Radiated Spurious Emission Measurements – Above 1 GHz	61
7.7.1 Antenna-1 Radiated Spurious Emission Measurements	64
7.7.2 Antenna-2 Radiated Spurious Emission Measurements	70
7.7.3 Antenna-1 Radiated Restricted Band Edge Measurements	76
7.7.4 Antenna-2 Radiated Restricted Band Edge Measurements	86
7.7.5 MIMO Radiated Restricted Band Edge Measurements	96
7.8 Radiated Spurious Emissions Measurements – Below 1GHz	106
7.9 Line-Conducted Test Data	111
8.0 CONCLUSION	114
Appendix A. 802.11g Dual Tx	115
A.3 Power Spectral Density	117
A.4 Dual Tx Radiated Restricted Band Edge Measurements	118

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 2 of 125



MEASUREMENT REPORT

FCC Part 15.247



§ 2.1033 General Information

APPLICANT: Samsung Electronics Co., Ltd.

APPLICANT ADDRESS: 129, Samsung-ro,
Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA

FCC RULE PART(S): Part 15.247

BASE MODEL: SC-01K

FCC ID: A3LSC01K

FCC CLASSIFICATION: Digital Transmission System (DTS)

Test Device Serial No.: 12ECB, 12E63,
13019, 12EC2, ☐ Production ☒ Pre-Production ☐ Engineering
13056

DATE(S) OF TEST: 7/21-8/25/2017

TEST REPORT S/N: 1M1707170219-04-R2.A3L

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 3 of 125

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2014 on January 22, 2015.

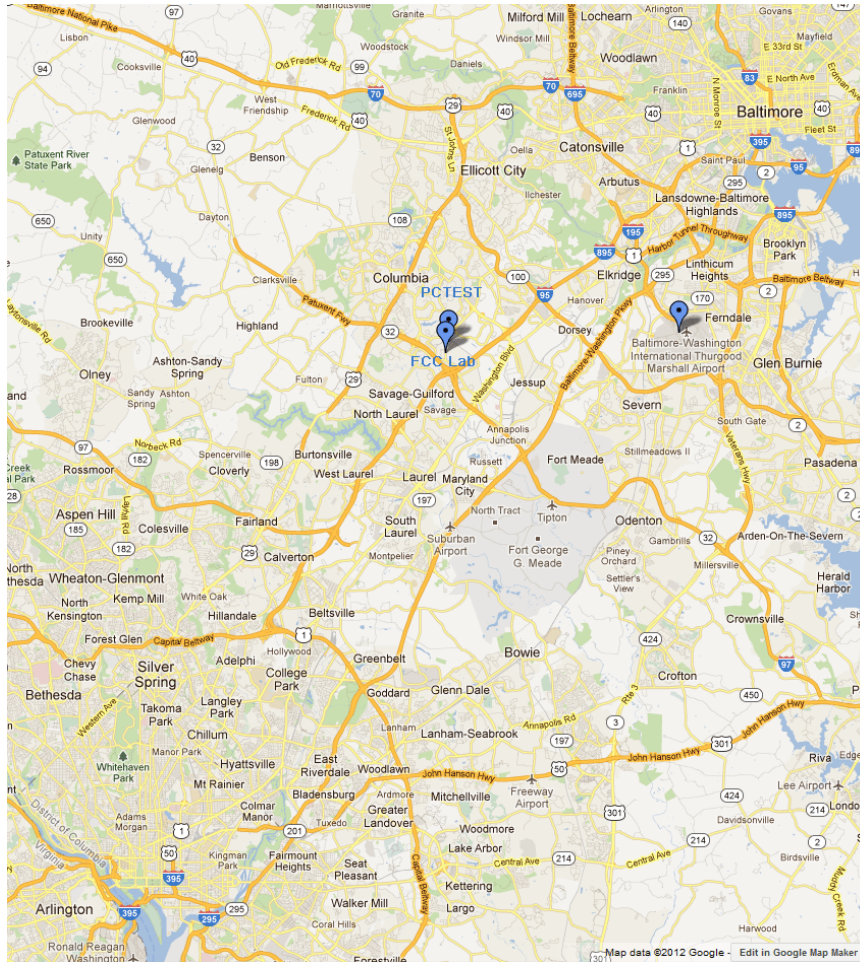


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LSC01K	 FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset	Page 4 of 125

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSC01K**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC, ANT+

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

Table 2-1. Frequency/ Channel Operations

Note: The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01 v04. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		ANT1	ANT2	MIMO/CDD
2.4GHz	b	98.6	98.8	N/A
	g	98.2	98.8	97.8
	n	98.6	98.8	97.8

Table 2-2. Measured Duty Cycles

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 5 of 125

The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		Primary	Secondary	Primary	Secondary	Primary	Secondary
2.4GHz	11b	✓	✓	✗	✗	✗	✗
	11g	✓	✓	✗	✗	✓	✓
	11n	✓	✓	✓	✓	✓	✓

Table 2-3. Frequency / Channel Operations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

Data Rates Supported: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)
 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (g)
 6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,
 52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n)
 13/14.4Mbps, 26/28.9Mbps, 39/43.3Mbps, 52/57.8Mbps, 78/86.7Mbps,
 104/115.6Mbps, 117/130Mbps, 130/144.4Mbps (MIMO n)

Note: This Device supports simultaneous transmission operation, which allows for two SISO or two MIMO channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in the UNII test report.

Scenario A – Config-1: ANT1 transmitting in 2.4GHz mode and ANT2 in 5GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	2
Channel	1	157
Operating Frequency(MHz)	2412	5785
Data Rate (Mbps)	1	MCS0
Mode	802.11b	802.11n

Table 2-4. Config-1 (ANT1 2.4GHz & ANT2 5GHz)

Scenario B – Config-2: ANT1 transmitting in 5GHz mode and ANT2 in 2.4GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	2	1
Channel	1	100
Operating Frequency(MHz)	2412	5500
Data Rate (Mbps)	1	6
Mode	802.11b	802.11a

Table 2-5. Config-2 (ANT1 5GHz & ANT2 2.4GHz)

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 6 of 125

Scenario C – Config-3: ANT1 transmitting in 2.4GHz + 5GHz mode and ANT2 in 2.4GHz + 5GHz mode

Description	2.4 + 5 GHz Tx	2.4 + 5 GHz Tx
Antenna	1,2	1,2
Channel	1 and 157	1 and 157
Operating Frequency(MHz)	2412 and 5785	2412 and 5785
Data Rate (Mbps)	1 and MCS0	1 and MCS0
Mode	802.11g/n/a/ac	802.11g/n/a/ac

Table 2-6. Config-3 (ANT1 2.4 + 5GHz & ANT2 2.4 + 5GHz)

Note: 802.11a/g modes are capable of transmitting simultaneously on two antennas in this device using Cyclic Delay Diversity. 802.11n/ac modes are capable of transmitting simultaneously on two antennas using Cyclic Delay Diversity and Spatial Diversity Multiplexing (2x2 MIMO).

2.3 Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v04. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on a certified wireless charging pad (WCP) while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 7 of 125

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v04 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 8 of 125

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. A 72.4cm high PVC support structure is placed on top of the turntable. A 3" (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm. For measurements above 1GHz, a high density expanded polystyrene block is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 9 of 125

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 10 of 125

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 11 of 125

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2006.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	10/3/2016	Annual	10/3/2017	WL25-1
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	6/21/2017	Annual	6/21/2018	RE1
Agilent	N9020A	MXA Signal Analyzer	10/28/2016	Annual	10/28/2017	US46470561
Agilent	N9038A	MXE EMI Receiver	4/26/2017	Annual	4/26/2018	MY51210133
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Anritsu	MA2411B	Pulse Power Sensor	10/14/2015	Biennial	10/14/2017	846215
COM-Power	AL-130R	Active Loop Antenna	6/5/2017	Annual	6/5/2018	121085
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	6/21/2017	Annual	6/21/2018	441119
Com-Power	PAM-118A	PREAMPLIFIER 500MHZ TO 18GHZ	8/9/2016	Annual	8/9/2017	551079
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/23/2016	Biennial	8/23/2018	135427
Emco	3115	Horn Antenna (1-18GHz)	3/10/2016	Biennial	3/10/2018	9704-5182
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	12/1/2016	Biennial	12/1/2018	125518
Pasternack	NMLC-1	Line Conducted Emissions Cable (NM)	10/5/2016	Annual	10/5/2017	NMLC-1
PCTEST	-	EMC Switch System	6/21/2017	Annual	6/21/2018	NM2
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	4/19/2017	Annual	4/19/2018	100342
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	7/27/2016	Annual	7/27/2017	103200
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/7/2017	Annual	3/7/2018	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/11/2017	Annual	5/11/2018	100040
Solar Electronics	8012-50-R-24-BNC	Line Impedance Stabilization Network	7/30/2015	Biennial	7/30/2017	310233
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	3/14/2016	Biennial	3/14/2018	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 12 of 125

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSC01K
 FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 7.2
15.247(b)(3)	Transmitter Output Power	< 1 Watt		PASS	Sections 7.3
15.247(e)	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	Conducted $\geq$ 30dBc		PASS	Sections 7.5, 7.6
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	RADIATED	PASS	Sections 7.7, 7.8
15.207	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 7.9

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "WLAN Automation," Version 3.4.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.1.5.

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 13 of 125

7.2 6dB Bandwidth Measurement

§15.247(a.2)

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Procedure Used

KDB 558074 D01 v04 – Section 8.2 Option 2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 14 of 125

Antenna-1 6 dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
2412	1	b	1	7.58	0.500	Pass
2437	6	b	1	7.14	0.500	Pass
2462	11	b	1	7.59	0.500	Pass
2412	1	g	6	15.26	0.500	Pass
2437	6	g	6	15.54	0.500	Pass
2462	11	g	6	15.43	0.500	Pass
2412	1	n	6.5/7.2 (MCS0)	15.24	0.500	Pass
2437	6	n	6.5/7.2 (MCS0)	15.26	0.500	Pass
2462	11	n	6.5/7.2 (MCS0)	16.12	0.500	Pass

Table 7-2. Conducted Bandwidth Measurements

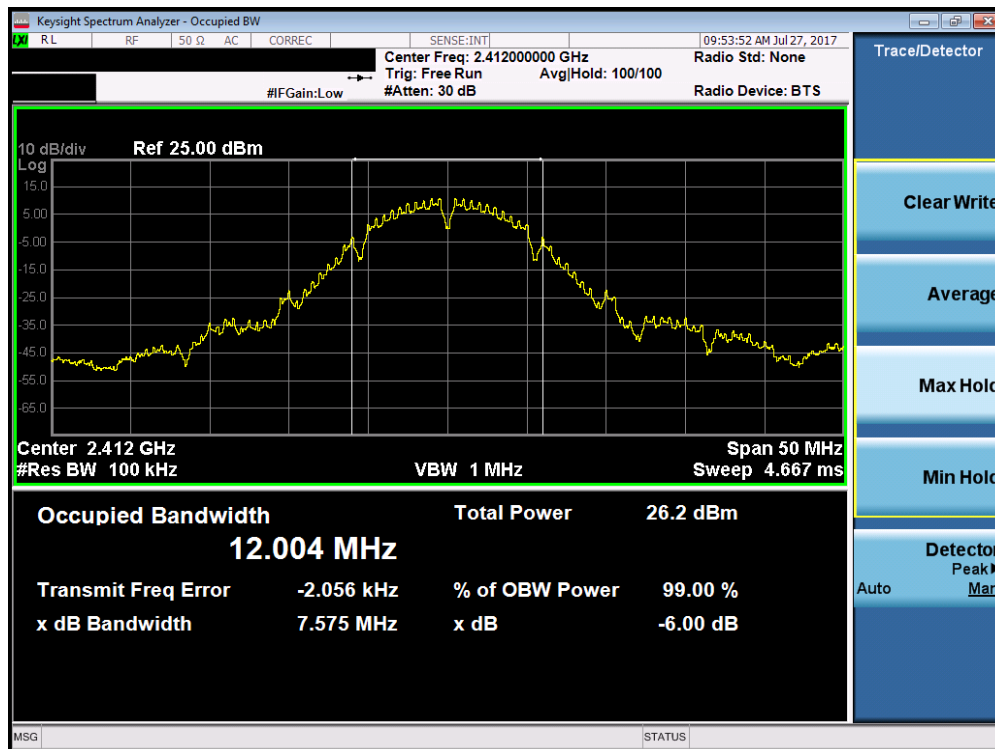


Plot 7-1. 6dB Bandwidth Plot (802.11b – Ch. 1)

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 15 of 125

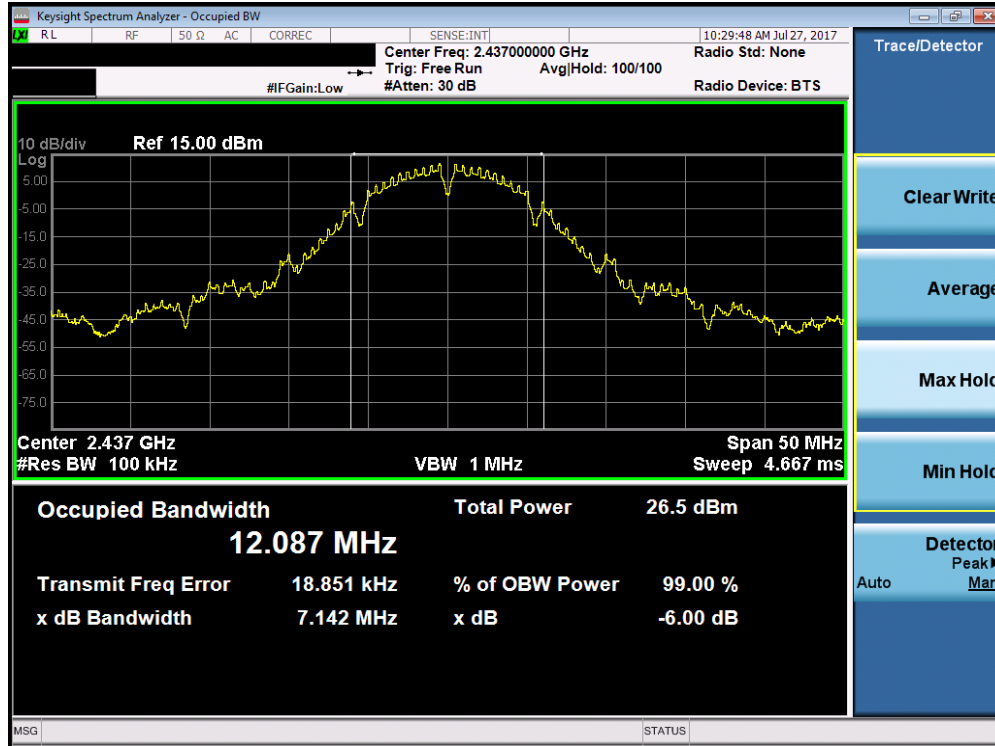


Plot 7-2. 6dB Bandwidth Plot (802.11b – Ch. 6)

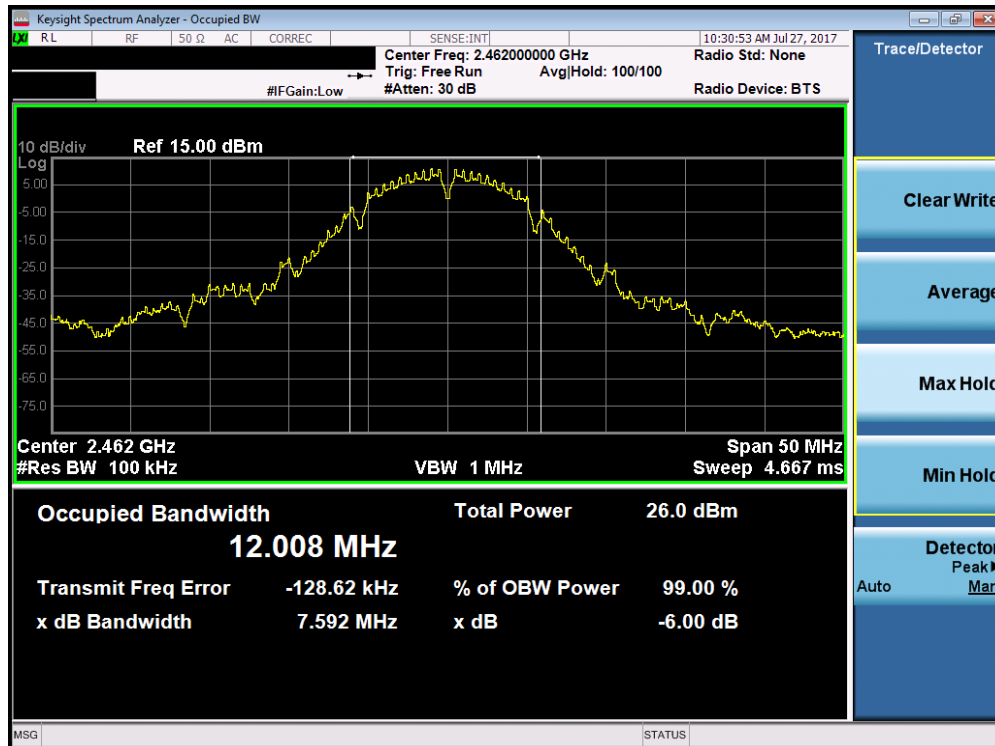


Plot 7-3. 6dB Bandwidth Plot (802.11b – Ch. 11)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 16 of 125

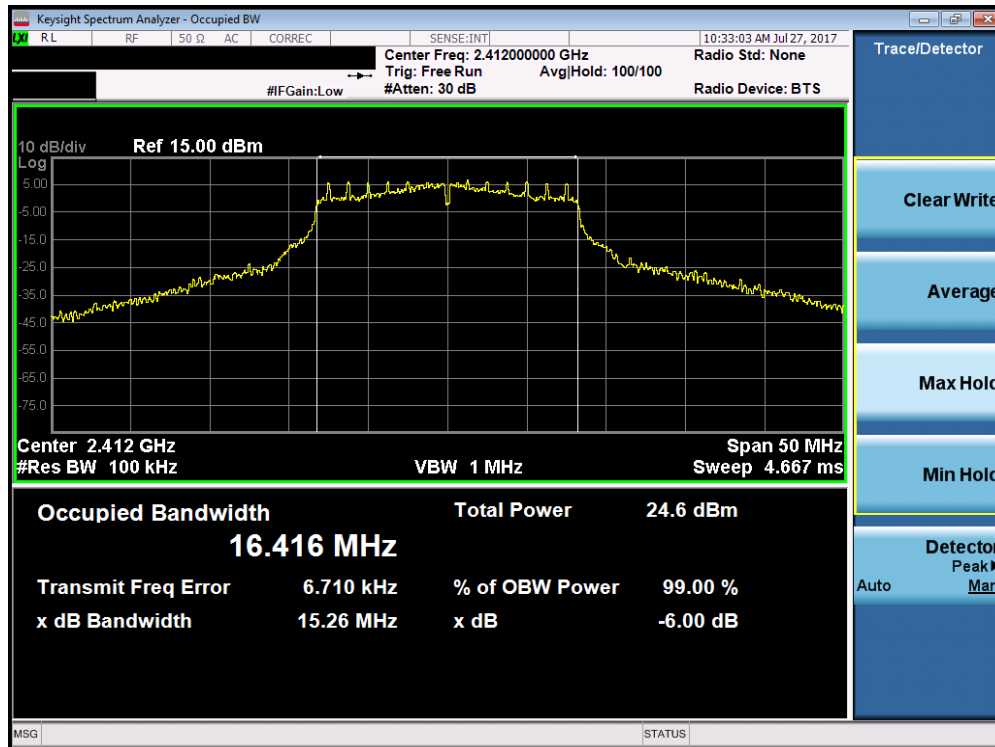


Plot 7-4. 6dB Bandwidth Plot (802.11g – Ch. 1)

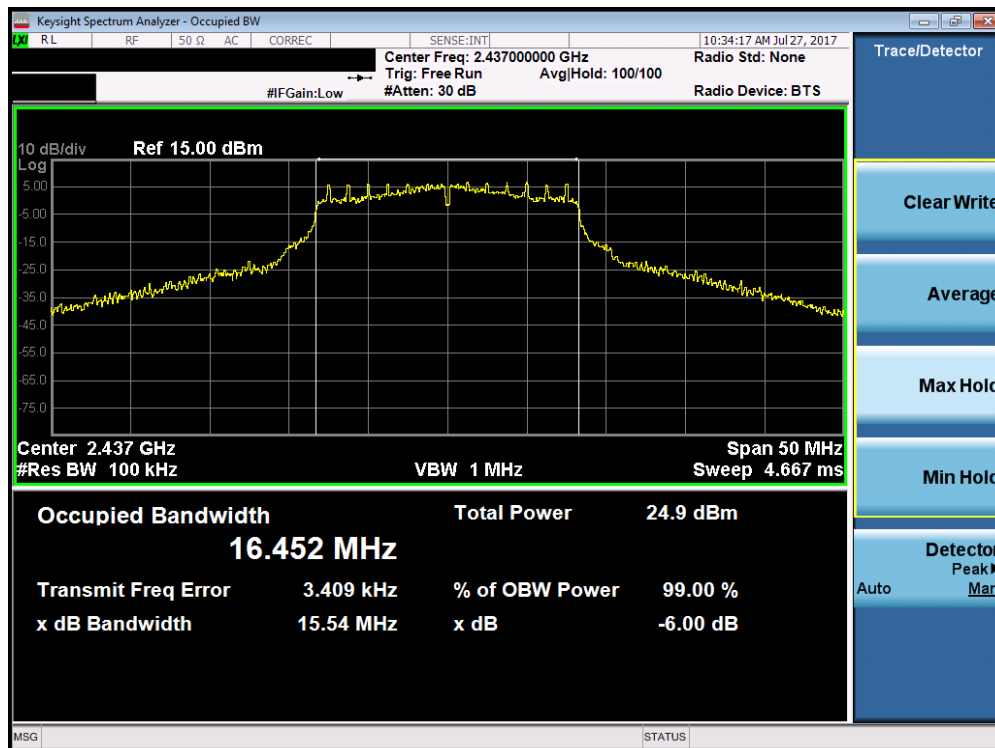


Plot 7-5. 6dB Bandwidth Plot (802.11g – Ch. 6)

FCC ID: A3LSC01K			FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset	Page 17 of 125		

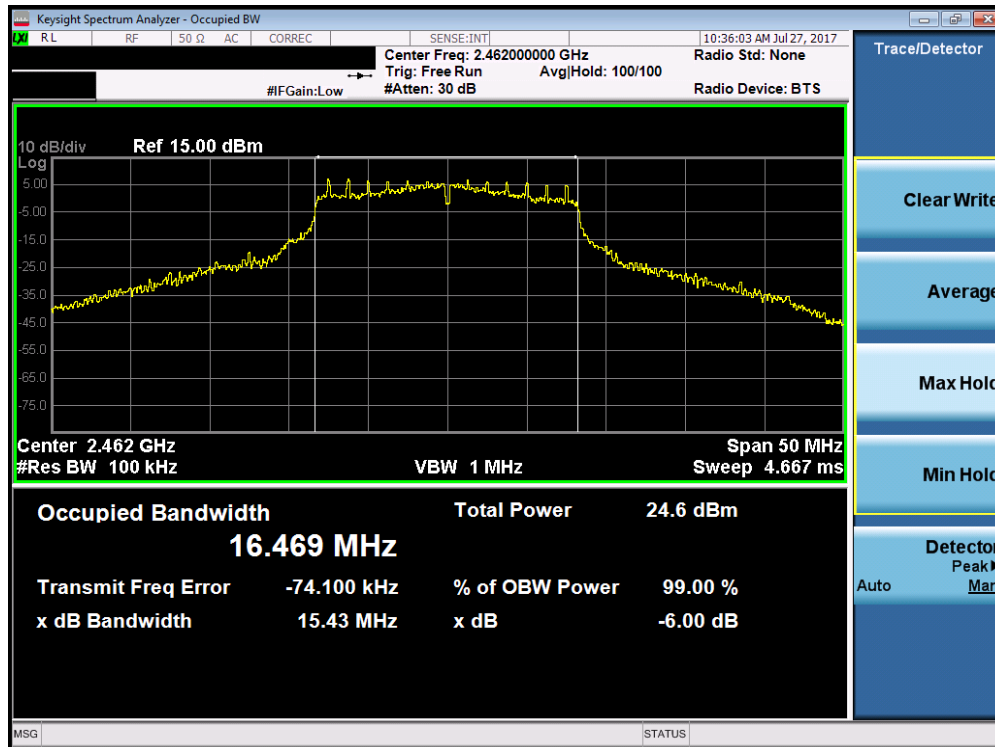


Plot 7-6. 6dB Bandwidth Plot (802.11g – Ch. 11)

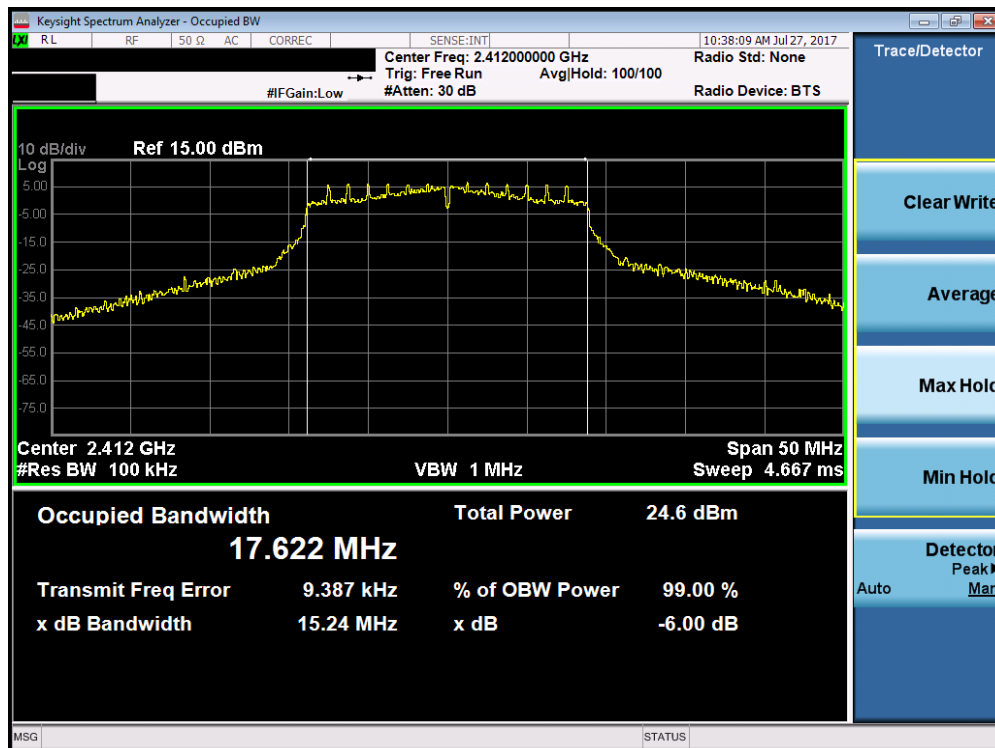


Plot 7-7. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 1)

FCC ID: A3LSC01K	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 18 of 125

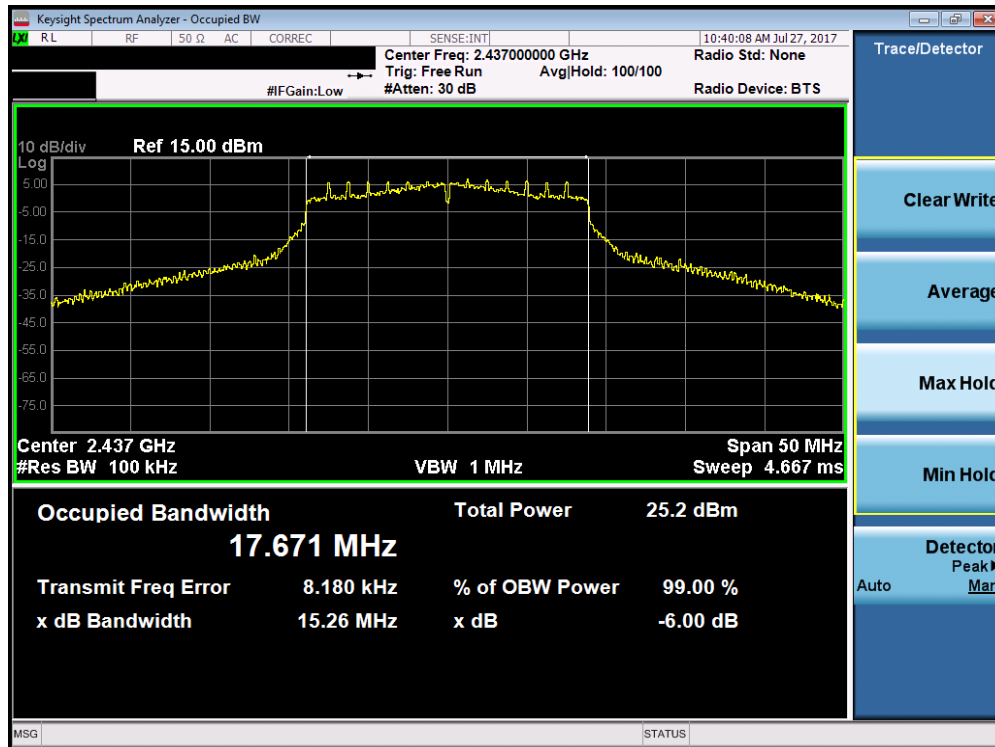

Plot 7-8. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 6)

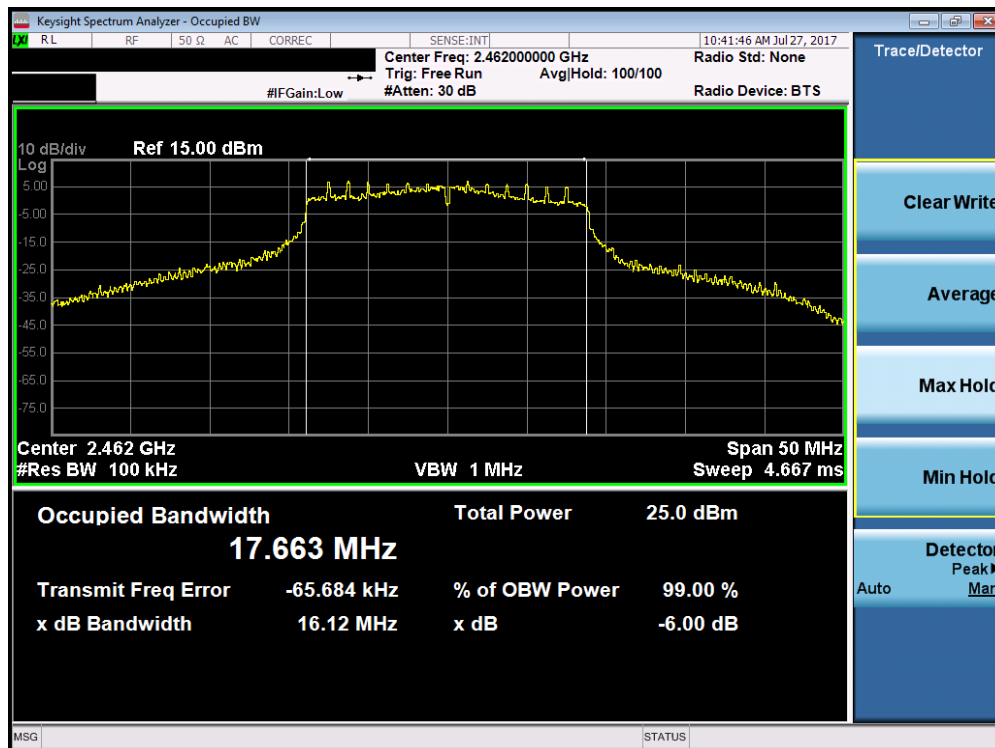


Plot 7-9. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 11)

FCC ID: A3LSC01K	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset	Page 19 of 125	

Antenna-2 6 dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
2412	1	b	1	7.14	0.500	Pass
2437	6	b	1	7.61	0.500	Pass
2462	11	b	1	7.15	0.500	Pass
2412	1	g	6	15.24	0.500	Pass
2437	6	g	6	15.52	0.500	Pass
2462	11	g	6	15.50	0.500	Pass
2412	1	n	6.5/7.2 (MCS0)	15.24	0.500	Pass
2437	6	n	6.5/7.2 (MCS0)	15.77	0.500	Pass
2462	11	n	6.5/7.2 (MCS0)	15.54	0.500	Pass

Table 7-3. Conducted Bandwidth Measurements

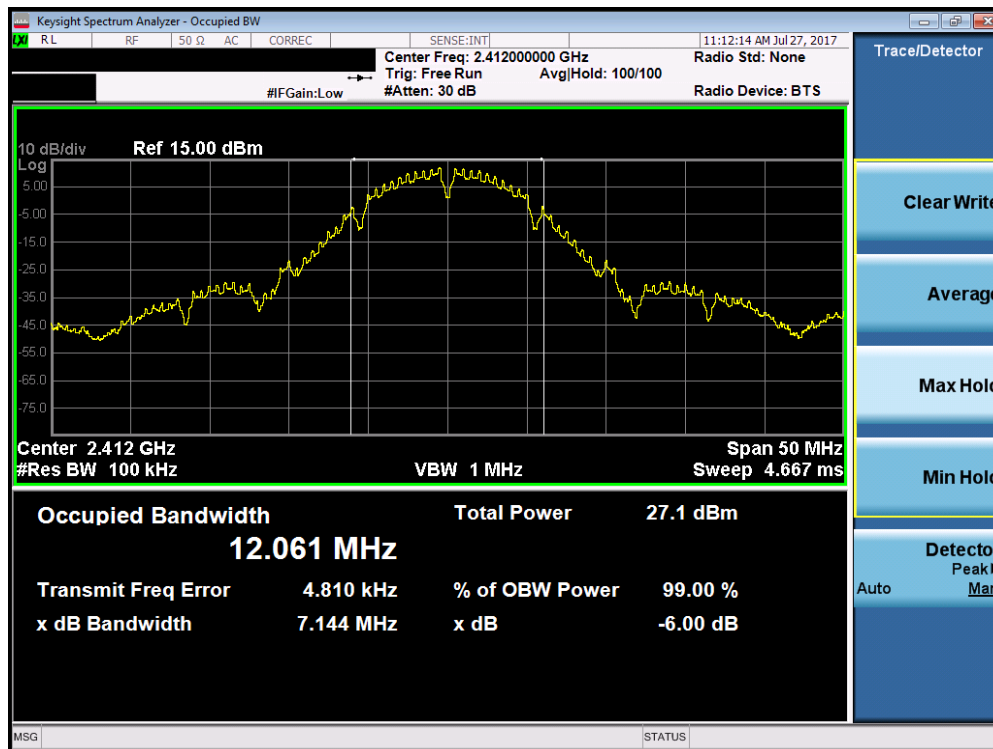


Plot 7-10. 6dB Bandwidth Plot (802.11b – Ch. 1)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 20 of 125

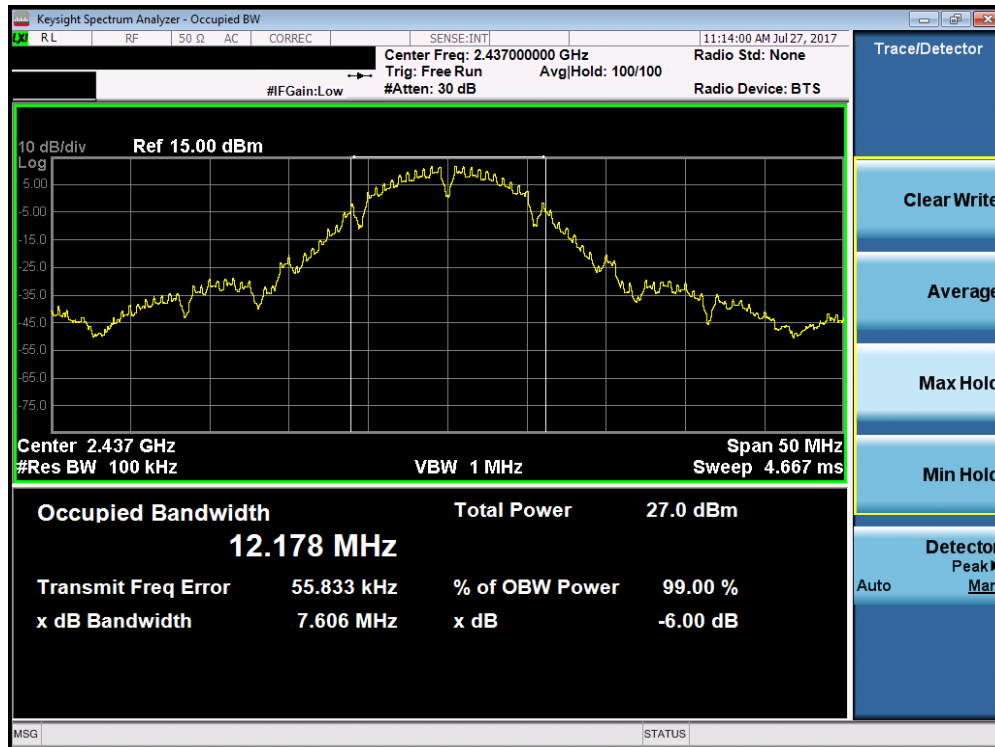


Plot 7-11. 6dB Bandwidth Plot (802.11b – Ch. 6)

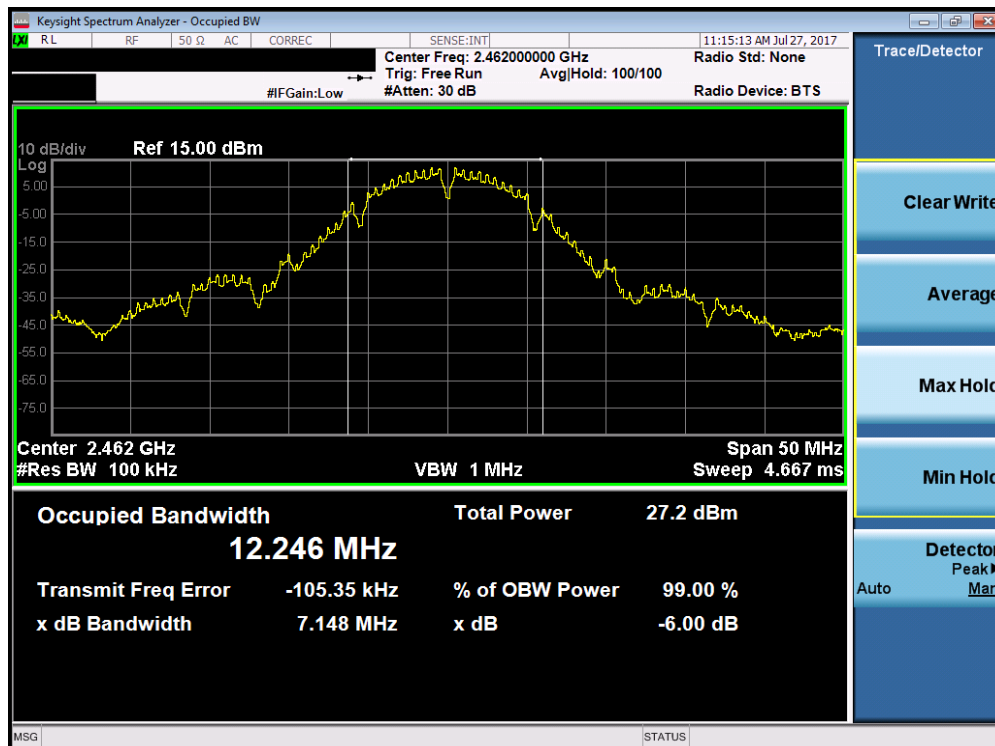


Plot 7-12. 6dB Bandwidth Plot (802.11b – Ch. 11)

FCC ID: A3LSC01K			FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset	Page 21 of 125		

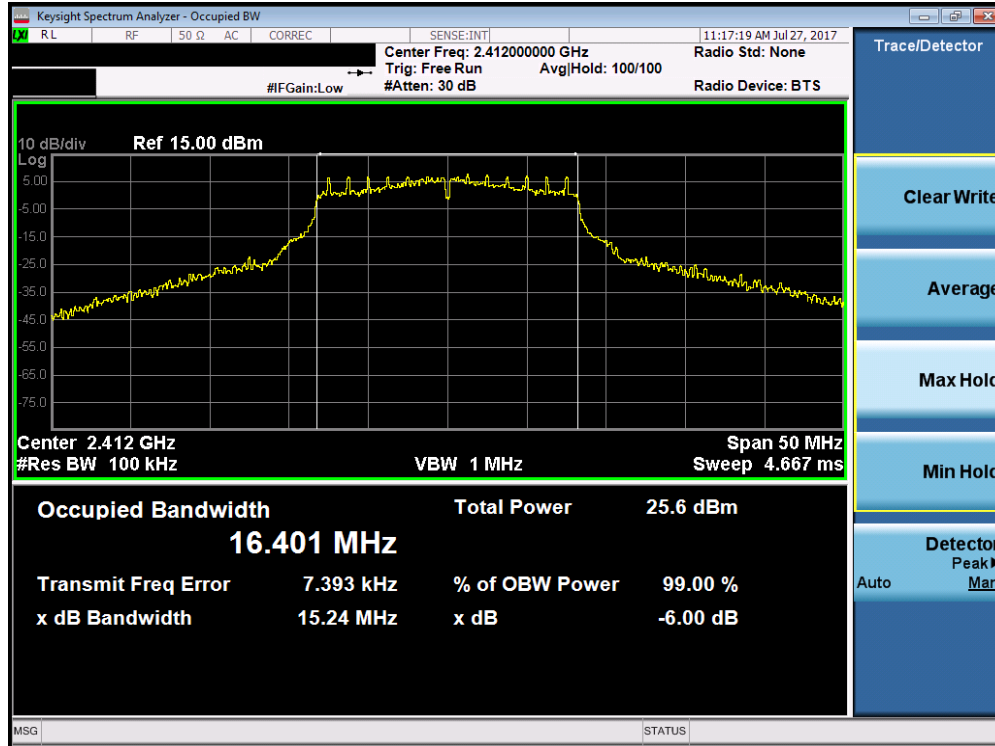


Plot 7-13. 6dB Bandwidth Plot (802.11g – Ch. 1)

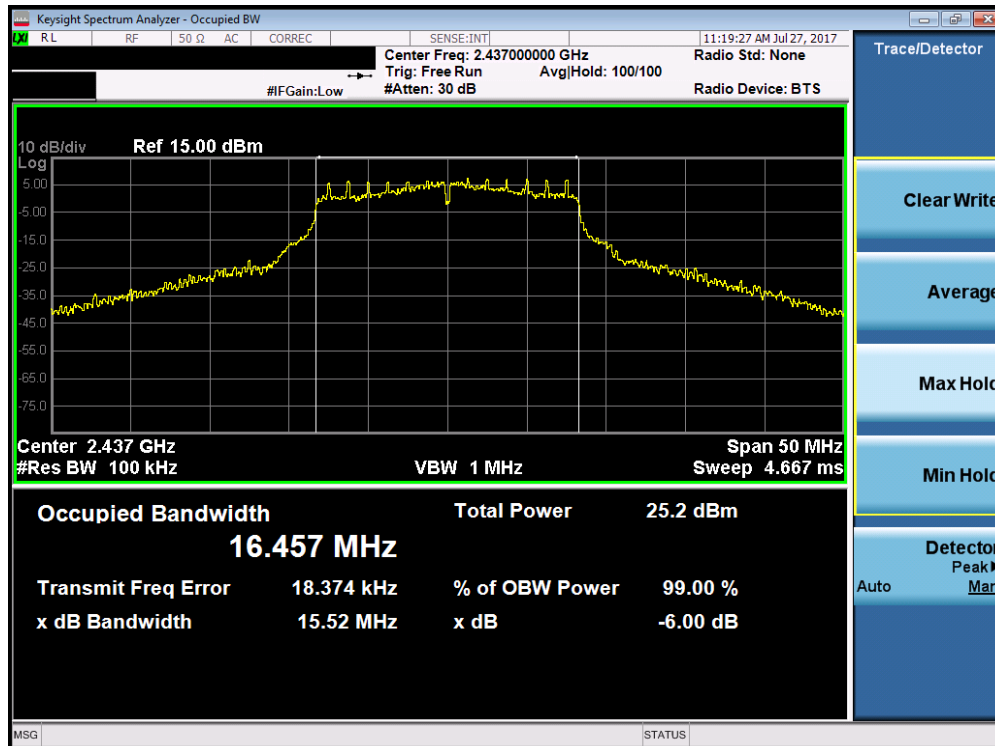


Plot 7-14. 6dB Bandwidth Plot (802.11g – Ch. 6)

FCC ID: A3LSC01K			FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset			Page 22 of 125

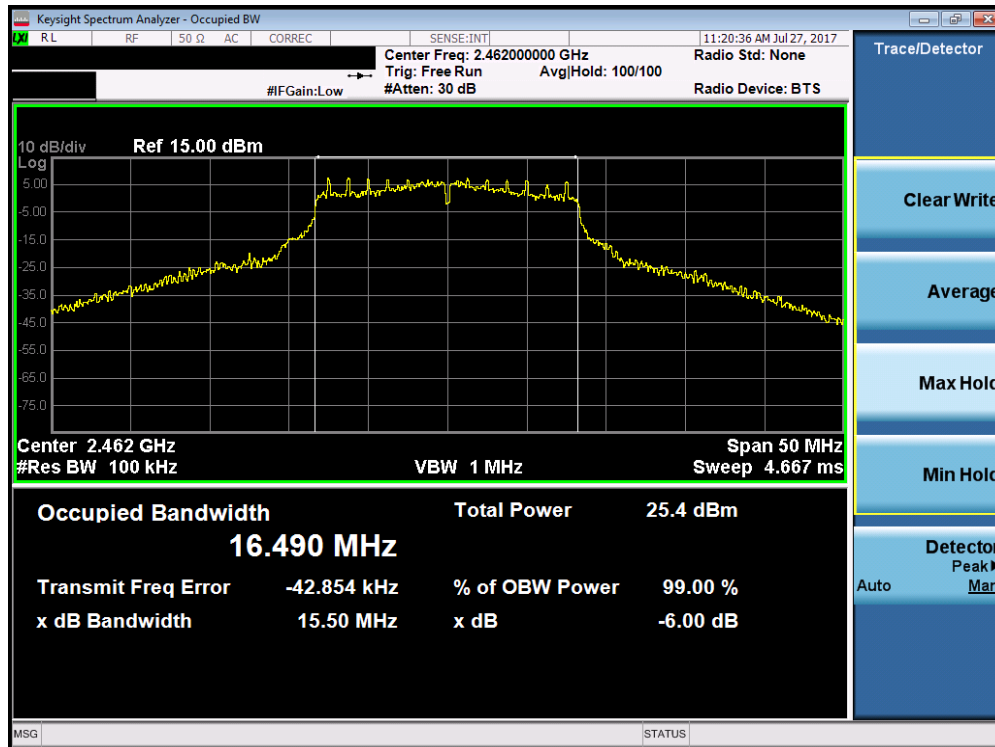


Plot 7-15. 6dB Bandwidth Plot (802.11g – Ch. 11)

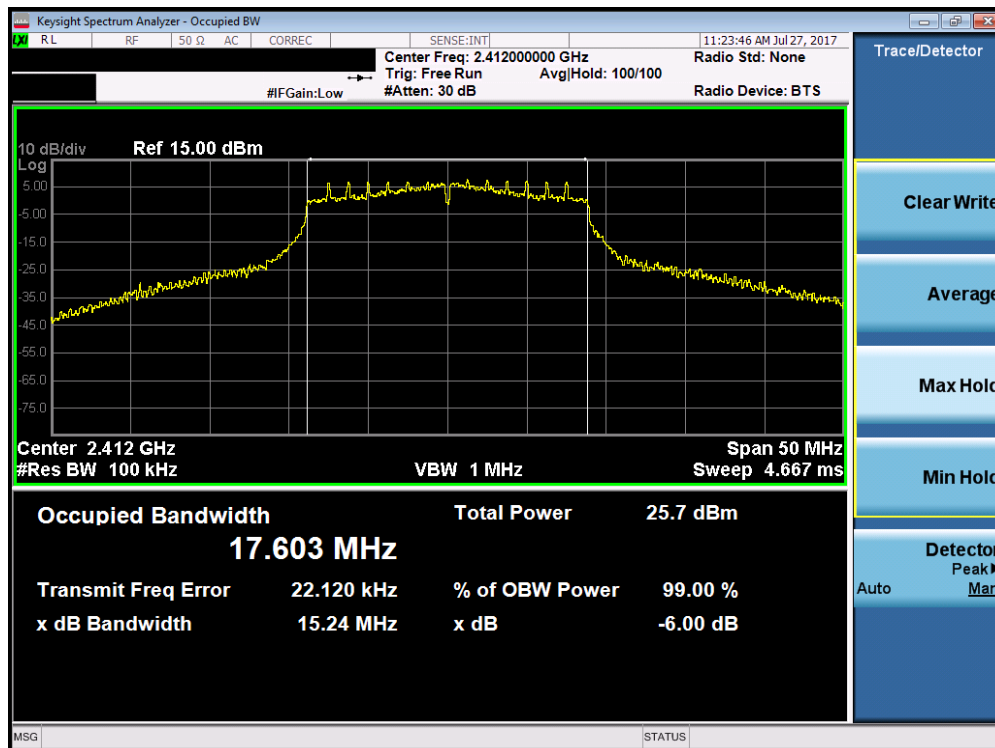


Plot 7-16. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 1)

FCC ID: A3LSC01K			FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset			Page 23 of 125

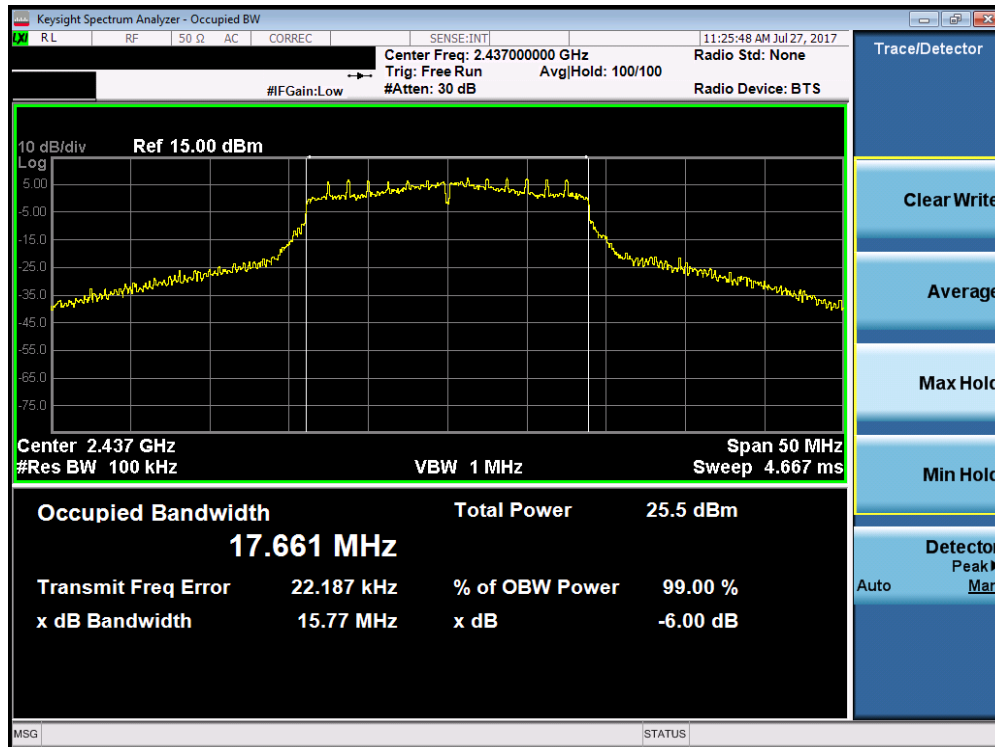

Plot 7-17. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 6)

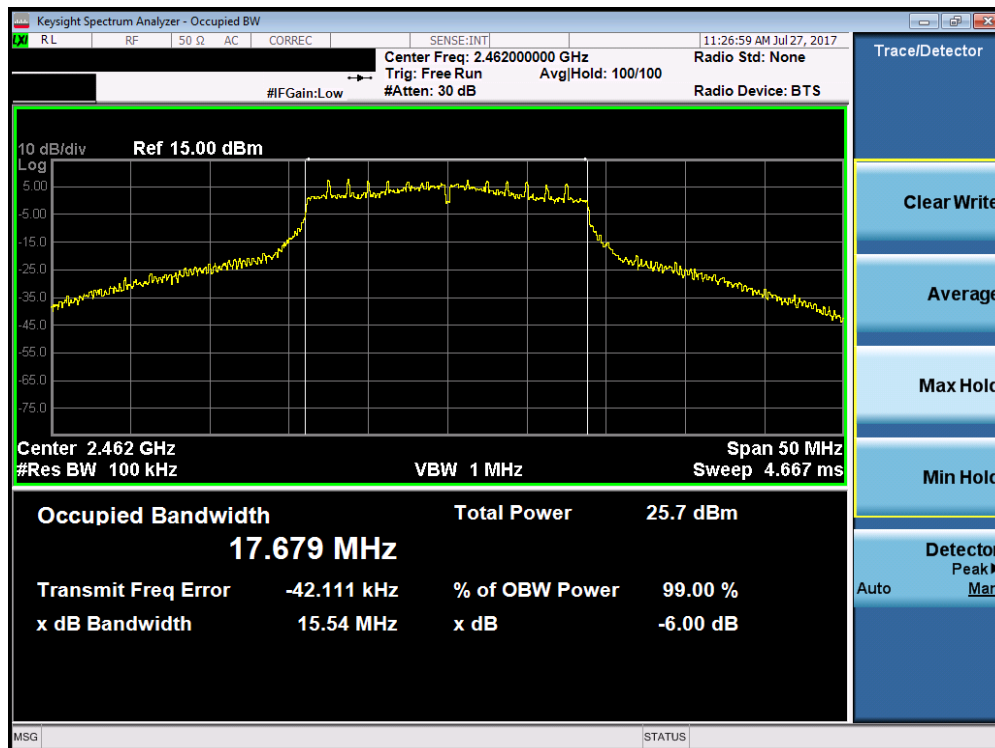

Plot 7-18. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 11)

FCC ID: A3LSC01K	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset	Page 24 of 125	

7.3 Output Power Measurement

§15.247(b.3)

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

Test Procedure Used

KDB 558074 D01 v04 – Section 9.1.2 PKPM1 Peak Power Method

KDB 558074 D01 v04 – Section 9.2.3.2 Method AVGPM-G

KDB 662911 D01 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

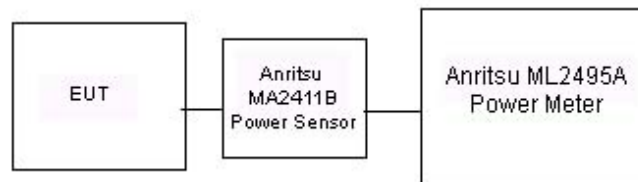


Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

None

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 25 of 125

Freq [MHz]	Channel	Detector	2.4GHz Conducted Power [dBm]		
			IEEE Transmission Mode		
			802.11b	802.11g	802.11n
2412	1	AVG	18.85	16.93	16.74
		PEAK	21.37	23.81	23.68
2437	6	AVG	18.76	16.84	16.70
		PEAK	22.31	24.13	23.94
2462	11	AVG	18.78	16.74	16.54
		PEAK	21.41	23.92	23.81
2467	12	AVG	14.69	12.03	11.86
		PEAK	17.64	20.14	20.23
2472	13	AVG	13.18	9.03	9.02
		PEAK	16.12	16.47	17.83

Table 7-4. Antenna-1 Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	2.4GHz Conducted Power [dBm]		
			IEEE Transmission Mode		
			802.11b	802.11g	802.11n
2412	1	AVG	19.39	17.49	17.16
		PEAK	22.04	23.92	23.97
2437	6	AVG	18.73	16.79	17.43
		PEAK	21.32	23.57	23.93
2462	11	AVG	19.27	17.28	17.11
		PEAK	21.87	23.81	23.83
2467	12	AVG	14.34	11.62	11.57
		PEAK	17.22	19.29	19.90
2472	13	AVG	13.85	9.08	8.86
		PEAK	16.81	16.99	17.55

Table 7-5. Antenna-2 Conducted Output Power Measurements

FCC ID: A3LSC01K	 FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset	Page 26 of 125

Freq [MHz]	Channel	Detector	2.4GHz Conducted Power [dBm]		
			IEEE Transmission Mode		
			ANT1	ANT2	MIMO
2412	1	AVG	14.01	13.82	16.93
		PEAK	21.68	21.97	24.84
2437	6	AVG	14.01	13.77	16.90
		PEAK	21.94	21.93	24.95
2462	11	AVG	14.13	13.60	16.88
		PEAK	21.84	21.83	24.85
2467	12	AVG	11.86	11.57	14.73
		PEAK	20.23	19.90	23.08
2472	13	AVG	9.02	8.86	11.95
		PEAK	17.83	17.55	20.70

Table 7-6. MIMO n-mode Conducted Output Power Measurements

Note:

Per KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2437MHz the average conducted output power was measured to be 14.01 dBm for Antenna-1 and 13.77 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(14.01 \text{ dBm} + 13.77 \text{ dBm}) = (25.18 \text{ mW} + 23.82 \text{ mW}) = 49.00 \text{ mW} = 16.90 \text{ dBm}$$

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 27 of 125

7.4 Power Spectral Density

§15.247(e)

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

KDB 558074 D01 v04 – Section 10.2 Method PKPSD

KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-3. Test Instrument & Measurement Setup

Test Notes


None

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 28 of 125

Antenna-1 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	2.30	8.00	-5.70	Pass
2437	6	b	1	2.91	8.00	-5.09	Pass
2462	11	b	1	1.59	8.00	-6.41	Pass
2412	1	g	6	-1.46	8.00	-9.46	Pass
2437	6	g	6	-0.11	8.00	-8.11	Pass
2462	11	g	6	-0.76	8.00	-8.76	Pass
2412	1	n	6.5/7.2 (MCS0)	-0.85	8.00	-8.85	Pass
2437	6	n	6.5/7.2 (MCS0)	0.07	8.00	-7.93	Pass
2462	11	n	6.5/7.2 (MCS0)	0.71	8.00	-7.29	Pass

Table 7-7. Conducted Power Density Measurements

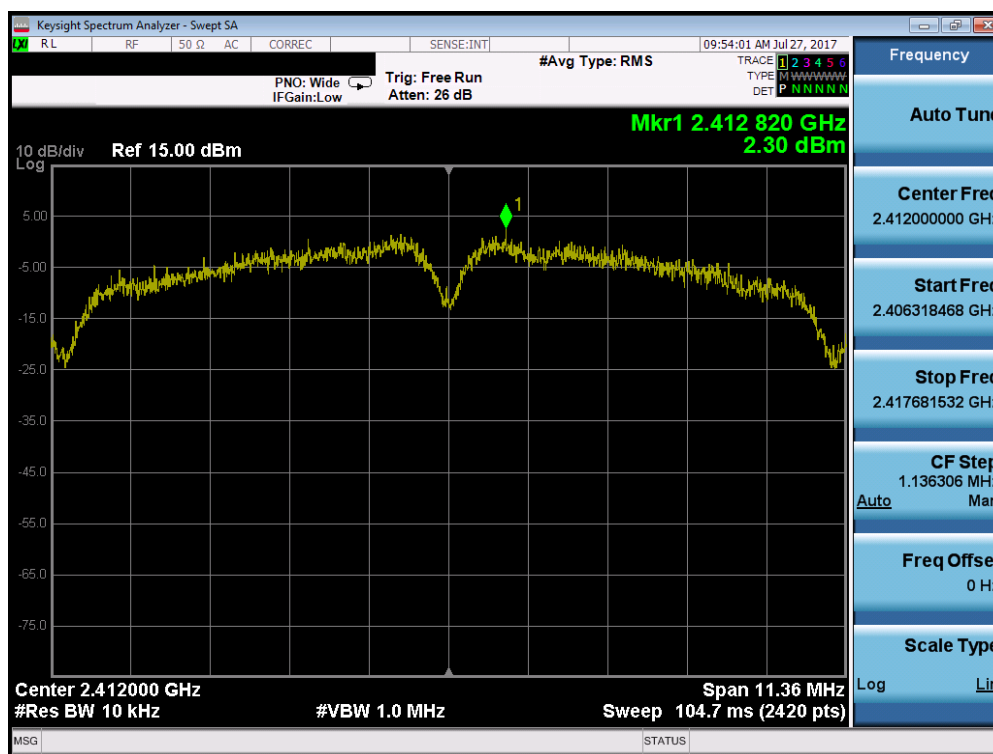


Plot 7-19. Power Spectral Density Plot (802.11b – Ch. 1)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 29 of 125

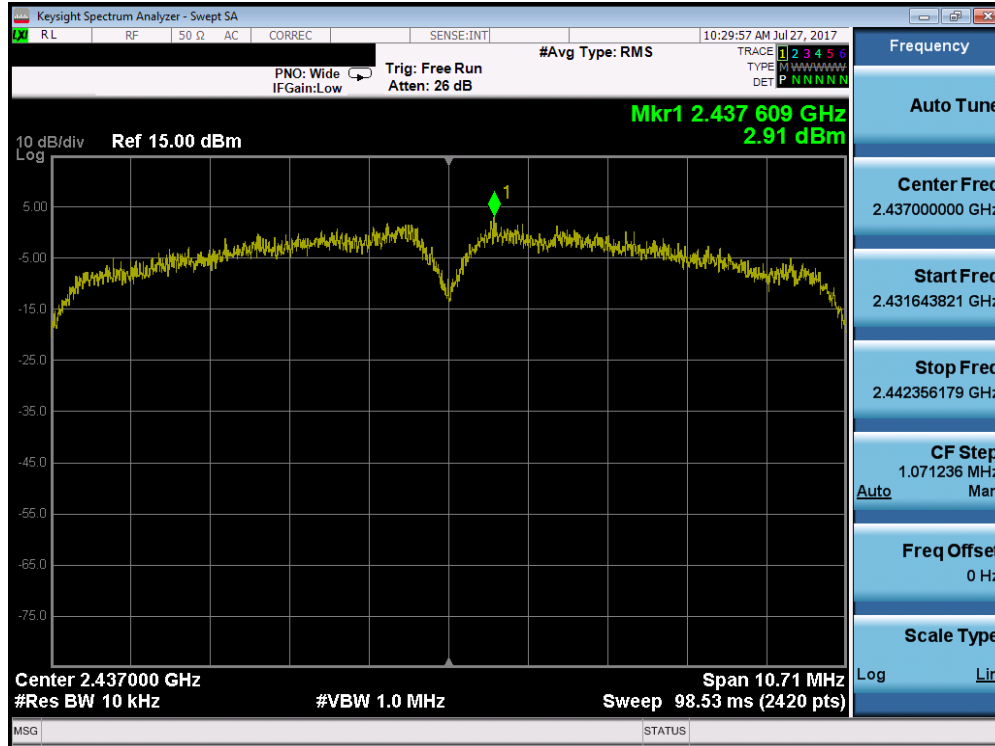


Plot 7-20. Power Spectral Density Plot (802.11b – Ch. 6)

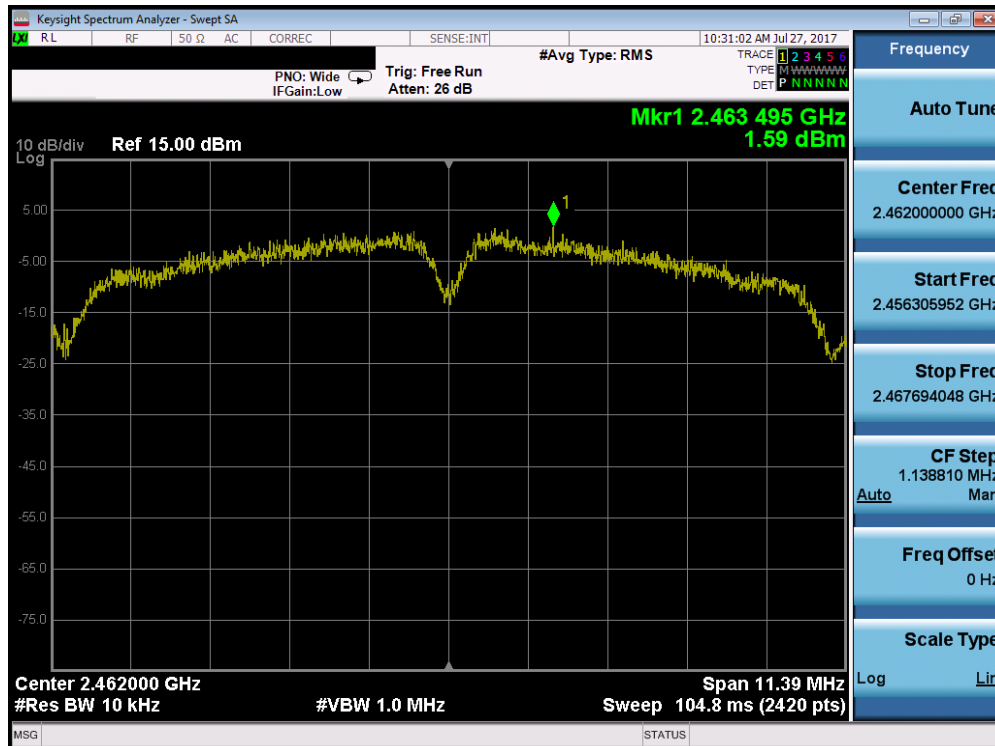


Plot 7-21. Power Spectral Density Plot (802.11b – Ch. 11)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 30 of 125

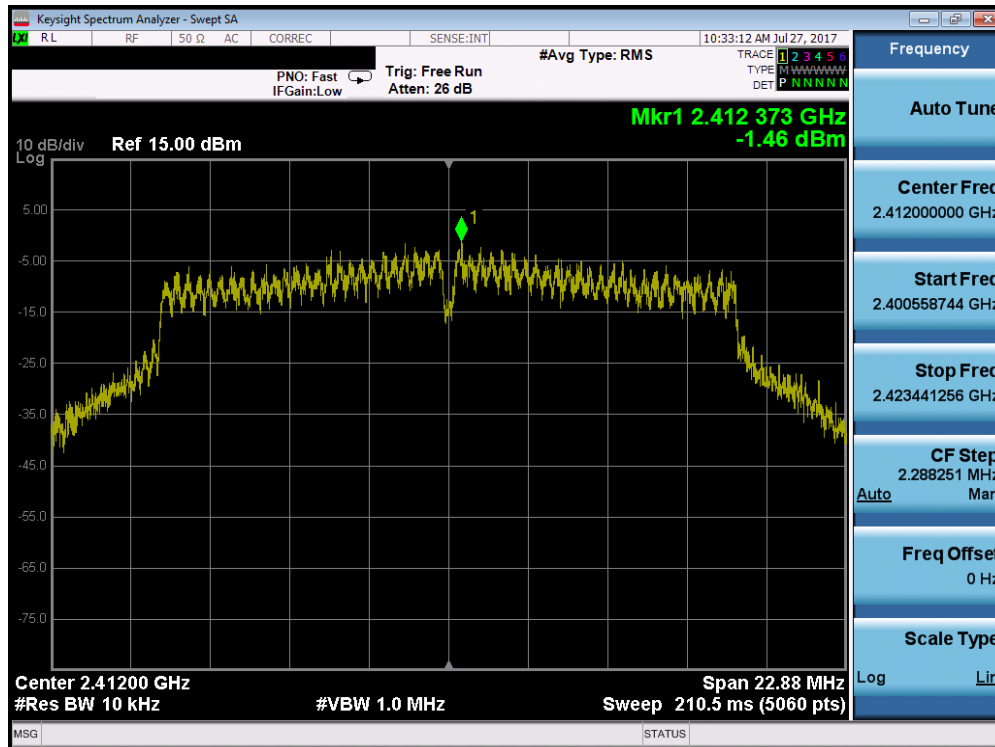


Plot 7-22. Power Spectral Density Plot (802.11g – Ch. 1)

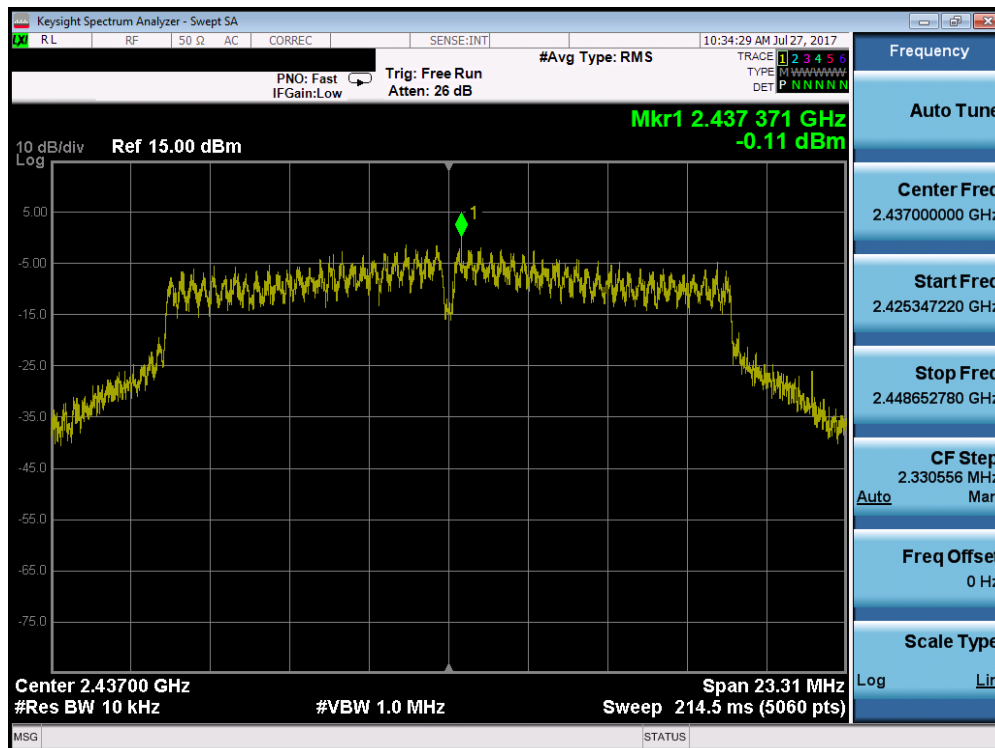


Plot 7-23. Power Spectral Density Plot (802.11g – Ch. 6)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 31 of 125

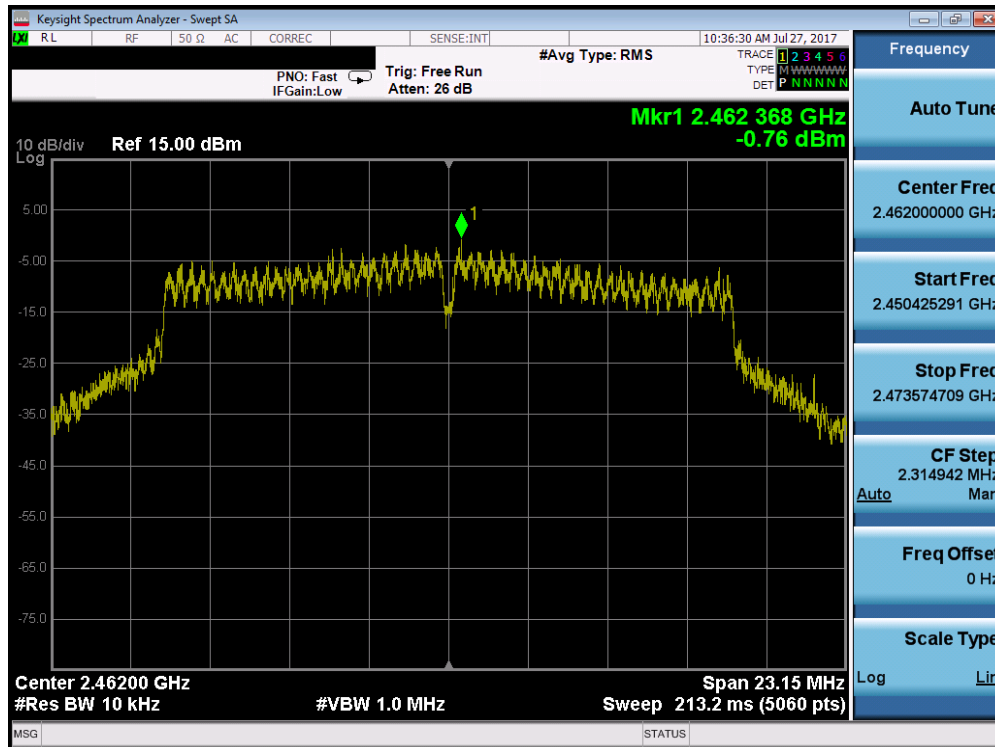


Plot 7-24. Power Spectral Density Plot (802.11g – Ch. 11)

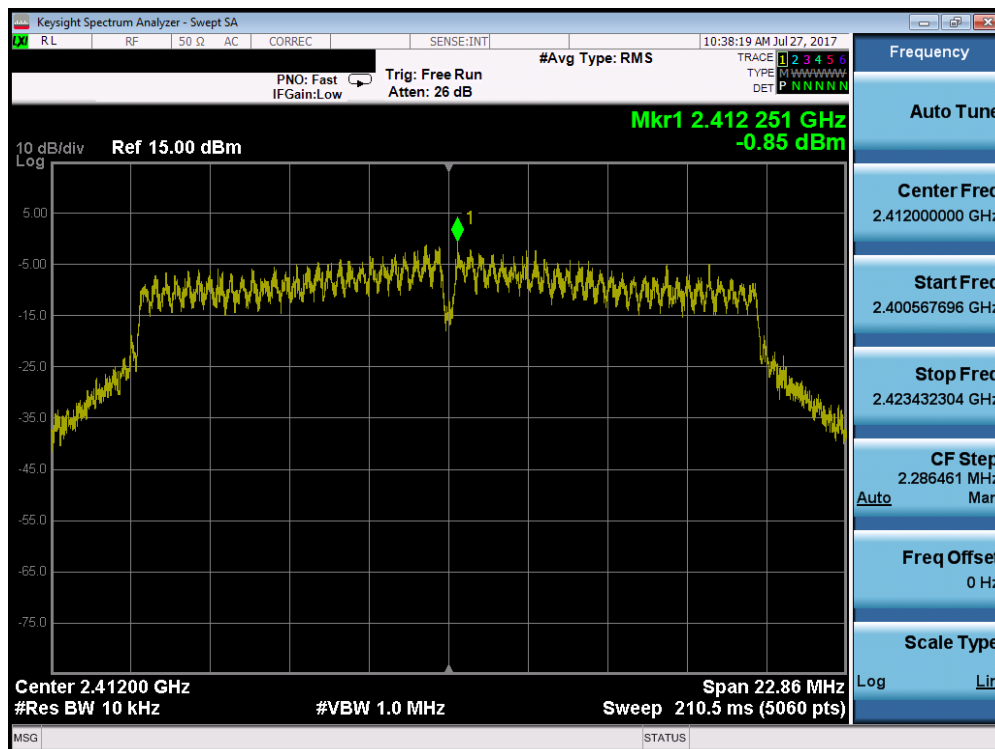


Plot 7-25. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 1)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 32 of 125

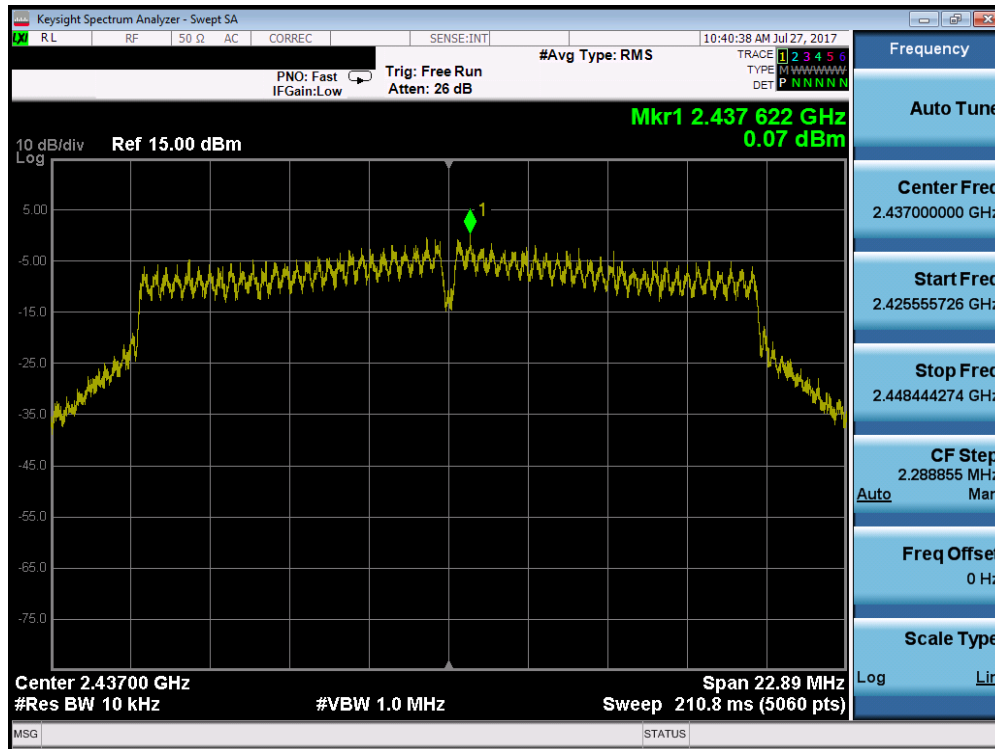

Plot 7-26. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 6)

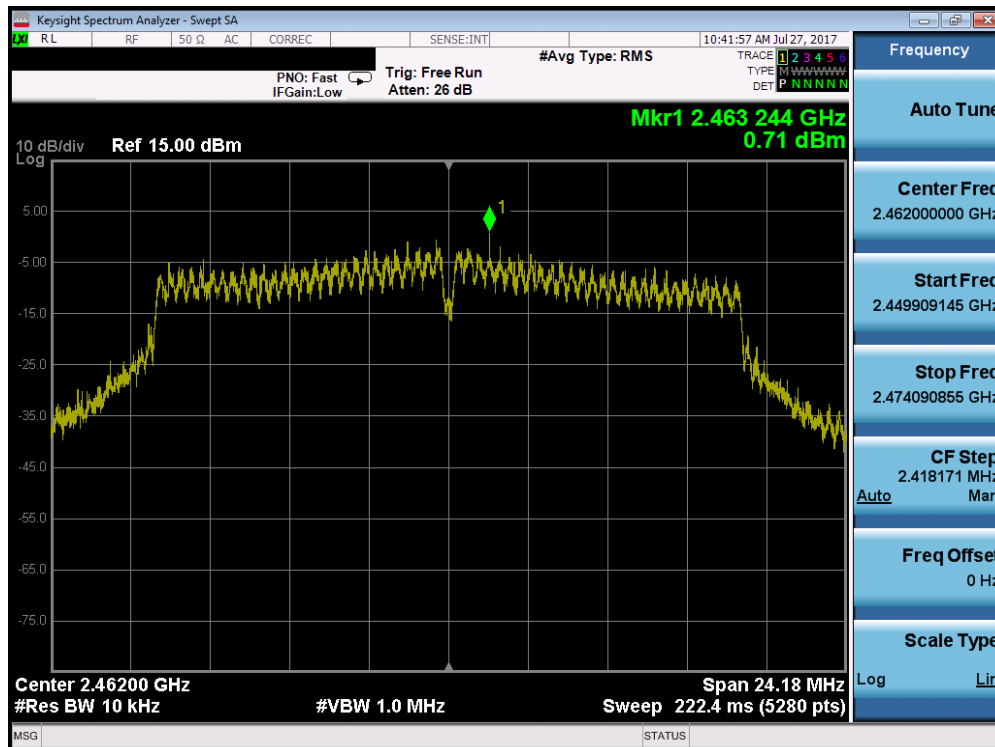


Plot 7-27. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 11)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 33 of 125

Antenna-2 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	3.26	8.00	-4.74	Pass
2437	6	b	1	2.62	8.00	-5.38	Pass
2462	11	b	1	2.62	8.00	-5.38	Pass
2412	1	g	6	-0.15	8.00	-8.15	Pass
2437	6	g	6	-0.02	8.00	-8.02	Pass
2462	11	g	6	-1.53	8.00	-9.53	Pass
2412	1	n	6.5/7.2 (MCS0)	-0.01	8.00	-8.01	Pass
2437	6	n	6.5/7.2 (MCS0)	-0.85	8.00	-8.85	Pass
2462	11	n	6.5/7.2 (MCS0)	-0.61	8.00	-8.61	Pass

Table 7-8. Conducted Power Density Measurements

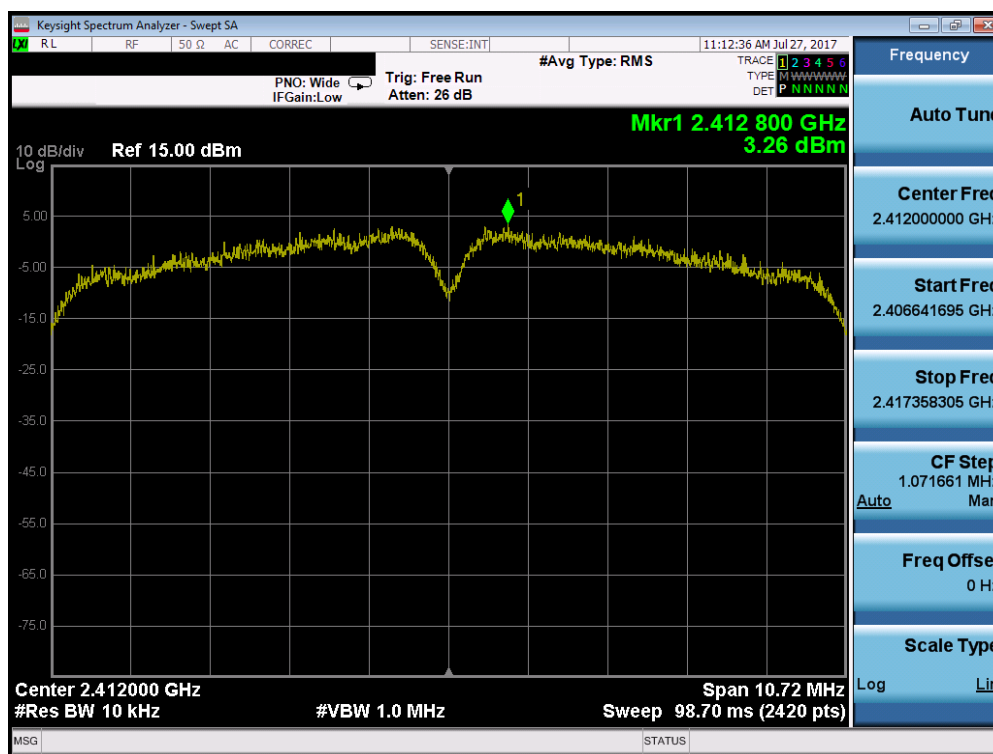


Plot 7-28. Power Spectral Density Plot (802.11b – Ch. 1)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 34 of 125

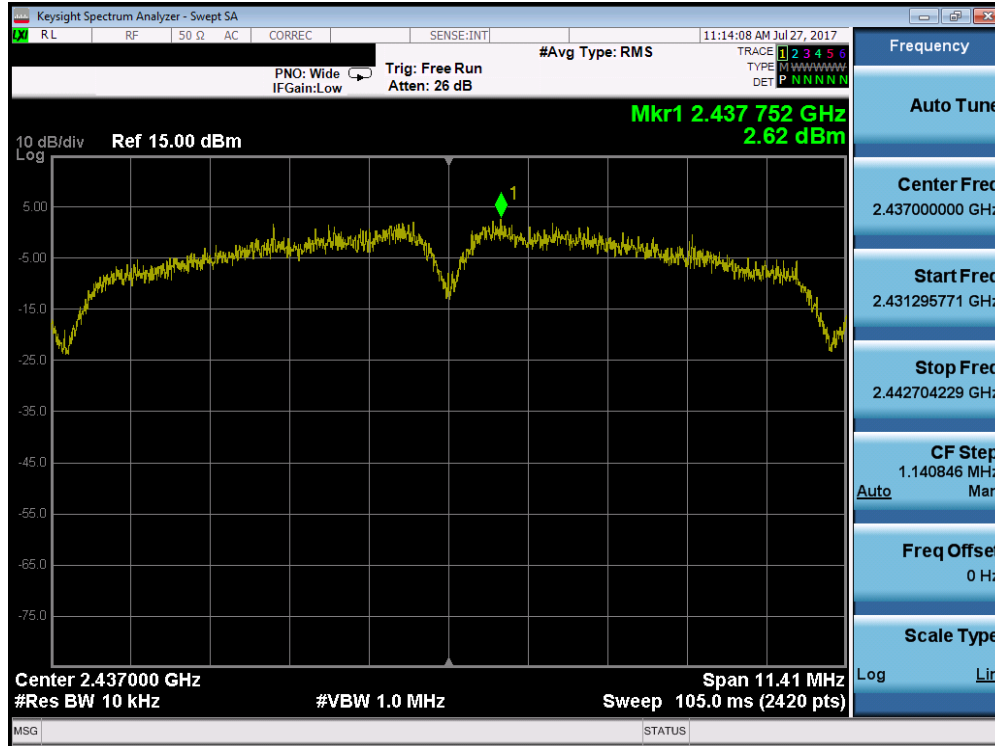


Plot 7-29. Power Spectral Density Plot (802.11b – Ch. 6)

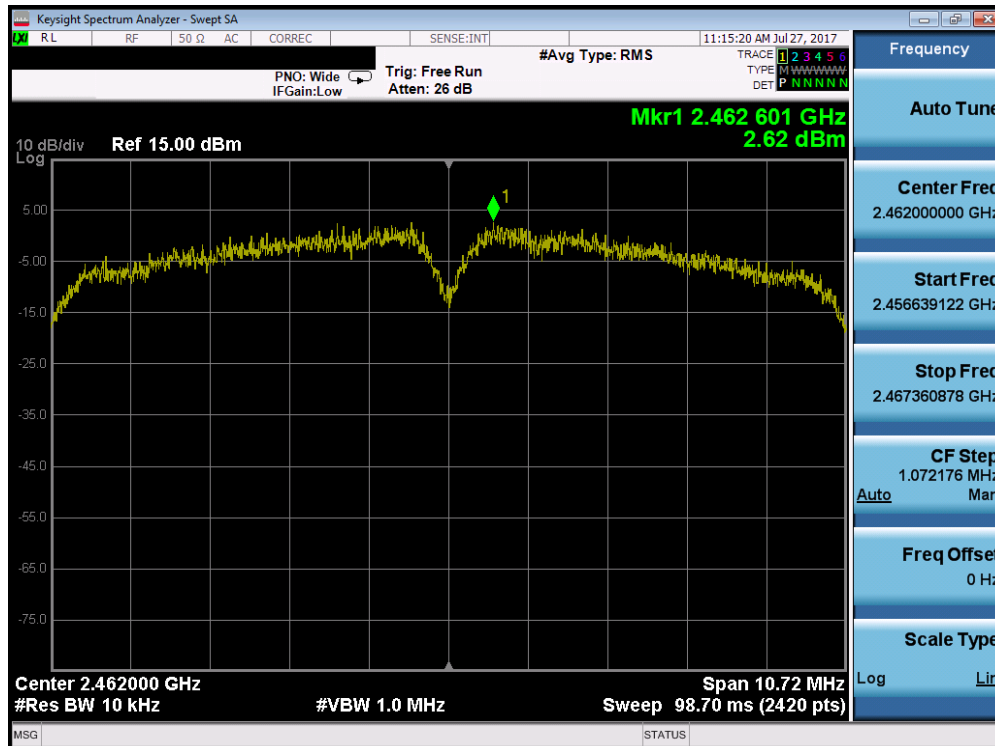


Plot 7-30. Power Spectral Density Plot (802.11b – Ch. 11)

FCC ID: A3LSC01K			FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset	Page 35 of 125		

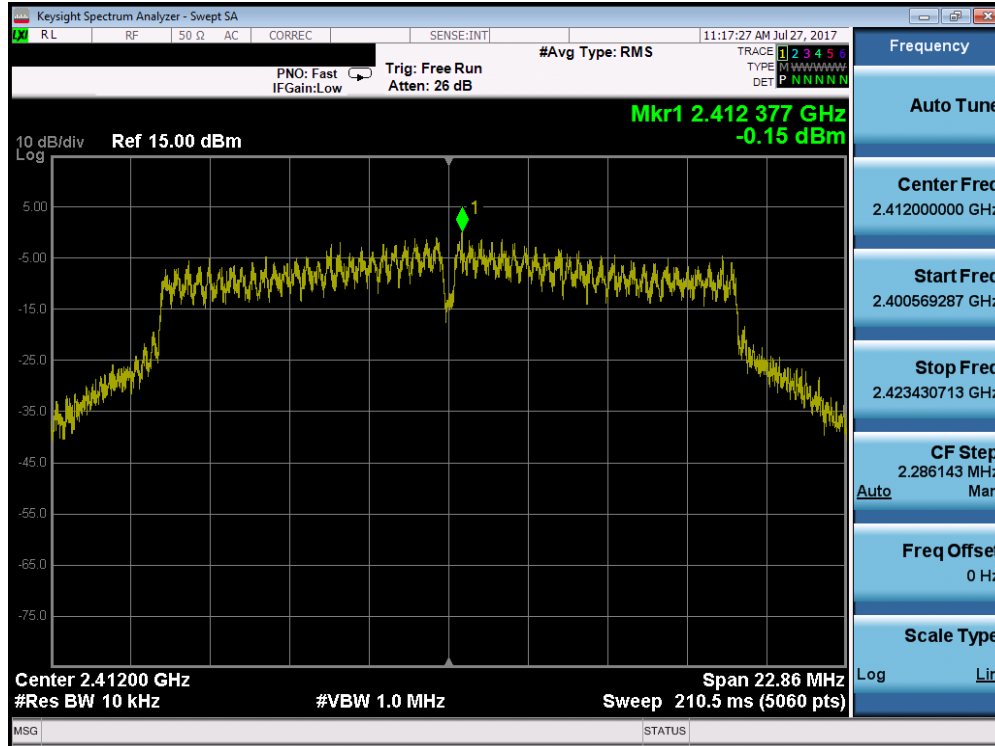


Plot 7-31. Power Spectral Density Plot (802.11g – Ch. 1)

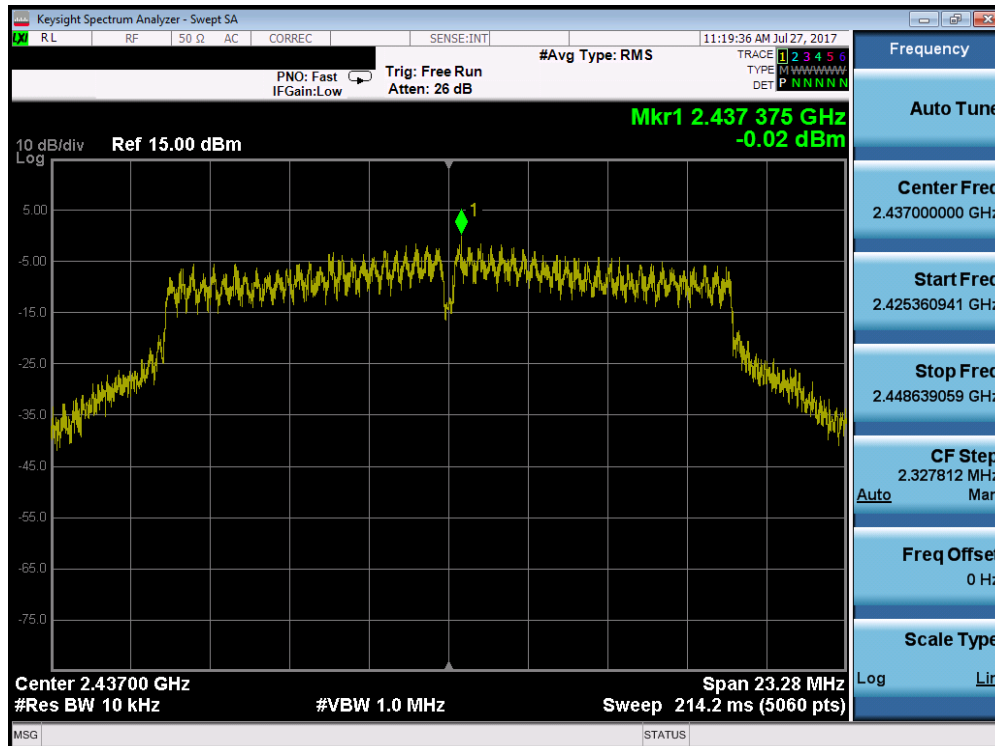


Plot 7-32. Power Spectral Density Plot (802.11g – Ch. 6)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 36 of 125

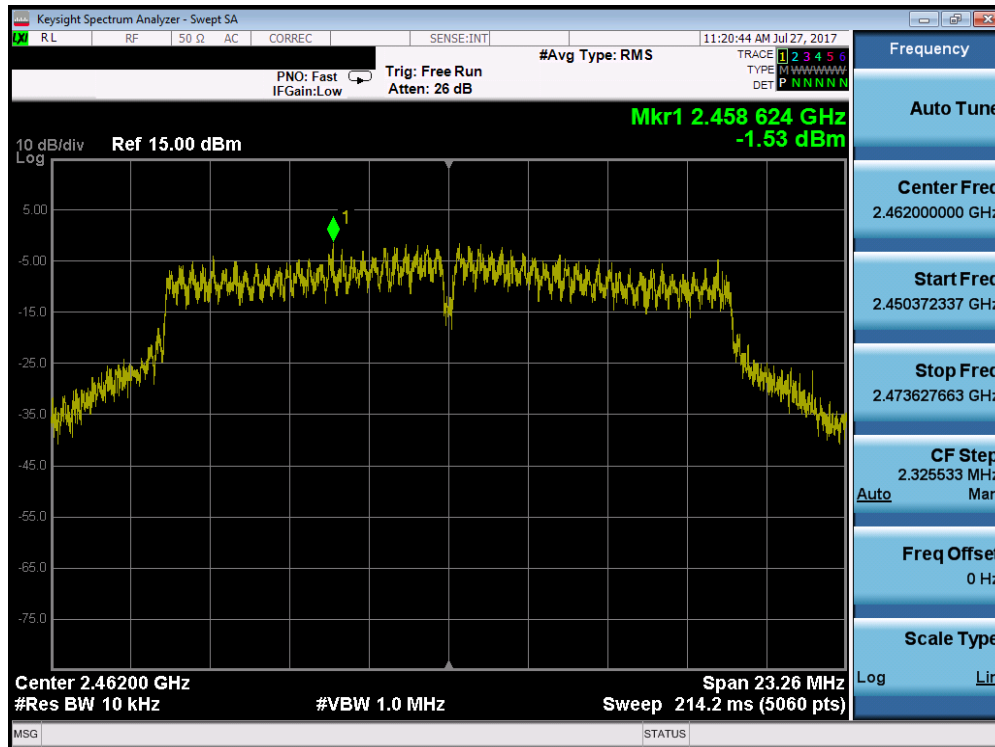


Plot 7-33. Power Spectral Density Plot (802.11g – Ch. 11)

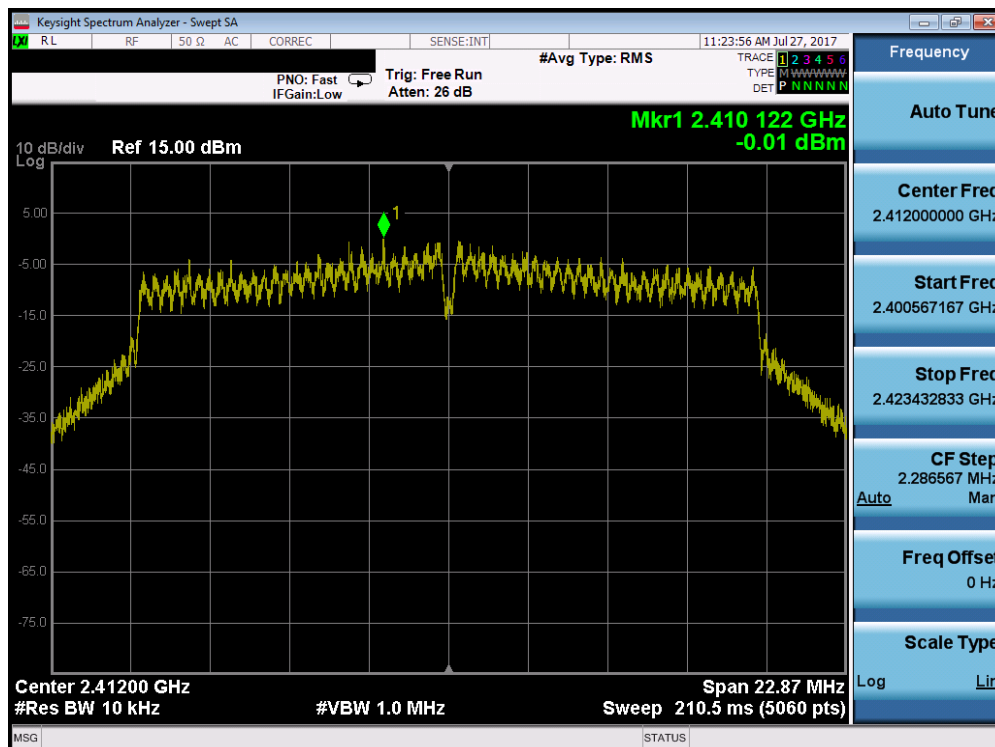


Plot 7-34. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 1)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 37 of 125

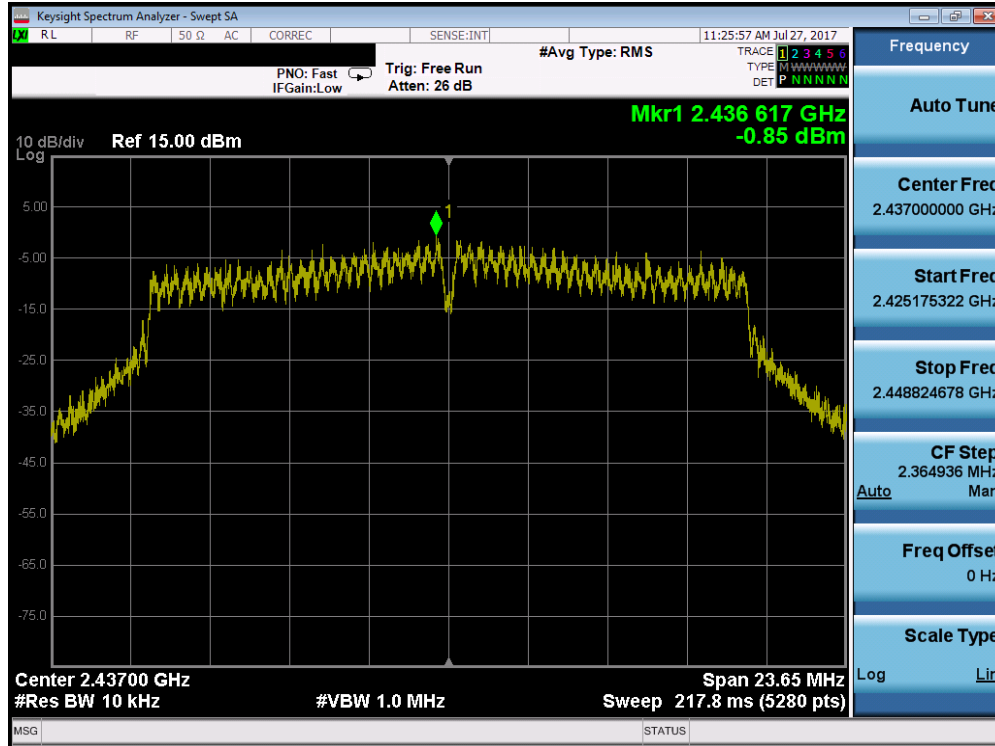

Plot 7-35. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 6)

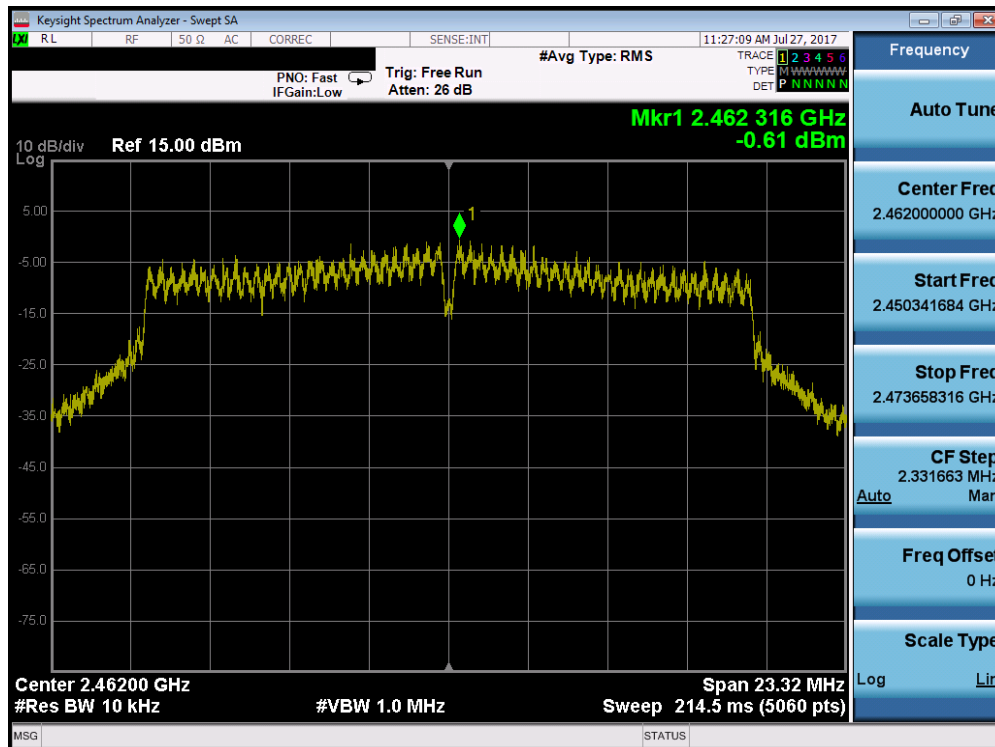

Plot 7-36. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 11)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 38 of 125

MIMO Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	ANT 1 Power Spectral Density [dBm]	ANT 2 Power Spectral Density [dBm]	Summed MIMO Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	n	6.5/7.2 (MCS0)	-0.85	-0.01	2.60	8.00	-5.40	Pass
2437	6	n	6.5/7.2 (MCS0)	0.07	-0.85	2.64	8.00	-5.36	Pass
2462	11	n	6.5/7.2 (MCS0)	0.71	-0.61	3.11	8.00	-4.89	Pass

Table 7-9.MIMO Conducted Power Density Measurements

Note:

Per KDB 662911 D01 v02r01 Section E)2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted power spectral density was measured to be -0.85 dBm for Antenna-1 and -0.01 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(-0.85 \text{ dBm} + -0.01 \text{ dBm}) = (0.82 \text{ mW} + 1.00 \text{ mW}) = 1.82 \text{ mW} = 2.60 \text{ dBm}$$

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 39 of 125

7.5 Conducted Emissions at the Band Edge

§15.247(d)

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, and 6.5/7.2Mbps for “n” mode as these settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).

Test Procedure Used

KDB 558074 D01 v04 – Section 11.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 40 of 125

Antenna-1 Conducted Emissions at the Band Edge




Plot 7-37. Band Edge Plot (802.11b – Ch. 1)

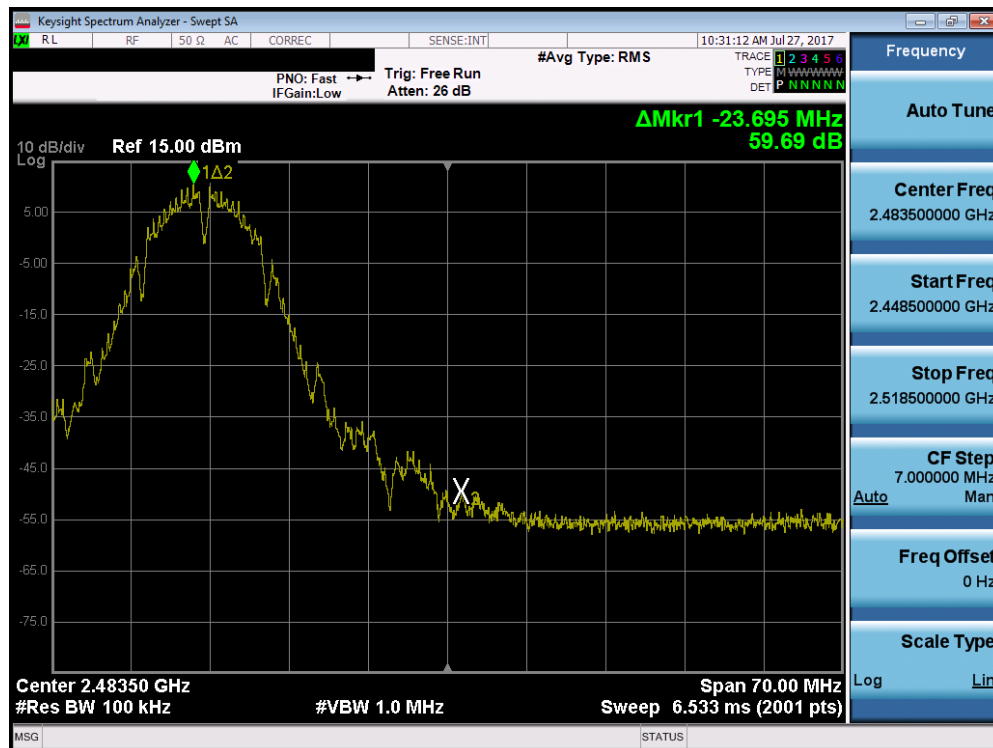


Plot 7-38. Band Edge Plot (802.11b – Ch. 11)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 41 of 125

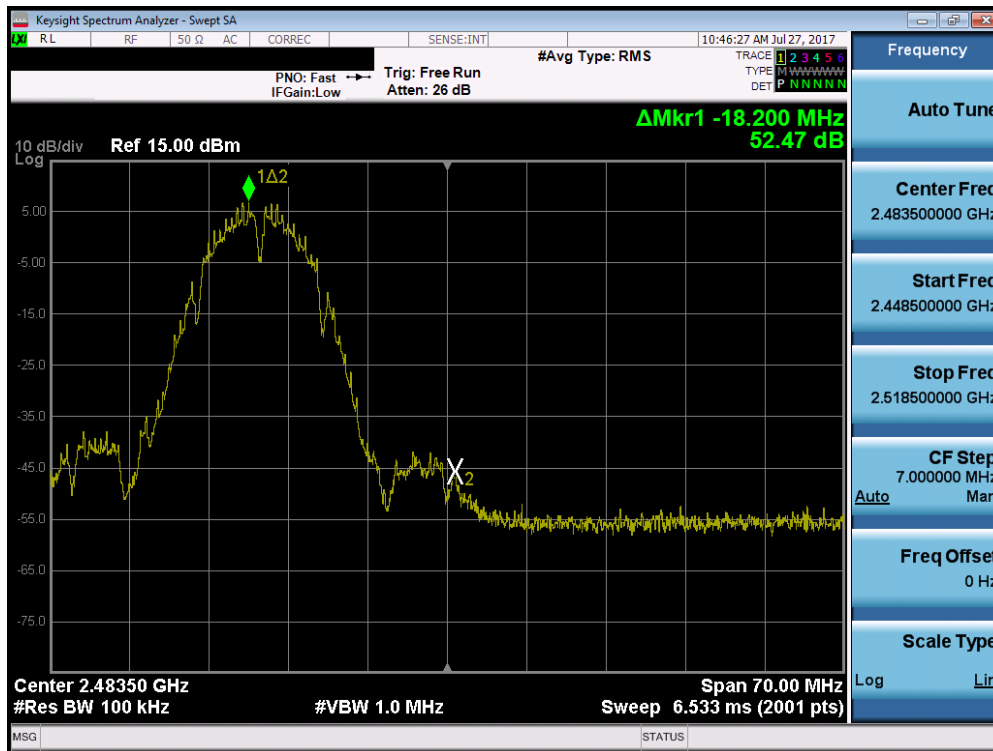


Plot 7-39. Band Edge Plot (802.11b – Ch. 12)

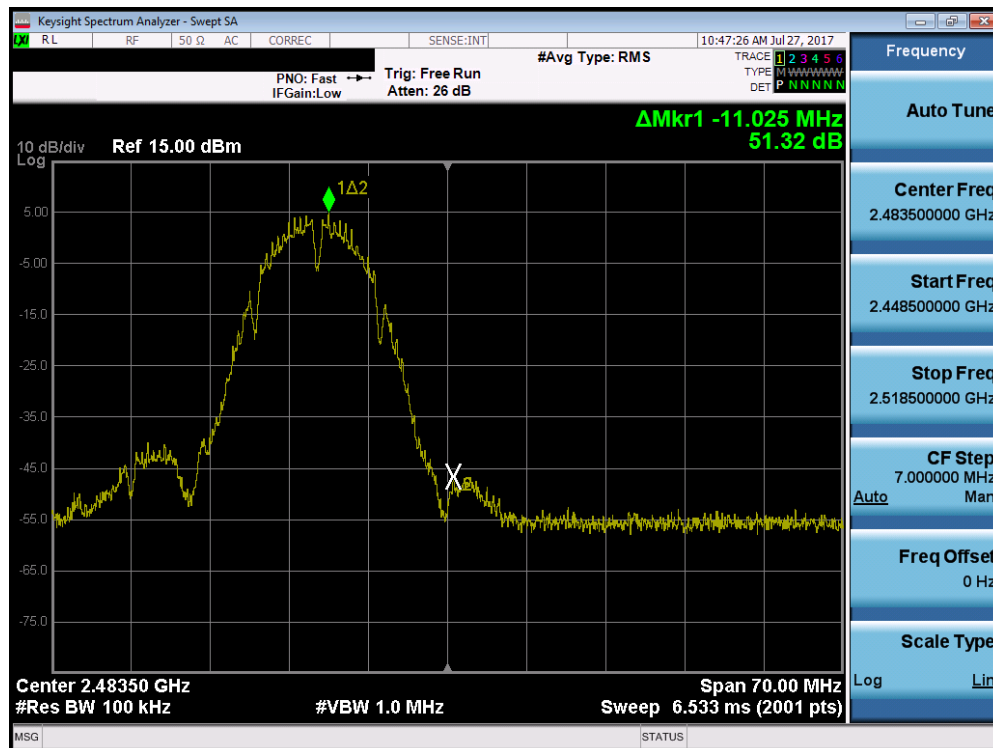


Plot 7-40. Band Edge Plot (802.11b – Ch. 13)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 42 of 125

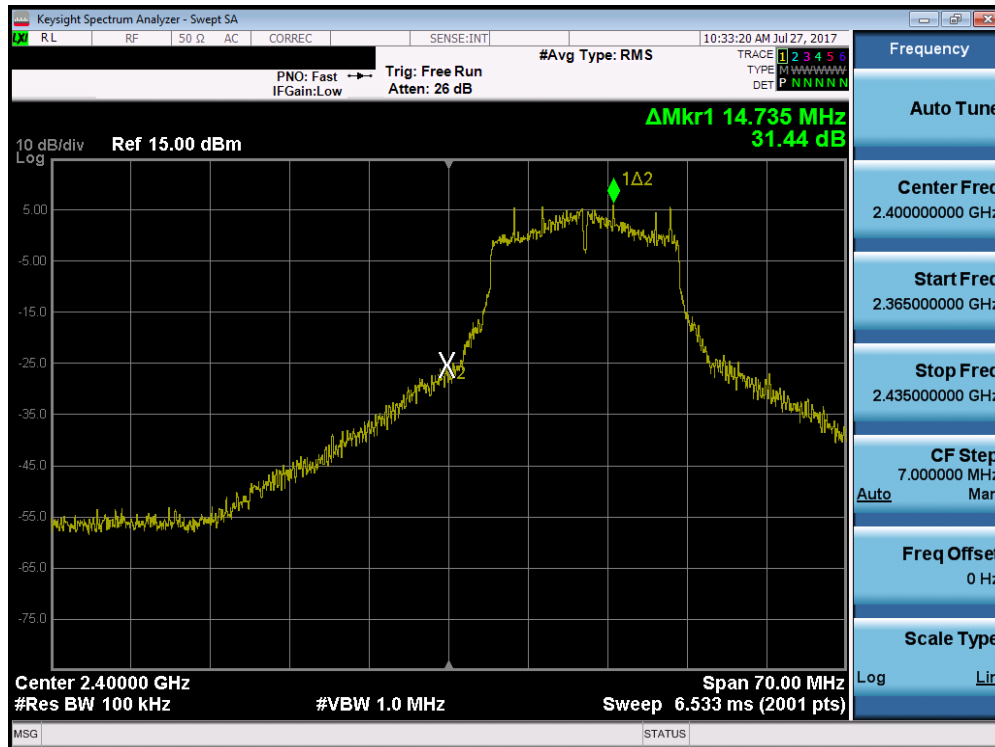

Plot 7-41. Band Edge Plot (802.11g– Ch. 1)

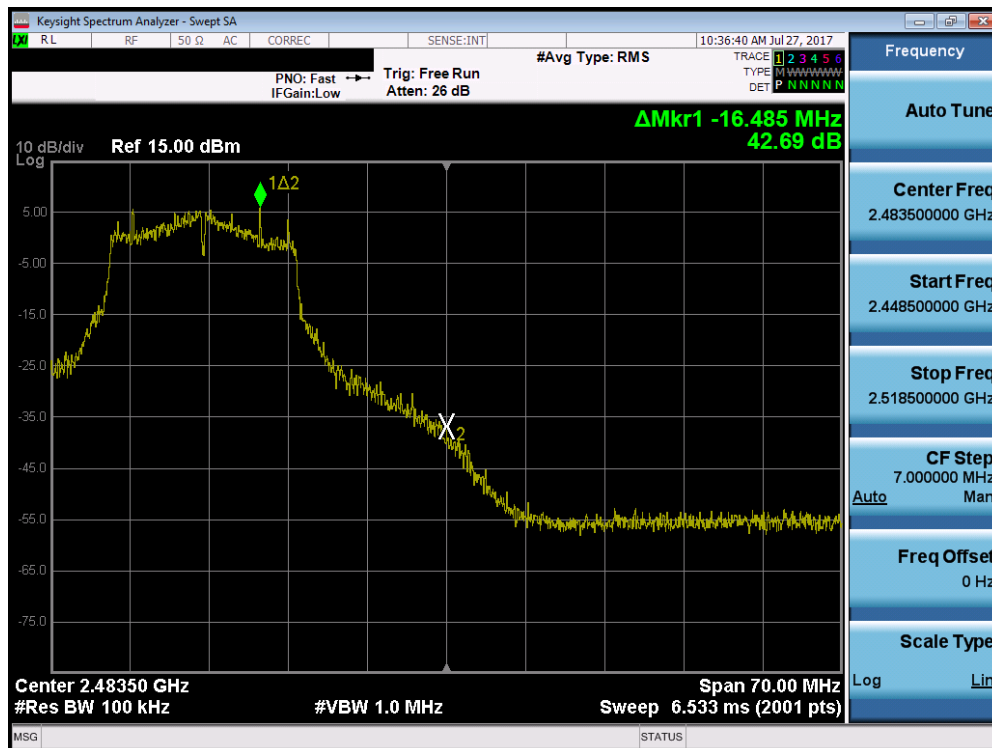


Plot 7-42. Band Edge Plot (802.11g – Ch. 11)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 43 of 125




Plot 7-43. Band Edge Plot (802.11g – Ch. 12)

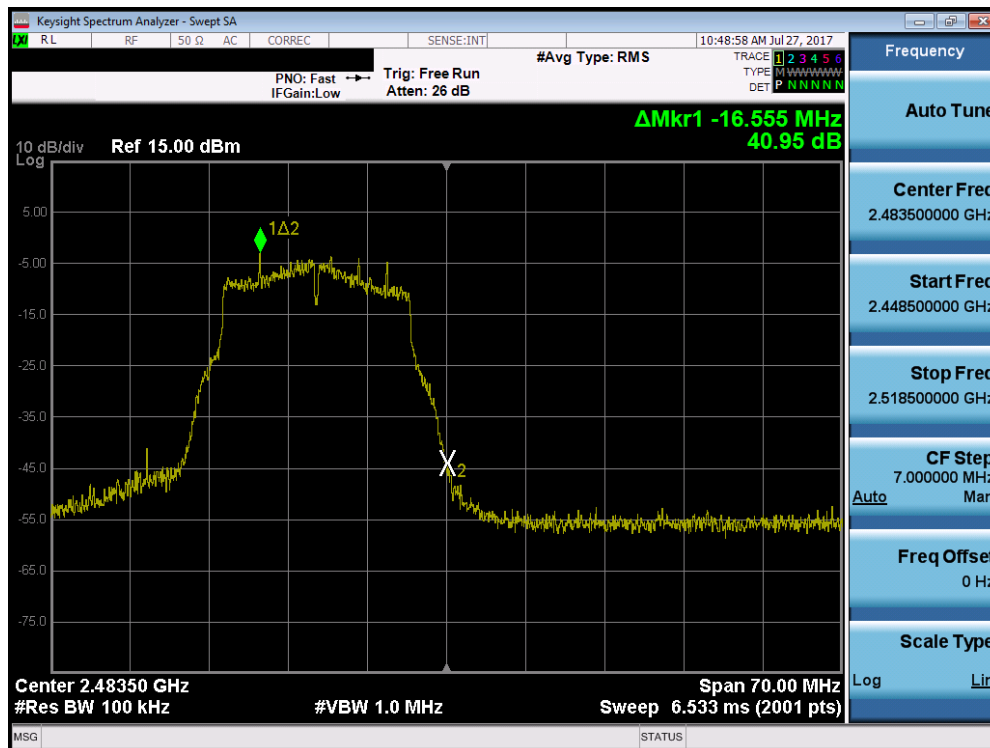


Plot 7-44. Band Edge Plot (802.11g – Ch. 13)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 44 of 125

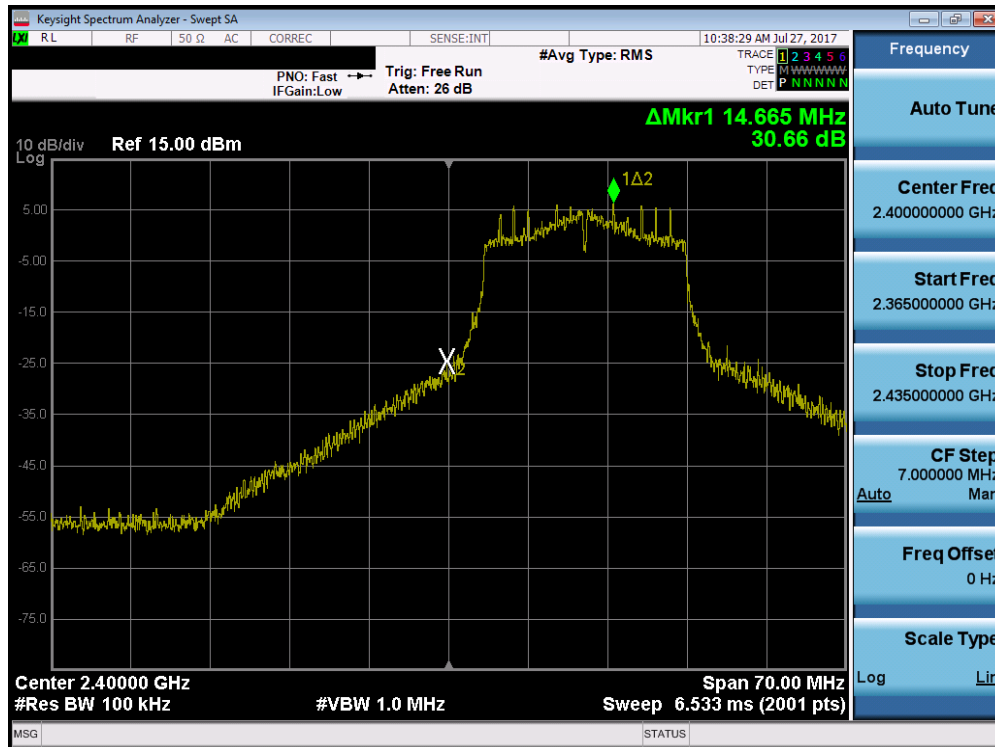


Plot 7-45. Band Edge Plot (802.11n (2.4GHz) – Ch. 1)

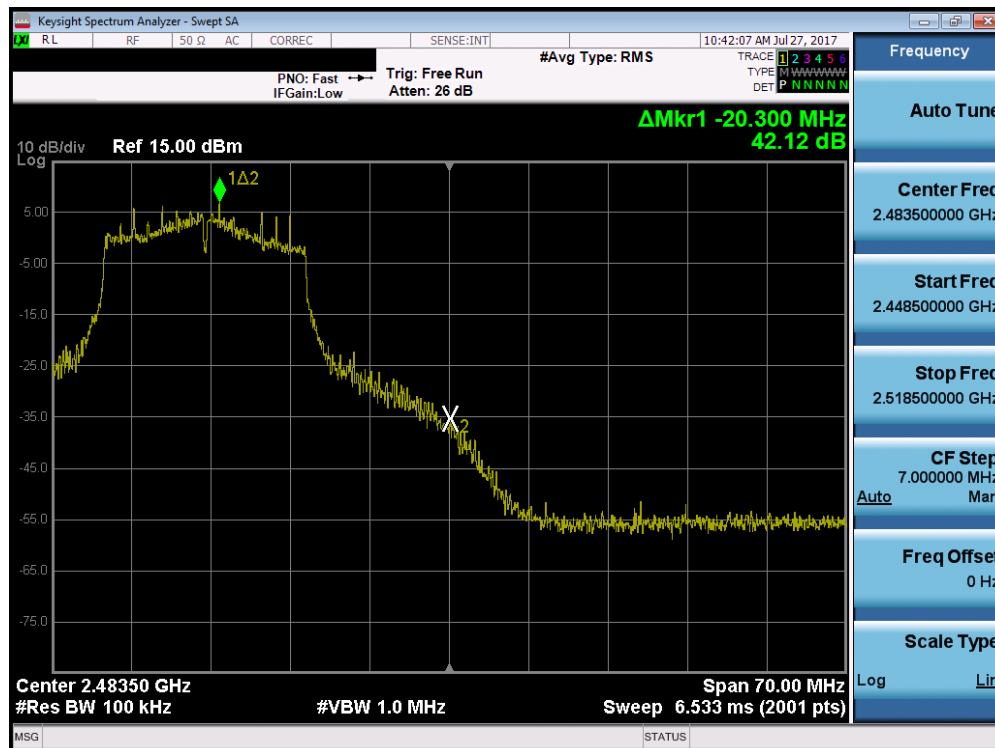


Plot 7-46. Band Edge Plot (802.11n (2.4GHz) – Ch. 11)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 45 of 125

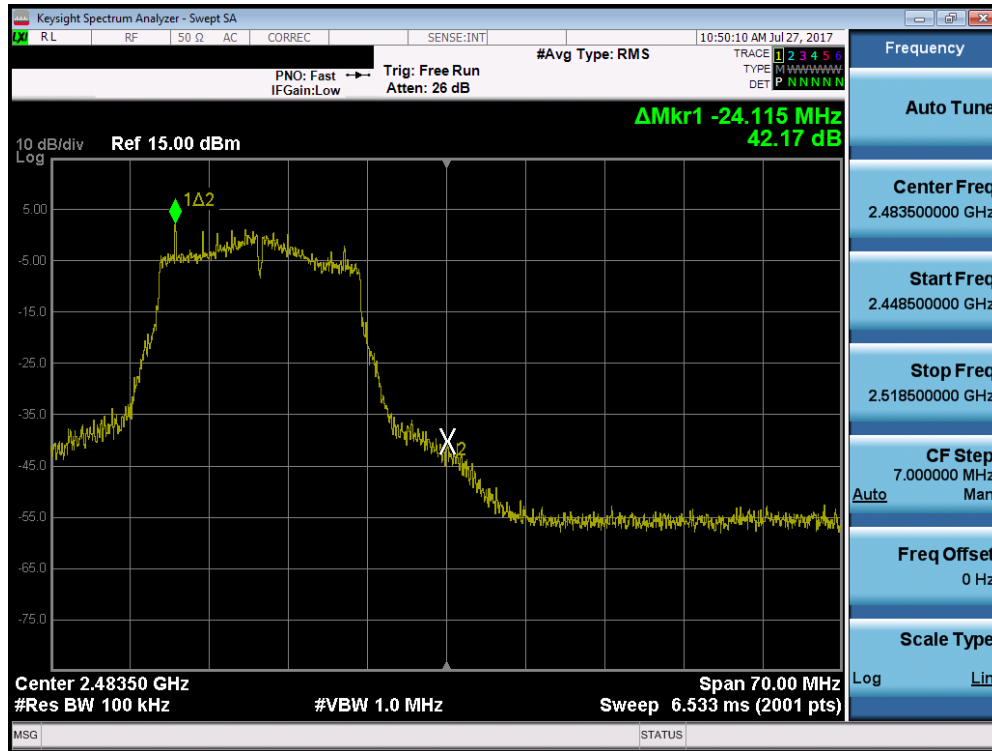


Plot 7-47. Band Edge Plot (802.11n (2.4GHz) – Ch. 12)

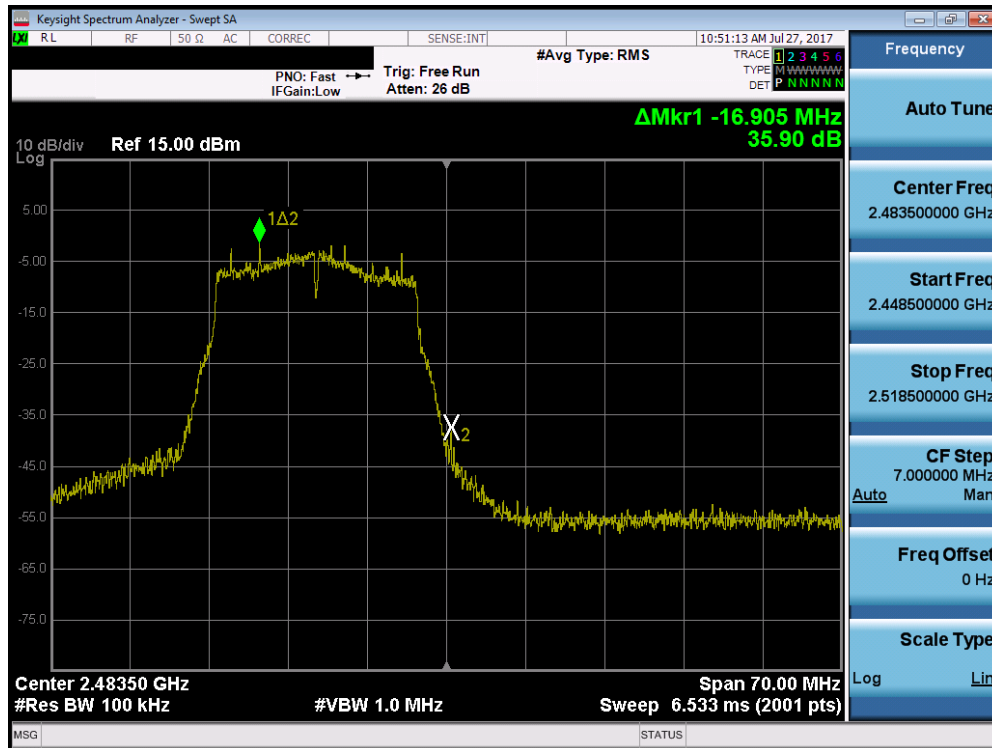


Plot 7-48. Band Edge Plot (802.11n (2.4GHz) – Ch. 13)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 46 of 125

Antenna-2 Conducted Emissions at the Band Edge

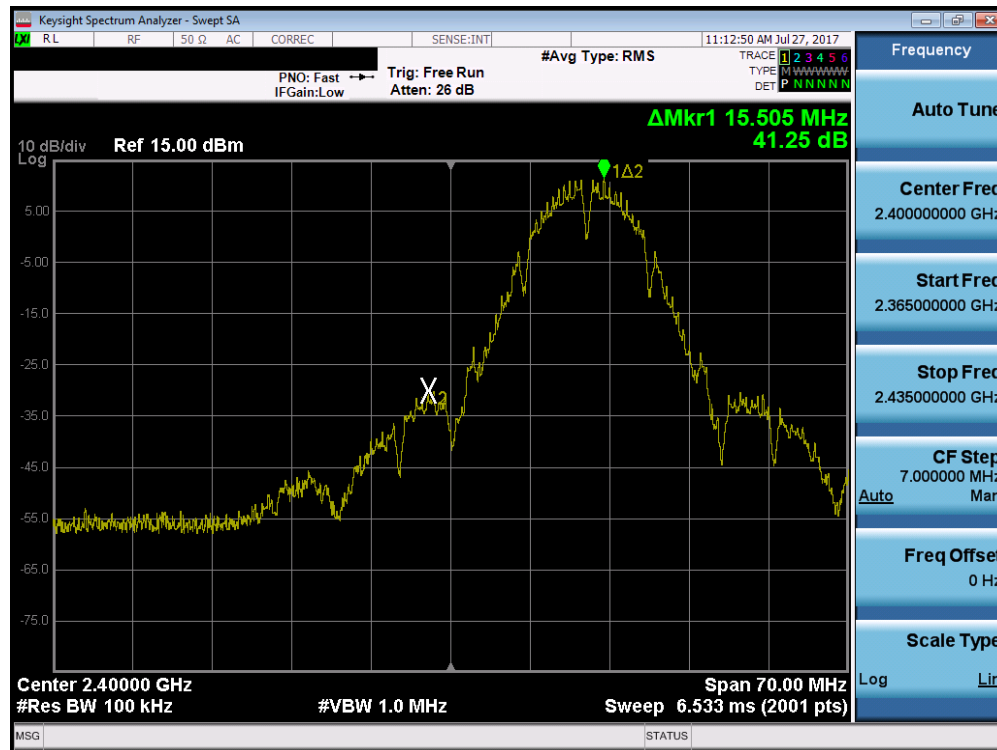


Plot 7-49. Band Edge Plot (802.11b – Ch. 1)

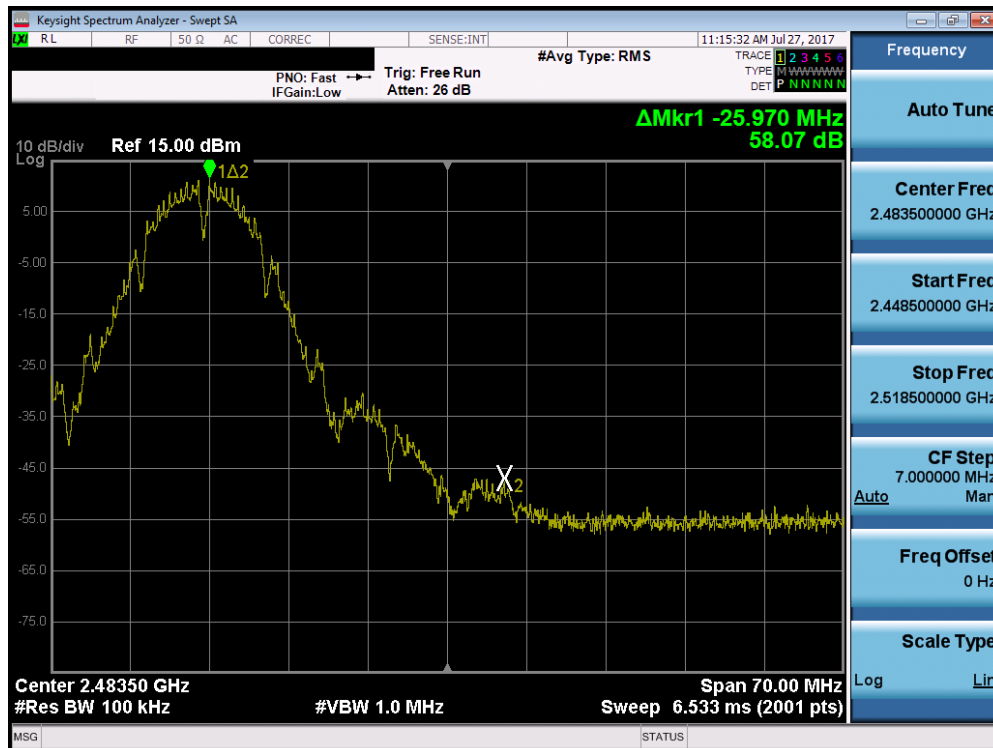


Plot 7-50. Band Edge Plot (802.11b – Ch. 11)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 47 of 125

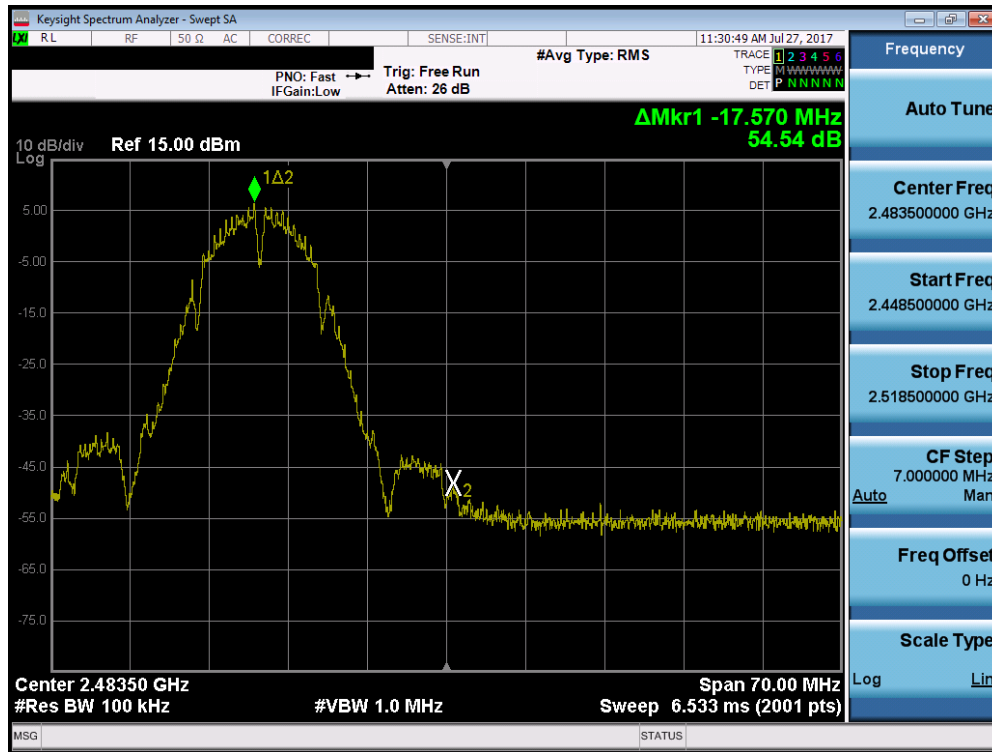


Plot 7-51. Band Edge Plot (802.11b – Ch. 12)

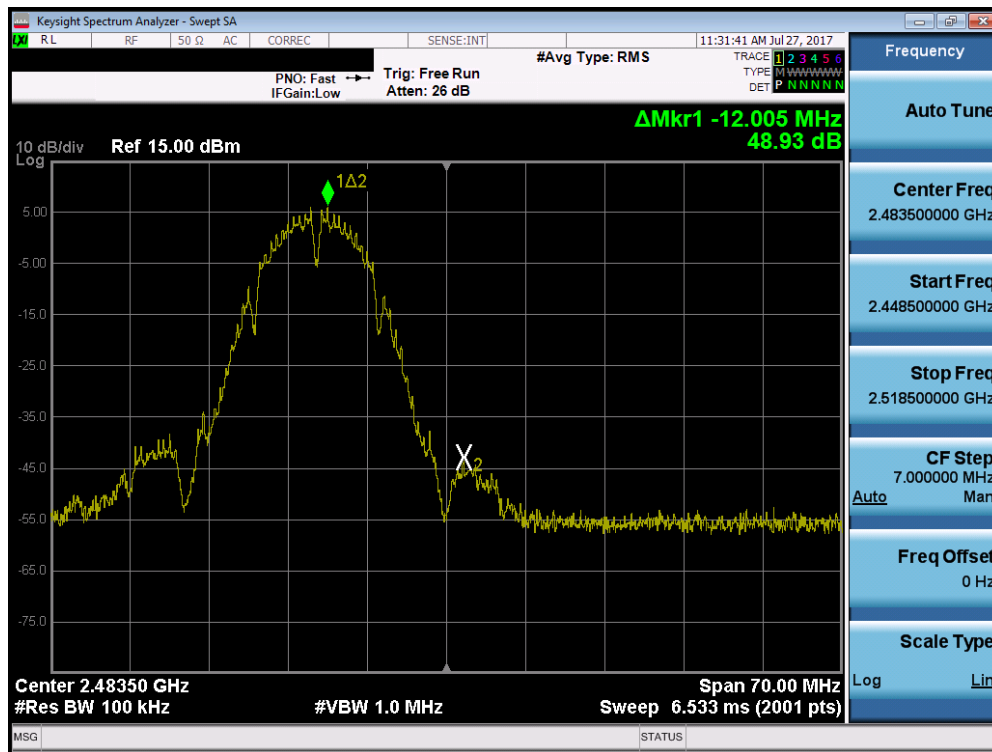


Plot 7-52. Band Edge Plot (802.11b – Ch. 13)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 48 of 125

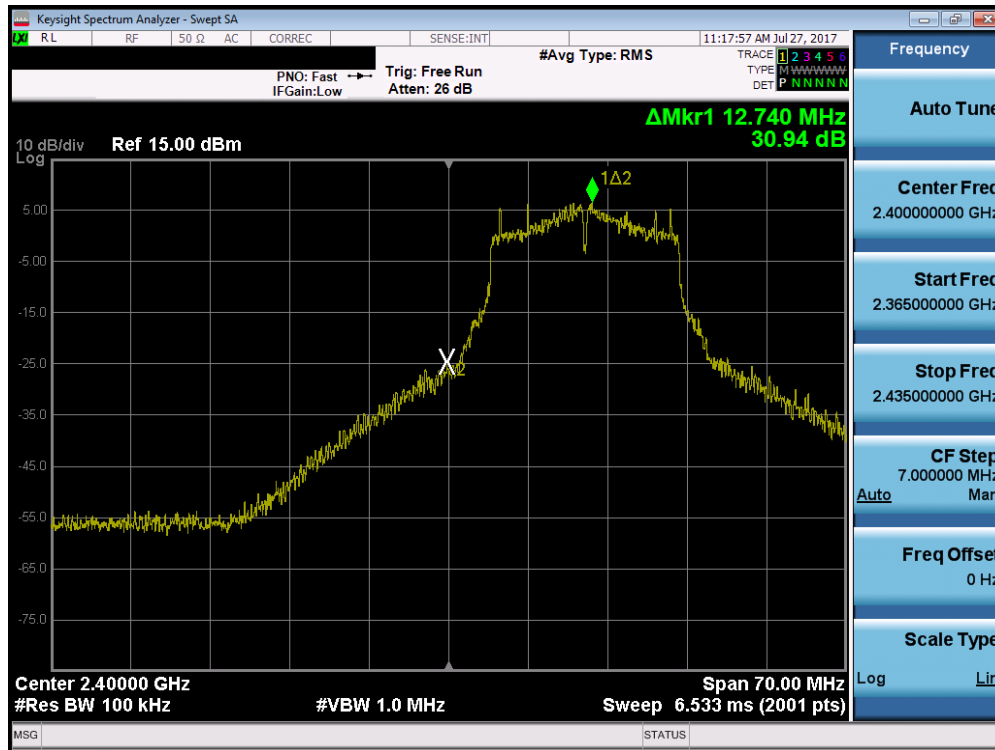


Plot 7-53. Band Edge Plot (802.11g– Ch. 1)

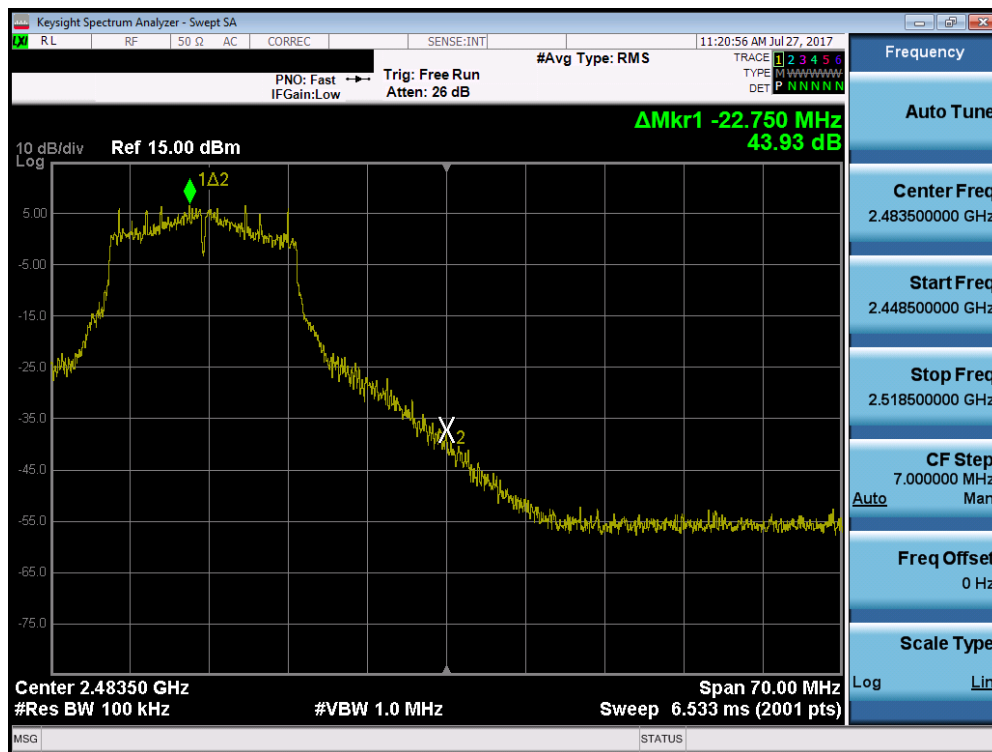


Plot 7-54. Band Edge Plot (802.11g – Ch. 11)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 49 of 125

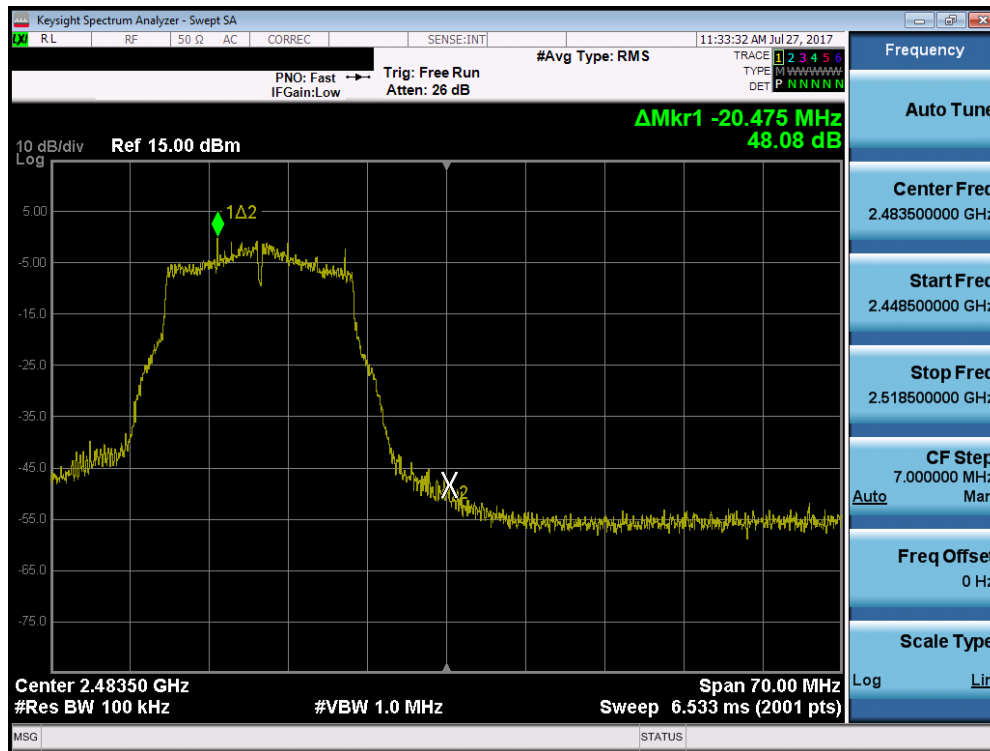


Plot 7-55. Band Edge Plot (802.11g – Ch. 12)

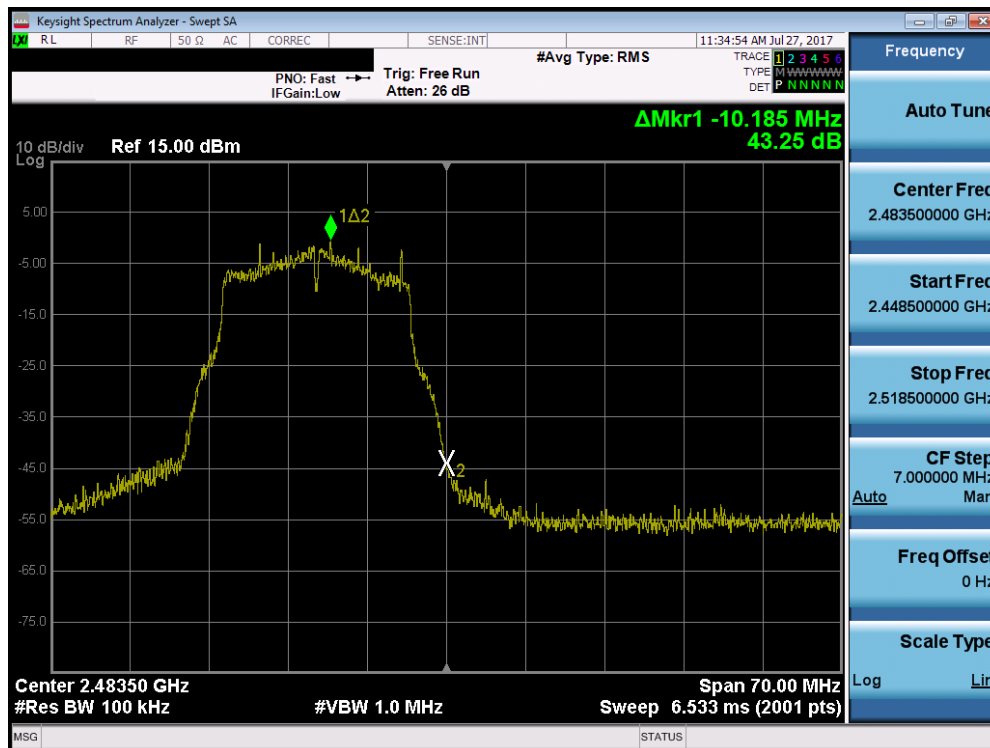


Plot 7-56. Band Edge Plot (802.11g – Ch. 13)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 50 of 125

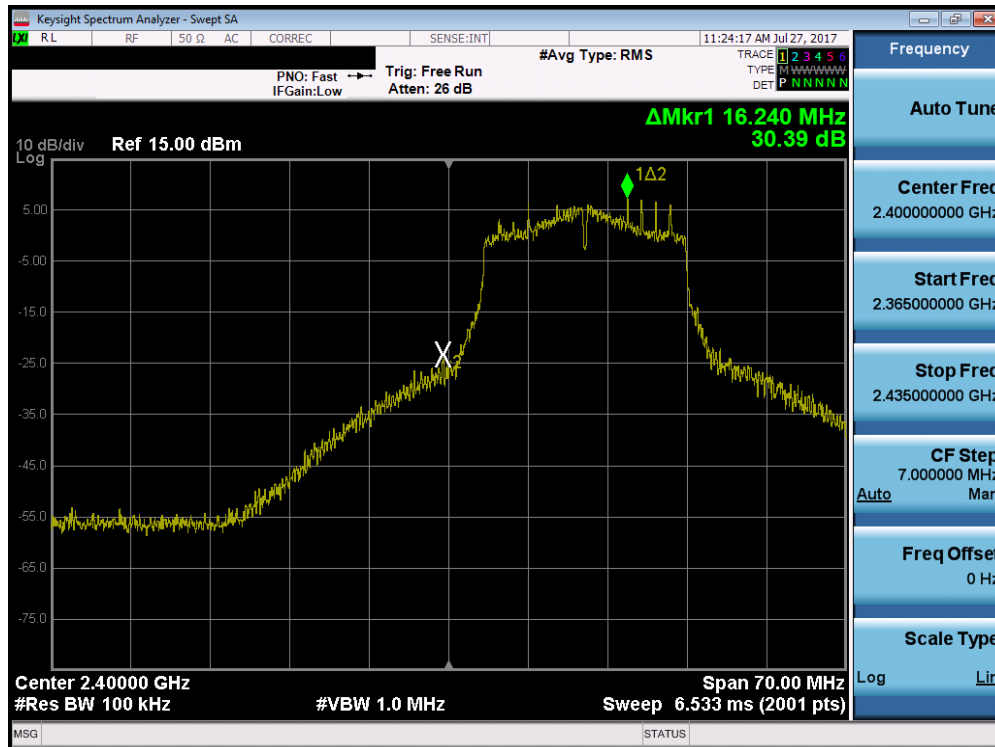


Plot 7-57. Band Edge Plot (802.11n (2.4GHz) – Ch. 1)

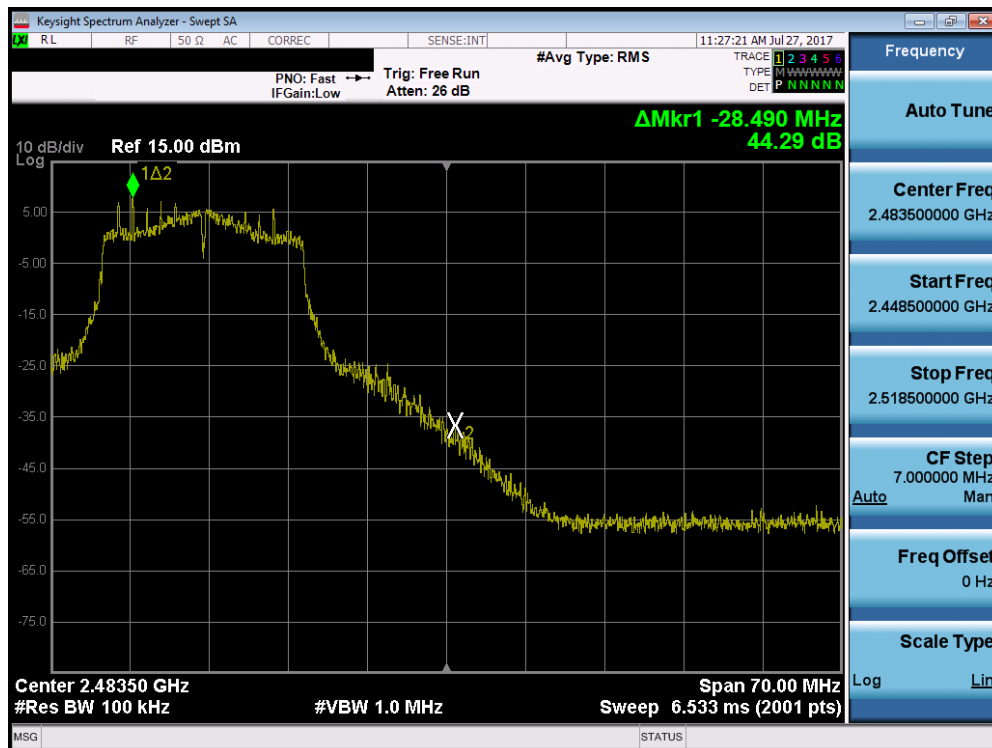


Plot 7-58. Band Edge Plot (802.11n (2.4GHz) – Ch. 11)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 51 of 125

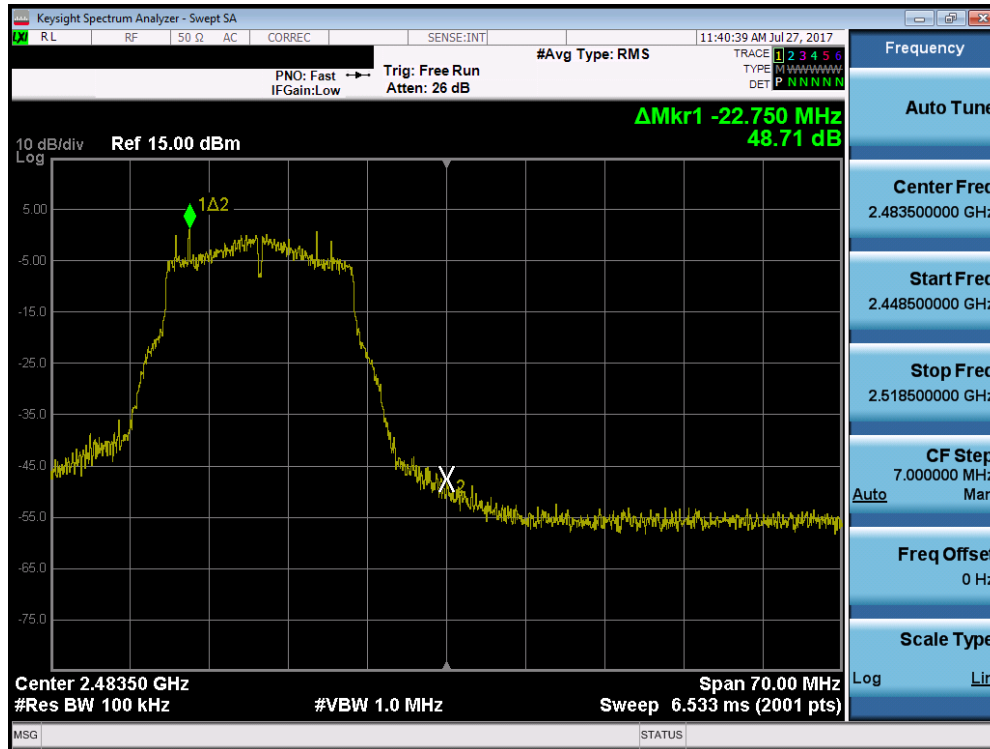

Plot 7-59. Band Edge Plot (802.11n (2.4GHz) – Ch. 12)

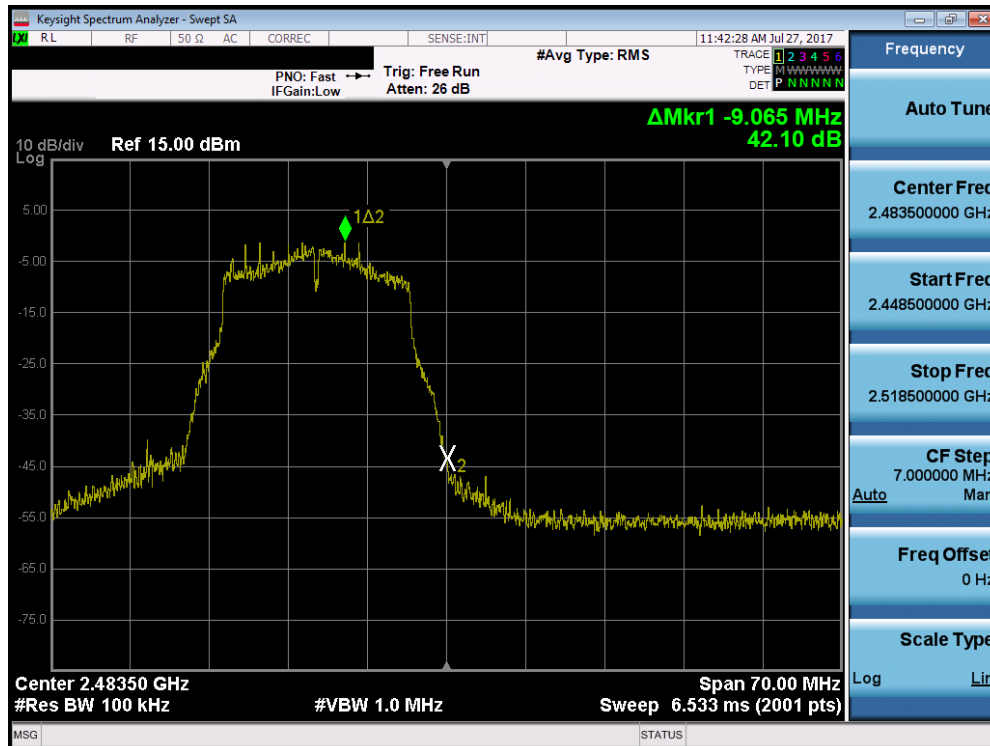

Plot 7-60. Band Edge Plot (802.11n (2.4GHz) – Ch. 13)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 52 of 125

7.6 Conducted Spurious Emissions

§15.247(d)

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for “b”, “g”, and “n” modes. The worst case spurious emissions for the 2.4GHz band were found while transmitting in “b” mode at 1 Mbps and are shown in the plots below.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.1 of KDB 558074 D01 v04.

Test Procedure Used

KDB 558074 D01 v04 – Section 11.3

KDB 662911 D01 v02r01 – Section E)3)b)

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-5. Test Instrument & Measurement Setup


FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 53 of 125

Test Notes


1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The conducted spurious emissions were measured to relative limits. Therefore, in accordance with KDB 662911 D01 v02r01 Section E)3)b), it was unnecessary to show compliance through the summation of test results of the individual outputs.

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 54 of 125

Antenna-1 Conducted Spurious Emission

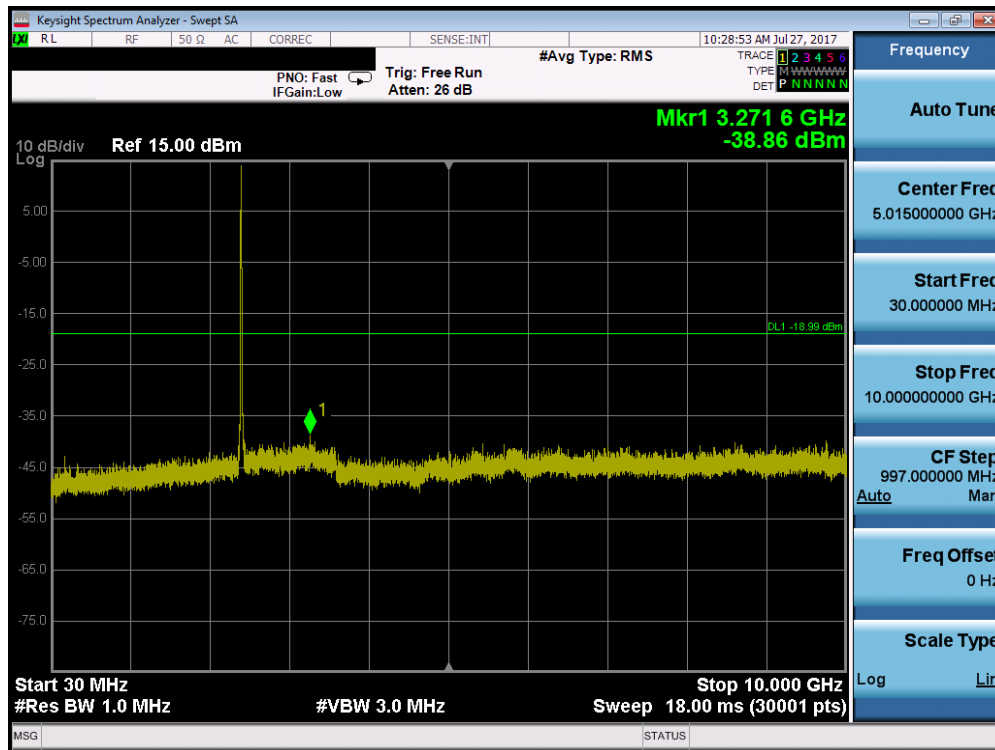


Plot 7-61. Conducted Spurious Plot (802.11b – Ch. 1)

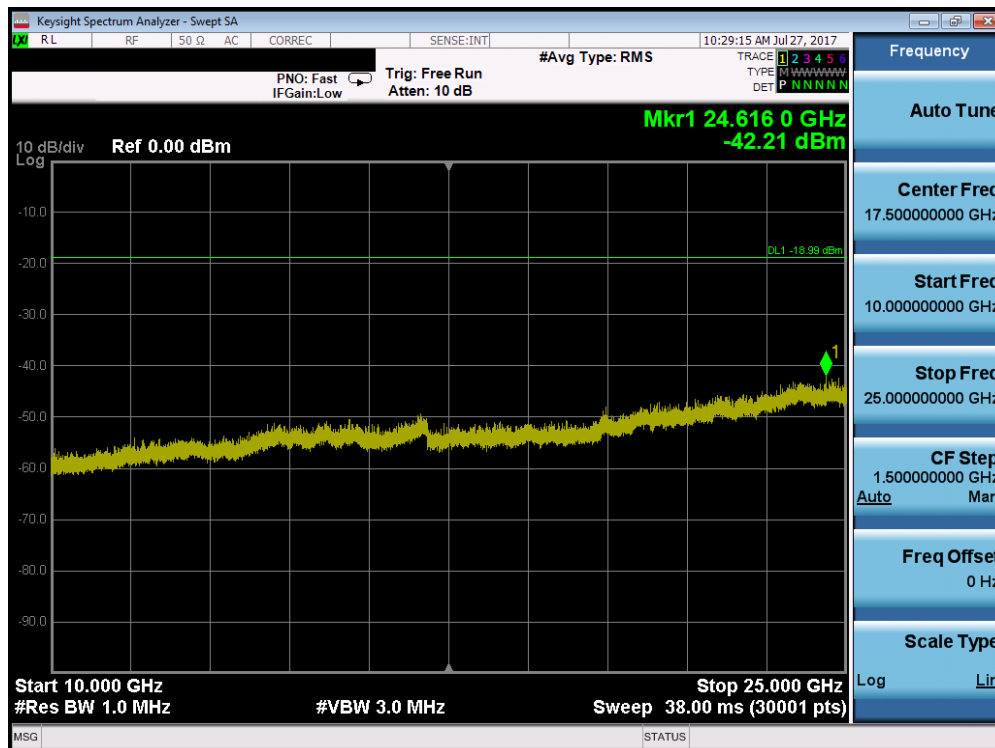


Plot 7-62. Conducted Spurious Plot (802.11b – Ch. 1)

FCC ID: A3LSC01K	 FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 55 of 125

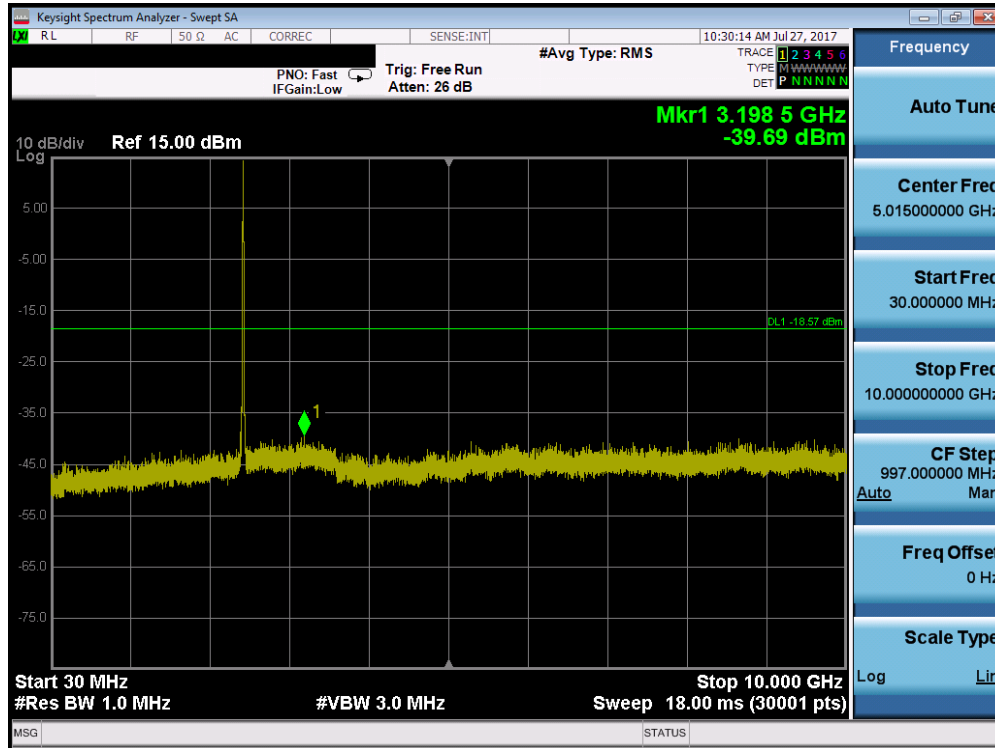


Plot 7-63. Conducted Spurious Plot (802.11b – Ch. 6)

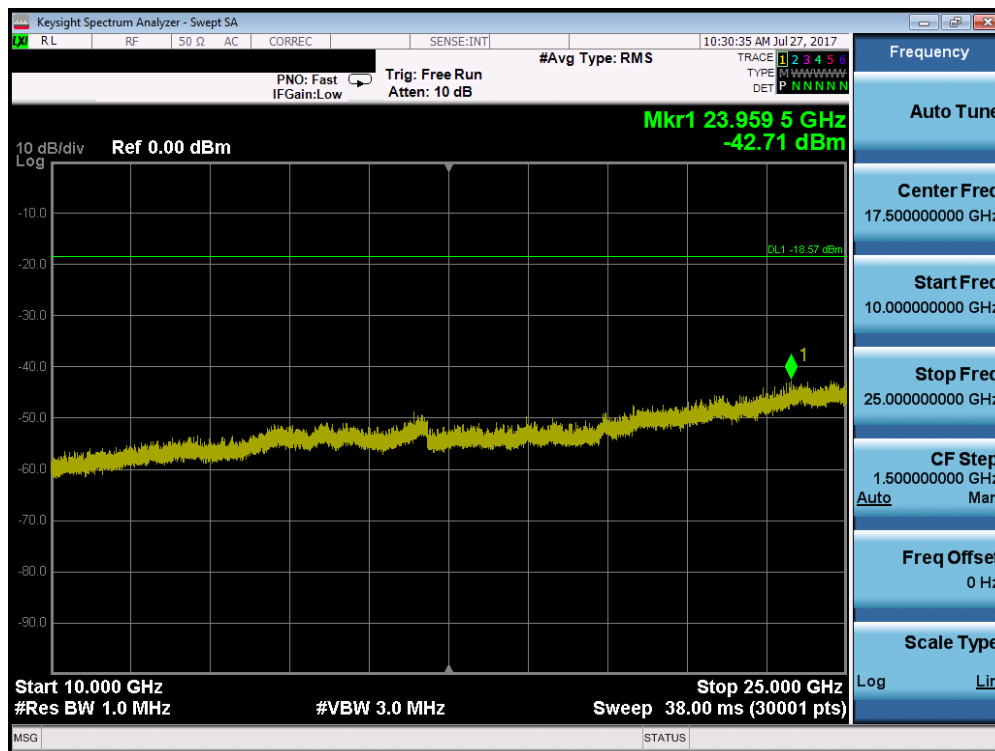


Plot 7-64. Conducted Spurious Plot (802.11b – Ch. 6)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 56 of 125

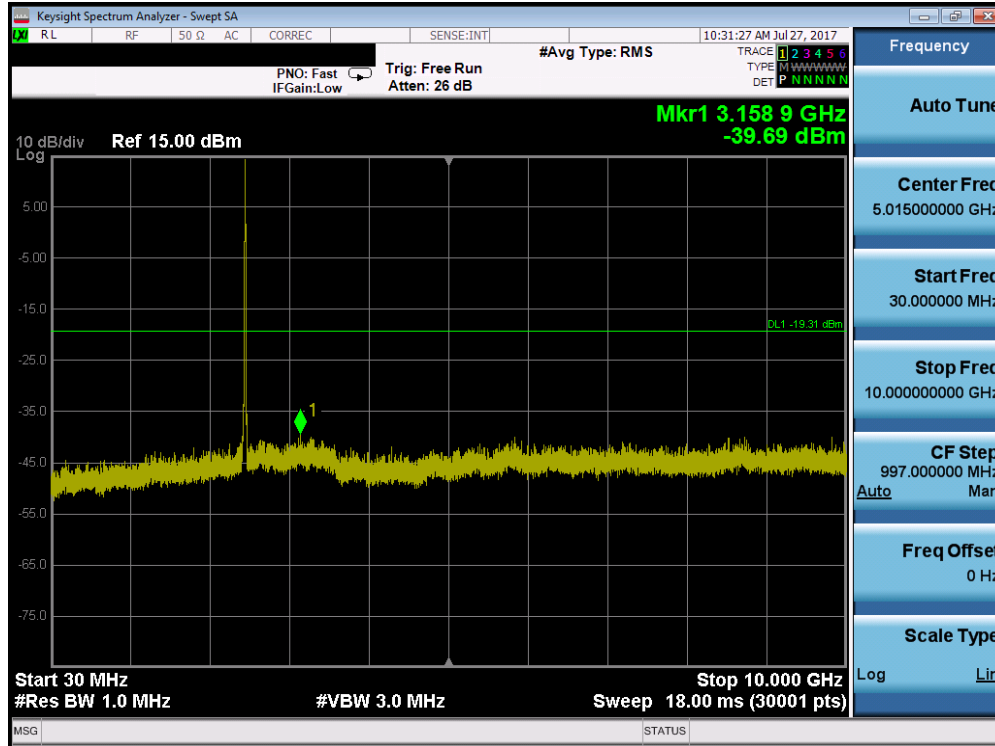


Plot 7-65. Conducted Spurious Plot (802.11b – Ch. 11)

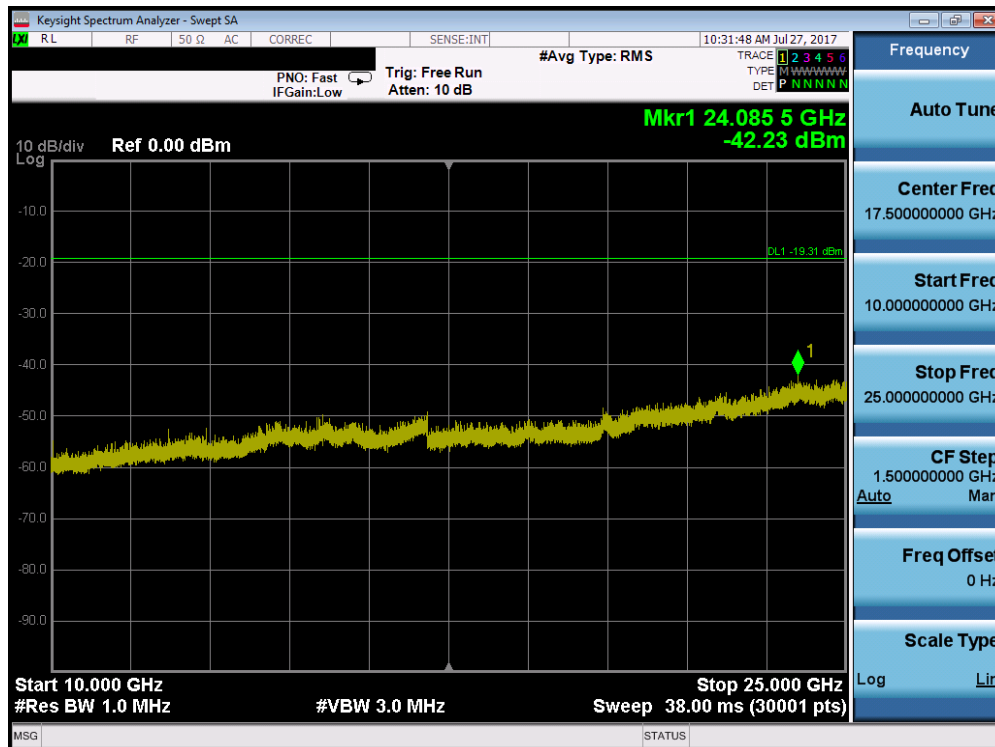


Plot 7-66. Conducted Spurious Plot (802.11b – Ch. 11)

FCC ID: A3LSC01K			FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset	Page 57 of 125		

Antenna-2 Conducted Spurious Emissions

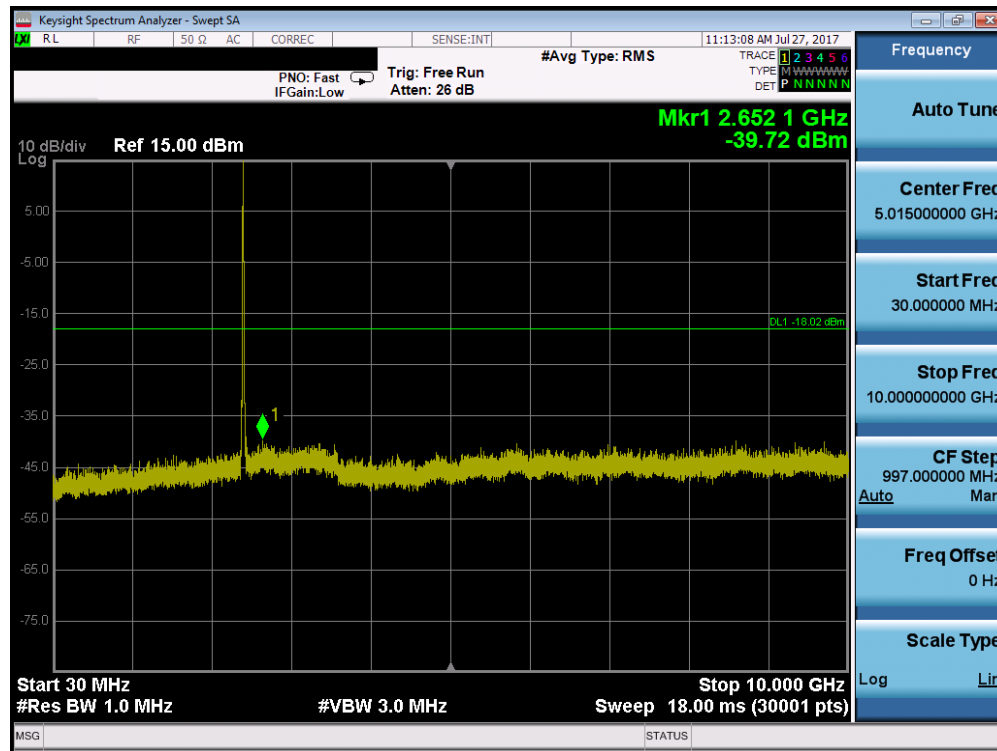


Plot 7-67. Conducted Spurious Plot (802.11b – Ch. 1)

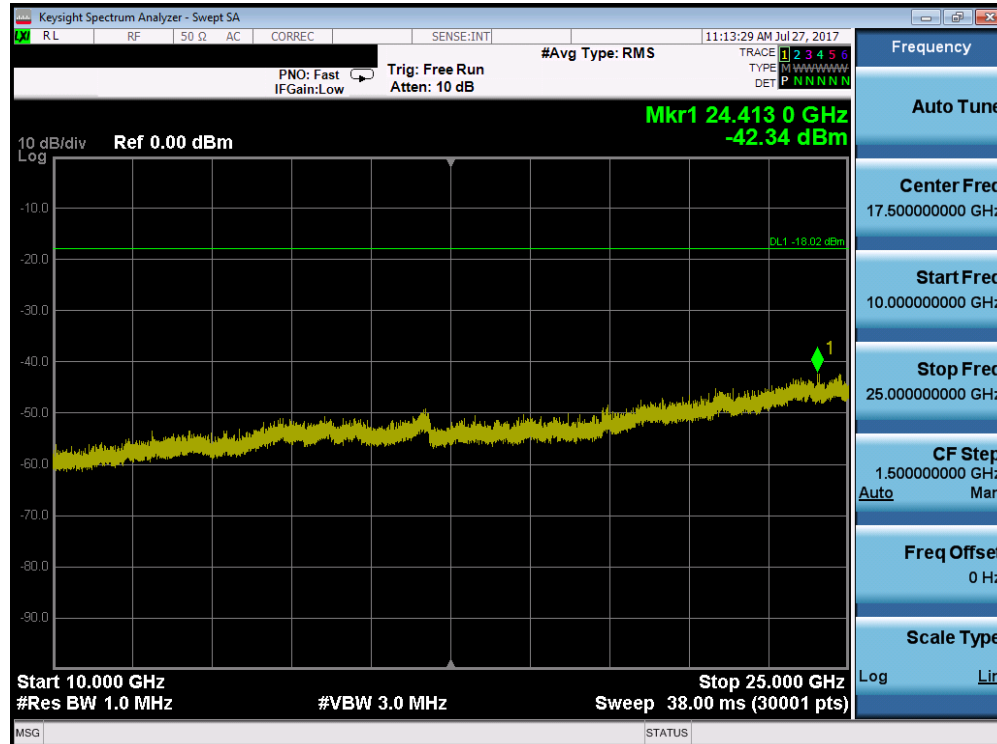


Plot 7-68. Conducted Spurious Plot (802.11b – Ch. 1)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 58 of 125

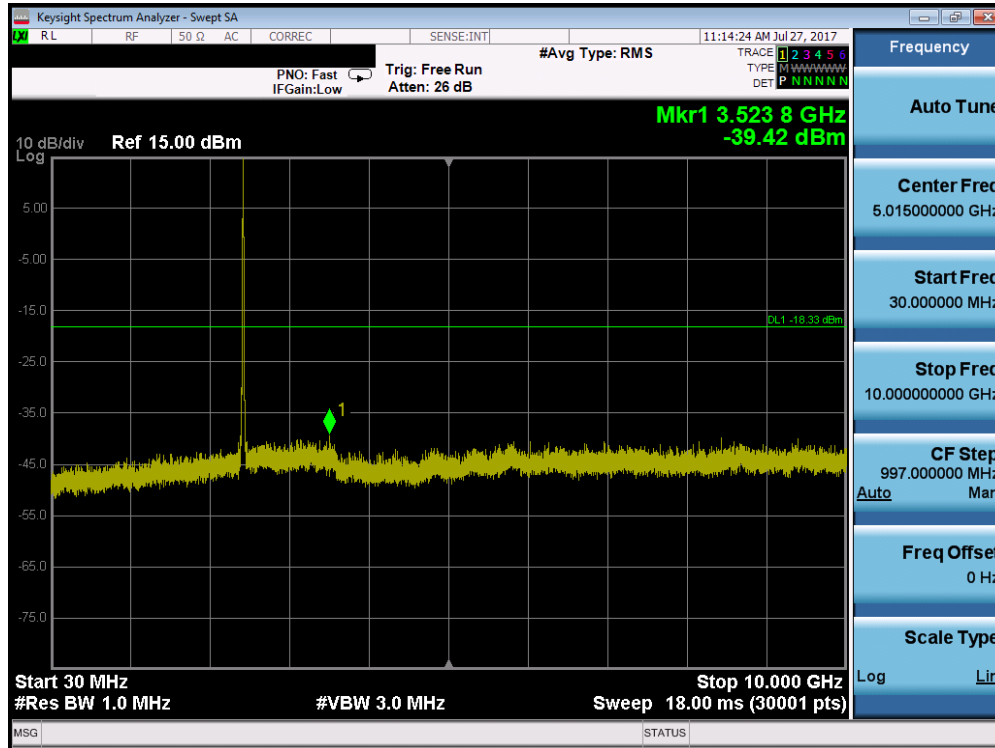


Plot 7-69. Conducted Spurious Plot (802.11b – Ch. 6)

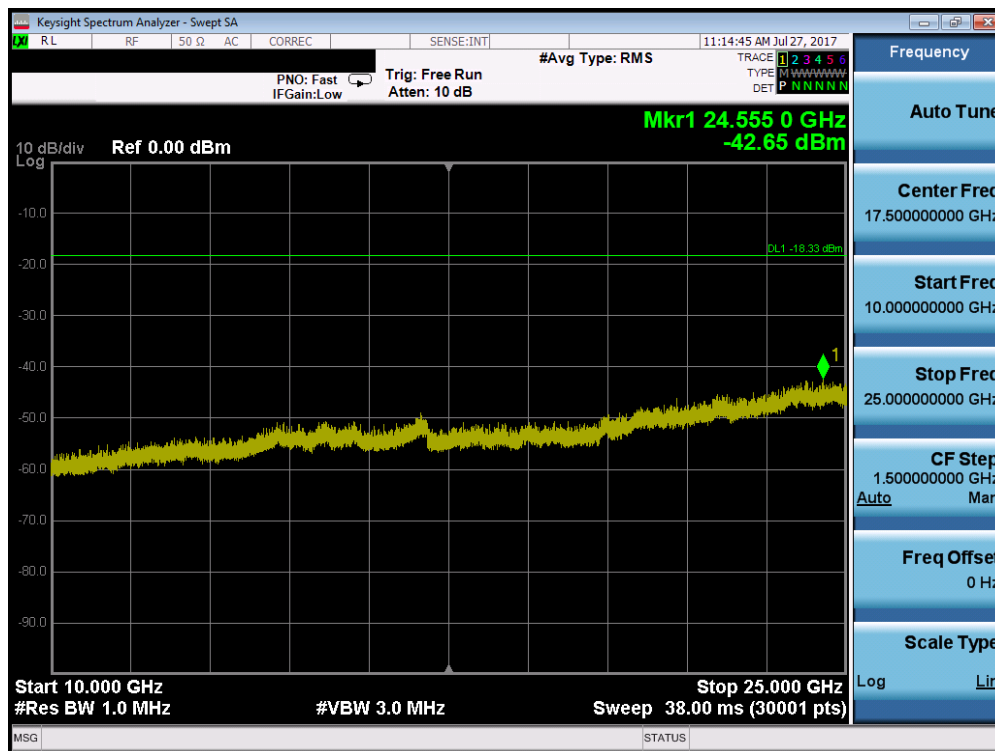


Plot 7-70. Conducted Spurious Plot (802.11b – Ch. 6)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 59 of 125

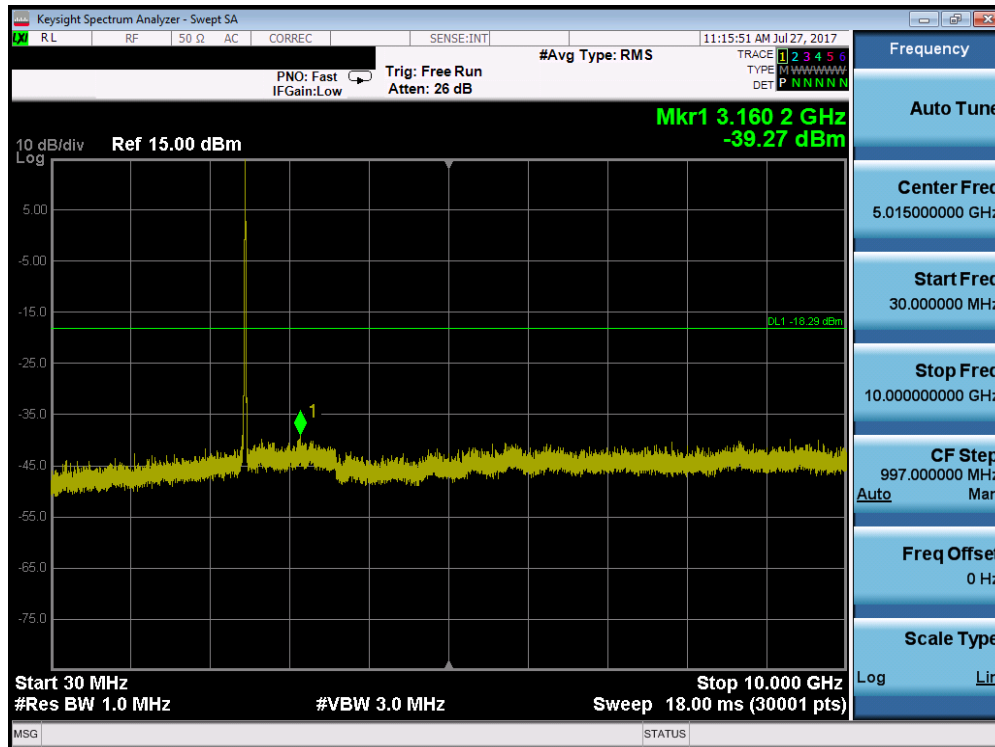

Plot 7-71. Conducted Spurious Plot (802.11b – Ch. 11)

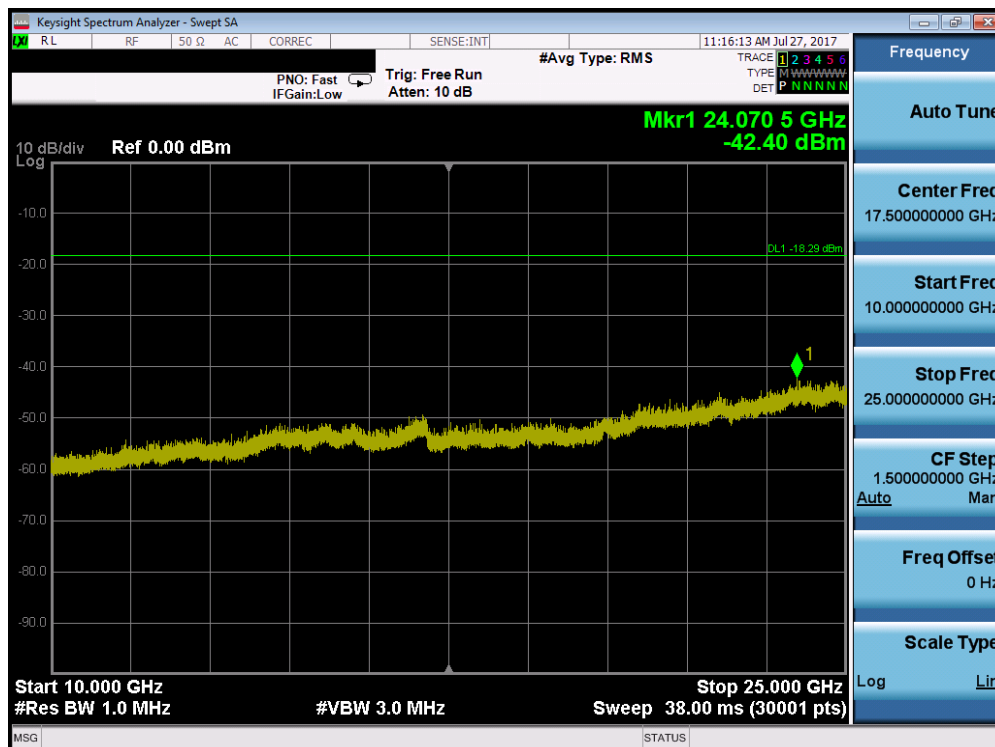

Plot 7-72. Conducted Spurious Plot (802.11b – Ch. 11)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 60 of 125

7.7 Radiated Spurious Emission Measurements – Above 1 GHz

§15.247(d) §15.205 & §15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-10 per Section 15.209.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-10. Radiated Limits

Test Procedures Used

KDB 558074 D01 v04 – Section 12.1, 12.2.7

Test Settings

Average Field Strength Measurements per Section 12.2.5.1 of KDB 558074 D01 v04

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 D01 v04

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 61 of 125

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

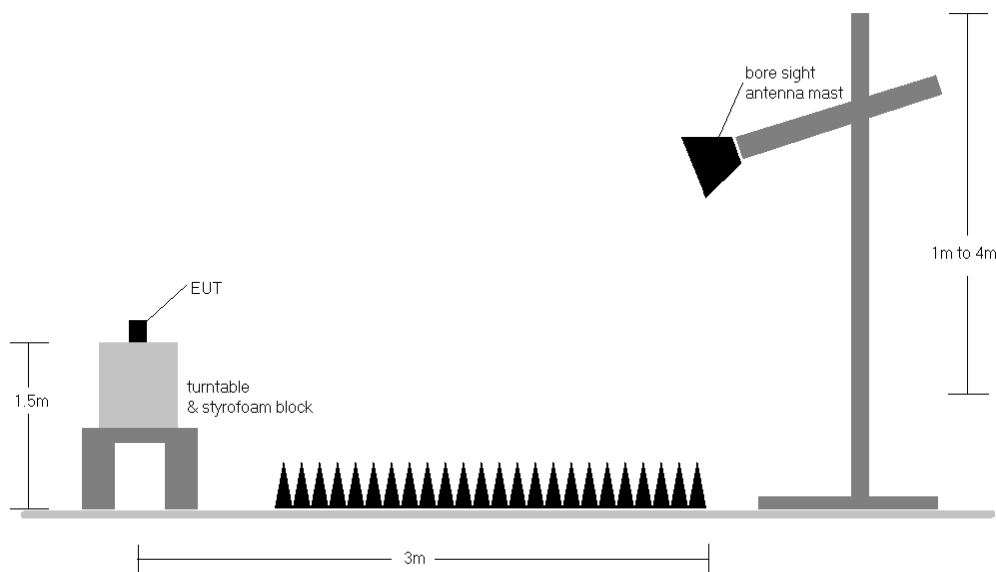


Figure 7-6. Test Instrument & Measurement Setup

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v04 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-10.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst case emissions. Since the emissions

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 62 of 125

produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.

8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section. Rohde & Schwarz EMC32, Version 9.15.00 automated test software was used to perform the Radiated Spurious Emissions Pre-Scan testing.
9. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels

- o Field Strength Level $[\text{dB}\mu\text{V/m}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- o $\text{AFCL} [\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}]$
- o $\text{Margin} [\text{dB}] = \text{Field Strength Level} [\text{dB}\mu\text{V/m}] - \text{Limit} [\text{dB}\mu\text{V/m}]$


Radiated Band Edge Measurement Offset

- o The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain


FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 63 of 125

7.7.1 Antenna-1 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

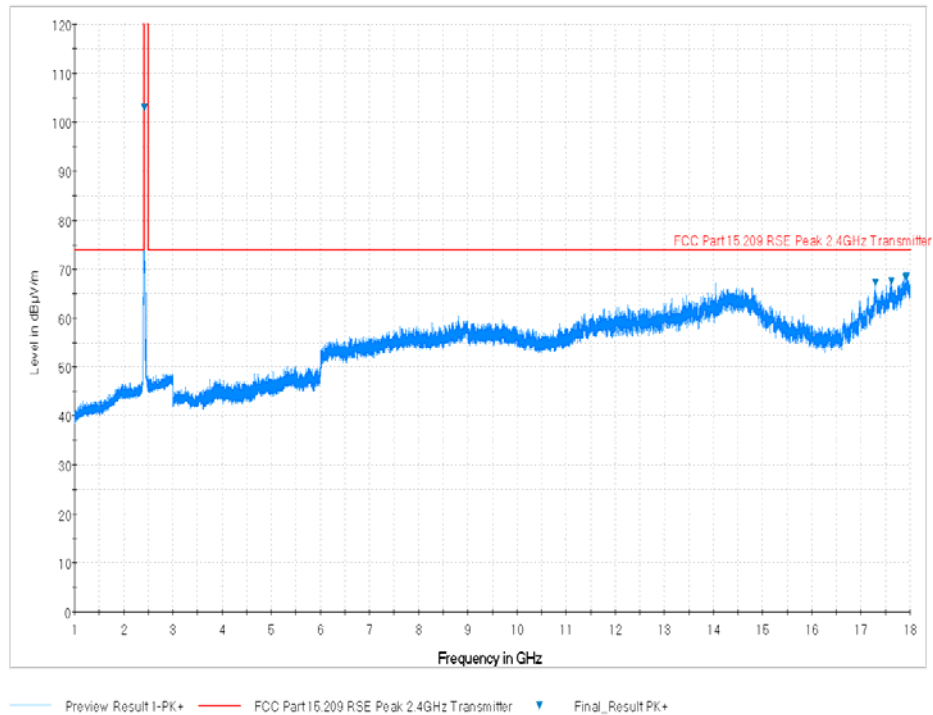


Plot 7-73. Radiated Spurious Plot above 1GHz (802.11b – Ch. 1, Ant. Pol. H)

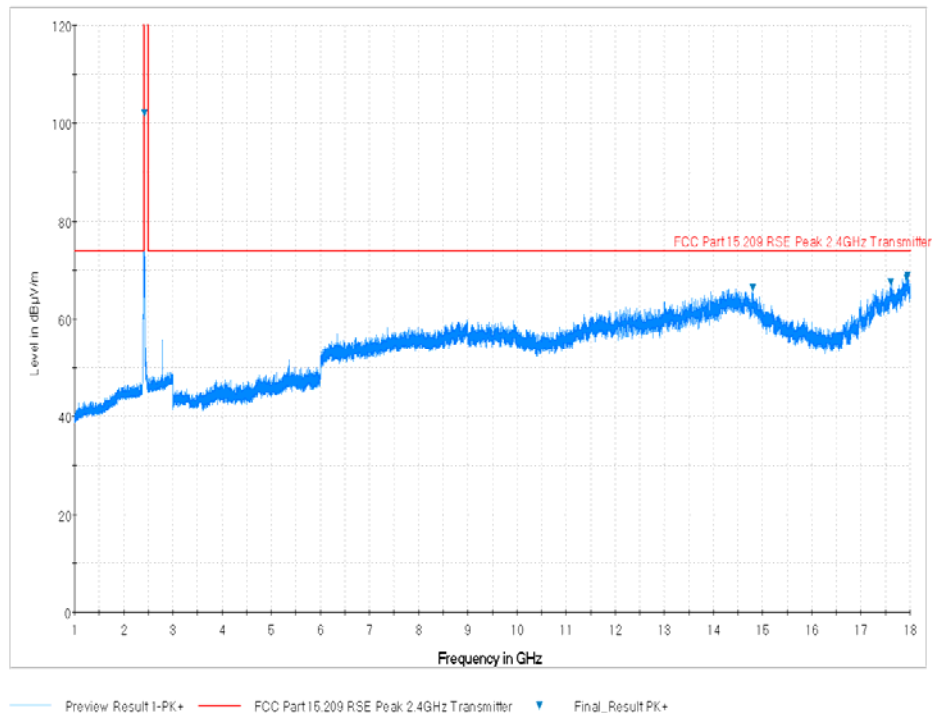


Plot 7-74. Radiated Spurious Plot above 1GHz (802.11b – Ch. 1, Ant. Pol. V)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 64 of 125

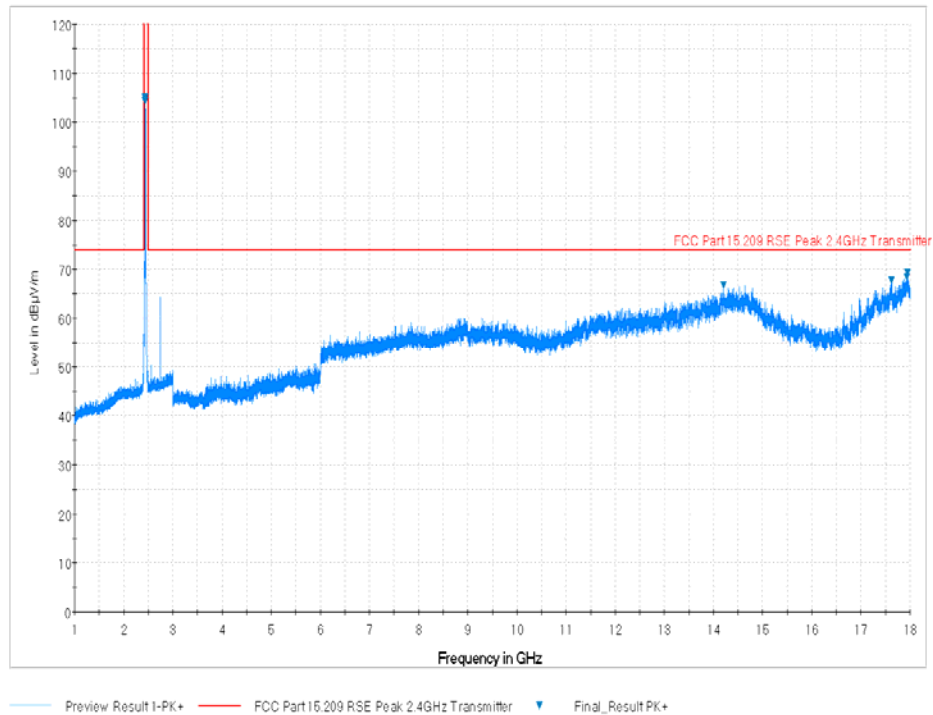


Plot 7-75. Radiated Spurious Plot above 1GHz (802.11b – Ch. 6, Ant. Pol. H)

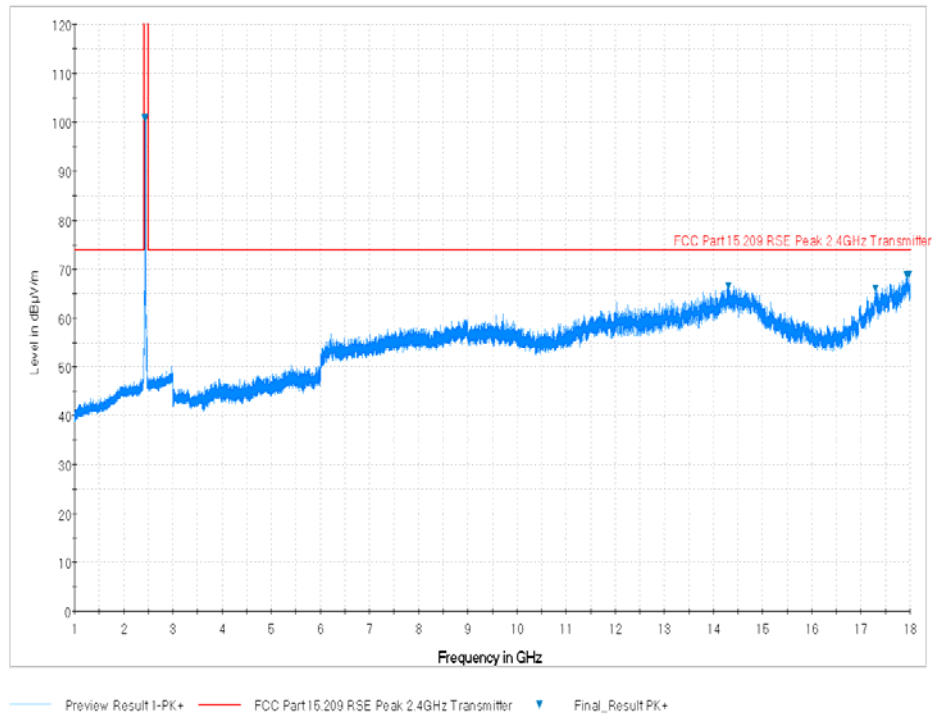


Plot 7-76. Radiated Spurious Plot above 1GHz (802.11b – Ch. 6, Ant. Pol. V)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 65 of 125

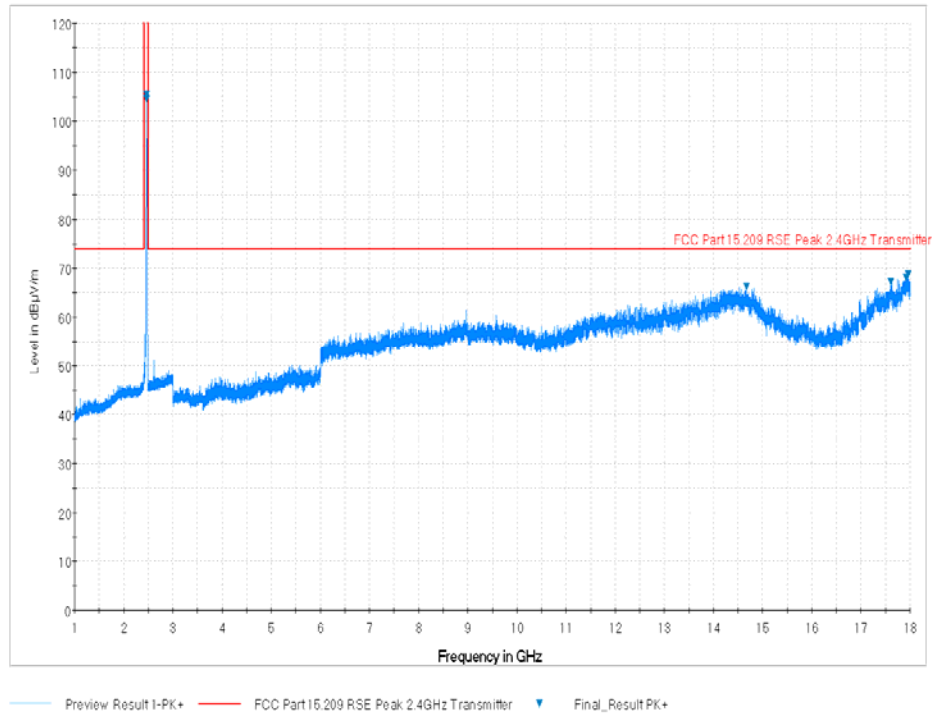

Plot 7-77. Radiated Spurious Plot above 1GHz (802.11b – Ch. 11, Ant. Pol. H)

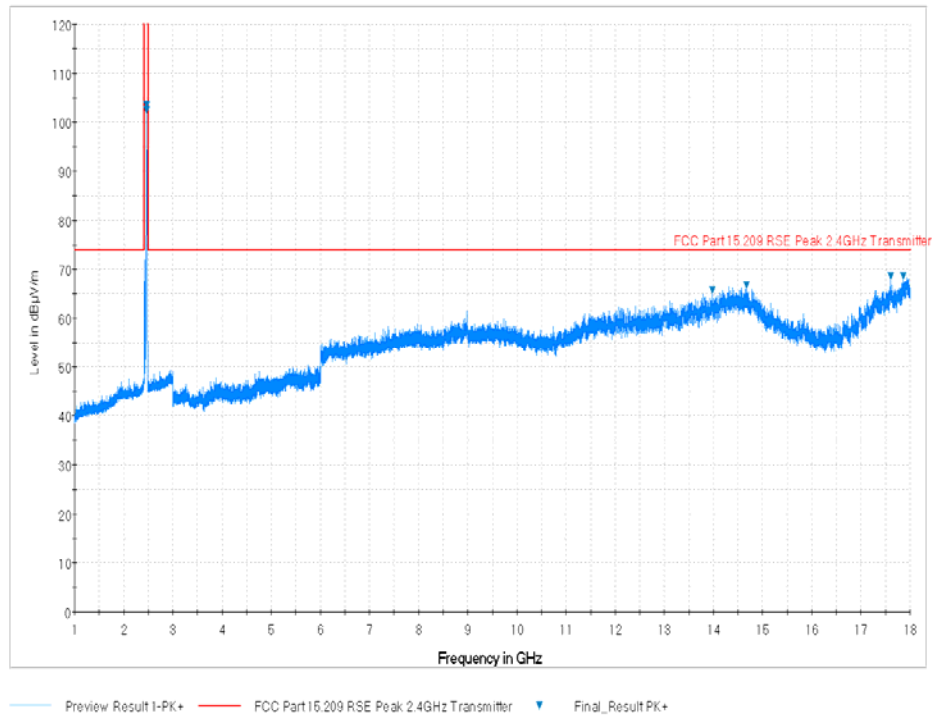


Plot 7-78. Radiated Spurious Plot above 1GHz (802.11b – Ch. 11, Ant. Pol. V)


FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 66 of 125

Antenna-1 Radiated Spurious Emissions Measurements (Above 18GHz)

\$15.209

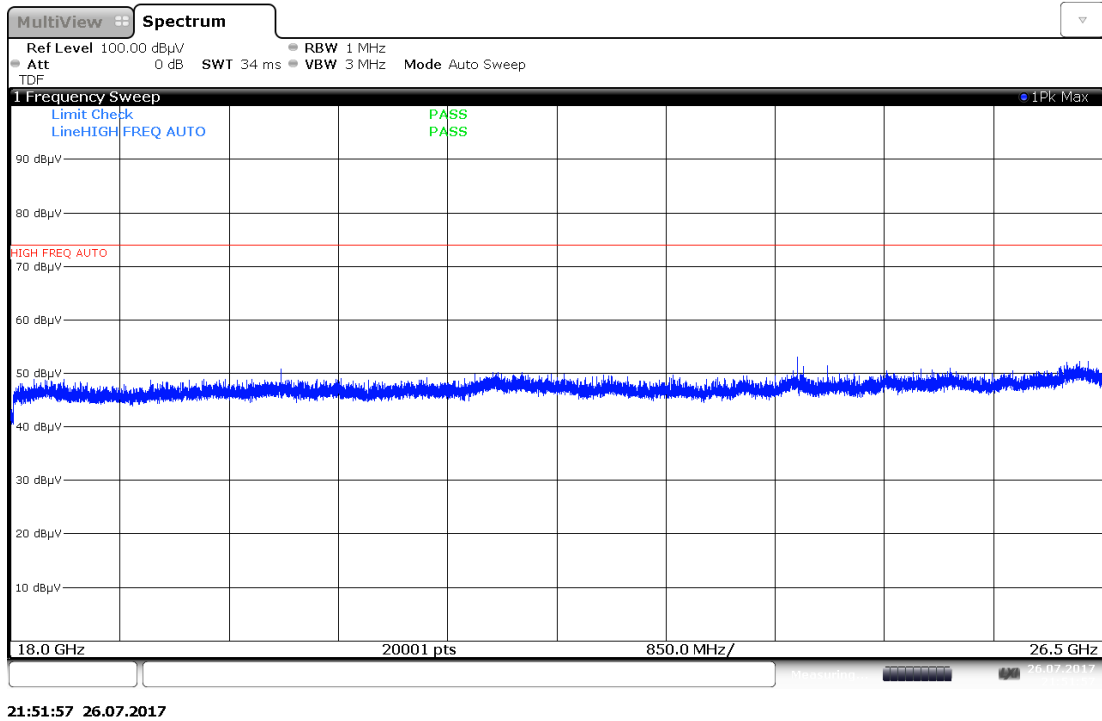

Plot 7-79. Radiated Spurious Plot above 18GHz (Pol. H)

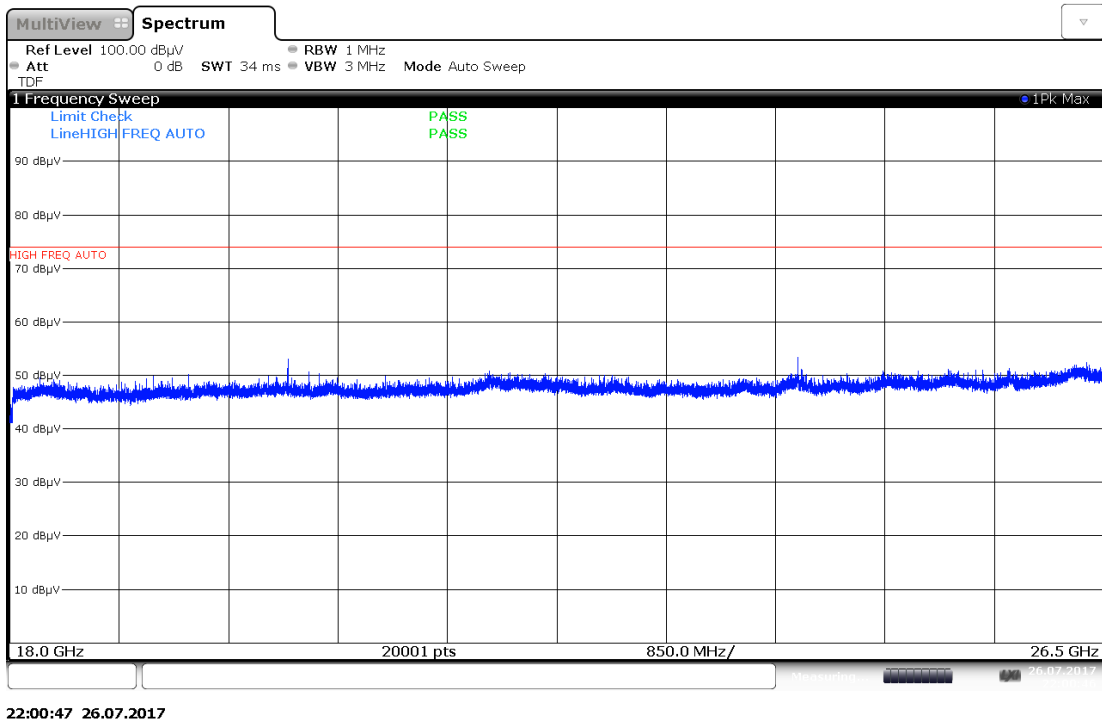

Plot 7-80. Radiated Spurious Plot above 18GHz (Pol. V)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 67 of 125

Antenna-1 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	V	130	172	-65.01	0.62	42.61	53.98	-11.37
4824.00	Peak	V	130	172	-56.30	0.62	51.32	73.98	-22.66
12060.00	Avg	V	-	-	-71.99	15.80	50.81	53.98	-3.17
12060.00	Peak	V	-	-	-59.10	15.80	63.70	73.98	-10.28

Table 7-11. Radiated Measurements

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	134	332	-65.85	1.19	42.34	53.98	-11.64
4874.00	Peak	V	134	332	-57.18	1.19	51.01	73.98	-22.97
7311.00	Avg	V	102	4	-68.12	9.94	48.82	53.98	-5.16
7311.00	Peak	V	102	4	-58.03	9.94	58.91	73.98	-15.07
12185.00	Avg	V	-	-	-73.26	16.29	50.03	53.98	-3.95
12185.00	Peak	V	-	-	-60.00	16.29	63.29	73.98	-10.69

Table 7-12. Radiated Measurements

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 68 of 125

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	114	38	-65.30	1.15	42.85	53.98	-11.13
4924.00	Peak	V	114	38	-57.33	1.15	50.82	73.98	-23.16
7386.00	Avg	V	-	-	-70.79	9.95	46.16	53.98	-7.82
7386.00	Peak	V	-	-	-59.08	9.95	57.87	73.98	-16.11
12310.00	Avg	V	-	-	-72.56	15.95	50.39	53.98	-3.59
12310.00	Peak	V	-	-	-59.70	15.95	63.25	73.98	-10.73

Table 7-13. Radiated Measurements

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 6


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	109	321	-68.13	1.19	40.06	53.98	-13.92
4874.00	Peak	V	109	321	-58.10	1.19	50.09	73.98	-23.89
7311.00	Avg	V	100	261	-69.10	9.94	47.84	53.98	-6.14
7311.00	Peak	V	100	261	-59.22	9.94	57.72	73.98	-16.26
12185.00	Avg	V	-	-	-72.62	16.29	50.67	53.98	-3.31
12185.00	Peak	V	-	-	-60.38	16.29	62.91	73.98	-11.07

Table 7-14. Radiated Measurements with WCP


FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 69 of 125

7.7.2 Antenna-2 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

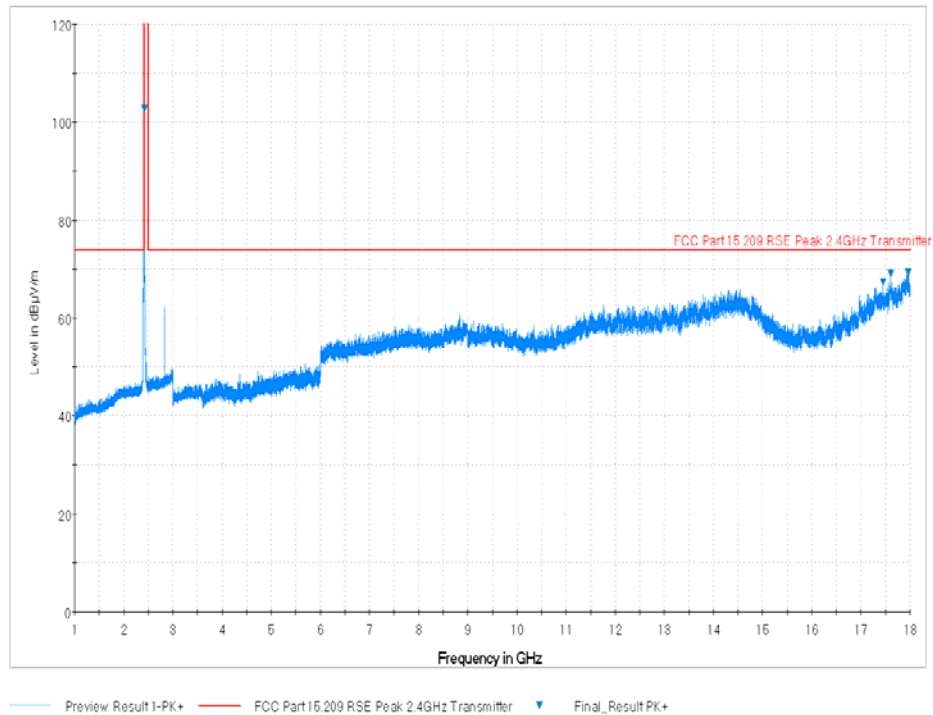


Plot 7-81. Radiated Spurious Plot above 1GHz (802.11b – Ch. 1, Ant. Pol. H)

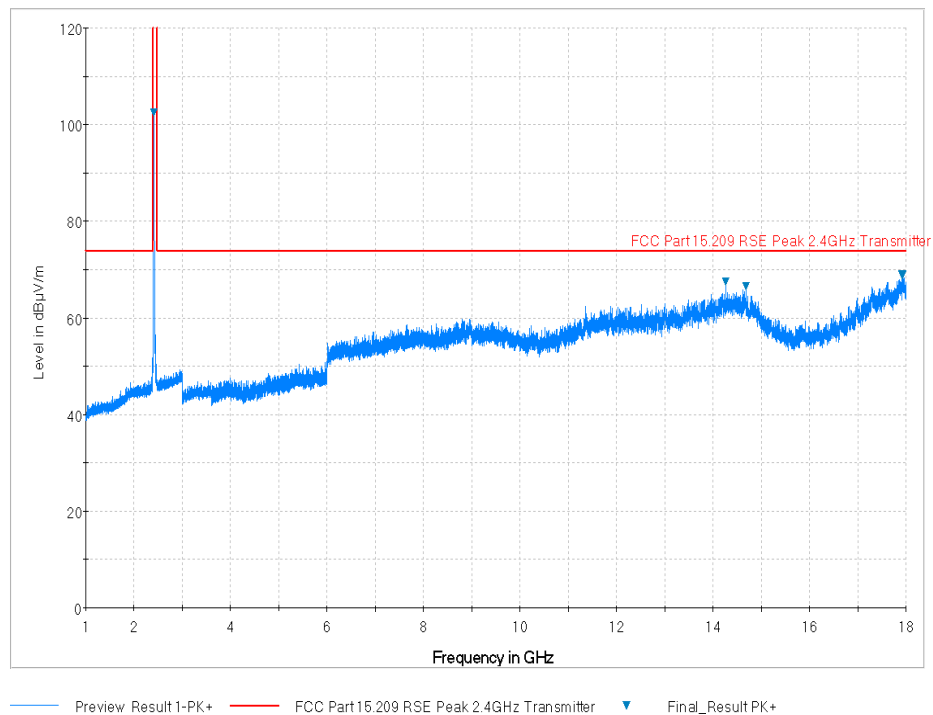


Plot 7-82. Radiated Spurious Plot above 1GHz (802.11b – Ch. 1, Ant. Pol. V)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 70 of 125

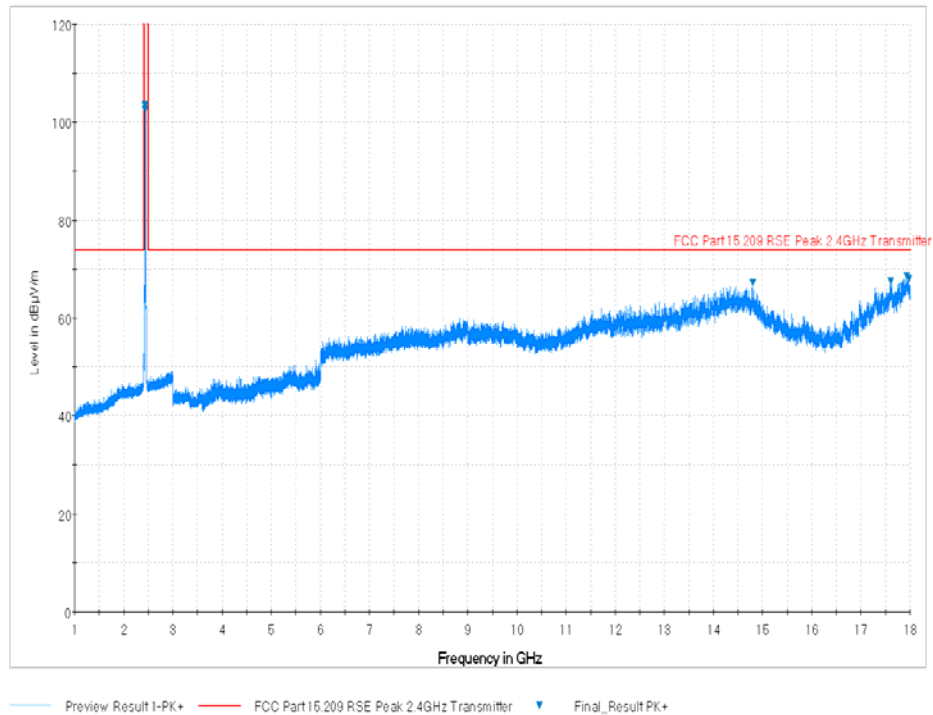


Plot 7-83. Radiated Spurious Plot above 1GHz (802.11b – Ch. 6, Ant. Pol. H)

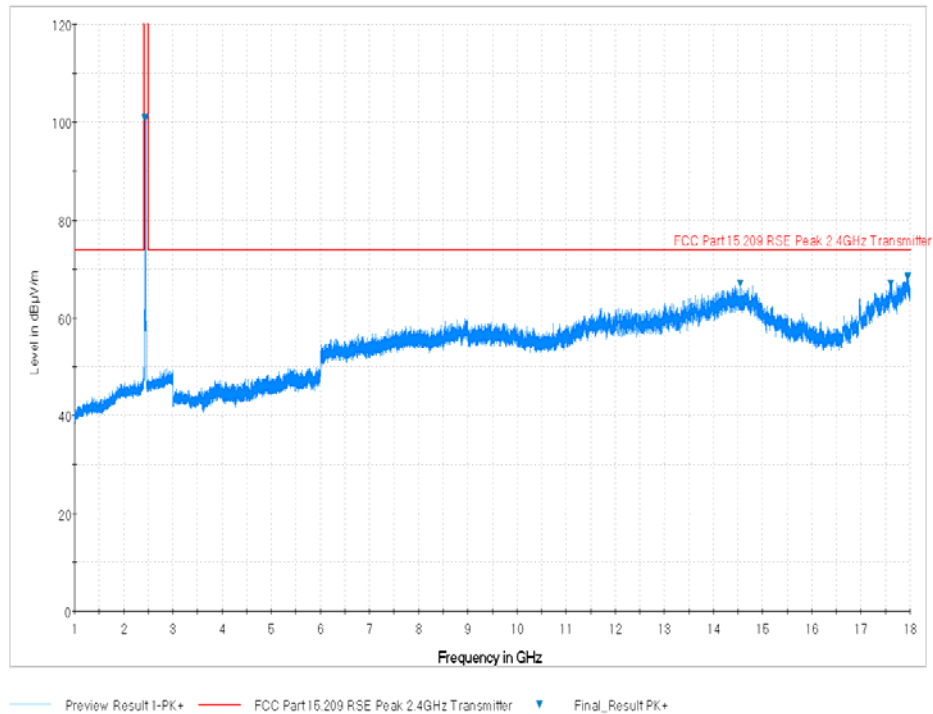


Plot 7-84. Radiated Spurious Plot above 1GHz (802.11b – Ch. 6, Ant. Pol. V)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 71 of 125

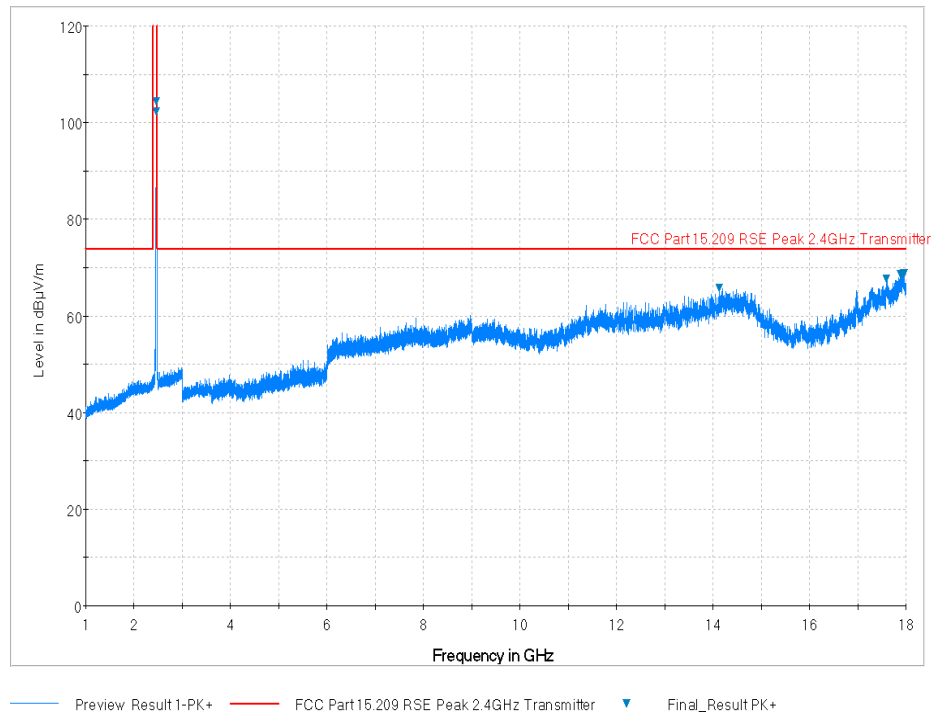

Plot 7-85. Radiated Spurious Plot above 1GHz (802.11b – Ch. 11, Ant. Pol. H)

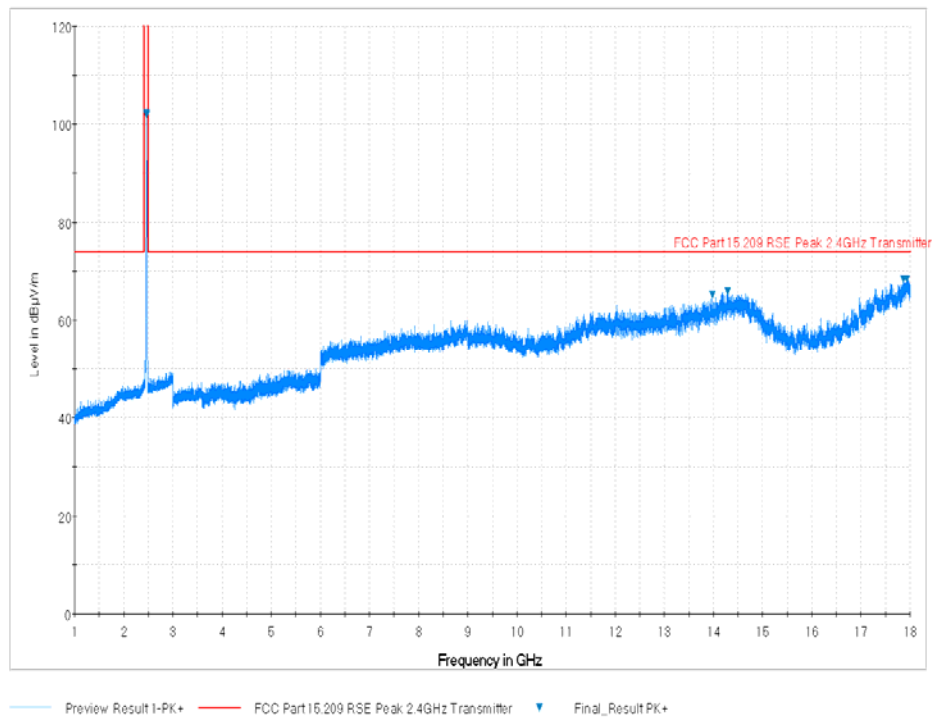


Plot 7-86. Radiated Spurious Plot above 1GHz (802.11b – Ch. 11, Ant. Pol. V)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 72 of 125


Antenna-2 Radiated Spurious Emissions Measurements (Above 18GHz)

\$15.209

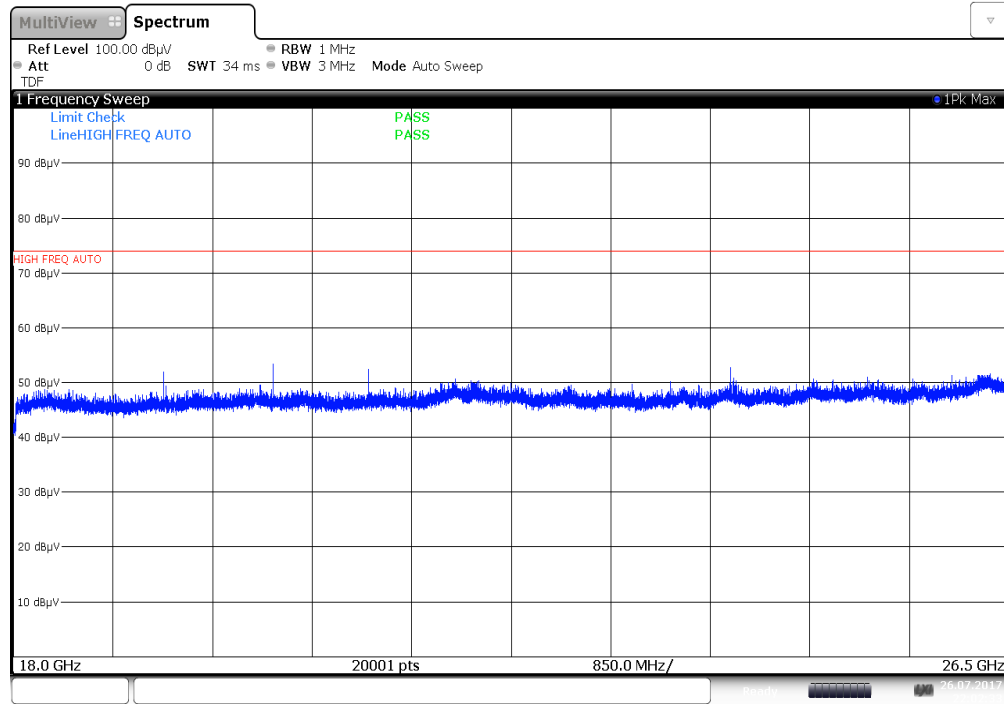

22:02:34 26.07.2017

Plot 7-87. Radiated Spurious Plot above 18GHz (Pol. H)

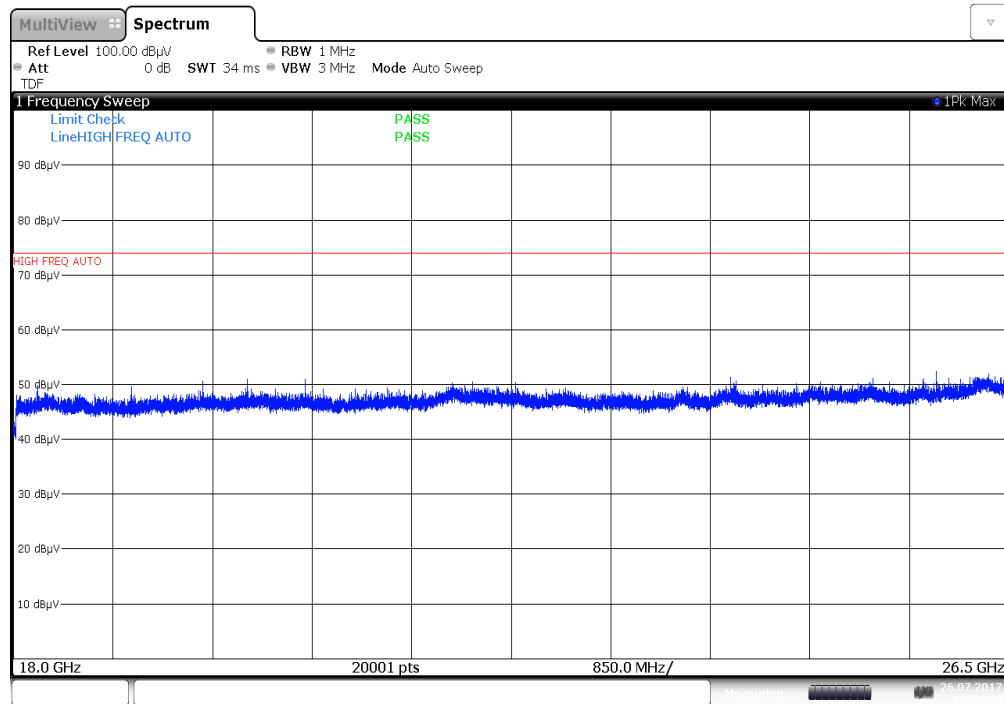

22:04:43 26.07.2017

Plot 7-88. Radiated Spurious Plot above 18GHz (Pol. V)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 73 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Antenna-2 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	V	117	216	-61.90	0.62	45.72	53.98	-8.26
4824.00	Peak	V	117	216	-54.93	0.62	52.69	73.98	-21.29
12060.00	Avg	V	-	-	-72.32	15.80	50.48	53.98	-3.50
12060.00	Peak	V	-	-	-58.89	15.80	63.91	73.98	-10.07

Table 7-15. Radiated Measurements

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	108	231	-61.83	1.19	46.36	53.98	-7.62
4874.00	Peak	V	108	231	-55.10	1.19	53.09	73.98	-20.89
7311.00	Avg	V	-	-	-69.89	9.94	47.05	53.98	-6.93
7311.00	Peak	V	-	-	-58.76	9.94	58.18	73.98	-15.80
12185.00	Avg	V	-	-	-72.83	16.29	50.46	53.98	-3.52
12185.00	Peak	V	-	-	-59.16	16.29	64.13	73.98	-9.85

Table 7-16. Radiated Measurements

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 74 of 125

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	100	216	-61.98	1.15	46.17	53.98	-7.81
4924.00	Peak	V	100	216	-54.83	1.15	53.32	73.98	-20.66
7386.00	Avg	V	-	-	-70.63	9.95	46.32	53.98	-7.66
7386.00	Peak	V	-	-	-58.98	9.95	57.97	73.98	-16.01
12310.00	Avg	V	-	-	-72.08	15.95	50.87	53.98	-3.11
12310.00	Peak	V	-	-	-59.68	15.95	63.27	73.98	-10.71

Table 7-17. Radiated Measurements

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	100	107	-61.96	1.19	46.23	53.98	-7.75
4874.00	Peak	V	100	107	-56.17	1.19	52.02	73.98	-21.96
7311.00	Avg	V	-	-	-70.51	9.94	46.43	53.98	-7.55
7311.00	Peak	V	-	-	-60.23	9.94	56.71	73.98	-17.27
12185.00	Avg	V	-	-	-72.68	16.29	50.61	53.98	-3.37
12185.00	Peak	V	-	-	-60.23	16.29	63.06	73.98	-10.92


Table 7-18. Radiated Measurements with WCP

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 75 of 125

7.7.3 Antenna-1 Radiated Restricted Band Edge Measurements §15.205 §15.209

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

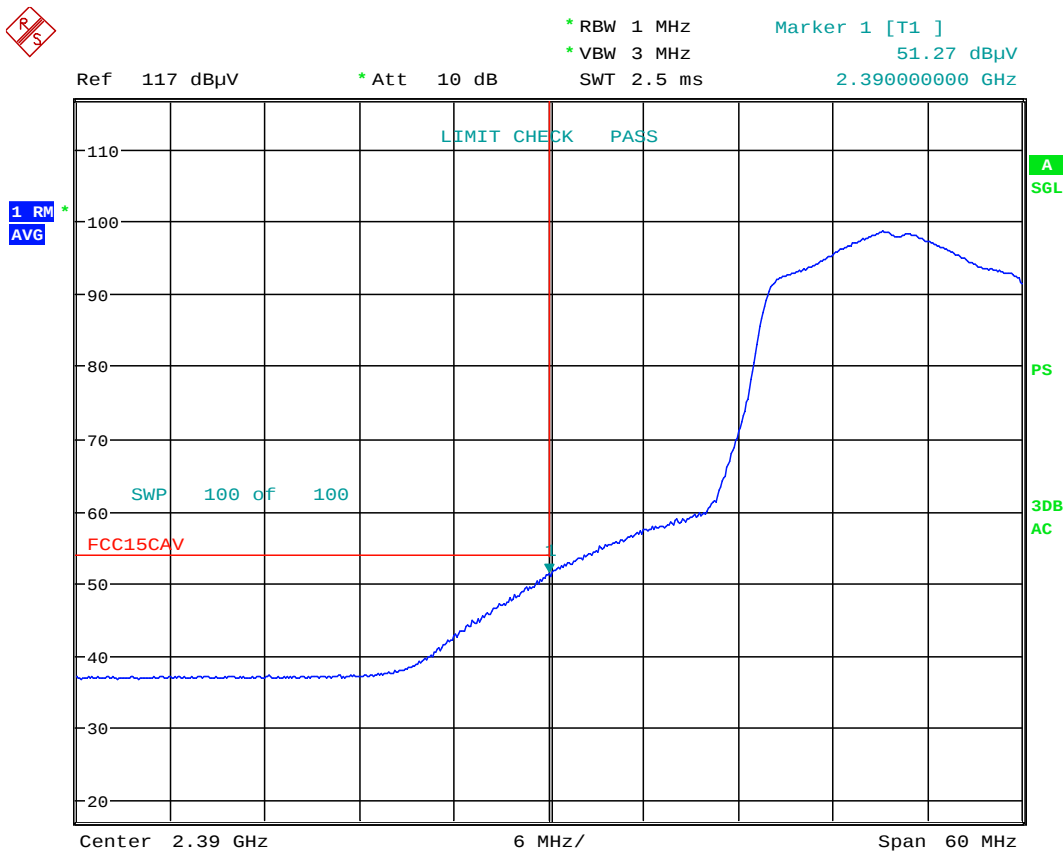


Date: 26.JUL.2017 10:44:58

Plot 7-89. Radiated Restricted Lower Band Edge Measurement (Average)

FCC ID: A3LSC01K	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset	Page 76 of 125

Antenna-1 Radiated Restricted Band Edge Measurements

\$15.205 \$15.209

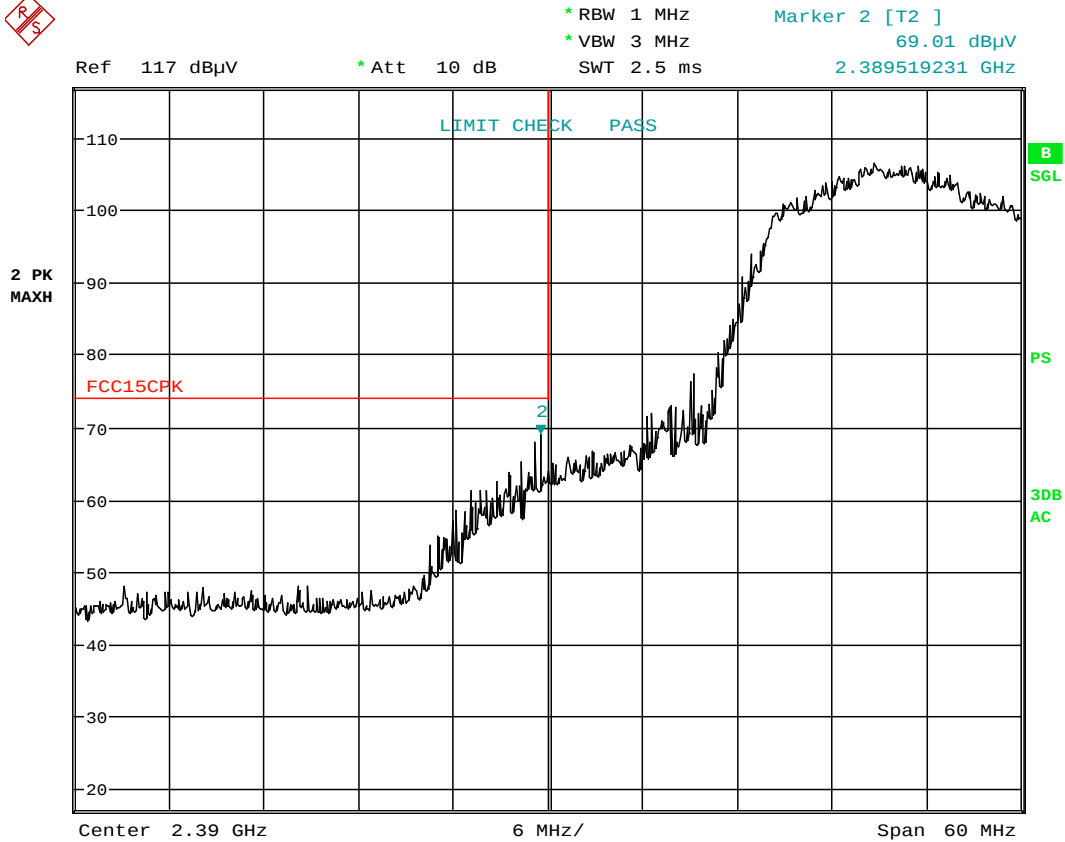

Date: 26.JUL.2017 10:45:16

Plot 7-90. Radiated Restricted Lower Band Edge Measurement (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 77 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Antenna-1 Radiated Restricted Band Edge Measurements

§15.205 §15.209


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

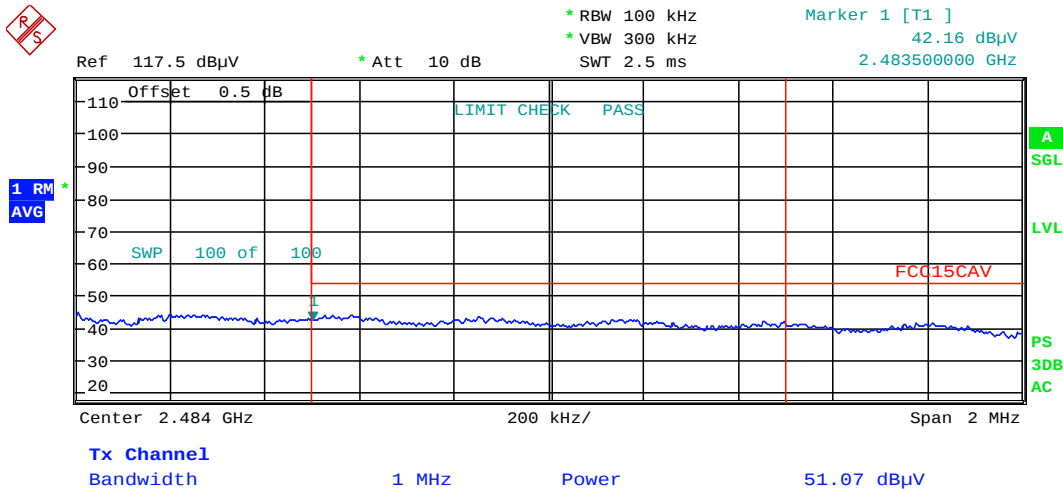

Date: 26.JUL.2017 11:03:14

Plot 7-91. Radiated Restricted Upper Band Edge Measurement (Average)

Per Section 13.3.1 of KDB 558074, the Integration method was used to determine compliance with the out-of-band emission limits.

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 78 of 125

© 2017 PCTEST Engineering Laboratory, Inc.


V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Antenna-1 Radiated Restricted Band Edge Measurements

\$15.205 \$15.209

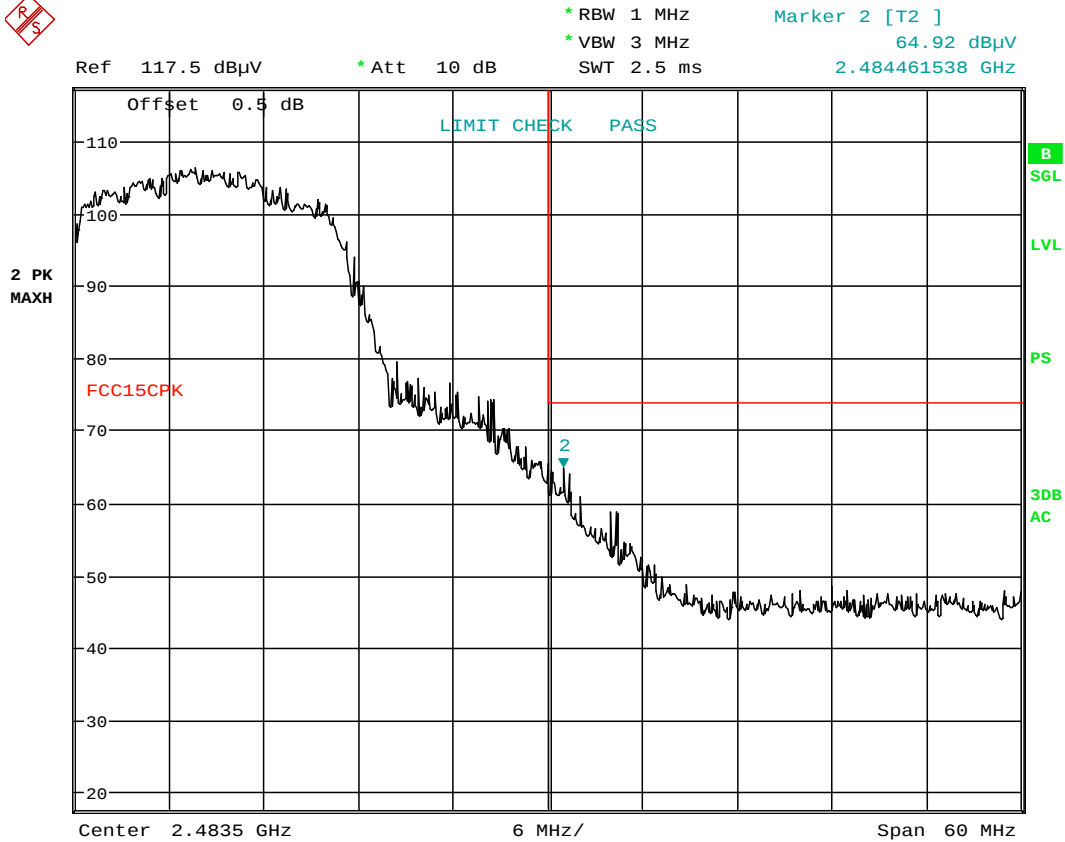

Date: 26.JUL.2017 11:04:03

Plot 7-92. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 79 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Antenna-1 Radiated Restricted Band Edge Measurements

§15.205 §15.209


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2467MHz

Channel: 12

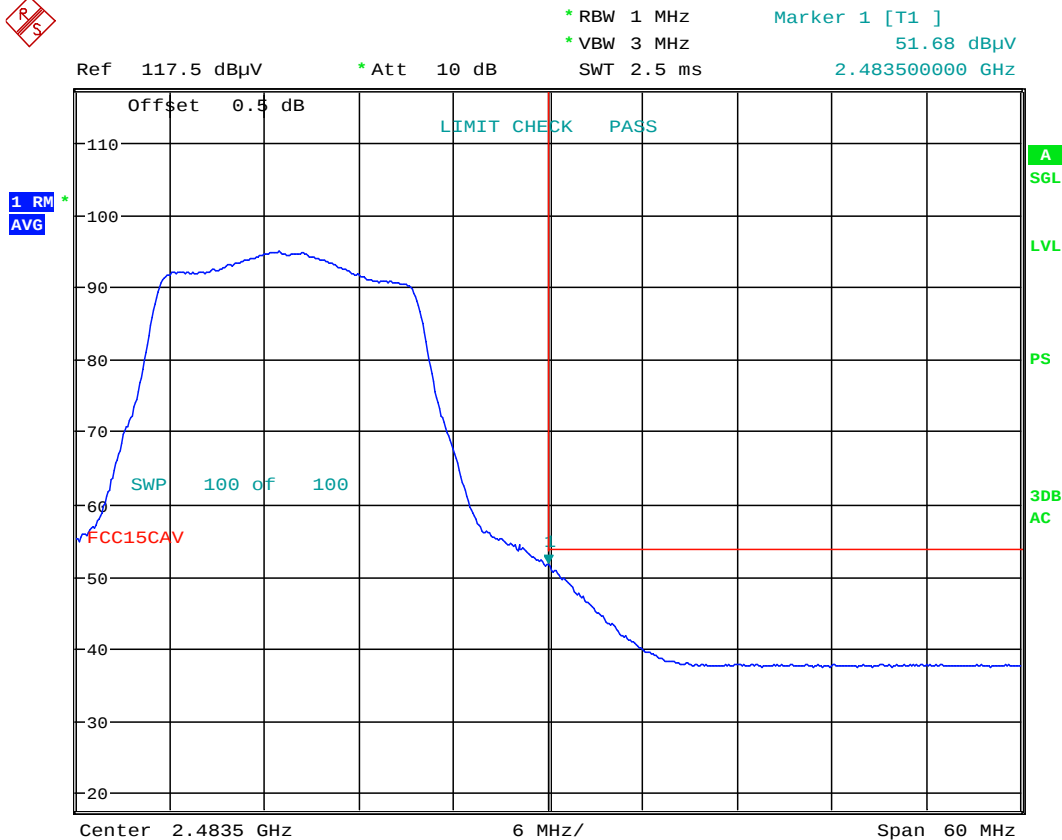


Date: 22.JUL.2017 14:36:10

Plot 7-93. Radiated Restricted Upper Band Edge Measurement (Average)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 80 of 125

Antenna-1 Radiated Restricted Band Edge Measurements

§15.205 §15.209

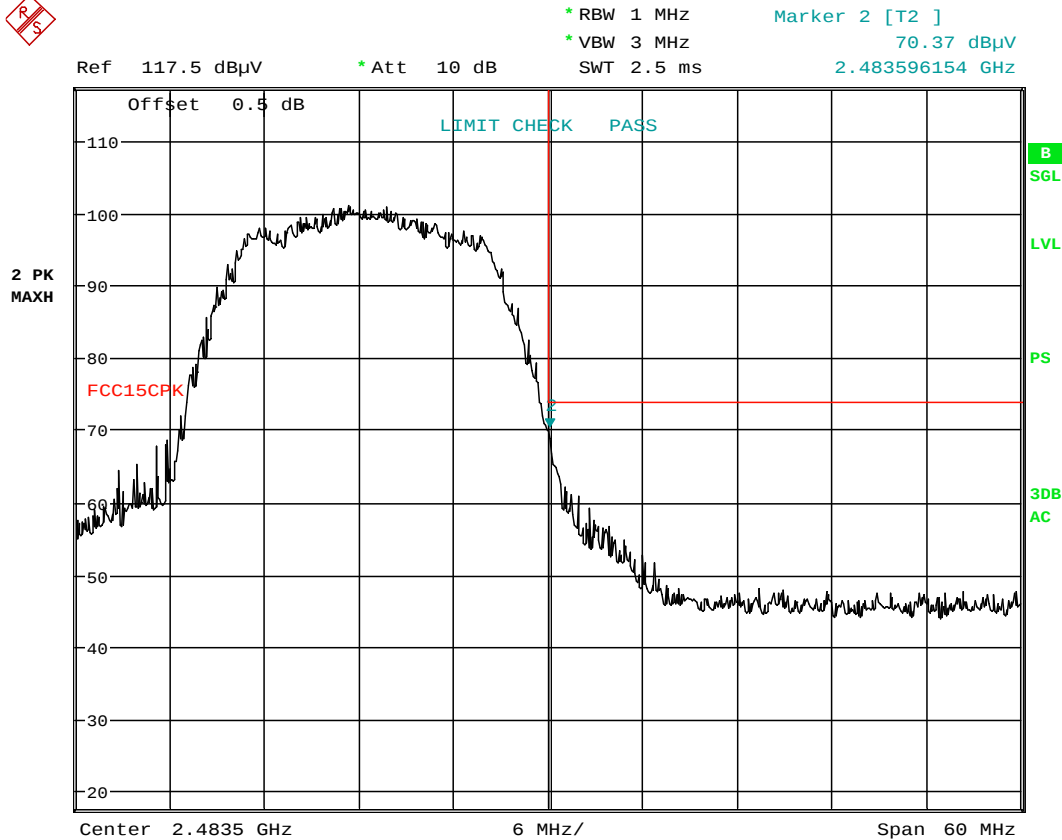

Date: 22.JUL.2017 15:01:28

Plot 7-94. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 81 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Antenna-1 Radiated Restricted Band Edge Measurements

§15.205 §15.209


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2472MHz

Channel: 13

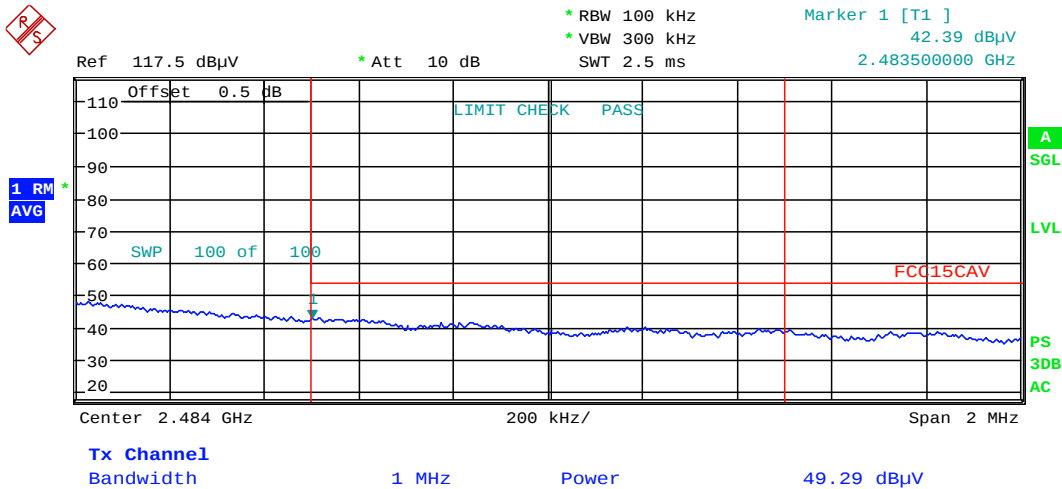

Date: 22.JUL.2017 14:57:09


Plot 7-95. Radiated Restricted Upper Band Edge Measurement (Average)

Per Section 13.3.1 of KDB 558074, the Integration method was used to determine compliance with the out-of-band emission limits.

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 82 of 125

Antenna-1 Radiated Restricted Band Edge Measurements

\$15.205 \$15.209

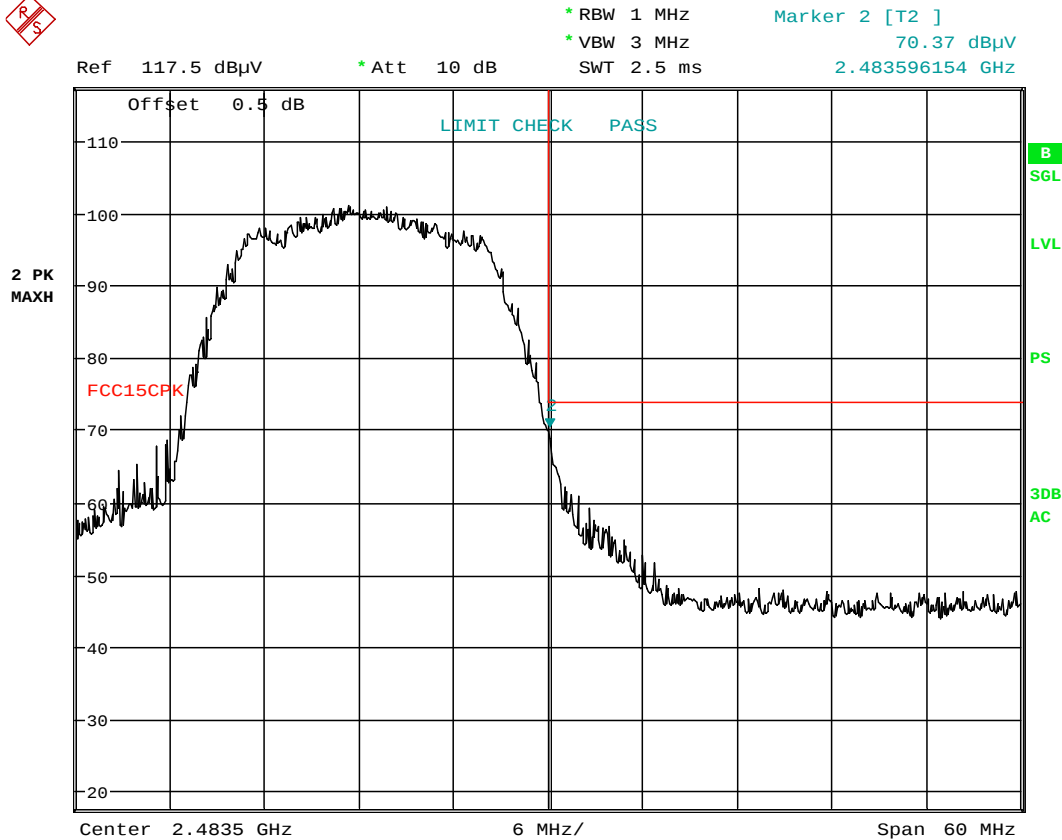

Date: 22.JUL.2017 15:01:28

Plot 7-96. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 83 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Antenna-1 WCP Radiated Restricted Band Edge Measurements

§15.205 §15.209


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

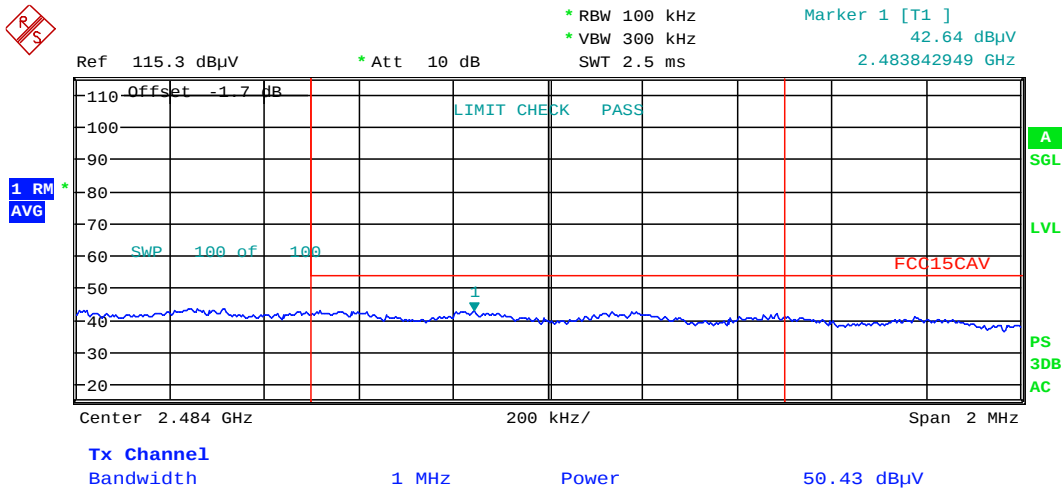

Date: 1.AUG.2017 10:48:52


Plot 7-97. Radiated Restricted Band Edge Measurement with WCP (Average)

Per Section 13.3.1 of KDB 558074, the Integration method was used to determine compliance with the out-of-band emission limits.

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 84 of 125

Antenna-1 WCP Radiated Restricted Band Edge Measurements

\$15.205 \$15.209

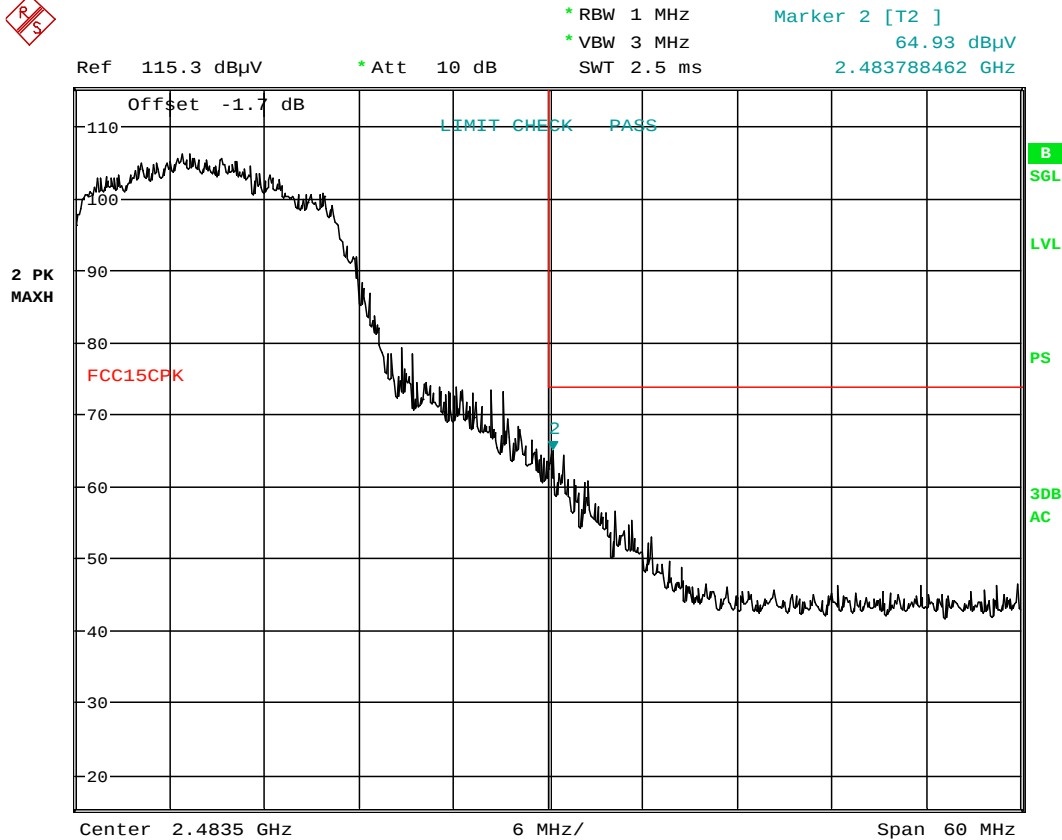

Date: 1.AUG.2017 10:48:21

Plot 7-98. Radiated Restricted Band Edge Measurement with WCP (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 85 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.7.4 Antenna-2 Radiated Restricted Band Edge Measurements

§15.205 §15.209

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz

Channel: 1

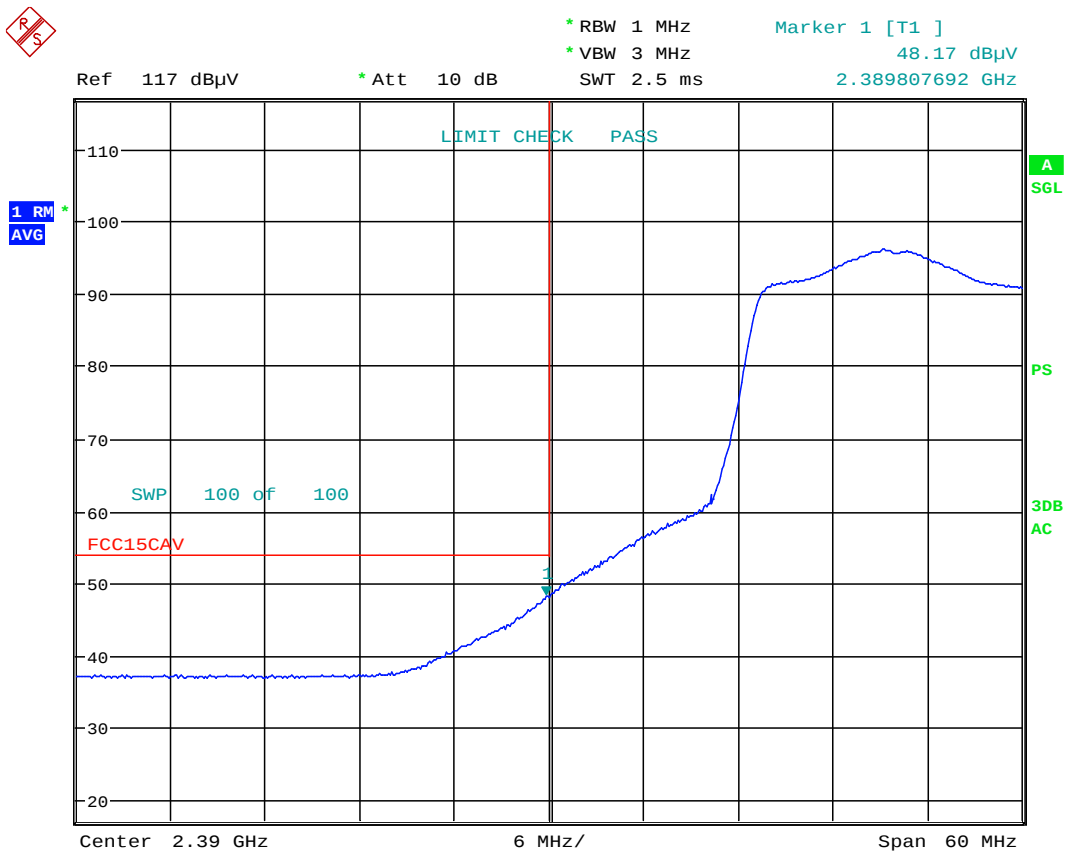


Date: 26.JUL.2017 11:24:56

Plot 7-99. Radiated Restricted Lower Band Edge Measurement (Average)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 86 of 125

Antenna-2 Radiated Restricted Band Edge Measurements

§15.205 §15.209

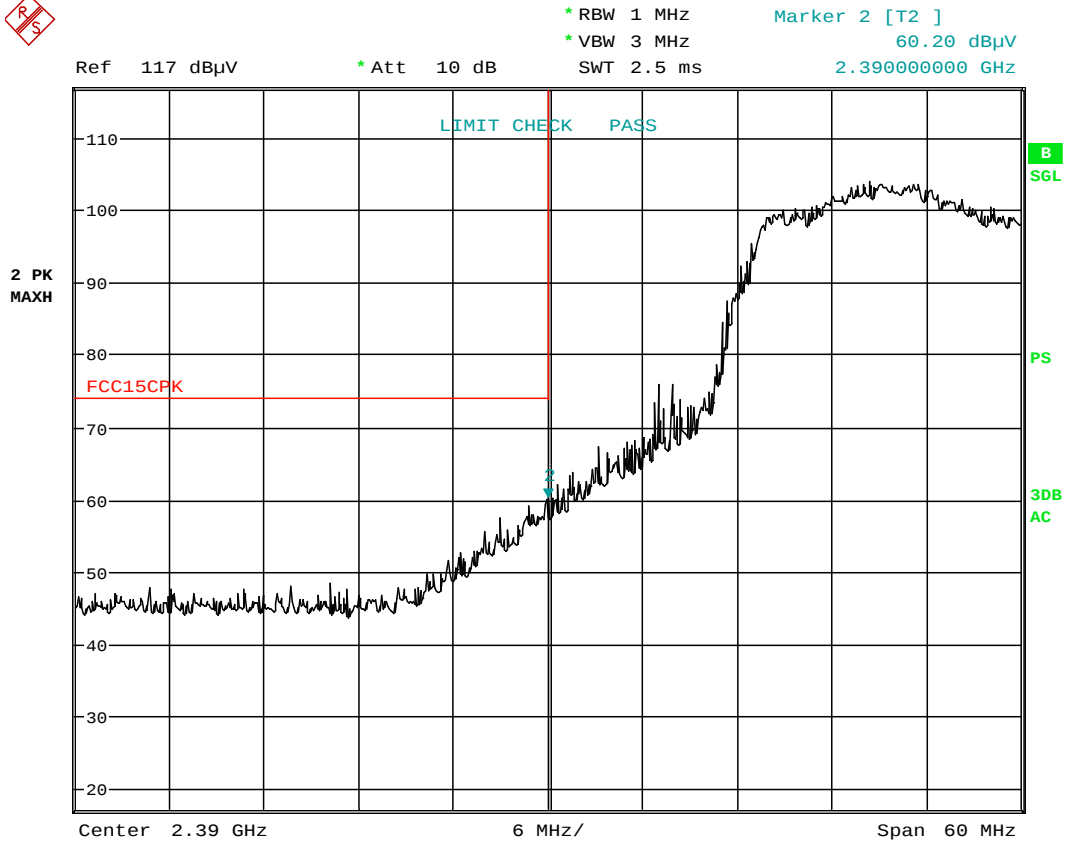

Date: 26.JUL.2017 11:24:34

Plot 7-100. Radiated Restricted Lower Band Edge Measurement (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 87 of 125

© 2017 PCTEST Engineering Laboratory, Inc.


V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Antenna-2 Radiated Restricted Band Edge Measurements

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

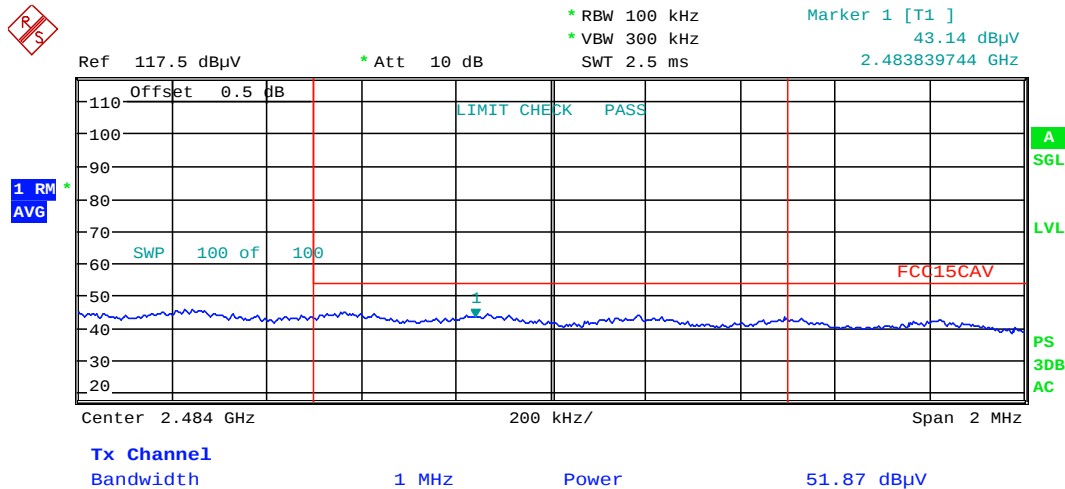

Date: 26.JUL.2017 11:36:02


Plot 7-101. Radiated Restricted Upper Band Edge Measurement (Average)

Per Section 13.3.1 of KDB 558074, the Integration method was used to determine compliance with the out-of-band emission limits.

FCC ID: A3LSC01K	 FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset	Page 88 of 125

Antenna-2 Radiated Restricted Band Edge Measurements

§15.205 §15.209

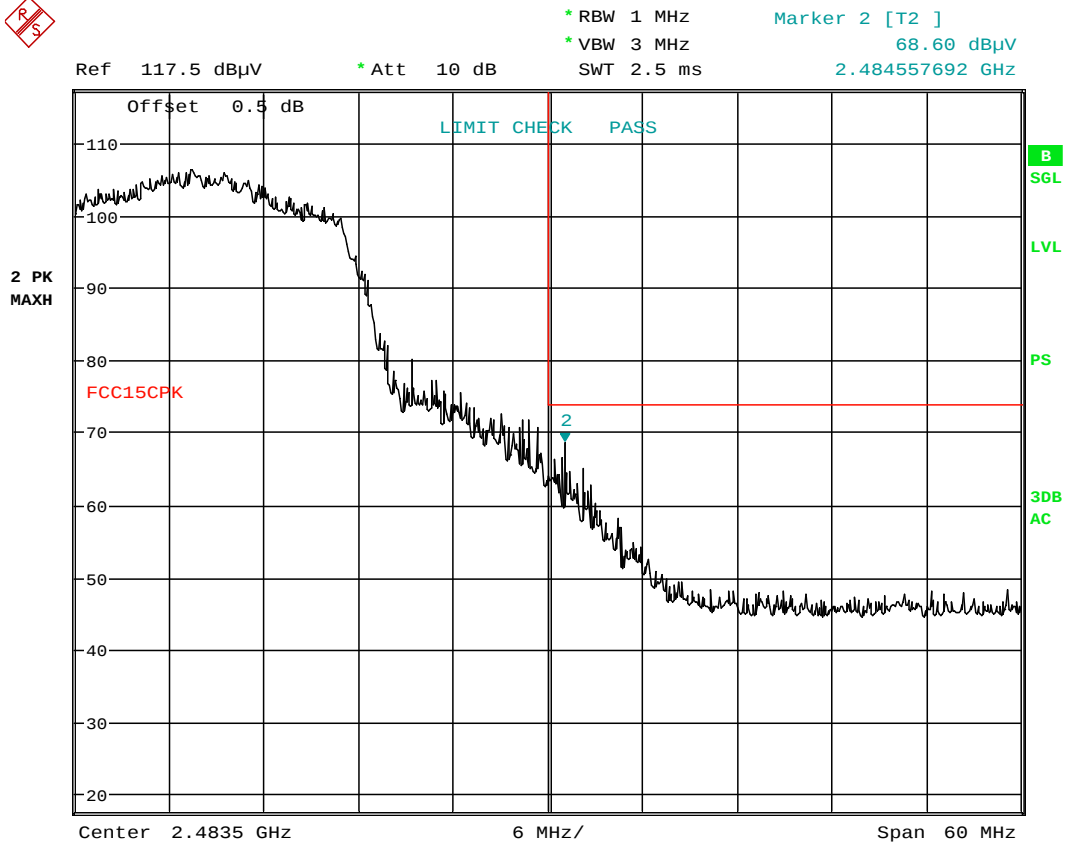

Date: 26.JUL.2017 11:36:28

Plot 7-102. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 89 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Antenna-2 Radiated Restricted Band Edge Measurements

§15.205 §15.209


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 2467MHz

Channel: 12

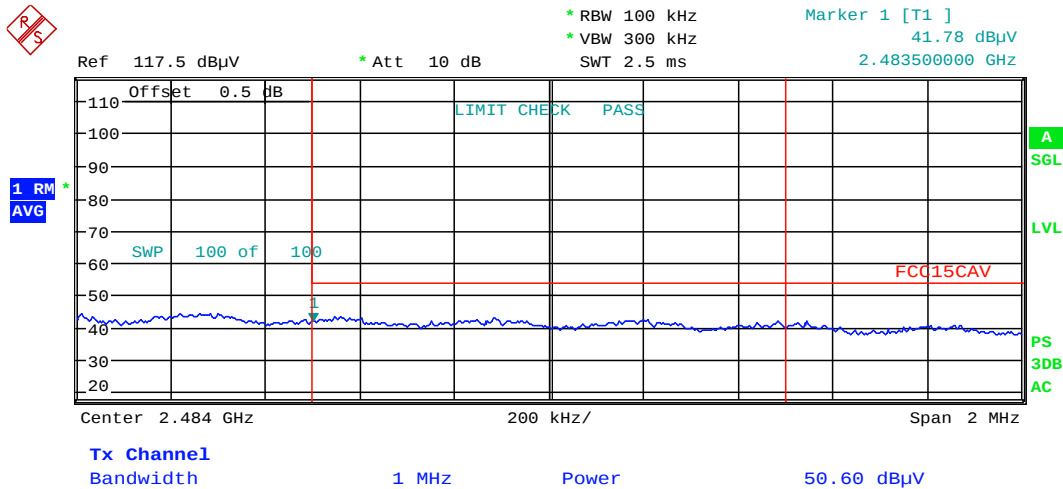

Date: 22.JUL.2017 15:20:19


Plot 7-103. Radiated Restricted Upper Band Edge Measurement (Average)

Per Section 13.3.1 of KDB 558074, the Integration method was used to determine compliance with the out-of-band emission limits.

FCC ID: A3LSC01K	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset	Page 90 of 125

Antenna-2 Radiated Restricted Band Edge Measurements

\$15.205 \$15.209

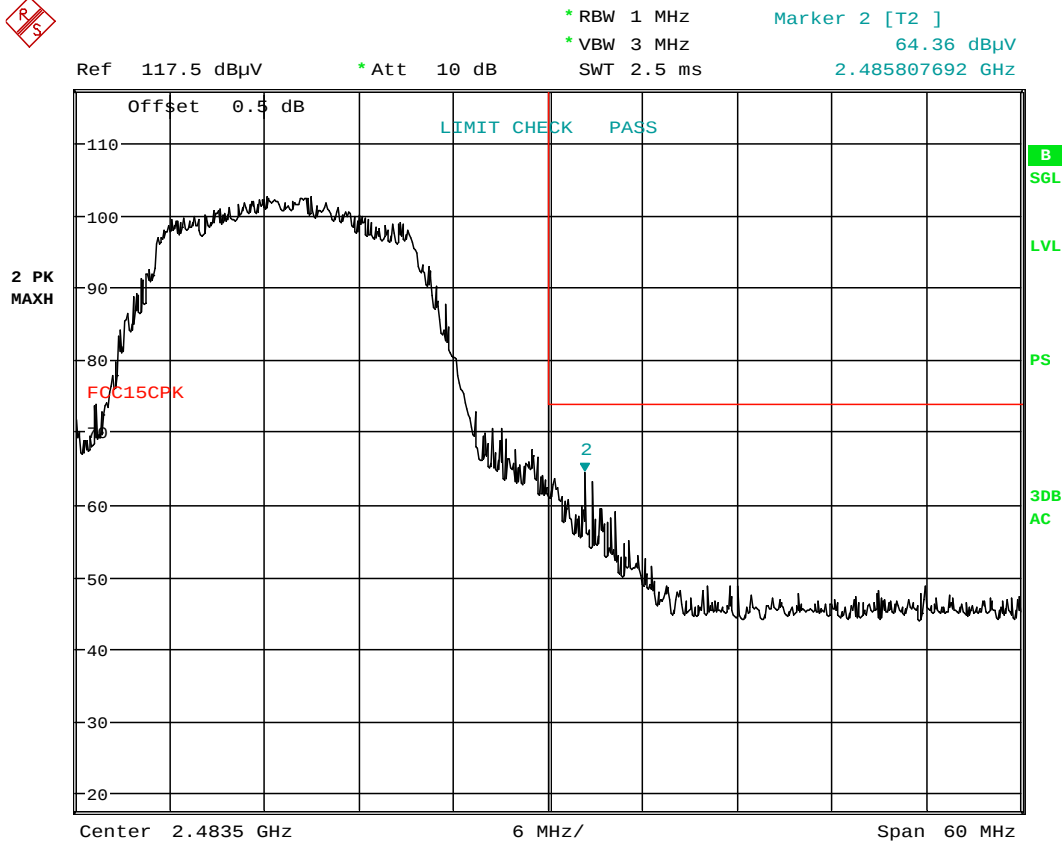

Date: 22.JUL.2017 15:18:33

Plot 7-104. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 91 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Antenna-2 Radiated Restricted Band Edge Measurements

§15.205 §15.209


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 2472MHz

Channel: 13

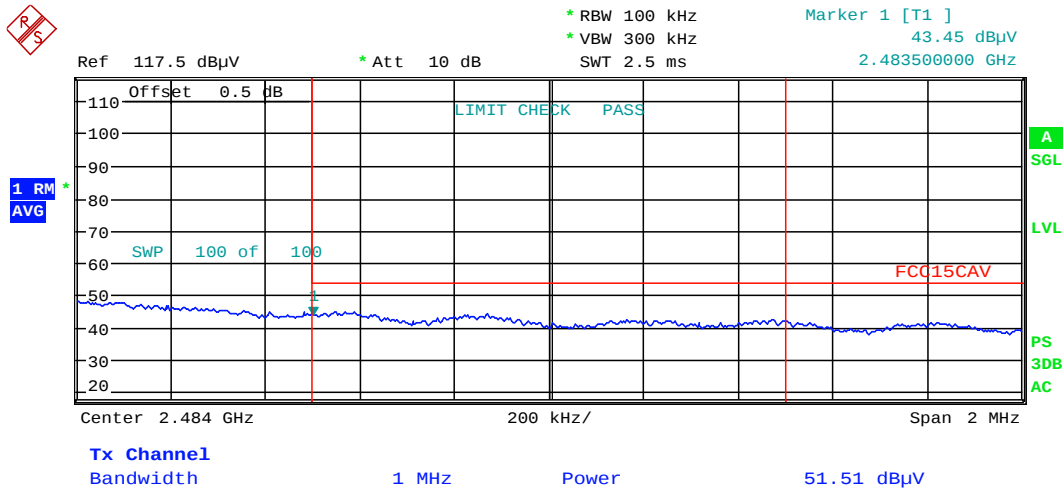

Date: 22.JUL.2017 15:44:32


Plot 7-105. Radiated Restricted Upper Band Edge Measurement (Average)

Per Section 13.3.1 of KDB 558074, the Integration method was used to determine compliance with the out-of-band emission limits.

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 92 of 125

Antenna-2 Radiated Restricted Band Edge Measurements

§15.205 §15.209

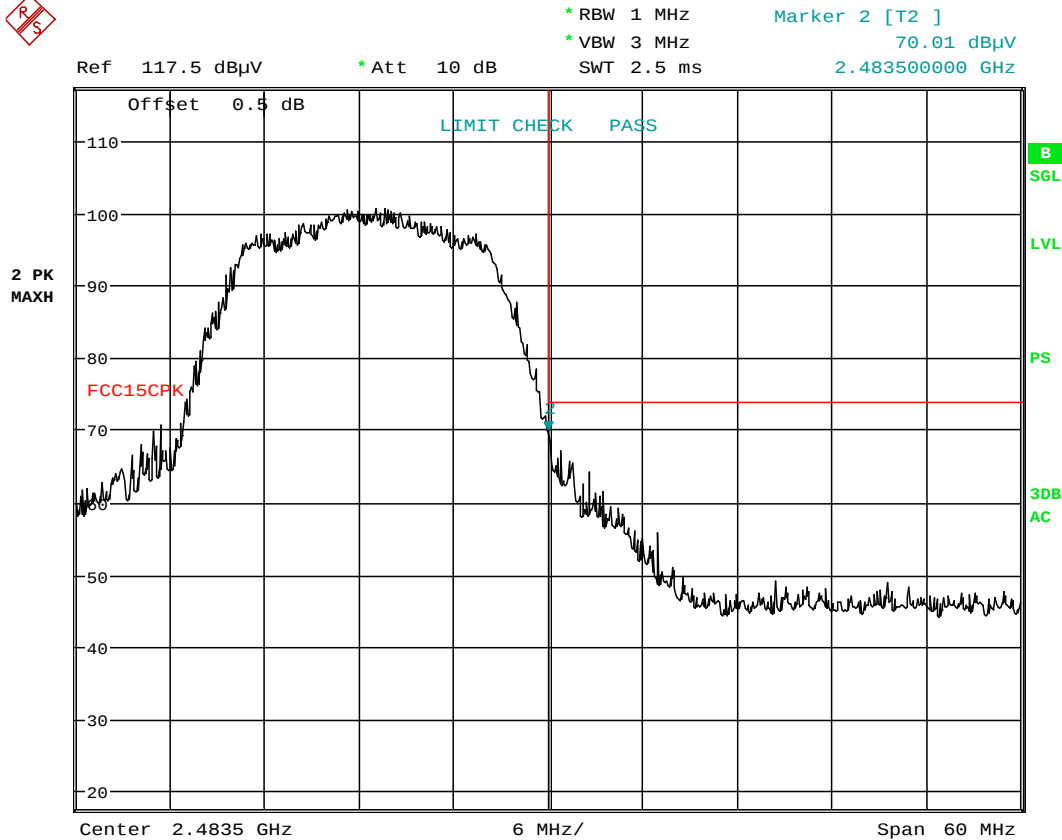

Date: 22.JUL.2017 15:45:55

Plot 7-106. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 93 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Antenna-2 WCP Radiated Restricted Band Edge Measurements

§15.205 §15.209


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

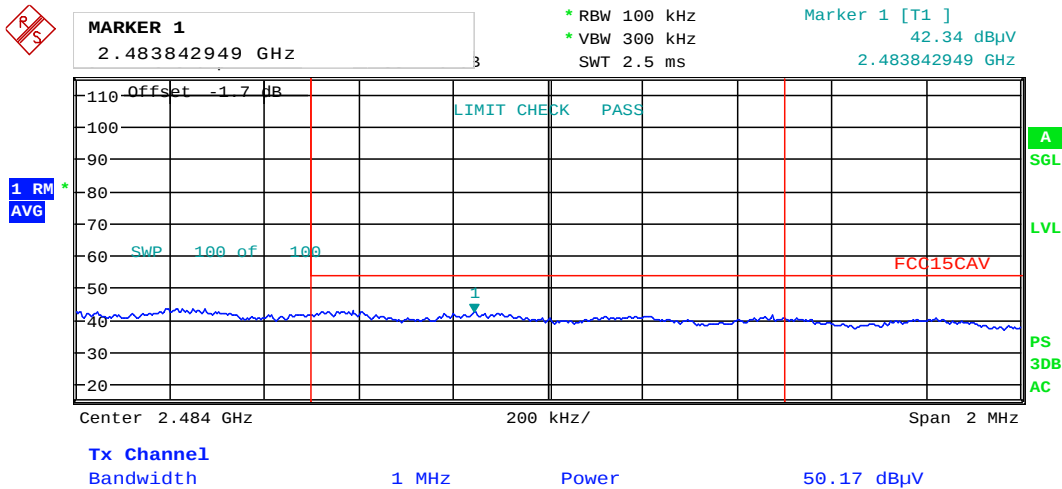

Date: 1.AUG.2017 10:56:07


Plot 7-107. Radiated Restricted Band Edge Measurement with WCP (Average)

Per Section 13.3.1 of KDB 558074, the Integration method was used to determine compliance with the out-of-band emission limits.

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 94 of 125

Antenna-2 WCP Radiated Restricted Band Edge Measurements

§15.205 §15.209

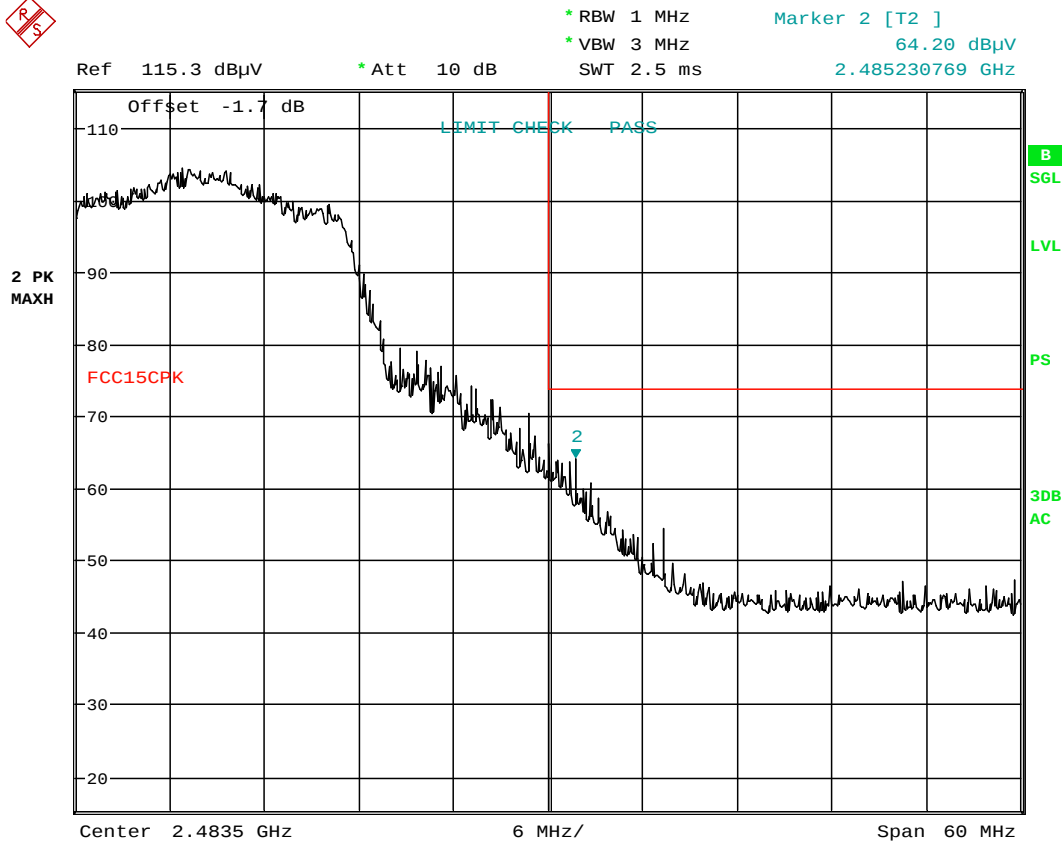

Date: 1.AUG.2017 10:56:26

Plot 7-108. Radiated Restricted Band Edge Measurement with WCP (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 95 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.7.5 MIMO Radiated Restricted Band Edge Measurements

§15.205 §15.209

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz

Channel: 1

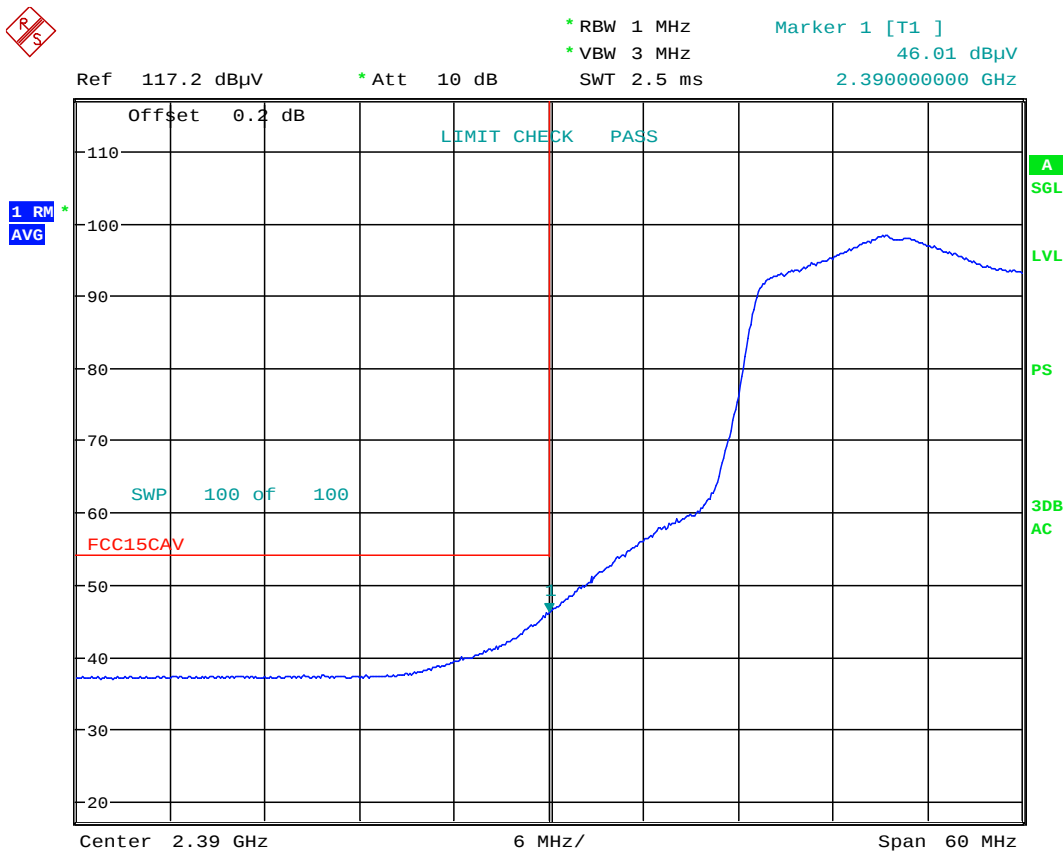


Date: 26.JUL.2017 11:53:40

Plot 7-109. Radiated Restricted Lower Band Edge Measurement (Average)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 96 of 125

MIMO Radiated Restricted Band Edge Measurements

§15.205 §15.209

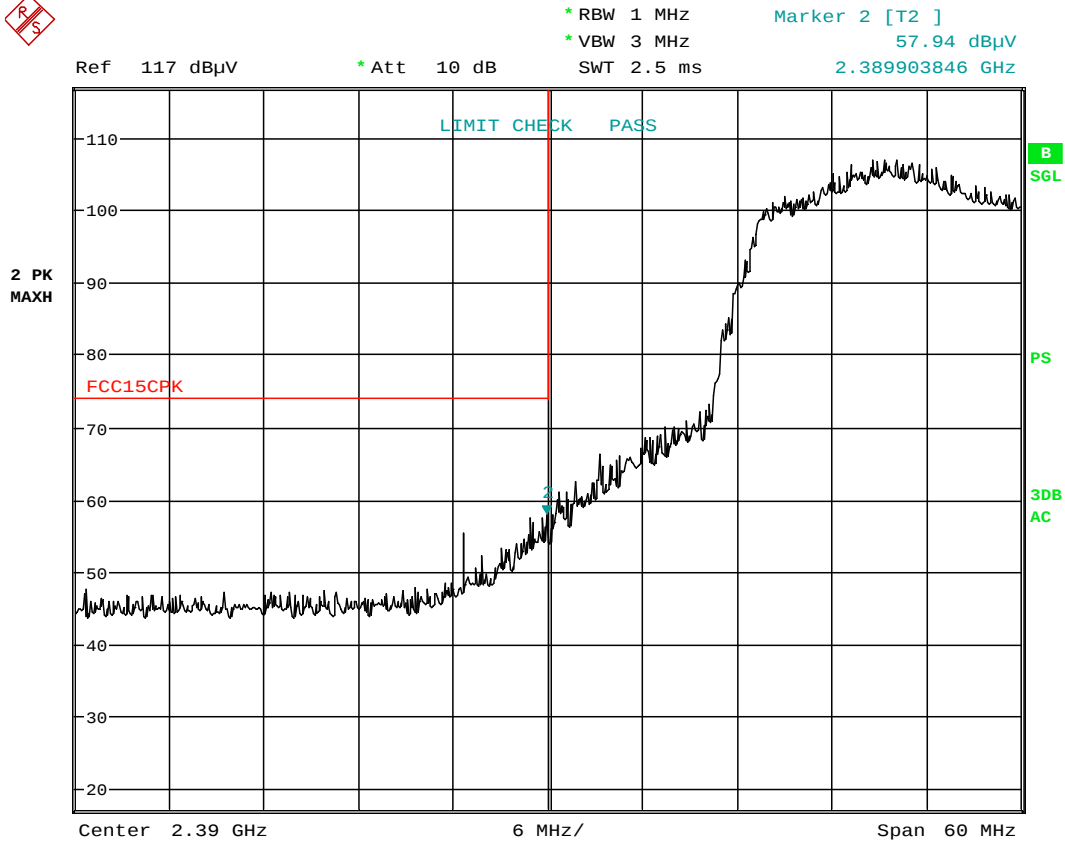

Date: 26.JUL.2017 11:54:09

Plot 7-110. Radiated Restricted Lower Band Edge Measurement (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 97 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

MIMO Radiated Restricted Band Edge Measurements

§15.205 §15.209


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

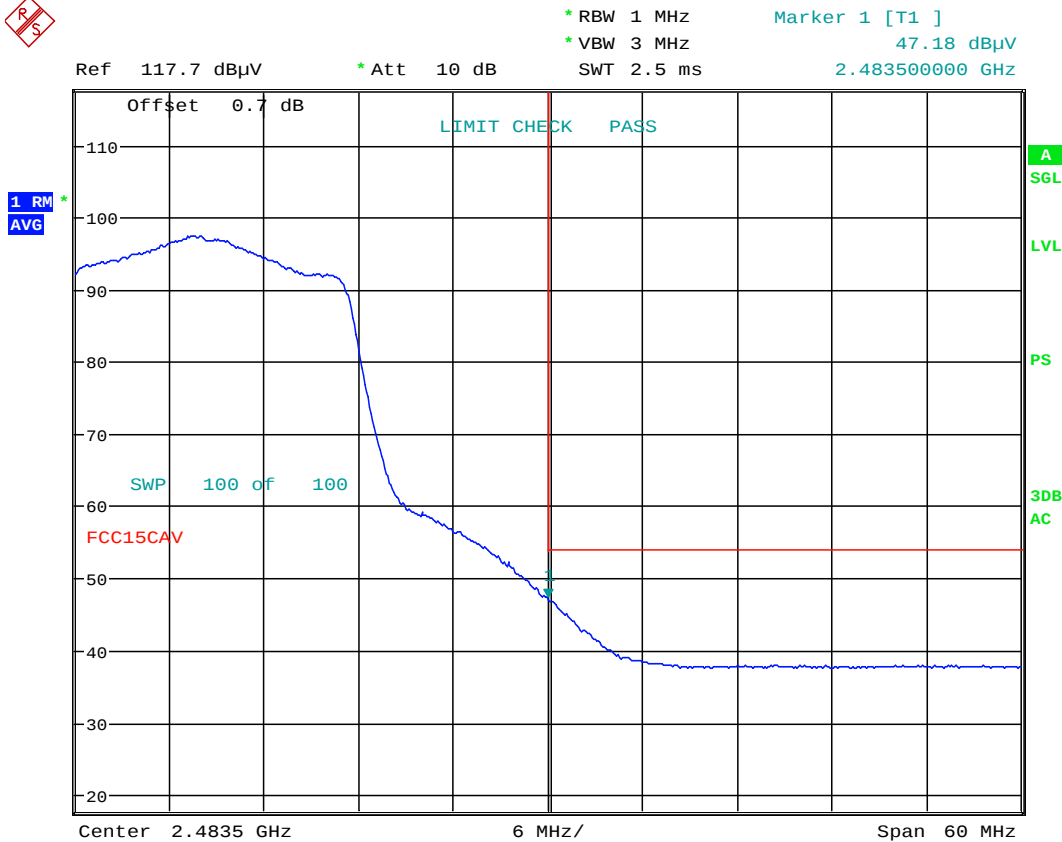

Date: 26.JUL.2017 12:07:04

Plot 7-111. Radiated Restricted Upper Band Edge Measurement (Average)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 98 of 125

© 2017 PCTEST Engineering Laboratory, Inc.


V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

MIMO Radiated Restricted Band Edge Measurements

§15.205 §15.209

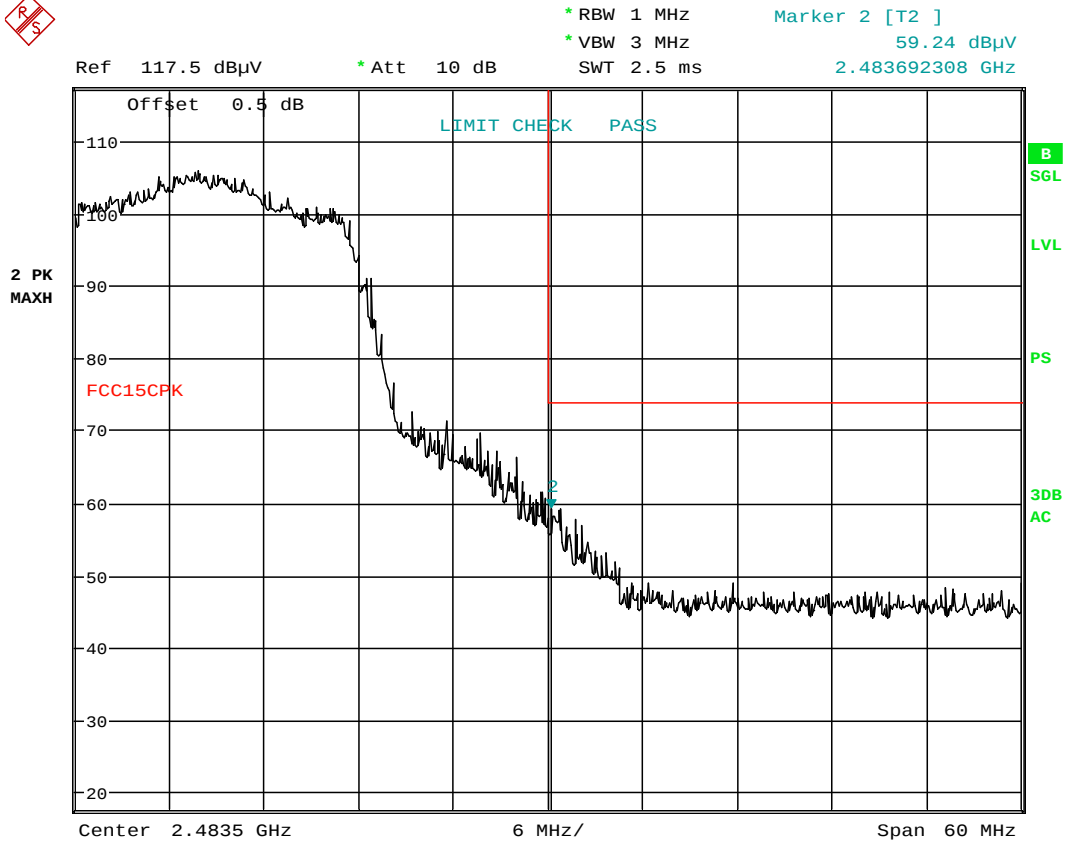

Date: 26.JUL.2017 12:07:19

Plot 7-112. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 99 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

MIMO Radiated Restricted Band Edge Measurements

§15.205 §15.209


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 2467MHz

Channel: 12

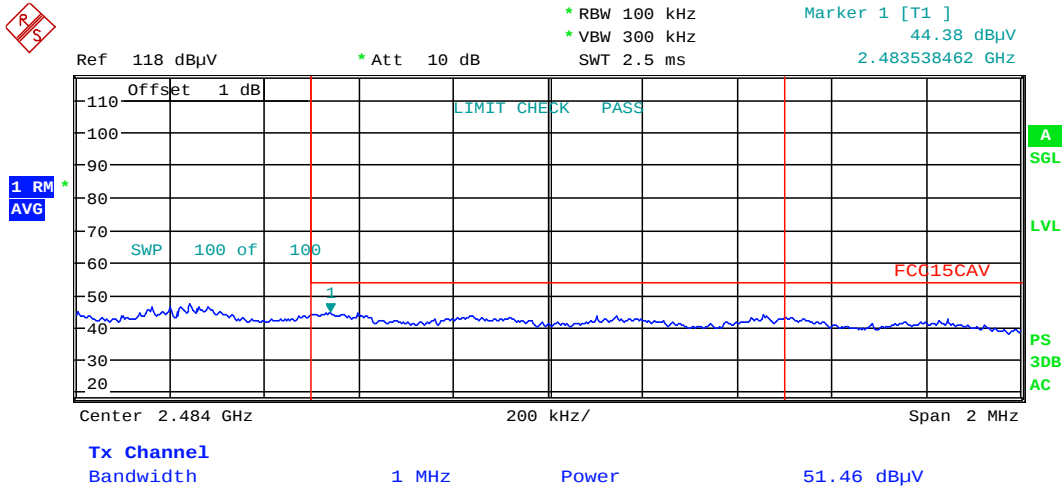

Date: 22.JUL.2017 16:00:49


Plot 7-113. Radiated Restricted Upper Band Edge Measurement (Average)

Per Section 13.3.1 of KDB 558074, the Integration method was used to determine compliance with the out-of-band emission limits.

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 100 of 125

MIMO Radiated Restricted Band Edge Measurements

§15.205 §15.209

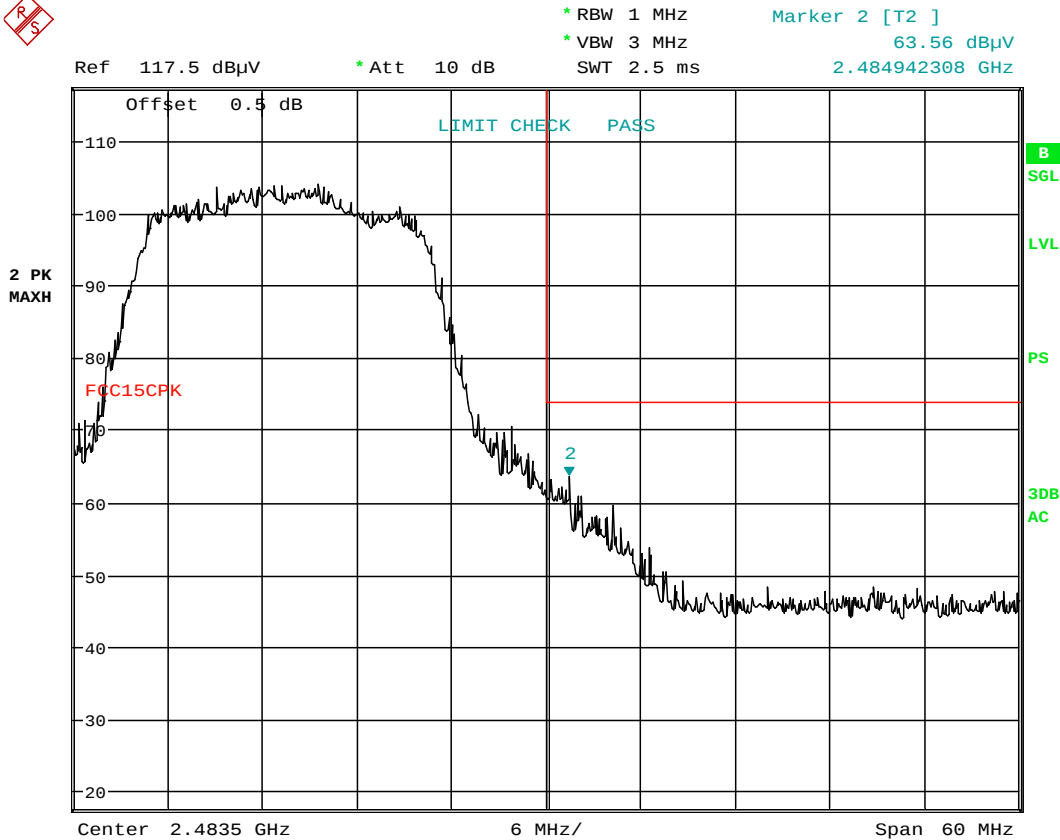

Date: 22.JUL.2017 16:01:29

Plot 7-114. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 101 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

MIMO Radiated Restricted Band Edge Measurements

§15.205 §15.209


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 2472MHz

Channel: 13

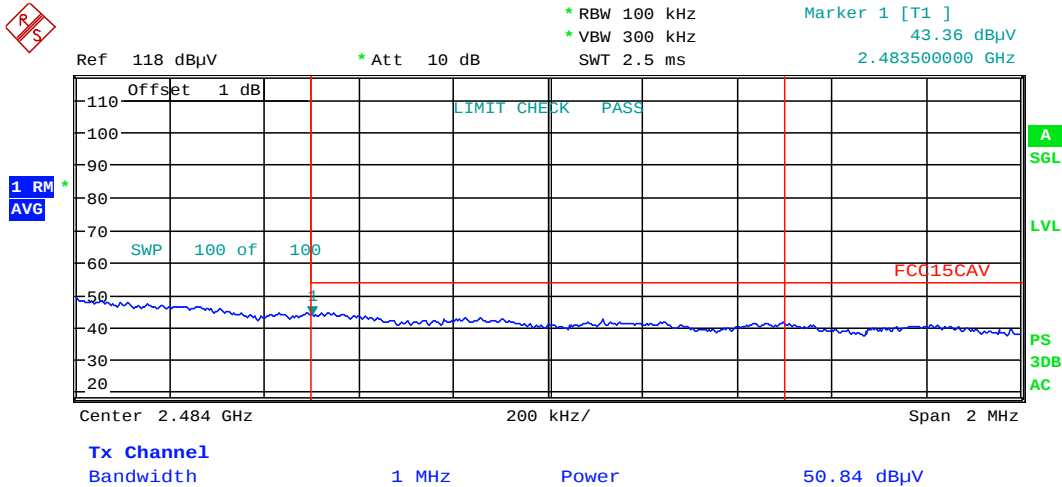

Date: 22.JUL.2017 16:14:28


Plot 7-115. Radiated Restricted Upper Band Edge Measurement (Average)

Per Section 13.3.1 of KDB 558074, the Integration method was used to determine compliance with the out-of-band emission limits.

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 102 of 125

MIMO Radiated Restricted Band Edge Measurements

§15.205 §15.209

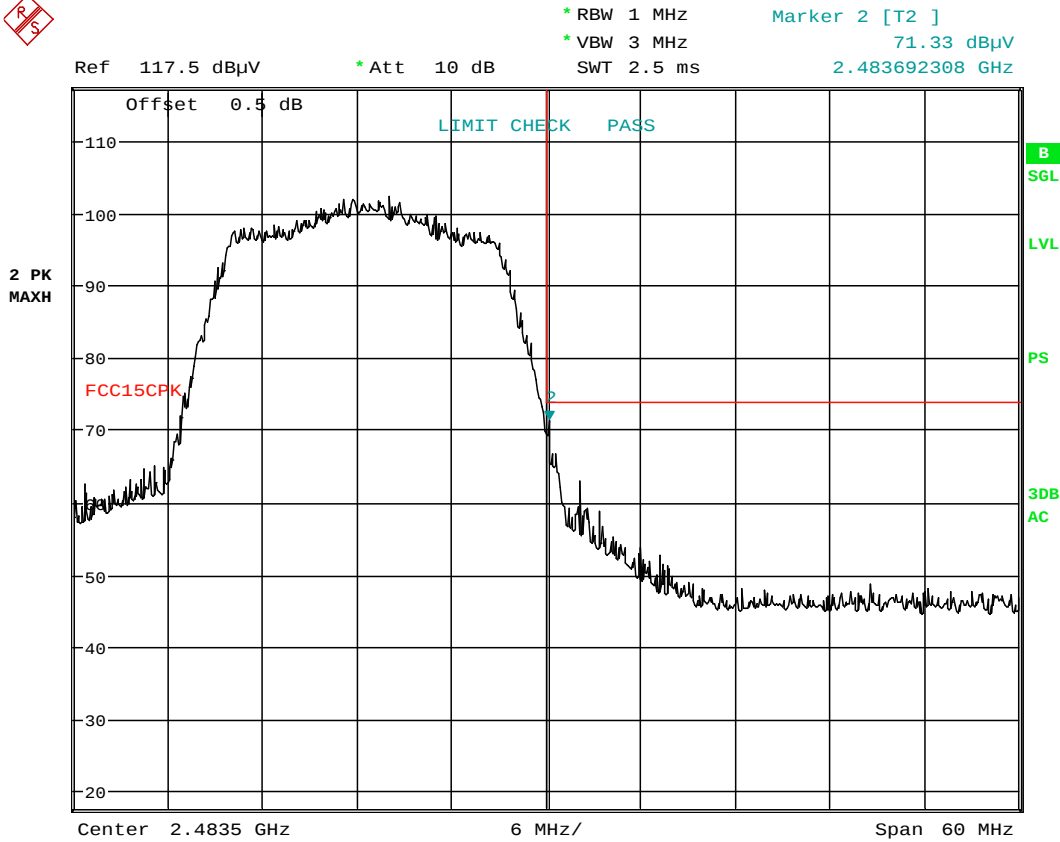

Date: 22.JUL.2017 16:11:17

Plot 7-116. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 103 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

MIMO WCP Radiated Restricted Band Edge Measurements

\$15.205 \$15.209


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

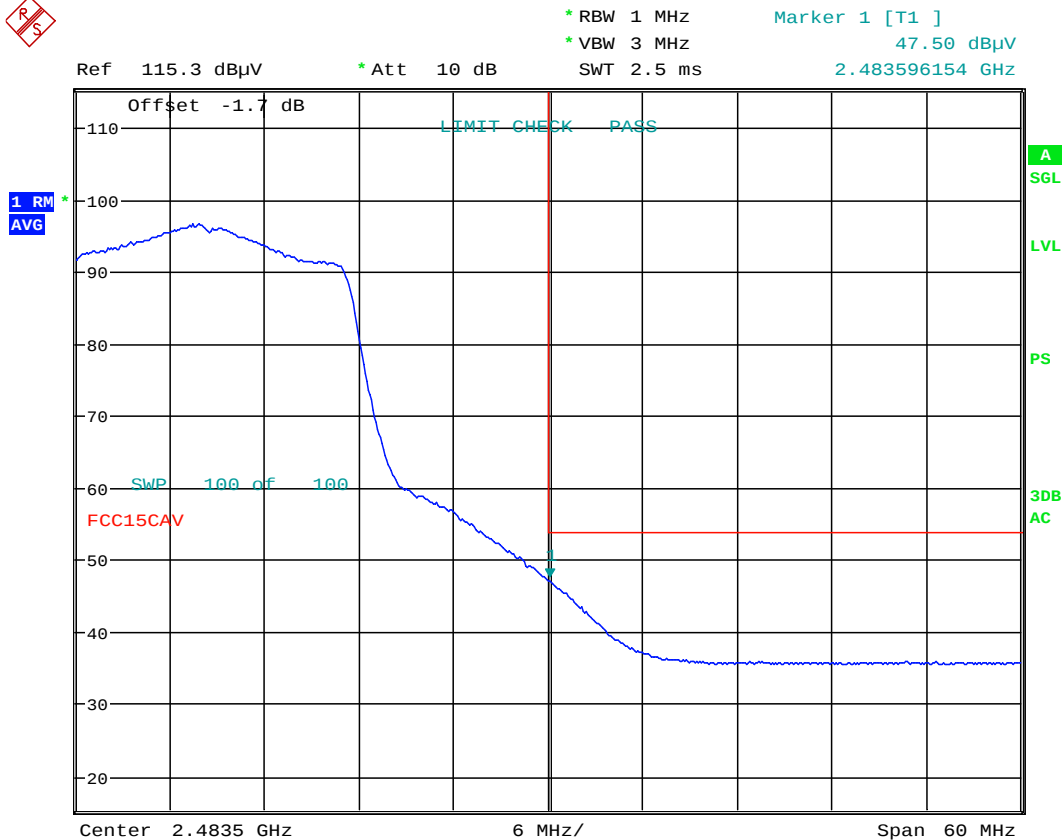


Date: 1.AUG.2017 11:03:32

Plot 7-117. Radiated Restricted Band Edge Measurement with WCP (Average)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 104 of 125

MIMO WCP Radiated Restricted Band Edge Measurements

§15.205 §15.209

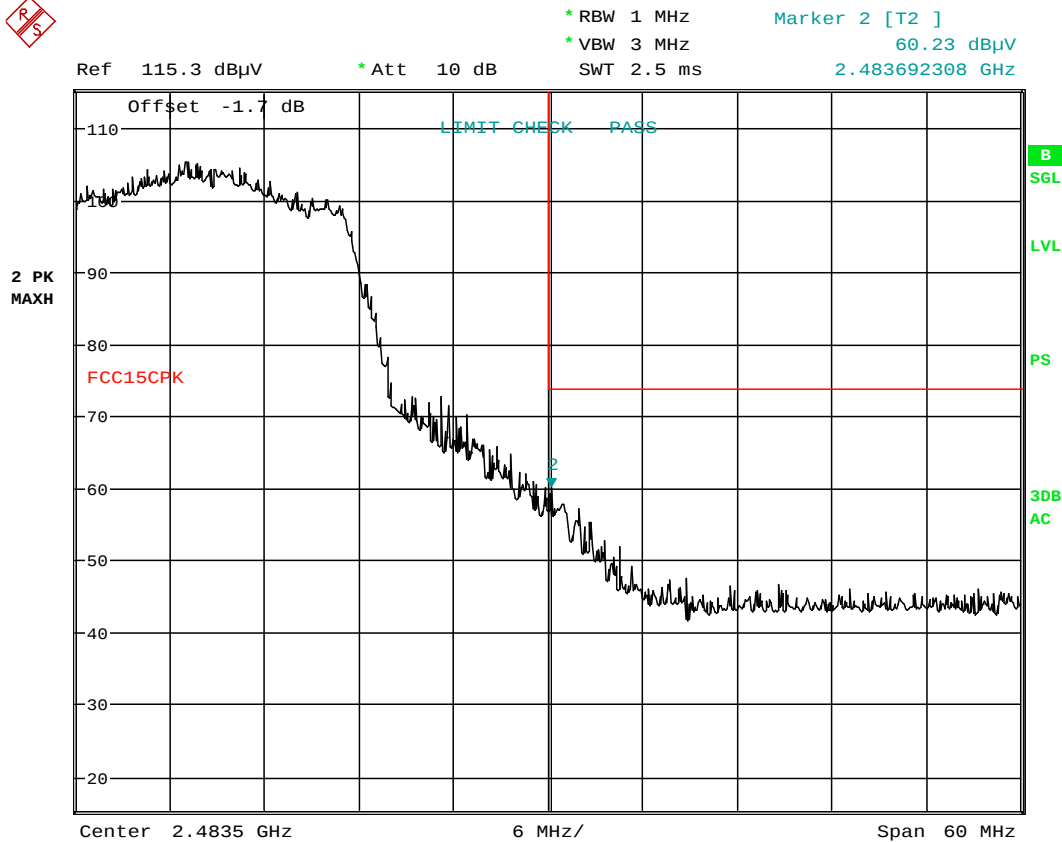

Date: 1.AUG.2017 11:03:48

Plot 7-118. Radiated Restricted Band Edge Measurement with WCP (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 105 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.8 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-19 per Section 15.209.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-19. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 106 of 125

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

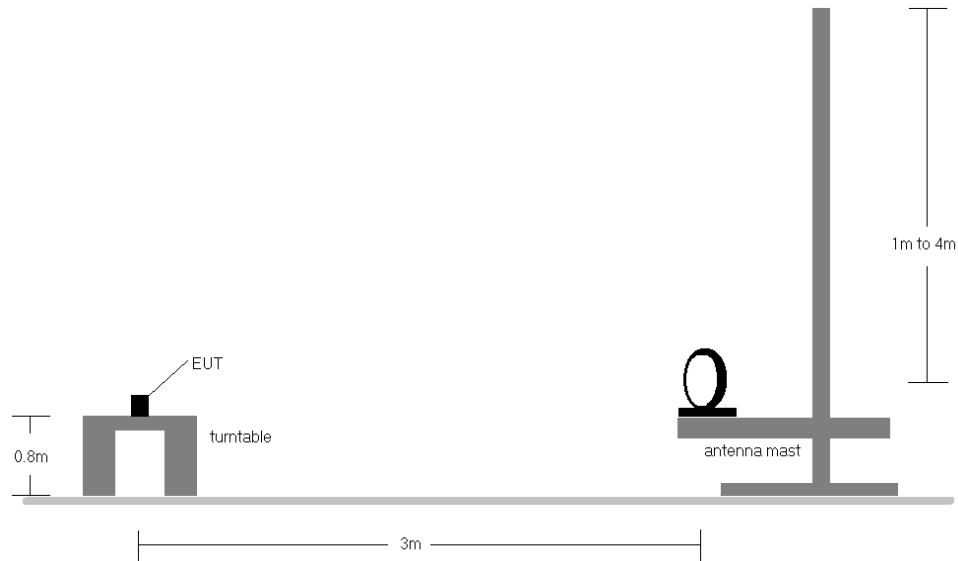


Figure 7-7. Radiated Test Setup < 30Mhz

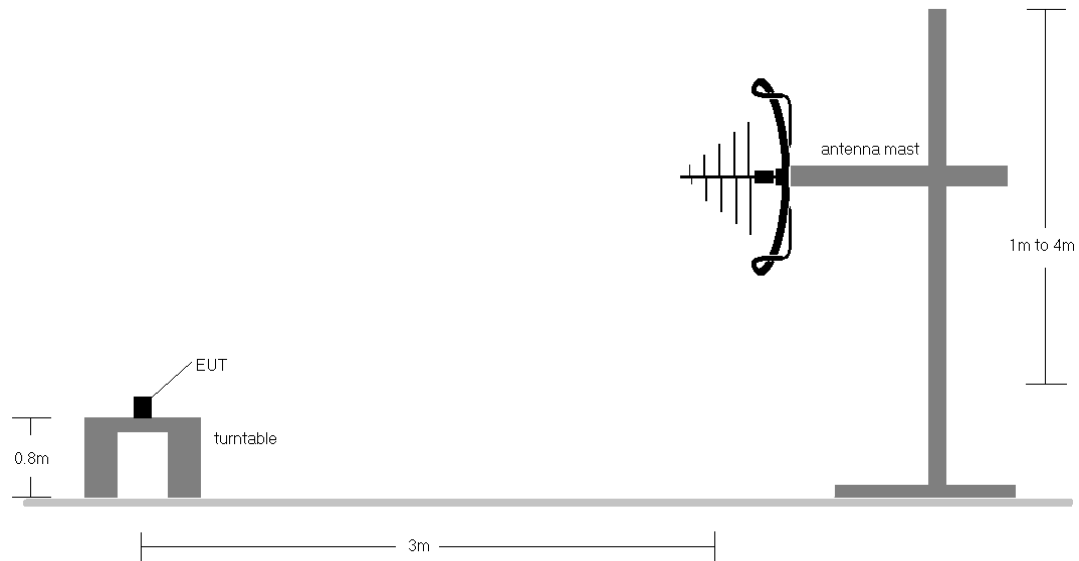


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 107 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.


Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-19.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.


FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset			Page 108 of 125

Antenna-1 Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209

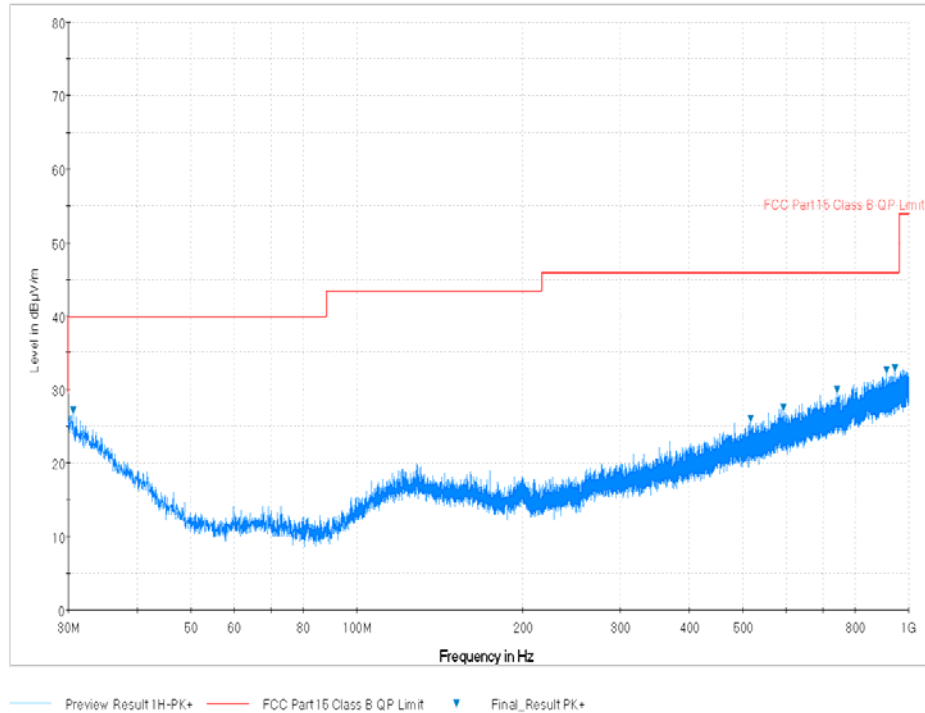


Plot 7-119. Radiated Spurious Plot below 1GHz (Pol. H)

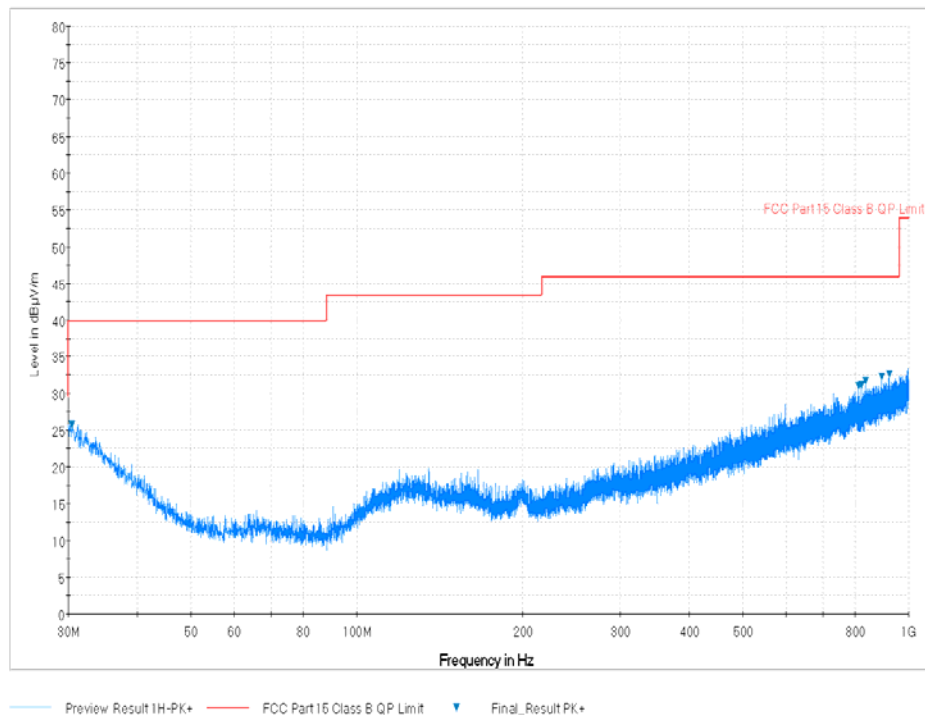


Plot 7-120. Radiated Spurious Plot below 1GHz (Pol. V)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 109 of 125

Antenna-2 Radiated Spurious Emissions Measurements (Below 1GHz) §15.209

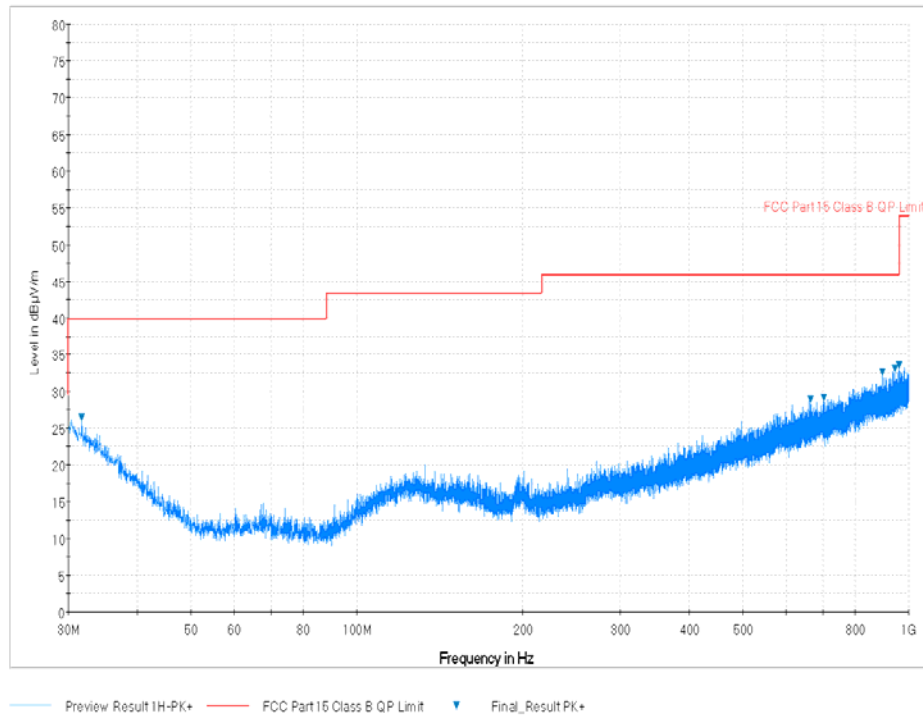

Plot 7-121. Radiated Spurious Plot below 1GHz (Pol. H)

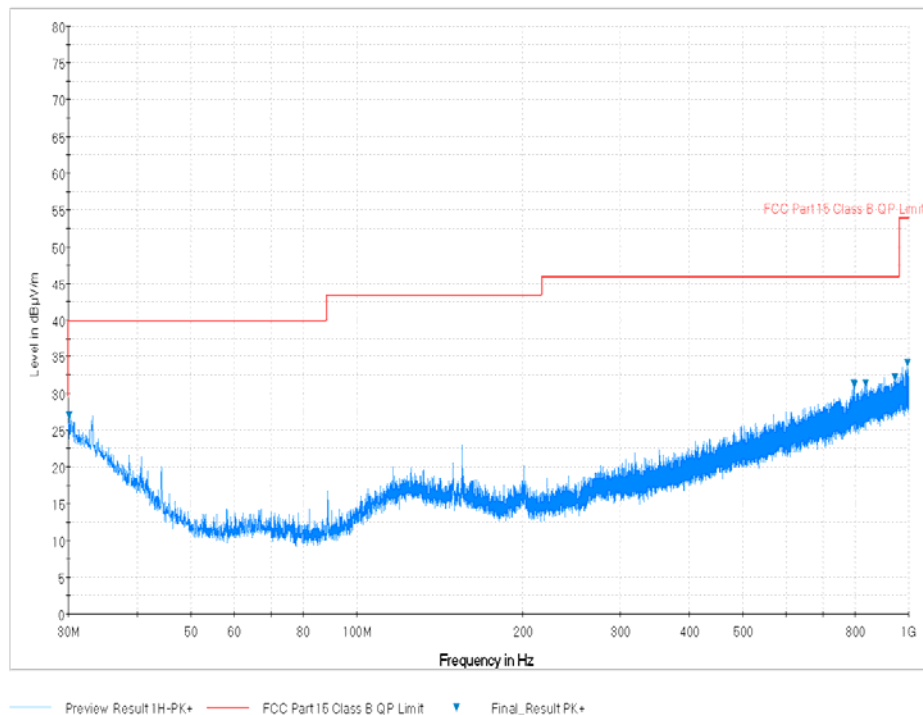

Plot 7-122. Radiated Spurious Plot below 1GHz (Pol. V)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 110 of 125

7.9 Line-Conducted Test Data

§15.207

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207.

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-20. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 111 of 125

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


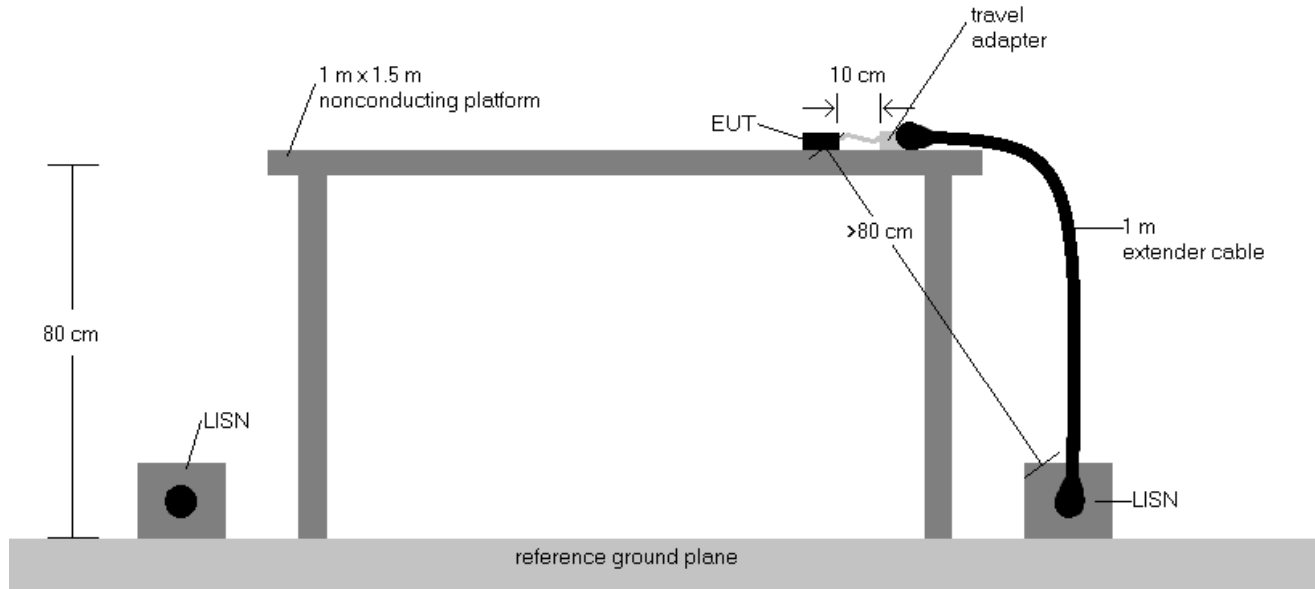


Figure 7-9. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207.
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 112 of 125

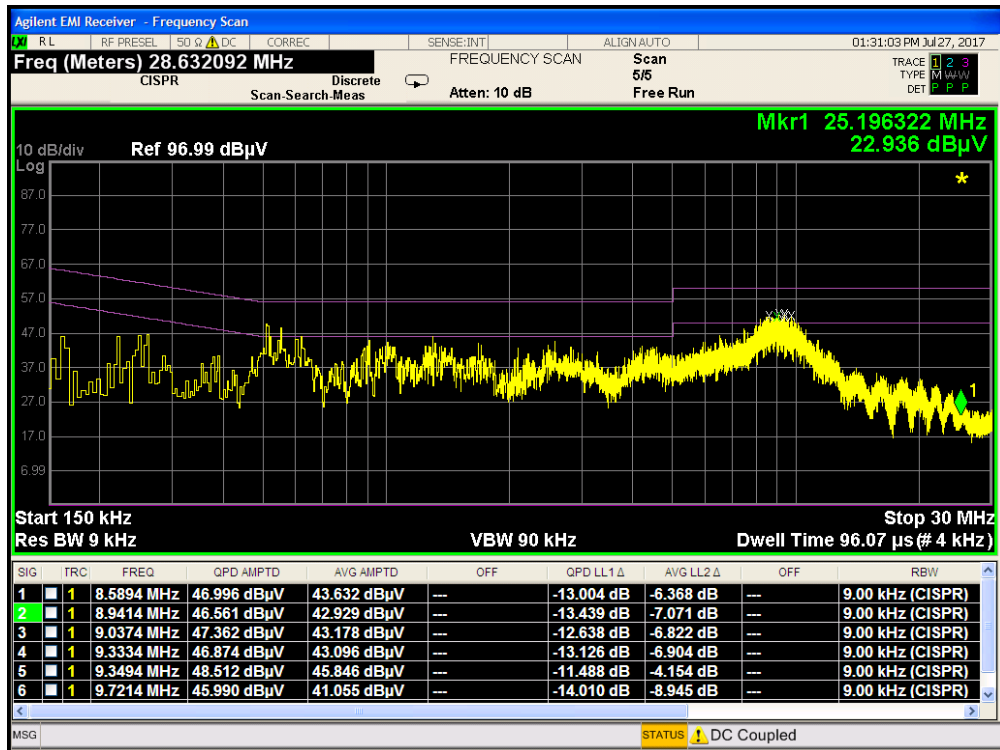

Plot 7-123. Line Conducted Plot with 802.11b (L1)

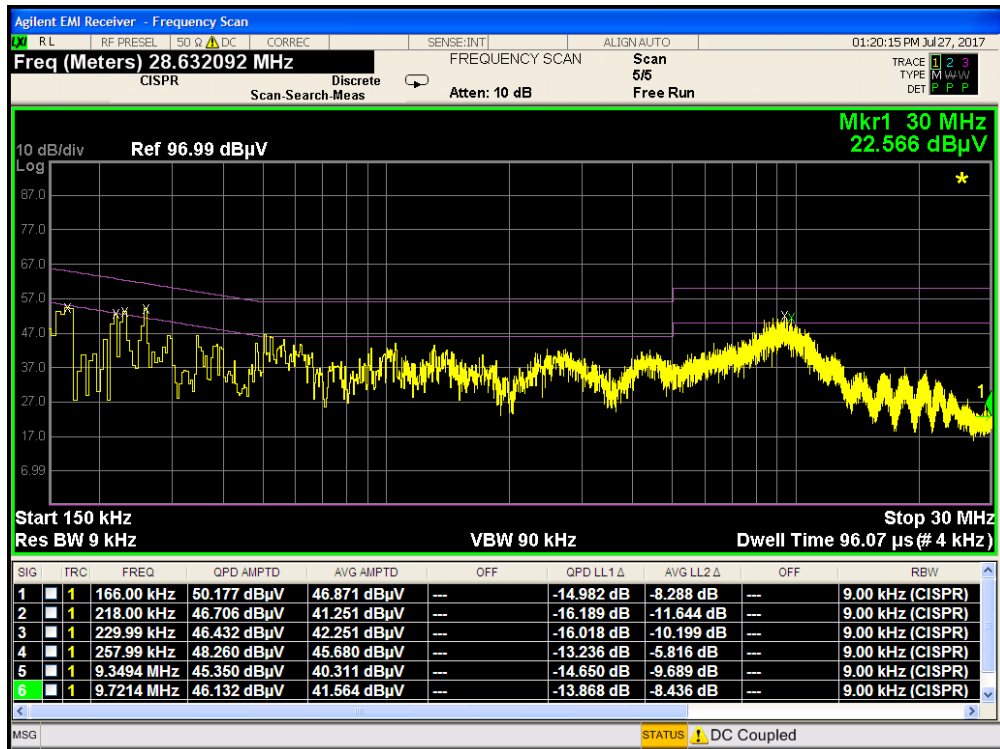

Plot 7-124. Line Conducted Plot with 802.11b (N)

FCC ID: A3LSC01K	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset	Page 113 of 125

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSC01K** is in compliance with Part 15C of the FCC Rules.

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 114 of 125

APPENDIX A. 802.11G DUAL TX

A.1 Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)					
15.247(b)(3)	Transmitter Output Power	< 1 Watt	CONDUCTED	PASS	Section A.2
15.247(e)	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section A.3
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	RADIATED	PASS	Section A.4

Table A.1-1. Summary of Test Results

Notes:

- 1) This device employs dual transmission in 802.11a and 802.11g modes using Cyclic Delay Diversity. For all test cases, the device was set to transmit from both antennas simultaneously. The data in this section demonstrates compliance to the dual-transmission requirements specified in KDB 662911 v02r01.
- 2) All data found in this section is compiled from plots found in the main body of this test report.
- 3) Since this device is able to transmit the same data through both of its antennas in a given symbol period, then, by the definition specified in KDB 662911 v02r01 Section F)1), the transmission symbols are correlated.
- 4) Since two antennas are supported in this device and a minimum of $N_{ss} = 1$ antenna can operate at any given time, the maximum array gain for two correlated signals is $10\log_{10}(N_{ant}/N_{ss}) = 3\text{dB}$, where N_{ss} is the number of spatial streams and N_{ant} is the total number of antennas.
- 5) For conducted spurious emissions, per KDB 662911 v02r01 Section E)3)b), the emissions on each individual output complied with its corresponding relative limit for that output, so additional testing was not required for dual transmission operation.

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset	Page 115 of 125	

A.2 Output Power Measurement

§15.247(b.3)

Test Overview

Using the “Measure and Sum” technique, the measured conducted power values were summed in linear power units then converted back to dBm. Original measured values are found in Section 7.3 of this report.

Freq [MHz]	Channel	Detector	2.4GHz Conducted Power [dBm]		
			IEEE Transmission Mode		
			ANT1	ANT2	CDD
2412	1	AVG	13.40	14.10	16.77
		PEAK	21.31	21.42	24.38
2437	6	AVG	14.40	13.04	16.78
		PEAK	21.73	21.07	24.42
2462	11	AVG	14.21	13.71	16.98
		PEAK	21.82	21.51	24.68
2467	12	AVG	12.03	11.62	14.84
		PEAK	20.14	19.29	22.75
2472	13	AVG	9.03	9.08	12.07
		PEAK	16.47	16.99	19.75

Table A2-3. Dual Tx 802.11g-mode Conducted Output Power Measurements

Note:

Per KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample CDD Calculation:

At 2412 MHz the average conducted output power was measured to be 13.40 dBm for Antenna-1 and 14.10 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{CDD}$$

$$(13.40 \text{ dBm} + 14.10 \text{ dBm}) = (21.87 \text{ mW} + 25.70 \text{ mW}) = 47.57 \text{ mW} = 16.77 \text{ dBm}$$

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 116 of 125

A.3 Power Spectral Density

§15.247(e)

Test Overview

Using the “Measure and Sum” technique, the measured conducted power density values were summed in linear power units then converted back to dBm. Original measured values are found in Section 7.4 of this report.

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	ANT 1 Power Spectral Density [dBm]	ANT 2 Power Spectral Density [dBm]	Summed CDD Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	g	6.5/7.2 (MCS0)	-1.46	-0.15	2.25	8.00	-5.75	Pass
2437	6	g	6.5/7.2 (MCS0)	-0.11	-0.02	2.95	8.00	-5.05	Pass
2462	11	g	6.5/7.2 (MCS0)	-0.76	-1.53	1.88	8.00	-6.12	Pass

Table A3-3.802.11g Dual Tx Conducted Power Density Measurements

Note:

Per KDB 662911 D01 v02r01 Section E)2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample CDD Calculation:

At 2412MHz the average conducted power spectral density was measured to be -1.46 dBm for Antenna-1 and -0.15 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{CDD}$$

$$(-1.46 \text{ dBm} + -0.15 \text{ dBm}) = (0.71 \text{ mW} + 0.97 \text{ mW}) = 1.68 \text{ mW} = 2.25 \text{ dBm}$$

FCC ID: A3LSC01K		FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 117 of 125

A.4 Dual Tx Radiated Restricted Band Edge Measurements

§15.205 §15.209

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting on both outputs in 802.11g mode.


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz

Channel: 1

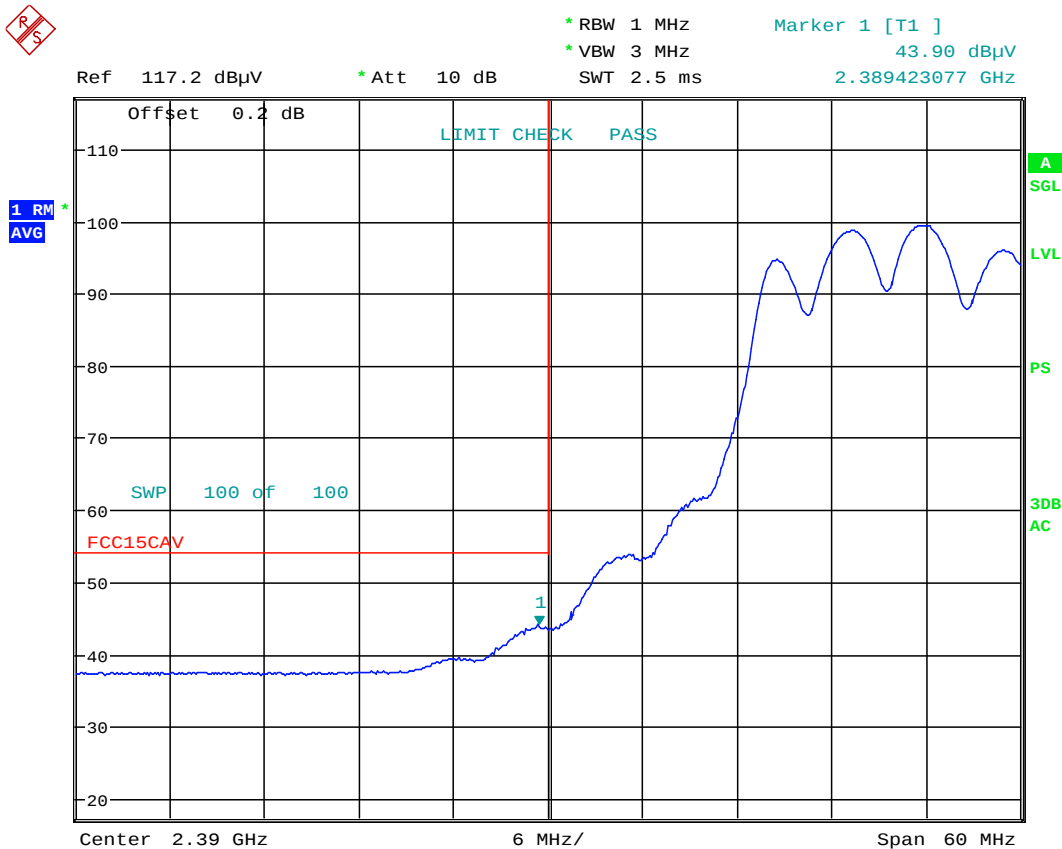


Date: 26.JUL.2017 12:18:06

Plot A4-1. Radiated Restricted Lower Band Edge Measurement (Average)

FCC ID: A3LSC01K	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset	Page 118 of 125

Dual Tx Radiated Restricted Band Edge Measurements

§15.205 §15.209

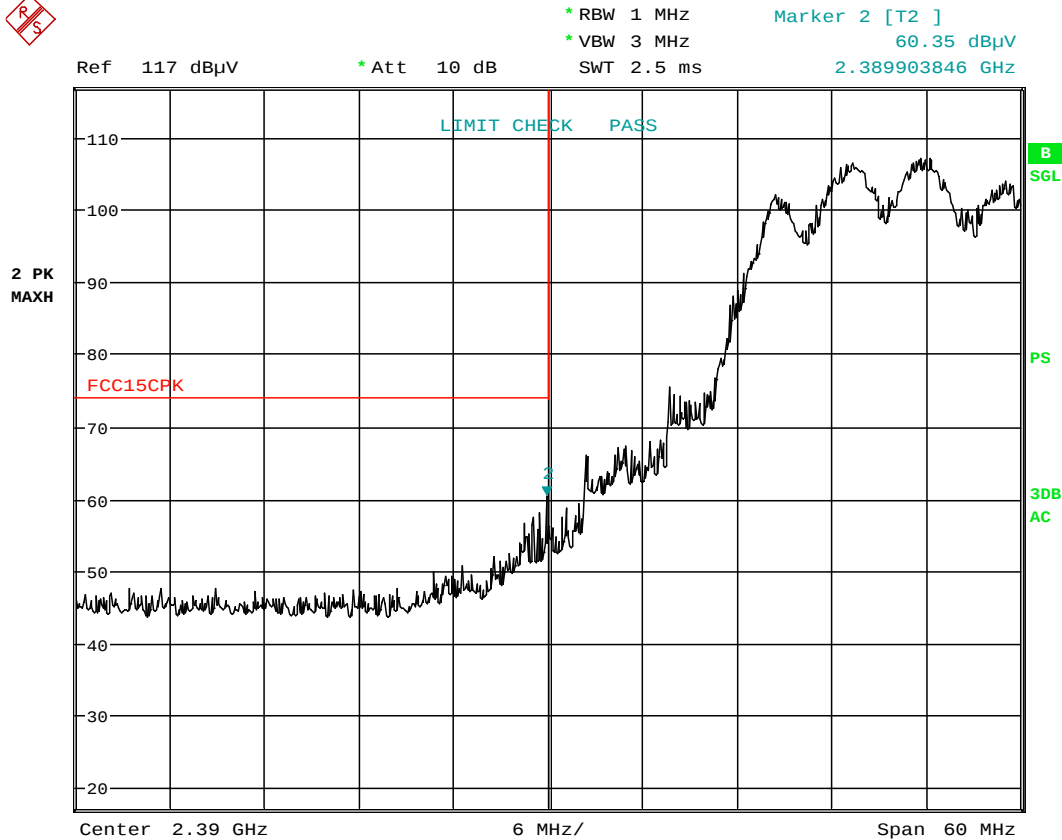

Date: 26.JUL.2017 12:18:31

Plot A4-2. Radiated Restricted Lower Band Edge Measurement (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 119 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Dual Tx Radiated Restricted Band Edge Measurements

§15.205 §15.209


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

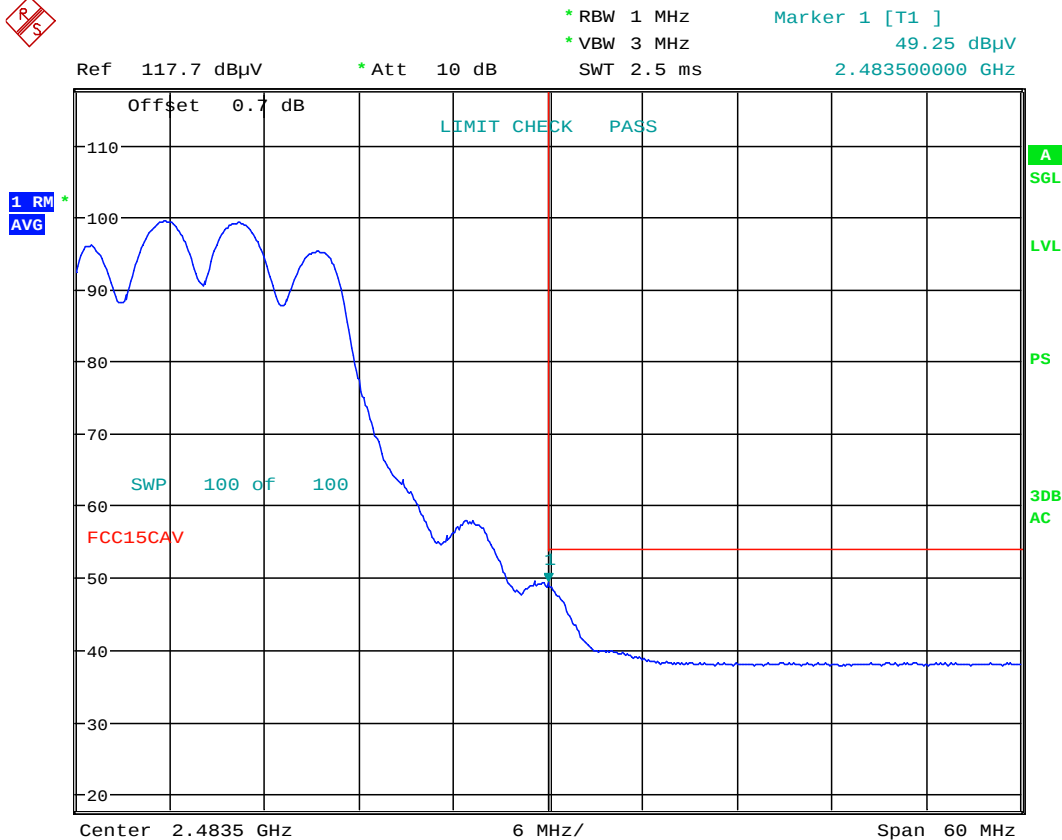

Date: 26.JUL.2017 12:13:43

Plot A4-3. Radiated Restricted Upper Band Edge Measurement (Average)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 120 of 125

© 2017 PCTEST Engineering Laboratory, Inc.


V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Dual Tx Radiated Restricted Band Edge Measurements

§15.205 §15.209

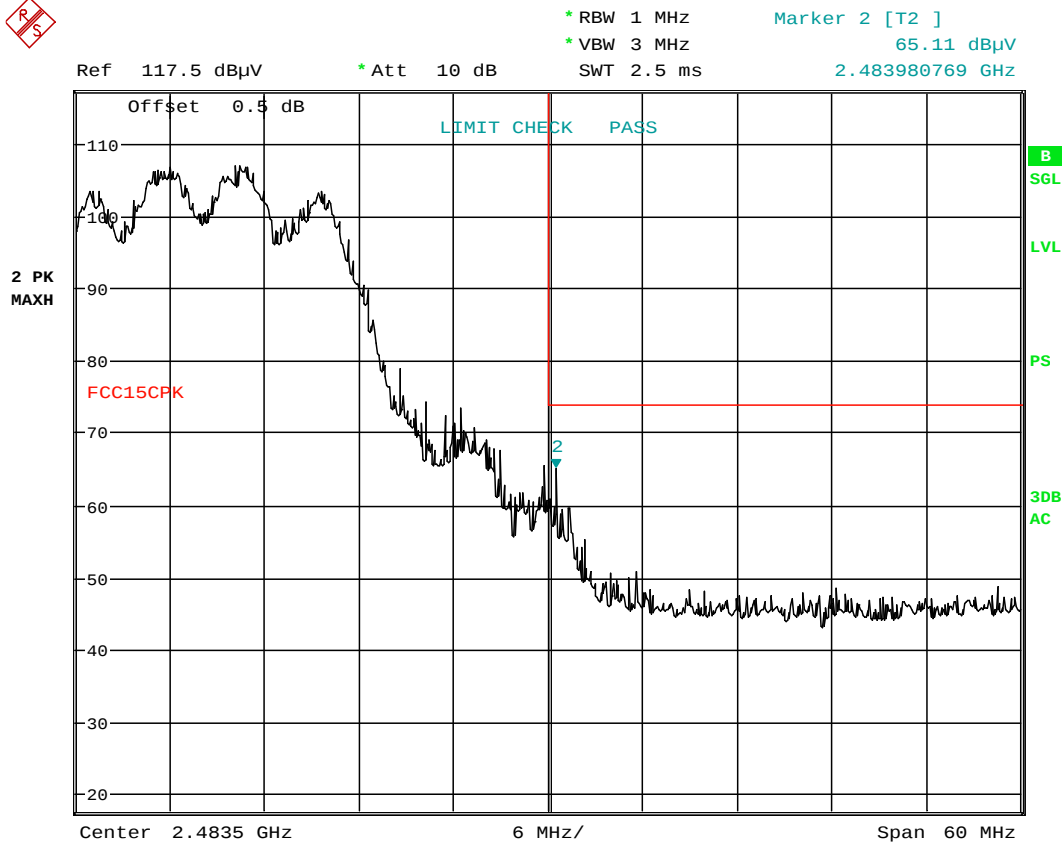

Date: 26.JUL.2017 12:12:02

Plot A4-4. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 121 of 125

© 2017 PCTEST Engineering Laboratory, Inc.


V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Dual Tx Radiated Restricted Band Edge Measurements §15.205 §15.209

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

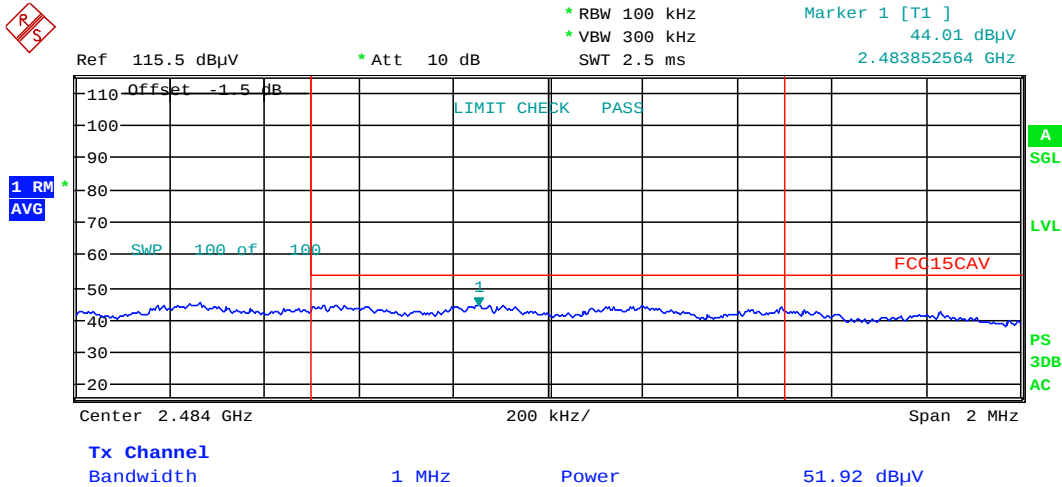

Date: 15.AUG.2017 08:20:34


Plot A4-5. Radiated Restricted Upper Band Edge Measurement (Average)

Per Section 13.3.1 of KDB 558074, the Integration method was used to determine compliance with the out-of-band emission limits.

FCC ID: A3LSC01K	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset	Page 122 of 125

Dual Tx Radiated Restricted Band Edge Measurements

§15.205 §15.209

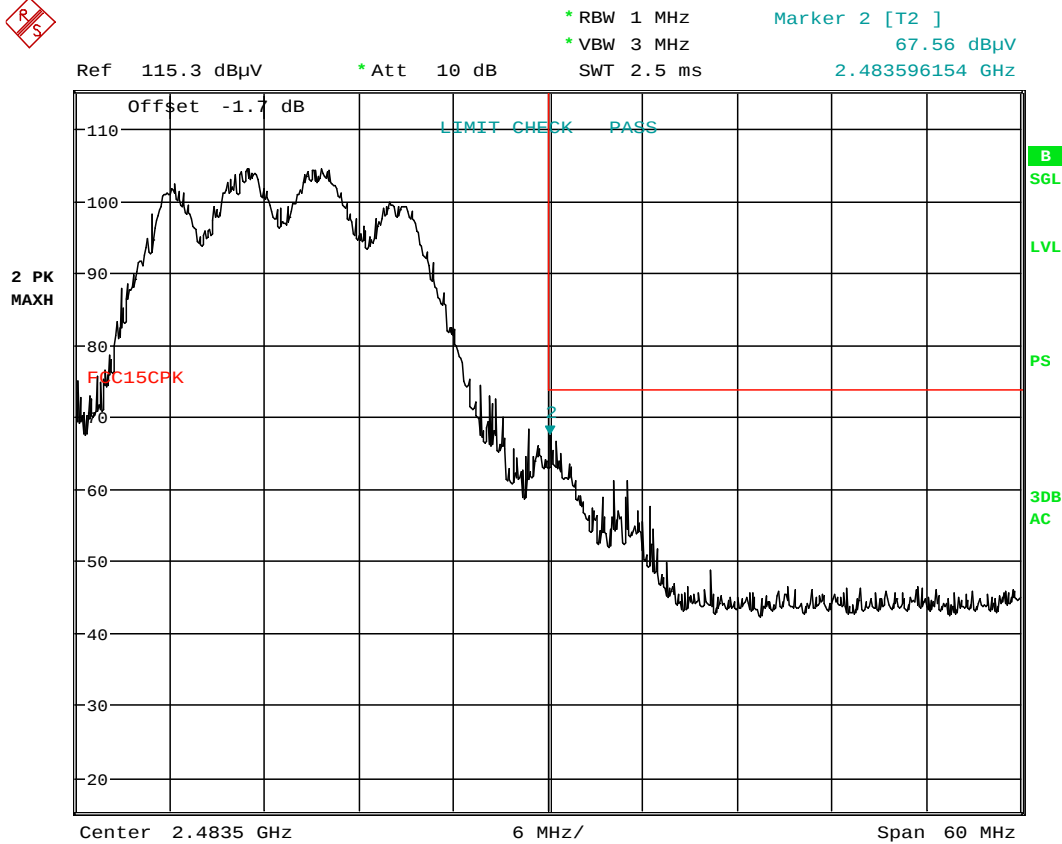

Date: 15.AUG.2017 08:21:29

Plot A4-6. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 123 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Dual Tx Radiated Restricted Band Edge Measurements §15.205 §15.209


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2472MHz

Channel: 13

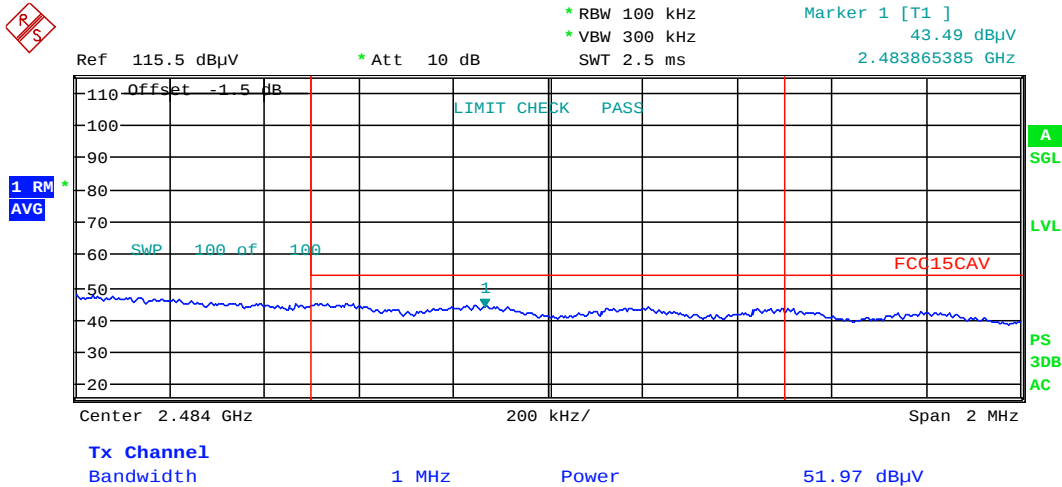

Date: 15.AUG.2017 08:24:00


Plot A4-7. Radiated Restricted Upper Band Edge Measurement (Average)

Per Section 13.3.1 of KDB 558074, the Integration method was used to determine compliance with the out-of-band emission limits.

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 124 of 125

Dual Tx Radiated Restricted Band Edge Measurements

§15.205 §15.209

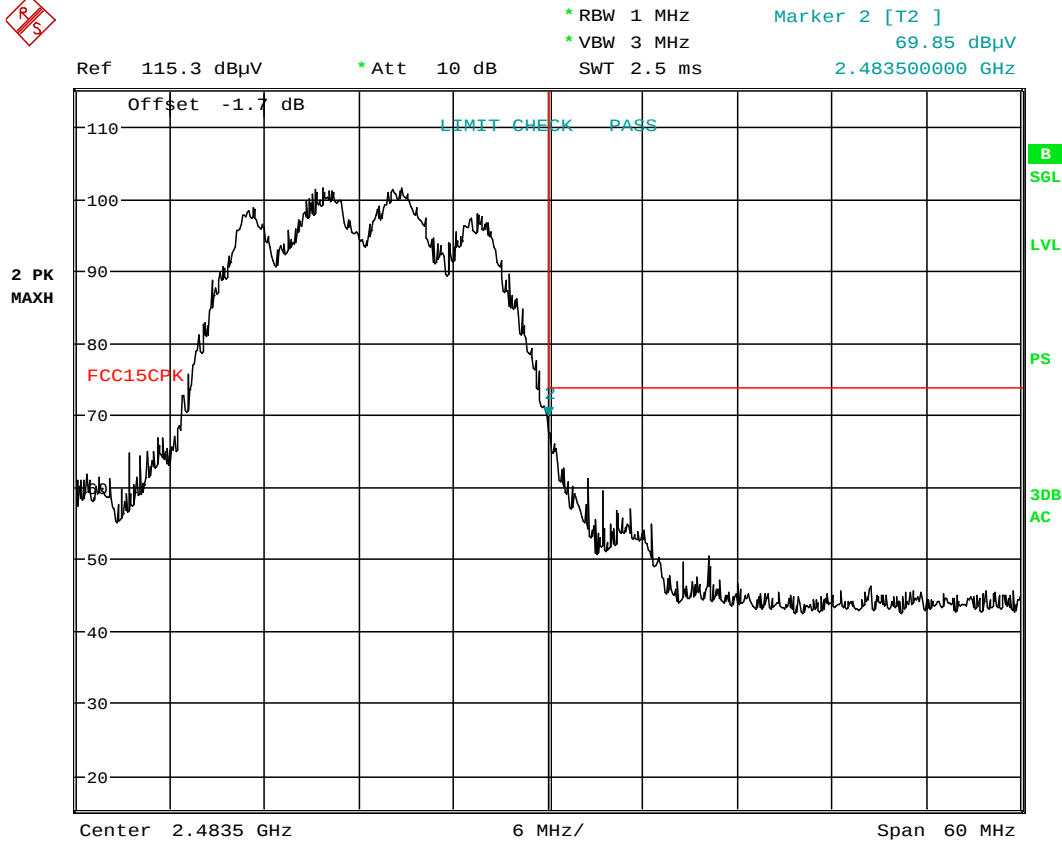

Date: 15.AUG.2017 08:23:02

Plot A4-8. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: A3LSC01K	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1707170219-04-R2.A3L	Test Dates: 7/21-8/25/2017	EUT Type: Portable Handset		Page 125 of 125

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.8

07/14/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.