

Product Specification	Material E.	RF E.	Reviewed by	Approved by
	/	/	/	/
	Description	RETRACTABLE ANT.		
	Model	SCH- A310		
Supplier Code				

Attached Documents

Classi- fication No.	Table of Contents	NO of Copy
1	Product Specification	6
2	Specifications	6
3	Properties	6
4	Drawings	6
5	Processing Flow Chart	6
6	Inspection Sheet	6
7		

Please approve this product with specifications.

Address : #236-49 Jusan-G-Dong Nam-Ku, Incheon Korea

Trade Name : SB TELCOM, LTD.

Substitute : President Bang - Soon, Chang (sign)



SB TELCOM CO., LTD.

Antenna Specifications	MODEL	SCH-A310	
Cover sheet	REV.	OR	PAGE

1 / 11

Antenna Specifications

MODEL : SCH- A310

#25-49 Juan5-Dong, Nam-Ku, Inchon, Korea
TEL:(032)864-8883 FAX:(032)864-8884



SB TELCOM CO.,LTD.

24. FEB.2002

- Table of contents -



SB TELCOM CO., LTD

Antenna Specifications	MODEL	SCH- A310	
Table of contents	REV.	OR	PAGE
			2 / 11
1. General			
1.1 The Product	- -	3	PAGE
1.2 Electrical Properties	- -	3	PAGE
1.3 Mechanical Properties	- -	3	PAGE
1.4 Packing	- -	4	PAGE
2. Electrical Properties			
2.1 Frequency Bands	- -	5	PAGE
2.2 Impedance	- -	5	PAGE
2.3 GAIN	- -	6	PAGE
3. Mechanical Properties			
3.1 Appearance	- -	7	PAGE
3.2 Helix Deformation	- -	7	PAGE
3.3 Whip Pulling Force	- -	7	PAGE
3.4 Drop	- -	8	PAGE
3.5 Whip Bending Endurance	- -	8	PAGE
3.6 Whip Deformation	- -	9	PAGE
3.7 Random Vibration	- -	9	PAGE
3.8 Whip Extension and Retraction Forces	- -	10	PAGE
3.9 Torque	- -	10	PAGE
4. Environmental Resistance Properties			
4.1 Test Surroundings	- -	11	PAGE
4.2 Humidity	- -	11	PAGE
4.3 Temperature Cycling	- -	11	PAGE
1. General			
1.1 The Product			

Antenna Specifications	MODEL	SCH- A310	
1. General	REV.	0R	PAGE
			3 / 11

MODEL	NSB88C - 0200800/1900 - SS112
ANTENNA TYPE	Extendable with 1/2 Helical Over 1/2 whip
APPLICATIONS	DUAL PHONE ANTENNA

1.2 Electrical Properties

FREQUENCY RANGE	AMPS	824 ~ 894MHz
FREQUENCY RANGE	US-PCS	1850 ~ 1990MHz
IMPEDANCE		50Ω (NOMINAL)
V.S.W.R	AMPS	LESS THAN 2.5 : 1 (Ret Position)
		LESS THAN 2.5 : 1 (Ext Position)
	US-PCS	LESS THAN 2.5 : 1 (Ret Position)
		LESS THAN 4.7 : 1 (Ext Position)
RADIATION PATTERN		OMNI-DIRECTIONAL
POLARIZATION		VERTICAL

1.3 Mechanical Properties

LENGTH	118.0 (+1.0mm, -1.0mm)
TEMPERATURE	-30 °C ~ +70°C
CONNECTOR TYPE	SCREW TYPE



1.4 Packing

① Packing Condition

26EA of antennas are placed on a pad (H480 X W250 X B340)



SB TELCOM CO., LTD.

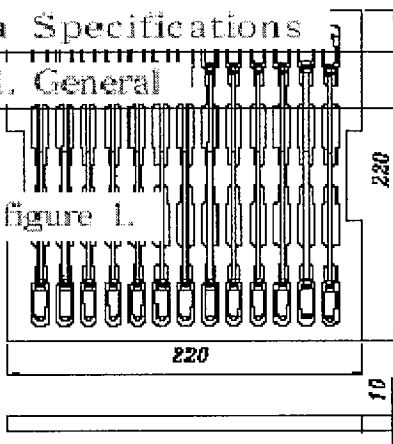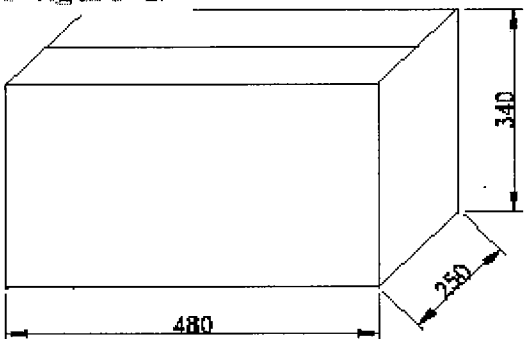Antenna Specifications		MODEL	SCH-A310	
1. General		REV.	OR	PAGE
 according to figure 1.				4 / 11
(FIG. 1)				
A box contains 40 pads and 1040 antennas and be packing according to figure 2. 				
(FIG. 2)				
② Remarks A change of packing material shall be executed with mutual approval between buyer and supplier.				
2. Electrical Properties				
2.1 Frequency Range				



Antenna Specifications	MODEL	SCH-A310	
2. Electrical Properties	REV.	0R	PAGE
			5 / 11

AMPS : 824 ~ 894MHz


US-PCS : 1850 ~ 1990MHz

2.2 Impedance

① Nominal Value : 50 Ω

② Method

To measure the appropriate impedance with the frequency desired after connecting a handset with the antenna installed to the reflection point from the network analyzer.

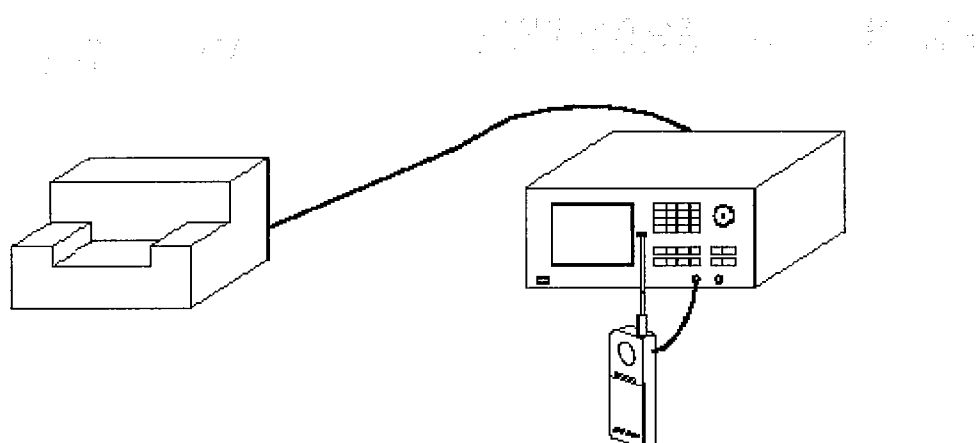

(FIG. 3)

2.3 GAIN

Below are minimum peak gain values of the frequency with the lowest peak gain within each band including production variation influences.



SB TELCOM CO., LTD.

Antenna Specifications	MODEL	SCH-A310	
2. Electrical Properties	REV.	OR	PAGE
			6 / 11

2.3.1 Minimum Peak Values-Free Space


BAND	MODE	TX	RX
824 ~ 894MHz	Retracted (dBi)	-3.5	-2.5
	Extended (dBi)	-1.0	-0.5
1850 ~ 1990MHz	Retracted (dBi)	-4.4	-3.5
	Extended (dBi)	-3.2	-3.2

2.5.2 Method of Measurement

The connection is done according to Radiation Pattern are Measured at the Tx and Rx band edges for each Band. The measurements are Performed so as to minimize the influence of the cables.

Only the coplanar polarization component is measured. The antenna is measure in 2 orthogonal E-planes in free Space.

The antenna is measured in free space calibration for absolute Measurements is done with a reference antenna which is in turn calibrated by a certified calibration company.

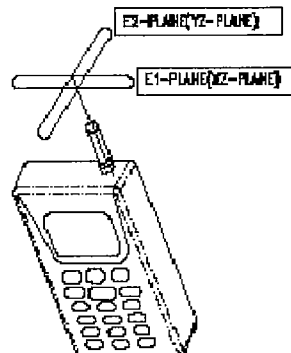

3. Mechanical Properties


3.1 Appearance

The appearance shall be according to specification drawing



Antenna Specifications	MODEL	SCH-A310	
3. Mechanical Properties	REV.	OR	PAGE
			7 / 11

3.2 Helix Deformation




The antenna is assembled to the test equipment according to figure 4.


A force of 5kg.f is applied perpendicular to the antenna 10mm below the Top of the helix.

3.3 Whip Pulling Force

- ① The knob of the antenna is assembled to the fixed equipment. A force of 7kg.f on the whip is applied during 30s parallel to the antenna axis from the fixed knob.

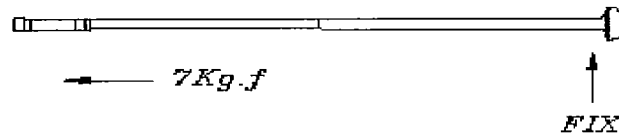



- ② The stopper of the antenna is assembled to the fixed equipment. A force of 7kg.f on the whip is applied during 30 s parallel to the antenna axis from the fixed stopper,



3.4 Drop

The antenna is attached to the handset or an equivalent test fixture. The handset is dropped with the antenna downward from the height of 1.5m onto a wood panel with thickness of 10mm prepared on the ground.

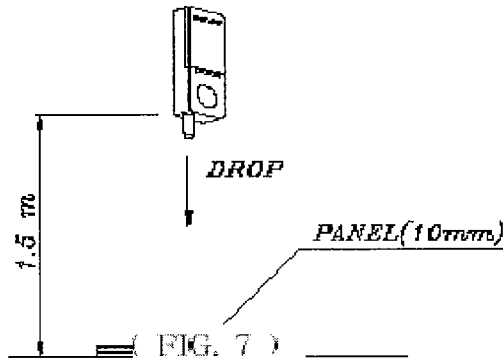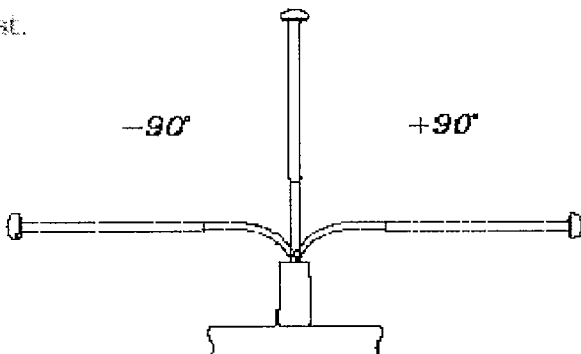

Antenna Specifications	MODEL	SCH-A310	
3. Mechanical Properties	REV.	OR	PAGE
			8 / 11
			
3.5 Whip Bending Endurance The antenna assembled to the test equipment in extended mode according to figure 8. The antenna is bent 90 left and 90 right (1 cycle) with 6 cycles per 1 minute. This is repeated for the duration for the test.  <i>Bending Cycle : 400 Cycle</i> (FIG. 8)			
3.6 Whip Deformation The antenna is bent 180 around a cylinder with diameter 40mm in extended mode according to figure 9. The antenna is released and sprung back to vertical position.			



Antenna Specifications	MODEL	SCH-A310
3. Mechanical Properties	REV.	OR 32
		PAGE
		9 / 11

* "A" zone : No remaining deformation


* "B" zone : No fracture

(FIG. 9)

3.7 Random Vibration

The extended antenna assembled to the test equipment. The vibration is done both in X and Z directions according to figure 10 with duration of 2 hours in each direction.

- * Frequency Bands: 10 ~ 50Hz
- * Maximum Amplitude: A = 1.5mm
- * Duration: 2 Hour

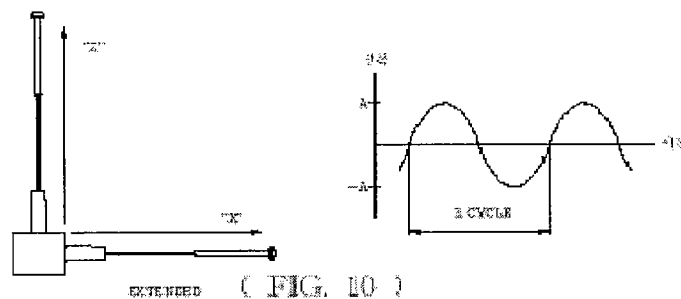

3.8 Whip Extension and Retraction Forces

① Whip Extension Force

The stopper of the antenna is pushed from retracted mode.

The maximum force before the antenna is released from retracted mode is registered. The mean value of measurements on the antennas shall be within 100g ~ 300g.



Antenna Specifications	MODEL	SCH-A310
3. Mechanical Properties	REV.	0R
		PAGE
		10 / 11


SECESSION FORCE : 100g ~ 300g

(FIG. 11)

② Whip Retraction Force

The knob of the antenna is pushed from extended mode. The maximum force before the antenna is released from extended mode is registered.

The mean value of measurements on the antennas shall be within 150g ~ 350g.




(FIG. 12)

INSERTION FORCE : 150g ~ 450g

3.9 Torque

The antenna is assembled to the test equipment. A torque instrument is attached to the helical antenna without introduction of any radial force. The specified torque, 3kg.f, is applied in a clockwise direction according to figure 13.



(FIG. 13)

4. Environmental Resistance Properties

4.1 Test Surroundings

The antenna is placed at temperature 20C $\pm$ 5C and humidity 25%~80%(Under 55% RH) for executing all testes (Electrical, Mechanical and Environmental Tests).



SB TELCOM CO., LTD.

Antenna Specifications	MODEL	SCH- A310	
4. Environmental Resistance Properties	REV.	OR	PAGE
			11 / 11

4.2 Humidity


Temperature : 20C $\pm$ 2C

Humidity : 93%RH $\pm$ 2,

The antenna is placed in a climatic chamber for 24 hours. And the procedures are executed based on KSC-0222.

4.3 Temperature Cycling


The antenna is placed in a climate chamber. The temperature is cycled as follows: The temperature is kept constant at -10C for $\frac{1}{2}$ hour, kept constant at +25C for 1/6 hour, kept constant at +60C for $\frac{1}{2}$ hour, kept at +25C for 1/6 hour and then moved back to the chamber at -10C. This procedure is repeated 5 times. The procedures are executed based on KSC-0222.

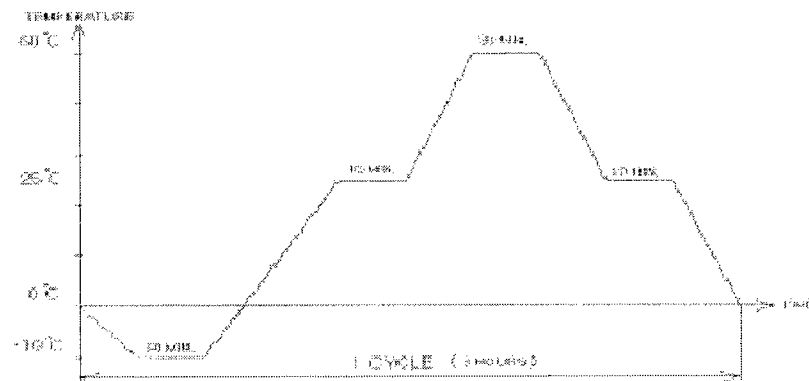


(FIG. 14)

ACCTD	MRK.	DATE	REVISION		SIGN

DIMENSION	LIMITS
1mm ~ 20mm	± 0.1
21mm ~ 40mm	± 0.2
41mm ~ 80mm	± 0.3
81mm ~ 100mm	± 0.4
101mm ~	± 0.5



DETAIL "A"

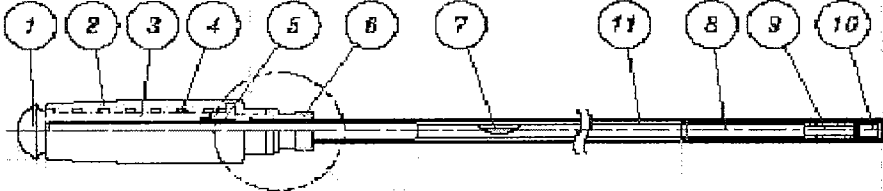

11	TSS-1056	TUBE	P.P	1	COLOR : B/K
10	RSS-1086	METAL ROD	BRASS(BSBM2)	1	Ni PLATED
9	RSS-1064	METAL ROD	BRASS(BSBM2)	1	Ni PLATED
8	RSS-9002	ELEMENT(ROD)	SUS	1	
7		WIRE	Ni-Ti WIRE	1	φ0.08 X 79.1L
6	RSS-1057	METAL ROD	BRASS(BSBM2)	1	Ni PLATED
5	C-RING(φ2.2 X 5.0L)	C-RING	C1720-HW	1	Ni PLATED
4	SS-9023	SPRING	STEEL WIRE(φ0.4 X 3)	1	Ni PLATED
3	ASS-1022	BOBBIN	POLYURETHANE(K-295PCAT)	1	COLOR : B/K
2	NSB88C	PIPE	POLYURETHANE(K-295PCAT)	1	COLOR : B/K
1	END-12(B)	END	KMS33H1-2	1	COLOR : B/K

NO.	PARTS NO.	NAME	MATERIAL	QTY.
DRAW BY		CHECK BY	APPROVE BY	SCALE N/S
DRAWING CODE NUMBER		MODEL NAME (SCH-NS70) NSB88C-0200800/1900-SS112		UNIT mm
		PARTS NAME		

SB TELCOM CO.,LTD.