

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-A600; Type: SAMSUNG Tri Mode Phone; Serial: TEST2
Program: SCH-A600 AMPS, Right; Conducted Power: 26.0 dBm.

Communication System: AMPS; Frequency: 824.04 MHz; Duty Cycle: 1:1

Medium: 835 Brain ($\sigma = 0.88$ mho/m, $\epsilon_r = 39.86$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 07-25-2003; Ambient Temp: 22.8°C; Tissue Temp: 20.7°C

Probe: ET3DV6 - SN1560; ConvF(6.9, 6.9, 6.9); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Touch, ch991, Ant In, Standard Battery


Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.67 mW/g

Reference Value = 7.6 V/m

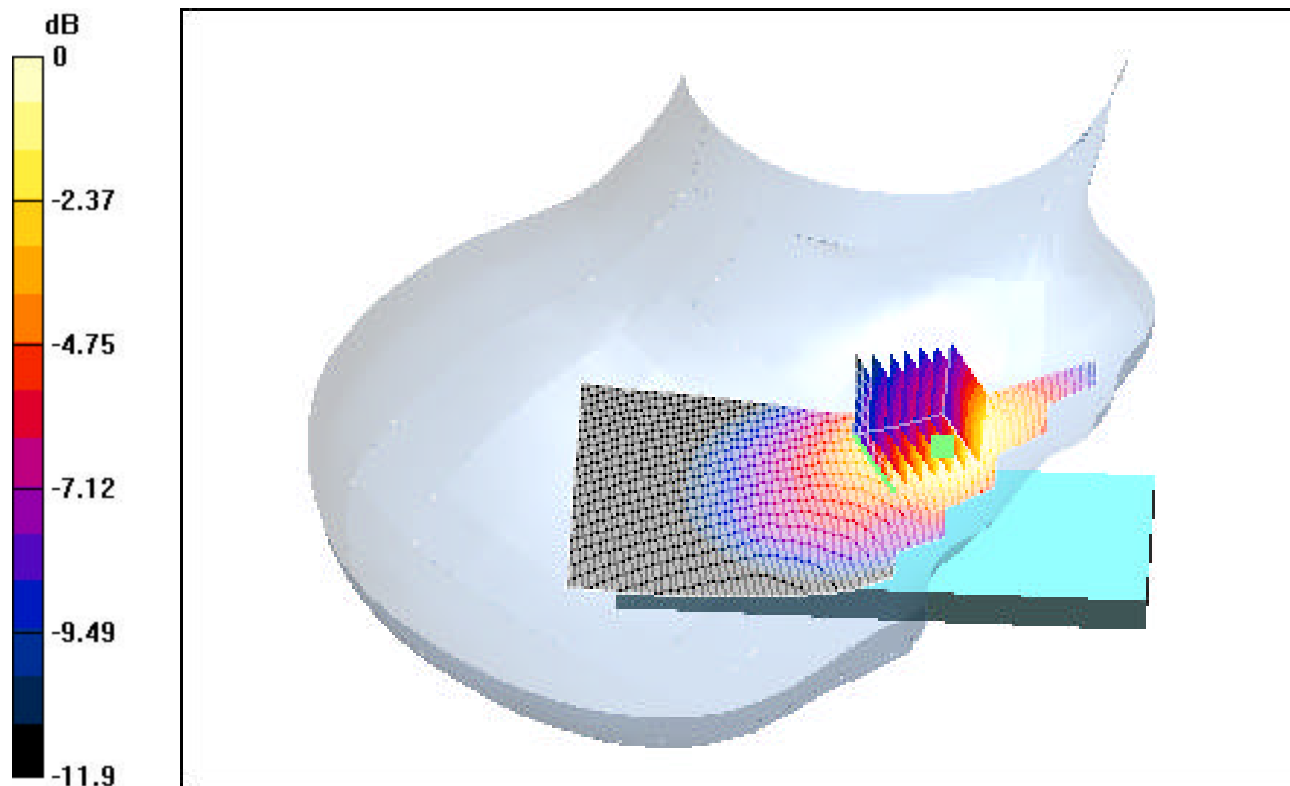

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-A600; Type: SAMSUNG Tri Mode Phone; Serial: TEST2
Program: SCH-A600 AMPS, Right; Conducted Power: 26.0 dBm.

Communication System: AMPS; Frequency: 836.49 MHz; Duty Cycle: 1:1

Medium: 835 Brain ($\sigma = 0.88$ mho/m, $\epsilon_r = 39.86$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 07-25-2003; Ambient Temp: 22.8°C; Tissue Temp: 20.7°C

Probe: ET3DV6 - SN1560; ConvF(6.9, 6.9, 6.9); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt, ch383, Ant Out, Standard Battery


Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.106 mW/g; SAR(10 g) = 0.0793 mW/g

Reference Value = 7.06 V/m

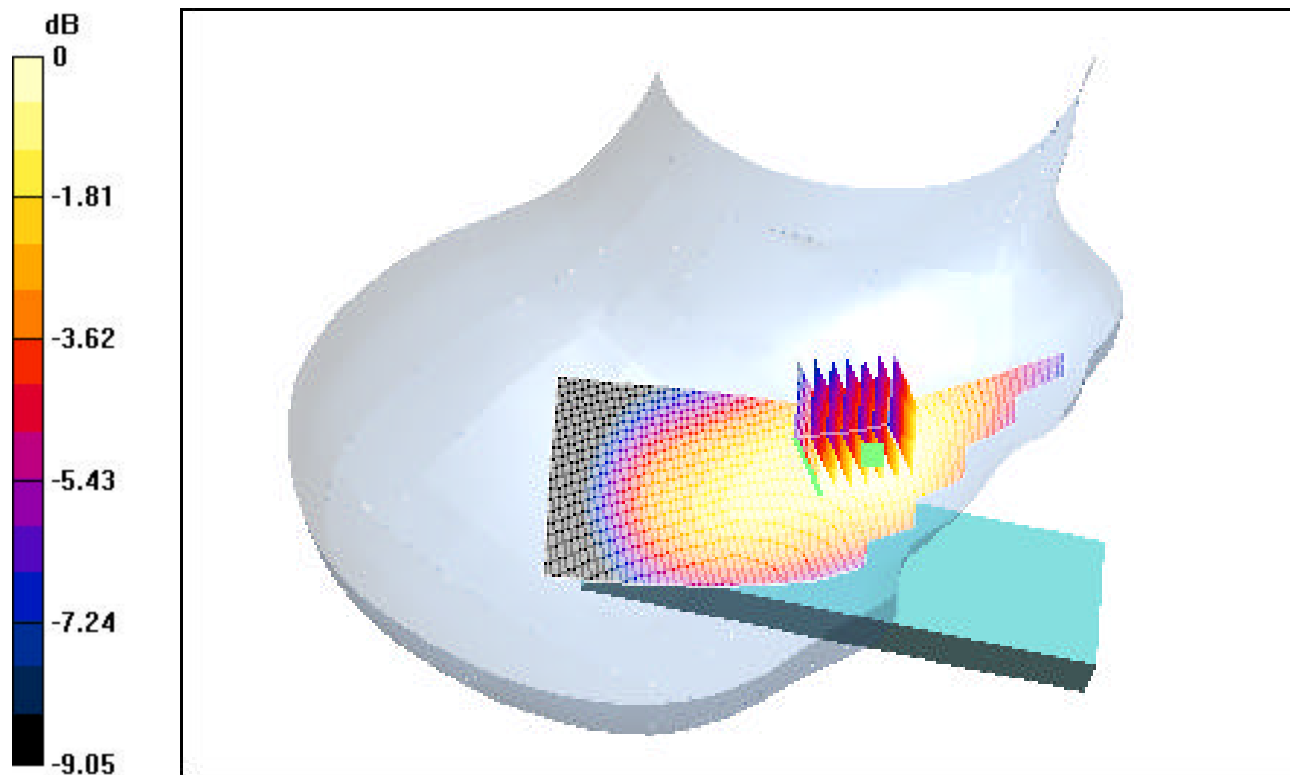

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-A600; Type: SAMSUNG Tri Mode Phone; Serial: TEST2

Program: SCH-A600 AMPS, Left; Conducted Power: 26.0 dBm

Communication System: AMPS; Frequency: 848.97 MHz; Duty Cycle: 1:1

Medium: 835 Brain ($\sigma = 0.88$ mho/m, $\epsilon_r = 39.86$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 07-25-2003; Ambient Temp: 22.8°C; Tissue Temp: 20.7°C

Probe: ET3DV6 - SN1560; ConvF(6.9, 6.9, 6.9); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Touch, ch799, Ant In, Standard Battery


Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.79 mW/g; SAR(10 g) = 0.513 mW/g

Reference Value = 8.09 V/m

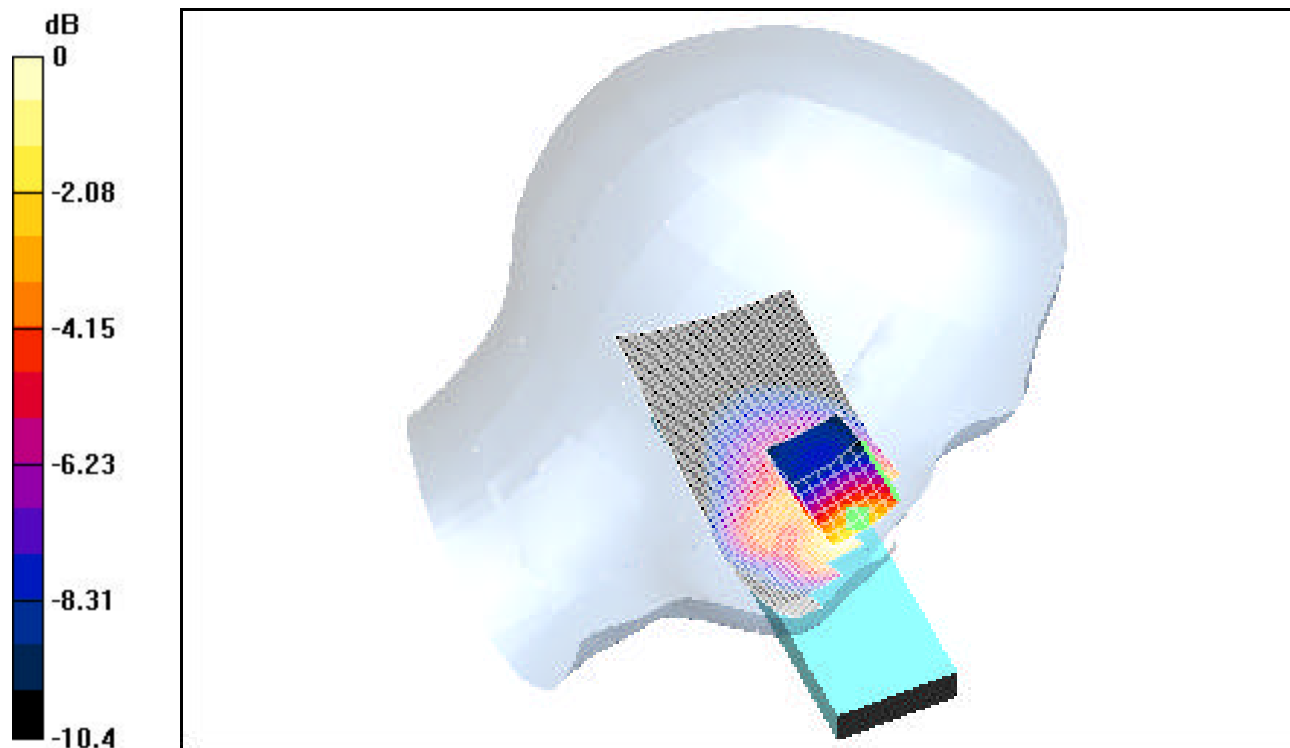

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-A600; Type: SAMSUNG Tri Mode Phone; Serial: TEST2

Program: SCH-A600 AMPS, Left; Conducted Power: 26.0 dBm

Communication System: AMPS; Frequency: 836.49 MHz; Duty Cycle: 1:1

Medium: 835 Brain ($\sigma = 0.89$ mho/m, $\epsilon_r = 40.42$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 08-12-2003; Ambient Temp: 22.4°C; Tissue Temp: 20.6°C

Probe: ET3DV6 - SN1560; ConvF(6.9, 6.9, 6.9); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt, ch383, Ant Out, Standard Battery


Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.172 W/kg

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.0976 mW/g

Reference Value = 7.79 V/m

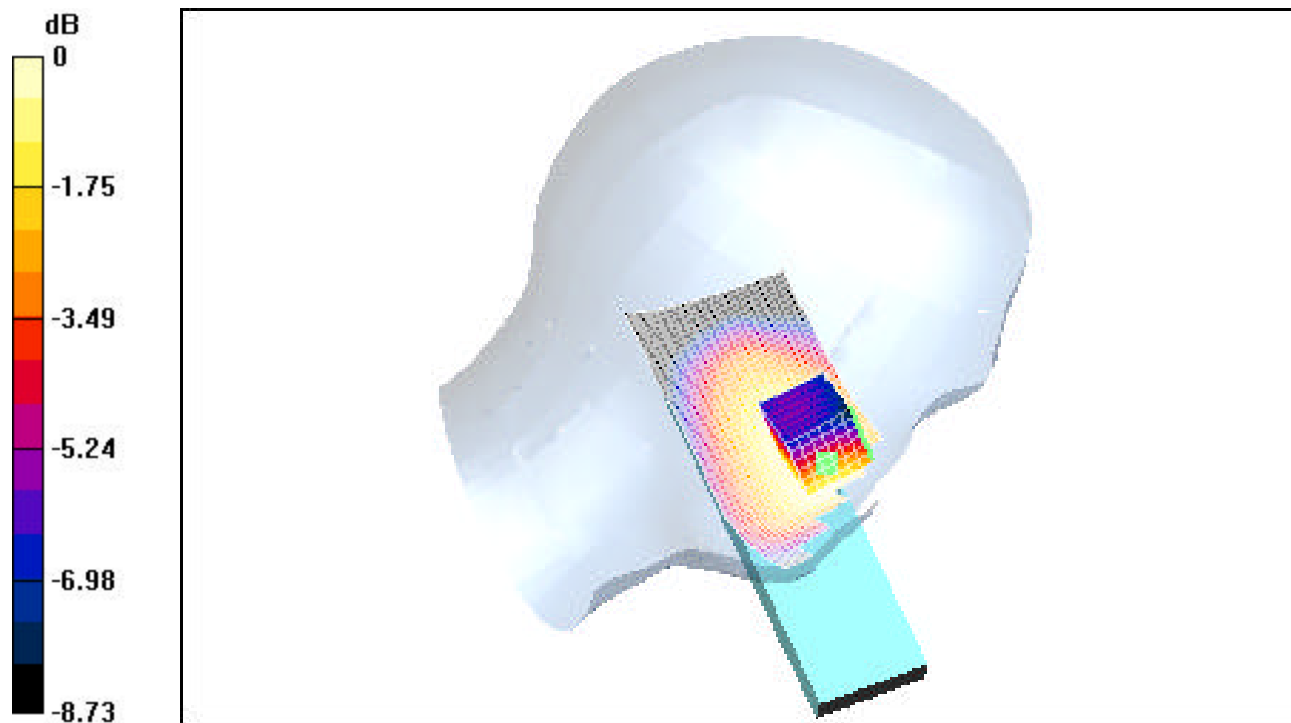

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-A600; Type: SAMSUNG Tri Mode Phone; Serial: TEST2
Program: SCH-A600 CDMA, Right; Conducted Power: 25.0 dBm

Communication System: Cellular CDMA; Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium: 835 Brain ($\sigma = 0.89$ mho/m, $\epsilon_r = 40.42$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 08-12-2003; Ambient Temp: 22.4°C; Tissue Temp: 20.6°C

Probe: ET3DV6 - SN1560; ConvF(6.9, 6.9, 6.9); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Touch, ch363, Ant In, Standard Battery


Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.697 W/kg

SAR(1 g) = 0.469 mW/g; SAR(10 g) = 0.302 mW/g

Reference Value = 5.7 V/m

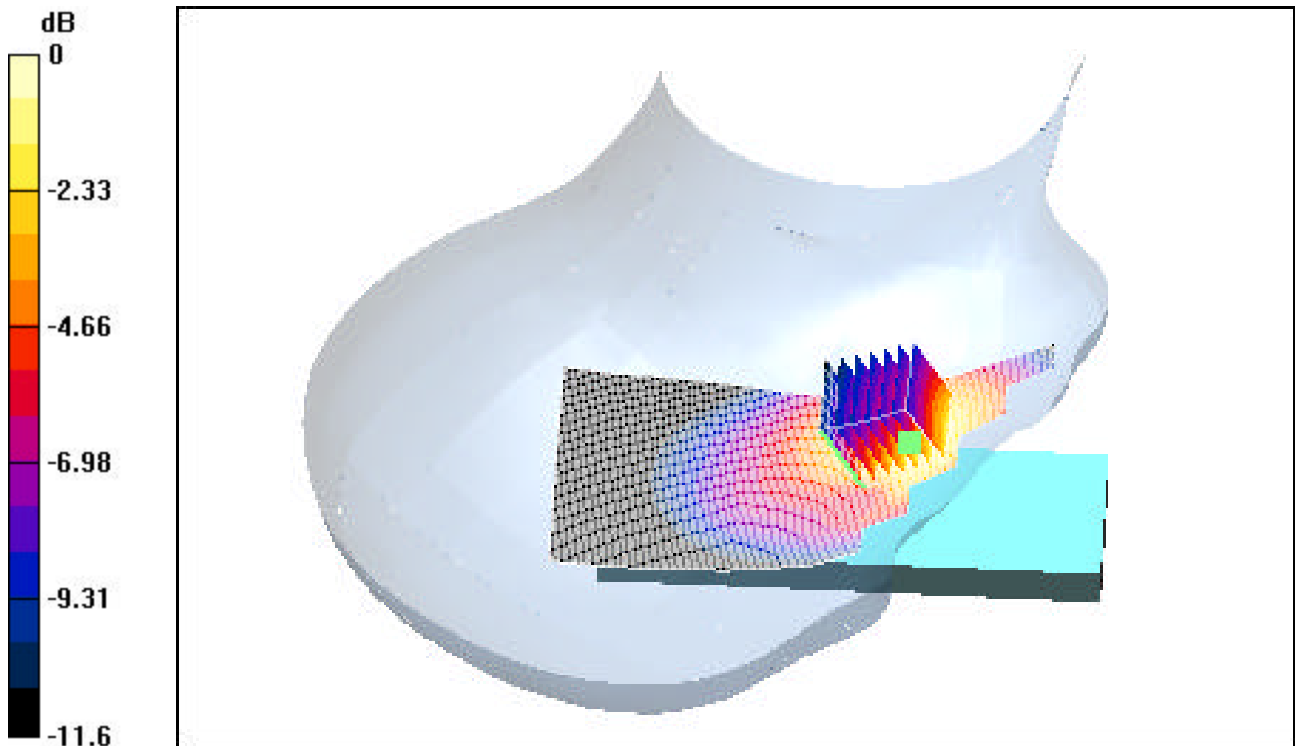

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-A600; Type: SAMSUNG Tri Mode Phone; Serial: TEST2
Program: SCH-A600 CDMA, Left; Conducted Power: 25.0dBm

Communication System: Cellular CDMA; Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium: 835 Brain ($\sigma = 0.89$ mho/m, $\epsilon_r = 40.42$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 08-12-2003; Ambient Temp: 22.4°C; Tissue Temp: 20.6°C

Probe: ET3DV6 - SN1560; ConvF(6.9, 6.9, 6.9); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Touch, ch363, Ant In, Standard Battery


Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.701 W/kg

SAR(1 g) = 0.464 mW/g; SAR(10 g) = 0.294 mW/g

Reference Value = 4.99 V/m

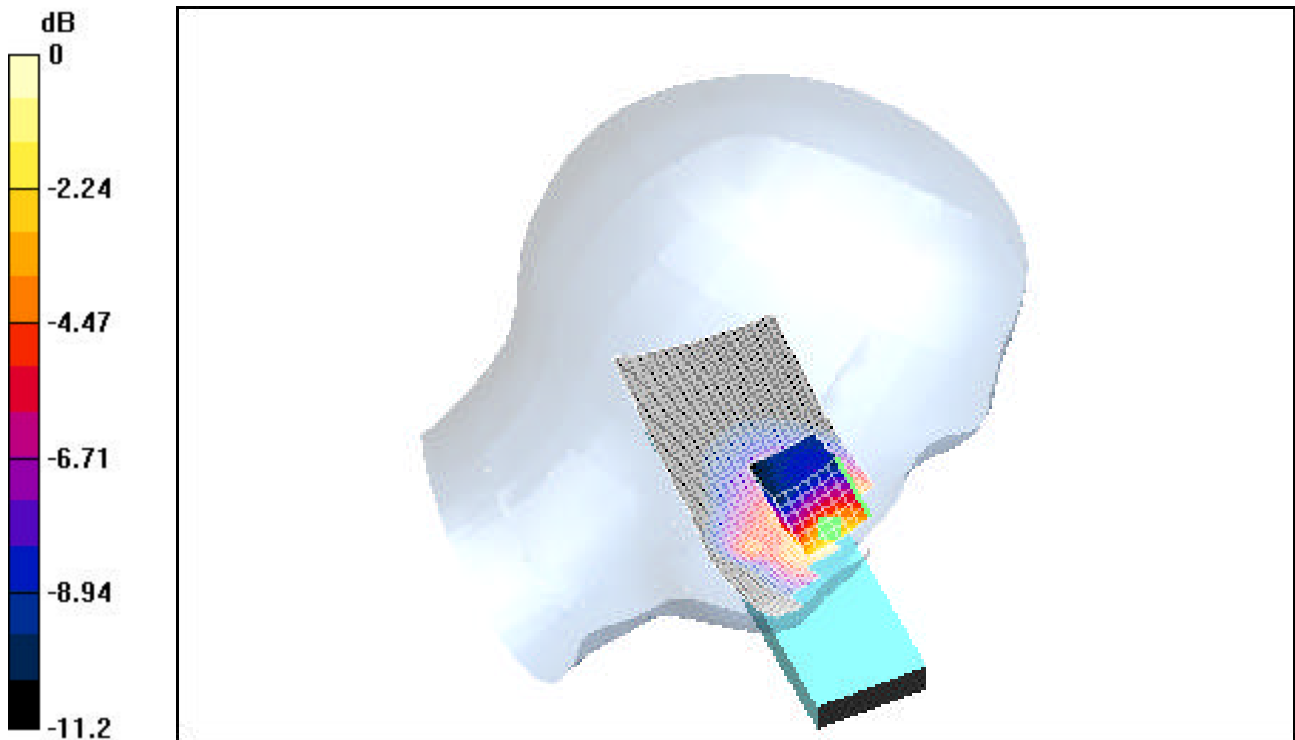

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-A600; Type: SAMSUNG Tri Mode Phone; Serial: TEST2
Program: SCH-A600 PCS CDMA, Right; Conducted Power 25.0 dBm

Communication System: PCS CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ($\sigma = 1.46$ mho/m, $\epsilon_r = 39.92$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 07-24-2003; Ambient Temp: 22.5°C; Tissue Temp: 20.3°C

Probe: ET3DV6 - SN1560; ConvF(5.4, 5.4, 5.4); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Touch, ch25, Ant In, Standard Battery


Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.889 mW/g; SAR(10 g) = 0.481 mW/g

Reference Value = 6.64 V/m

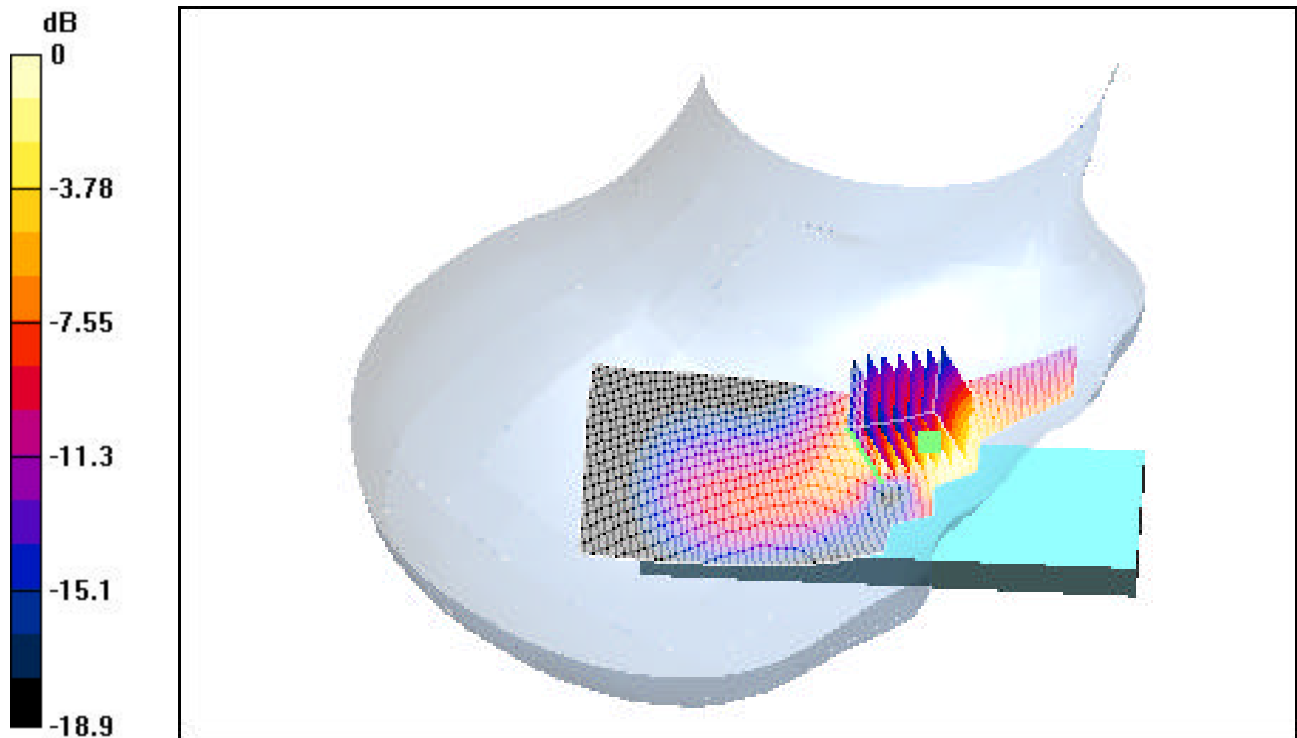

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-A600; Type: SAMSUNG Tri Mode Phone; Serial: TEST2
Program: SCH-A600 PCS CDMA, Right; Conducted Power: 25.0 dBm

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ($\sigma = 1.46$ mho/m, $\epsilon_r = 39.92$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 07-24-2003; Ambient Temp: 22.5°C; Tissue Temp: 20.3°C

Probe: ET3DV6 - SN1560; ConvF(5.4, 5.4, 5.4); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt, ch600, Ant Out, Standard Battery


Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.187 W/kg

SAR(1 g) = 0.121 mW/g; SAR(10 g) = 0.0756 mW/g

Reference Value = 9.68 V/m

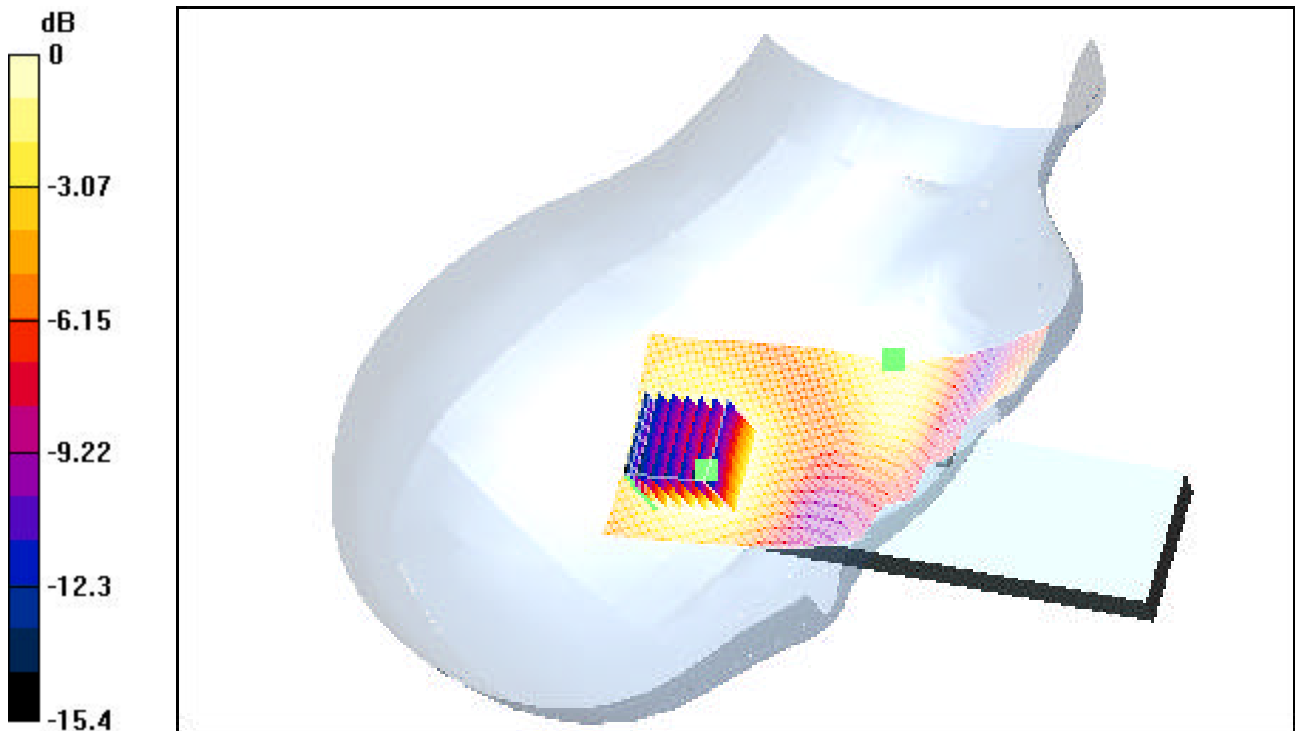

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-A600; Type: SAMSUNG Tri Mode Phone; Serial: TEST2
Program: SCH-A600 PCS CDMA, Left; Conducted Power: 25.0 dBm

Communication System: PCS CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ($\sigma = 1.46$ mho/m, $\epsilon_r = 39.92$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 07-24-2003; Ambient Temp: 22.5°C; Tissue Temp: 20.3°C

Probe: ET3DV6 - SN1560; ConvF(5.4, 5.4, 5.4); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Touch, ch25, Ant In, Standard Battery


Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.838 mW/g; SAR(10 g) = 0.454 mW/g

Reference Value = 5.19 V/m

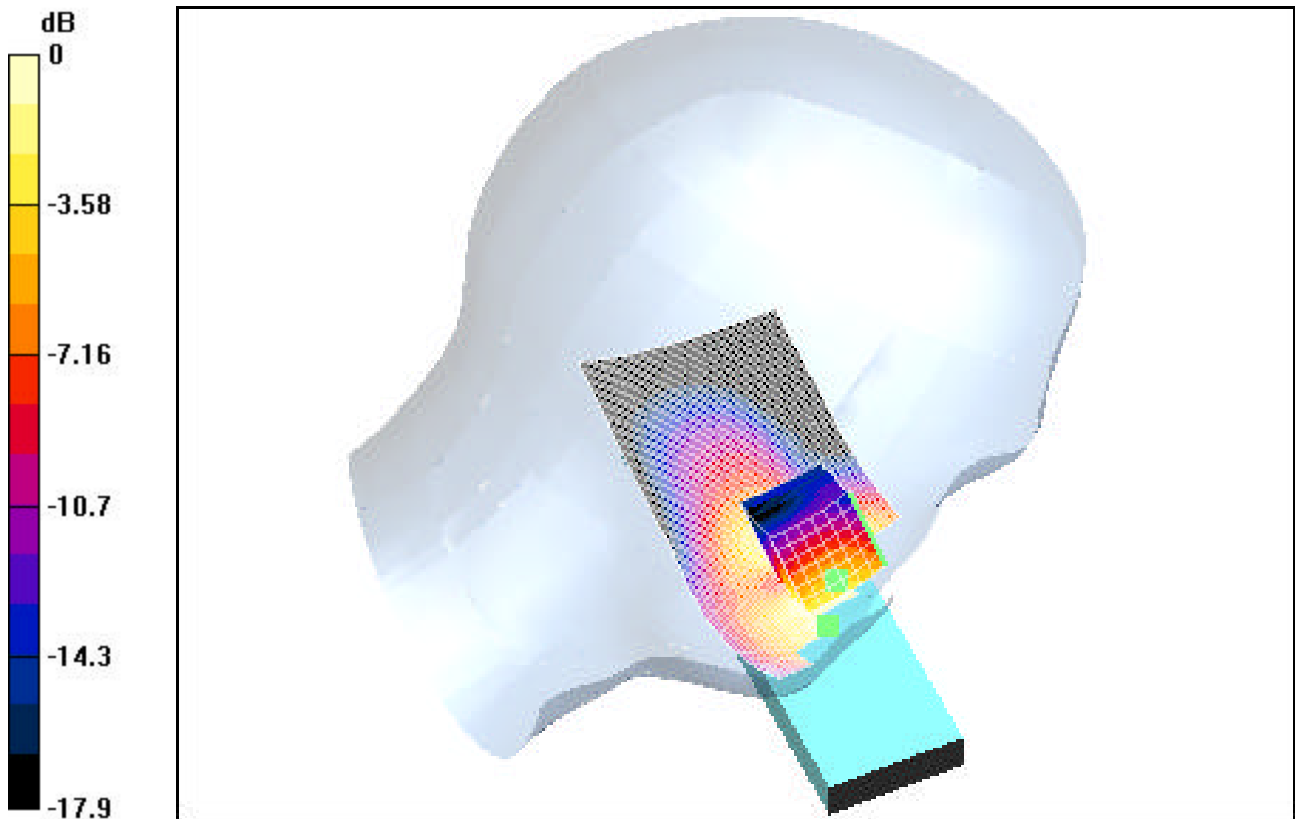

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-A600; Type: SAMSUNG Tri Mode Phone; Serial: TEST2
Program: SCH-A600 PCS CDMA Left; Conducted Power: 25.0 dBm

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ($\sigma = 1.46$ mho/m, $\epsilon_r = 39.92$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 07-24-2003; Ambient Temp: 22.5°C; Tissue Temp: 20.3°C

Probe: ET3DV6 - SN1560; ConvF(5.4, 5.4, 5.4); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt, ch600, Ant Out, Standard Battery


Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.137 mW/g; SAR(10 g) = 0.0869 mW/g

Reference Value = 10.4 V/m

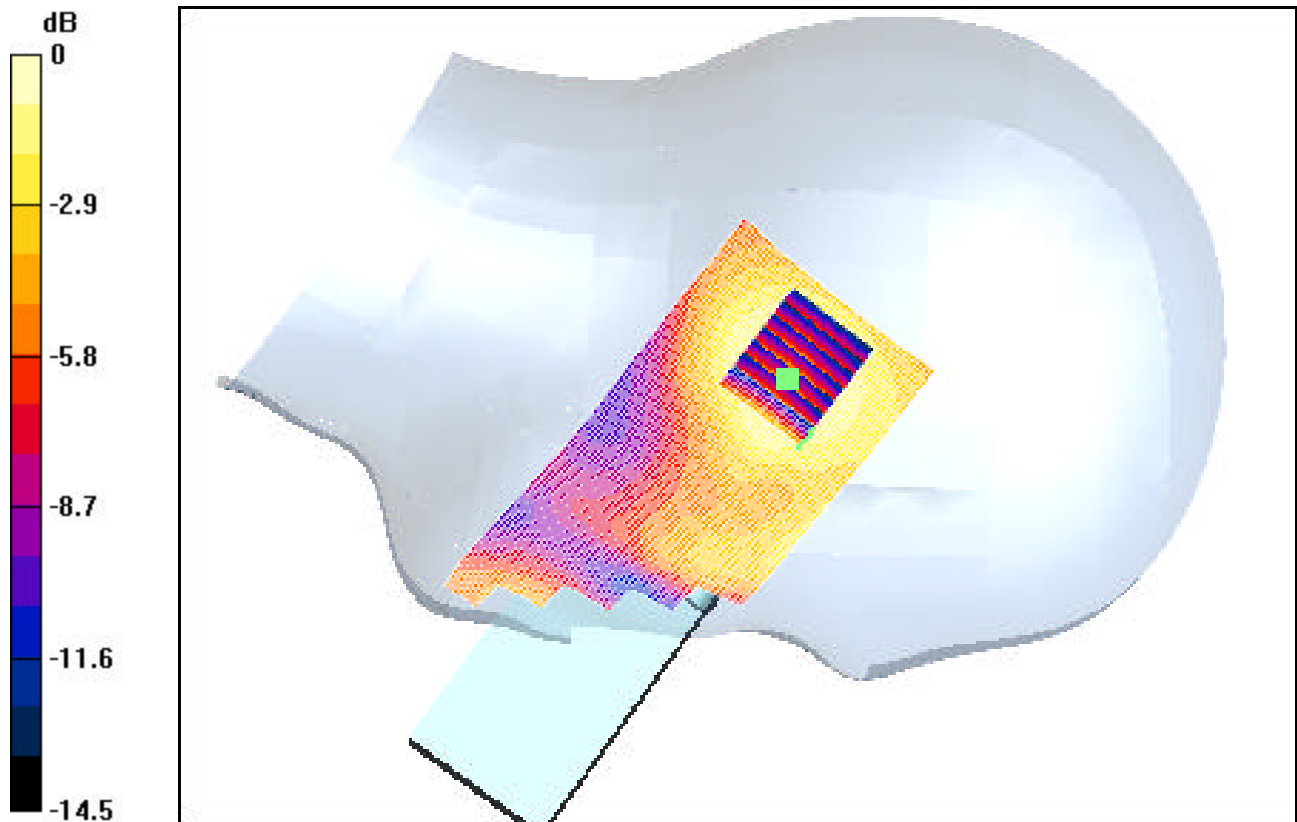

0 dB = 0.145mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-A600; Type: SAMSUNG Tri Mode Phone; Serial: TEST2
Program: SCH-A600 AMPS Body; Conducted Power: 26.0 dBm

Communication System: AMPS; Frequency: 848.97 MHz; Duty Cycle: 1:1

Medium: 835 Muscle ($\sigma = 0.99$ mho/m, $\epsilon_r = 52.80$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 08-13-2003; Ambient Temp: 22.9°C; Tissue Temp: 20.8°C

Probe: ET3DV6 - SN1560; ConvF(6.6, 6.6, 6.6); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Ch.0799, Ant In, Standard Battery


Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.821 mW/g; SAR(10 g) = 0.565 mW/g

Reference Value = 24.9 V/m

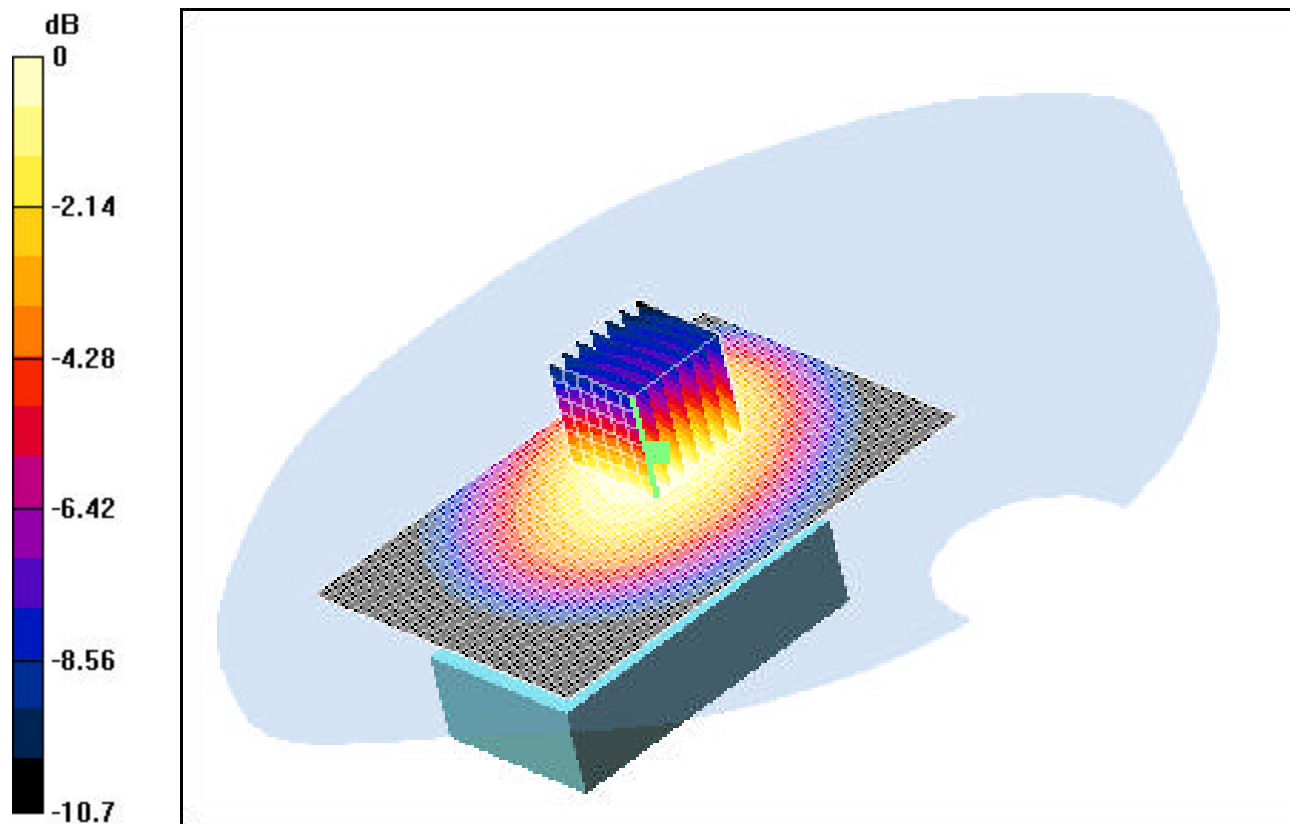

0 dB = 0.871mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-A600; Type: SAMSUNG Tri Mode Phone; Serial: TEST2
Program: SCH-A600 CDMA Body ; Conducted Power: 25.0 dBm

Communication System: Cellular CDMA; Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium: 835 Muscle ($\sigma = 0.99$ mho/m, $\epsilon_r = 52.80$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 08-13-2003; Ambient Temp: 22.9°C; Tissue Temp: 20.8°C

Probe: ET3DV6 - SN1560; ConvF(6.6, 6.6, 6.6); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Ch.0363, Ant In, Standard Battery


Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.715 W/kg

SAR(1 g) = 0.516 mW/g; SAR(10 g) = 0.356 mW/g

Reference Value = 20.6 V/m

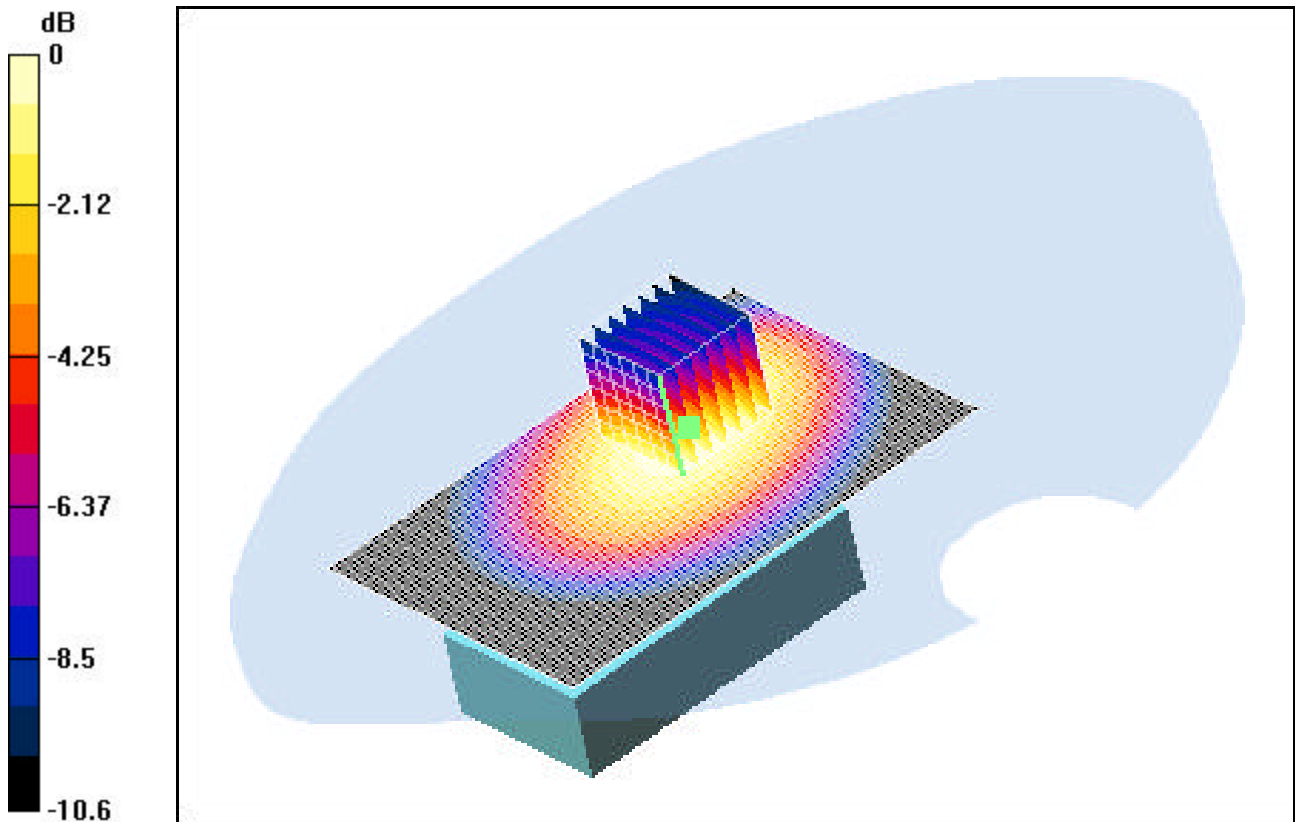

0 dB = 0.546mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-A600; Type: SAMSUNG Tri Mode Phone; Serial: TEST2
Program: SCH-A600 PCS Body; Conducted Power: 25.0 dBm

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Muscle ($\sigma = 1.57$ mho/m, $\epsilon_r = 53.6$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 08-13-2003; Ambient Temp: 22.5°C; Tissue Temp: 20.4°C

Probe: ET3DV6 - SN1560; ConvF(4.9, 4.9, 4.9); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Ch.0600, Ant Out, Standard Battery


Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 2.54 W/kg

SAR(1 g) = 1.44 mW/g; SAR(10 g) = 0.796 mW/g

Reference Value = 24.3 V/m

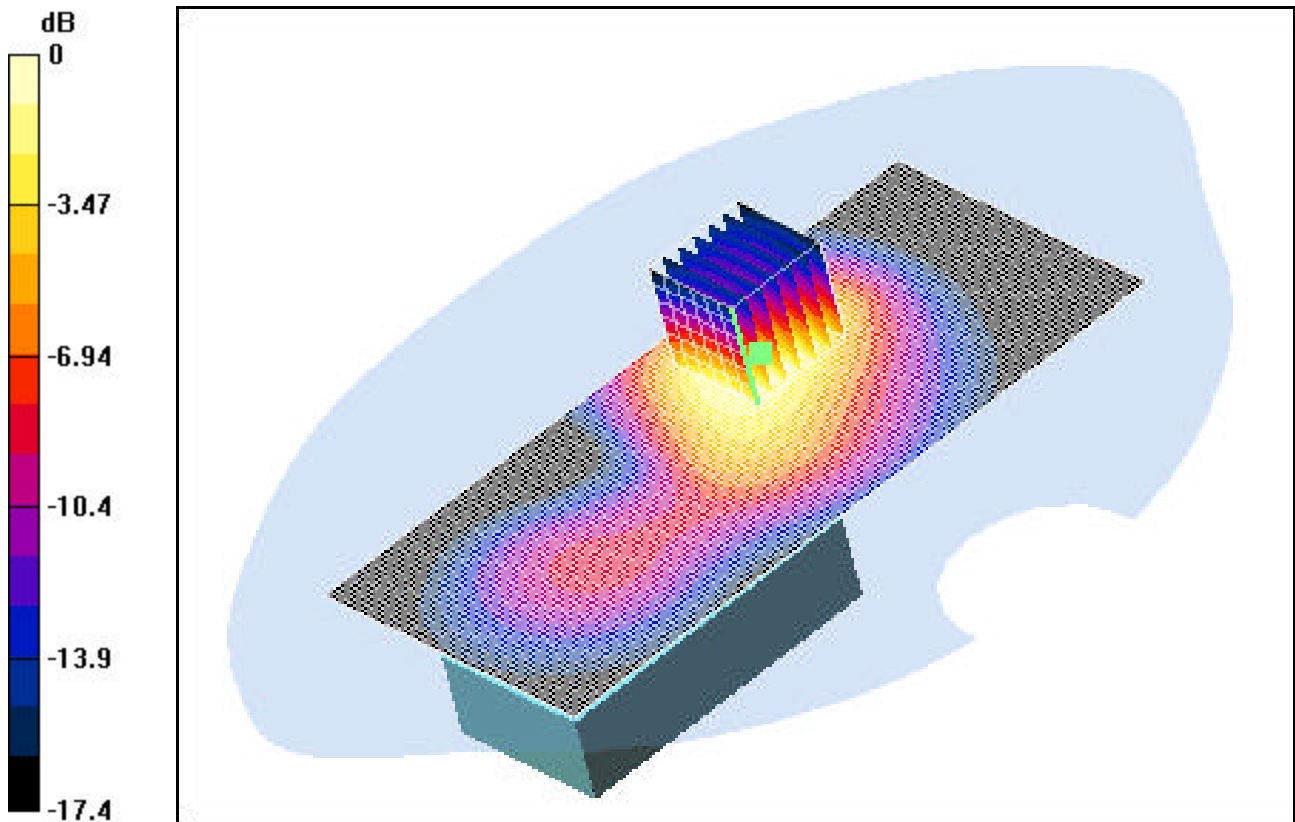

0 dB = 1.55mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-A600; Type: SAMSUNG Tri Mode Phone; Serial: TEST2
Program: SCH-A600 AMPS Right; Conducted Power: 26.0 dBm

Communication System: AMPS; Frequency: 824.04 MHz; Duty Cycle: 1:1

Medium: 835 Brain ($\sigma = 0.88$ mho/m, $\epsilon_r = 39.86$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 07-25-2003; Ambient Temp: 22.8°C; Tissue Temp: 20.4°C

Probe: ET3DV6 - SN1560; ConvF(6.9, 6.9, 6.9); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Touch, ch991, Ant In, Standard Battery


Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.67 mW/g

Reference Value = 7.6 V/m

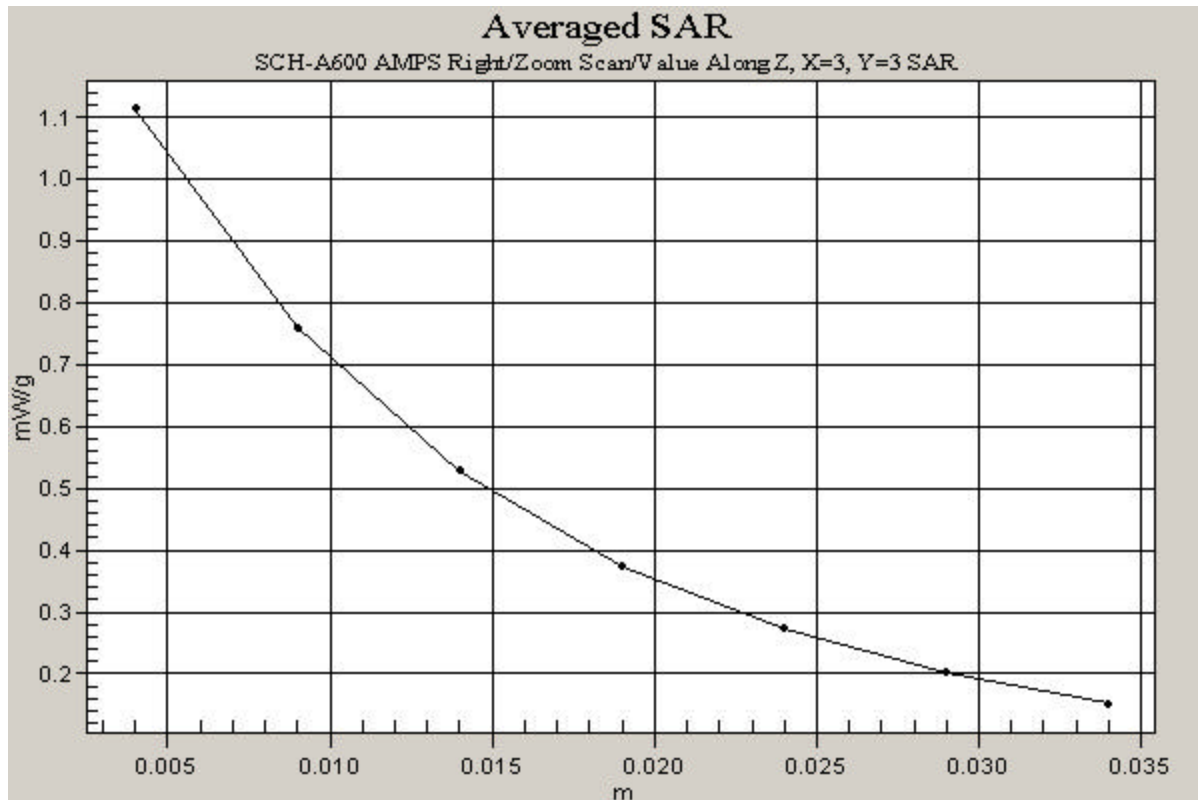

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-A600; Type: SAMSUNG Tri Mode Phone; Serial: TEST2
Program: SCH-A600 AMPS Body; Conducted Power: 26.0 dBm

Communication System: AMPS; Frequency: 848.97 MHz; Duty Cycle: 1:1

Medium: 835 Muscle ($\sigma = 0.99$ mho/m, $\epsilon_r = 52.80$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 08-13-2003; Ambient Temp: 22.9°C; Tissue Temp: 20.8°C

Probe: ET3DV6 - SN1560; ConvF(6.6, 6.6, 6.6); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Ch.0799, Ant In, Standard Battery


Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.821 mW/g; SAR(10 g) = 0.565 mW/g

Reference Value = 24.9 V/m

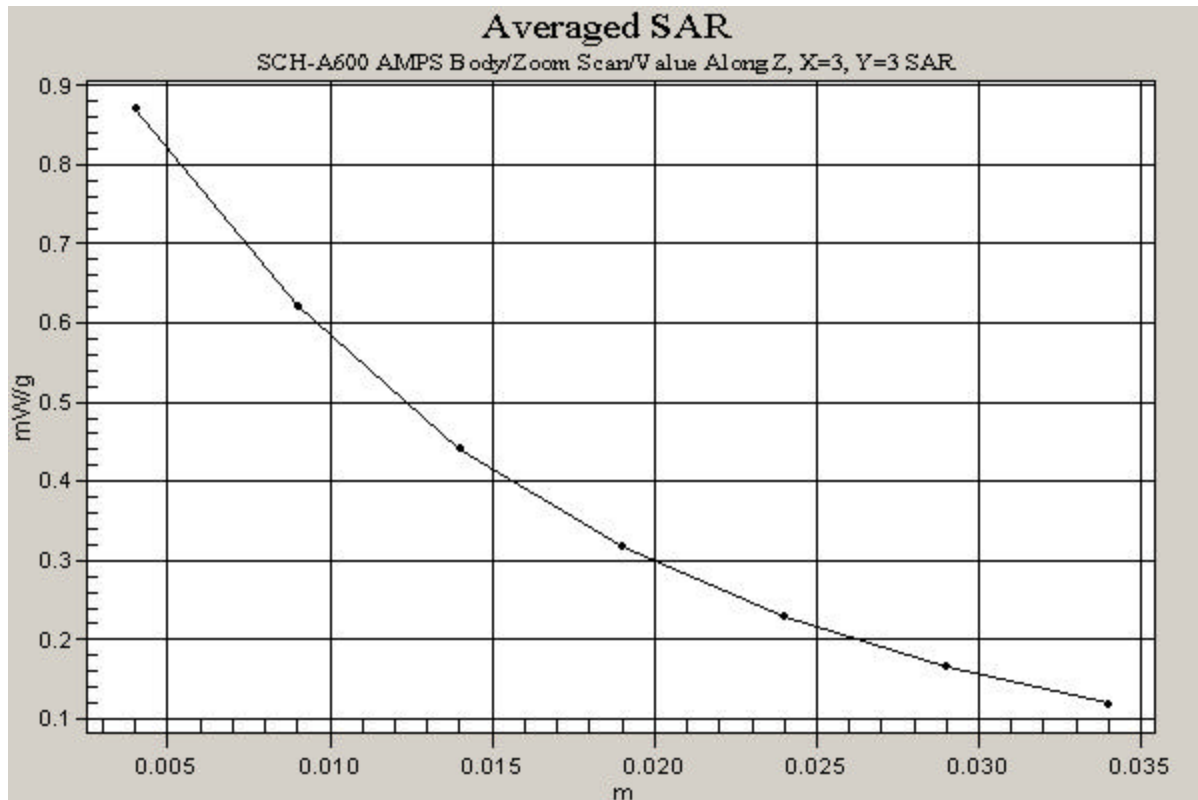

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-A600; Type: SAMSUNG Tri Mode Phone; Serial: TEST2
Program: SCH-A600 PCS CDMA Right; Conducted Power: 25.0 dBm

Communication System: PCS CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ($\sigma = 1.46$ mho/m, $\epsilon_r = 39.92$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 07-24-2003; Ambient Temp: 22.5°C; Tissue Temp: 20.3°C

Probe: ET3DV6 - SN1560; ConvF(5.4, 5.4, 5.4); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Touch, ch25, Ant In, Standard Battery


Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.889 mW/g; SAR(10 g) = 0.481 mW/g

Reference Value = 6.64 V/m

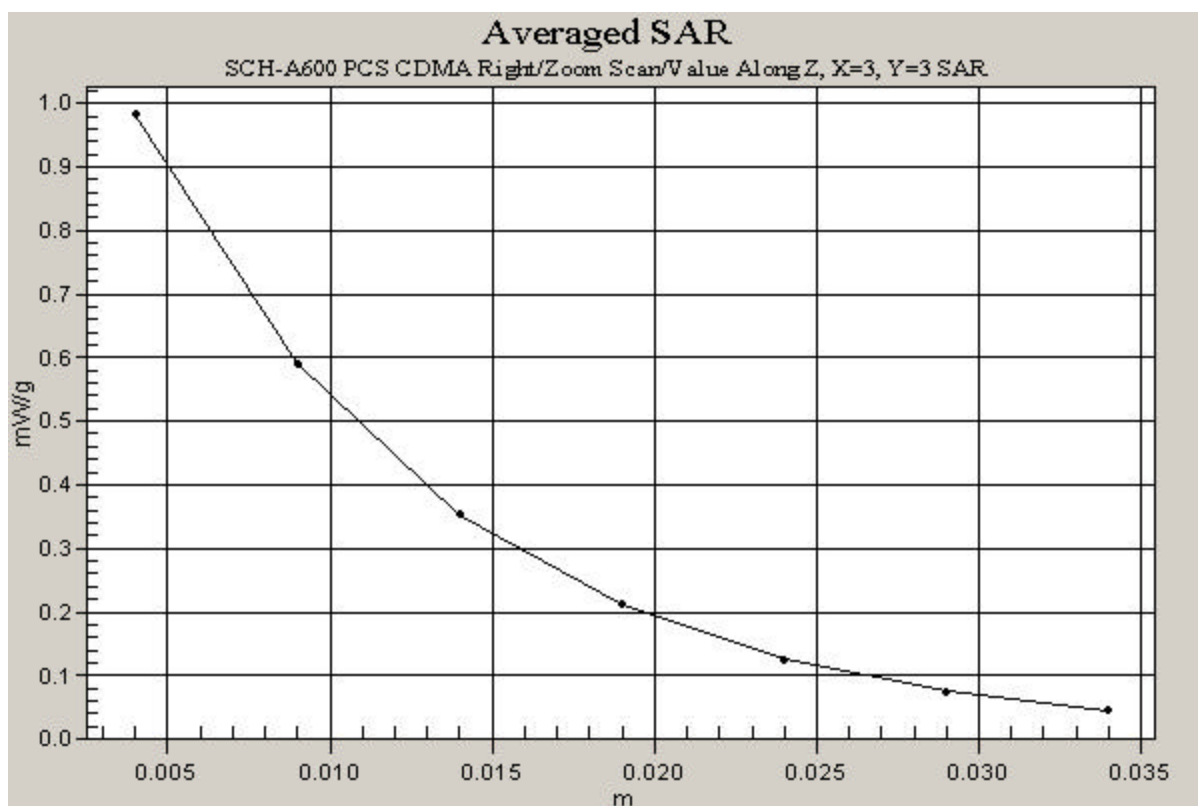

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-A600; Type: SAMSUNG Tri Mode Phone; Serial: TEST2
Program: SCH-A600 PCS Body; Conducted Power: 25.0 dBm

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Muscle ($\sigma = 1.57$ mho/m, $\epsilon_r = 53.6$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 08-13-2003; Ambient Temp: 22.5°C; Tissue Temp: 20.4°C

Probe: ET3DV6 - SN1560; ConvF(4.9, 4.9, 4.9); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Ch.0600, Ant Out, Standard Battery


Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 2.54 W/kg

SAR(1 g) = 1.44 mW/g; SAR(10 g) = 0.796 mW/g

Reference Value = 24.3 V/m

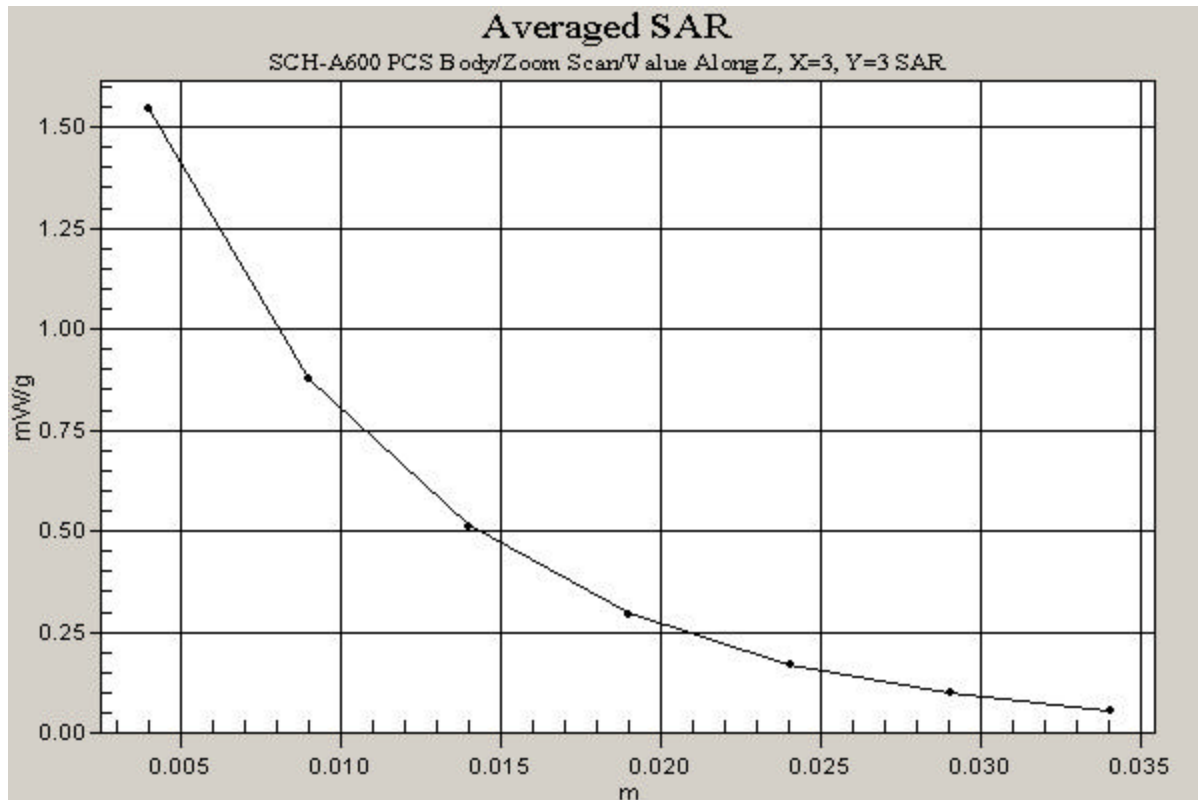

APPENDIX A: DIPOLE VALIDATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:406
Program: 835MHz. Dipole Validation - 1560


Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: HSL 835 ($\sigma = 0.88$ mho/m, $\epsilon_r = 39.86$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

Test Date: 07-25-2003; Ambient Temp: 22.9°C; Tissue Temp: 20.3°C

Probe: ET3DV6 - SN1560; ConvF(6.9, 6.9, 6.9); Calibrated: 9/27/2002
Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Electronics: DAE3 SN330; Calibrated: 12/1/2002
Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197
Measurement SW: DASY4, V4.1 Build 33; Postprocessing SW: SEMCAD, V1.6 Build 115

validation/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 59.4 V/m

validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Peak SAR (extrapolated) = 3.72W/kg
SAR(1 g) = 2.53 mW/g; SAR(10 g) = 1.64 mW/g
Reference Value = 59.6 V/m

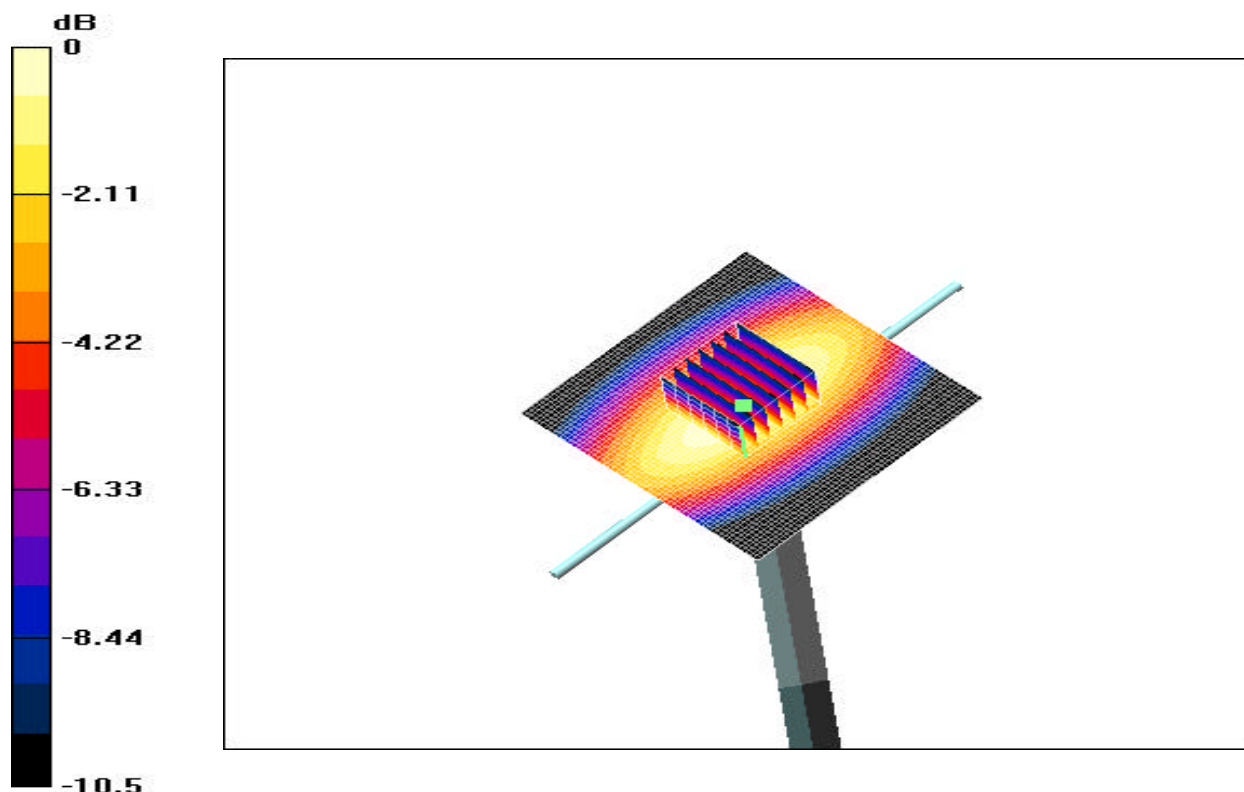

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:502
Program: 1900MHz Dipole Validation - 1560

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ($\sigma = 1.43$ mho/m, $\epsilon_r = 39.30$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

Test Date: 08-12-2003; Ambient Temp: 22.7°C; Tissue Temp: 20.1°C

Probe: ET3DV6 - SN1560; ConvF(5.4, 5.4, 5.4); Calibrated: 9/27/2002

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 SN330; Calibrated: 12/1/2002

Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.1 Build 33; Postprocessing SW: SEMCAD, V1.6 Build 115


1900MHz Dipole Validation - 1560/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

1900MHz Dipole Validation - 1560/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 9.83 mW/g; SAR(10 g) = 5.05 mW/g

Reference Value = 93.8 V/m

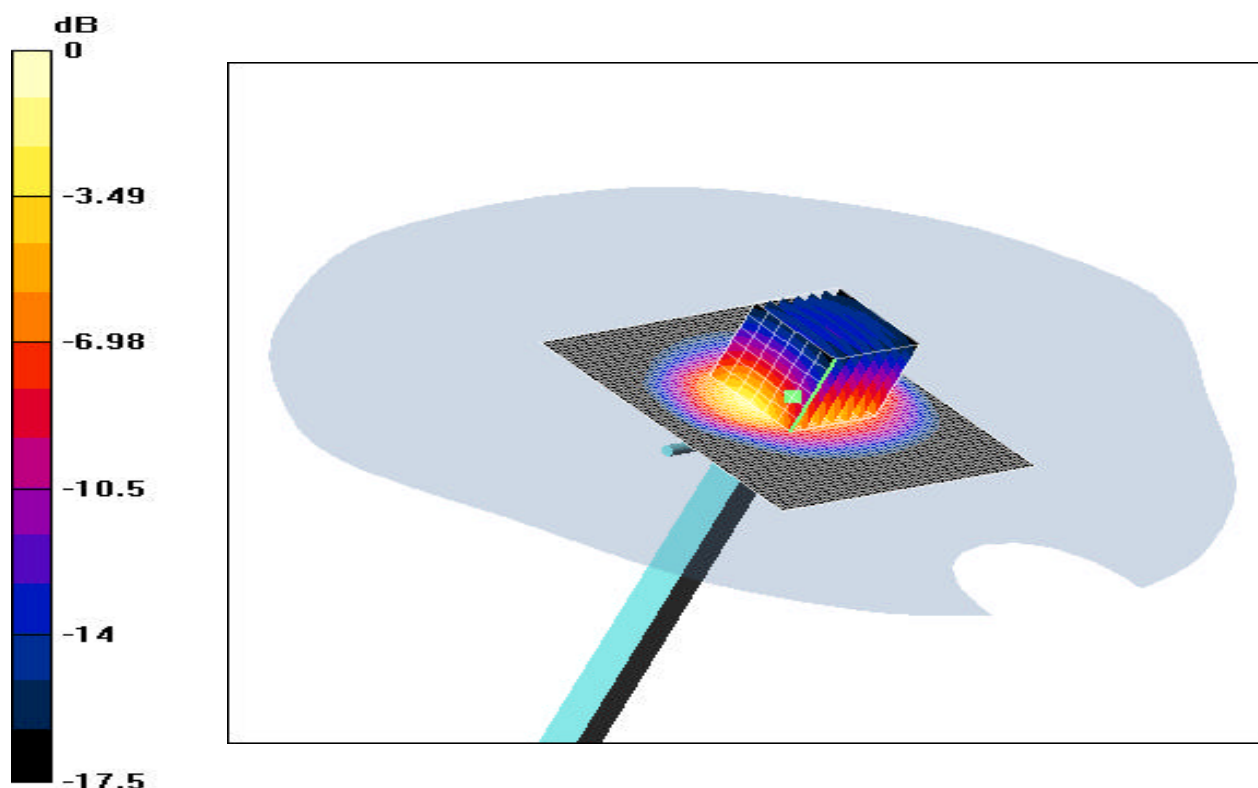

APPENDIX B: PROBE CALIBRATION

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

Dosimetric E-Field Probe

Type:

ET3DV6

Serial Number:

1560

Place of Calibration:

Zurich

Date of Calibration:

September 27, 2002

Calibration Interval:

12 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

N. Vetter

Approved by:

Alvin Kof

Probe ET3DV6

SN:1560

Manufactured:	December 1, 2000
Last calibration:	February 20, 2001
Recalibrated:	September 27, 2002

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1560

Sensitivity in Free Space

NormX	1.48 $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	1.50 $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	1.42 $\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression

DCP X	93	mV
DCP Y	93	mV
DCP Z	93	mV

Sensitivity in Tissue Simulating Liquid





Head	835 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.90 \pm 5\% \text{ mho/m}$
Head	900 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.97 \pm 5\% \text{ mho/m}$
ConvF X	6.9 $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	6.9 $\pm 9.5\%$ (k=2)	Alpha	0.60
ConvF Z	6.9 $\pm 9.5\%$ (k=2)	Depth	1.69
Head	1900 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\% \text{ mho/m}$
Head	1800 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\% \text{ mho/m}$
ConvF X	5.4 $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	5.4 $\pm 9.5\%$ (k=2)	Alpha	0.49
ConvF Z	5.4 $\pm 9.5\%$ (k=2)	Depth	2.36


Boundary Effect

Head	835 MHz	Typical SAR gradient: 5 % per mm	
Probe Tip to Boundary		1 mm	2 mm
SAR _{be} [%] Without Correction Algorithm		7.3	3.7
SAR _{be} [%] With Correction Algorithm		0.0	0.2
Head	1900 MHz	Typical SAR gradient: 10 % per mm	
Probe Tip to Boundary		1 mm	2 mm
SAR _{be} [%] Without Correction Algorithm		11.1	7.6
SAR _{be} [%] With Correction Algorithm		0.2	0.4


Sensor Offset

Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	1.3 $\pm$ 0.2	mm

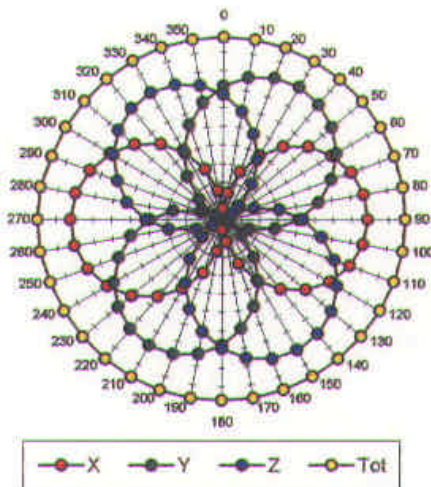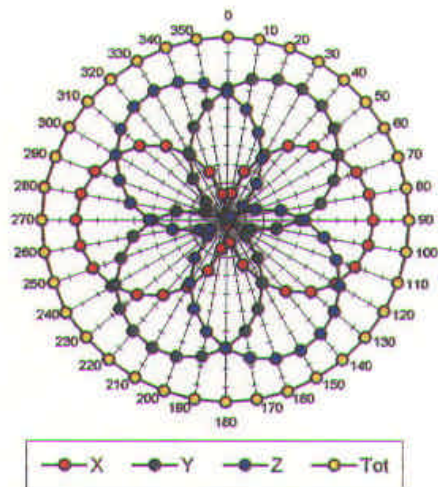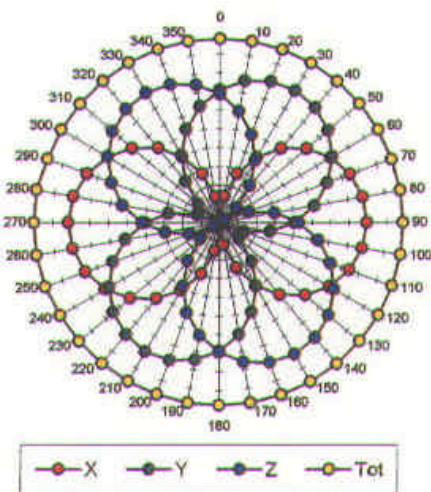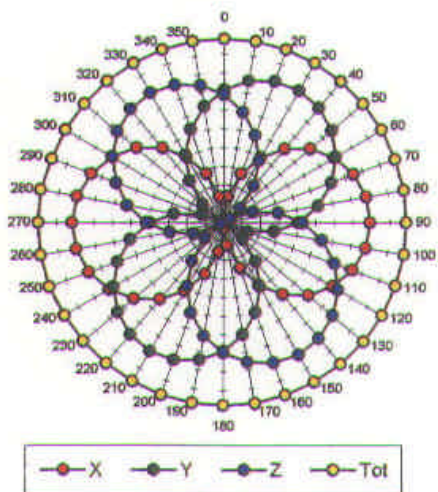Receiving Pattern (ϕ), $\theta = 0^\circ$ $f = 30 \text{ MHz}$, TEM cell ifi110 $f = 100 \text{ MHz}$, TEM cell ifi110 $f = 300 \text{ MHz}$, TEM cell ifi110 $f = 900 \text{ MHz}$, TEM cell ifi110

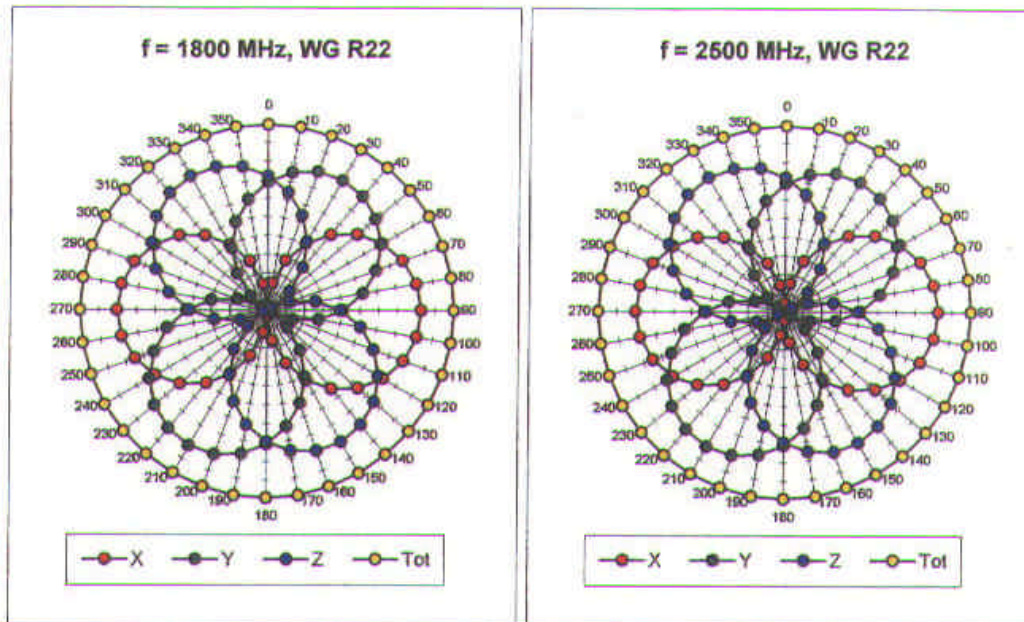


Isotropy Error (ϕ), $\theta = 0^\circ$


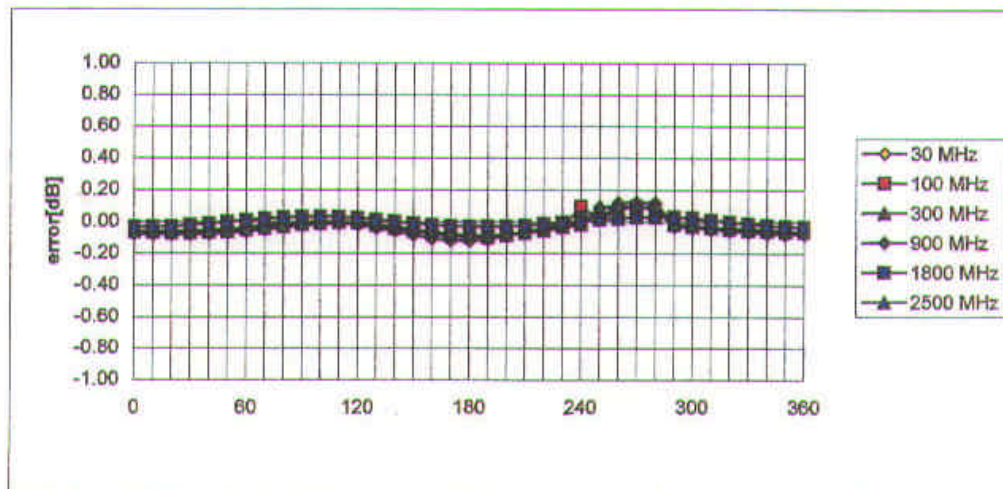


Frequency Response of E-Field


(TEM-Cell:ifi110, Waveguide R22)

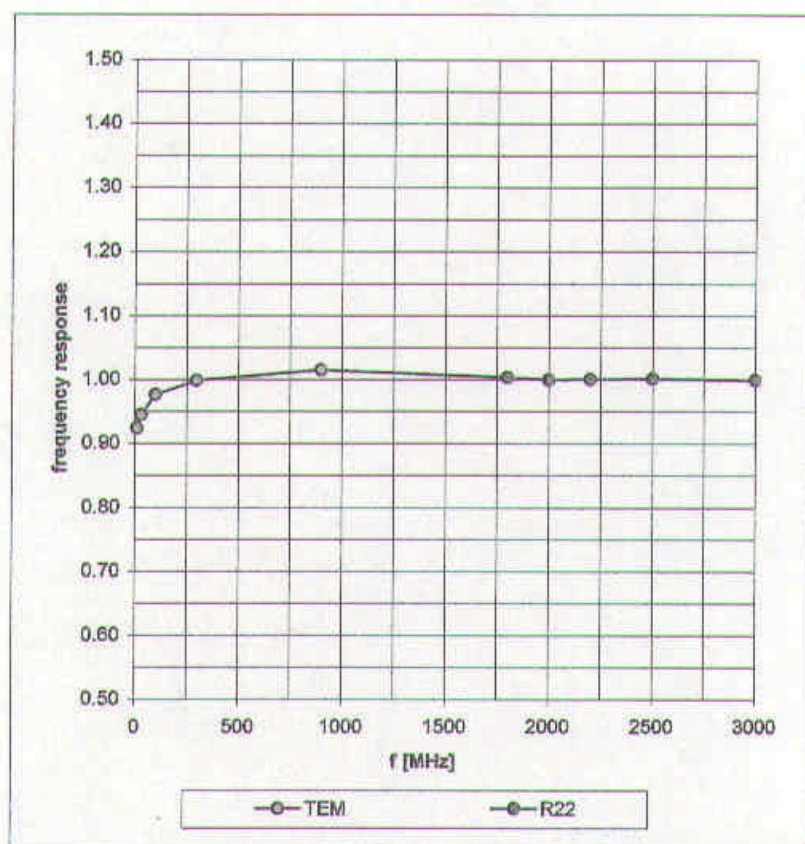

Dynamic Range $f(\text{SAR}_{\text{brain}})$ (Waveguide R22)

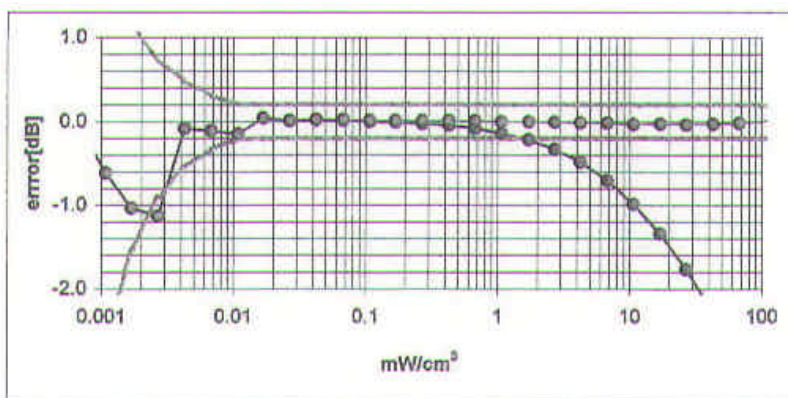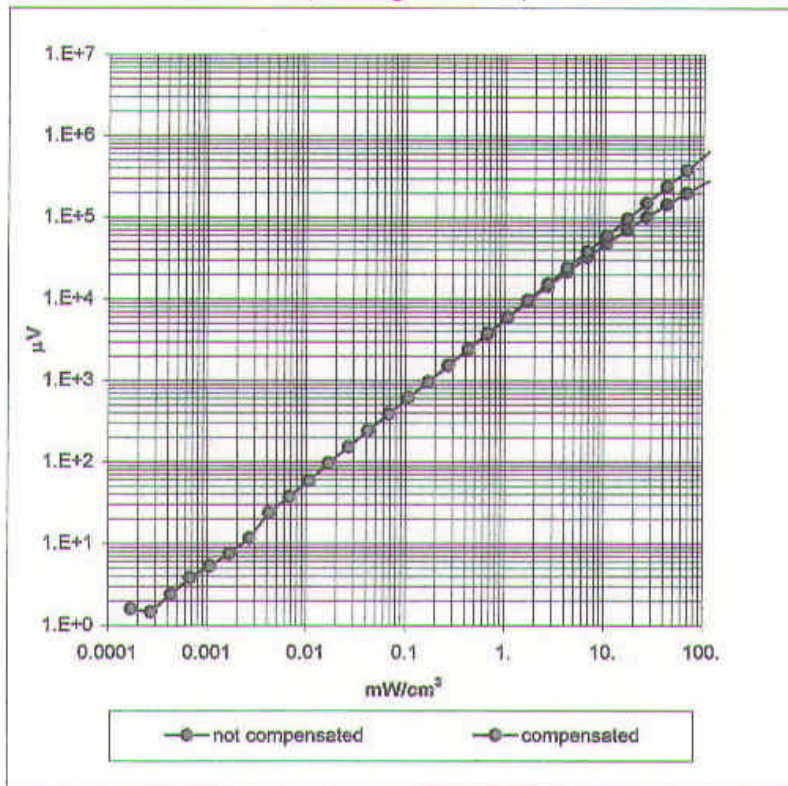


Conversion Factor Assessment

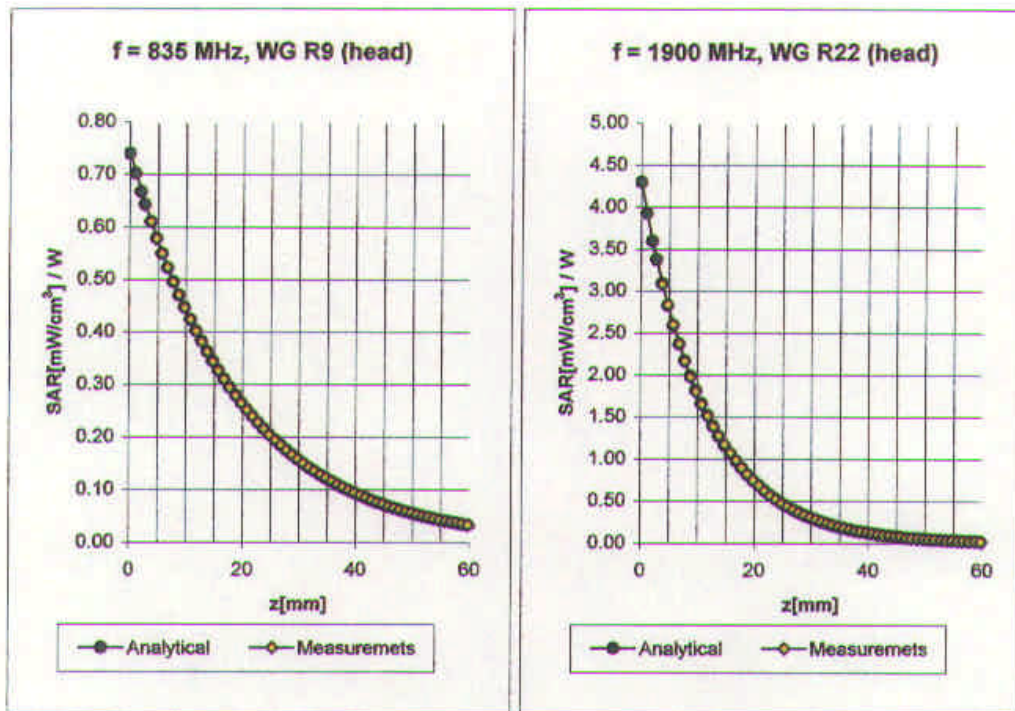

Head	835 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.90 \pm 5\%$ mho/m
Head	900 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.97 \pm 5\%$ mho/m
	ConvF X	$6.9 \pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	$6.9 \pm 9.5\%$ (k=2)	Alpha 0.60
	ConvF Z	$6.9 \pm 9.5\%$ (k=2)	Depth 1.69
Head	1900 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\%$ mho/m
Head	1800 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\%$ mho/m
	ConvF X	$5.4 \pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	$5.4 \pm 9.5\%$ (k=2)	Alpha 0.49
	ConvF Z	$5.4 \pm 9.5\%$ (k=2)	Depth 2.36


Conversion Factor Assessment

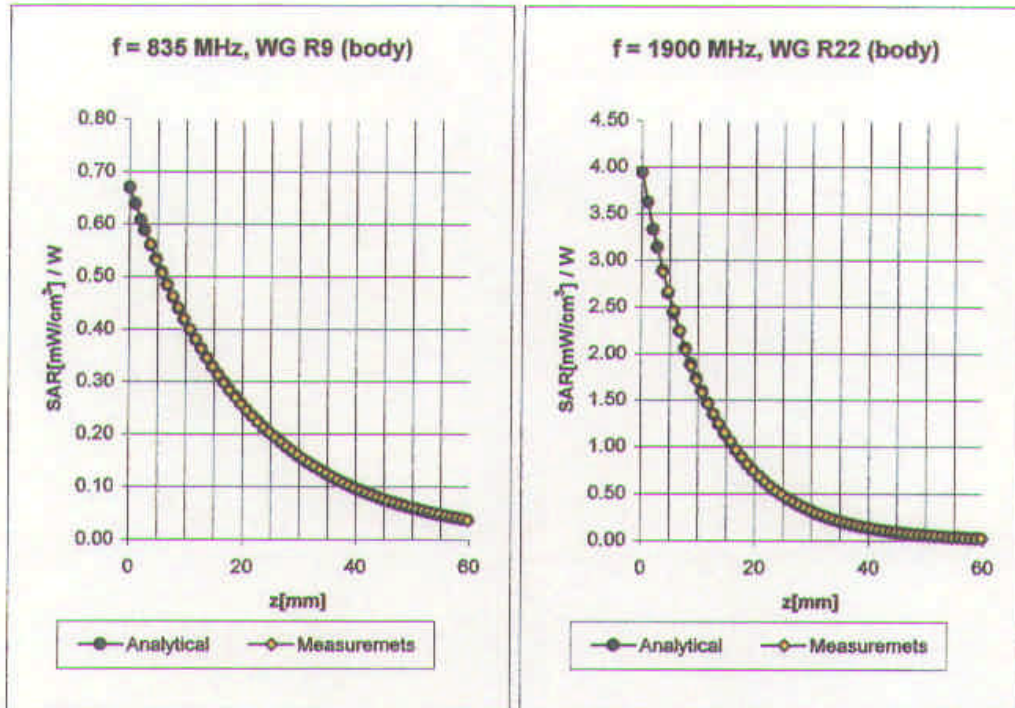

Body	835 MHz	$\epsilon_r = 55.2 \pm 5\%$	$\sigma = 0.97 \pm 5\% \text{ mho/m}$
Body	900 MHz	$\epsilon_r = 55.0 \pm 5\%$	$\sigma = 1.05 \pm 5\% \text{ mho/m}$
ConvF X	6.6 $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	6.6 $\pm 9.5\%$ (k=2)	Alpha	0.33
ConvF Z	6.6 $\pm 9.5\%$ (k=2)	Depth	2.60

Body	1900 MHz	$\epsilon_r = 53.3 \pm 5\%$	$\sigma = 1.52 \pm 5\% \text{ mho/m}$
Body	1800 MHz	$\epsilon_r = 53.3 \pm 5\%$	$\sigma = 1.52 \pm 5\% \text{ mho/m}$
ConvF X	4.9 $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	4.9 $\pm 9.5\%$ (k=2)	Alpha	0.64
ConvF Z	4.9 $\pm 9.5\%$ (k=2)	Depth	2.24


Conversion Factor Assessment

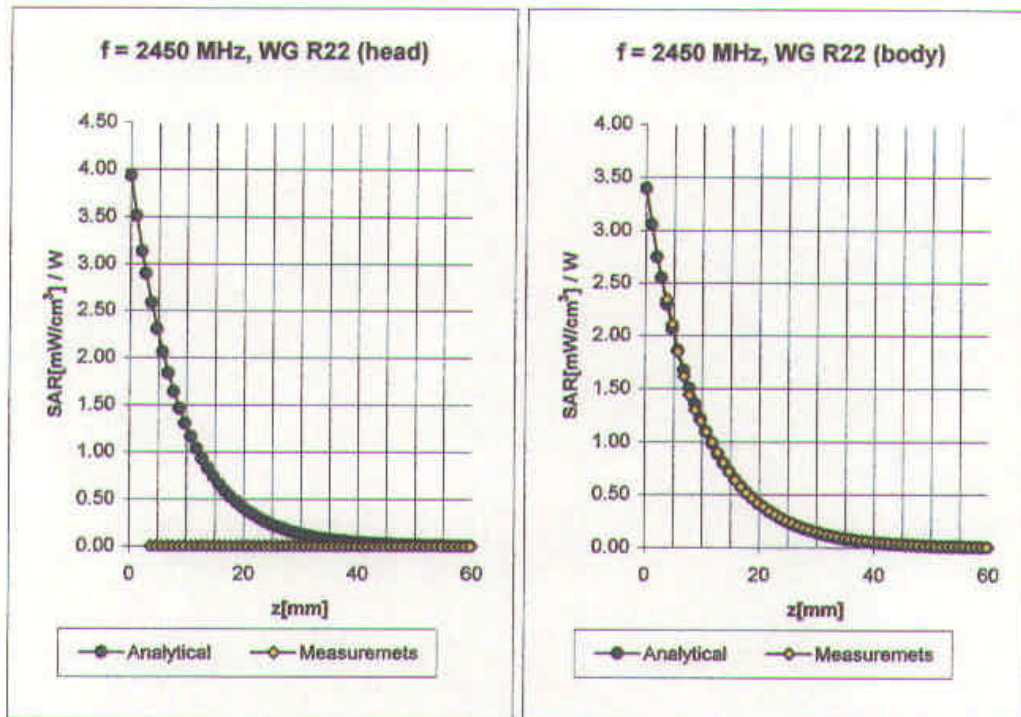

2450	Head	MHz	$\epsilon_r = 39.2 \pm 5\%$	$\sigma = 1.80 \pm 5\% \text{ mho/m}$	
	ConvF X		$4.9 \pm 8.9\% (k=2)$	Boundary effect:	
	ConvF Y		$4.9 \pm 8.9\% (k=2)$	Alpha	1.00
	ConvF Z		$4.9 \pm 8.9\% (k=2)$	Depth	1.60
2450	Body	MHz	$\epsilon_r = 62.7 \pm 5\%$	$\sigma = 1.95 \pm 5\% \text{ mho/m}$	
	ConvF X		$4.4 \pm 8.9\% (k=2)$	Boundary effect:	
	ConvF Y		$4.4 \pm 8.9\% (k=2)$	Alpha	1.00
	ConvF Z		$4.4 \pm 8.9\% (k=2)$	Depth	1.50

Deviation from Isotropy in HSL

Error (θ, ϕ), $f = 900$ MHz

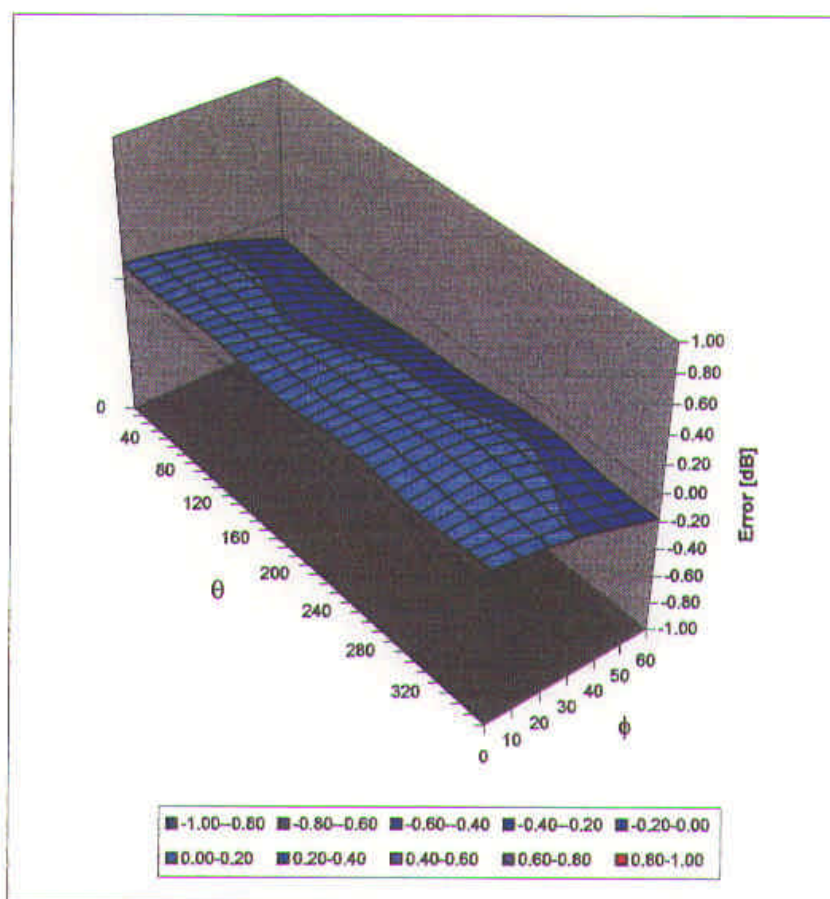

Additional Conversion Factors for Dosimetric E-Field Probe

Type:

ET3DV6

Serial Number:

1560

Place of Assessment:

Zurich

Date of Assessment:


September 30, 2002

Probe Calibration Date:

September 27, 2002

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 900 MHz or at 1800 MHz.

Assessed by:



Dosimetric E-Field Probe ET3DV6 SN: 1560

Conversion factor ($\pm$ standard deviation)

150 MHz

ConvF

$8.6 \pm 8\%$

$\epsilon_r = 52.3 \pm 5\%$
 $s = 0.76 \pm 5\% \text{ mho/m}$

(Head tissue)

150 MHz

ConvF

$8.5 \pm 8\%$

$\epsilon_r = 61.9 \pm 5\%$
 $s = 0.80 \pm 5\% \text{ mho/m}$

(Body tissue)

300 MHz

ConvF

$7.4 \pm 8\%$

$\epsilon_r = 45.3 \pm 5\%$
 $s = 0.87 \pm 5\% \text{ mho/m}$

(Head tissue)

450 MHz

ConvF

$7.9 \pm 8\%$

$\epsilon_r = 45.1 \pm 5\%$
 $s = 0.85 \pm 5\% \text{ mho/m}$

(Head tissue)

450 MHz

ConvF

$7.7 \pm 8\%$

$\epsilon_r = 56.7 \pm 5\%$
 $s = 0.94 \pm 5\% \text{ mho/m}$

(Body tissue)