SAR TEST REPORT

HCT CO., LTD

EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
FCC ID:	A3LSCHI509
Model:	SCH-i509
Date of Issue:	Feb. 23, 2012
Test report No.:	HCTA1202FS07
Test Laboratory:	**HCT CO., LTD.** 105-1, Jangam-ri, Majang-myeon, Icheon-si, Gyeonggi-do, Korea 467-811 TEL: +82 31 645 6485 FAX: +82 31 645 6401
Applicant :	**SAMSUNG Electronics Co., Ltd.** 416 Maetan3-Dong, YeongTong-Gu, Suwon-Si, Gyeonggi-Do, Korea, 443-742
Testing has been carried out in accordance with:	RSS-102 Issue 4; Health Canada Safety Code 6 47CFR §2.1093 FCC OET Bulletin 65(Edition 97-01), Supplement C (Edition 01-01) ANSI/ IEEE C95.1 – 1992 IEEE 1528-2003
Test result:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.
Signature	Report prepared by : Young-Soo Jang Test Engineer of SAR Part Approved by : Jae-Sang So Manager of SAR Part

Table of Contents

1. INTRODUCTION 3
2. DESCRIPTION OF DEVICE 4
3. DESCRIPTION OF TEST EQUIPMENT 5
3.1 SAR MEASUREMENT SETUP 5
3.3 PROBE CALIBRATION PROCESS 7
3.4 SAM Phantom 9
3.5 Device Holder for Transmitters 9
3.6 Brain & Muscle Simulating Mixture Characterization 10
3.7 SAR TEST EQUIPMENT 11
4. SAR MEASUREMENT PROCEDURE 12
5. DESCRIPTION OF TEST POSITION 13
5.1 HEAD POSITION 13
5.2 Body Holster/Belt Clip Configurations 14
6. MEASUREMENT UNCERTAINTY 15
7. ANSI/ IEEE C95.1 - 1992 RF EXPOSURE LIMITS 16
8. SYSTEM VERIFICATION 17
8.1 Tissue Verification 17
8.2 System Validation 17
8.3 System Validation Procedure 17
9. RF CONDUCTED POWER MEASUREMENT 18
9.1 CDMA & EVDO 18
9.2 WiFi 20
10. SAR Test configuration & Antenna Information 21
11. SAR Considerations for Multiple Transmitters and Antennas 22
12. SAR TEST DATA SUMMARY 24
12.1 Measurement Results (CDMA835 Head SAR) 24
12.2 Measurement Results (CDMA835 Body-worn SAR) 25
12.3 Measurement Results (EVDO835 Hotspot SAR) 26
13. CONCLUSION 27
14. REFERENCES 28
Attachment 1. – SAR Test Plots 29
Attachment 2. – Dipole Validation Plots 49
Attachment 3. – Probe Calibration Data 56
Attachment 4. – Dipole Calibration Data 83

1. INTRODUCTION

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. The measurement procedure described in IEEE/ANSI C95.3-1992 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative of the incremental electromagnetic energy (d*W*) absorbed by (dissipated in) an incremental mass (d*m*) contained in a volume element (d*V*) of a given density (*r*). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body.

$$SAR = \frac{d}{dt}\left(\frac{dU}{dm}\right) = \frac{d}{dt}\left(\frac{dU}{\rho\, dv}\right)$$

Figure 2. SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \sigma E^2 / \rho$$

where:

σ = conductivity of the tissue-simulant material (S/m)

ρ = mass density of the tissue-simulant material (kg/m^3)

E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

2. DESCRIPTION OF DEVICE

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

EUT Type	Cellular CDMA Phone with Bluetooth/ WLAN				
FCC ID:	A3LSCHI509				
Model:	SCH-i509				
Trade Name	SAMSUNG Electronics Co., Ltd.				
Application Type	Certification				
Mode(s) of Operation	CDMA835/802.11b/g/n				
Tx Frequency	824.70 - 848.31 MHz (CDMA835)/ 2 412- 2 462 MHz (WLAN)				
Rx Frequency	869.70 - 893.31 MHz (CDMA835)/ 2 412- 2 462 MHz (WLAN)				
FCC Classification	Licensed Non-Broadcast Transmitter Held to Ear (TNE)				
Production Unit or Identical Prototype	Prototype				
Max SAR	Band	1g SAR (W/kg)			
		Head	Body-worn	Hotspot	
	CDMA835	0.848	0.868	0.909	
Date(s) of Tests	Feb. 20, 2012 / Mar. 9, 2012				
Antenna Type	Integral Antenna				
EVDO	EVDO Rev.0, A support				
Key Features	Mobile Hotspot support. But, it doesn't support VoIP capability.				

3. DESCRIPTION OF TEST EQUIPMENT

3.1 SAR MEASUREMENT SETUP

These measurements are performed using the DASY4 automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Staubli), robot controller, Pentium III computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Figure.3.1).

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the HP Pentium IV 3.0 GHz computer with Windows XP system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

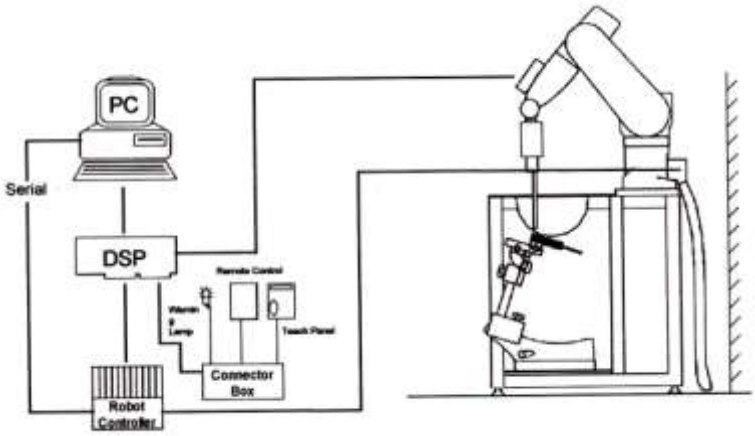

Figure 3.1 HCT SAR Lab. Test Measurement Set-up

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in.

3.2 DASY4 E-FIELD PROBE SYSTEM

3.2.1 ET3DV6 Probe Specification

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection System Built-in shielding against static charges
Calibration	In air from 10 MHz to 2.5 GHz In brain and muscle simulating tissue at Frequencies of 450 MHz, 900 MHz and 1.8 GHz (accuracy: 8 %)
Frequency	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity	± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation normal probe axis)
Dynamic	5 μW/g to > 100 mW/g;
Range Linearity:	± 0.2 dB
Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces.
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application	General dissymmetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

Figure 3.2 Photograph of the probe and the Phantom

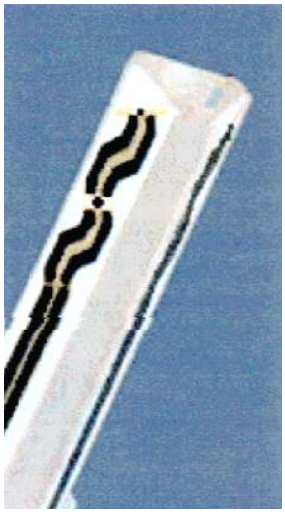

Figure 3.3 ET3DV6 E-field

The SAR measurements were conducted with the dosimetric probe ET3DV6, designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches a maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.

3.3 PROBE CALIBRATION PROCESS

3.3.1 E-Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with an accuracy better than ± 10 %. The spherical isotropy was evaluated with the proper procedure and found to be better than ± 0.25 dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe is tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies bellow 1 GHz, and in a waveguide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C\frac{\Delta T}{\Delta t}$$

where:

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

σ = simulated tissue conductivity,

ρ = Tissue density (1.25 g/cm^3 for brain tissue)

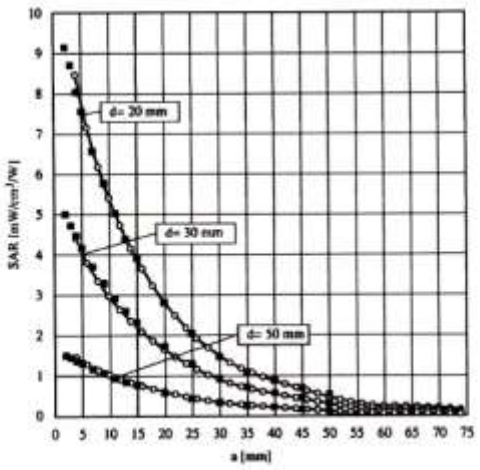

Figure 3.4 E-Field and Temperature measurements at 900 MHz

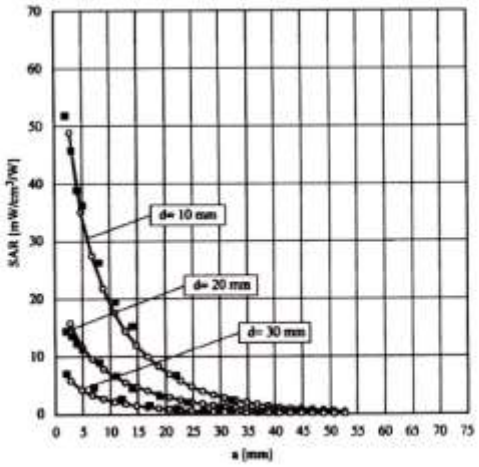

Figure 3.5 E-Field and temperature measurements at 1.8 GHz

3.3.2 Data Extrapolation

The DASY4 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i (i=x,y,z)
U_i = input signal of channel i (i=x,y,z)
cf = crest factor of exciting field (DASY parameter)
dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with V_i = compensated signal of channel i (i = x,y,z)
$Norm_i$ = sensor sensitivity of channel i (i = x,y,z)
$\mu V/(V/m)^2$ for E-field probes
ConvF = sensitivity of enhancement in solution
E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/g
E_{tot} = total field strength in V/m
σ = conductivity in [mho/m] or [Siemens/m]
ρ = equivalent tissue density in g/cm^3

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770}$$

with P_{pwe} = equivalent power density of a plane wave in W/cm^2
E_{tot} = total electric field strength in V/m

3.4 SAM Phantom

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Figure 3.6 SAM Phantom

Shell Thickness	2.0 mm ± 0.2 mm (6 ± 0.2 mm at ear point)
Filling Volume	about 25 L
Dimensions	1 000 mm x 500 mm (L x W)

3.5 Device Holder for Transmitters

In combination with the SAM Phantom V 4.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatable positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations. To produce the Worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

Figure 3.7 Device Holder

3.6 Brain & Muscle Simulating Mixture Characterization

The brain and muscle mixtures consist of a viscous gel using hydrox-ethyl cellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bacteriacide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Hartsgrove.

Ingredients (% by weight)	Frequency (MHz)											
	450		750		835		915		1 900		2 450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.2	51.7	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.4	1.0	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	57	47.2	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	0.2	0.0	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.2	0.1	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.00	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.00	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7

Salt:	99 % Pure Sodium Chloride	Sugar:	98 % Pure Sucrose
Water:	De-ionized, 16M resistivity	HEC:	Hydroxyethyl Cellulose
DGBE:	99 % Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy) ethanol]		
Triton X-100(ultra pure):	Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl] ether		

Table 3.1 Composition of the Tissue Equivalent Matter

3.7 SAR TEST EQUIPMENT

Manufacturer	Type / Model	S/N	Calib. Date	Calib.Interval	Calib.Due
SPEAG	SAM Phantom	-	N/A	N/A	N/A
Staubli	Robot RX90L	F01/5K09A1/A/01	N/A	N/A	N/A
Staubli	Robot ControllerCS7MB	F99/5A82A1/C/01	N/A	N/A	N/A
HP	Pavilion t000_puffer	KRJ51201TV	N/A	N/A	N/A
SPEAG	Light Alignment Sensor	265	N/A	N/A	N/A
Staubli	Teach Pendant (Joystick)	D221340.01	N/A	N/A	N/A
SPEAG	DAE3	614	Sep. 27, 2011	Annual	Sep. 27, 2012
SPEAG	DAE3	446	Sep. 27, 2011	Annual	Sep. 27, 2012
SPEAG	E-Field Probe ET3DV6	1630	Nov. 18, 2011	Annual	Nov. 18, 2012
SPEAG	E-Field Probe ET3DV6	1798	Apr. 14, 2011	Annual	Apr. 14, 2012
SPEAG	Validation Dipole D835V2	441	May 16, 2011	Annual	May 16, 2012
Agilent	Power Meter(F) E4419B	MY41291386	Nov. 04, 2011	Annual	Nov. 04, 2012
Agilent	Power Sensor(G) 8481	MY41090870	Nov. 04, 2011	Annual	Nov. 04, 2012
HP	Dielectric Probe Kit 85070C	00721521	N/A	N/A	N/A
HP	Dual Directional Coupler	16072	Nov. 04, 2011	Annual	Nov. 04, 2012
R&S	Base Station CMU200	110740	July 26, 2011	Annual	July 26, 2012
Agilent	Base Station E5515C	GB44400269	Feb. 10, 2012	Annual	Feb. 10, 2013
HP	Signal Generator E4438C	MY42082646	Nov. 11, 2011	Annual	Nov. 11, 2012
HP	Network Analyzer 8753ES	JP39240221	Mar. 30, 2011	Annual	Mar. 30, 2012

NOTE:

The E-field probe was calibrated by SPEAG, by the waveguide technique procedure. Dipole Validation measurement is performed by HCT Lab. before each test. The brain simulating material is calibrated by HCT using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.

4. SAR MEASUREMENT PROCEDURE

The evaluation was performed with the following procedure:

1. The SAR value at a fixed location above the ear point was measured and was used as a reference value for assessing the power drop.

2. The SAR distribution at the exposed side of the head was measured at a distance of 3.9 mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15 mm x 15 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.

3. Around this point, a volume of 32 mm x 32 mm x 30 mm was assessed by measuring 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

   a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
   b. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions. The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
   c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

4. The SAR value, at the same location as procedure #1, was re-measured. If the value changed by more than 5 %, the evaluation is repeated.

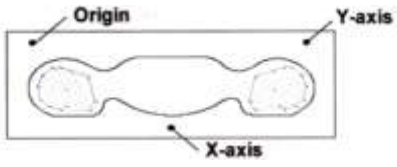

Figure 4.1 SAR Measurement Point in Area Scan

5. DESCRIPTION OF TEST POSITION

5.1 HEAD POSITION

The device was placed in a normal operating position with the Point A on the device, as illustrated in following drawing, aligned with the location of the RE(ERP) on the phantom. With the ear-piece pressed against the head, the vertical center line of the body of the handset was aligned with an imaginary plane consisting of the RE, LE and M. While maintaining these alignments, the body of the handset was gradually moved towards the cheek until any point on the mouth-piece or keypad contacted the cheek. This is a cheek/touch position.
For ear/tilt position, while maintain the device aligned with the BM and FN lines, the device was pivot against ERP back for 15º or until the device antenna touch the phantom. Please refer to IEEE 1528-2003 illustration below.

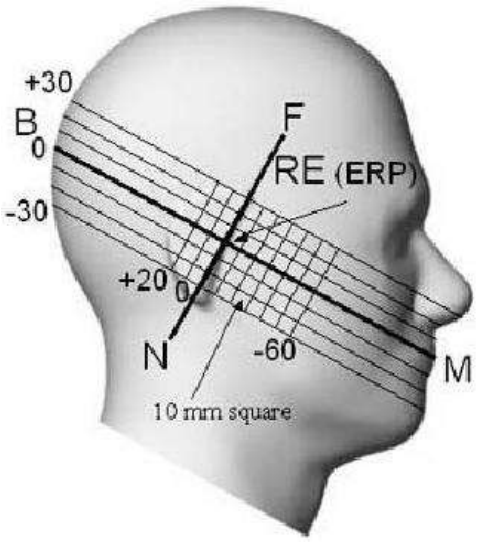

Figure 5.1 Side view of the phantom

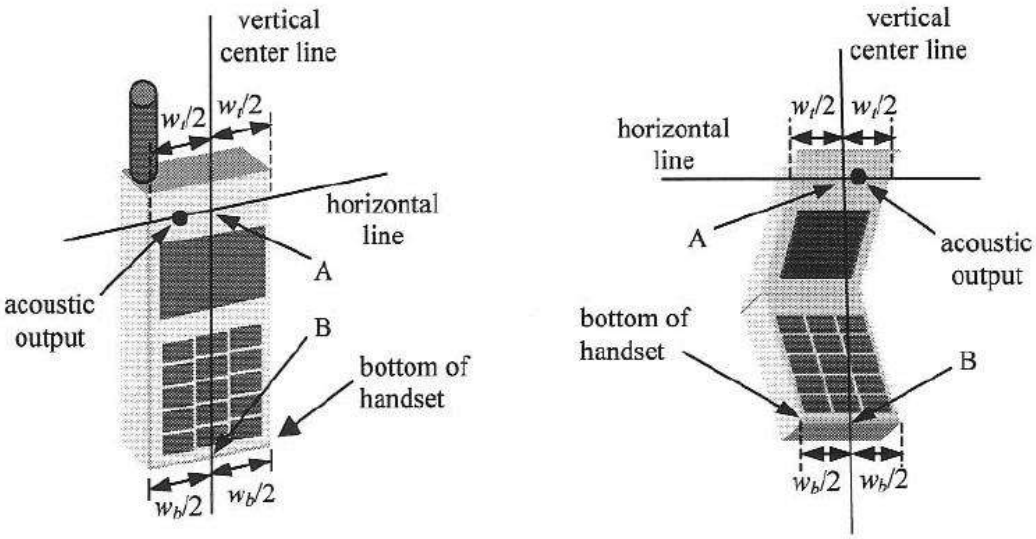

Figure 5.2 Handset vertical and horizontal reference lines

5.2 Body Holster/Belt Clip Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with each accessory. If multiple accessory share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some Devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used.

Since this EUT does not supply any body worn accessory to the end user a distance of 1.0 cm from the EUT back surface to the liquid interface is configured for the generic test.

"See the Test SET-UP Photo"

Transmitters that are designed to operate in front of a person’s face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessory(ies), Including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

In all cases SAR measurements are performed to investigate the worst-case positioning. Worstcase positioning is then documented and used to perform Body SAR testing.

6. MEASUREMENT UNCERTAINTY

Error Description	Tol (± %)	Prob. dist.	Div.	c_i	Standard Uncertainty (± %)	v_{eff}
1. Measurement System						
Probe Calibration	6.00	N	1	1	6.00	∞
Axial Isotropy	4.70	R	1.73	0.7	1.90	∞
Hemispherical Isotropy	9.60	R	1.73	0.7	3.88	∞
Boundary Effects	1.00	R	1.73	1	0.58	∞
Linearity	4.70	R	1.73	1	2.71	∞
System Detection Limits	1.00	R	1.73	1	0.58	∞
Readout Electronics	0.30	N	1.00	1	0.30	∞
Response Time	0.8	R	1.73	1	0.46	∞
Integration Time	2.6	R	1.73	1	1.50	∞
RF Ambient Conditions	3.00	R	1.73	1	1.73	∞
Probe Positioner	0.40	R	1.73	1	0.23	∞
Probe Positioning	2.90	R	1.73	1	1.67	∞
Max SAR Eval	1.00	R	1.73	1	0.58	∞
2.Test Sample Related						
Device Positioning	2.90	N	1.00	1	2.90	145
Device Holder	3.60	N	1.00	1	3.60	5
Power Drift	5.00	R	1.73	1	2.89	∞
3.Phantom and Setup						
Phantom Uncertainty	4.00	R	1.73	1	2.31	∞
Liquid Conductivity(target)	5.00	R	1.73	0.64	1.85	∞
Liquid Conductivity(meas.)	2.07	N	1	0.64	1.32	9
Liquid Permitivity(target)	5.00	R	1.73	0.6	1.73	∞
Liquid Permitivity(meas.)	5.02	N	1	0.6	3.01	9
Combind Standard Uncertainty					11.13	
Coverage Factor for 95 %					k=2	
Expanded STD Uncertainty					22.25	

Table 6.1 Uncertainty (800 MHz- 2450 MHz)

7. ANSI/ IEEE C95.1 - 1992 RF EXPOSURE LIMITS

HUMAN EXPOSURE	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Occupational (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.00

Table 7.1 Safety Limits for Partial Body Exposure

NOTES:

* The Spatial Peak value of the SAR averaged over any 1 g of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

** The Spatial Average value of the SAR averaged over the whole-body.

*** The Spatial Peak value of the SAR averaged over any 10 g of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).

8. SYSTEM VERIFICATION

8.1 Tissue Verification

Freq. [MHz]	Date	Liquid	Liquid Temp.[°C]	Parameters	Target Value	Measured Value	Deviation [%]	Limit [%]
835	Feb. 20, 2012	Head	21.2	ε r	41.5	43.3	+ 4.34	± 5
				σ	0.90	0.91	+ 1.11	± 5
835		Body	21.2	ε r	55.2	54.4	- 1.45	± 5
				σ	0.97	0.99	+ 2.06	± 5
835	Mar. 9, 2012	Body	21.3	ε r	55.2	55.2	0.00	± 5
				σ	0.97	1.01	+ 4.12	± 5

The dielectronic parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070C Dielectronic Probe Kit and Agilent Network Analyzer.

8.2 System Validation

Prior to assessment, the system is verified to the ± 10 % of the specifications at 835 MHz by using the system validation kit. (Graphic Plots Attached)

Probe (SN)	Freq. [MHz]	Dipole (SN)	Date	Liquid	Amb. Temp. [°C]	Liquid Temp. [°C]	Target Value (SPEAG) (mW/g)	*Measured Value (mW/g)	1 W Normalized SAR_{1g} (mW/g)	Deviation [%]	Limit [%]
1630	835	441	Feb.20,2012	Head	21.2	21.4	9.34	0.952	9.52	+ 1.93	± 10
	835	441		Body	21.2	21.4	9.45	0.95	9.50	+ 0.53	± 10
1798	835	441	Mar. 9, 2012	Body	21.3	21.5	9.45	0.94	9.40	-0.53	± 10

8.3 System Validation Procedure

SAR measurement was Prior to assessment, the system is verified to the ± 10 % of the specifications at target frequency by using the system validation kit. (Graphic Plots Attached)

- Cabling the system, using the validation kit equipments.
- Generate about 100 mW Input Level from the Signal generator to the Dipole Antenna.
- Dipole Antenna was placed below the Flat phantom.
- The measured one-gram SAR at the surface of the phantom above the dipole feed-point should be within 10 % of the target reference value.
- The results are normalized to 1 W input power.

Note;

SAR Verification was performed according to the FCC KDB 450824.

9. RF CONDUCTED POWER MEASUREMENT

9.1 CDMA & EVDO

The handset was placed into a simulated call using a base station simulator in a shielded chamber. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR. SAR measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator. The SAR measurement software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more then 5% occurred, the tests were repeated.

9.2 SAR Measurement Conditions for CDMA2000 1x

These procedures were followed according to FCC "SAR Measurement Procedures for 3G Devices", May 2006.

9.1.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by "SAR Measurement Procedures for 3G Devices", May 2006. MMaximum output power is verified on the High, Middle and Low channels according to procedures defined in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in “All Up” condition.

1. If the mobile station supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9 600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1 (Table 9.1) parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH0 and demodulation of RC 3, 4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9 600 bps Fundamental Channel and 9 600 bps SCH0 data rate Channel and 9 600 bps SCH0 data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2(Table 9.2) was applied.
5. FCHs were configured at full rate for mMaximum SAR with “All Up” power control bits.

Parameters for Max. Power for RC1

Parameter	Units	Value
$\hat{I}_{or}$	dBm/1.23 MHz	-104
$\frac{\text{Pilot } E_c}{\hat{I}_{or}}$	dB	-7
$\frac{\text{Traffic } E_c}{\hat{I}_{or}}$	dB	-7.4

Table. 9.1

Parameters for Max. Power for RC3

Parameter	Units	Value
$\hat{I}_{or}$	dBm/1.23 MHz	-86
$\frac{\text{Pilot } E_c}{\hat{I}_{or}}$	dB	-7
$\frac{\text{Traffic } E_c}{\hat{I}_{or}}$	dB	-7.4

Table. 9.2

9.1.2 Head SAR Measurement

SAR for head exposure configurations is measured in RC3 with the DUT configured to transmit at full rate using Loopback Service Option SO55. SAR for RC1 is not required when the mMaximum average output of each channel is less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the mMaximum output channel in RC1 using the exposure configuration that results in the highest SAR for that channel in RC3.

9.1.3 Body SAR Measurement

SAR for body exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. SAR for multiple code channels (FCH + SCHn) is not required when the mMaximum average output of each RF channel is less than ¼ dB higher than that measured with FCH only. Otherwise, SAR is measured on the mMaximum output channel (FCH + SCHn) with FCH at full rate and SCH0 enabled at 9 600 bps using the exposure configuration that results in the highest SAR for that channel with FCH only. When multiple code channels are enabled, the DUT output may shift by more than 0.5 dB and lead to higher SAR drifts and SCH dropouts.

Body SAR in RC1 is not required when the mMaximum average output of each channel is less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the mMaximum output channel in RC1; with Loopback Service Option SO55, at full rate, using the body exposure configuration that results in the highest SAR for that channel in RC3.

9.1.4 Handsets with EV-DO

For handsets with Ev-Do capabilities, when the mMaximum average output of each channel in Rev. 0 is less than ¼ dB higher than that measured in RC3 (1x RTT), body SAR for Ev-Do is not required. Otherwise, SAR for Rev. 0 is measured on the mMaximum output channel at 153.6 kbps using the body exposure configuration that results in the highest SAR for that channel in RC3. SAR for Rev. A is not required when the mMaximum average output of each channel is less than that measured in Rev. 0 or less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the mMaximum output channel for Rev. A using a Reverse Data Channel payload size of 4 096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations. A Forward Traffic Channel data rate corresponding to the 2-slot version of 307.2 kbps with the ACK Channel transmitting in all slots should be configured in the downlink for both Rev. 0 and Rev. A.

Maximum Average Output Power Measurement for FCC ID: A3LSCHI509

Band	Ch.	CDMA2000 RC	SO2	SO55	TDSO SO32 (F-SCH)	TDSO SO32 (+SCH)	1xEvDO Rev.0	1xEvDO Rev.A
CDMA	1013	RC1/1	24.53	24.51	-	-	-	-
		RC3/3	24.51	24.54	24.52	24.53	24.44	24.53
	384	RC1/1	24.46	24.43	-	-	-	-
		RC3/3	24.45	24.40	24.44	24.44	24.41	24.51
	777	RC1/1	24.44	24.42	-	-	-	-
		RC3/3	24.43	24.42	24.42	24.43	24.37	24.42

CDMA Avergae Conducted output powers (dBm)

9.2 WiFi

Band	Channel	Conducted Power (dBm)			
		Data Rate (Mbps)			
		1	2	5.5	11
IEEE 802.11b	1	9.88	9.51	9.54	9.78
	6	9.74	9.50	9.49	9.47
	11	9.85	9.76	9.74	9.69

Average IEEE 802.11b Conducted output power

Band	Channel	Conducted Power (dBm)							
		Data Rate (Mbps)							
		6	9	12	18	24	36	48	54
IEEE 802.11g	1	9.43	9.41	9.40	9.39	9.37	9.36	9.35	9.39
	6	9.54	9.53	9.50	9.51	9.45	9.44	9.41	9.37
	11	9.77	9.73	9.70	9.69	9.67	9.64	9.62	9.59

Average IEEE 802.11g Conducted output power

Band	Channel	Conducted Power (dBm)							
		Data Rate (Mbps)							
		6.5	13	20	26	39	52	58	65
IEEE 802.11n (HT-20)	1	9.46	9.45	9.43	9.40	9.37	9.31	9.30	9.25
	6	9.72	9.70	9.64	9.63	9.61	9.58	9.52	9.50
	11	9.56	9.52	9.51	9.48	9.46	9.41	9.40	9.37

Average IEEE 802.11n Conducted output power

10. SAR Test configuration & Antenna Information

10.1 SAR Test configurations

Mode	Rear	Front	Left	Right	Bottom	Top
EVDO835	Yes	Yes	Yes	Yes	Yes	No

10.2 Antenna and Device Information

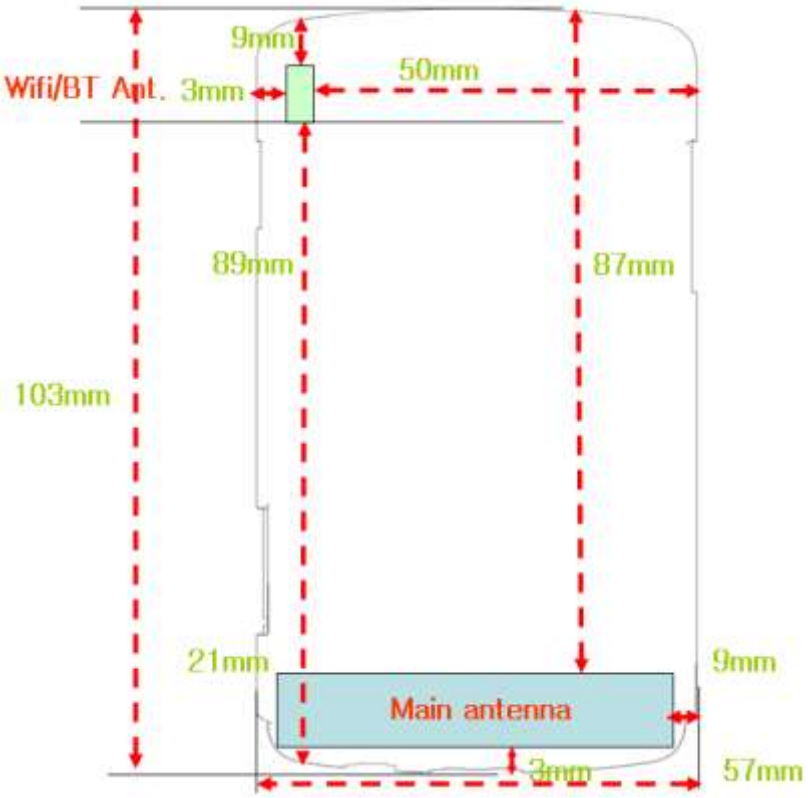

[Front side View]

Note;

Per FCC KDB Publication 941225 D06, we performed the SAR testing at 1 cm from the top & bottom surfaces and also from side edges with a transmitting antenna ≤ 2.5 cm from an edge.

Distance between the Main antennas and the BT/WIFI antenna: 78 mm

Please see the separate Antenna distance document.

11. SAR Considerations for Multiple Transmitters and Antennas

11.1 SAR Evaluation Considerations

These procedures were followed according to FCC "SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas", May 2008. The procedures are applicable to phones with built-in unlicensed transmitters, such as 802.11 a/b/g and Bluetooth devices.

	2.45	5.15 - 5.35	5.47 - 5.85	GHz
P_{Ref}	12	6	5	mW
Device output power should be rounded to the nearest mW to compare with values specified in this				

Table. 11.1 Output Power Thresholds for Unlicensed Transmitters

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	Routine evaluation required	SAR not required: Unlicensed only ○ when stand-alone 1-g SAR is not required and antenna is ≥ 5 cm from other antennas Licensed & Unlicensed ○ when the sum of the 1-g SAR is < 1.6 W/kg for all simultaneous transmitting antennas ○ when SAR to peak location separation ratio of simultaneous transmitting antenna pair is < 0.3 SAR required: Licensed & Unlicensed antenna pairs with SAR to peak location separation ratio ≥ 0.3; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply
Unlicensed Transmitters	When there is no simultaneous transmission – ○ output ≤ 60/f: SAR not required ○ output > 60/f: stand-alone SAR required When there is simultaneous transmission – Stand-alone SAR not required when ○ output ≤ 2·P_{Ref} and antenna is ≥ 5.0 cm from other antennas ○ output ≤ P_{Ref} and antenna is ≥ 2.5 cm from other antennas ○ output ≤ P_{Ref} and antenna is < 2.5 cm from other antennas, each with either output power ≤ P_{Ref} or 1-g SAR < 1.2 W/kg Otherwise stand-alone SAR is required When stand-alone SAR is required ○ test SAR on highest output channel for each wireless mode and exposure condition ○ if SAR for highest output channel is > 50% of SAR limit, evaluate all channels according to normal procedures	
Jaw, Mouth and Nose	Flat phantom SAR required ○ when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues ○ position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.

SAR Evaluation Requirements for Multiple Transmitters Handsets

FCC ID: A3LSCHI509 / BT Max. RF output power: 7.87 dBm (6.1 mW)

WLAN Max. RF output power: Wi-Fi 802.11b (9.88 dBm)

11.2 Simultaneous Transmission

- Main antenna can transmit simultaneously with BT antenna.
- Main antenna can transmit simultaneously with WLAN antenna

Simultaneous Transmission Summation for Held to Ear

Simultaneous TX	configuration	CDMA835 SAR(W/kg)	WIFI SAR (W/kg)	∑SAR (W/kg)
Head SAR	Left Cheek	0.848	0	0.848
	Left Tilt	0.3	0	0.300
	Right Cheek	0.611	0	0.611
	Right Tilt	0.313	0	0.313

Simultaneous Transmission Summation for Body-Worn (1cm)

Simultaneous TX	configuration	CDMA835 SAR(W/kg)	WIFI SAR (W/kg)	∑SAR (W/kg)
Body SAR	Back	0.868	0	0.868

Simultaneous Transmission Summation for Hotspot

Simultaneous TX	configuration	EVDO835 SAR(W/kg)	WIFI SAR (W/kg)	∑SAR (W/kg)
Body SAR	Back	0.909	0	0.909
	Front	0.592	0	0.592
	Left	0.418	0	0.418
	Right	0.277	0	0.277
	Bottom	0.18	0	0.180
	Top	-	-	-

11.3 Simultaneous Transmission Conclusion

The above numerical summed SAR was below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit. No volumetric SAR summation is required per FCC KDB Publication 648474.

The above tables represent the worst-case simultaneous transmission scenarios possibility with this device. WLAN SAR testing is not required since the WLAN Power is less than 60/f.

The conducted output power level of the BT transmitter is less than $2*P_{ref}$, the BT antenna is more than 5 cm from the other antenna, therefore, a stand-alone BT SAR evaluation is not required.

12. SAR TEST DATA SUMMARY

12.1 Measurement Results (CDMA835 Head SAR)

Frequency		Modulation	Conducted Power (dBm)	Power Drift (dB)	Battery	Phantom Position	SAR(mW/g)
MHz	Channel						
824.7	1013 (Low)	CDMA835	24.54	-0.182	Standard	Left Ear	0.816
836.52	384 (Mid)	CDMA835	24.40	-0.036	Standard	Left Ear	0.848
848.31	777 (High)	CDMA835	24.42	-0.086	Standard	Left Ear	0.758
836.52	384 (Mid)	CDMA835	24.40	-0.032	Standard	Left Tilt 15°	0.300
836.52	384 (Mid)	CDMA835	24.40	0.069	Standard	Right Ear	0.611
836.52	384 (Mid)	CDMA835	24.40	0.053	Standard	Right Tilt 15°	0.313
ANSI/ IEEE C95.1 - 1992– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population					**Head 1.6 W/kg (mW/g) Averaged over 1 gram**		

NOTES:

1 The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2 All modes of operation were investigated and the worst-case are reported.
3 Measured Depth of Simulating Tissue is 15.0 cm ± 0.2 cm.
4 Tissue parameters and temperatures are listed on the SAR plot.
5 Battery Type ☒ Standard ☐ Extended ☐ Slim
Batteries are fully charged for all readings.
6 Test Signal Call Mode ☐ Manual Test cord ☒ Base Station Simulator
7 Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
8 Head SAR was tested under RC3/SO55.

12.2 Measurement Results (CDMA835 Body-worn SAR)

Frequency		Modulation	Conducted Power (dBm)	Power Drift (dB)	Configuration	Separation Distance	SAR(mW/g)
MHz	Channel						
824.7	1013 (Low)	CDMA835	24.52	-0.108	Rear	1.0 cm	0.868
836.52	384 (Mid)	CDMA835	24.44	-0.149	Rear	1.0 cm	0.858
848.31	777 (High)	CDMA835	24.42	0.068	Rear	1.0 cm	0.699
ANSI/ IEEE C95.1 - 1992– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						**Body 1.6 W/kg (mW/g)** Averaged over 1 gram	

NOTES:

1 The test data reported are the worst-case SAR value with the antenna-Body position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2 All modes of operation were investigated and the worst-case are reported.
3 Measured Depth of Simulating Tissue is 15.0 cm ± 0.2 cm.
4 Tissue parameters and temperatures are listed on the SAR plot.
5 Battery Type ☒ Standard ☐ Extended ☐ Slim
Batteries are fully charged for all readings.
6 Test Signal Call Mode ☐ Manual Test cord ☒ Base Station Simulator
7 Test Configuration ☐ With Holster ☒ Without Holster
8 Body SAR was tested under RC3/SO32 FCH only since FCH+SCH modes are not greater than 0.25 dB of the FCH only mode per KDB Publication 941225 D01.

12.3 Measurement Results (EVDO835 Hotspot SAR)

Frequency		Modulation	Conducted Power (dBm)	Power Drift (dB)	Configuration	Separation Distance	SAR(mW/g)
MHz	Channel						
824.7	1013 (Low)	EVDO	24.44	-0.022	Rear	1.0 cm	0.909
836.52	384 (Mid)	EVDO	24.41	-0.027	Rear	1.0 cm	0.895
848.31	777 (High)	EVDO	24.37	-0.011	Rear	1.0 cm	0.712
836.52	384 (Mid)	EVDO	24.41	-0.01	Front	1.0 cm	0.592
836.52	384 (Mid)	EVDO	24.41	0.113	Left	1.0 cm	0.418
836.52	384 (Mid)	EVDO	24.41	0.126	Right	1.0 cm	0.277
836.52	384 (Mid)	EVDO	24.41	0.175	Bottom	1.0 cm	0.180
ANSI/ IEEE C95.1 - 1992– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						**Body 1.6 W/kg (mW/g)** Averaged over 1 gram	

NOTES:

1 The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2 All modes of operation were investigated and the worst-case are reported.
3 Measured Depth of Simulating Tissue is 15.0 cm ± 0.2 cm.
4 Tissue parameters and temperatures are listed on the SAR plot.
5 Battery Type ☒ Standard ☐ Extended ☐ Slim
Batteries are fully charged for all readings.
6 Test Signal Call Mode ☐ Manual Test cord ☒ Base Station Simulator
7 Test Configuration ☐ With Holster ☒ Without Holster
8 Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
9 EVDO SAR was tested under EVDO Rev.0 RTAP.

13. CONCLUSION

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the ANSI/ IEEE C95.1 1992.

These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests.

14. REFERENCES

[1] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields, July 2001.

[2] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, IEE Recommended Practice or Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body from Wireless Communications Devices.

[3] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio frequency Radiation, Aug. 1996.

[4] ANSI/IEEE C95.1 - 1991, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300 kHz to 100 GHz, New York: IEEE, Aug. 1992

[5] ANSI/IEEE C95.3 - 1991, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, 1992.

[6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.

[7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.

[8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.

[9]K. Pokovi^{o}, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.

[10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.

[11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.

[12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300 MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.

[13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectro magnetics, Canada: 1987, pp. 29-36.

[14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.

[15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.

[16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

[17] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.

[18] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

[19] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10 kHz-300 GHz, Jan. 1995.

[20] Prof. Dr. Niels Kuster, ETH, EidgenØssische Technische Hoschschule Zòrich, Dosimetric Evaluation of the Cellular Phone.

[21] SAR Evaluation of Handsets with Multiple Transmitters and Antennas #648474.

[22] SAR Measurement Procedure for 802.11 a/b/g Transmitters #KDB 248227.

Attachment 1. – SAR Test Plots

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.2 ℃
Ambient Temperature:	21.4 ℃
Test Date:	Feb. 20, 2012

DUT: SCH-i509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz;Duty Cycle: 1:1
Medium parameters used: f = 825 MHz; σ = 0.899 mho/m; ε_r = 43.4; ρ = 1000 kg/m^3
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.27, 6.27, 6.27); Calibrated: 2011-11-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2011-09-27
- Phantom: 1800/1900 Phantom; Type: SAM

Left touch 1013/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.896 mW/g

Left touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.42 V/m; Power Drift = -0.182 dB
Peak SAR (extrapolated) = 1.09 W/kg
SAR(1 g) = 0.816 mW/g; SAR(10 g) = 0.578 mW/g
Maximum value of SAR (measured) = 0.876 mW/g

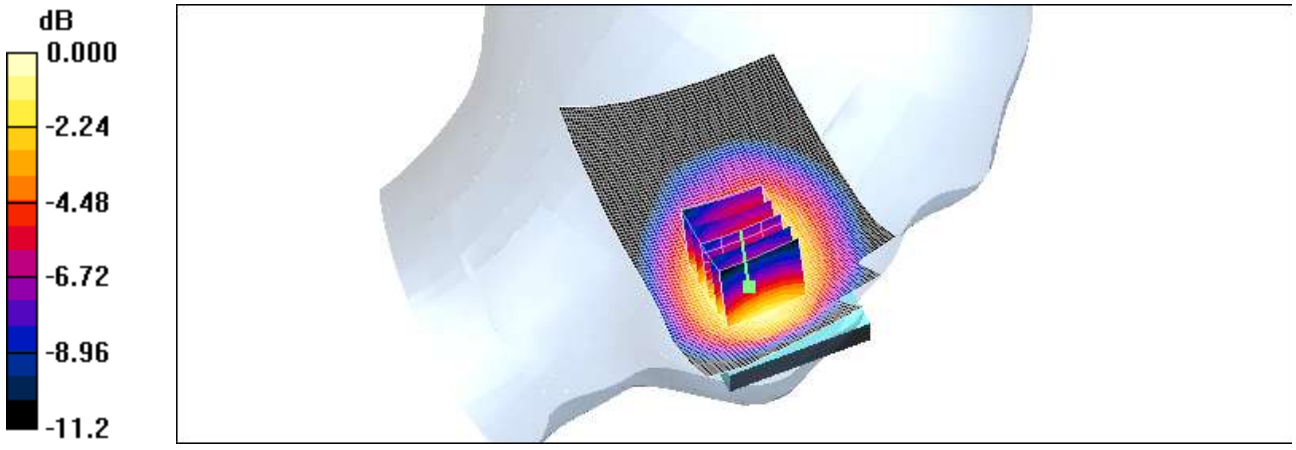

0 dB = 0.876mW/g

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.2 ℃
Ambient Temperature:	21.4 ℃
Test Date:	Feb. 20, 2012

DUT: SCH-i509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): f = 836.52 MHz; σ = 0.911 mho/m; ε_r = 43.2; ρ = 1000 kg/m^3
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.27, 6.27, 6.27); Calibrated: 2011-11-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2011-09-27
- Phantom: 1800/1900 Phantom; Type: SAM

Left touch 384/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.928 mW/g

Left touch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.0 V/m; Power Drift = -0.036 dB
Peak SAR (extrapolated) = 1.13 W/kg
SAR(1 g) = 0.848 mW/g; SAR(10 g) = 0.595 mW/g

Maximum value of SAR (measured) = 0.911 mW/g

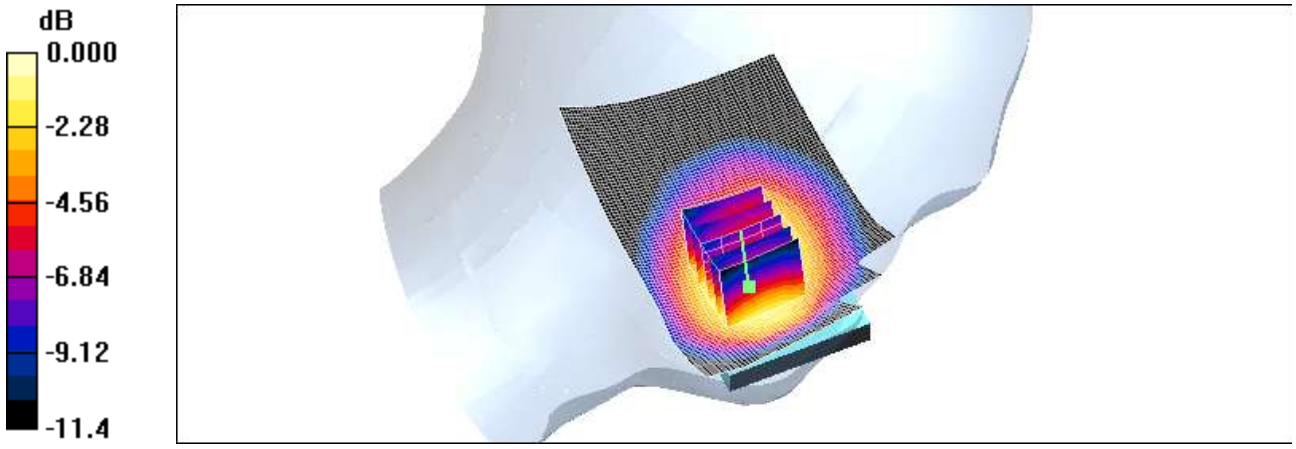

0 dB = 0.911mW/g

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.2 ℃
Ambient Temperature:	21.4 ℃
Test Date:	Feb. 20, 2012

DUT: SCH-i509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): f = 848.31 MHz; σ = 0.921 mho/m; ε_r = 43.1; ρ = 1000 kg/m^3
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.27, 6.27, 6.27); Calibrated: 2011-11-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2011-09-27
- Phantom: 1800/1900 Phantom; Type: SAM

Left touch 777/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.841 mW/g

Left touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.0 V/m; Power Drift = -0.086 dB
Peak SAR (extrapolated) = 0.994 W/kg
SAR(1 g) = 0.758 mW/g; SAR(10 g) = 0.536 mW/g

Maximum value of SAR (measured) = 0.809 mW/g

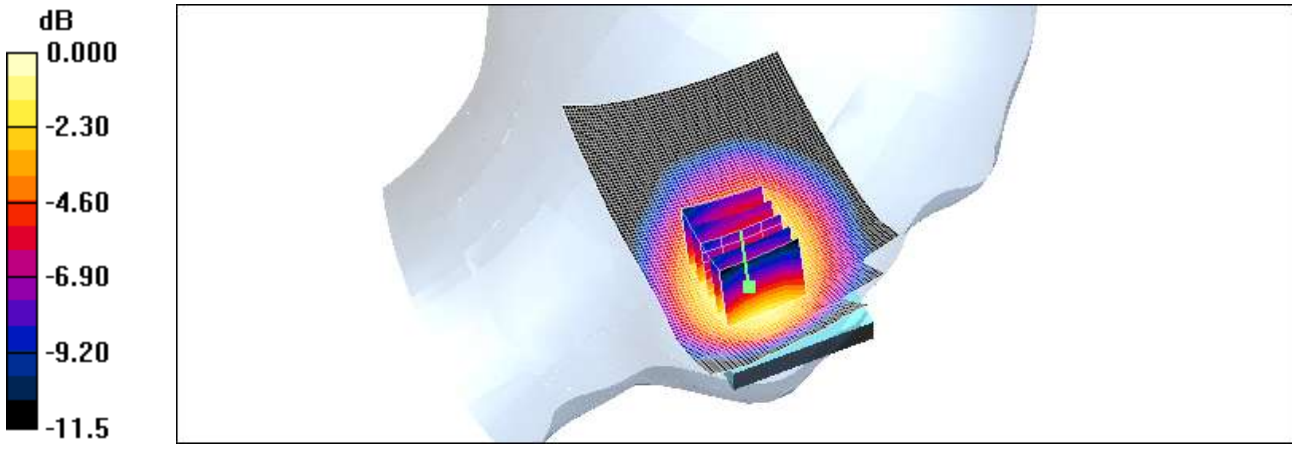

0 dB = 0.809mW/g

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.2 ℃
Ambient Temperature:	21.4 ℃
Test Date:	Feb. 20, 2012

DUT: SCH-i509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): f = 836.52 MHz; σ = 0.911 mho/m; ε_r = 43.2; ρ = 1000 kg/m^3
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.27, 6.27, 6.27); Calibrated: 2011-11-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2011-09-27
- Phantom: 1800/1900 Phantom; Type: SAM

Left tilt 384/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.320 mW/g

Left tilt 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.6 V/m; Power Drift = -0.032 dB
Peak SAR (extrapolated) = 0.370 W/kg
SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 0.317 mW/g

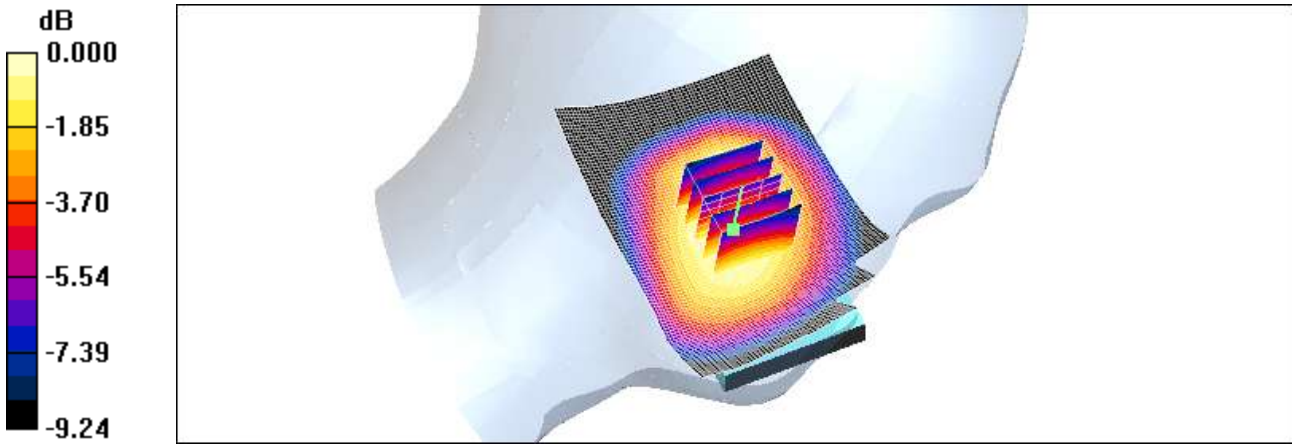

0 dB = 0.317mW/g

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.2 ℃
Ambient Temperature:	21.4 ℃
Test Date:	Feb. 20, 2012

DUT: SCH-i509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): f = 836.52 MHz; σ = 0.911 mho/m; ε_r = 43.2; ρ = 1000 kg/m^3
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.27, 6.27, 6.27); Calibrated: 2011-11-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2011-09-27
- Phantom: 1800/1900 Phantom; Type: SAM

Right touch 384/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.668 mW/g

Right touch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.76 V/m; Power Drift = 0.069 dB
Peak SAR (extrapolated) = 0.765 W/kg
SAR(1 g) = 0.611 mW/g; SAR(10 g) = 0.441 mW/g

Maximum value of SAR (measured) = 0.648 mW/g

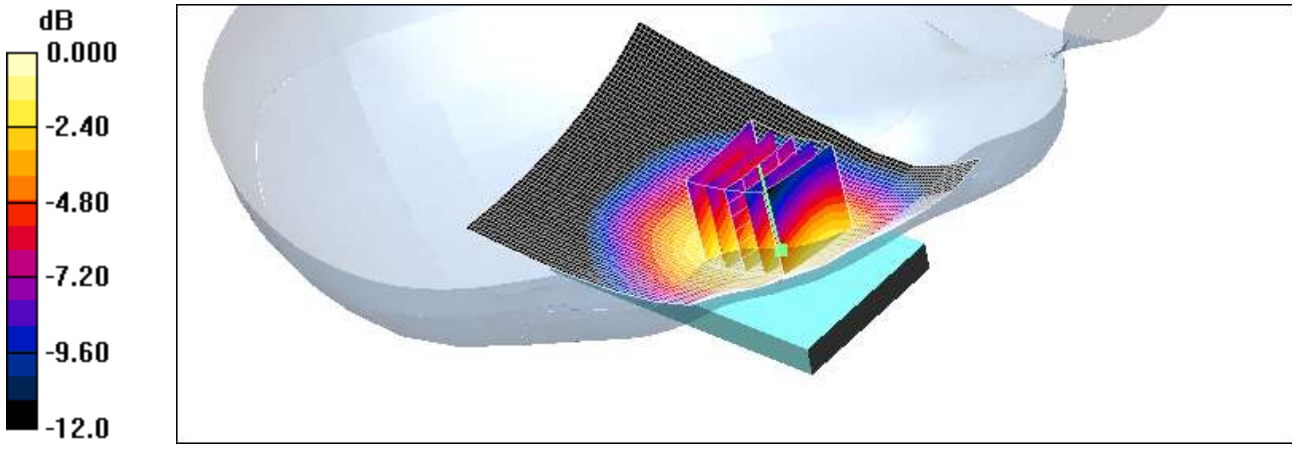

0 dB = 0.648mW/g

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.2 ℃
Ambient Temperature:	21.4 ℃
Test Date:	Feb. 20, 2012

DUT: SCH-i509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): f = 836.52 MHz; σ = 0.911 mho/m; ε_r = 43.2; ρ = 1000 kg/m^3
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.27, 6.27, 6.27); Calibrated: 2011-11-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2011-09-27
- Phantom: 1800/1900 Phantom; Type: SAM

Right tilt 384/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.325 mW/g

Right tilt 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.1 V/m; Power Drift = 0.053 dB
Peak SAR (extrapolated) = 0.385 W/kg
SAR(1 g) = 0.313 mW/g; SAR(10 g) = 0.234 mW/g

Maximum value of SAR (measured) = 0.328 mW/g

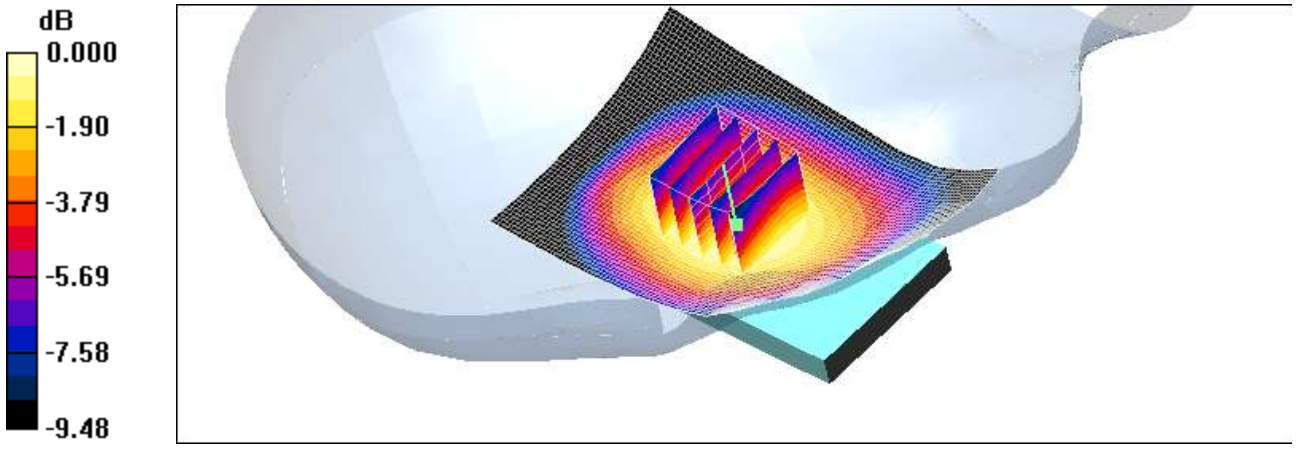

0 dB = 0.328mW/g

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.3 ℃
Ambient Temperature:	21.5 ℃
Test Date:	Mar. 9, 2012

DUT: SCH-I509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz;Duty Cycle: 1:1
Medium parameters used: f = 825 MHz; σ = 0.995 mho/m; ε_r = 55.2; ρ = 1000 kg/m^3
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1798; ConvF(6.5, 6.5, 6.5); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2011-09-27
- Phantom: 800/900 Phantom; Type: SAM

Body rear 1013 RC3 SO32/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.945 mW/g

Body rear 1013 RC3 SO32/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.3 V/m; Power Drift = -0.108 dB
Peak SAR (extrapolated) = 1.13 W/kg
SAR(1 g) = 0.868 mW/g; SAR(10 g) = 0.613 mW/g
Maximum value of SAR (measured) = 0.928 mW/g

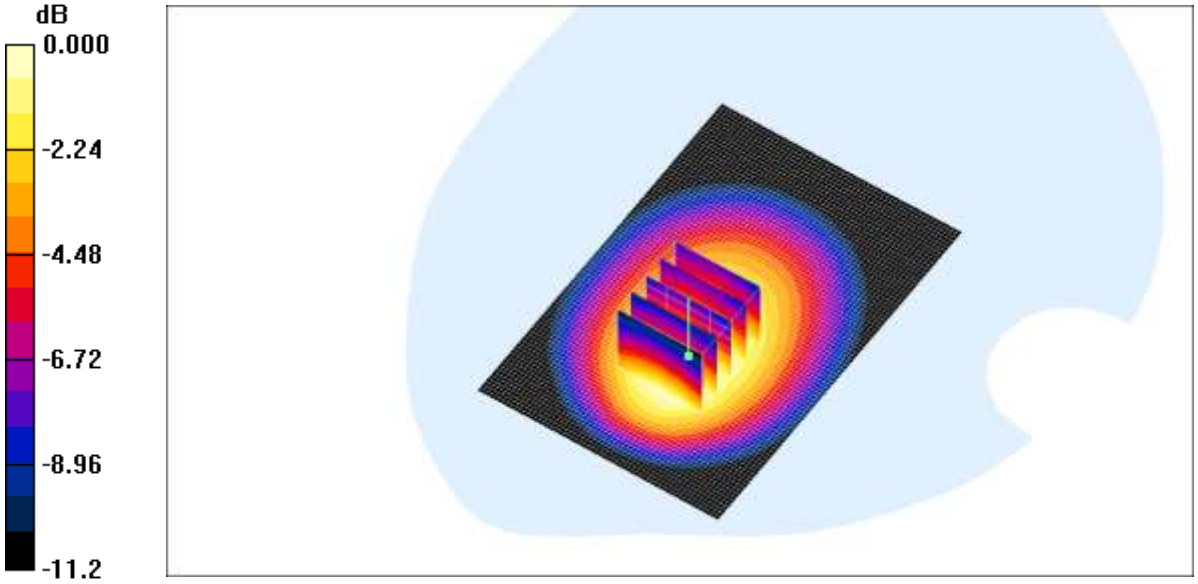

0 dB = 0.928mW/g

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.3 ℃
Ambient Temperature:	21.5 ℃
Test Date:	Mar. 9, 2012

DUT: SCH-I509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): f = 836.52 MHz; σ = 1.01 mho/m; ε_r = 55.1; ρ = 1000 kg/m^3
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1798; ConvF(6.5, 6.5, 6.5); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2011-09-27
- Phantom: 800/900 Phantom; Type: SAM

Body rear 384 RC3 SO32/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.927 mW/g

Body rear 384 RC3 SO32/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.4 V/m; Power Drift = -0.149 dB
Peak SAR (extrapolated) = 1.11 W/kg
SAR(1 g) = 0.858 mW/g; SAR(10 g) = 0.608 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.911 mW/g

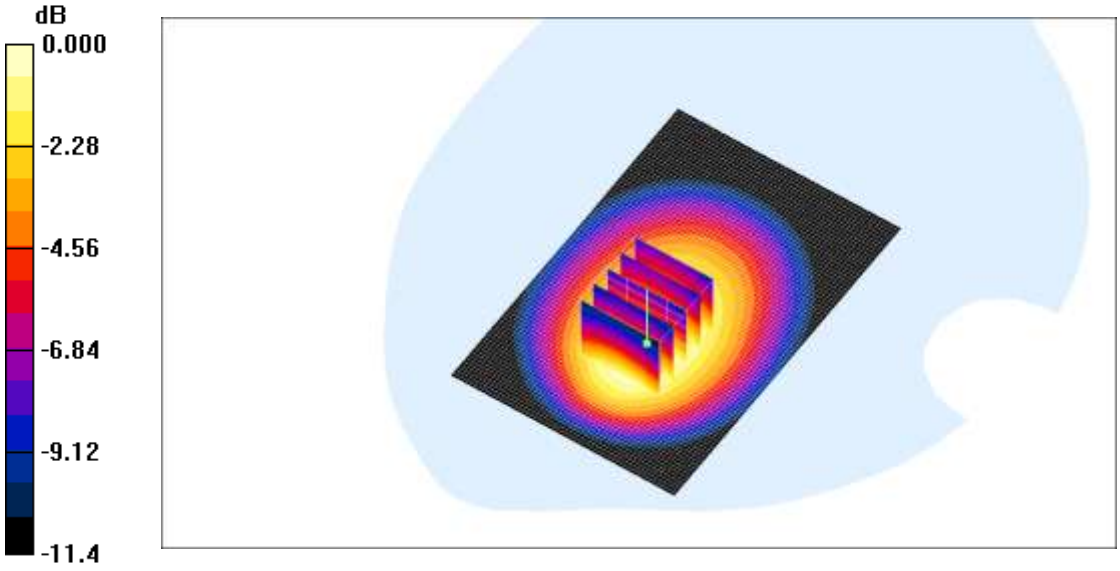

0 dB = 0.911mW/g

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.3 ℃
Ambient Temperature:	21.5 ℃
Test Date:	Mar. 9, 2012

DUT: SCH-I509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): f = 848.31 MHz; σ = 1.03 mho/m; ε_r = 55; ρ = 1000 kg/m^3
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1798; ConvF(6.5, 6.5, 6.5); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2011-09-27
- Phantom: 800/900 Phantom; Type: SAM

Body rear 777 RC3 SO32/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.747 mW/g

Body rear 777 RC3 SO32/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.9 V/m; Power Drift = 0.068 dB
Peak SAR (extrapolated) = 0.915 W/kg
SAR(1 g) = 0.699 mW/g; SAR(10 g) = 0.493 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.743 mW/g

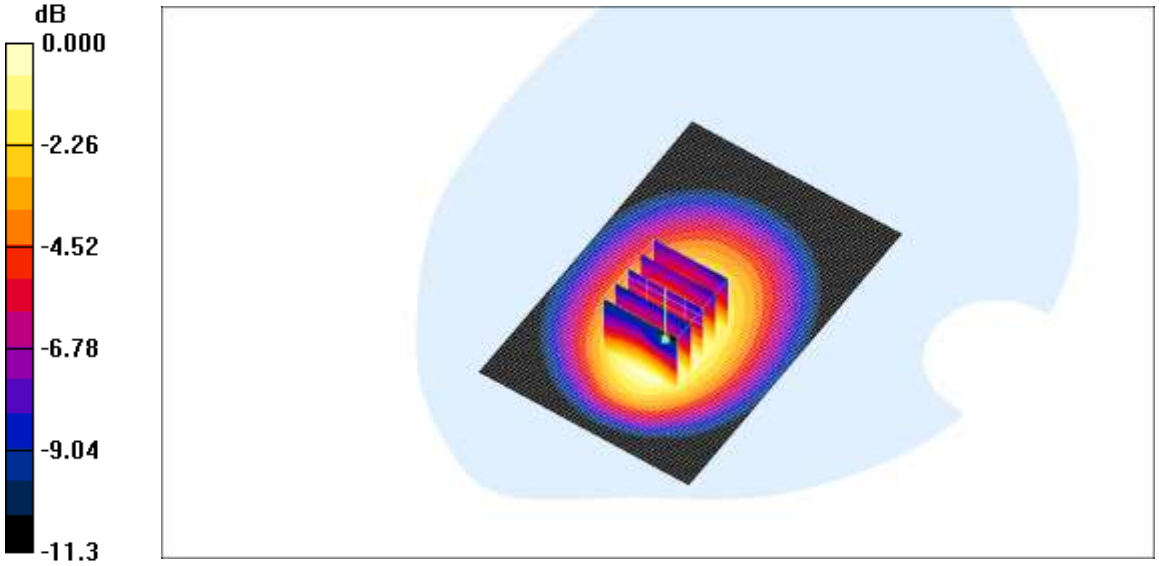

0 dB = 0.743mW/g

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.2 ℃
Ambient Temperature:	21.4 ℃
Test Date:	Feb. 20, 2012

DUT: SCH-i509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz;Duty Cycle: 1:1
Medium parameters used: f = 825 MHz; σ = 0.981 mho/m; ε_r = 54.6; ρ = 1000 kg/m^3
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.27, 6.27, 6.27); Calibrated: 2011-11-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2011-09-27
- Phantom: 800/900 Phantom; Type: SAM

EVDO Body Rear 1013/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.01 mW/g

EVDO Body Rear 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.0 V/m; Power Drift = -0.022 dB
Peak SAR (extrapolated) = 1.24 W/kg
SAR(1 g) = 0.909 mW/g; SAR(10 g) = 0.640 mW/g
Maximum value of SAR (measured) = 0.970 mW/g

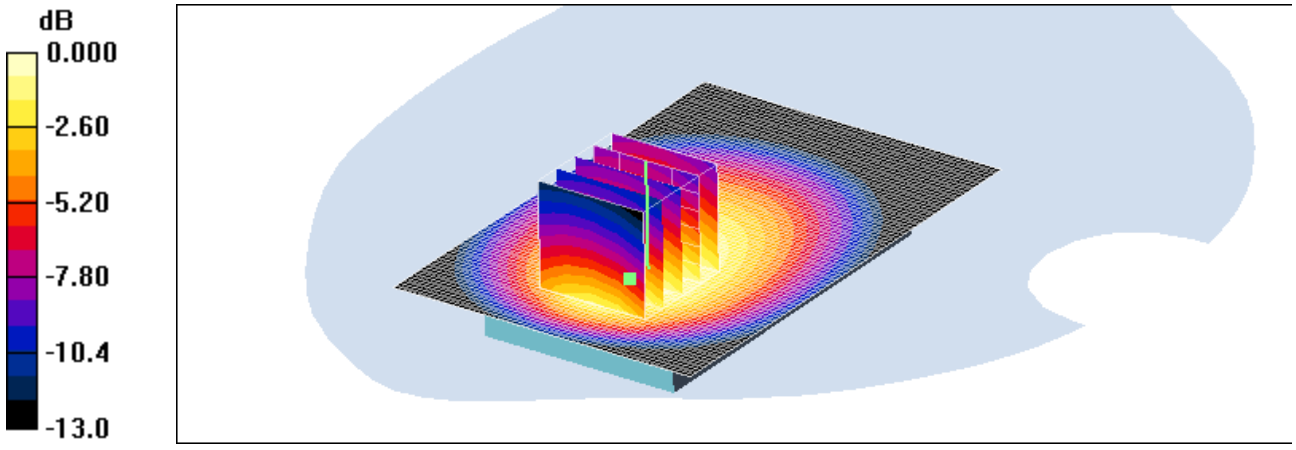

0 dB = 0.970mW/g

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.2 ℃
Ambient Temperature:	21.4 ℃
Test Date:	Feb. 20, 2012

DUT: SCH-i509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): f = 836.52 MHz; σ = 0.991 mho/m; ε_r = 54.4; ρ = 1000 kg/m^3
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.27, 6.27, 6.27); Calibrated: 2011-11-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2011-09-27
- Phantom: 800/900 Phantom; Type: SAM

EVDO Body Rear 384/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.986 mW/g

EVDO Body Rear 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.4 V/m; Power Drift = -0.027 dB
Peak SAR (extrapolated) = 1.28 W/kg
SAR(1 g) = 0.895 mW/g; SAR(10 g) = 0.620 mW/g.
Maximum value of SAR (measured) = 0.971 mW/g

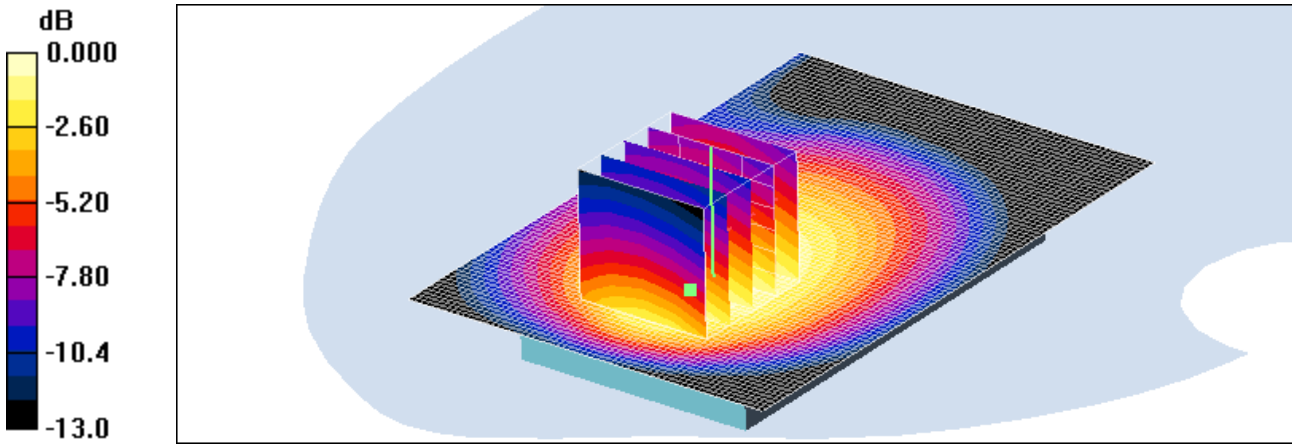

0 dB = 0.971mW/g

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.2 ℃
Ambient Temperature:	21.4 ℃
Test Date:	Feb. 20, 2012

DUT: SCH-i509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): f = 848.31 MHz; σ = 1 mho/m; ε_r = 54.2; ρ = 1000 kg/m^3
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.27, 6.27, 6.27); Calibrated: 2011-11-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2011-09-27
- Phantom: 800/900 Phantom; Type: SAM

EVDO Body Rear 777/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.792 mW/g

EVDO Body Rear 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.89 V/m; Power Drift = -0.011 dB
Peak SAR (extrapolated) = 0.957 W/kg
SAR(1 g) = 0.712 mW/g; SAR(10 g) = 0.498 mW/g
Maximum value of SAR (measured) = 0.758 mW/g

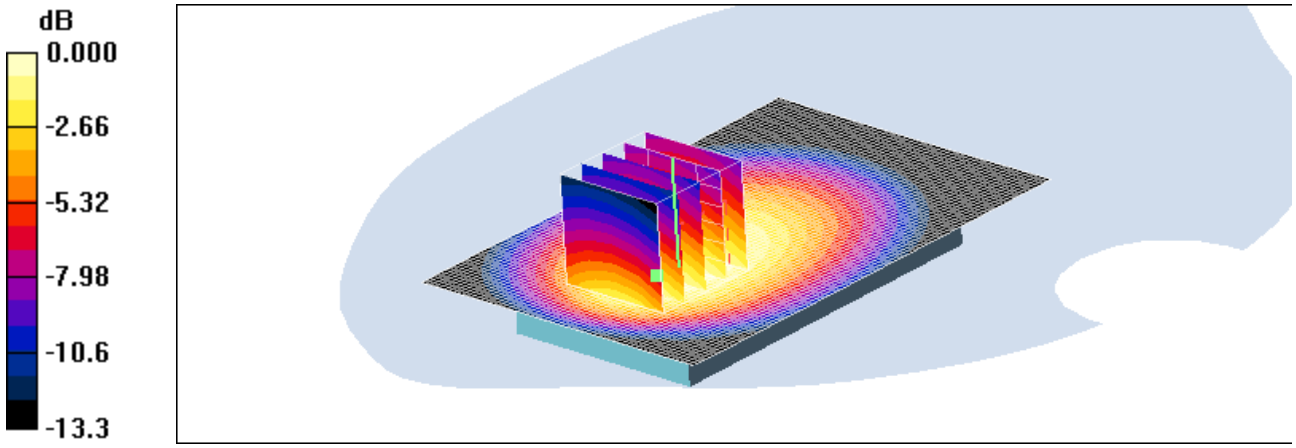

0 dB = 0.758mW/g

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.2 ℃
Ambient Temperature:	21.4 ℃
Test Date:	Feb. 20, 2012

DUT: SCH-i509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): f = 836.52 MHz; σ = 0.991 mho/m; ε_r = 54.4; ρ = 1000 kg/m^3
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.27, 6.27, 6.27); Calibrated: 2011-11-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2011-09-27
- Phantom: 800/900 Phantom; Type: SAM

EVDO Body Front 384/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.647 mW/g

EVDO Body Front 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.1 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.735 W/kg
SAR(1 g) = 0.592 mW/g; SAR(10 g) = 0.437 mW/g
Maximum value of SAR (measured) = 0.623 mW/g

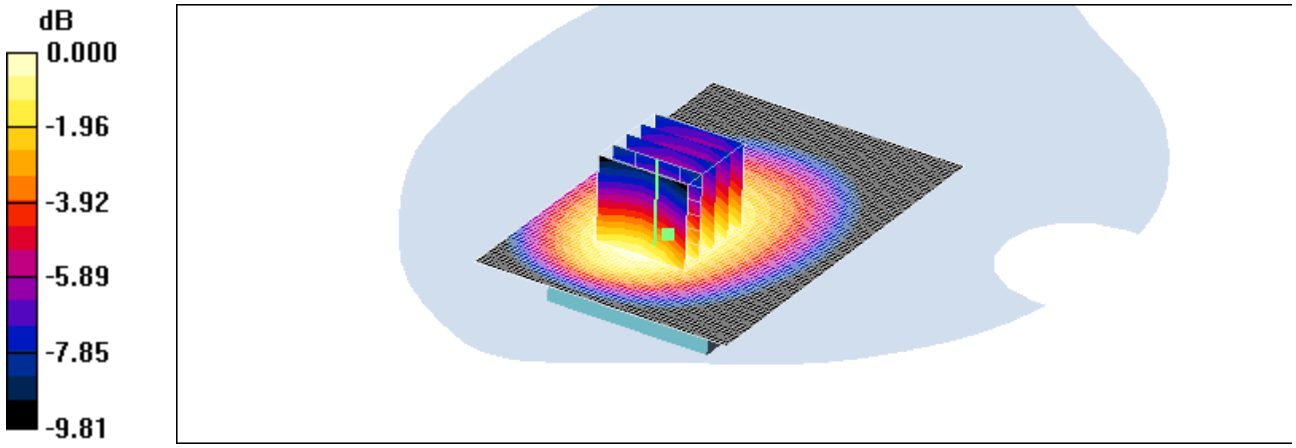

0 dB = 0.623mW/g

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.2 ℃
Ambient Temperature:	21.4 ℃
Test Date:	Feb. 20, 2012

DUT: SCH-i509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): f = 836.52 MHz; σ = 0.991 mho/m; ε_r = 54.4; ρ = 1000 kg/m^3
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.27, 6.27, 6.27); Calibrated: 2011-11-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2011-09-27
- Phantom: 800/900 Phantom; Type: SAM

EVDO Body left 384/Area Scan (41x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.438 mW/g

EVDO Body left 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.9 V/m; Power Drift = 0.113 dB
Peak SAR (extrapolated) = 0.558 W/kg
SAR(1 g) = 0.418 mW/g; SAR(10 g) = 0.290 mW/g

Maximum value of SAR (measured) = 0.449 mW/g

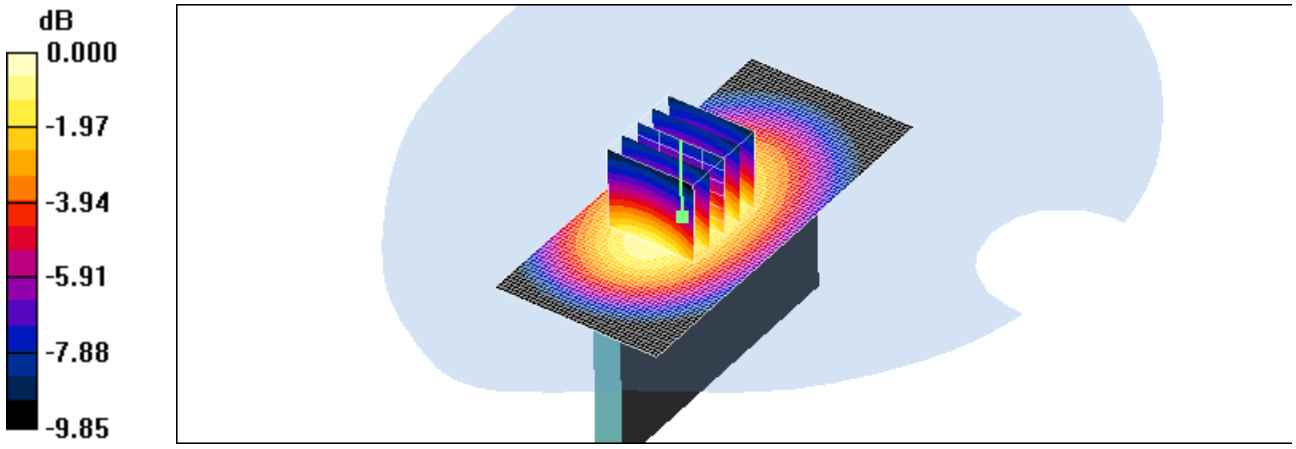

0 dB = 0.449mW/g

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.2 ℃
Ambient Temperature:	21.4 ℃
Test Date:	Feb. 20, 2012

DUT: SCH-i509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): f = 836.52 MHz; σ = 0.991 mho/m; ε_r = 54.4; ρ = 1000 kg/m^3
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.27, 6.27, 6.27); Calibrated: 2011-11-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2011-09-27
- Phantom: 800/900 Phantom; Type: SAM

EVDO Body right 384/Area Scan (41x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.295 mW/g

EVDO Body right 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.69 V/m; Power Drift = 0.126 dB
Peak SAR (extrapolated) = 0.367 W/kg
SAR(1 g) = 0.277 mW/g; SAR(10 g) = 0.194 mW/g

Maximum value of SAR (measured) = 0.297 mW/g

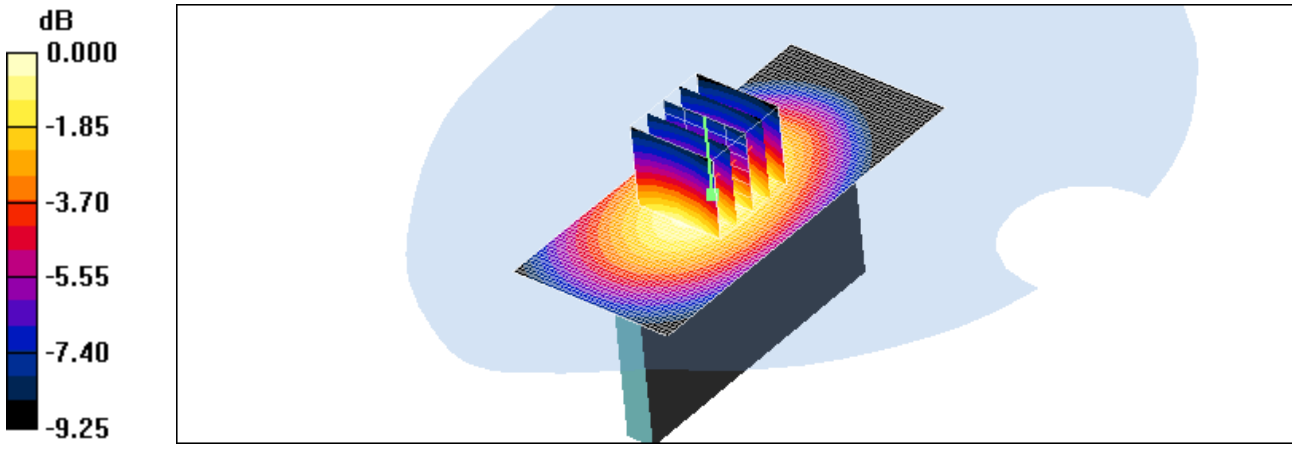

0 dB = 0.297mW/g

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.2 ℃
Ambient Temperature:	21.4 ℃
Test Date:	Feb. 20, 2012

DUT: SCH-i509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): f = 836.52 MHz; σ = 0.991 mho/m; ε_r = 54.4; ρ = 1000 kg/m^3
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.27, 6.27, 6.27); Calibrated: 2011-11-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2011-09-27
- Phantom: 800/900 Phantom; Type: SAM

EVDO Body Bottom 384/Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.185 mW/g

EVDO Body Bottom 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.4 V/m; Power Drift = 0.175 dB
Peak SAR (extrapolated) = 0.436 W/kg
SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.096 mW/g
Maximum value of SAR (measured) = 0.194 mW/g

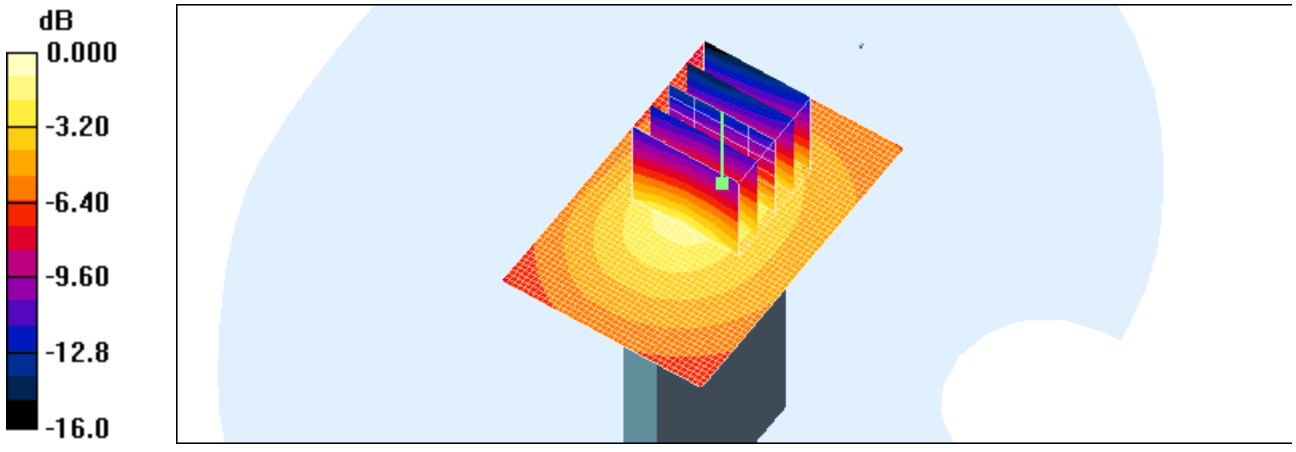

0 dB = 0.194mW/g

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.2 ℃
Ambient Temperature:	21.4 ℃
Test Date:	Feb. 20, 2012

DUT: SCH-i509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): f = 836.52 MHz; σ = 0.911 mho/m; ε_r = 43.2; ρ = 1000 kg/m^3
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.27, 6.27, 6.27); Calibrated: 2011-11-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2011-09-27
- Phantom: 1800/1900 Phantom; Type: SAM

Left touch 384/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.928 mW/g

Left touch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.0 V/m; Power Drift = -0.036 dB
Peak SAR (extrapolated) = 1.13 W/kg
SAR(1 g) = 0.848 mW/g; SAR(10 g) = 0.595 mW/g

Maximum value of SAR (measured) = 0.911 mW/g

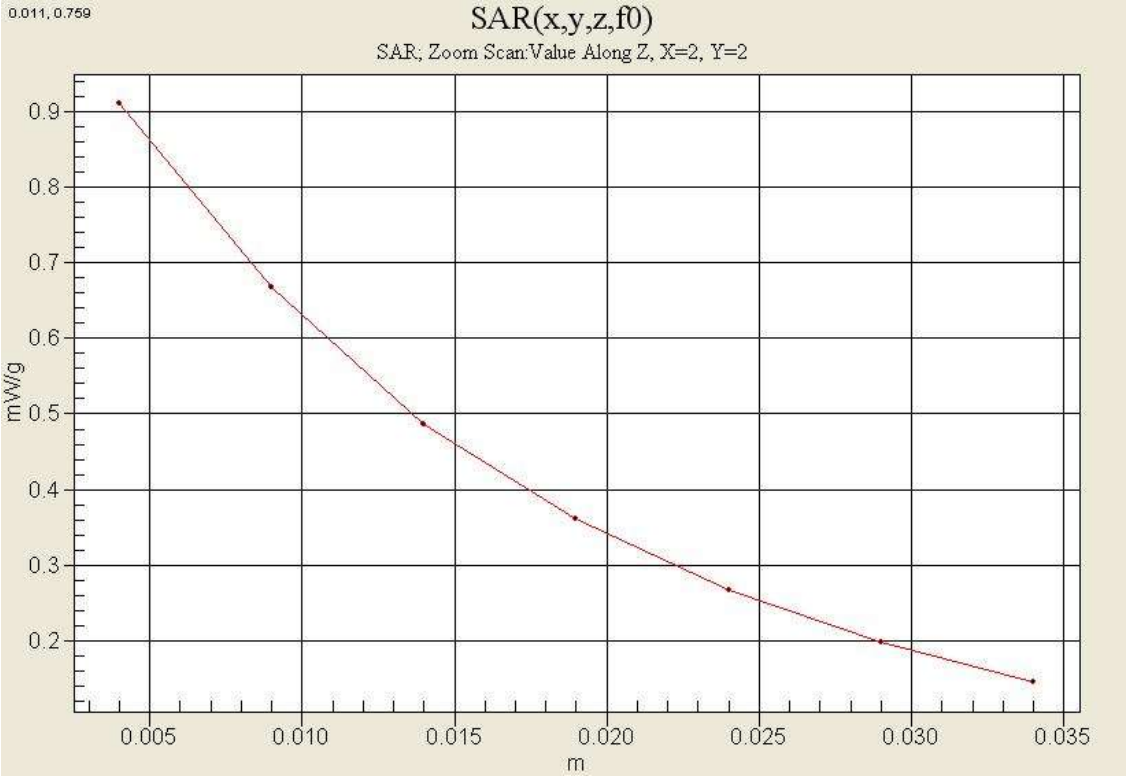

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.2 ℃
Ambient Temperature:	21.4 ℃
Test Date:	Feb. 20, 2012

DUT: SCH-i509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz;Duty Cycle: 1:1
Medium parameters used: f = 825 MHz; σ = 0.981 mho/m; ε_r = 54.6; ρ = 1000 kg/m^3
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.27, 6.27, 6.27); Calibrated: 2011-11-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2011-09-27
- Phantom: 800/900 Phantom; Type: SAM

EVDO Body Rear 1013/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.01 mW/g

EVDO Body Rear 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.0 V/m; Power Drift = -0.022 dB
Peak SAR (extrapolated) = 1.24 W/kg
SAR(1 g) = 0.909 mW/g; SAR(10 g) = 0.640 mW/g
Maximum value of SAR (measured) = 0.970 mW/g

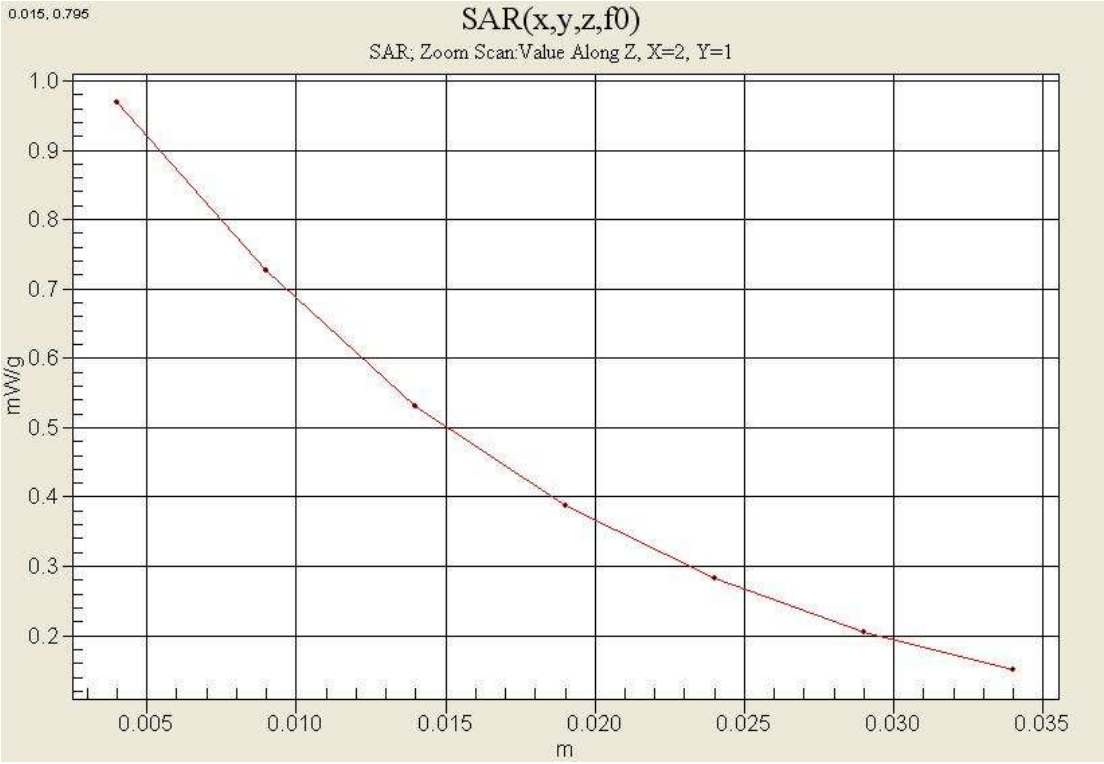

Test Laboratory:	HCT CO., LTD
EUT Type:	Cellular CDMA Phone with Bluetooth/ WLAN
Liquid Temperature:	21.3 ℃
Ambient Temperature:	21.5 ℃
Test Date:	Mar. 9, 2012

DUT: SCH-I509; Type: bar; Serial: #FJ-042-A

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz;Duty Cycle: 1:1
Medium parameters used: f = 825 MHz; σ = 0.995 mho/m; ε_r = 55.2; ρ = 1000 kg/m^3
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1798; ConvF(6.5, 6.5, 6.5); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2011-09-27
- Phantom: 800/900 Phantom; Type: SAM

Body rear 1013 RC3 SO32/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.945 mW/g

Body rear 1013 RC3 SO32/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.3 V/m; Power Drift = -0.108 dB
Peak SAR (extrapolated) = 1.13 W/kg
SAR(1 g) = 0.868 mW/g; SAR(10 g) = 0.613 mW/g
Maximum value of SAR (measured) = 0.928 mW/g

Attachment 2. – Dipole Validation Plots

■ Validation Data (835 MHz Head)

Test Laboratory: HCT CO., LTD

Input Power 100 mW (20 dBm)

Liquid Temp: 21.2 ℃

Test Date: Feb. 20, 2012

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 – SN:441

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1
Medium parameters used: f = 835 MHz; σ = 0.91 mho/m; ε_r = 43.3; ρ = 1000 kg/m^3
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.27, 6.27, 6.27); Calibrated: 2011-11-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2011-09-27
- Phantom: SAM 1800/1900 MHz; Type: SAM

Validation 835MHz/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.04 mW/g

Validation 835MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 34.9 V/m; Power Drift = 0.005 dB
Peak SAR (extrapolated) = 1.39 W/kg
SAR(1 g) = 0.952 mW/g; SAR(10 g) = 0.616 mW/g
Maximum value of SAR (measured) = 1.04 mW/g

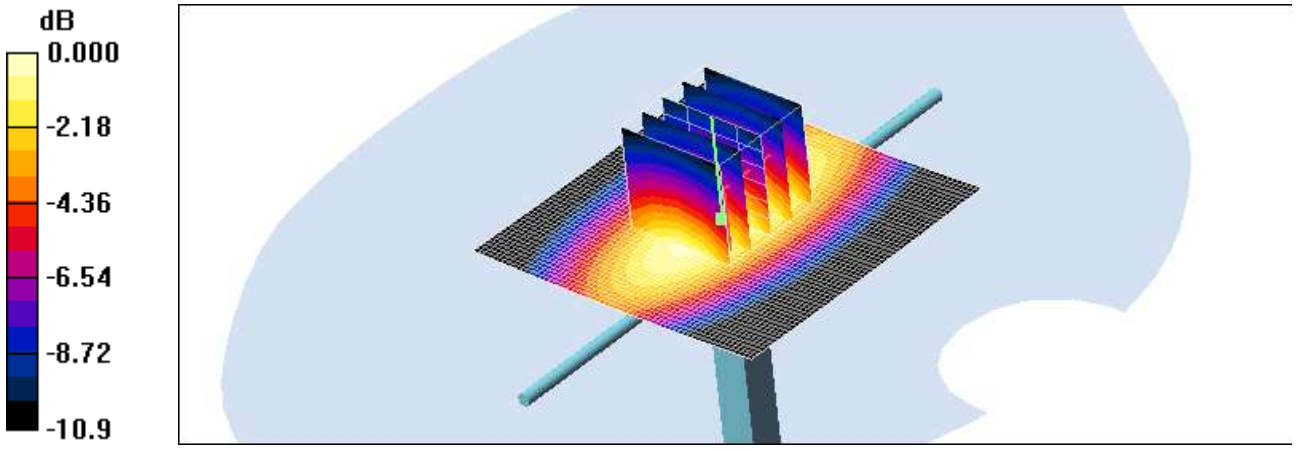

0 dB = 1.04mW/g

■ Validation Data (835 MHz Body)

Test Laboratory: HCT CO., LTD

Input Power 100 mW (20 dBm)

Liquid Temp: 21.2 ℃

Test Date: Feb. 20, 2012

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 – SN:441

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1
Medium parameters used: f = 835 MHz; σ = 0.99 mho/m; ε_r = 54.4; ρ = 1000 kg/m^3
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1630; ConvF(6.27, 6.27, 6.27); Calibrated: 2011-11-18
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn614; Calibrated: 2011-09-27
- Phantom: SAM 1800/1900 MHz; Type: SAM

Validation 835MHz/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.04 mW/g

Validation 835MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 33.7 V/m; Power Drift = -0.067 dB
Peak SAR (extrapolated) = 1.38 W/kg
SAR(1 g) = 0.950 mW/g; SAR(10 g) = 0.615 mW/g
Maximum value of SAR (measured) = 1.03 mW/g

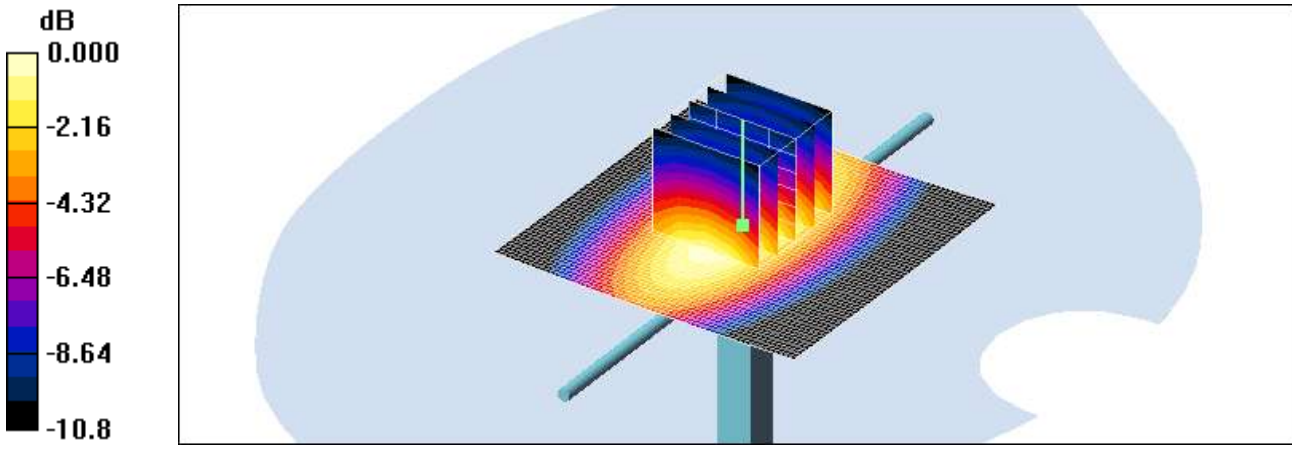

0 dB = 1.03mW/g

■ Validation Data (835 MHz Body)

Test Laboratory: HCT CO., LTD

Input Power 100 mW (20 dBm)

Liquid Temp: 21.3 ℃

Test Date: Mar. 9, 2012

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 – SN:441

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1
Medium parameters used: f = 835 MHz; σ = 1.01 mho/m; ε_r = 55.2; ρ = 1000 kg/m^3
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

DASY4 Configuration:
- Probe: ET3DV6 - SN1798; ConvF(6.5, 6.5, 6.5); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2011-09-27
- Phantom: SAM 835/900 MHz; Type: SAM

Validation 835MHz/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.986 mW/g

Validation 835MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 32.7 V/m; Power Drift = 0.077 dB
Peak SAR (extrapolated) = 1.34 W/kg
SAR(1 g) = 0.940 mW/g; SAR(10 g) = 0.617 mW/g
Maximum value of SAR (measured) = 1.02 mW/g

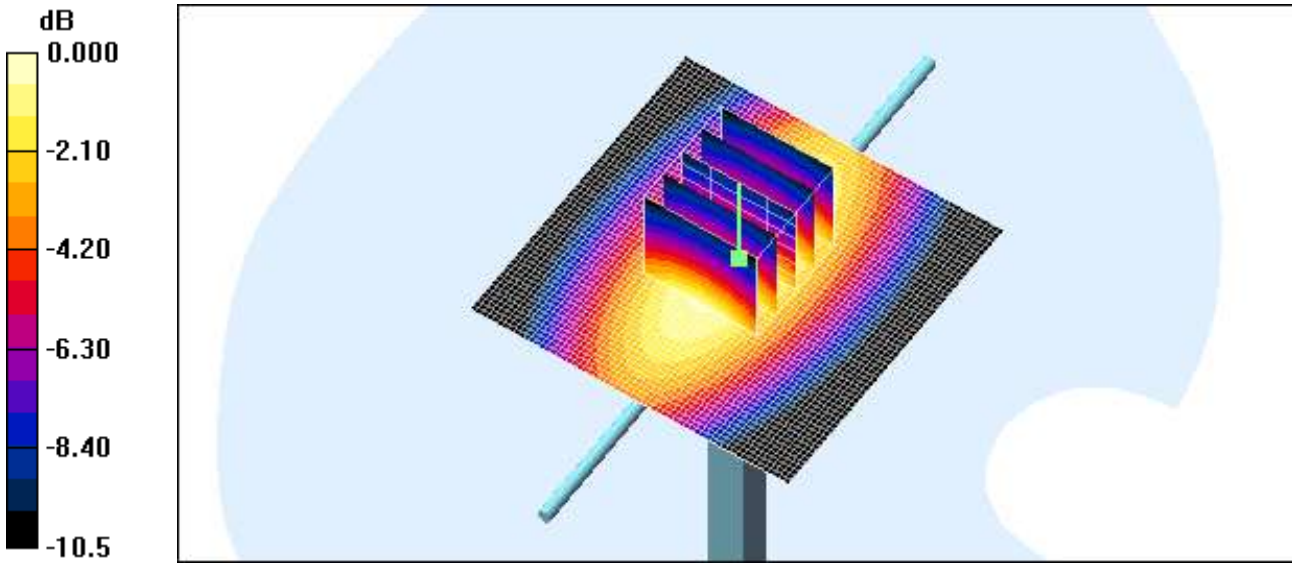

0 dB = 1.02mW/g

■ Dielectric Parameter (835 MHz Head)

Title	SCH-i509
SubTitle	835MHz
Test Date	Feb. 20, 2012

Frequency	e'	e''
800000000.0000	43.7089	19.7281
805000000.0000	43.6412	19.7106
810000000.0000	43.6048	19.6846
815000000.0000	43.5184	19.6515
820000000.0000	43.4185	19.6230
825000000.0000	43.3770	19.5889
830000000.0000	43.3232	19.6013
835000000.0000	43.2716	19.5814
840000000.0000	43.1765	19.5534
845000000.0000	43.1212	19.5143
850000000.0000	43.0719	19.5105
855000000.0000	43.0034	19.5436
860000000.0000	42.9134	19.5004
865000000.0000	42.8520	19.4802
870000000.0000	42.8248	19.4859
875000000.0000	42.7984	19.4913
880000000.0000	42.7148	19.4734
885000000.0000	42.6751	19.4628
890000000.0000	42.6685	19.4925
895000000.0000	42.5995	19.4309
900000000.0000	42.5363	19.4181

■ Dielectric Parameter (835 MHz Body)

Title	SCH-i509
SubTitle	835MHz
Test Date	Feb. 20, 2012

Frequency	e'	e''
800000000.0000	54.9287	21.3265
805000000.0000	54.8630	21.2988
810000000.0000	54.7972	21.3619
815000000.0000	54.7213	21.3608
820000000.0000	54.6161	21.3369
825000000.0000	54.5574	21.3748
830000000.0000	54.4981	21.3460
835000000.0000	54.3840	21.3158
840000000.0000	54.3138	21.2810
845000000.0000	54.2484	21.2559
850000000.0000	54.2237	21.2051
855000000.0000	54.1662	21.1670
860000000.0000	54.1436	21.1324
865000000.0000	54.1202	21.0660
870000000.0000	54.1147	21.0307
875000000.0000	54.0992	21.0100
880000000.0000	54.0716	20.9834
885000000.0000	54.0850	20.9515
890000000.0000	54.0530	20.9373
895000000.0000	54.0201	20.8921
900000000.0000	53.9699	20.8540

■ Dielectric Parameter (835 MHz Body)

Title	SCH-i509
SubTitle	835MHz
Test Date	Mar. 09, 2012

Frequency	e'	e''
800000000.0000	55.2931	21.6421
805000000.0000	55.2570	21.6351
810000000.0000	55.2515	21.6000
815000000.0000	55.2526	21.6585
820000000.0000	55.2452	21.6293
825000000.0000	55.2177	21.6804
830000000.0000	55.2006	21.7103
835000000.0000	55.1673	21.7237
840000000.0000	55.1059	21.7475
845000000.0000	55.0548	21.7508
850000000.0000	54.9525	21.7461
855000000.0000	54.8613	21.7377
860000000.0000	54.7268	21.6973
865000000.0000	54.6442	21.6326
870000000.0000	54.5639	21.5571
875000000.0000	54.4581	21.5246
880000000.0000	54.3730	21.4315
885000000.0000	54.3643	21.3415
890000000.0000	54.3192	21.2664
895000000.0000	54.2713	21.1825
900000000.0000	54.2638	21.1201

Attachment 3. – Probe Calibration Data

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client HCT (Dymstec) Certificate No: ET3-1630_Nov11

CALIBRATION CERTIFICATE

Object ET3DV6 - SN:1630

Calibration procedure(s) QA CAL-01.v8, QA CAL-12.v7, QA CAL-23.v4, QA CAL-25.v4
Calibration procedure for dosimetric E-field probes

Calibration date: November 18, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01368)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	3-May-11 (No. DAE4-654_May11)	May-12
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: November 18, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: ET3-1630_Nov11 Page 1 of 11

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORMx,y,z	sensitivity in free space
ConvF	sensitivity in TSL / NORMx,y,z
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., ϑ = 0 is normal to probe axis

Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003

b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- *NORMx,y,z:* Assessed for E-field polarization ϑ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E^2-field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)x,y,z = NORMx,y,z * frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCPx,y,z:* DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *PAR:* PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- *Ax,y,z; Bx,y,z; Cx,y,z; VRx,y,z:* A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters:* Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORMx,y,z * ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy):* in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset:* The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1630

Manufactured: October 12, 2001
Calibrated: November 18, 2011

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

ET3DV6– SN:1630 November 18, 2011

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1630

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu V/(V/m)^2$)[A]	1.71	1.62	1.60	± 10.1 %
DCP (mV)[B]	100.3	99.5	101.7	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc[E] (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	98.2	±2.7 %
			Y	0.00	0.00	1.00	101.9	
			Z	0.00	0.00	1.00	96.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

[A] The uncertainties of NormX,Y,Z do not affect the E^2-field uncertainty inside TSL (see Pages 5 and 6).
[B] Numerical linearization parameter: uncertainty not required.
[E] Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ET3DV6 - SN:1630 November 18, 2011

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1630

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) [C]	Relative Permittivity [F]	Conductivity (S/m) [F]	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
300	45.3	0.87	8.13	8.13	8.13	0.31	1.60	± 13.4 %
450	43.5	0.87	7.40	7.40	7.40	0.22	2.27	± 13.4 %
750	41.9	0.89	6.61	6.61	6.61	0.82	1.68	± 12.0 %
835	41.5	0.90	6.27	6.27	6.27	0.72	1.84	± 12.0 %
900	41.5	0.97	6.16	6.16	6.16	0.68	1.92	± 12.0 %
1450	40.5	1.20	5.57	5.57	5.57	0.54	2.48	± 12.0 %
1750	40.1	1.37	5.43	5.43	5.43	0.60	2.26	± 12.0 %
1900	40.0	1.40	5.17	5.17	5.17	0.63	2.15	± 12.0 %
1950	40.0	1.40	5.05	5.05	5.05	0.63	2.13	± 12.0 %
2450	39.2	1.80	4.57	4.57	4.57	0.81	1.74	± 12.0 %

[C] Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.
[F] At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Certificate No: ET3-1630_Nov11 Page 5 of 11

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1630

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) [C]	Relative Permittivity [F]	Conductivity (S/m) [F]	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
300	58.2	0.92	7.96	7.96	7.96	0.29	2.29	± 13.4 %
450	56.7	0.94	7.74	7.74	7.74	0.16	2.25	± 13.4 %
750	55.5	0.96	6.36	6.36	6.36	0.75	1.84	± 12.0 %
835	55.2	0.97	6.27	6.27	6.27	0.72	1.88	± 12.0 %
1450	54.0	1.30	5.46	5.46	5.46	0.70	1.97	± 12.0 %
1750	53.4	1.49	4.95	4.95	4.95	0.59	2.72	± 12.0 %
1900	53.3	1.52	4.75	4.75	4.75	0.60	2.56	± 12.0 %
2450	52.7	1.95	4.30	4.30	4.30	1.00	1.29	± 12.0 %

[C] Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.
[F] At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

ET3DV6- SN:1630 November 18, 2011

Frequency Response of E-Field
(TEM-Cell:ifi110 EXX, Waveguide: R22)

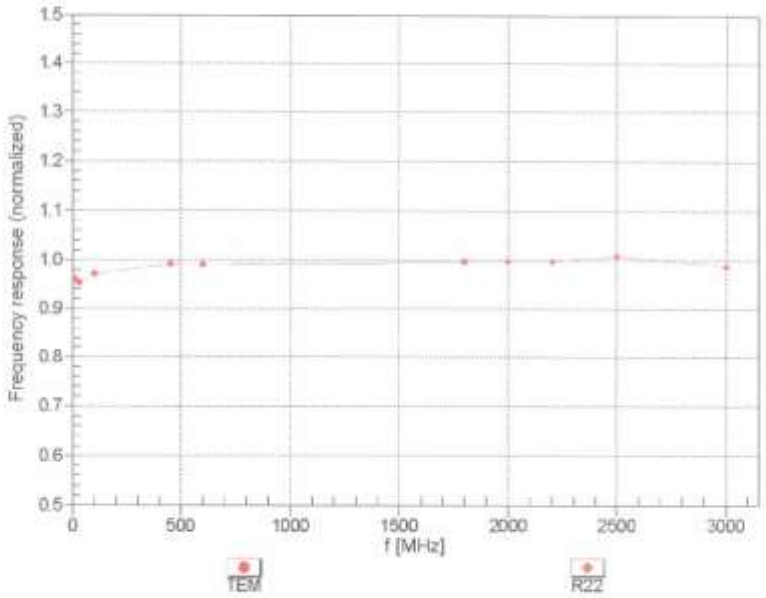

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

ET3DV6– SN:1630 November 18, 2011

Receiving Pattern (ϕ), ϑ = 0°

f=600 MHz,TEM

f=1800 MHz,R22

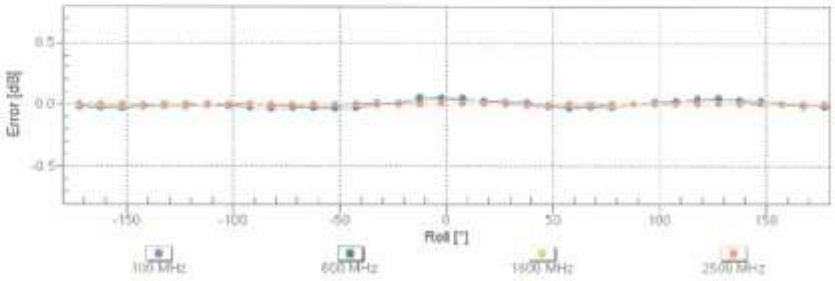

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

ET3DV6- SN:1630 November 18, 2011

Dynamic Range f(SAR$_{head}$)
(TEM cell , f = 900 MHz)

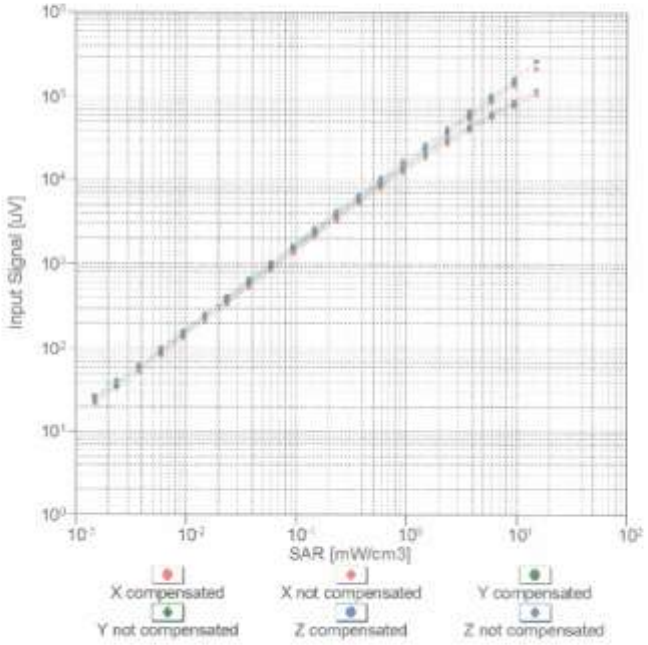

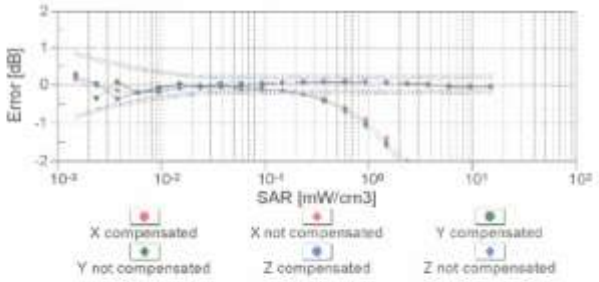

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

ET3DV6- SN:1630 November 18, 2011

Conversion Factor Assessment

f = 900 MHz,WGLS R9 (H_convF) f = 1750 MHz,WGLS R22 (H_convF)

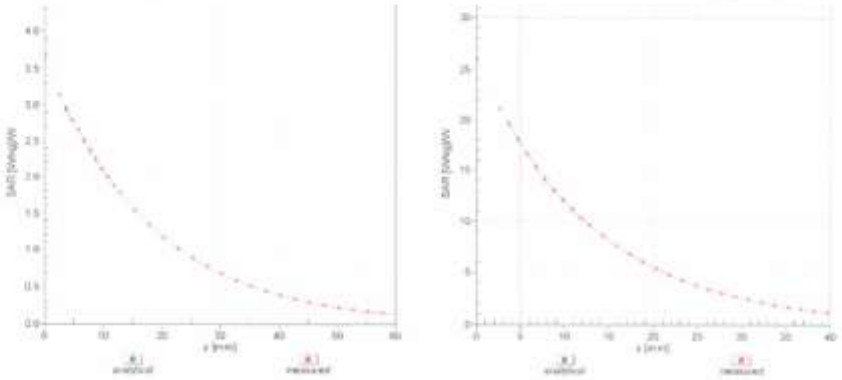

Deviation from Isotropy in Liquid

Error (ϕ, ϑ), f = 900 MHz

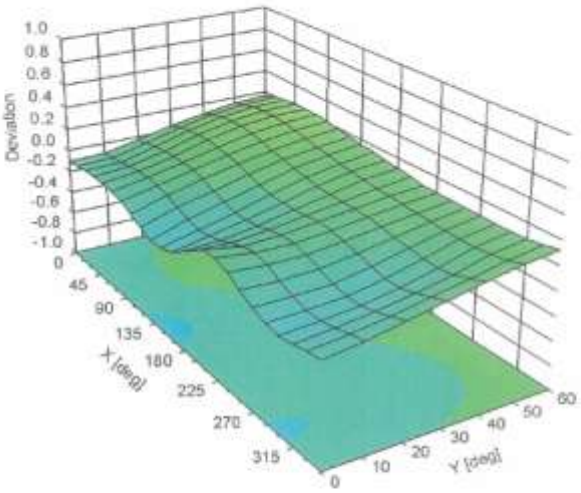



Uncertainty of Spherical Isotropy Assessment: ± 2.6% (k=2)

Certificate No: ET3-1630_Nov11 Page 10 of 11

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1630

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

Schmid & Partner Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 44 245 9700, Fax +41 44 245 9779
info@speag.com, http://www.speag.com

s p e a g

Additional Conversion Factors

for Dosimetric E-Field Probe

Type:	**ET3DV6**
Serial Number:	**1630**
Place of Assessment:	**Zurich**
Date of Assessment:	**November 21, 2011**
Probe Calibration Date:	**November 18, 2011**

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 450, 900 MHz or at 1750 MHz.

Assessed by:

Schmid & Partner Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 44 245 9700, Fax +41 44 245 9779
info@speag.com, http://www.speag.com

s p e a g

Dosimetric E-Field Probe ET3DV6 - SN:1630

Conversion factor (± standard deviation)

150 ± 50 MHz	*ConvF*	8.03 ± 10%	ε_r = 52.3 ± 5% σ = 0.76 ± 5% mho/m (head tissue)
150 ± 50 MHz	*ConvF*	8.29 ± 10%	ε_r = 61.9 ± 5% σ = 0.80 ± 5% mho/m (body tissue)

Important Note:

For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASY software must have the following entries: Alpha = 0 and Delta = 1.

Please see also DASY Manual.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client HCT (Dymstec) Certificate No: ET3-1798_Apr11

CALIBRATION CERTIFICATE

Object ET3DV6 - SN:1798

Calibration procedure(s) QA CAL-01.v7, QA CAL-23.v4, QA CAL-25.v3
Calibration procedure for dosimetric E-field probes

Calibration date: April 14, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41495277	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	23-Apr-10 (No. DAE4-654_Apr10)	Apr-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Jelon Kastrat	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: April 14, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: ET3-1798_Apr11 Page 1 of 11

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORMx,y,z	sensitivity in free space
ConvF	sensitivity in TSL / NORMx,y,z
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., ϑ = 0 is normal to probe axis

Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003

b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- *NORMx,y,z:* Assessed for E-field polarization ϑ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E^2-field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)x,y,z = NORMx,y,z * frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCPx,y,z:* DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *PAR:* PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- *Ax,y,z; Bx,y,z; Cx,y,z* are numerical linearization parameters in dB assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media.
- *VR:* VR is the validity range of the calibration related to the average diode voltage or DAE voltage in mV.
- *ConvF and Boundary Effect Parameters:* Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORMx,y,z * ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy):* in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset:* The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1798

Manufactured: August 14, 2003
Calibrated: April 14, 2011

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

ET3DV6– SN:1798 April 14, 2011

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1798

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (μV/(V/m)^2)[A]	2.02	1.82	2.06	± 10.1 %
DCP (mV)[B]	96.8	96.3	98.2	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc[E] (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	113.1	±3.0 %
			Y	0.00	0.00	1.00	145.9	
			Z	0.00	0.00	1.00	114.8	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

[A] The uncertainties of NormX,Y,Z do not affect the E^2-field uncertainty inside TSL (see Pages 5 and 6).
[B] Numerical linearization parameter: uncertainty not required.
[E] Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1798

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) [C]	Relative Permittivity [F]	Conductivity (S/m) [F]	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	43.5	0.87	7.63	7.63	7.63	0.22	2.25	± 13.4 %
835	41.5	0.90	6.72	6.72	6.72	0.78	1.68	± 12.0 %
900	41.5	0.97	6.61	6.61	6.61	0.74	1.74	± 12.0 %
1750	40.1	1.37	5.46	5.46	5.46	0.52	2.60	± 12.0 %
1900	40.0	1.40	5.24	5.24	5.24	0.54	2.52	± 12.0 %
1950	40.0	1.40	5.08	5.08	5.08	0.53	2.57	± 12.0 %
2450	39.2	1.80	4.56	4.56	4.56	0.70	1.97	± 12.0 %

[C] Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.
[F] At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ET3DV6- SN:1798

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) [C]	Relative Permittivity [F]	Conductivity (S/m) [F]	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	56.7	0.94	8.09	8.09	8.09	0.15	2.17	± 13.4 %
835	55.2	0.97	6.50	6.50	6.50	0.73	1.84	± 12.0 %
900	55.0	1.05	6.40	6.40	6.40	0.71	1.90	± 12.0 %
1750	53.4	1.49	4.84	4.84	4.84	0.55	2.94	± 12.0 %
1900	53.3	1.52	4.63	4.63	4.63	0.57	2.70	± 12.0 %
1950	53.3	1.52	4.76	4.76	4.76	0.59	2.49	± 12.0 %
2450	52.7	1.95	4.21	4.21	4.21	0.97	1.24	± 12.0 %

[C] Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.
[F] At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

ET3DV6– SN:1798 April 14, 2011

Frequency Response of E-Field
(TEM-Cell:ifi110 EXX, Waveguide: R22)

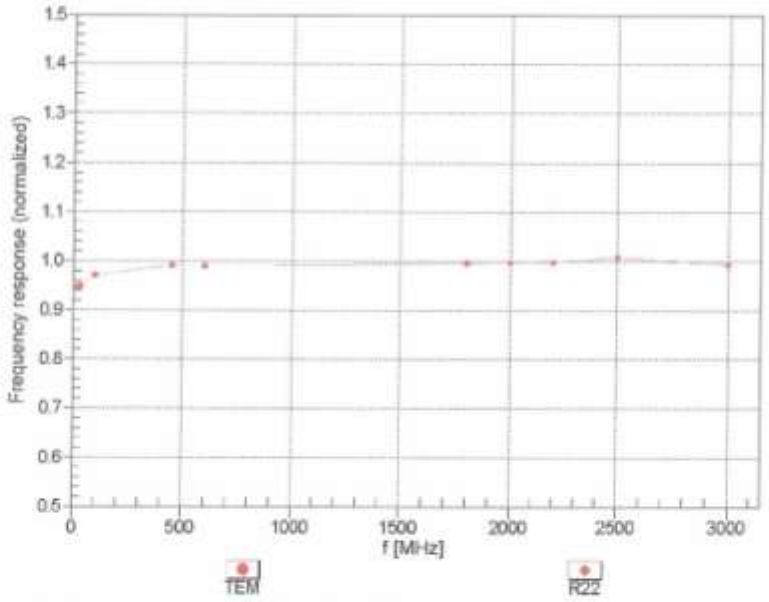

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

ET3DV6– SN:1798 April 14, 2011

Receiving Pattern (ϕ), ϑ = 0°

f=600 MHz,TEM

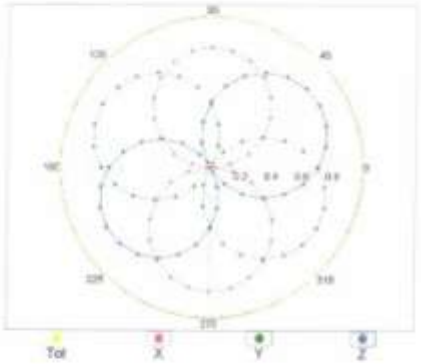

f=1800 MHz,R22

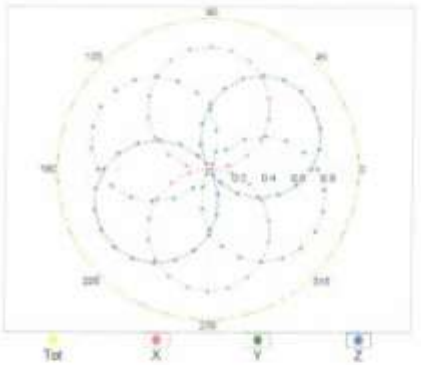

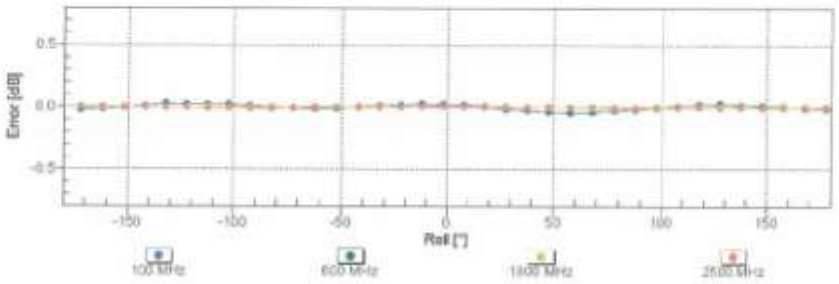

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Certificate No: ET3-1798_Apr11 Page 8 of 11

Dynamic Range f(SAR_{head})
(TEM cell , f = 900 MHz)

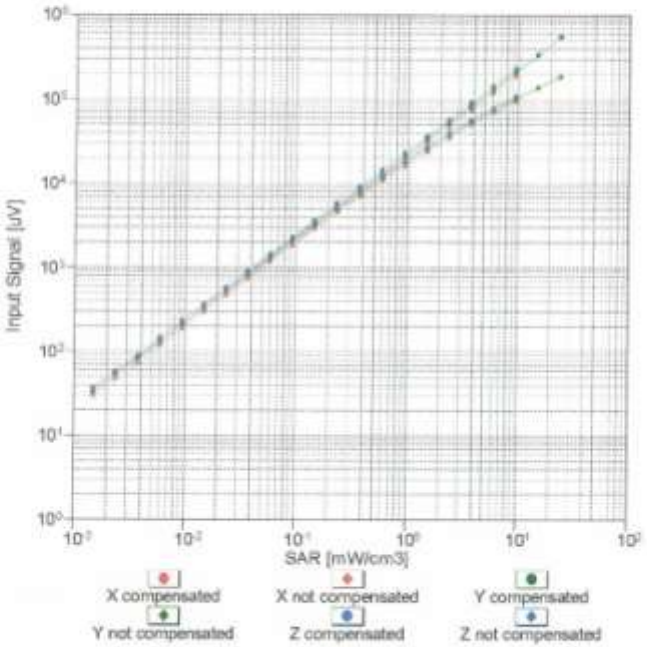

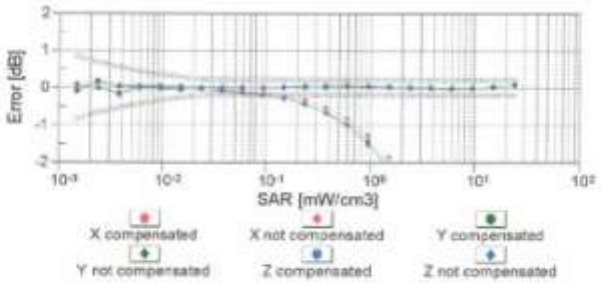

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

ET3DV6– SN:1798 April 14, 2011

Conversion Factor Assessment

f = 1750 MHz,WGLS R22 (H_convF)

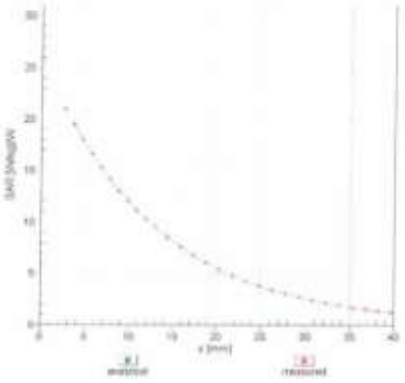

f = 900 MHz,WGLS R9 (H_convF)

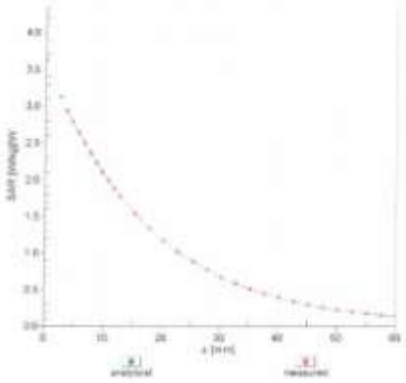

Deviation from Isotropy in Liquid

Error (ϕ, ϑ), f = 900 MHz

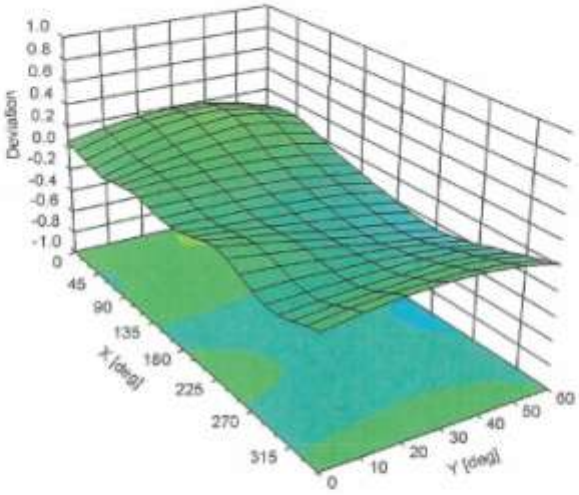



Uncertainty of Spherical Isotropy Assessment: ± 2.6% (k=2)

Certificate No: ET3-1798_Apr11 Page 10 of 11

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1798

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

Schmid & Partner Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 44 245 9700, Fax +41 44 245 9779
info@speag.com, http://www.speag.com

s p e a g

Additional Conversion Factors

for Dosimetric E-Field Probe

Type:	**ET3DV6**
Serial Number:	**1798**
Place of Assessment:	**Zurich**
Date of Assessment:	**July 13, 2011**
Probe Calibration Date:	**April 14, 2011**

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 900 MHz or at 1750 MHz.

Assessed by:

Schmid & Partner Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 44 245 9700, Fax +41 44 245 9779
info@speag.com, http://www.speag.com

s p e a g

Dosimetric E-Field Probe ET3DV6 - SN:1798

Conversion factor (± standard deviation)

750 ± 50 MHz	*ConvF*	6.94 ± 7%	ε_r = 41.9 ± 5% σ = 0.89 ± 5% mho/m (head tissue)
750 ± 50 MHz	*ConvF*	6.79 ± 7%	ε_r = 55.5 ± 5% σ = 0.96 ± 5% mho/m (body tissue)

Important Note:

For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASY software must have the following entries: Alpha = 0 and Delta = 1.

Please see also DASY Manual.

Attachment 4. – Dipole Calibration Data

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client HCT (Dymstec)

Certificate No: D835V2-441_May11

CALIBRATION CERTIFICATE

Object	D835V2 - SN: 441
Calibration procedure(s)	QA CAL-05.v8 Calibration procedure for dipole validation kits above 700 MHz
Calibration date:	May 16, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Type-N mismatch combination	SN: 5047.2 / 06327	29-Mar-11 (No. 217-01371)	Apr-12
Reference Probe ES3DV3	SN: 3205	29-Apr-11 (No. ES3-3205_Apr11)	Apr-12
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Dimce Iliev	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: May 16, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.4 ± 6 %	0.88 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.31 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	**9.34 mW /g ± 17.0 % (k=2)**

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.51 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	**6.09 mW /g ± 16.5 % (k=2)**

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.9 ± 6 %	1.00 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.43 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	**9.45 mW / g ± 17.0 % (k=2)**

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.60 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	**6.27 mW / g ± 16.5 % (k=2)**

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.2 Ω - 9.8 jΩ
Return Loss	- 20.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.3 Ω - 10.3 jΩ
Return Loss	- 18.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.374 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 09, 2001

DASY5 Validation Report for Head TSL

Date: 16.05.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 441

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: HSL900
Medium parameters used: f = 835 MHz; σ = 0.88 mho/m; ε_r = 40.4; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.07, 6.07, 6.07); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6.2 Build (424)
- Postprocessing SW: SEMCAD X, V14.4.4 Build (2829)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 57.041 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 3.442 W/kg
SAR(1 g) = 2.31 mW/g; SAR(10 g) = 1.51 mW/g
Maximum value of SAR (measured) = 2.703 mW/g

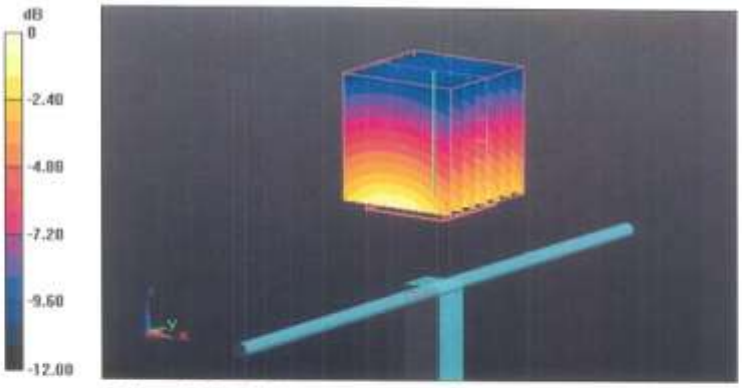

0 dB = 2.700mW/g

Impedance Measurement Plot for Head TSL

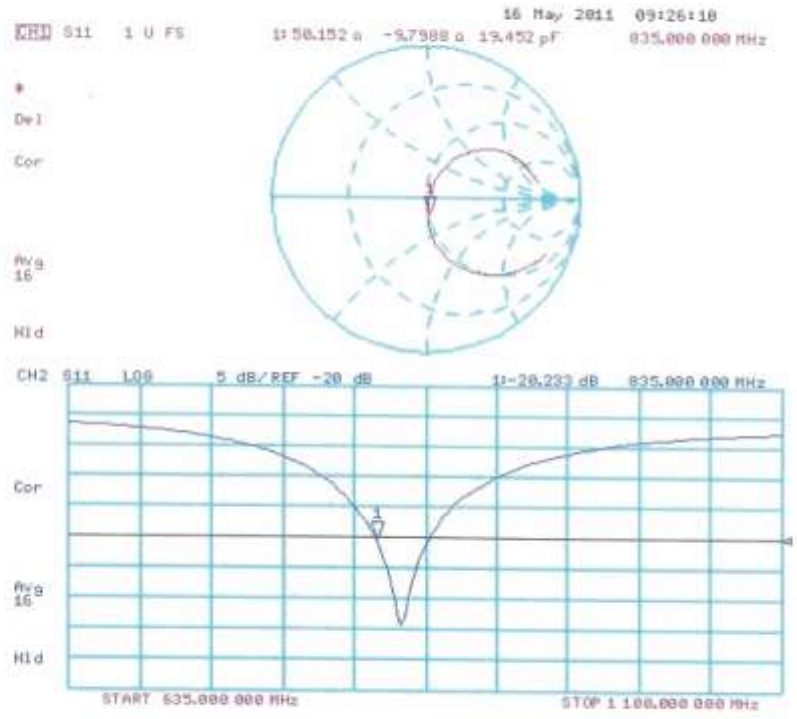

DASY5 Validation Report for Body TSL

Date: 16.05.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:441

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: MSL900
Medium parameters used: f = 835 MHz; σ = 1 mho/m; ε_r = 53.9; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.02, 6.02, 6.02); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6.2 Build (424)
- Postprocessing SW: SEMCAD X, V14.4.4 Build (2829)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 55.302 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 3.553 W/kg
SAR(1 g) = 2.43 mW/g; SAR(10 g) = 1.6 mW/g
Maximum value of SAR (measured) = 2.833 mW/g

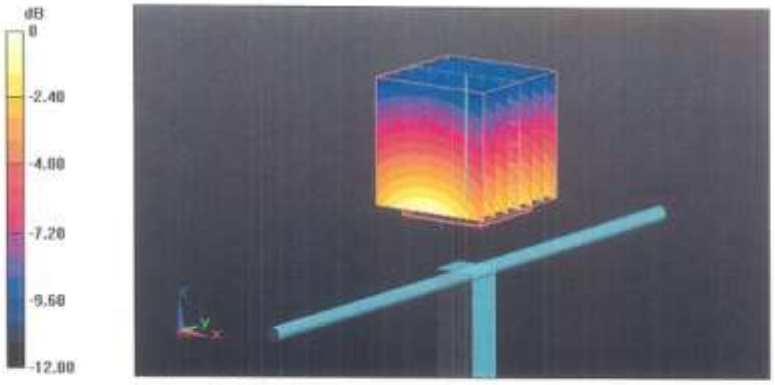

0 dB = 2.830mW/g
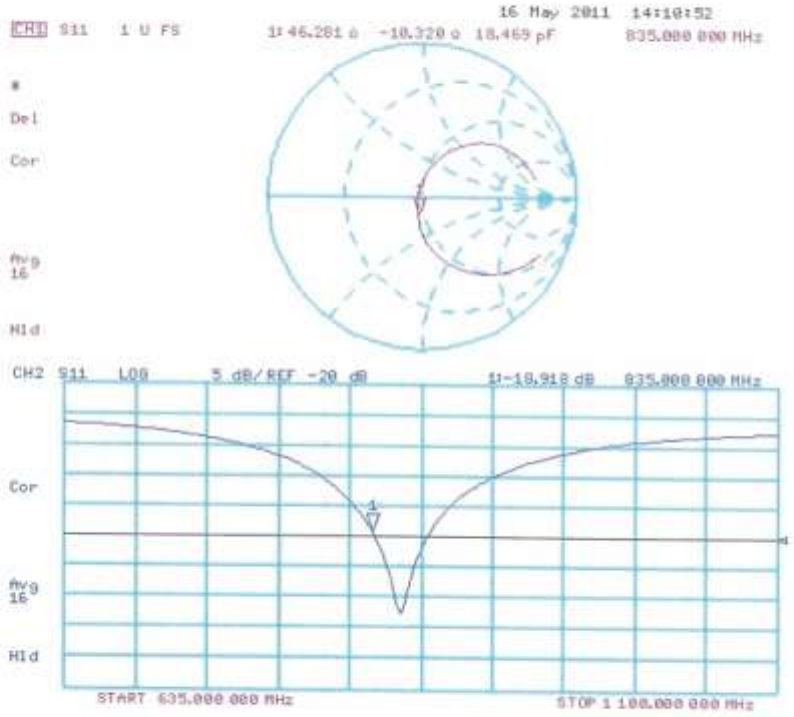
Impedance Measurement Plot for Body TSL