

This drawing is property of SEC. Use or copy of this drawing without proper permission from the appropriate technical-document managing department is prohibited.

	1	2	3	4	5	6	7	8
			Rev. No					
A								
B								
C								
D								
E								
F								
G								
H								
I								
J								
K								
L								

2-R0.5

C2

SAMSUNG

MODEL : SCH-I515
FCC ID : A3LSCHI515
RATED : 3.7 V---; 1000 mA
FOR INFORMATION CALL : 1 888 987 4357

37.0

20.0

3-R1.0

Technical Description

1. Use FILM provided by SAMSUNG for letter and contents

2. Background color is WHITE , letter color is BLACK (reverse for SAMSUNG LOGO)

3. Put Back paper on the back side after the adhesive.

4. No blur and spread for letter

5. Proceed with manufacturing process after the approval of R&D Group

6. The spec. of product must be based on approved limit samples.

7. Stock on as a ROLL

8. Unify material and color as one color (blue) for glassine paper

ROLLING


2.0

2.0

3.0

MAT.	White Polypropylene 80 μ				FIN.	Translucent OPP Laminating +VUP Coating		
TITLE	SCH-I515 LABEL(R)-MAIN							
UNIT	mm	DESIGNED	CHECKED	APPROVED	PROJECTION			
TOLERANCE	+0.0 -0.1	LEE JAE JIN	JO KEONG HWAN	KIM JUNE SOP				
SCALE	N/S				SHEET NO	1/1		
MANUFACTURE	한성P&I	110907	110907	110907				
SAMSUNG ELECTRONICS		Doc. CODE						



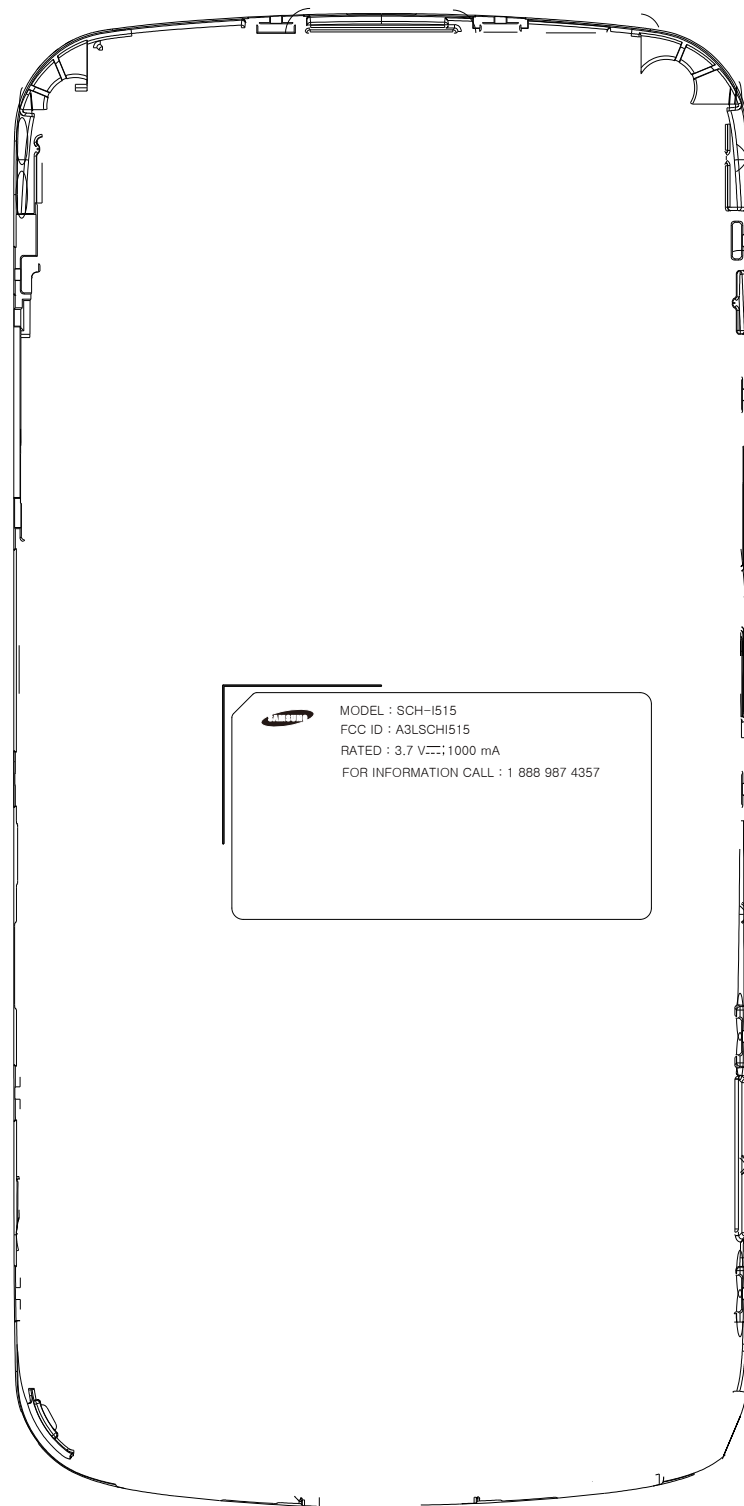

The label is placed inside the battery compartment