

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E; Conducted Power: 25.5 dBm

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ($\sigma = 0.90$ mho/m, $\epsilon_r = 41.90$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 01-18-2007; Ambient Temp: 23.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3561; ConvF(7.94, 7.94, 7.94); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: CDMA, Right Head, Touch, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.6 V/m

Peak SAR (extrapolated) = 0.930 W/kg

SAR(1 g) = 0.728 mW/g; SAR(10 g) = 0.528 mW/g

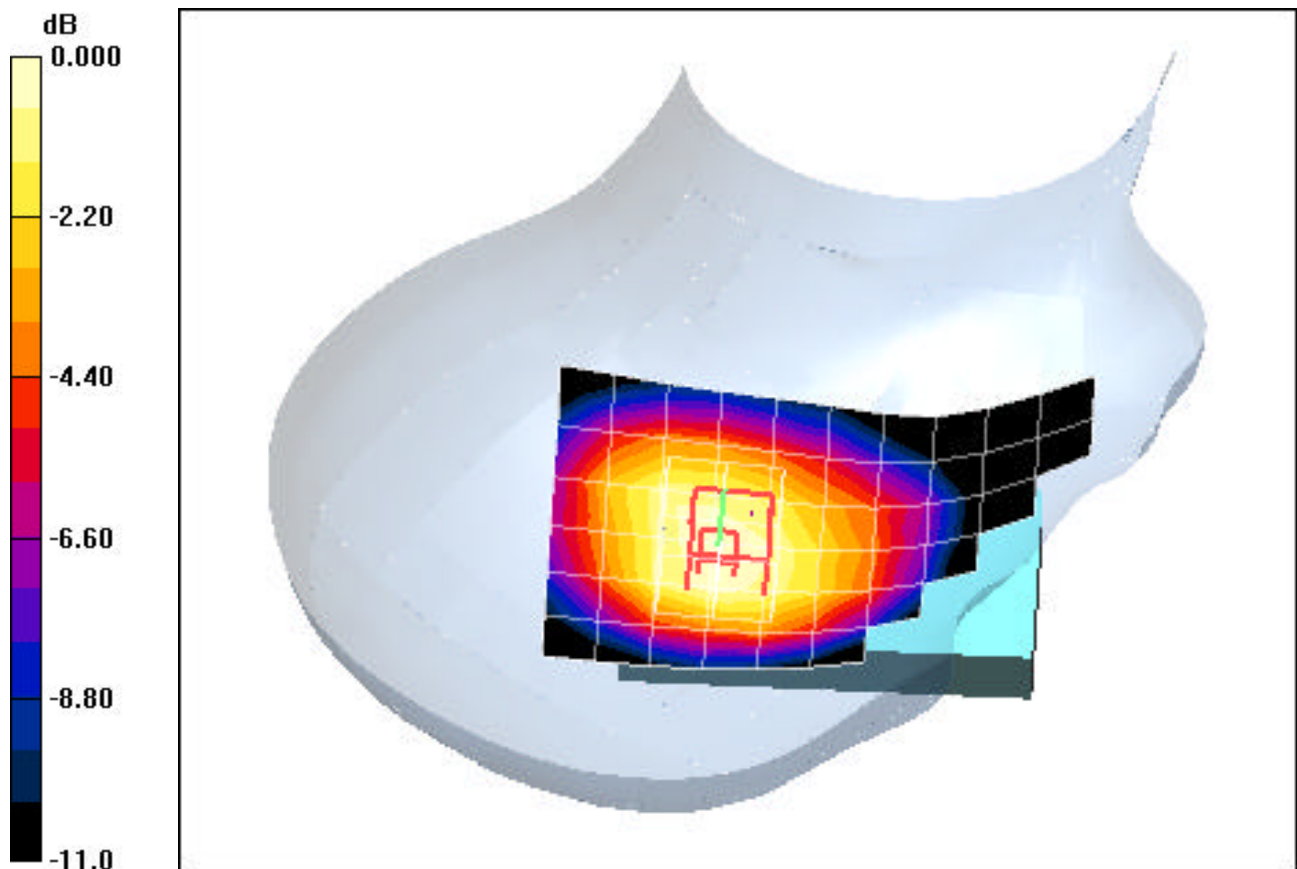

0 dB = 0.797mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E; Conducted Power: 25.5 dBm

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ($\sigma = 0.90$ mho/m, $\epsilon_r = 41.90$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 01-18-2007; Ambient Temp: 23.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3561; ConvF(7.94, 7.94, 7.94); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: CDMA, Right Head, Tilt, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.3 V/m

Peak SAR (extrapolated) = 0.749 W/kg

SAR(1 g) = 0.568 mW/g; SAR(10 g) = 0.409 mW/g

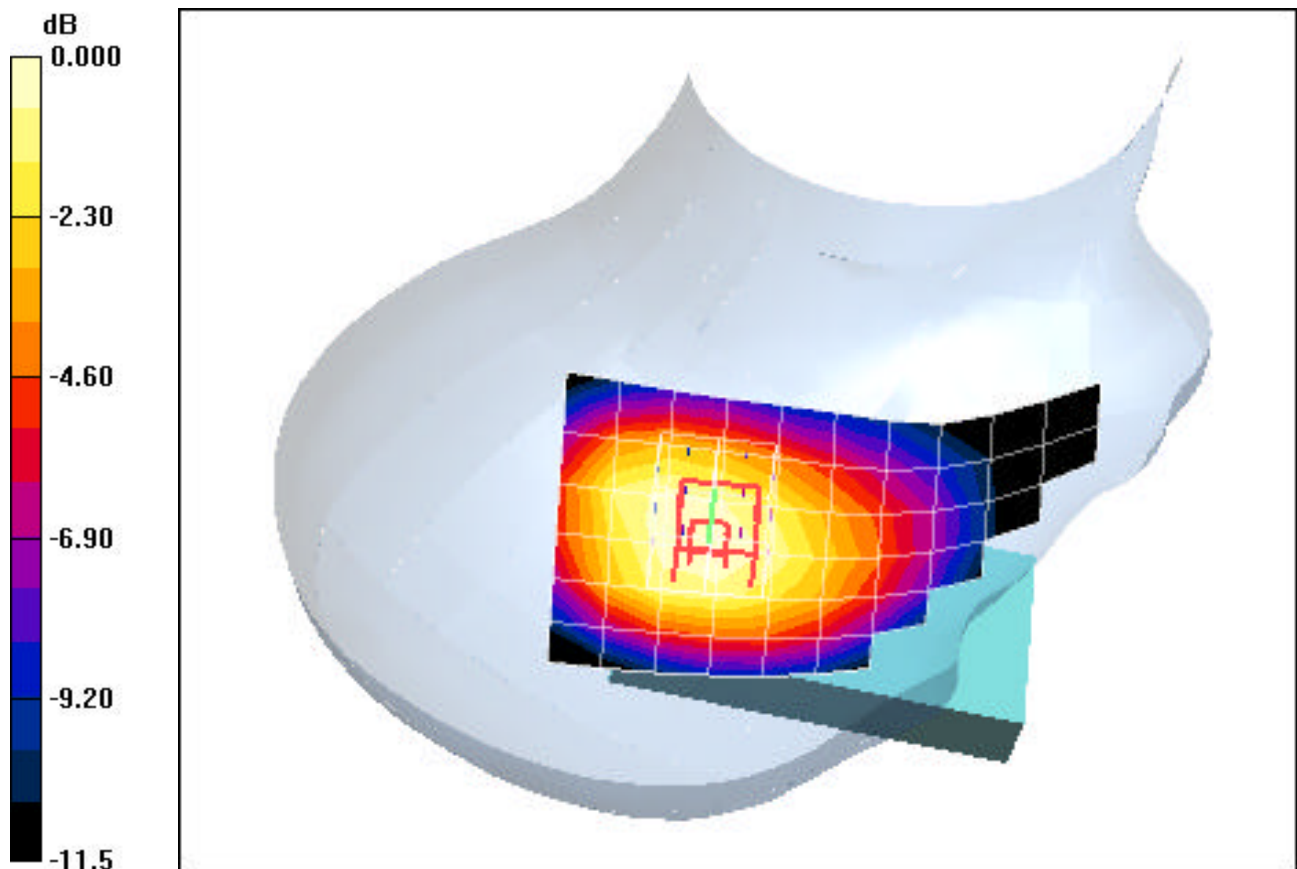

0 dB = 0.636mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E; Conducted Power: 25.5 dBm

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ($\sigma = 0.90$ mho/m, $\epsilon_r = 41.90$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 01-18-2007; Ambient Temp: 23.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3561; ConvF(7.94, 7.94, 7.94); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: CDMA, Left Head, Touch, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.4 V/m

Peak SAR (extrapolated) = 0.945 W/kg

SAR(1 g) = 0.615 mW/g; SAR(10 g) = 0.416 mW/g

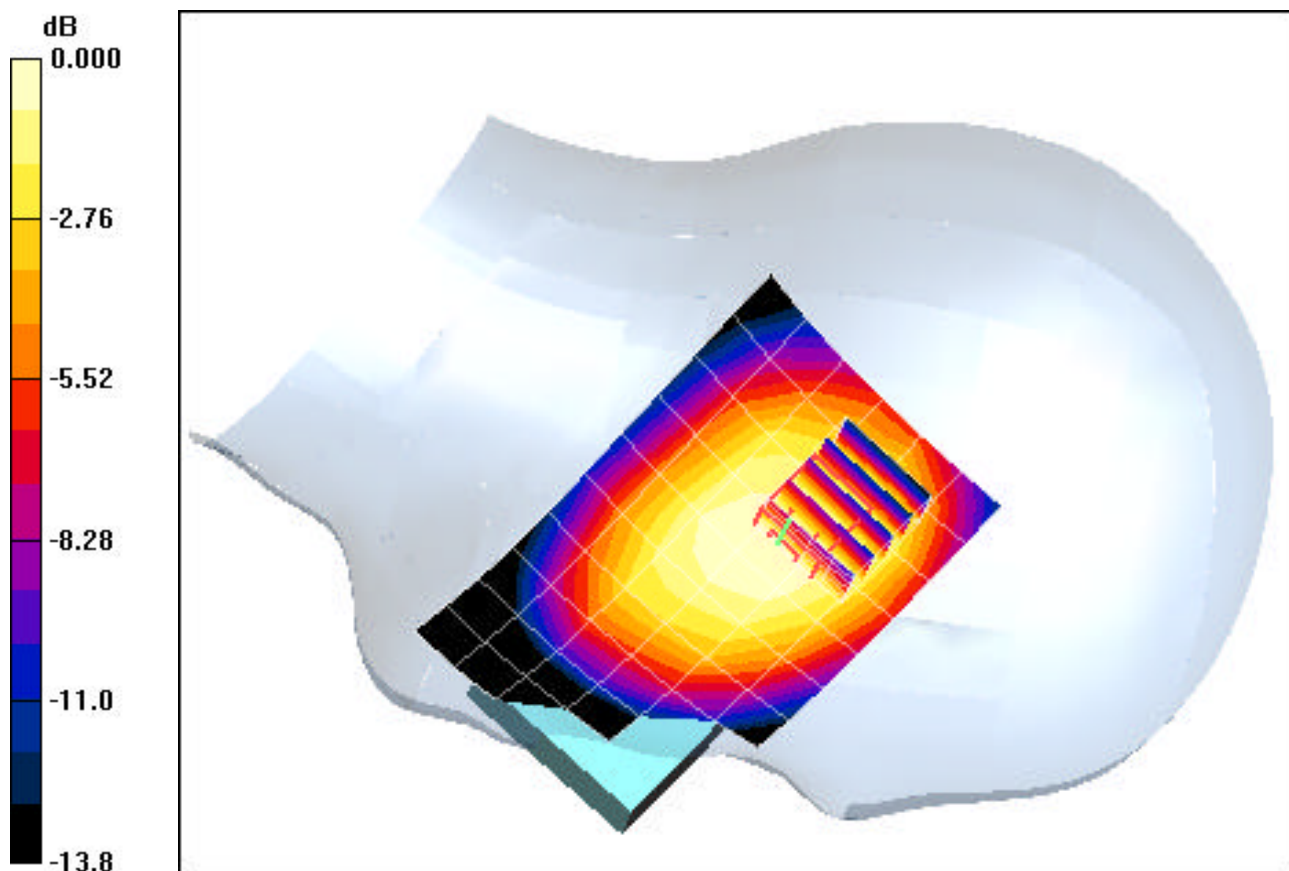

0 dB = 0.693mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E; Conducted Power: 25.5 dBm

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ($\sigma = 0.90$ mho/m, $\epsilon_r = 41.90$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 01-18-2007; Ambient Temp: 23.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3561; ConvF(7.94, 7.94, 7.94); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: CDMA, Left Head, Tilt, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.4 V/m

Peak SAR (extrapolated) = 0.811 W/kg

SAR(1 g) = 0.511 mW/g; SAR(10 g) = 0.360 mW/g

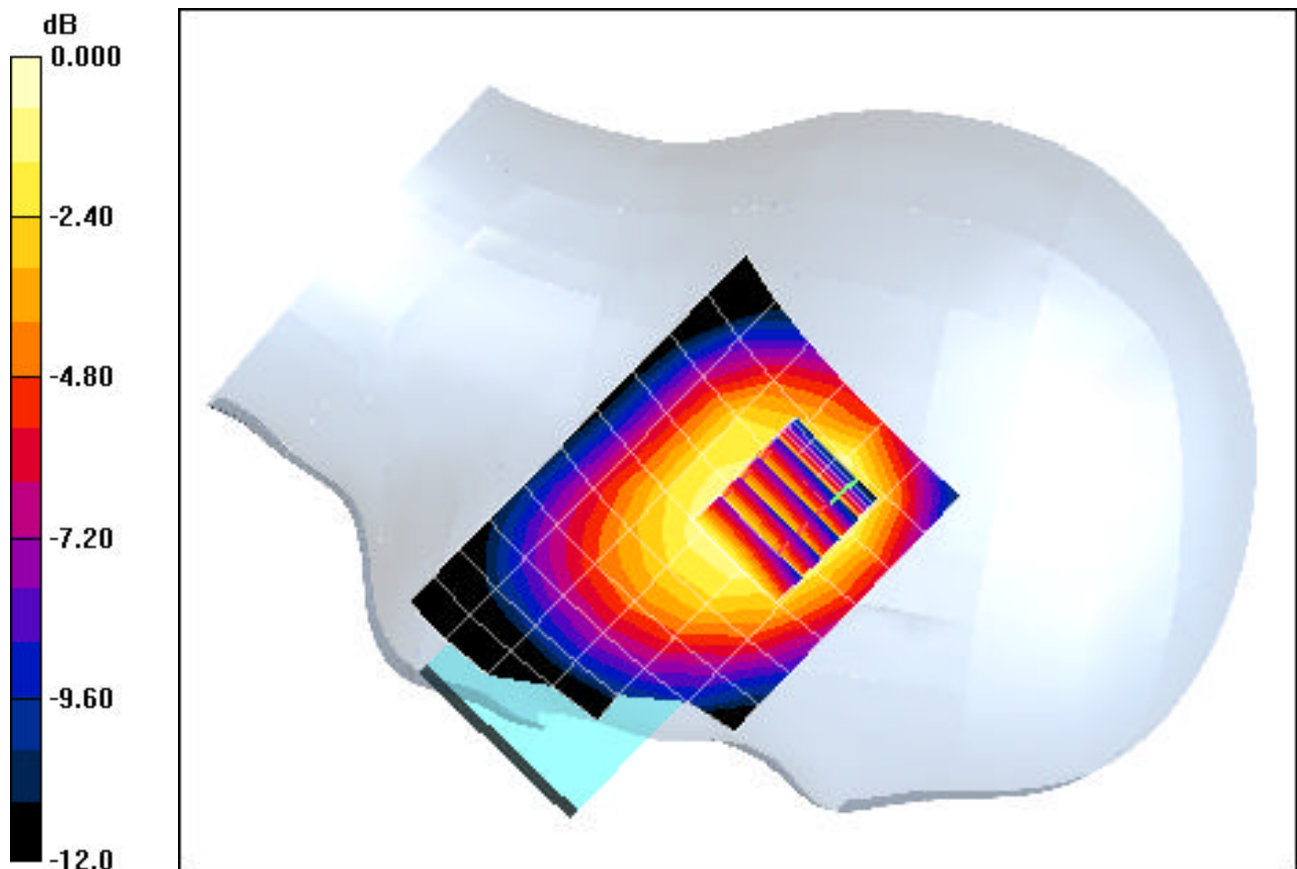

0 dB = 0.605mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E; Conducted Power: 25.5 dBm

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ($\sigma = 1.45$ mho/m, $\epsilon_r = 39.092$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 01-18-2007; Ambient Temp: 23.8°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3561; ConvF(6.99, 6.99, 6.99); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: PCS, Right Head, Touch, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.6 V/m

Peak SAR (extrapolated) = 0.394 W/kg

SAR(1 g) = 0.251 mW/g; SAR(10 g) = 0.151 mW/g

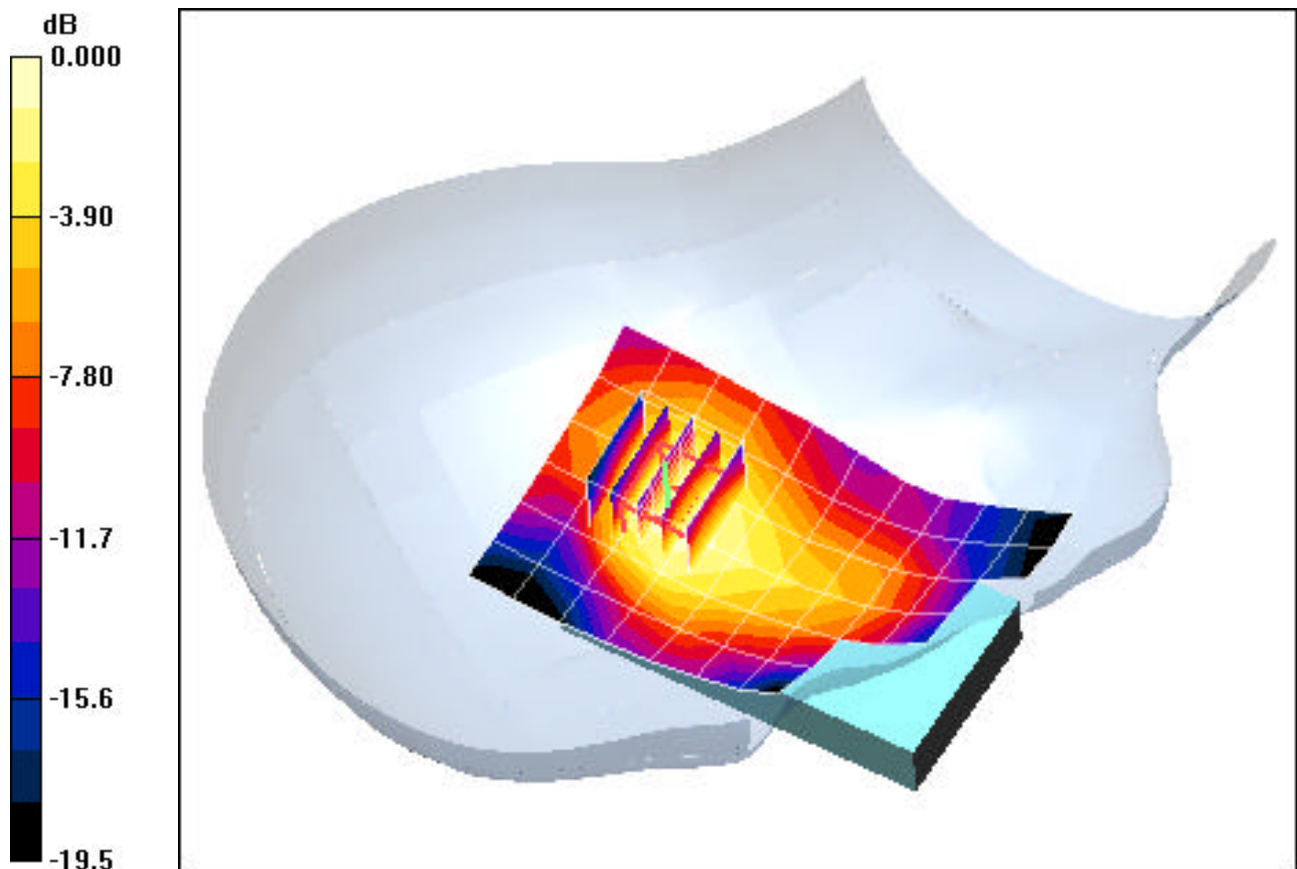

0 dB = 0.297mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E; Conducted Power: 25.5 dBm

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ($\sigma = 1.45$ mho/m, $\epsilon_r = 39.092$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 01-18-2007; Ambient Temp: 23.8°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3561; ConvF(6.99, 6.99, 6.99); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: PCS, Right Head, Tilt, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.9 V/m

Peak SAR (extrapolated) = 0.293 W/kg

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.102 mW/g

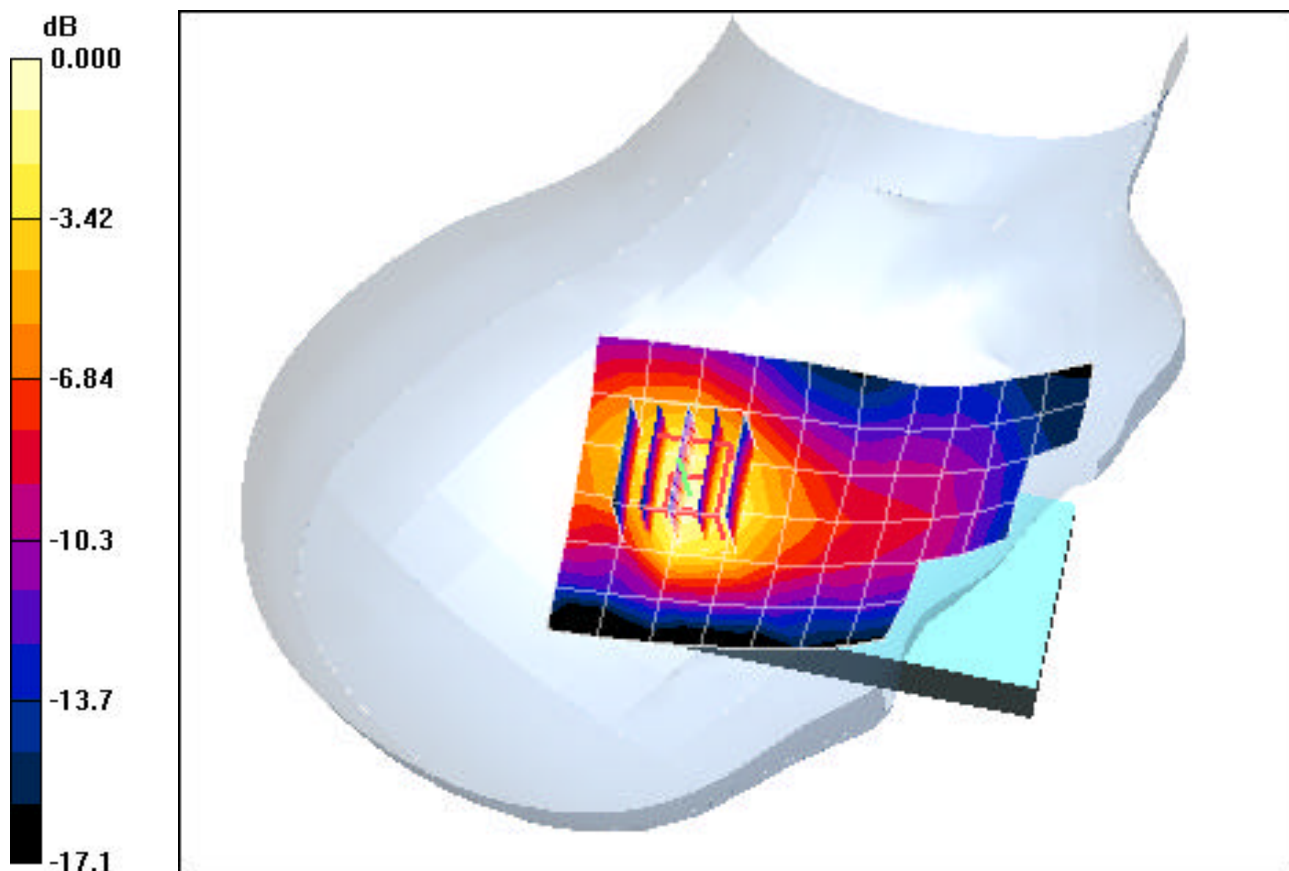

0 dB = 0.216mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E; Conducted Power: 25.5 dBm

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ($\sigma = 1.45$ mho/m, $\epsilon_r = 39.092$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 01-17-2007; Ambient Temp: 23.2°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3561; ConvF(6.99, 6.99, 6.99); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: PCS, Left Head, Touch, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.73 V/m

Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.217 mW/g; SAR(10 g) = 0.133 mW/g

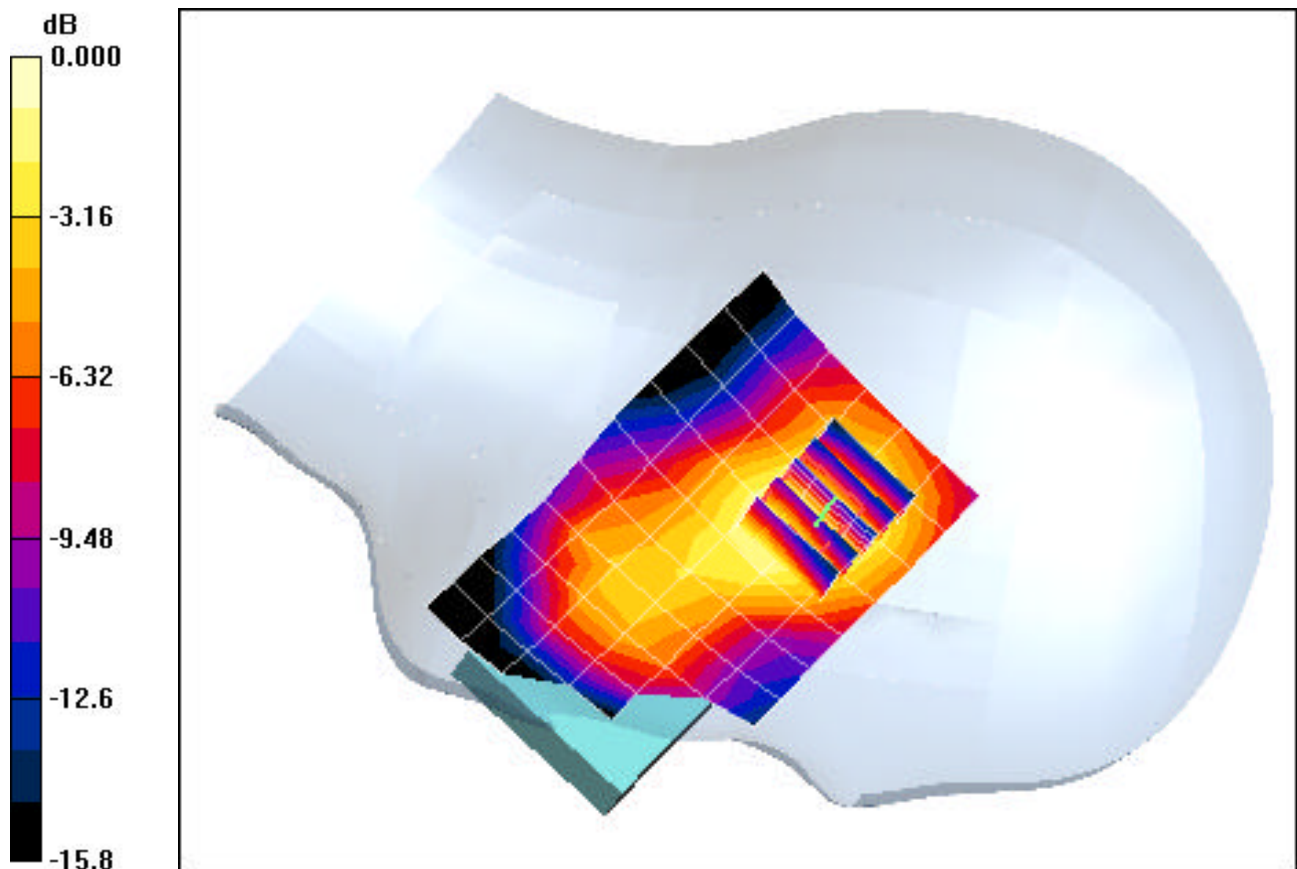

0 dB = 0.250mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E; Conducted Power: 25.5 dBm

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ($\sigma = 1.45$ mho/m, $\epsilon_r = 39.092$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 01-17-2007; Ambient Temp: 23.2°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3561; ConvF(6.99, 6.99, 6.99); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: PCS, Left Head, Tilt, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.73 V/m

Peak SAR (extrapolated) = 0.443 W/kg

SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.082 mW/g

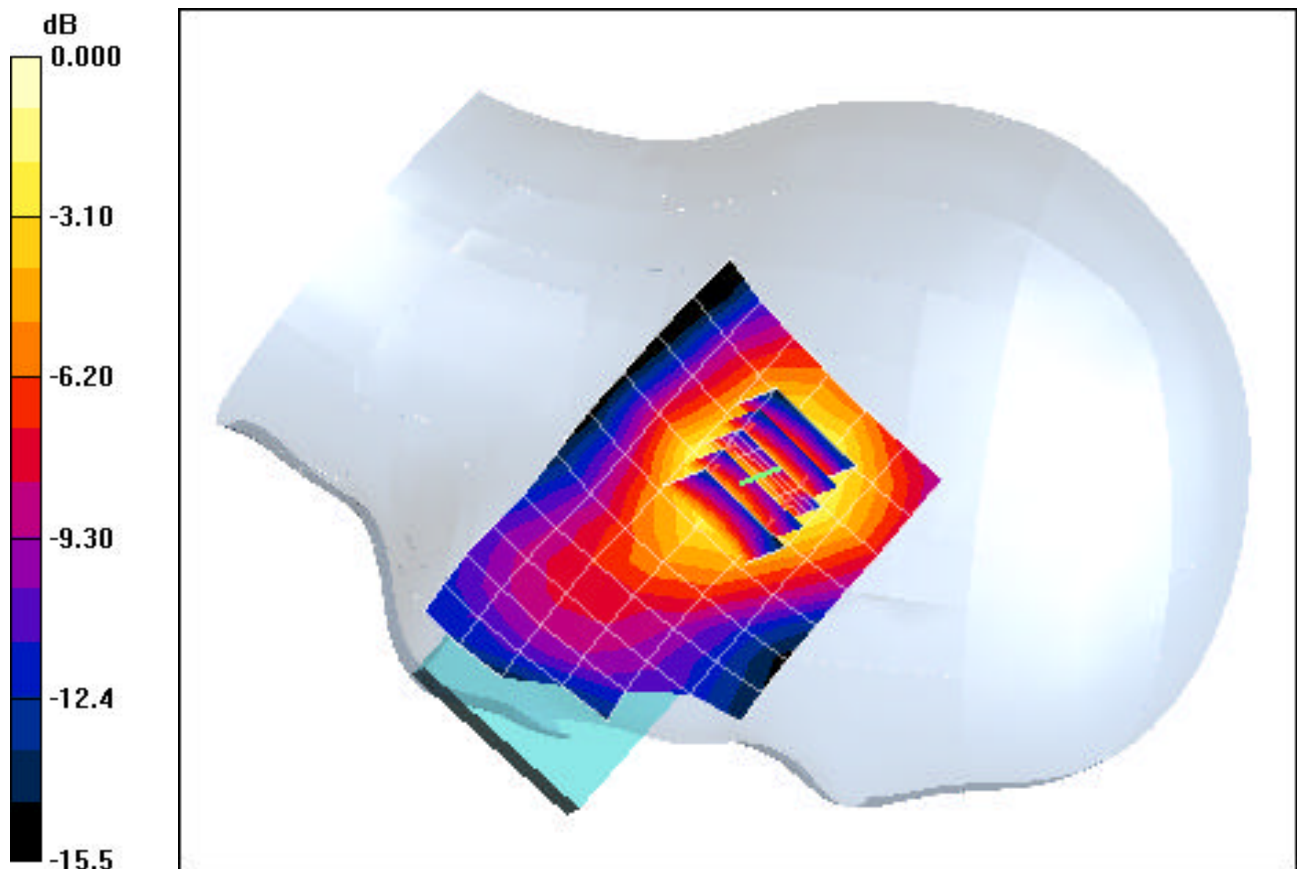

0 dB = 0.166mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Brain ($\sigma = 1.83$ mho/m, $\epsilon_r = 40.12$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 01-22-2007; Ambient Temp: 22.8°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3561; ConvF(6.32, 6.32, 6.32); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: IEEE 802.11b, Right Head, Touch, Low.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.44 V/m

Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.073 mW/g; SAR(10 g) = 0.023 mW/g

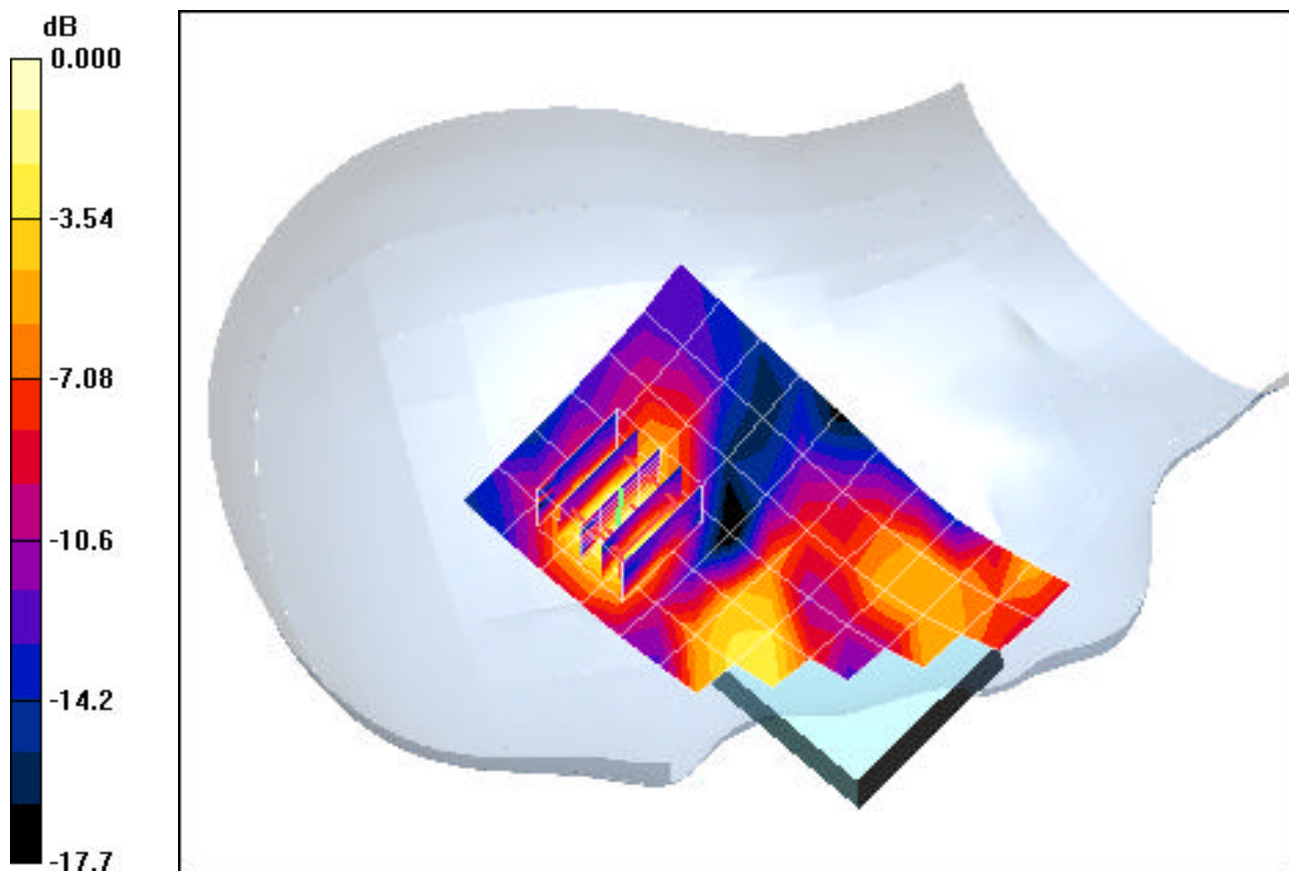

0 dB = 0.089mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Brain ($\sigma = 1.83$ mho/m, $\epsilon_r = 40.12$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 01-22-2007; Ambient Temp: 22.8°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3561; ConvF(6.32, 6.32, 6.32); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: IEEE 802.11b, Right Head, Tilt, Low.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.94 V/m

Peak SAR (extrapolated) = 0.073 W/kg

SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.021 mW/g

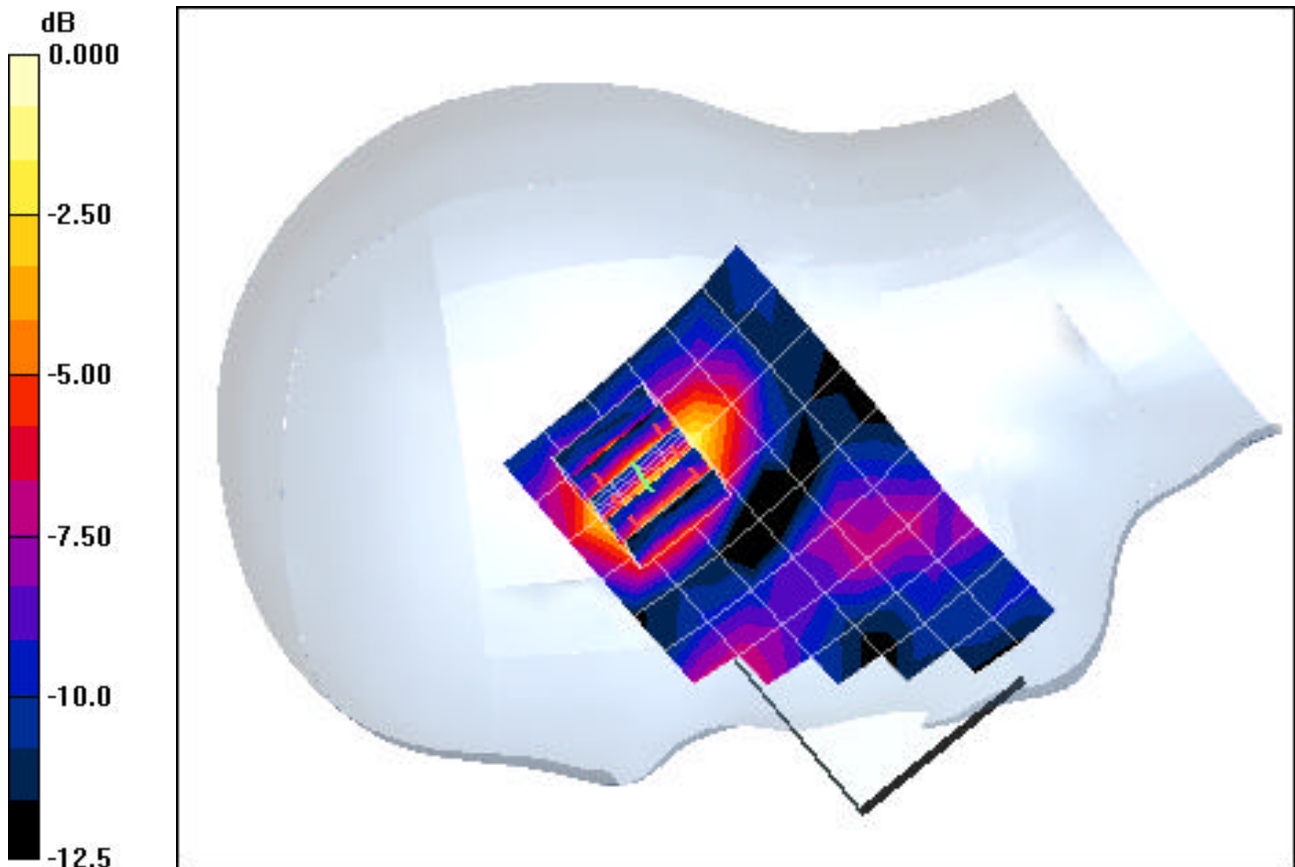

0 dB = 0.049mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Brain ($\sigma = 1.83$ mho/m, $\epsilon_r = 40.12$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 01-22-2007; Ambient Temp: 22.8°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3561; ConvF(6.32, 6.32, 6.32); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: IEEE 802.11b, Left Head, Touch, Low.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.16 V/m

Peak SAR (extrapolated) = 0.279 W/kg

SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.073 mW/g

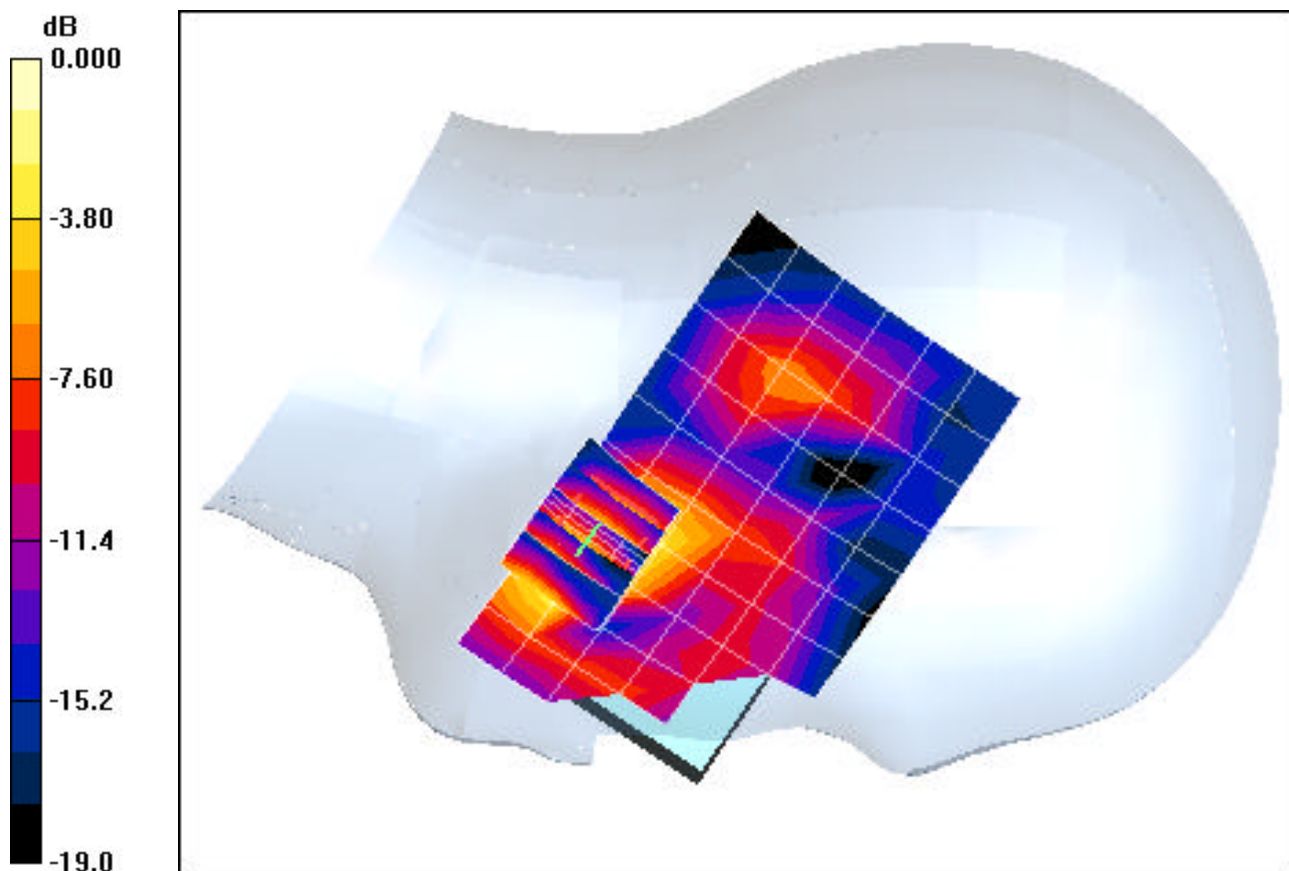

0 dB = 0.168mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Brain ($\sigma = 1.83$ mho/m, $\epsilon_r = 40.12$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 01-22-2007; Ambient Temp: 22.8°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3561; ConvF(6.32, 6.32, 6.32); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: IEEE 802.11b, Left Head, Tilt, Low.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.01 V/m

Peak SAR (extrapolated) = 0.058 W/kg

SAR(1 g) = 0.028 mW/g; SAR(10 g) = 0.015 mW/g

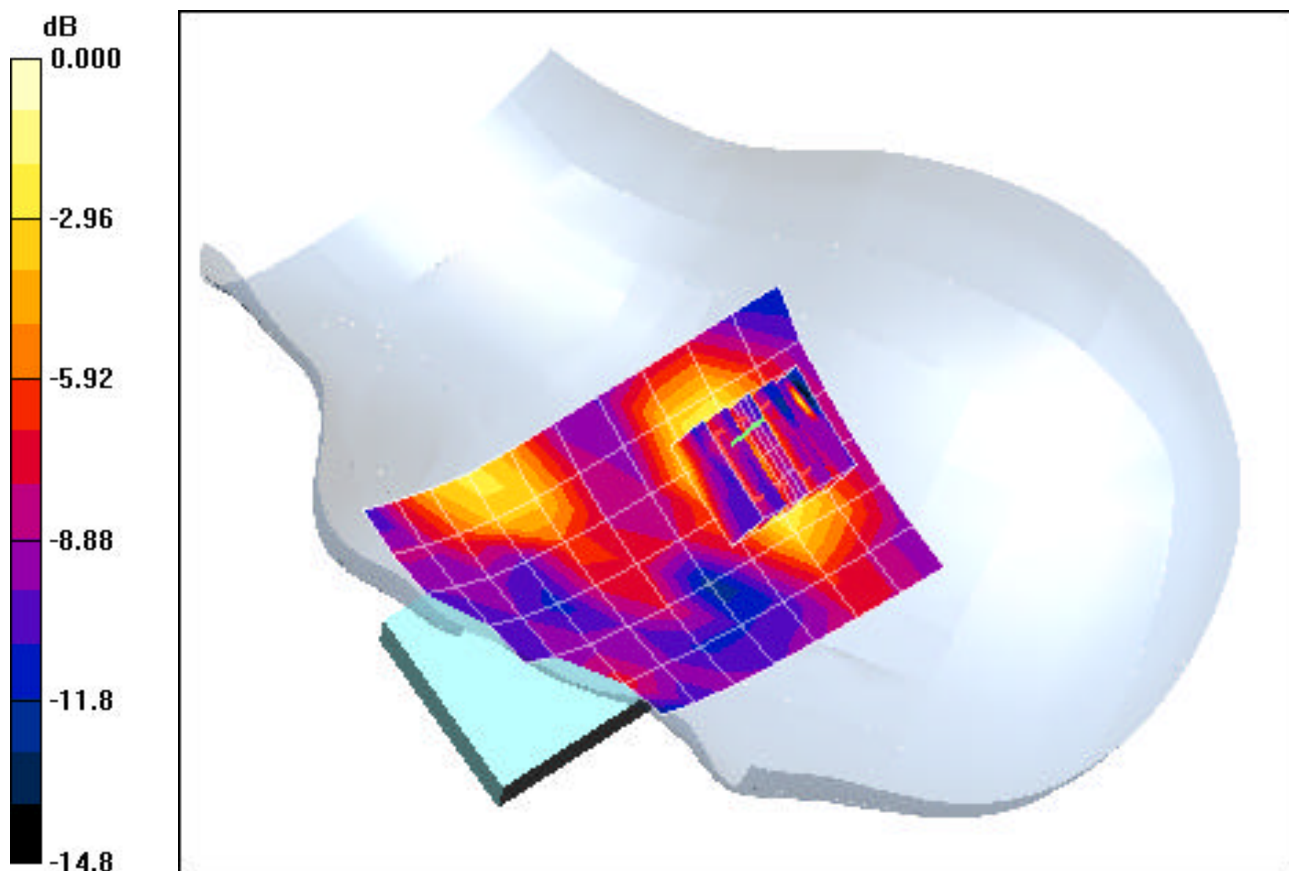

0 dB = 0.033mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 Brain ($\sigma = 1.83$ mho/m, $\epsilon_r = 40.12$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 01-22-2007; Ambient Temp: 22.8°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3561; ConvF(6.32, 6.32, 6.32); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Bluetooth, Right Head, Touch, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.37 V/m

Peak SAR (extrapolated) = 0.007 W/kg

SAR(1 g) = 0.00468 mW/g; SAR(10 g) = 0.00411 mW/g

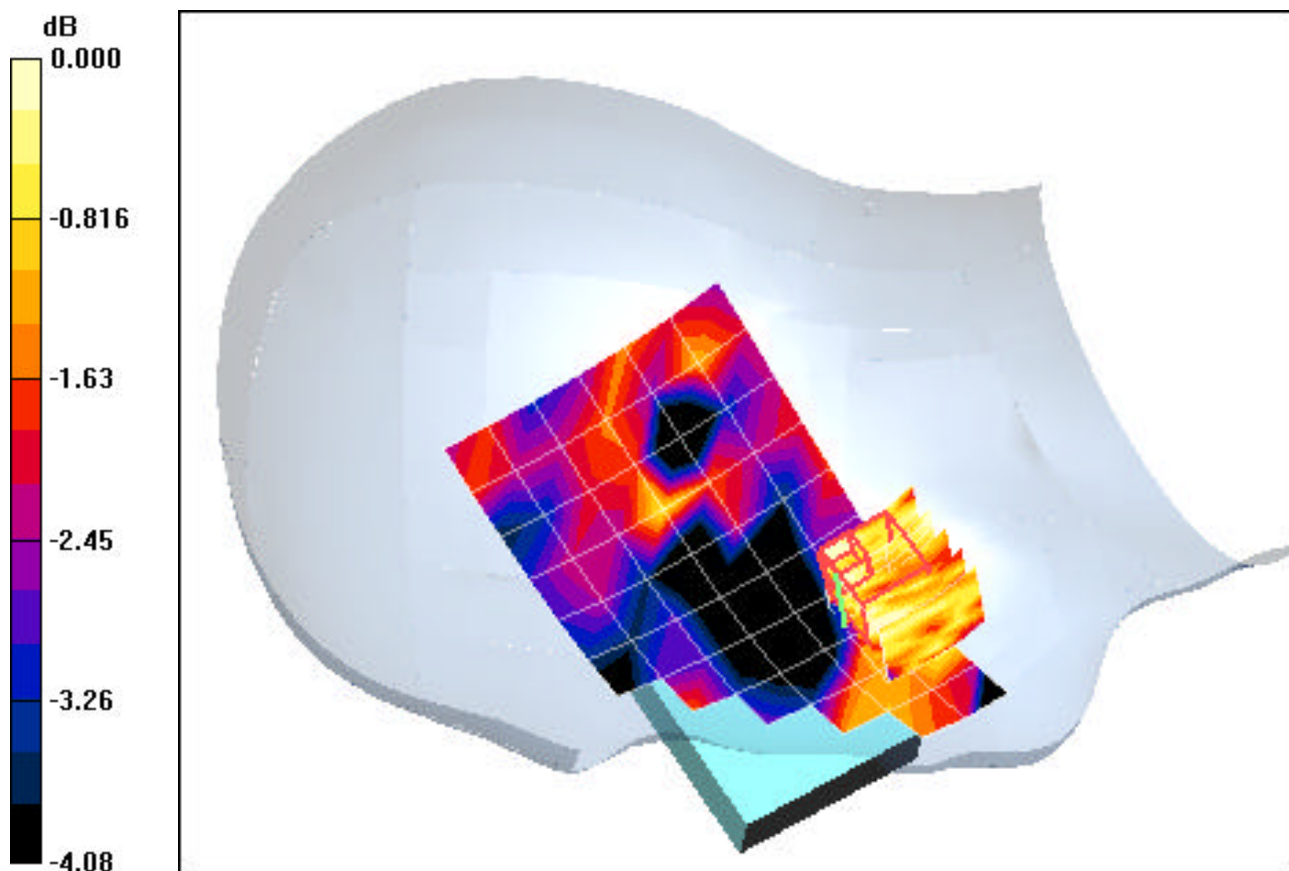

0 dB = 0.005mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 Brain ($\sigma = 1.83$ mho/m, $\epsilon_r = 40.12$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 01-22-2007; Ambient Temp: 22.8°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3561; ConvF(6.32, 6.32, 6.32); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Bluetooth, Right Head, Tilt, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.08 V/m

Peak SAR (extrapolated) = 0.006 W/kg

SAR(1 g) = 0.00467 mW/g; SAR(10 g) = 0.00426 mW/g

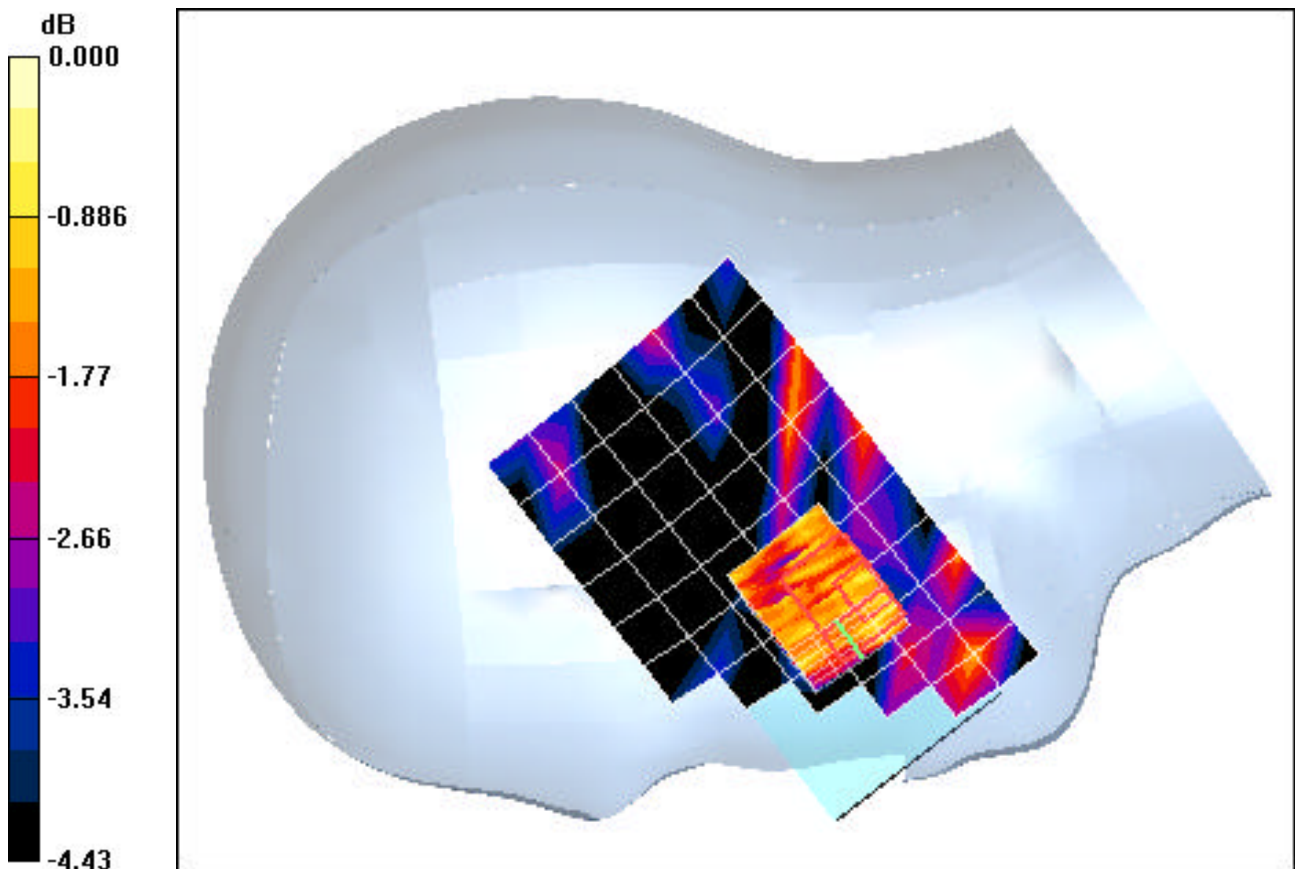

0 dB = 0.006mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 Brain ($\sigma = 1.83$ mho/m, $\epsilon_r = 40.12$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 01-22-2007; Ambient Temp: 22.8°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3561; ConvF(6.32, 6.32, 6.32); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Bluetooth, Left Head, Touch, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.845 V/m

Peak SAR (extrapolated) = 0.007 W/kg

SAR(1 g) = 0.00514 mW/g; SAR(10 g) = 0.00409 mW/g

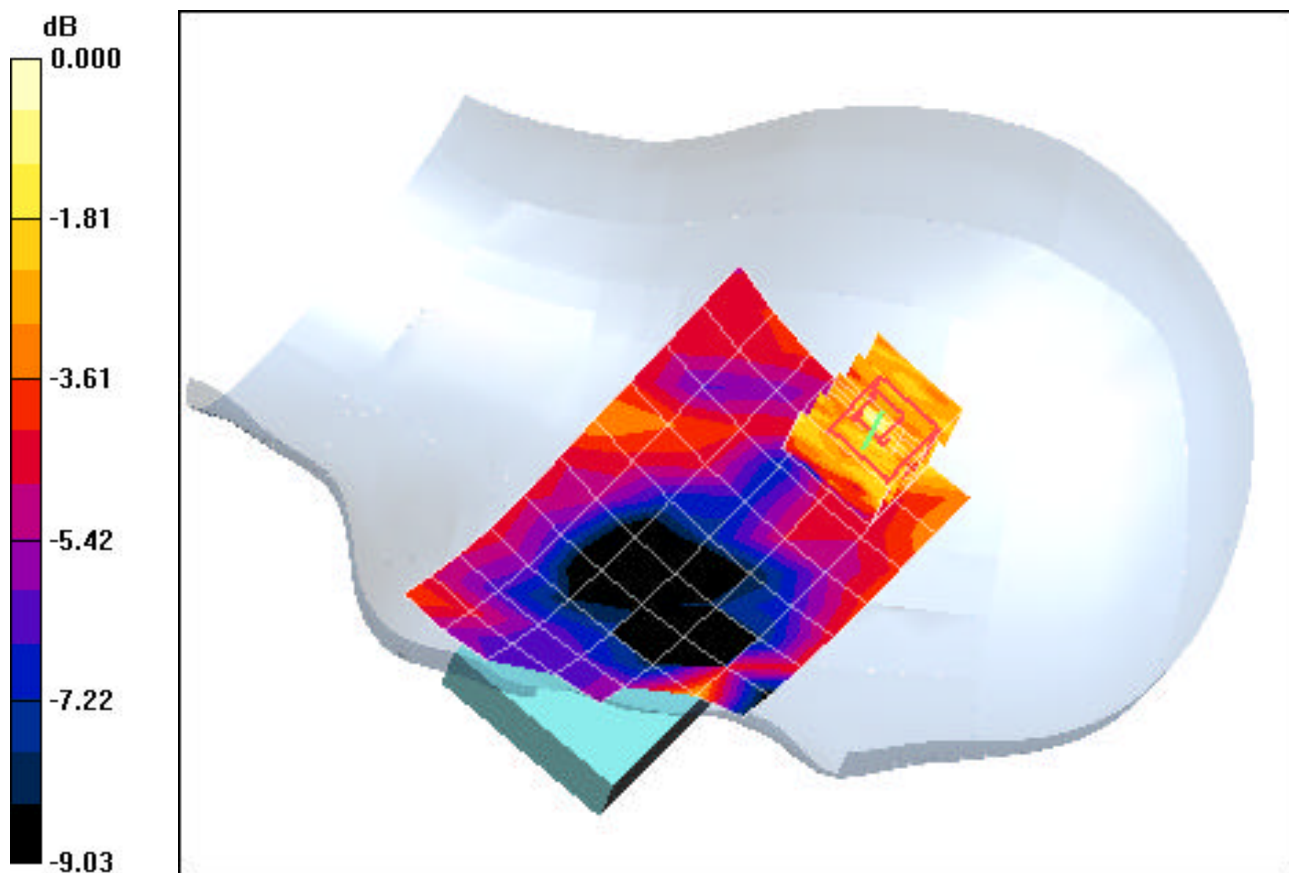

0 dB = 0.007mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 Brain ($\sigma = 1.83$ mho/m, $\epsilon_r = 40.12$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 01-22-2007; Ambient Temp: 22.8°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3561; ConvF(6.32, 6.32, 6.32); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Bluetooth, Left Head, Tilt, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.19 V/m

Peak SAR (extrapolated) = 0.015 W/kg

SAR(1 g) = 0.00456 mW/g; SAR(10 g) = 0.0041 mW/g

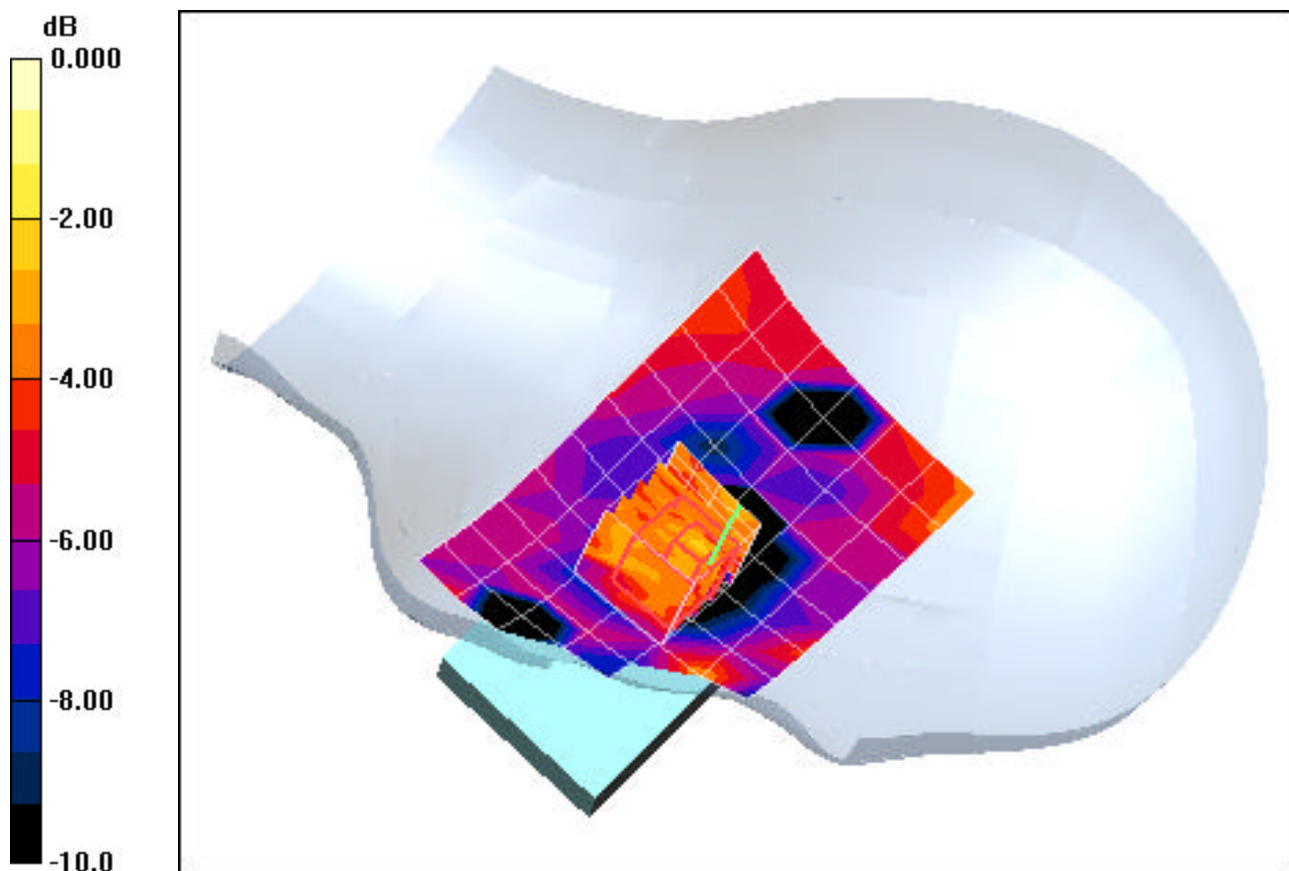

0 dB = 0.009mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E; Conducted Power: 25.5 dBm

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Muscle ($\sigma = 0.96$ mho/m, $\epsilon_r = 53.83$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-18-2007; Ambient Temp: 22.4°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN3561; ConvF(7.92, 7.92, 7.92); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: CDMA, Body SAR, Back side, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.6 V/m

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.888 mW/g

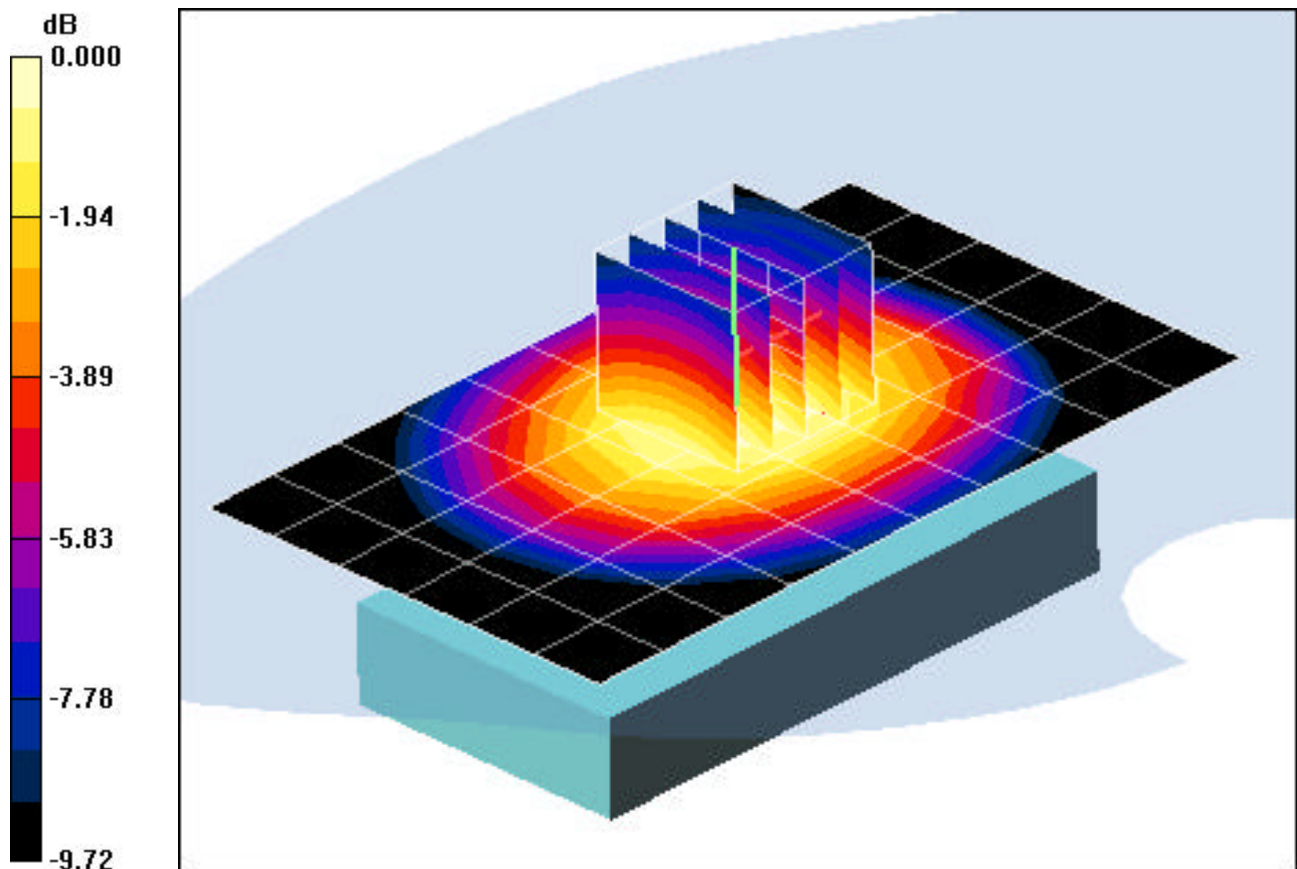

0 dB = 1.38mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E; Conducted Power: 25.5 dBm

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Muscle ($\sigma = 1.54$ mho/m, $\epsilon_r = 53.68$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-19-2007; Ambient Temp: 22.2°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3561; ConvF(6.47, 6.47, 6.47); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: PCS, Body SAR, Back side, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.8 V/m

Peak SAR (extrapolated) = 0.444 W/kg

SAR(1 g) = 0.262 mW/g; SAR(10 g) = 0.144 mW/g

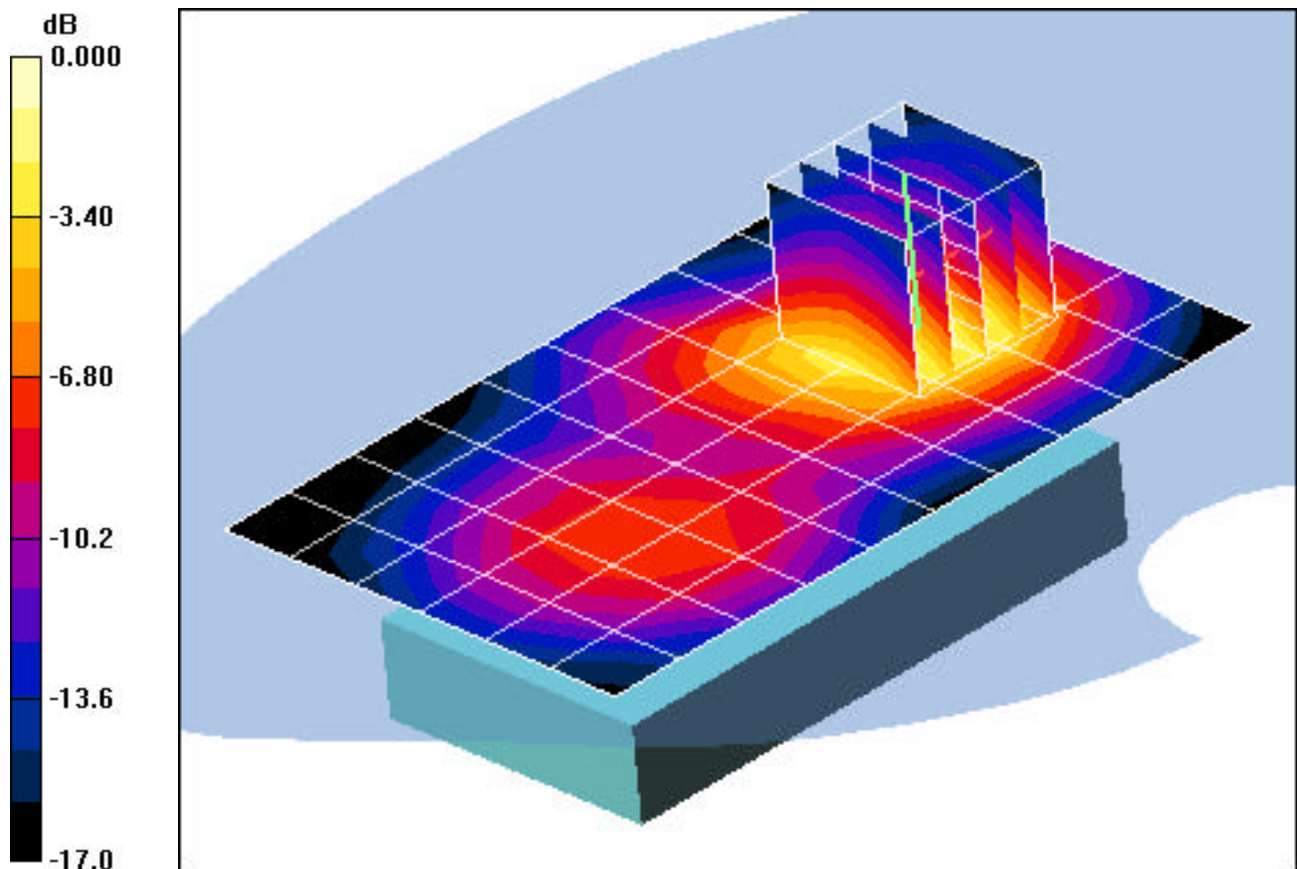

0 dB = 0.322mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Muscle ($\sigma = 1.97$ mho/m, $\epsilon_r = 51.60$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-19-2007; Ambient Temp: 23.2°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3561; ConvF(6.33, 6.33, 6.33); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: IEEE 802.11b, Body SAR, Back side, Low.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.24 V/m

Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.117 mW/g; SAR(10 g) = 0.065 mW/g

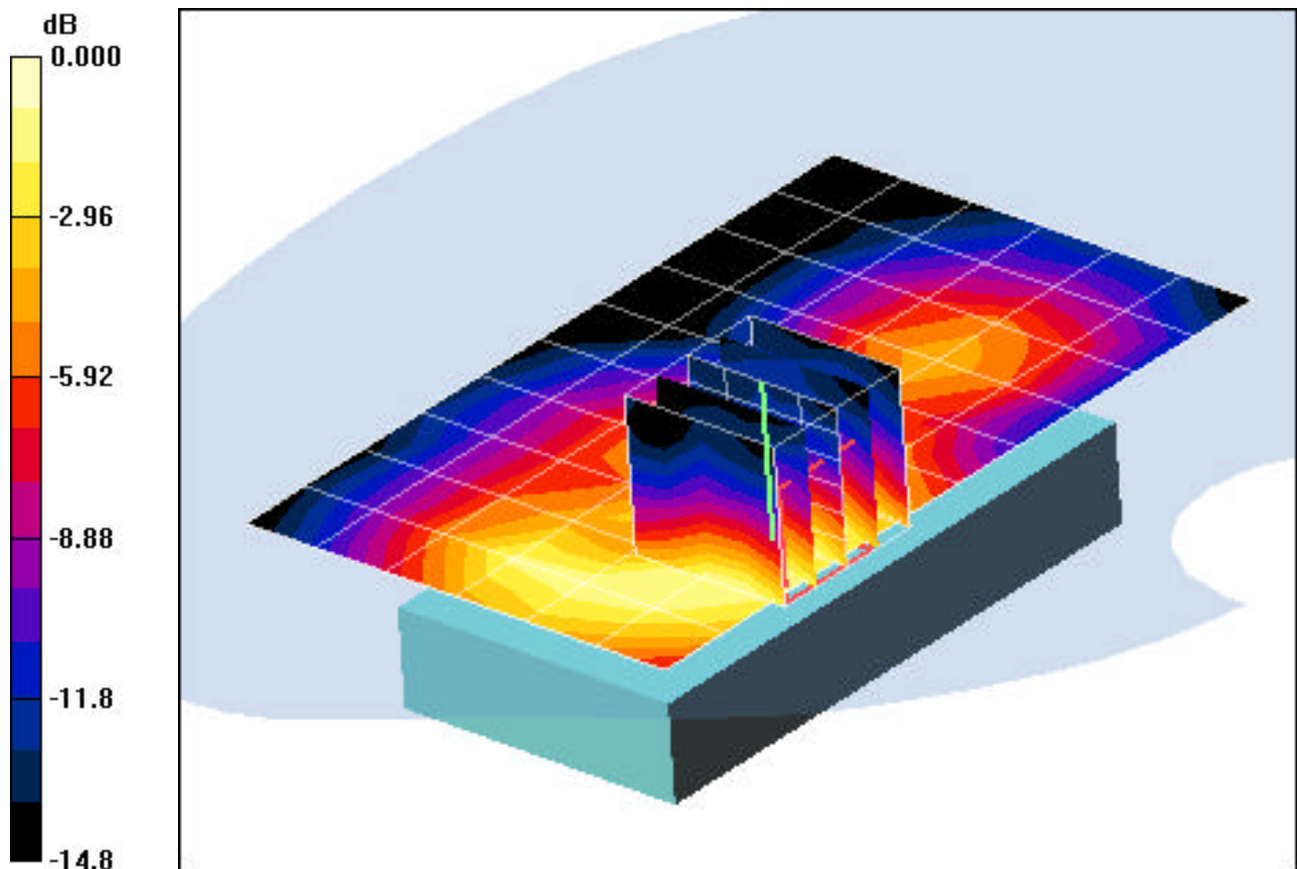

0 dB = 0.144mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 Muscle ($\sigma = 1.97$ mho/m, $\epsilon_r = 51.60$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-19-2007; Ambient Temp: 23.2°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3561; ConvF(6.33, 6.33, 6.33); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: Bluetooth, Body SAR, Back side, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.38 V/m

Peak SAR (extrapolated) = 0.016 W/kg

SAR(1 g) = 0.0076 mW/g; SAR(10 g) = 0.00518 mW/g

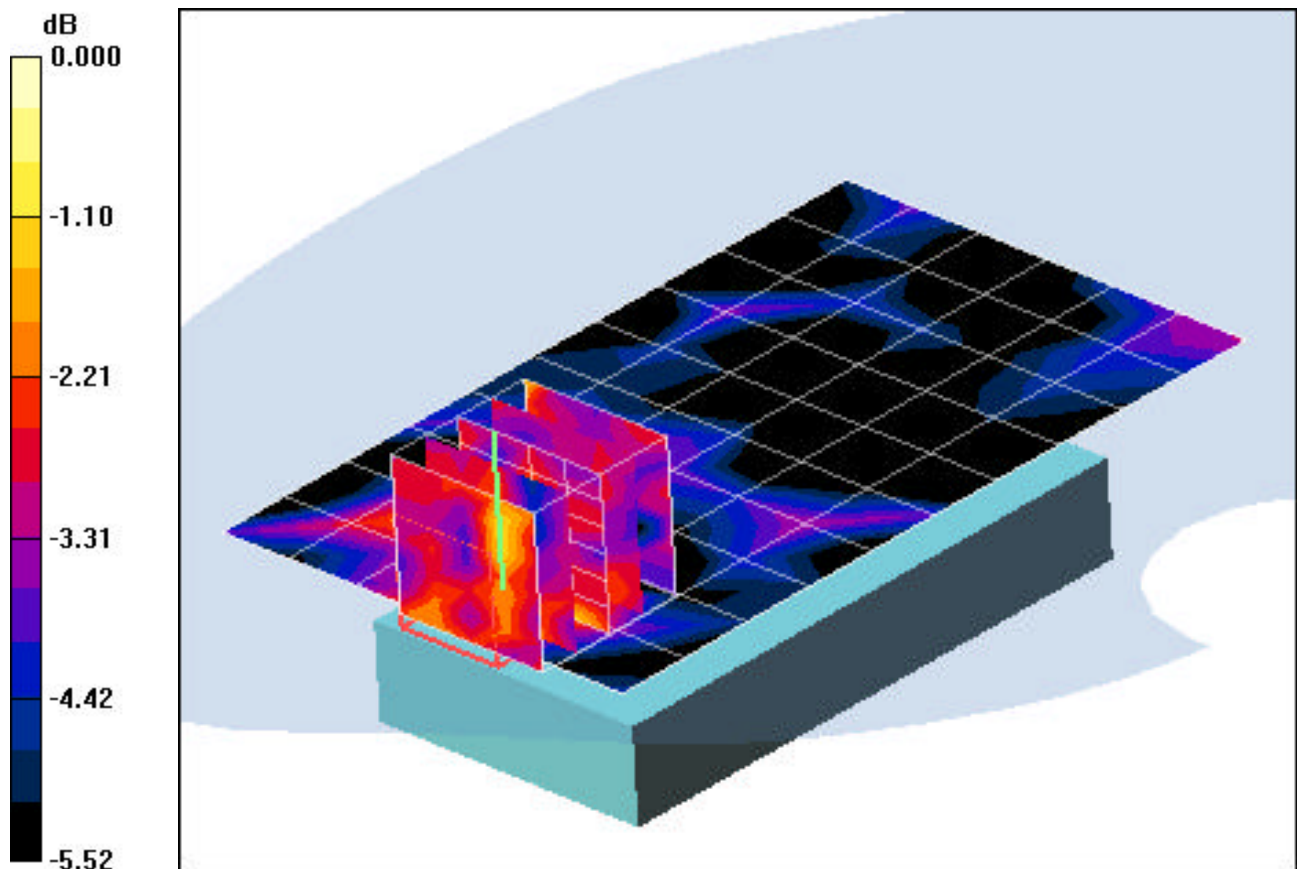

0 dB = 0.008mW/g

PCTEST ENGINEERING LABORATORY, INC.

DASY4 Multi Band Evaluation with Volume scan

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E


Right Head, Touch, CDMA + IEEE 802.11b + Bluetooth

Probe: EX3DV4 - SN3561; Calibrated: 11/23/2006
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 10/16/2006
Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197
Measurement SW: DASY4, V4.7 Build 53

Multi Band Result:

SAR(1 g) = 0.725 mW/g; SAR(10 g) = 0.524 mW/g

Maximum value of SAR (measured) = 0.762 mW/g

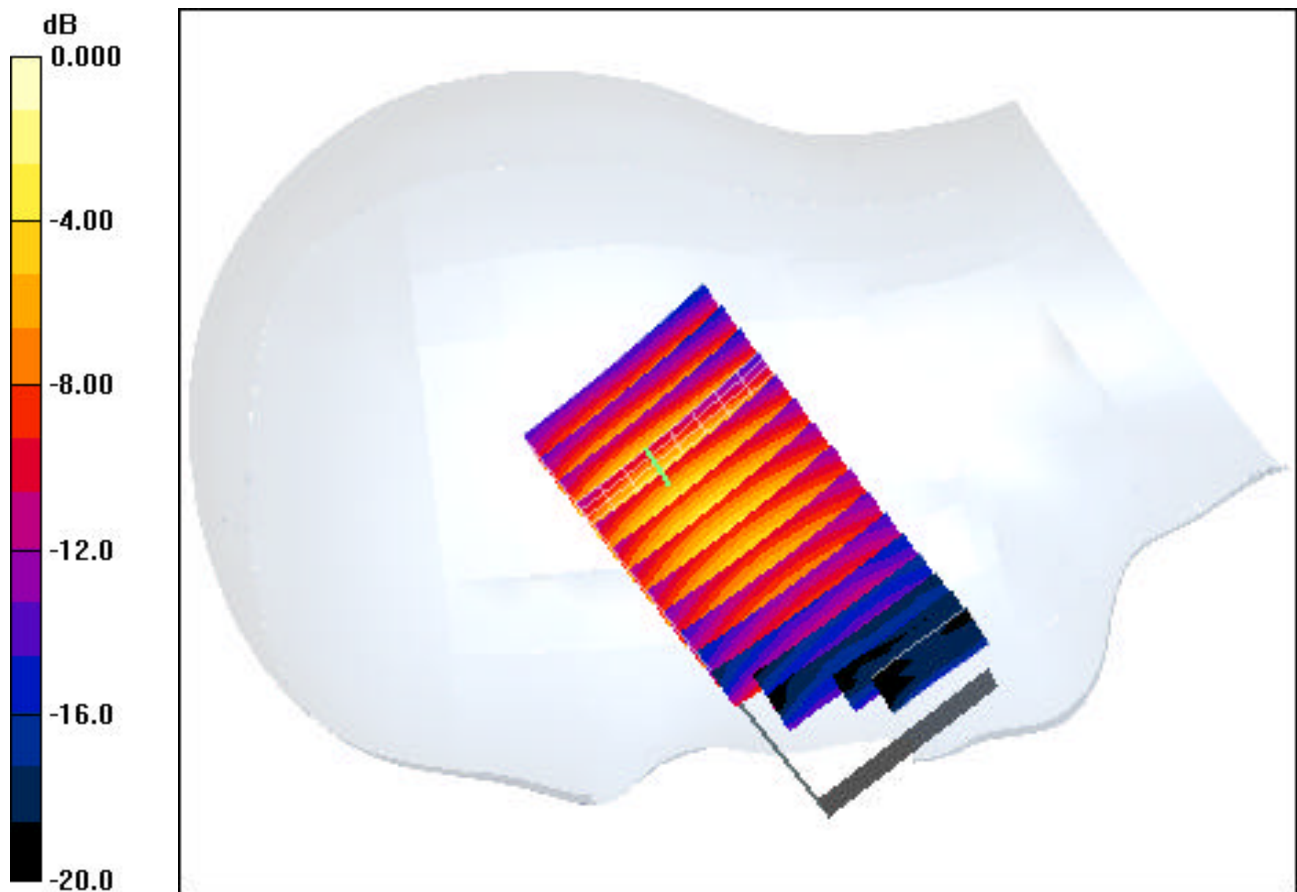

0 dB = 0.762mW/g

PCTEST ENGINEERING LABORATORY, INC.

DASY4 Multi Band Evaluation with Volume scan

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E


Left Head, Touch, CDMA + IEEE 802.11b + Bluetooth

Probe: EX3DV4 - SN3561; Calibrated: 11/23/2006
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 10/16/2006
Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197
Measurement SW: DASY4, V4.7 Build 53

Multi Band Result:

SAR(1 g) = 0.636 mW/g; SAR(10 g) = 0.465 mW/g

Maximum value of SAR (measured) = 0.670 mW/g

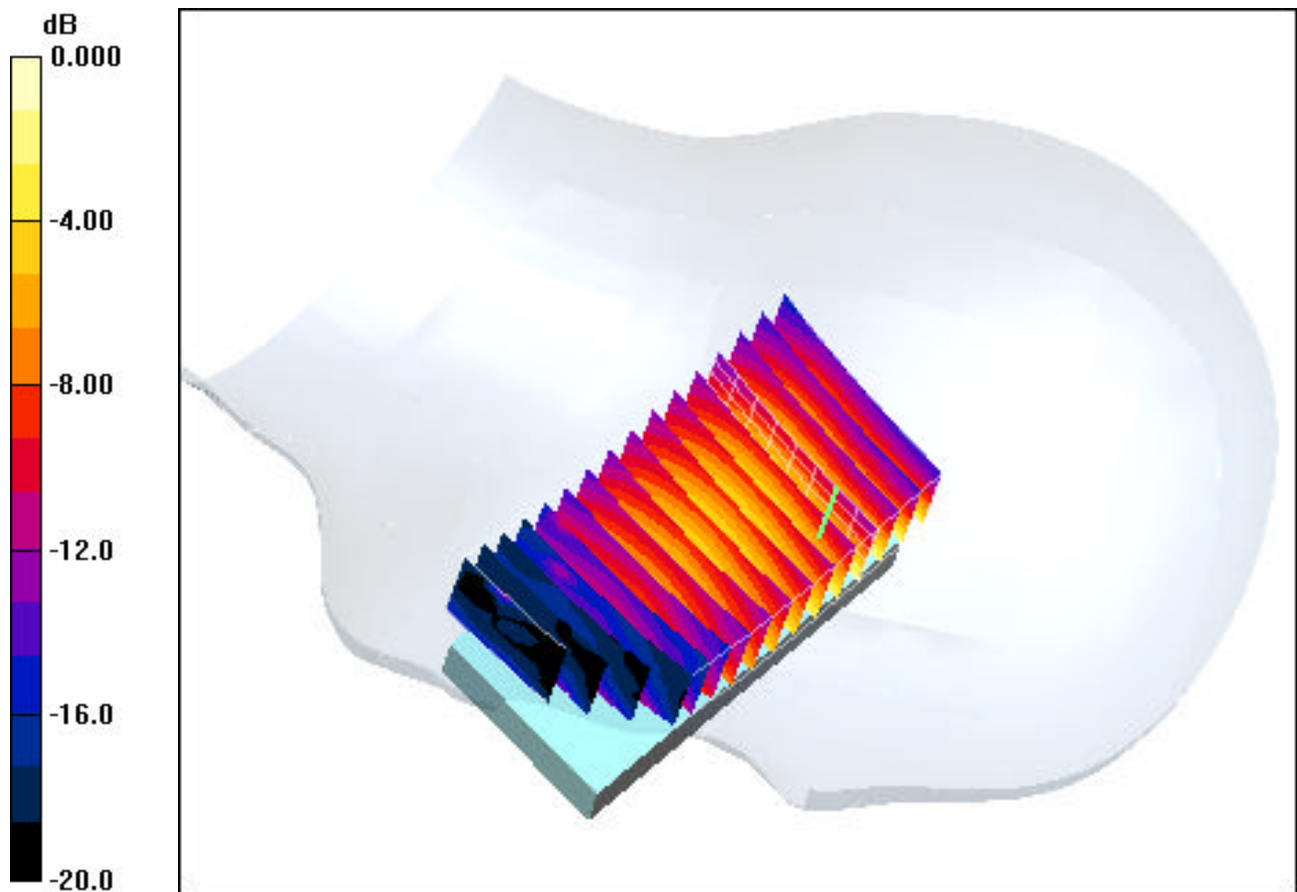

0 dB = 0.670mW/g

PCTEST ENGINEERING LABORATORY, INC.

DASY4 Multi Band Evaluation with Volume scan

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E


Right Head, Touch, PCS + IEEE 802.11b + Bluetooth

Probe: EX3DV4 - SN3561; Calibrated: 11/23/2006
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 10/16/2006
Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197
Measurement SW: DASY4, V4.7 Build 53

Multi Band Result:

SAR(1 g) = 0.271 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.284 mW/g

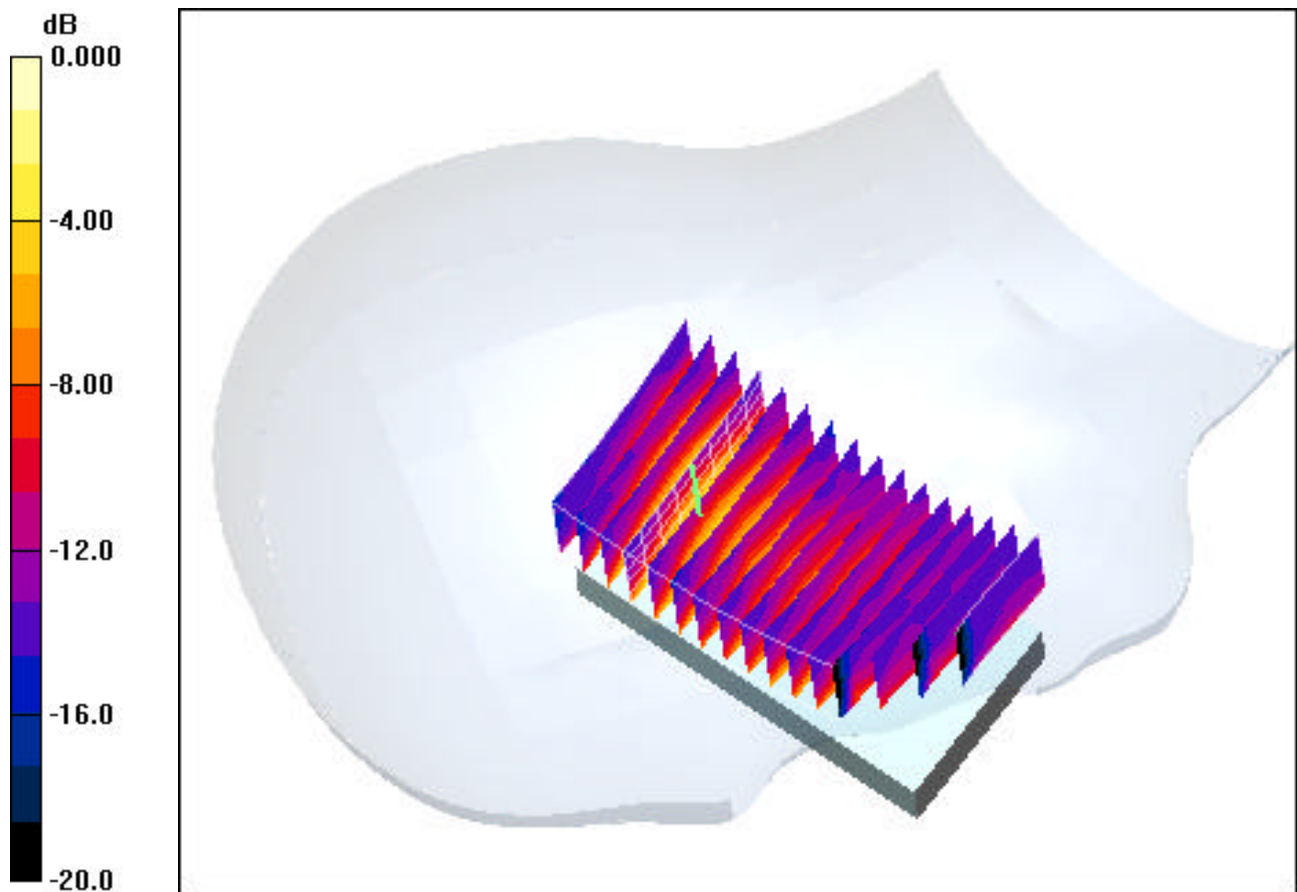

0 dB = 0.284mW/g

PCTEST ENGINEERING LABORATORY, INC.

DASY4 Multi Band Evaluation with Volume scan

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E


Left Head, Touch, PCS + IEEE 802.11b + Bluetooth

Probe: EX3DV4 - SN3561; Calibrated: 11/23/2006
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 10/16/2006
Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197
Measurement SW: DASY4, V4.7 Build 53

Multi Band Result:

SAR(1 g) = 0.226 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 0.237 mW/g

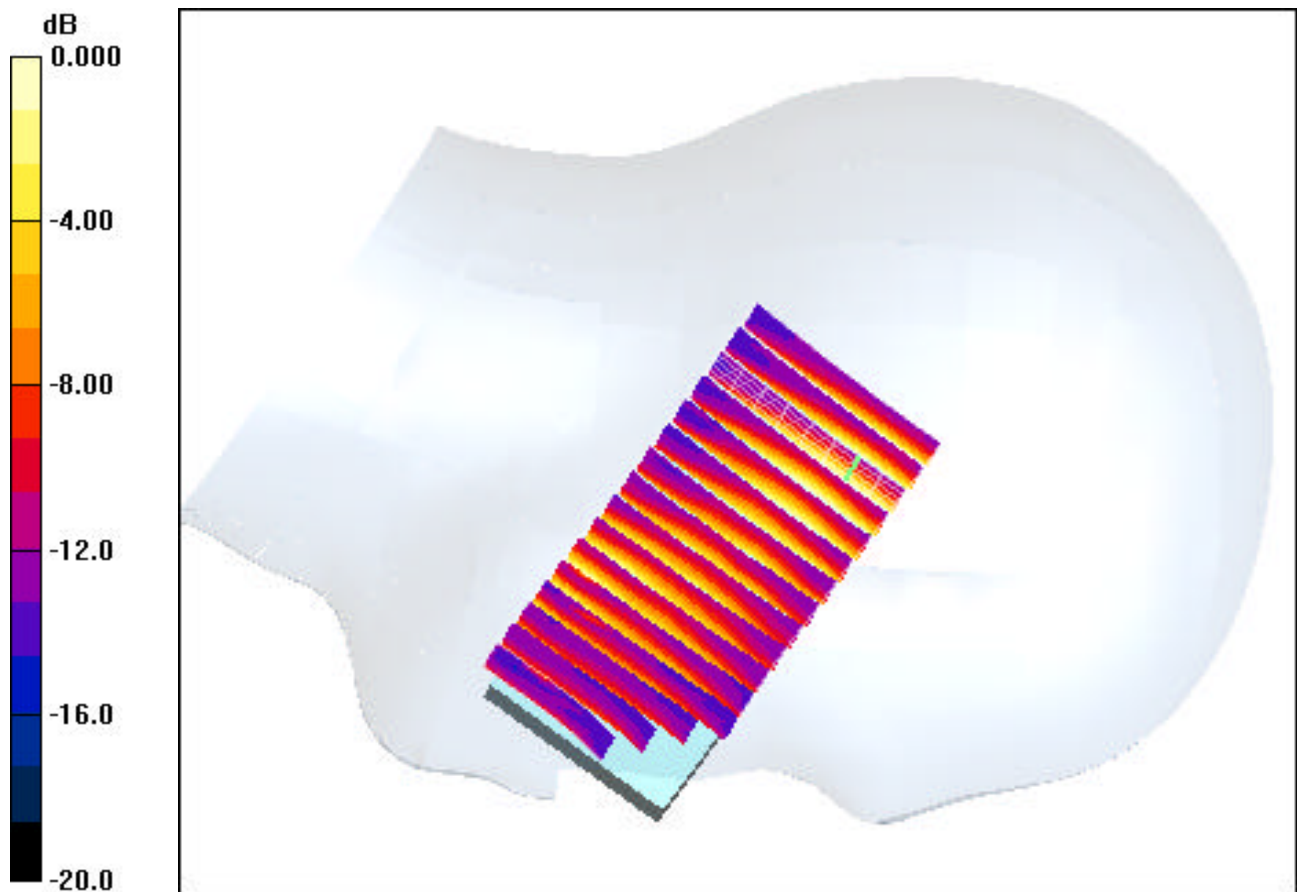

0 dB = 0.237mW/g

PCTEST ENGINEERING LABORATORY, INC.

DASY4 Multi Band Evaluation with Volume scan

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E


Body SAR, Back side, CDMA + IEEE 802.11b + Bluetooth

Probe: EX3DV4 - SN3561; Calibrated: 11/23/2006
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 10/16/2006
Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197
Measurement SW: DASY4, V4.7 Build 53

Multi Band Result:

SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.910 mW/g

Maximum value of SAR (measured) = 1.33 mW/g

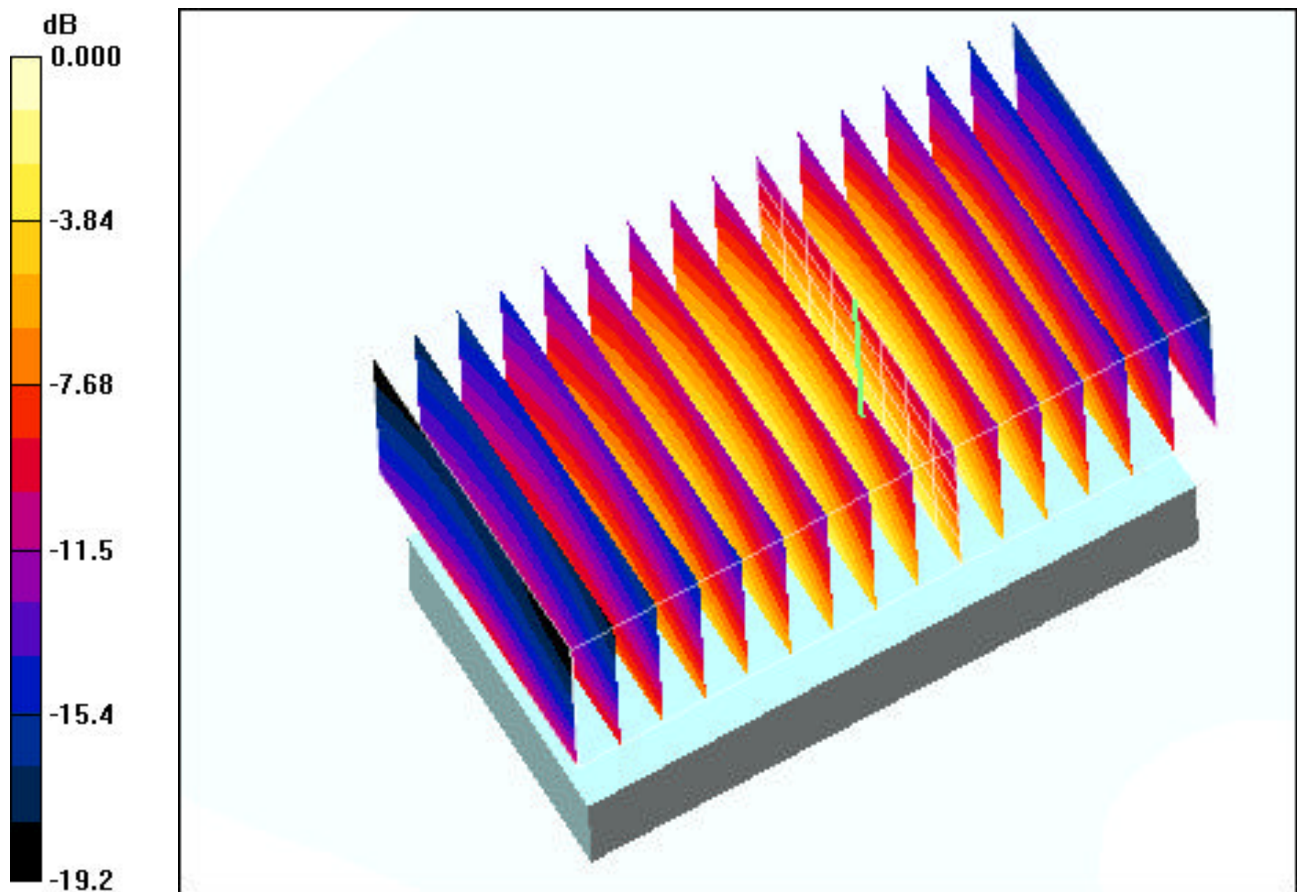

0 dB = 1.33mW/g

PCTEST ENGINEERING LABORATORY, INC.

DASY4 Multi Band Evaluation with Volume scan

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E


Body SAR, Back side, PCS + IEEE 802.11b + Bluetooth

Probe: EX3DV4 - SN3561; Calibrated: 11/23/2006
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 10/16/2006
Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197
Measurement SW: DASY4, V4.7 Build 53

Multi Band Result:

SAR(1 g) = 0.286 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.300 mW/g

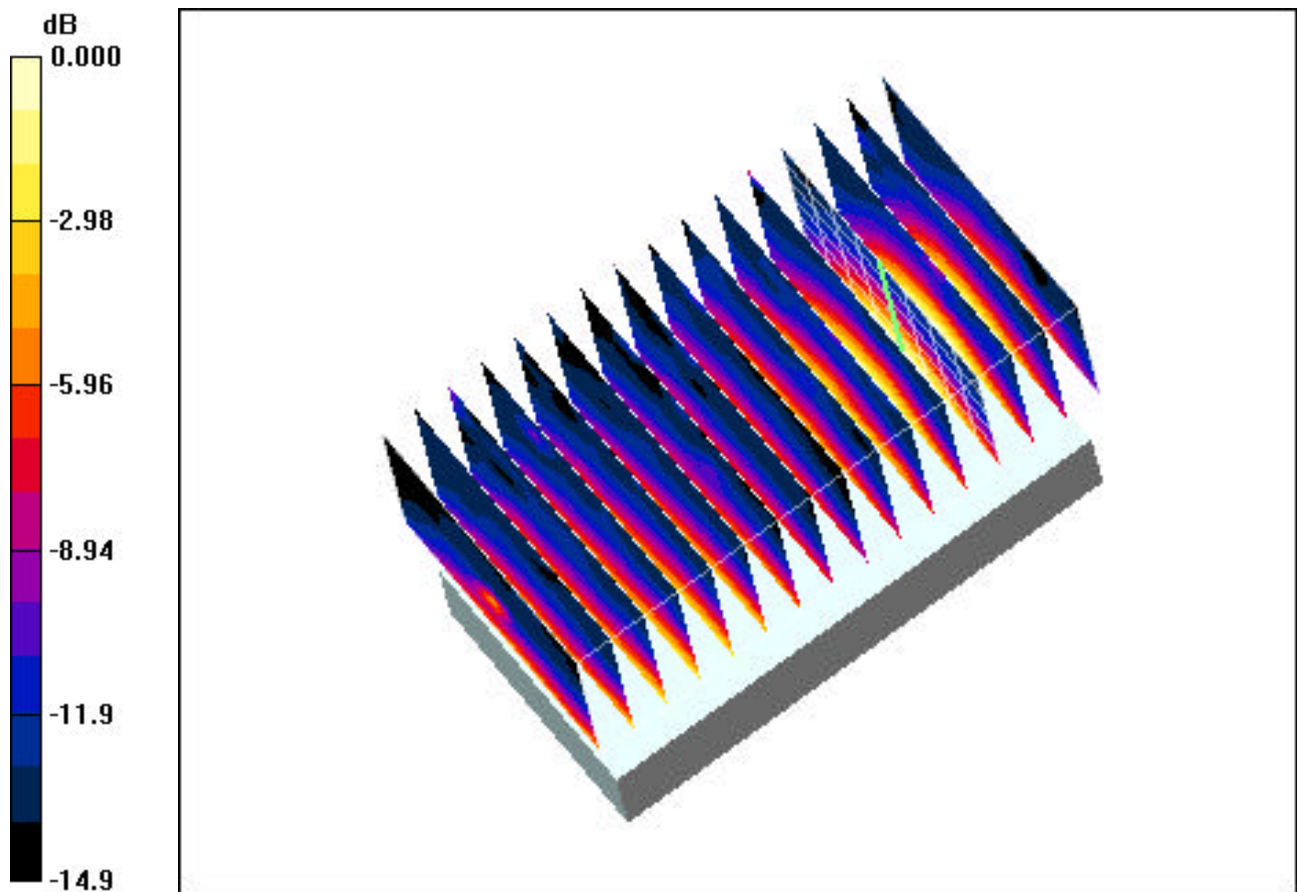

0 dB = 0.300mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E; Conducted Power: 25.5 dBm

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ($\sigma = 0.90$ mho/m, $\epsilon_r = 41.90$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 01-18-2007; Ambient Temp: 23.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3561; ConvF(7.94, 7.94, 7.94); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: CDMA, Right Head, Touch, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.6 V/m

Peak SAR (extrapolated) = 0.930 W/kg

SAR(1 g) = 0.728 mW/g; SAR(10 g) = 0.528 mW/g

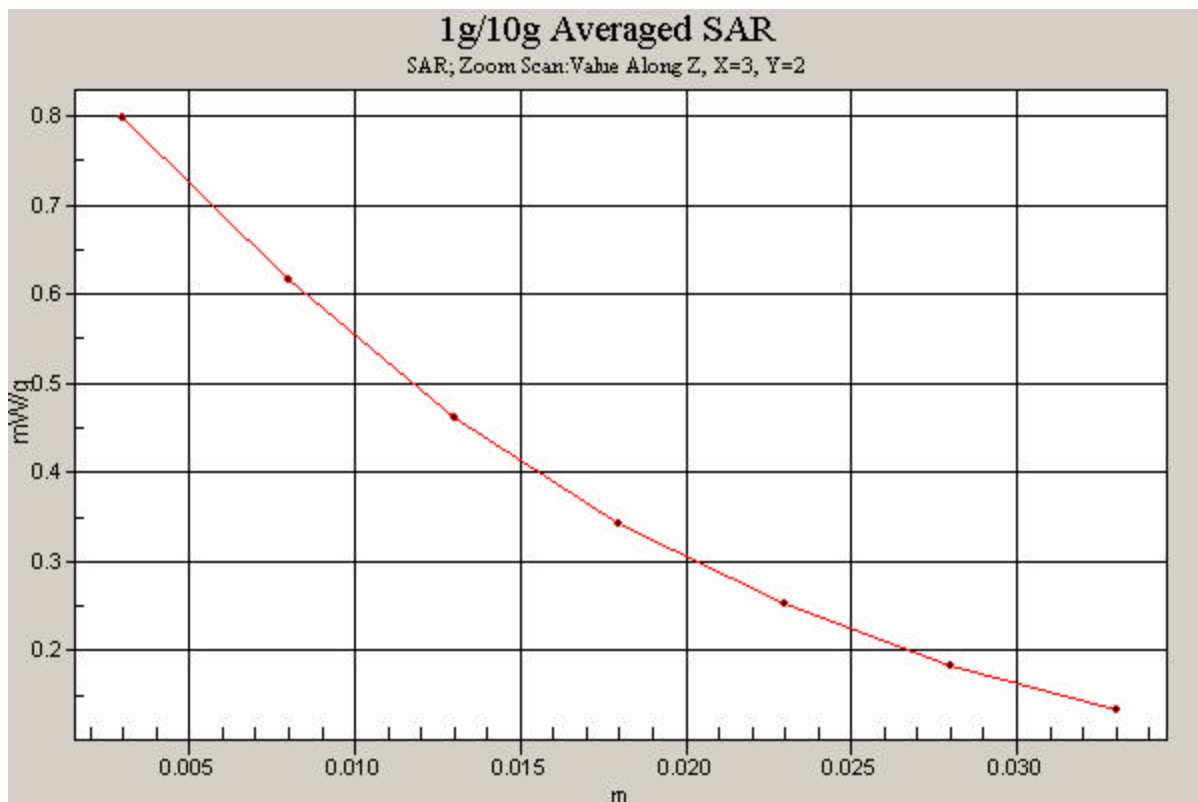

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E; Conducted Power: 25.5 dBm

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ($\sigma = 1.45$ mho/m, $\epsilon_r = 39.092$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

Test Date: 01-18-2007; Ambient Temp: 23.8°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3561; ConvF(6.99, 6.99, 6.99); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: PCS, Right Head, Touch, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.6 V/m

Peak SAR (extrapolated) = 0.394 W/kg

SAR(1 g) = 0.251 mW/g; SAR(10 g) = 0.151 mW/g

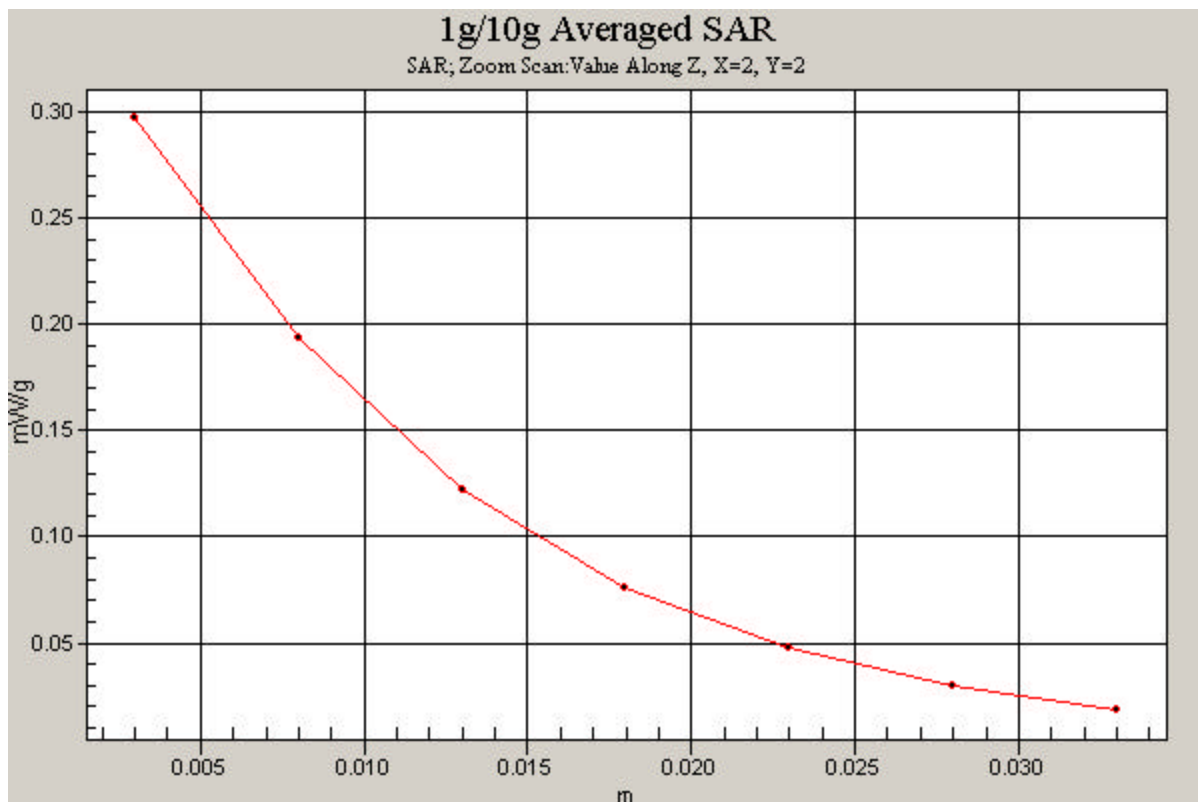

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Brain ($\sigma = 1.83$ mho/m, $\epsilon_r = 40.12$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 01-22-2007; Ambient Temp: 22.8°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3561; ConvF(6.32, 6.32, 6.32); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: IEEE 802.11b, Left Head, Touch, Low.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.16 V/m

Peak SAR (extrapolated) = 0.279 W/kg

SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.073 mW/g

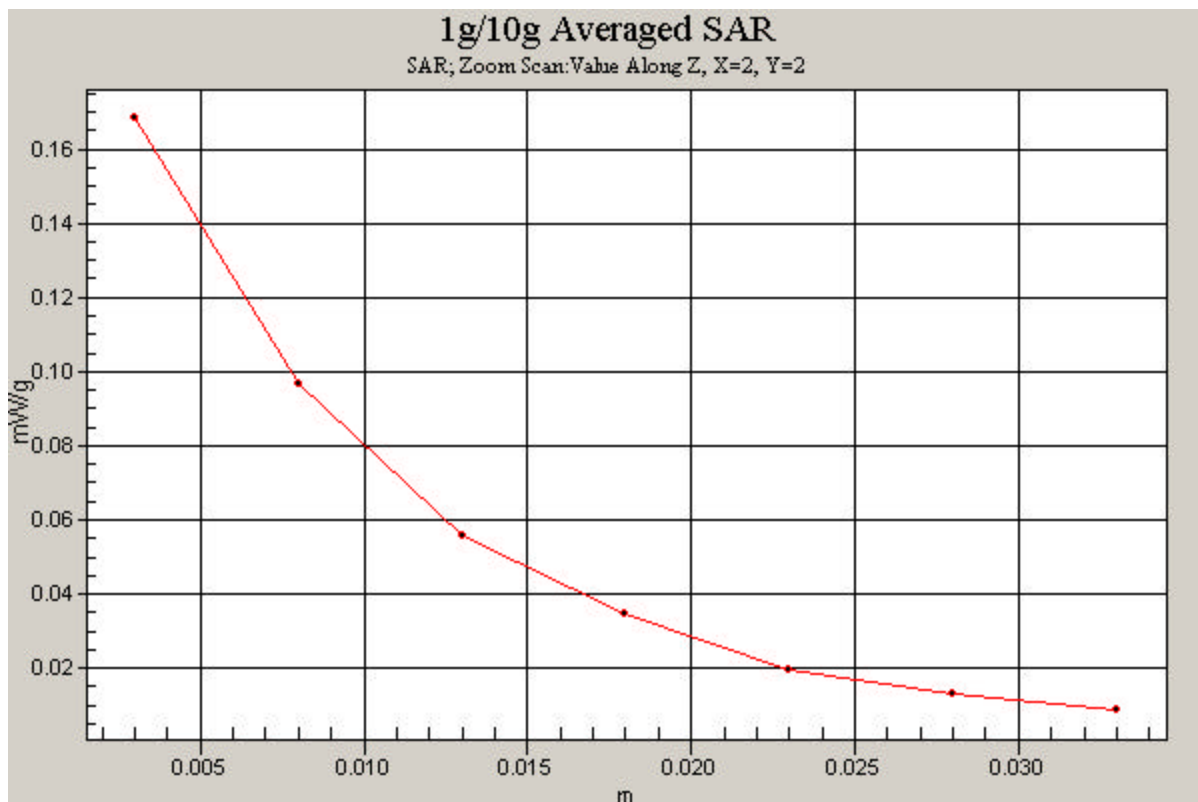

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E; Conducted Power: 25.5 dBm

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Muscle ($\sigma = 0.96$ mho/m, $\epsilon_r = 53.83$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-18-2007; Ambient Temp: 22.4°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN3561; ConvF(7.92, 7.92, 7.92); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: CDMA, Body SAR, Back side, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.6 V/m

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.888 mW/g

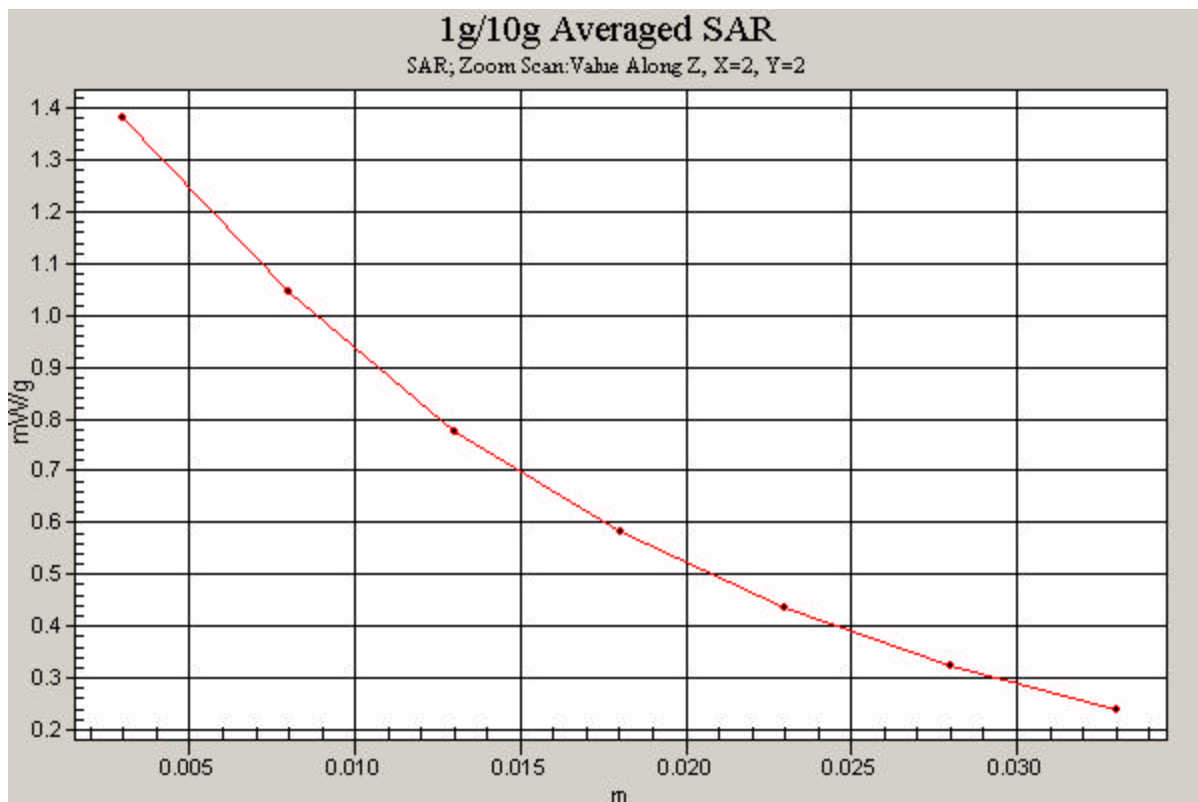

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E; Conducted Power: 25.5 dBm

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Muscle ($\sigma = 1.54$ mho/m, $\epsilon_r = 53.68$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-19-2007; Ambient Temp: 22.2°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3561; ConvF(6.47, 6.47, 6.47); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: PCS, Body SAR, Back side, Mid.ch, Standard Battery


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.8 V/m

Peak SAR (extrapolated) = 0.444 W/kg

SAR(1 g) = 0.262 mW/g; SAR(10 g) = 0.144 mW/g

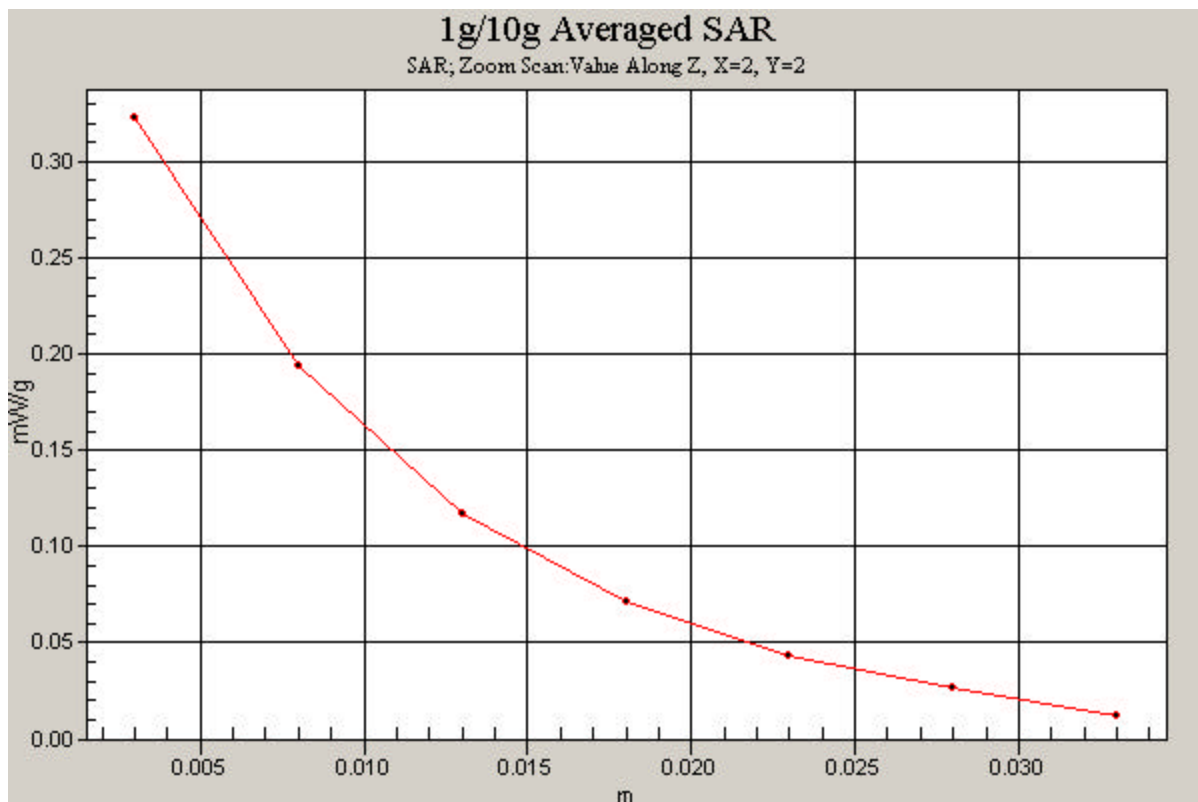

PCTEST ENGINEERING LABORATORY, INC.

DUT: SCH-i760; Type: CDMA Dual Band Phone; Serial: FD-249-E

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Muscle ($\sigma = 1.97$ mho/m, $\epsilon_r = 51.60$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-19-2007; Ambient Temp: 23.2°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3561; ConvF(6.33, 6.33, 6.33); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: IEEE 802.11b, Body SAR, Back side, Low.ch, Standard Battery

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.24 V/m

Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.117 mW/g; SAR(10 g) = 0.065 mW/g

