PCTEST Engineering Laboratory, Inc.

6660-B Dobbin Road · Columbia, MD 21045 · U.S.A.
TEL (410) 290-6652 · FAX (410) 290-6654
http://www.pctestlab.com



CERTIFICATE OF COMPLIANCE
FCC Part 24 & 22 Certification

SAMSUNG ELECTRONICS CO., LTD.
3351 Michelson Drive, Suite 290
Irvine, CA 92612

Dates of Tests: June 1-3 & 6-7, 2005
Test Report S/N: 0505240387
Test Site: PCTEST Lab, Columbia MD

FCC ID	**A3LSCHI830**
APPLICANT	**SAMSUNG ELECTRONICS CO., LTD.**

Classification:	**Licensed Portable Transmitter Held to Ear (PCE)**
FCC Rule Part(s):	**§24(E), §22(H); §2**
EUT Type:	**Dual-Band CDMA Phone**
Model:	***SCH-i830***
Tx Frequency Range:	**824.70 – 848.31MHz (CDMA) / 1851.25MHz – 1908.75MHz (PCS CDMA)**
Rx Frequency Range:	**869.70 – 893.31MHz (CDMA) / 1931.25MHz – 1988.75MHz (PCS CDMA)**
Max. RF Output Power:	**0.355 W ERP CDMA (25.503 dBm) / 25.5 dBm Conducted** **0.283 W EIRP PCS CDMA (24.511 dBm) / 24.5 dBm Conducted**
Max. SAR Measurement:	**0.785 W/kg CDMA Head SAR; 0.552 W/kg CDMA Body SAR;** **1.080 W/kg PCS CDMA Head SAR; 0.413 W/kg PCS CDMA Body SAR**
Emission Designator(s):	**1M25F9W (CDMA)**
Test Device Serial No.	**Identical Prototype [S/N: #3F0FFA1A]**

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant Conditions: Power output listed is ERP for Part 22 and EIRP for Part 24. SAR compliance for body-worn operating configuration is limited to the specific holster/belt clip tested for this filing. End-users must be informed of the body-worn operating requirements for satisfying RF exposure compliance.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

Randy Ortanez
President

© 2005 PCTEST ENGINEERING LABORATORY, INC.

TABLE OF CONTENTS

ATTACHMENT A: COVER LETTER(S)

ATTACHMENT B: TEST REPORT

ATTACHMENT C: ATTESTATION STATEMENT(S)

1.1 SCOPE	3
2.1 INTRODUCTION	4
3.1 DESCRIPTION OF TESTS	5-8
4.1 EFFECTIVE RADIATED POWER OUTPUT	9
5.1 EQUIVALENT ISOTROPIC RADIATED POWER	10
6.1 RADIATED MEASUREMENTS	11-16
7.1 FREQUENCY STABILITY	17-20
8.1 PLOTS OF EMISSIONS	21
9.1 LIST OF TEST EQUIPMENT	22
10.1 SAMPLE CALCULATIONS	23
11.1 CONCLUSION	24

ATTACHMENT D: TEST PLOTS

ATTACHMENT E: TEST SETUP PHOTOGRAPHS

ATTACHMENT F: EXTERNAL PHOTOGRAPHS

ATTACHMENT G: INTERNAL PHOTOGRAPHS

ATTACHMENT H: SAR MEASUREMENT REPORT

ATTACHMENT I: SAR TEST DATA

ATTACHMENT J: SAR TEST SETUP PHOTOGRAPHS

ATTACHMENT K: DIPOLE VALIDATION

ATTACHMENT L: PROBE CALIBRATION

ATTACHMENT M: COPY OF GRANT

© 2005 PCTEST ENGINEERING LABORATORY, INC.



MEASUREMENT REPORT



1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

§2.1033 General Information

Applicant Name: SAMSUNG ELECTRONICS CO., LTD.
Address: 3351 Michelson Drive, Suite 290
Irvine, CA 92612

- FCC ID: **A3LSCHI830**
- Quantity: Quantity production is planned
- Emission Designators: 1M25F9W
- Tx Freq. Range: 824.70 – 848.31 MHz (CDMA)
  1851.25 – 1908.75 MHz (PCS CDMA)
- Rx Freq. Range: 869.70 – 893.31 MHz (CDMA)
  1931.25 – 1988.75 MHz (PCS CDMA)
- Max. Power Rating: 0.355 W ERP CDMA (25.503 dBm) / 25.5 dBm Conducted
  0.283 W EIRP PCS CDMA (24.511 dBm) / 24.5 dBm Conducted
- FCC Classification(s): Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type: Dual-Band CDMA Phone
- Modulation(s): CDMA
- Frequency Tolerance: ± 0.00025% (2.5 ppm)
- FCC Rule Part(s): § 24(E), §22(H)
- Dates of Tests: June 1-3 & 6-7, 2005
- Place of Tests: PCTEST Lab, Columbia, MD U.S.A.
- Test Report S/N: 0505240387

© 2005 PCTEST ENGINEERING LABORATORY, INC.

2.1 INTRODUCTION

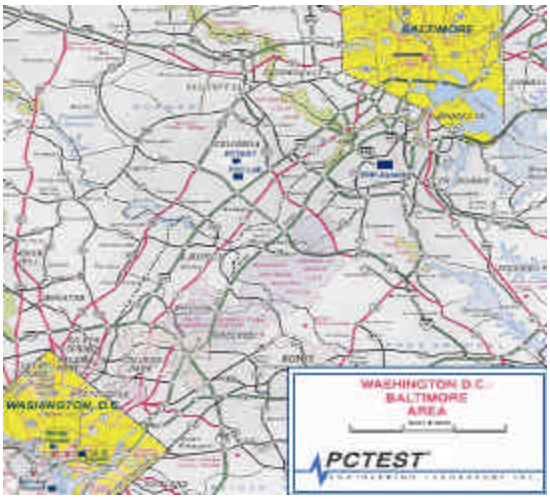

Figure 1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.

These measurement tests were conducted at ***PCTEST Engineering Laboratory, Inc.*** facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.

Measurement Procedure

The radiated and spurious measurements were made outdoors at a 3-meter test range (see Figure2). The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

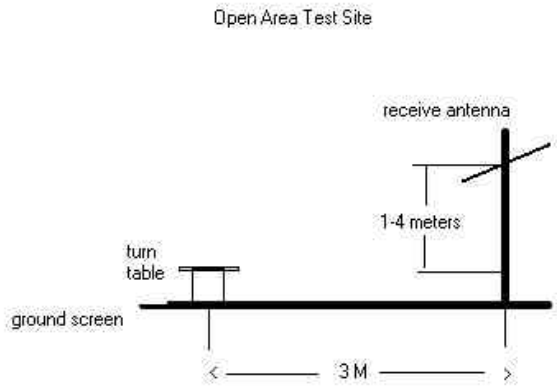

Figure 2. Diagram of 3-meter outdoor test range

© 2005 PCTEST ENGINEERING LABORATORY, INC.

3.1 DESCRIPTION OF TESTS

3.2 Occupied Bandwidth Emission Limits

(a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB.

(b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

(c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

(d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

3.3 Cellular - Base Frequency Blocks

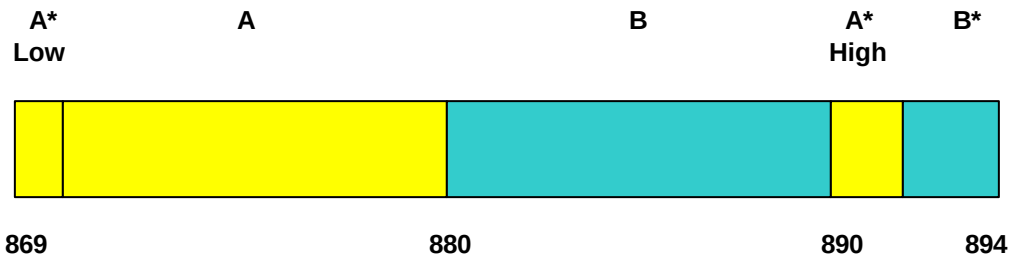

BLOCK 1: 869 – 880 MHz (A* Low + A)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 4: 891.5 – 894 MHz (B*)

3.4 Cellular - Mobile Frequency Blocks

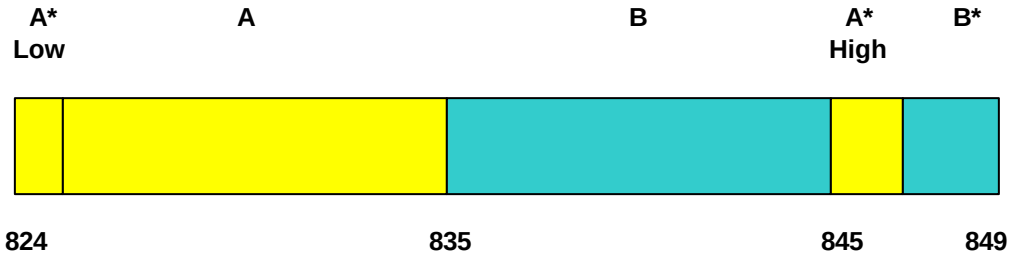

BLOCK 1: 824 – 835 MHz (A* Low + A)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 3: 845 – 846.5 MHz (A* High)

BLOCK 4: 846.5 – 849 MHz (B*)

© 2005 PCTEST ENGINEERING LABORATORY, INC.

3.1 DESCRIPTION OF TESTS (CONTINUED)

3.5 PCS - Base Frequency Blocks

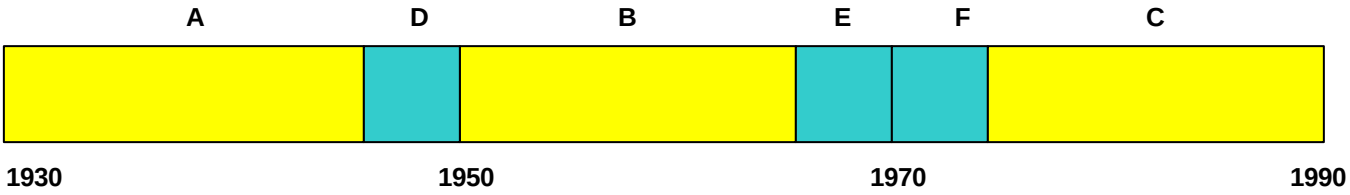

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 2: 1945 – 1950 MHz (D)

BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 5: 1970 – 1975 MHz (F)

BLOCK 6: 1975 – 1990 MHz (C)

3.6 PCS - Mobile Frequency Blocks

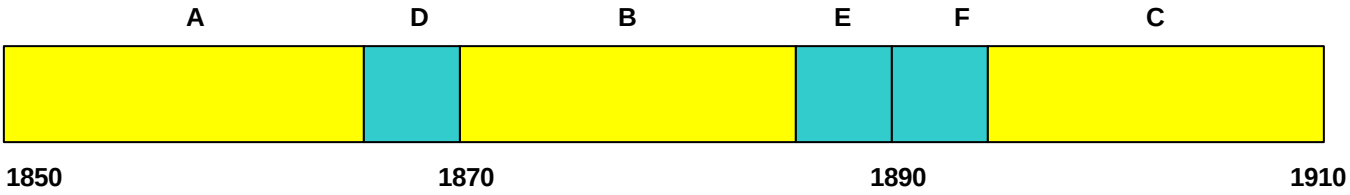

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 4: 1885 – 1890 MHz (E)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 6: 1895 – 1910 MHz (C)

© 2005 PCTEST ENGINEERING LABORATORY, INC.

3.7 Spurious and Harmonic Emissions at Antenna Terminal

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to 10 GHz. The transmitter is modulated with a 2500Hz tone at a level of 16dB greater than that required to provided 50% modulation.

At the input terminals of the spectrum analyzer, an isolator (RF circulator with on port terminated with 50 ohms) and an 870 MHz to 890 MHz bandpass filter is connected between the test transceiver (for conducted tests) or the receive antenna (for radiated tests) and the analyzer. The rejection of the bandpass filter to signals in the 825 – 845 MHz range is adequate to limit the transmit energy from the test transceiver which appears to a level which will allow the analyzer to measure signals less than –90dBm. Calibration of the test receiver is performed in the 870 – 890 MHz range to insure accuracy to allow variation in the bandpass filter insertion loss to be calibrated.

3.8 Frequencies

At the input terminals of the spectrum analyzer, an isolator (RF pad) and an high-pass filter are connected between the test transceiver (for conducted tests) or the receive antenna (for radiated tests) and the analyzer. The high-pass filter (signals below 1.6 GHz) is to limit the fundamental frequency from interfering with the measurement of low-level spurious and harmonic emissions and to ensure that the preamplifier is not saturated.

3.9 Radiation Spurious and Harmonic Emissions

Radiation and harmonic emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

© 2005 PCTEST ENGINEERING LABORATORY, INC.

4.0 Frequency Stability/Temperature Variation.

The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from -30°C to +60°C using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025 (±2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (22°C to 25°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (usually 14-16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying power to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE: The EUT is tested down to the battery endpoint.

© 2005 PCTEST ENGINEERING LABORATORY, INC.

5.1 Test Data

5.2 Effective Radiated Power Output

A. POWER: **High (CDMA Mode)**

Freq. Tuned (MHz)	REF. LEVEL (dBm)	POL (H/V)	ERP (W)	ERP (dBm)	BATTERY
824.70	-15.770	H	0.355	25.503	Standard
835.89	-16.200	H	0.334	25.233	Standard
848.31	-16.150	H	0.349	25.433	Standard
824.70	-15.782	H	0.354	25.491	Extended

Note: Standard and Extended batteries are options for this phone

NOTES:

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

© 2005 PCTEST ENGINEERING LABORATORY, INC.

6.1 Test Data

6.2 Equivalent Isotropic Radiated Power (E.I.R.P.)

Radiated measurements at 3 meters

Supply Voltage: 3.7 VDC

Modulation: PCS CDMA

FREQ. (MHz)	REF. LEVEL (dBm)	POL (H/V)	Azimuth (o angle)	EIRP (dBm)	EIRP (W)	Battery
1851.25	-18.570	H	95	24.511	0.283	Standard
1880.00	-18.900	H	95	24.351	0.272	Standard
1908.75	-18.980	H	95	24.441	0.278	Standard
1851.25	-18.750	H	95	24.501	0.282	Extended

Note: Standard and Extended batteries are options for this phone

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

© 2005 PCTEST ENGINEERING LABORATORY, INC.

7.1 Test Data

7.2 CDMA Cellular Radiated Measurements

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.70 MHz
CHANNEL: 1013
MEASURED OUTPUT POWER: 25.503 dBm = 0.355 W
MODULATION SIGNAL: FM (Internal)
DISTANCE: 3 meters
LIMIT: 43 + 10 $\log_{10}$ (W) = 38.50 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1649.40	-41.68	6.10	-35.58	V	61.1
2474.10	-54.28	6.70	-47.58	V	73.1
3298.80	-56.48	6.80	-49.68	H	75.2
4123.50	-60.68	6.50	-54.18	V	79.7
4948.20	-58.58	7.00	-51.58	H	77.1

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

© 2005 PCTEST ENGINEERING LABORATORY, INC.

7.1 Test Data (Continued)

7.3 CDMA Cellular Radiated Measurements

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.49 MHz
CHANNEL: 383
MEASURED OUTPUT POWER: 25.503 dBm = 0.355 W
MODULATION SIGNAL: FM (Internal)
DISTANCE: 3 meters
LIMIT: 43 + 10 $\log_{10}$ (W) = 38.50 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1672.98	-52.38	6.10	-46.28	H	71.8
2509.47	-54.58	6.70	-47.88	H	73.4
3345.96	-59.48	6.80	-52.68	V	78.2
4182.45	-57.58	6.50	-51.08	H	76.6
5018.94	-57.28	7.00	-50.28	H	75.8

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

© 2005 PCTEST ENGINEERING LABORATORY, INC.

7.1 Test Data (Continued)

7.4 CDMA Cellular Radiated Measurements

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.31 MHz
CHANNEL: 777
MEASURED OUTPUT POWER: 25.503 dBm = 0.355 W
MODULATION SIGNAL: FM (Internal)
DISTANCE: 3 meters
LIMIT: 43 + 10 $\log_{10}$ (W) = 38.50 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1696.62	-45.48	6.10	-39.38	H	64.9
2544.93	-51.28	6.70	-44.58	V	70.1
3393.24	-63.28	6.80	-56.48	V	82.0
4241.55	-53.28	6.50	-46.78	H	72.3
5089.86	-54.58	7.00	-47.58	H	73.1

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

© 2005 PCTEST ENGINEERING LABORATORY, INC.

7.1 Test Data (Continued)

7.5 CDMA PCS Radiated Measurements

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1851.25 MHz
CHANNEL: 25
MEASURED OUTPUT POWER: 24.511 dBm = 0.283 W
MODULATION SIGNAL: CDMA (Internal)
DISTANCE: 3 meters
LIMIT: 43 + 10 $\log_{10}$ (W) = 37.52 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3702.50	-50.88	6.10	-44.78	H	69.3
5553.75	-60.78	6.70	-54.08	H	78.6
7405.00	-60.98	6.80	-54.18	H	78.7
9256.25	-53.38	6.50	-46.88	V	71.4
11107.50	-56.78	7.00	-49.78	V	74.3

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

© 2005 PCTEST ENGINEERING LABORATORY, INC.

7.1 Test Data (Continued)

7.6 CDMA PCS Radiated Measurements

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz
CHANNEL: 600
MEASURED OUTPUT POWER: 24.511 dBm = 0.283 W
MODULATION SIGNAL: CDMA (Internal)
DISTANCE: 3 meters
LIMIT: 43 + 10 $\log_{10}$ (W) = 37.52 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-40.78	6.10	-34.68	V	59.2
5640.00	-45.58	6.70	-38.88	V	63.4
7520.00	-53.48	6.80	-46.68	H	71.2
9400.00	-49.28	6.50	-42.78	H	67.3
11280.00	-47.78	7.00	-40.78	H	65.3

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

© 2005 PCTEST ENGINEERING LABORATORY, INC.

7.1 Test Data (Continued)

7.7 CDMA PCS Radiated Measurements

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1908.75 MHz
CHANNEL: 1175
MEASURED OUTPUT POWER: 24.511 dBm = 0.283 W
MODULATION SIGNAL: CDMA (Internal)
DISTANCE: 3 meters
LIMIT: 43 + 10 $\log_{10}$ (W) = 37.52 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3817.50	-34.88	6.10	-28.78	H	53.3
5726.25	-52.28	6.70	-45.58	V	70.1
7635.00	-53.48	6.80	-46.68	H	71.2
9543.75	-49.78	6.50	-43.28	H	67.8
11452.50	-48.68	7.00	-41.68	V	66.2

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

© 2005 PCTEST ENGINEERING LABORATORY, INC.

8.1 Test Data

8.2 FREQUENCY STABILITY (CDMA)

OPERATING FREQUENCY: 835,890,006 Hz

CHANNEL: 363

REFERENCE VOLTAGE: 3.7 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (ºC)	FREQ. (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	835,890,006	0.00	0.000000
100 %		- 30	835,890,065	-58.51	-0.000007
100 %		- 20	835,890,031	-25.08	-0.000003
100 %		- 10	835,889,906	100.31	0.000012
100 %		0	835,889,864	142.10	0.000017
100 %		+ 10	835,889,973	33.44	0.000004
100 %		+ 20	835,890,006	0.00	0.000000
100 %		+ 25	835,889,956	50.15	0.000006
100 %		+ 30	835,889,939	66.87	0.000008
100 %		+ 40	835,889,964	41.79	0.000005
100 %		+ 50	835,889,956	50.15	0.000006
100 %		+ 60	835,889,914	91.95	0.000011
85 %	3.17	+ 20	835,890,006	0.00	0.000000
115 %	4.26	+ 20	835,890,006	0.00	0.000000
BATT. ENDPOINT	3.08	+ 20	835,890,006	0.00	0.000000

© 2005 PCTEST ENGINEERING LABORATORY, INC.

8.1 Test Data (Continued)

8.3 FREQUENCY STABILITY (CDMA)

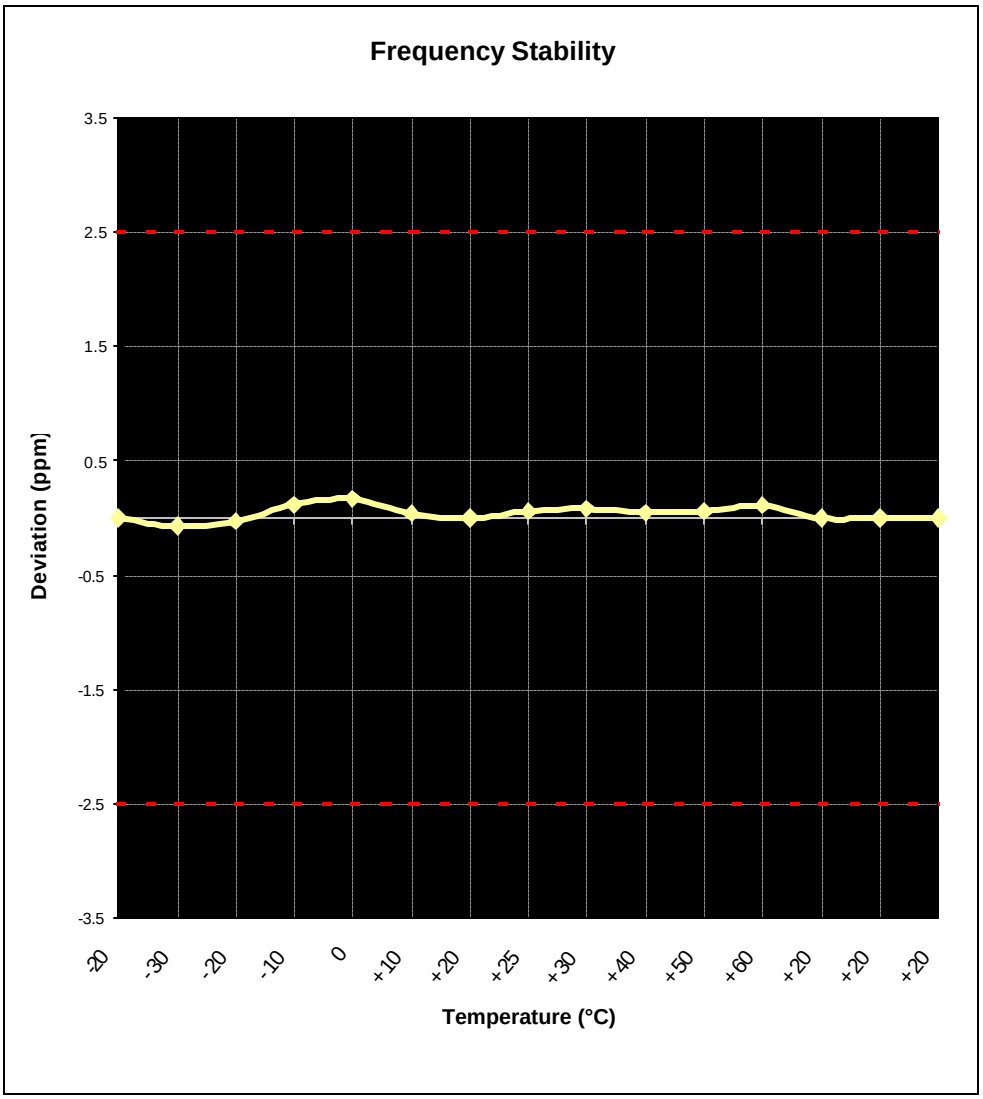

© 2005 PCTEST ENGINEERING LABORATORY, INC.

8.1 Test Data

8.4 FREQUENCY STABILITY (PCS CDMA)

OPERATING FREQUENCY: 1,880,000,003 Hz

CHANNEL: 600

REFERENCE VOLTAGE: 3.7 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (ºC)	FREQ. (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	1,880,000,003	0.00	0.000000
100 %		- 30	1,880,000,078	-75.20	-0.000004
100 %		- 20	1,880,000,116	-112.80	-0.000006
100 %		- 10	1,879,999,759	244.40	0.000013
100 %		0	1,879,999,947	56.40	0.000003
100 %		+ 10	1,879,999,853	150.40	0.000008
100 %		+ 20	1,880,000,003	0.00	0.000000
100 %		+ 25	1,879,999,815	188.00	0.000010
100 %		+ 30	1,879,999,890	112.80	0.000006
100 %		+ 40	1,879,999,815	188.00	0.000010
100 %		+ 50	1,880,000,116	-112.80	-0.000006
100 %		+ 60	1,880,000,097	-94.00	-0.000005
85 %	3.15	+ 20	1,880,000,003	0.00	0.000000
115 %	4.26	+ 20	1,880,000,003	0.00	0.000000
BATT. ENDPOINT	3.10	+ 20	1,880,000,003	0.00	0.000000

© 2005 PCTEST ENGINEERING LABORATORY, INC.

8.1 Test Data (Continued)

8.5 FREQUENCY STABILITY (PCS CDMA)

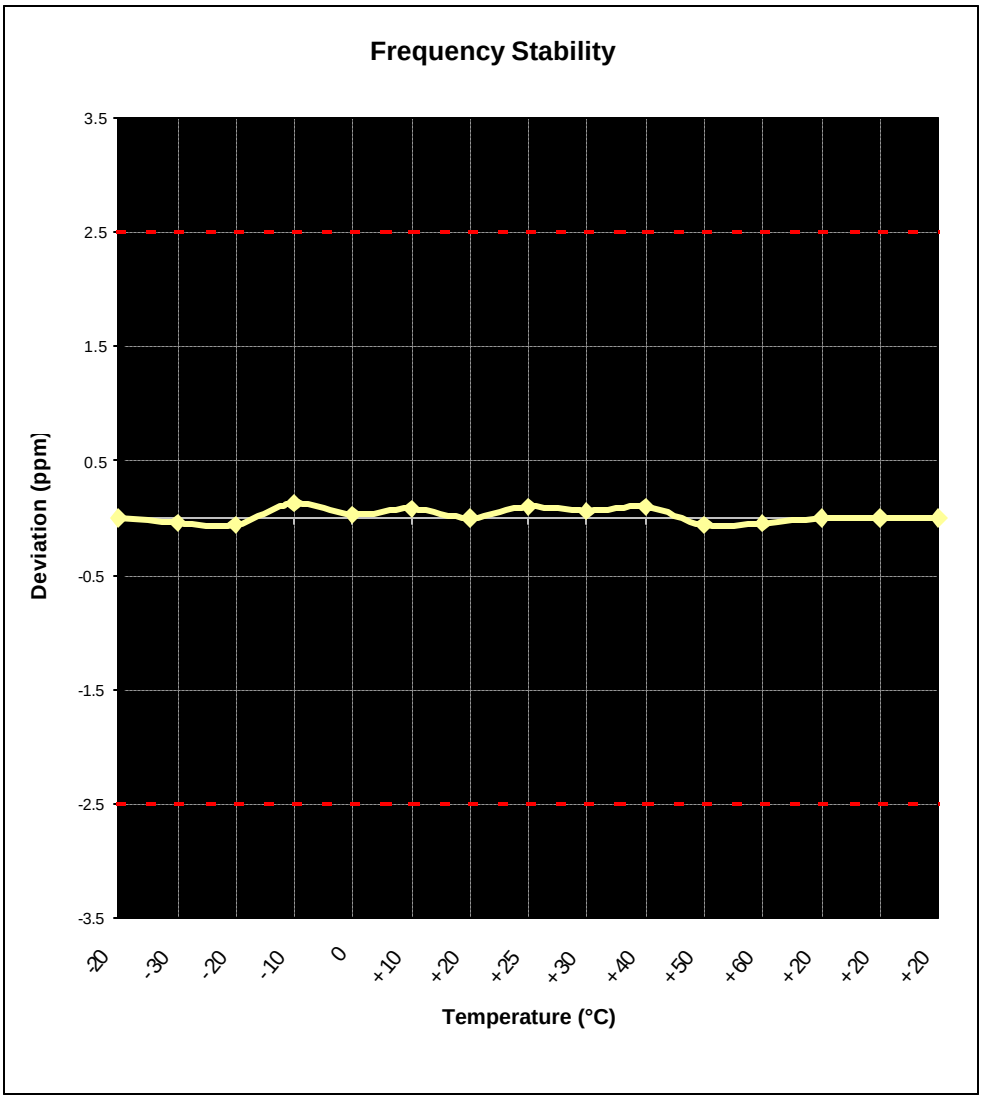

© 2005 PCTEST ENGINEERING LABORATORY, INC.

9.1 PLOT(S) OF EMISSIONS

(SEE ATTACHMENT C)

© 2005 PCTEST ENGINEERING LABORATORY, INC.

10.1 TEST EQUIPMENT

Type	Model	Cal. Due Date	S/N
Microwave Spectrum Analyzer	8566B (100Hz-22GHz) HP	08/15/05	3638A08713
Microwave Spectrum Analyzer	HP 8566B (100Hz-22GHz)	04/17/06	2542A11898
Spectrum Analyzer/Tracking Gen.	HP 8591A (100Hz-1.8GHz)	08/10/05	3144A02458
Signal Generator*	HP 8640B (500Hz-1GHz)	06/03/06	2232A19558
Signal Generator*	HP 8640B (500Hz-1GHz)	06/03/06	1851A09816
Signal Generator*	Rohde & Schwarz (0.1-1000MHz)	09/11/05	894215/012
Ailtech/Eaton Receiver	NM 37/57A-SL (30-1000MHz)	04/12/06	0792-032
Ailtech/Eaton Receiver	NM 37/57A (30-1000MHz)	03/11/06	0805-03334
Ailtech/Eaton Receiver	NM 17/27A (0.1-32MHz)	09/17/05	0608-03241
Quasi-Peak Adapter	HP 85650A	08/15/05	2043A00301
Ailtech/Eaton Adapter	CCA-7 CISPR/ANSI QP Adapter	03/11/06	0194-04082
Gigatronics Universal Power Meter	8657A		1835256
Gigatronics Power Sensor	80701A (0.05-18GHz)		1833460
Signal Generator	HP 8648D (9kHz-4GHz)		3613A00315
Amplifier Research	5S1G4 (5W, 800MHz-4.2GHz)		22322
Network Analyzer	HP 8753E (30kHz-3GHz)		JP38020182
Audio Analyzer	HP 8903B		3011A09025
Modulation Analyzer	HP 8901A		2432A03467
Power Meter	HP 437B		3125U24437
Power Sensor	HP 8482H (30µW-3W)		2237A02084
Harmonic/Flicker	Test System HP 6841A (IEC 555-2/3)		3531A00115
Broadband Amplifier (2)	HP 8447D		1145A00470, 1937A03348
Broadband Amplifier	HP 8447F		2443A03784
Horn Antenna	EMCO Model 3115 (1-18GHz)		9704-5182
Horn Antenna	EMCO Model 3115 (1-18GHz)		9205-3874
Horn Antenna	EMCO Model 3116 (18-40GHz)		9203-2178
Biconical Antenna (4)	Eaton 94455/Eaton 94455-1/Singer 94455-1/Compliance Design		1295, 1332, 0355
Log-Spiral Antenna (3)	Ailtech/Eaton 93490-1		0608, 1103, 1104
Roberts Dipoles	Compliance Design (1 set)		
Ailtech Dipoles	DM-105A (1 set)		33448-111
EMCO LISN (6)	3816/2		1079
Microwave Preamplifier 40dB	Gain HP 83017A (0.5-26.5GHz)		3123A00181
Microwave Cables	MicroCoax (1.0-26.5GHz)		
Ailtech/Eaton Receiver	NM37/57A-SL		0792-03271
Spectrum Analyzer	HP 8594A		3051A00187
Spectrum Analyzer (2)	HP 8591A		3034A01395, 3108A02053
Microwave Survey Meter	Holaday Model 1501 (2.450GHz)		80931
Digital Thermometer	Extech Instruments 421305		426966
Attenuator	HP 8495A (0-70dB) DC-4GHz		
Bi-Directional Coax Coupler	Narda 3020A (50-1000MHz)		
Shielded Screen Room	RF Lindgren Model 26-2/2-0		6710 (PCT270)
Shielded Semi-Anechoic Chamber	Ray Proof Model S81		R2437 (PCT278)
Enviromental Chamber	Associated Systems Model 1025 (Temperature/Humidity)		PCT285

* Calibration traceable to the National Institute of Standards and Technology (NIST).

© 2005 PCTEST ENGINEERING LABORATORY, INC.

11.1 SAMPLE CALCULATIONS

A. Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)
(Measured at the 99.75% power bandwidth)

B. Spurious Radiated Emission - PCS Band

Example: Channel 25 PCS Mode 2nd Harmonic (3702.50 MHz)

The receive analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3702.50 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80) = 50.3 dBc

© 2005 PCTEST ENGINEERING LABORATORY, INC.

12.1 CONCLUSION

The data collected shows that the **SAMSUNG ELECTRONICS CO., LTD. Dual-Band CDMA Phone FCC ID: A3LSCHI830** complies with all the requirements of Parts 2, 22, and 24 of the FCC rules.

© 2005 PCTEST ENGINEERING LABORATORY, INC.

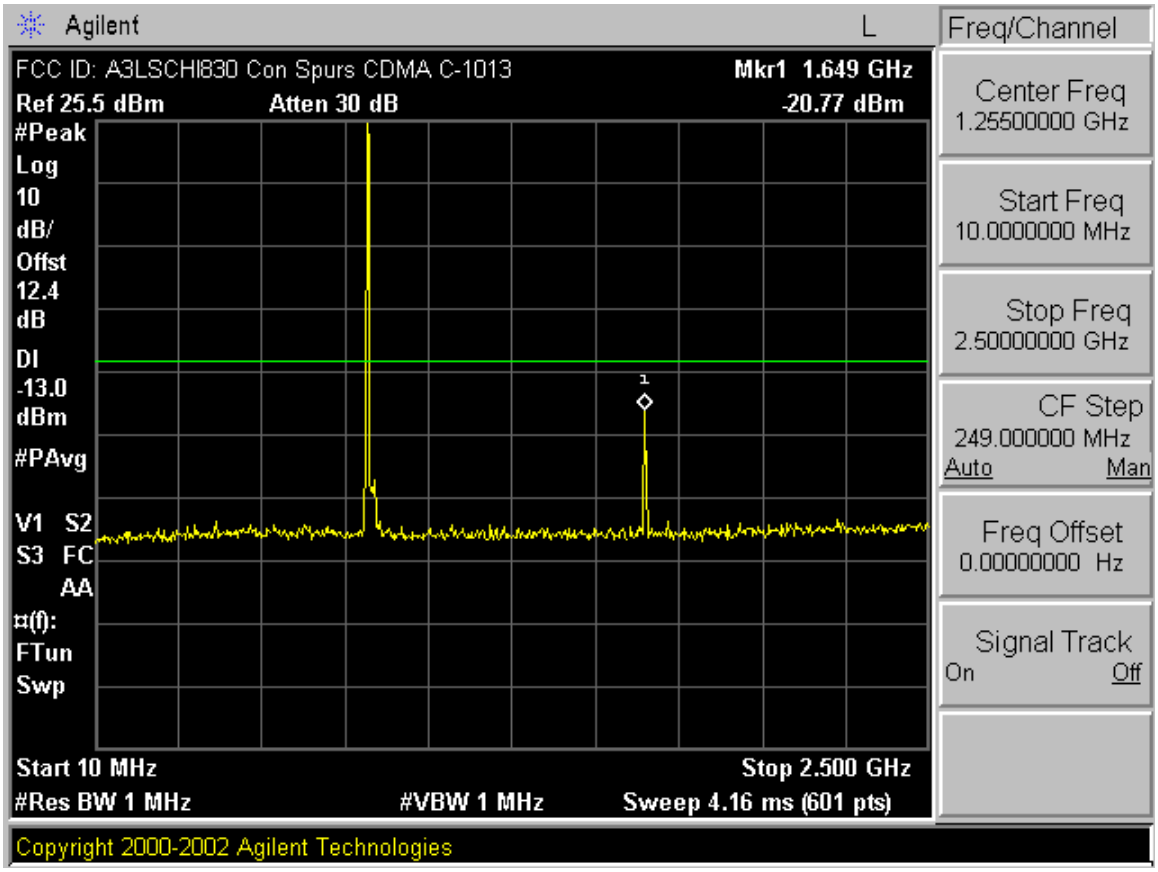
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Con Spurs CDMA C-1013
Mkr1 1.649 GHz
Ref 25.5 dBm
Atten 30 dB
-20.77 dBm
#Peak
Log
10
dB/
Offst
12.4
dB
Dl
-13.0
dBm
#PAvg
V1 S2
S3 FC
AA
¤(f):
FTun
Swp
Start 10 MHz
Stop 2.500 GHz
#Res BW 1 MHz
#VBW 1 MHz
Sweep 4.16 ms (601 pts)
Center Freq
1.25500000 GHz
Start Freq
10.0000000 MHz
Stop Freq
2.50000000 GHz
CF Step
249.000000 MHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies

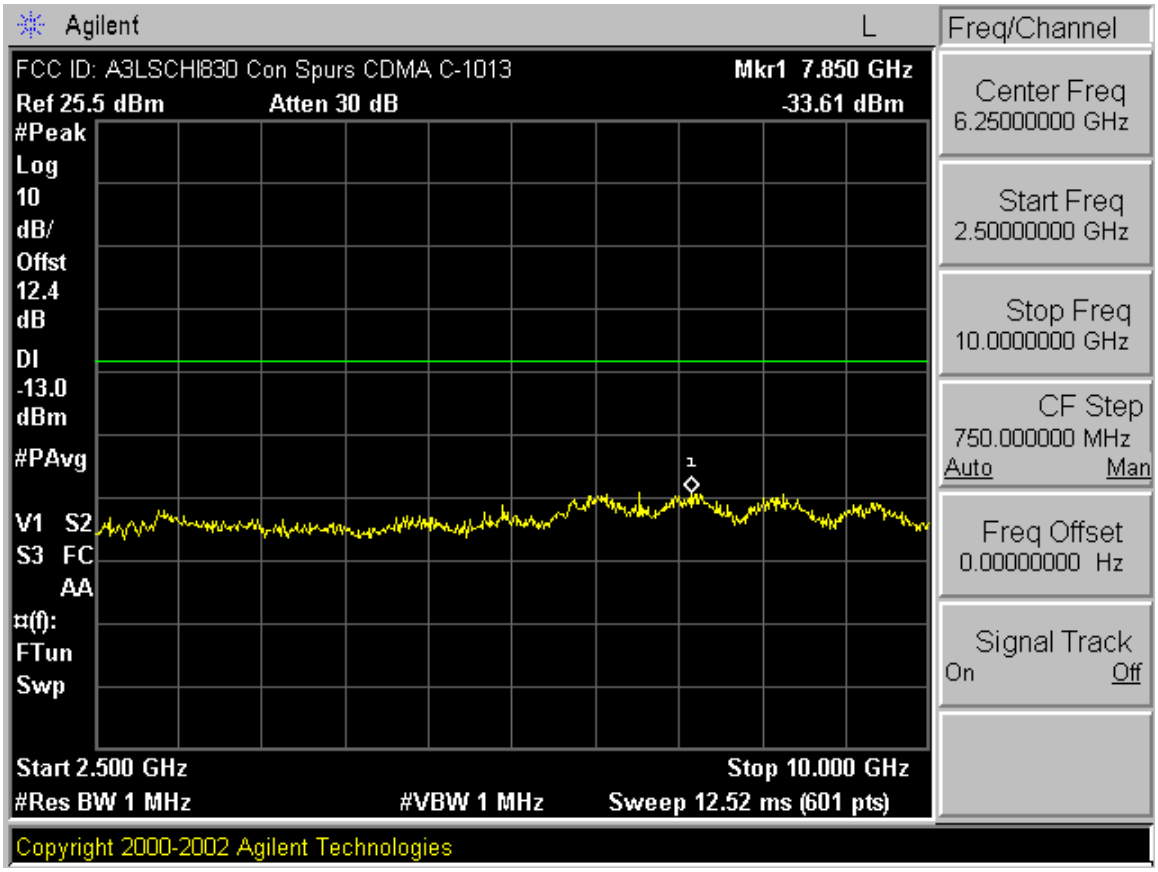
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Con Spurs CDMA C-1013
Mkr1 7.850 GHz
Ref 25.5 dBm
Atten 30 dB
-33.61 dBm
#Peak
Log
10
dB/
Offst
12.4
dB
Dl
-13.0
dBm
#PAvg
V1 S2
S3 FC
AA
¤(f):
FTun
Swp
Start 2.500 GHz
Stop 10.000 GHz
#Res BW 1 MHz
#VBW 1 MHz
Sweep 12.52 ms (601 pts)
Center Freq
6.25000000 GHz
Start Freq
2.50000000 GHz
Stop Freq
10.0000000 GHz
CF Step
750.000000 MHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies

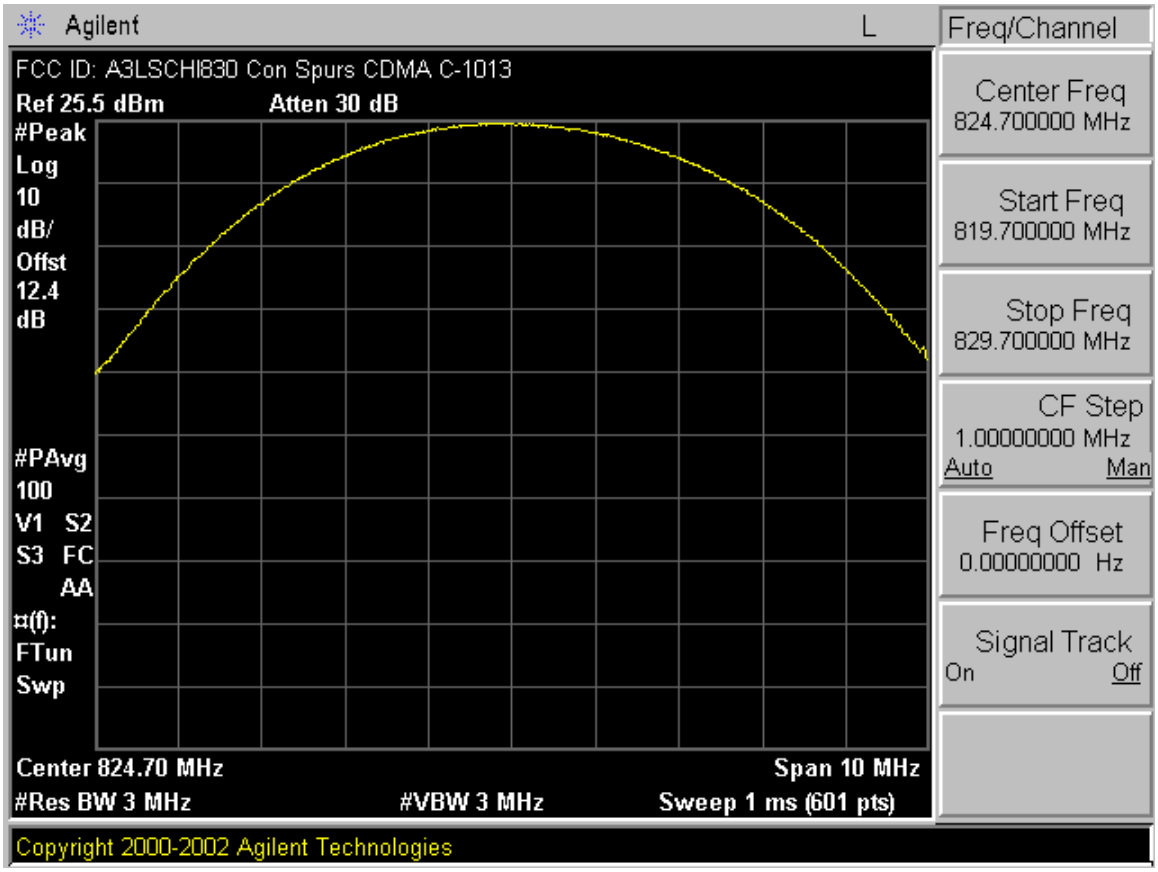
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Con Spurs CDMA C-1013
Ref 25.5 dBm
Atten 30 dB
#Peak
Log
10
dB/
Offst
12.4
dB
#PAvg
100
V1 S2
S3 FC
AA
¤(f):
FTun
Swp
Center 824.70 MHz
Span 10 MHz
#Res BW 3 MHz
#VBW 3 MHz
Sweep 1 ms (601 pts)
Center Freq
824.700000 MHz
Start Freq
819.700000 MHz
Stop Freq
829.700000 MHz
CF Step
1.00000000 MHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies

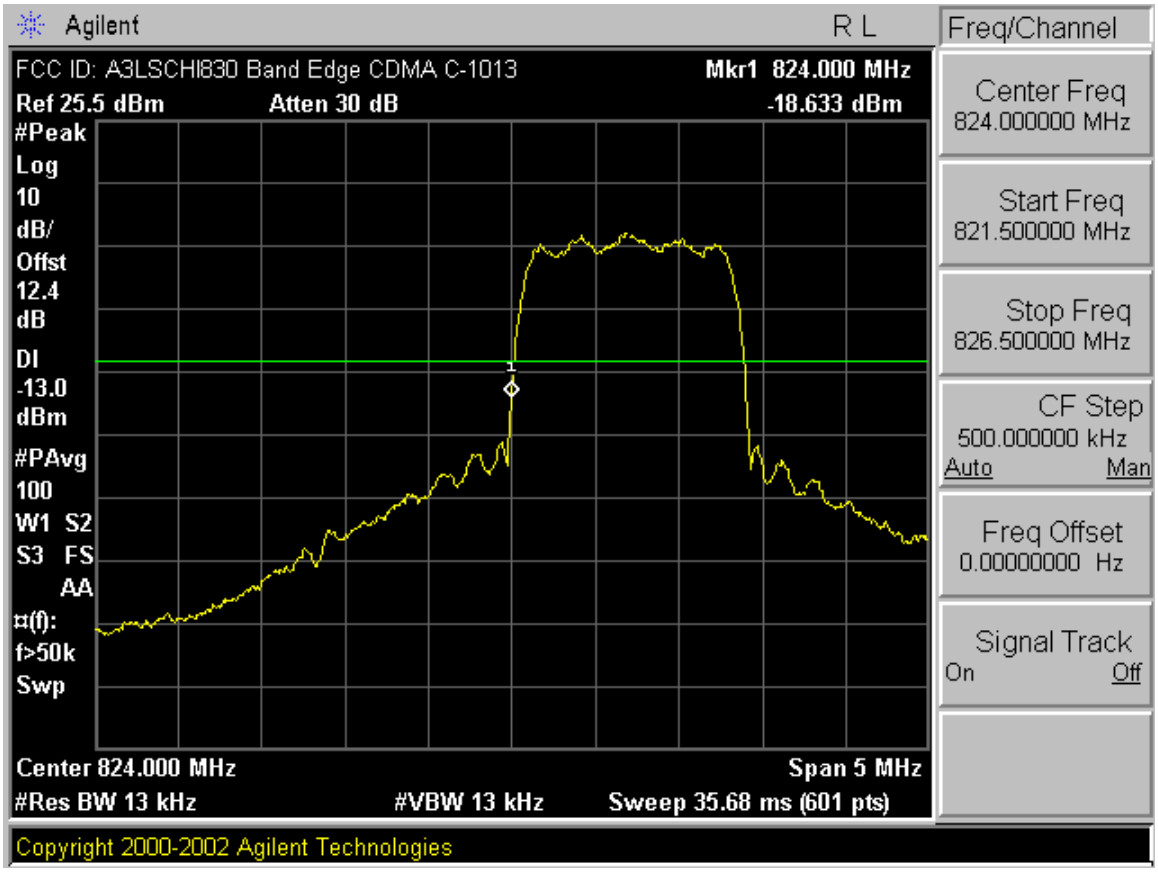
Agilent
R L
Freq/Channel
FCC ID: A3LSCHI830 Band Edge CDMA C-1013
Mkr1 824.000 MHz
Ref 25.5 dBm
Atten 30 dB
-18.633 dBm
#Peak
Log
10
dB/
Offst
12.4
dB
Dl
-13.0
dBm
#PAvg
100
W1 S2
S3 FS
AA
¤(f):
f>50k
Swp
Center 824.000 MHz
Span 5 MHz
#Res BW 13 kHz
#VBW 13 kHz
Sweep 35.68 ms (601 pts)
Center Freq
824.000000 MHz
Start Freq
821.500000 MHz
Stop Freq
826.500000 MHz
CF Step
500.000000 kHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies

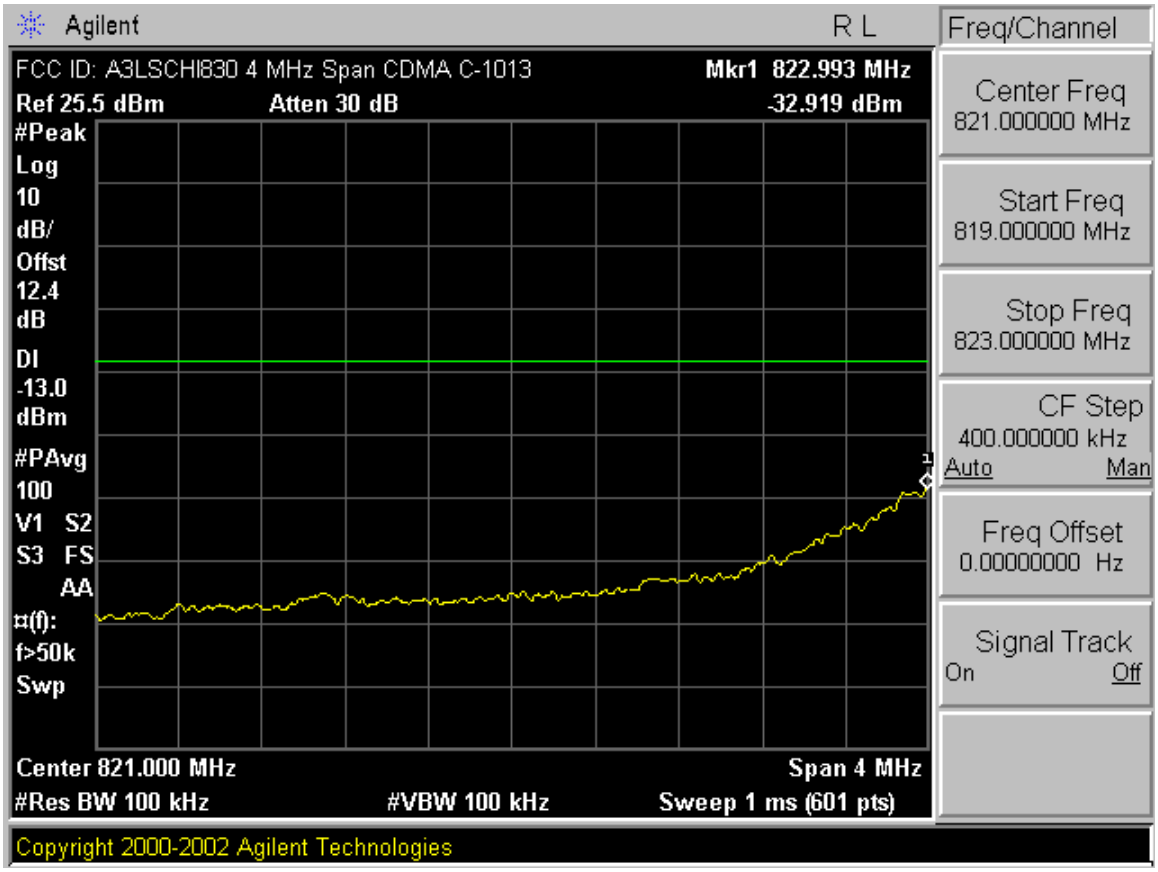
Agilent
R L
Freq/Channel
FCC ID: A3LSCHI830 4 MHz Span CDMA C-1013
Mkr1 822.993 MHz
Ref 25.5 dBm
Atten 30 dB
-32.919 dBm
#Peak
Log
10
dB/
Offst
12.4
dB
Dl
-13.0
dBm
#PAvg
100
V1 S2
S3 FS
AA
¤(f):
f>50k
Swp
Center Freq
821.000000 MHz
Start Freq
819.000000 MHz
Stop Freq
823.000000 MHz
CF Step
400.000000 kHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Center 821.000 MHz
Span 4 MHz
#Res BW 100 kHz
#VBW 100 kHz
Sweep 1 ms (601 pts)
Copyright 2000-2002 Agilent Technologies

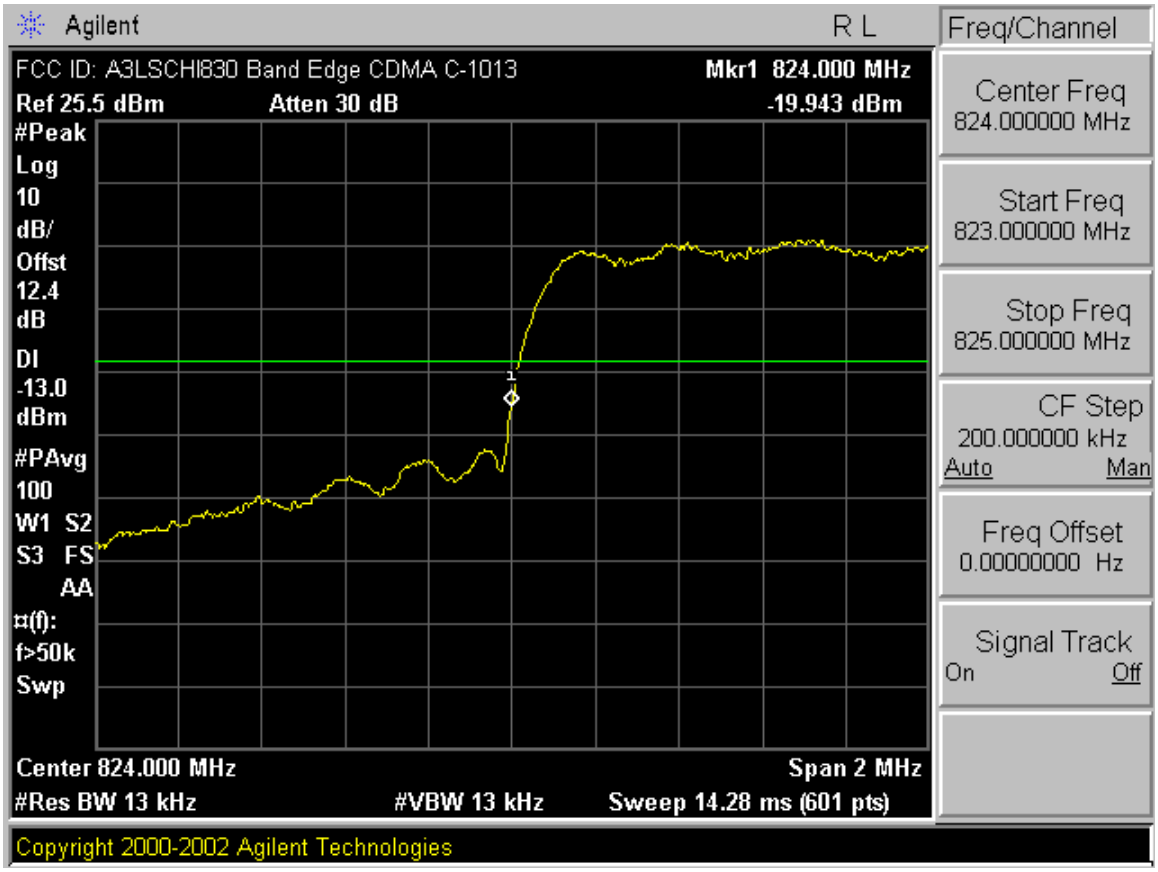
Agilent
R L
Freq/Channel
FCC ID: A3LSCHI830 Band Edge CDMA C-1013
Mkr1 824.000 MHz
Ref 25.5 dBm
Atten 30 dB
-19.943 dBm
#Peak
Log
10
dB/
Offst
12.4
dB
Dl
-13.0
dBm
#PAvg
100
W1 S2
S3 FS
AA
¤(f):
f>50k
Swp
Center Freq
824.000000 MHz
Start Freq
823.000000 MHz
Stop Freq
825.000000 MHz
CF Step
200.000000 kHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Center 824.000 MHz
Span 2 MHz
#Res BW 13 kHz
#VBW 13 kHz
Sweep 14.28 ms (601 pts)
Copyright 2000-2002 Agilent Technologies

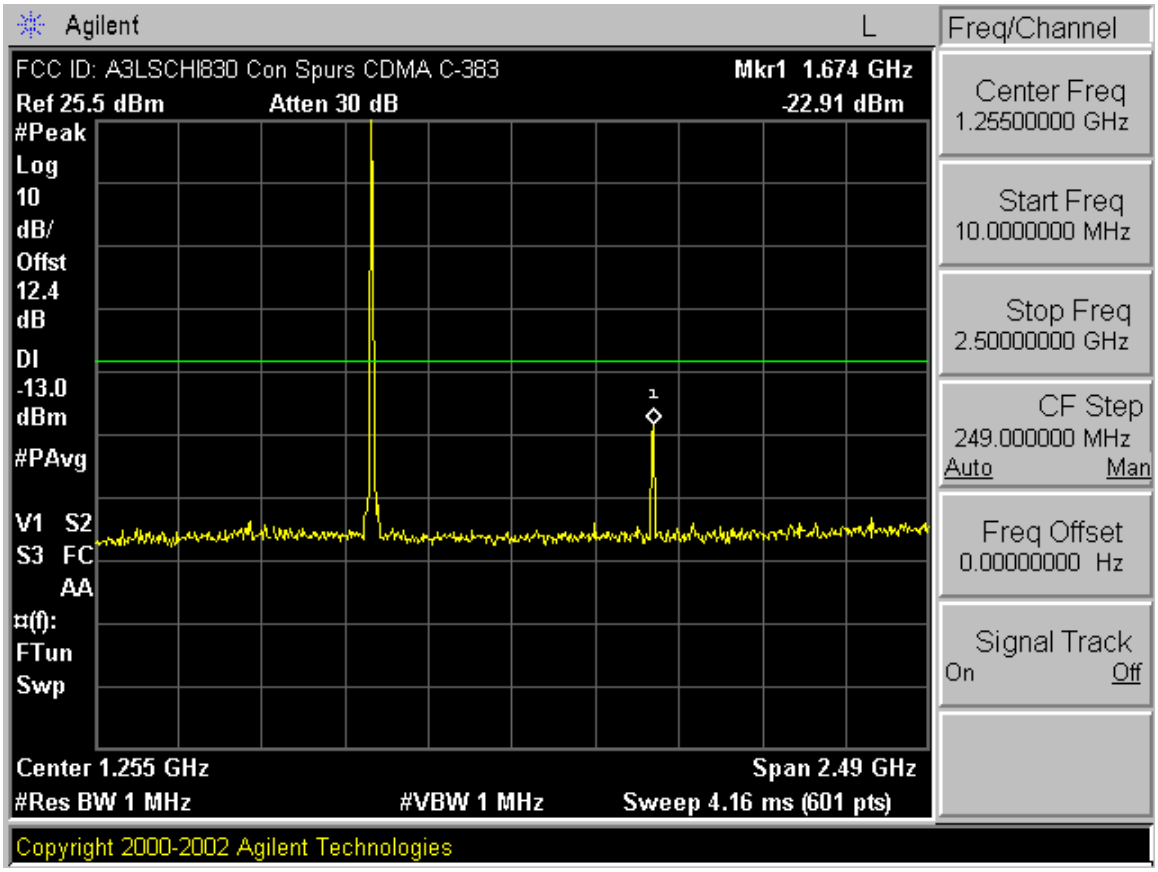
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Con Spurs CDMA C-383
Mkr1 1.674 GHz
Ref 25.5 dBm
Atten 30 dB
-22.91 dBm
#Peak
Log
10
dB/
Offst
12.4
dB
Dl
-13.0
dBm
#PAvg
V1 S2
S3 FC
AA
¤(f):
FTun
Swp
Center Freq
1.25500000 GHz
Start Freq
10.0000000 MHz
Stop Freq
2.50000000 GHz
CF Step
249.000000 MHz
Auto Man
Freq Offset
0.00000000 Hz
Signal Track
On Off
Center 1.255 GHz
Span 2.49 GHz
#Res BW 1 MHz
#VBW 1 MHz
Sweep 4.16 ms (601 pts)
Copyright 2000-2002 Agilent Technologies

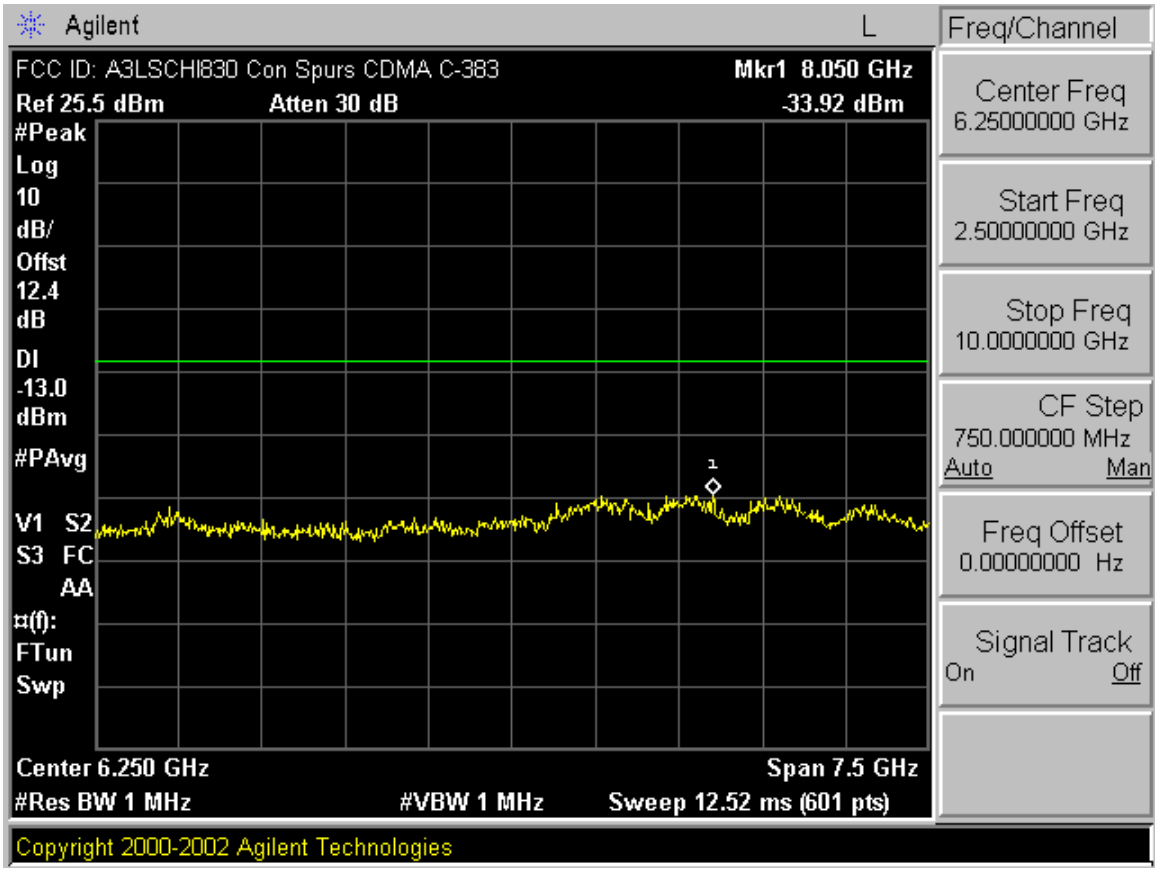
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Con Spurs CDMA C-383
Mkr1 8.050 GHz
Ref 25.5 dBm
Atten 30 dB
-33.92 dBm
#Peak
Log
10
dB/
Offst
12.4
dB
Dl
-13.0
dBm
#PAvg
V1 S2
S3 FC
AA
¤(f):
FTun
Swp
Center Freq
6.25000000 GHz
Start Freq
2.50000000 GHz
Stop Freq
10.0000000 GHz
CF Step
750.000000 MHz
Auto Man
Freq Offset
0.00000000 Hz
Signal Track
On Off
Center 6.250 GHz
Span 7.5 GHz
#Res BW 1 MHz
#VBW 1 MHz
Sweep 12.52 ms (601 pts)
Copyright 2000-2002 Agilent Technologies

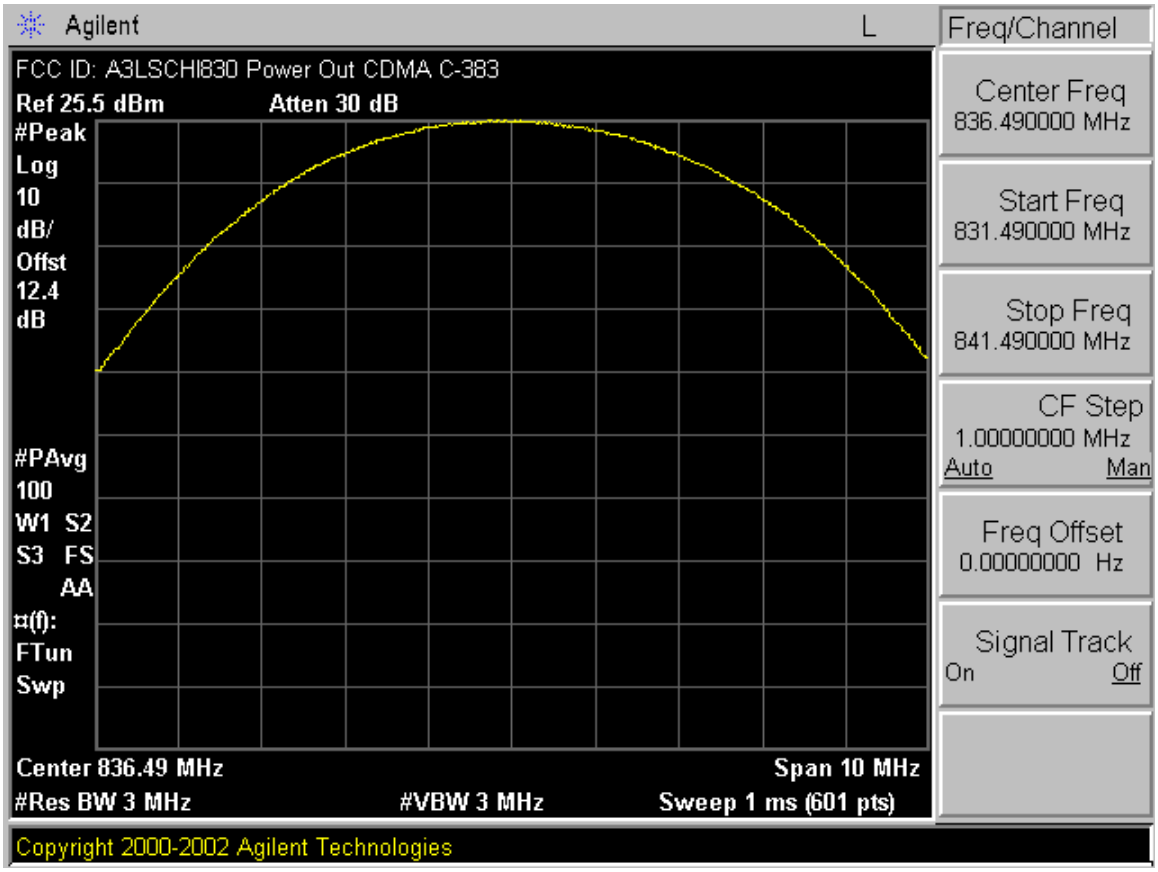
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Power Out CDMA C-383
Ref 25.5 dBm
Atten 30 dB
#Peak
Log
10
dB/
Offst
12.4
dB
#PAvg
100
W1 S2
S3 FS
AA
¤(f):
FTun
Swp
Center 836.49 MHz
Span 10 MHz
#Res BW 3 MHz
#VBW 3 MHz
Sweep 1 ms (601 pts)
Center Freq
836.490000 MHz
Start Freq
831.490000 MHz
Stop Freq
841.490000 MHz
CF Step
1.00000000 MHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies

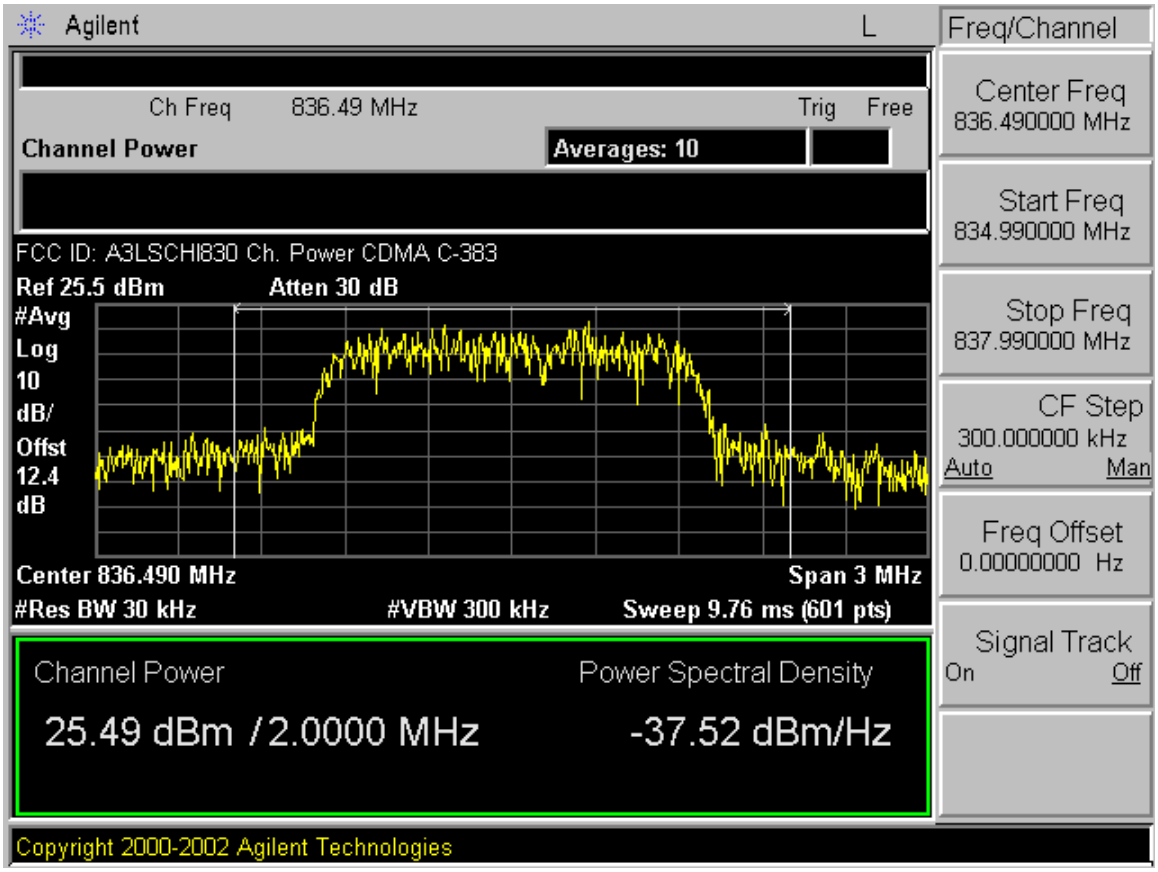
Agilent
L
Freq/Channel
Ch Freq
836.49 MHz
Trig
Free
Channel Power
Averages: 10
FCC ID: A3LSCHI830 Ch. Power CDMA C-383
Ref 25.5 dBm
Atten 30 dB
#Avg
Log
10
dB/
Offst
12.4
dB
Center 836.490 MHz
Span 3 MHz
#Res BW 30 kHz
#VBW 300 kHz
Sweep 9.76 ms (601 pts)
Channel Power
Power Spectral Density
25.49 dBm /2.0000 MHz
-37.52 dBm/Hz
Center Freq
836.490000 MHz
Start Freq
834.990000 MHz
Stop Freq
837.990000 MHz
CF Step
300.000000 kHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies

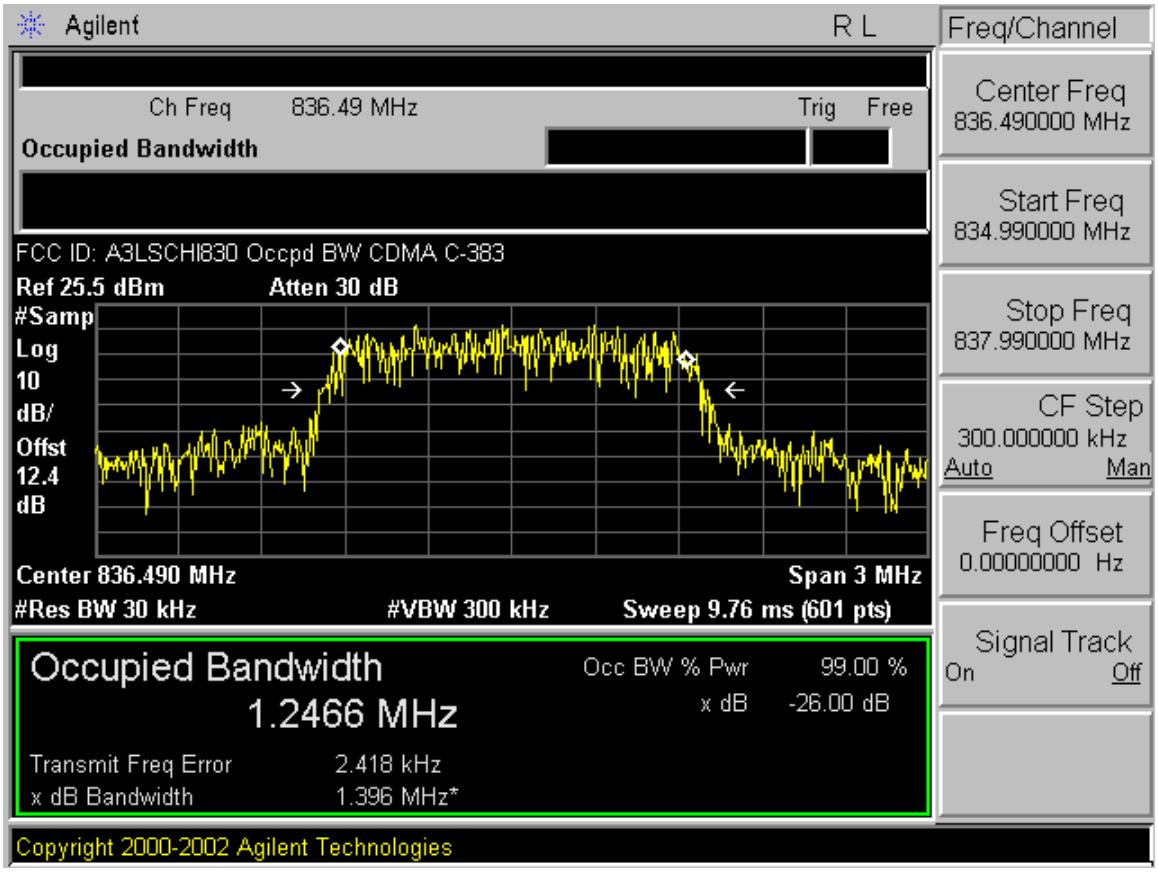
Agilent
R L
Freq/Channel
Ch Freq 836.49 MHz
Trig Free
Occupied Bandwidth
FCC ID: A3LSCHI830 Occpd BW CDMA C-383
Ref 25.5 dBm
Atten 30 dB
#Samp
Log
10
dB/
Offst
12.4
dB
Center 836.490 MHz
Span 3 MHz
#Res BW 30 kHz
#VBW 300 kHz
Sweep 9.76 ms (601 pts)
Occupied Bandwidth
1.2466 MHz
Occ BW % Pwr 99.00 %
x dB -26.00 dB
Transmit Freq Error 2.418 kHz
x dB Bandwidth 1.396 MHz*
Center Freq
836.490000 MHz
Start Freq
834.990000 MHz
Stop Freq
837.990000 MHz
CF Step
300.000000 kHz
Auto Man
Freq Offset
0.00000000 Hz
Signal Track
On Off
Copyright 2000-2002 Agilent Technologies

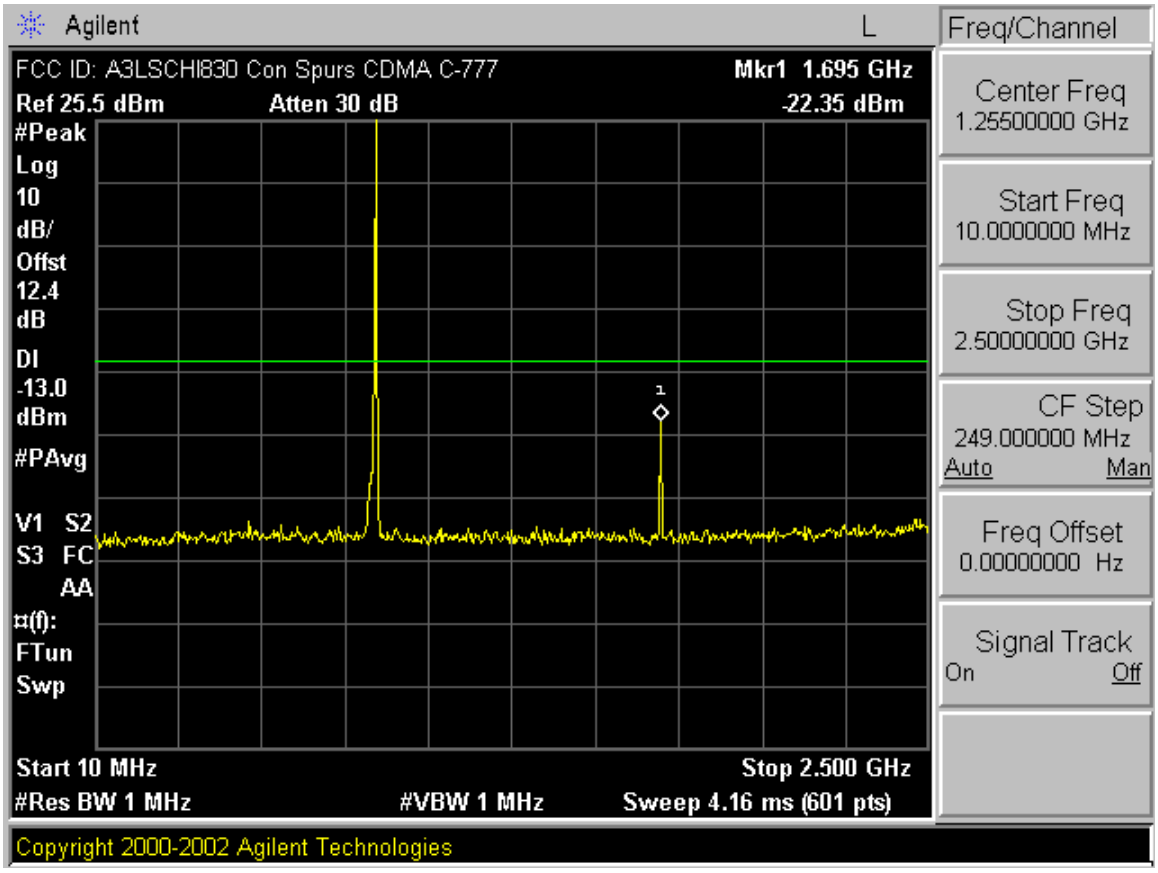
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Con Spurs CDMA C-777
Mkr1 1.695 GHz
Ref 25.5 dBm
Atten 30 dB
-22.35 dBm
#Peak
Log
10
dB/
Offst
12.4
dB
Dl
-13.0
dBm
#PAvg
V1 S2
S3 FC
AA
¤(f):
FTun
Swp
Start 10 MHz
Stop 2.500 GHz
#Res BW 1 MHz
#VBW 1 MHz
Sweep 4.16 ms (601 pts)
Center Freq
1.25500000 GHz
Start Freq
10.0000000 MHz
Stop Freq
2.50000000 GHz
CF Step
249.000000 MHz
Auto Man
Freq Offset
0.00000000 Hz
Signal Track
On Off
Copyright 2000-2002 Agilent Technologies

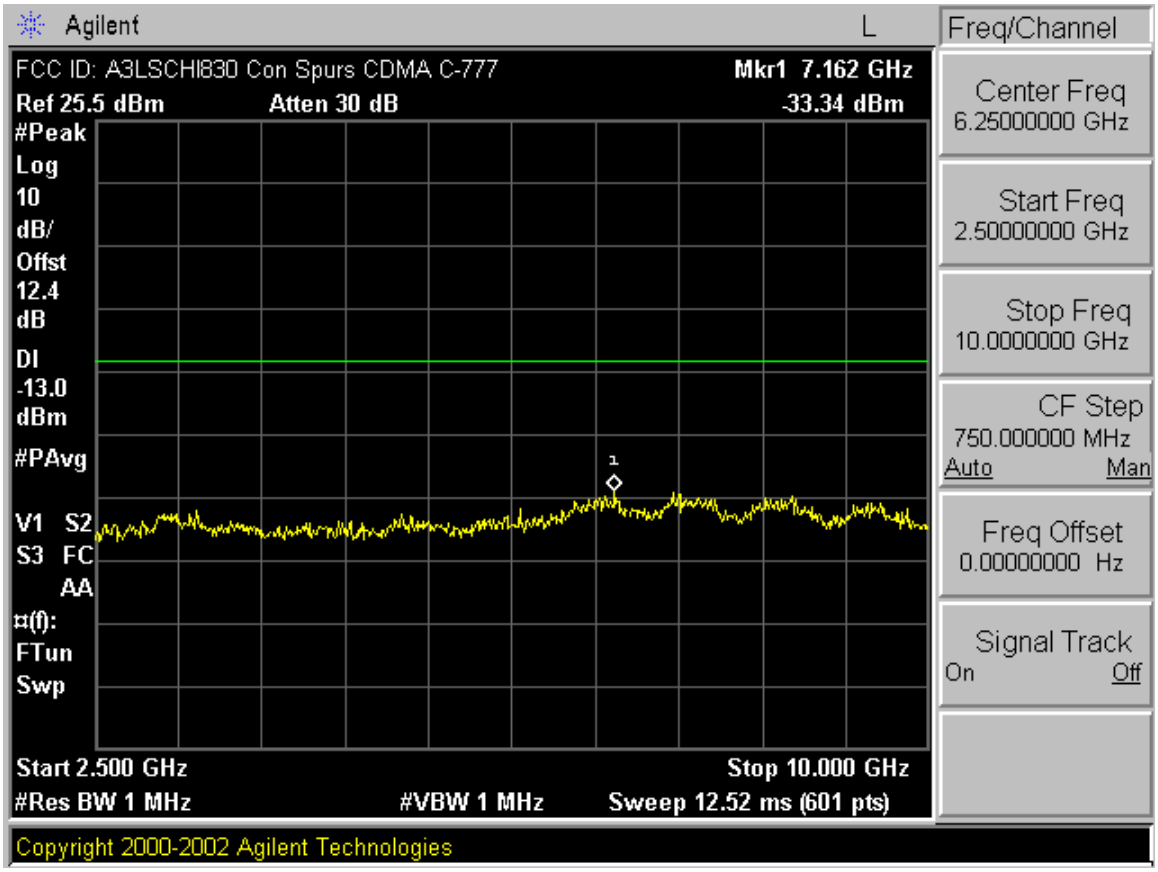
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Con Spurs CDMA C-777
Mkr1 7.162 GHz
Ref 25.5 dBm
Atten 30 dB
-33.34 dBm
#Peak
Log
10
dB/
Offst
12.4
dB
DI
-13.0
dBm
#PAvg
V1 S2
S3 FC
AA
¤(f):
FTun
Swp
Center Freq
6.25000000 GHz
Start Freq
2.50000000 GHz
Stop Freq
10.0000000 GHz
CF Step
750.000000 MHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Start 2.500 GHz
Stop 10.000 GHz
#Res BW 1 MHz
#VBW 1 MHz
Sweep 12.52 ms (601 pts)
Copyright 2000-2002 Agilent Technologies

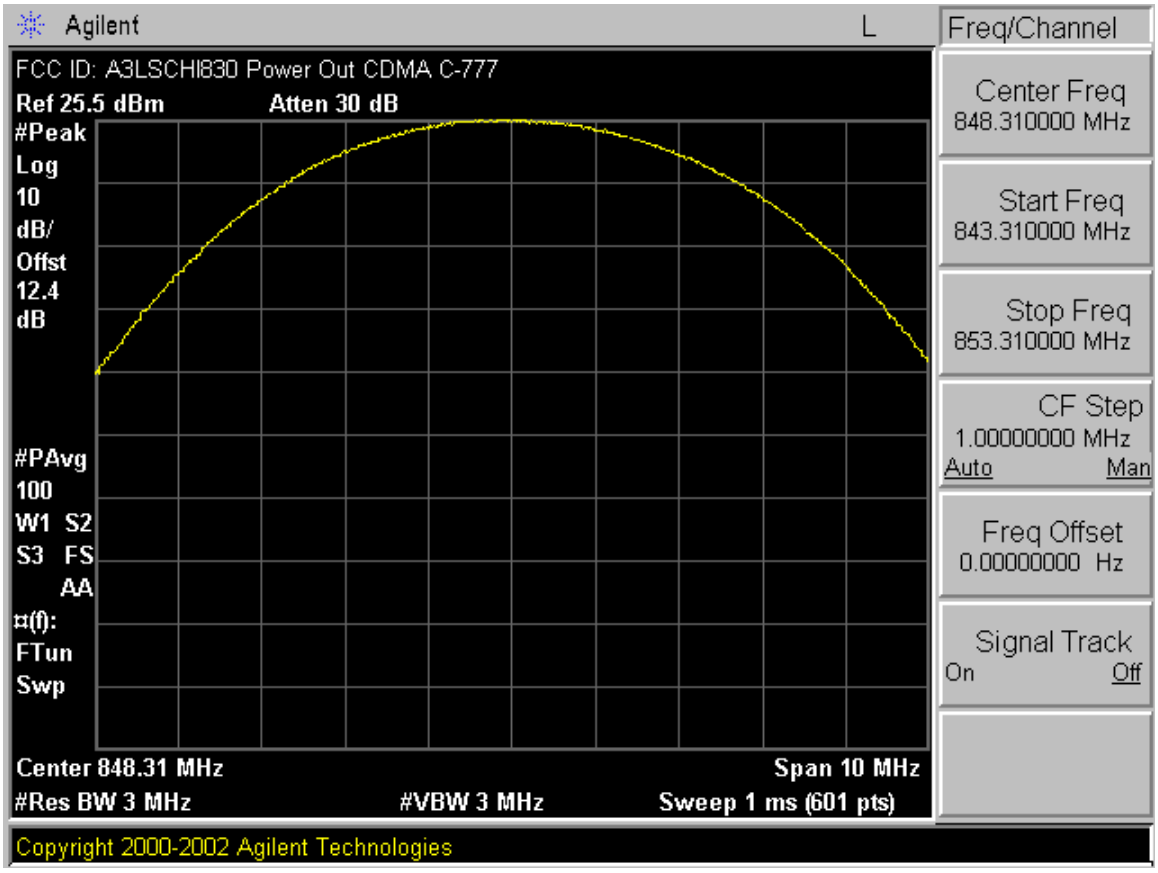
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Power Out CDMA C-777
Ref 25.5 dBm
Atten 30 dB
#Peak
Log
10
dB/
Offst
12.4
dB
#PAvg
100
W1 S2
S3 FS
AA
¤(f):
FTun
Swp
Center Freq
848.310000 MHz
Start Freq
843.310000 MHz
Stop Freq
853.310000 MHz
CF Step
1.00000000 MHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Center 848.31 MHz
Span 10 MHz
#Res BW 3 MHz
#VBW 3 MHz
Sweep 1 ms (601 pts)
Copyright 2000-2002 Agilent Technologies

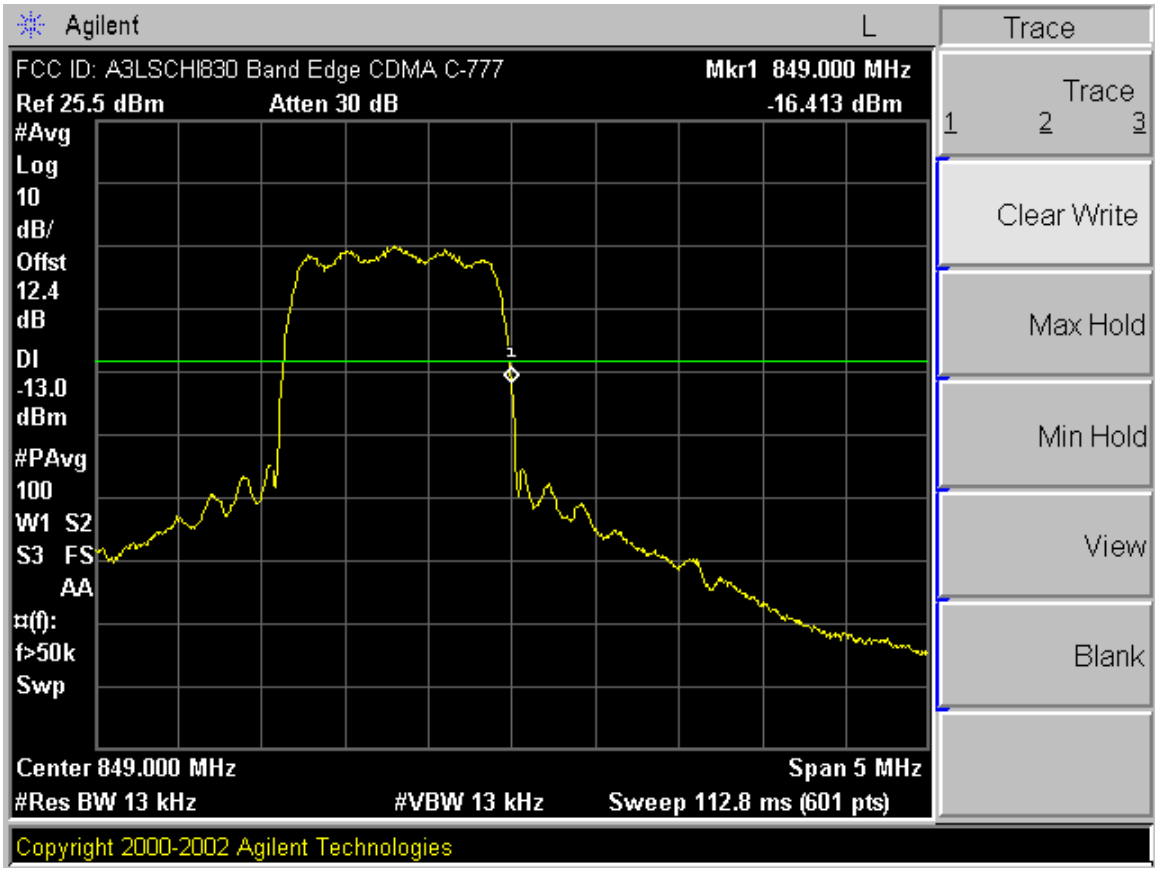
Agilent
L
Trace
FCC ID: A3LSCHI830 Band Edge CDMA C-777
Mkr1 849.000 MHz
Ref 25.5 dBm
Atten 30 dB
-16.413 dBm
#Avg
Log
10
dB/
Offst
12.4
dB
Dl
-13.0
dBm
#PAvg
100
W1 S2
S3 FS
AA
¤(f):
f>50k
Swp
Trace
1 2 3
Clear Write
Max Hold
Min Hold
View
Blank
Center 849.000 MHz
Span 5 MHz
#Res BW 13 kHz
#VBW 13 kHz
Sweep 112.8 ms (601 pts)
Copyright 2000-2002 Agilent Technologies

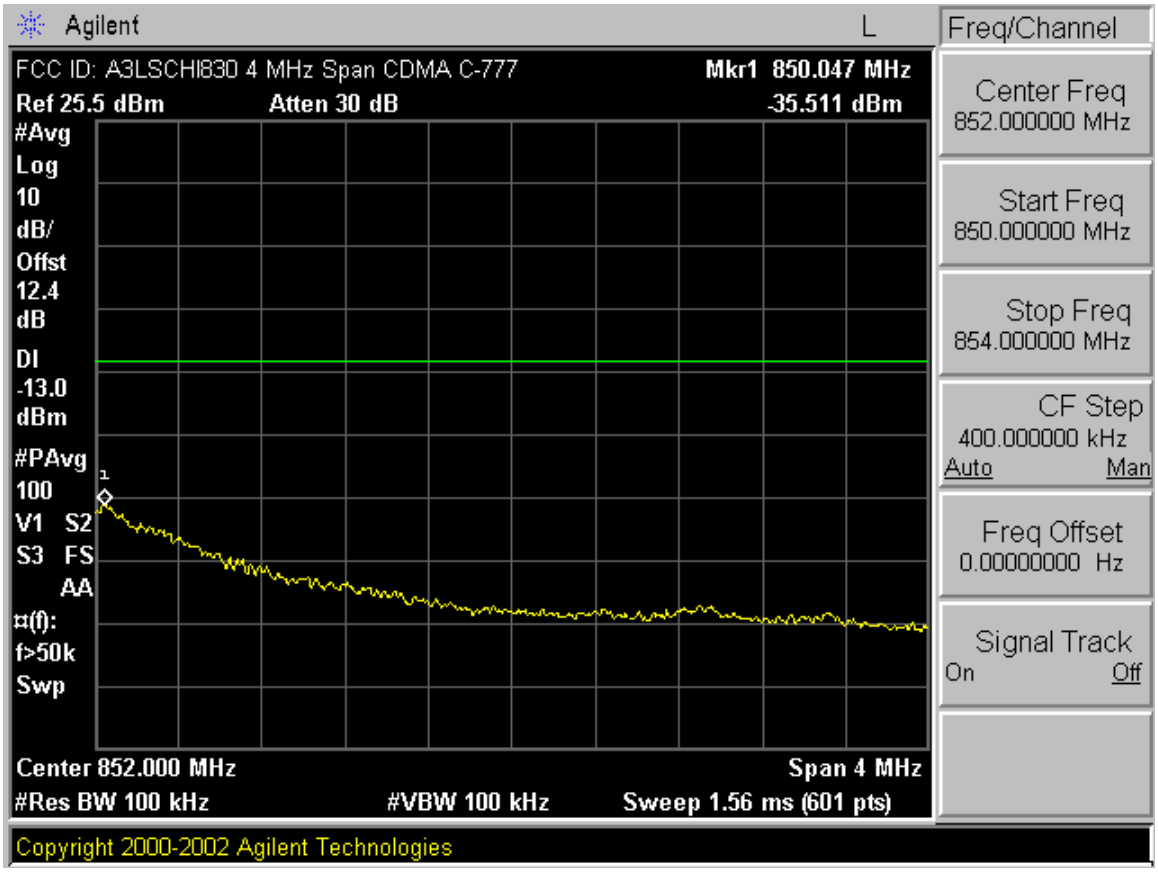
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 4 MHz Span CDMA C-777
Mkr1 850.047 MHz
Ref 25.5 dBm
Atten 30 dB
-35.511 dBm
#Avg
Log
10
dB/
Offst
12.4
dB
Dl
-13.0
dBm
#PAvg
100
V1 S2
S3 FS
AA
¤(f):
f>50k
Swp
Center Freq
852.000000 MHz
Start Freq
850.000000 MHz
Stop Freq
854.000000 MHz
CF Step
400.000000 kHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Center 852.000 MHz
Span 4 MHz
#Res BW 100 kHz
#VBW 100 kHz
Sweep 1.56 ms (601 pts)
Copyright 2000-2002 Agilent Technologies

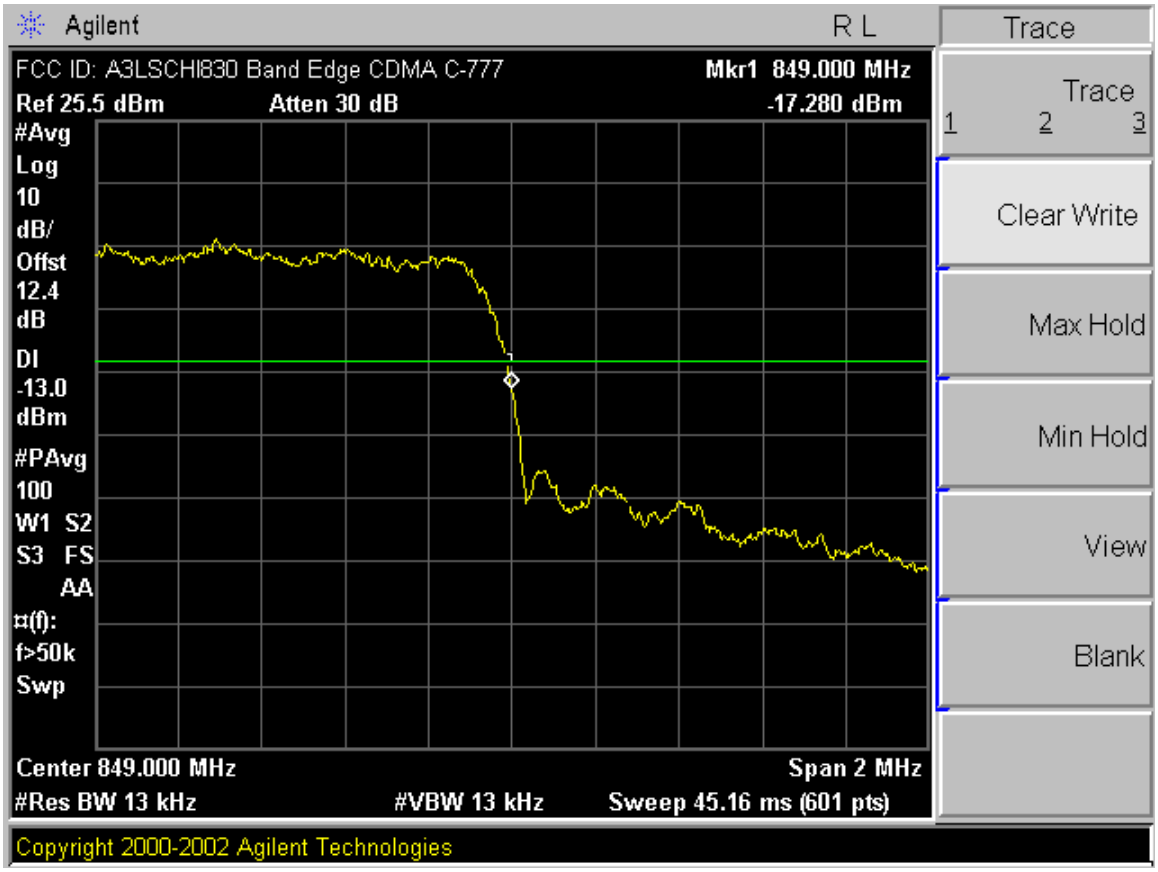
Agilent
R L
Trace
FCC ID: A3LSCHI830 Band Edge CDMA C-777
Mkr1 849.000 MHz
Ref 25.5 dBm
Atten 30 dB
-17.280 dBm
#Avg
Log
10
dB/
Offst
12.4
dB
Dl
-13.0
dBm
#PAvg
100
W1 S2
S3 FS
AA
¤(f):
f>50k
Swp
Trace
1 2 3
Clear Write
Max Hold
Min Hold
View
Blank
Center 849.000 MHz
Span 2 MHz
#Res BW 13 kHz
#VBW 13 kHz
Sweep 45.16 ms (601 pts)
Copyright 2000-2002 Agilent Technologies

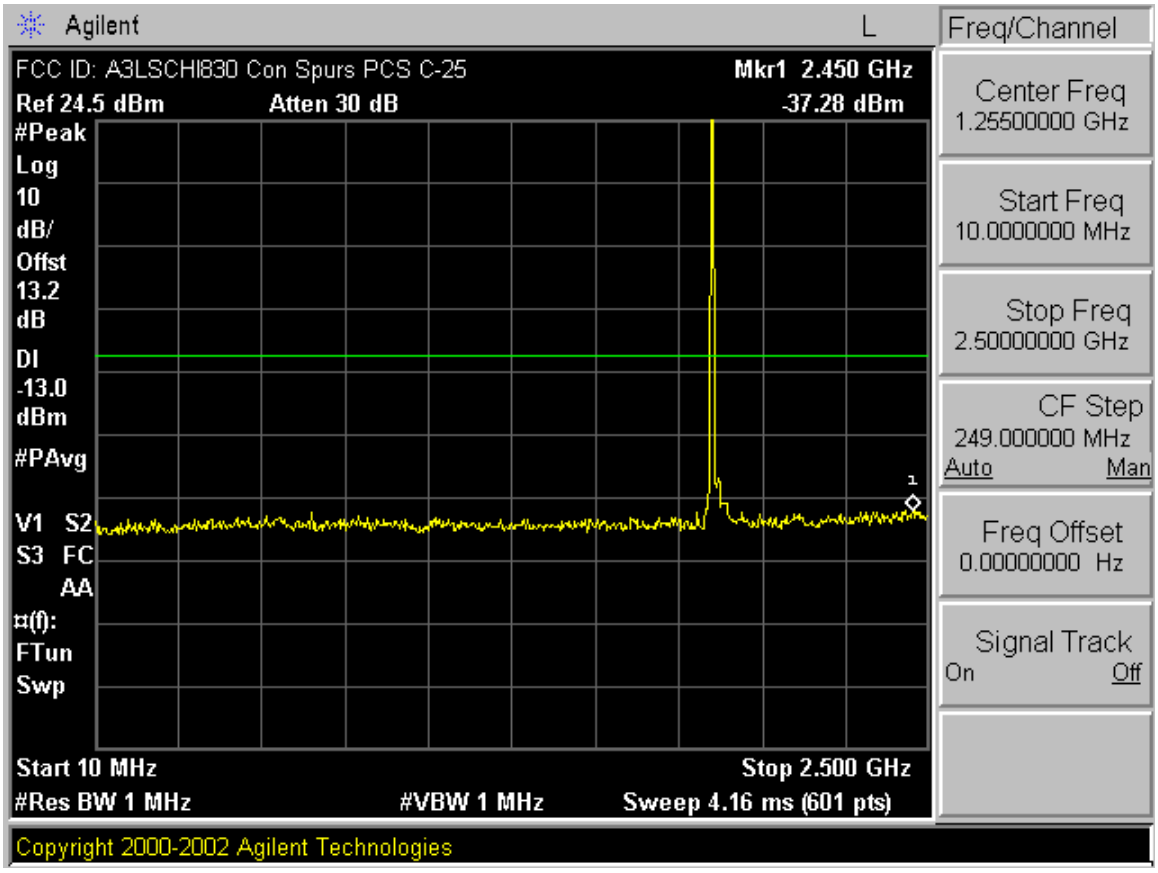
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Con Spurs PCS C-25
Mkr1 2.450 GHz
Ref 24.5 dBm
Atten 30 dB
-37.28 dBm
#Peak
Log
10
dB/
Offst
13.2
dB
Dl
-13.0
dBm
#PAvg
V1 S2
S3 FC
AA
¤(f):
FTun
Swp
Center Freq
1.25500000 GHz
Start Freq
10.0000000 MHz
Stop Freq
2.50000000 GHz
CF Step
249.000000 MHz
Auto Man
Freq Offset
0.00000000 Hz
Signal Track
On Off
Start 10 MHz
Stop 2.500 GHz
#Res BW 1 MHz
#VBW 1 MHz
Sweep 4.16 ms (601 pts)
Copyright 2000-2002 Agilent Technologies

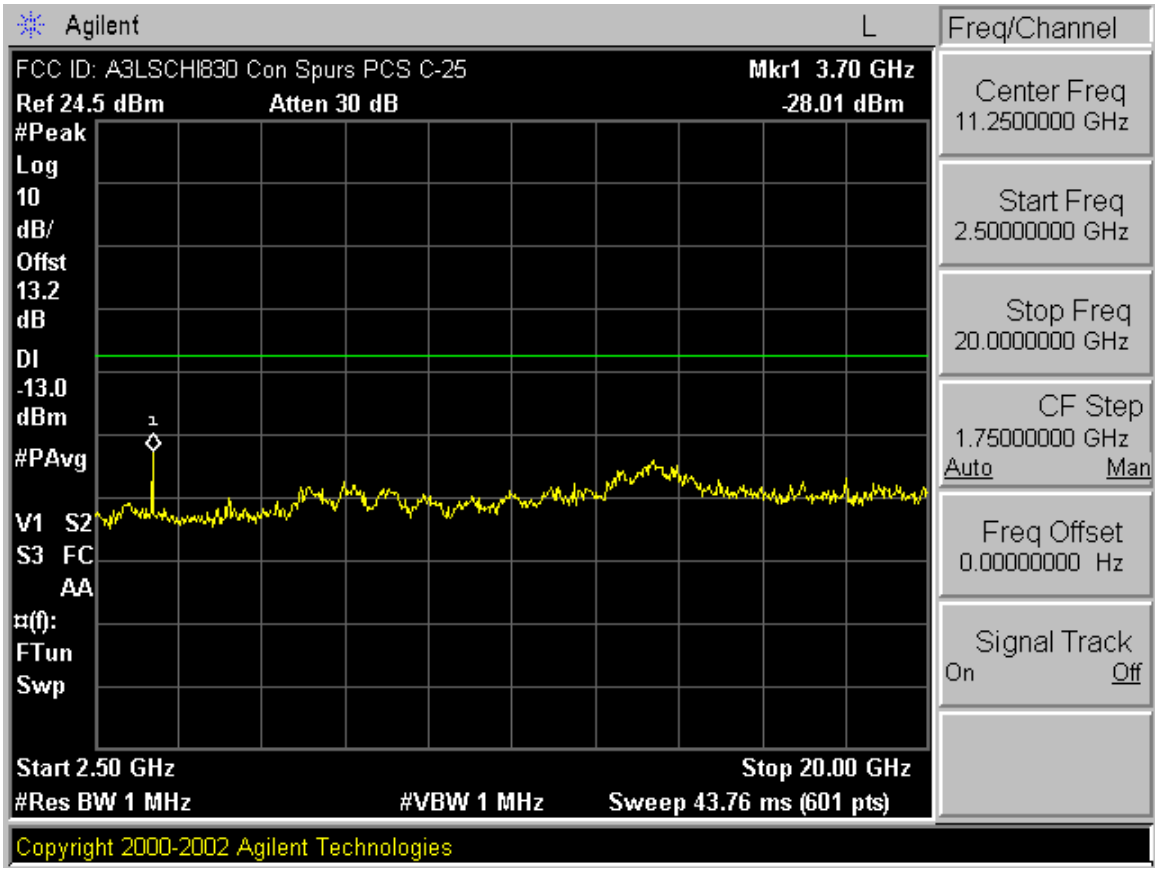
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Con Spurs PCS C-25
Mkr1 3.70 GHz
Ref 24.5 dBm
Atten 30 dB
-28.01 dBm
#Peak
Log
10
dB/
Offst
13.2
dB
Dl
-13.0
dBm
#PAvg
V1 S2
S3 FC
AA
¤(f):
FTun
Swp
Start 2.50 GHz
Stop 20.00 GHz
#Res BW 1 MHz
#VBW 1 MHz
Sweep 43.76 ms (601 pts)
Center Freq
11.2500000 GHz
Start Freq
2.50000000 GHz
Stop Freq
20.0000000 GHz
CF Step
1.75000000 GHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies

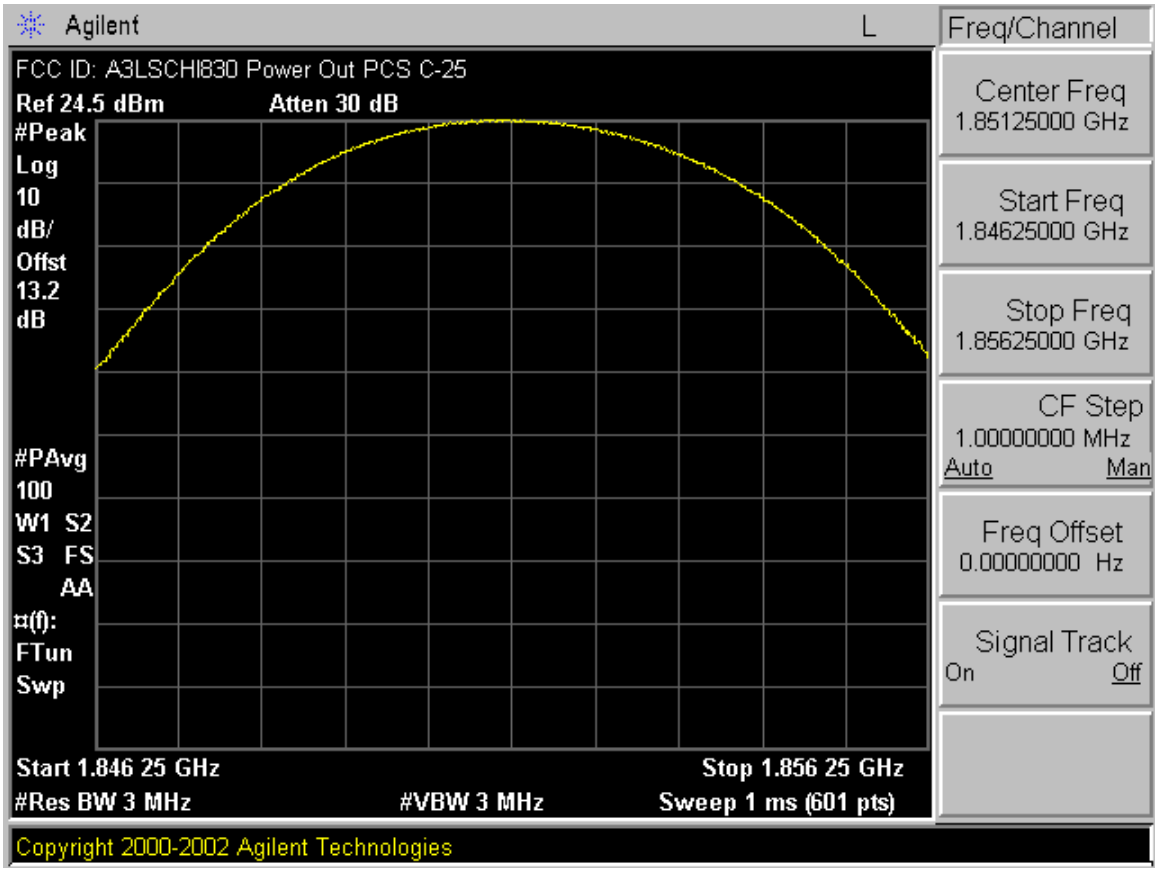
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Power Out PCS C-25
Ref 24.5 dBm
Atten 30 dB
#Peak
Log
10
dB/
Offst
13.2
dB
#PAvg
100
W1 S2
S3 FS
AA
¤(f):
FTun
Swp
Start 1.846 25 GHz
Stop 1.856 25 GHz
#Res BW 3 MHz
#VBW 3 MHz
Sweep 1 ms (601 pts)
Center Freq
1.85125000 GHz
Start Freq
1.84625000 GHz
Stop Freq
1.85625000 GHz
CF Step
1.00000000 MHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies

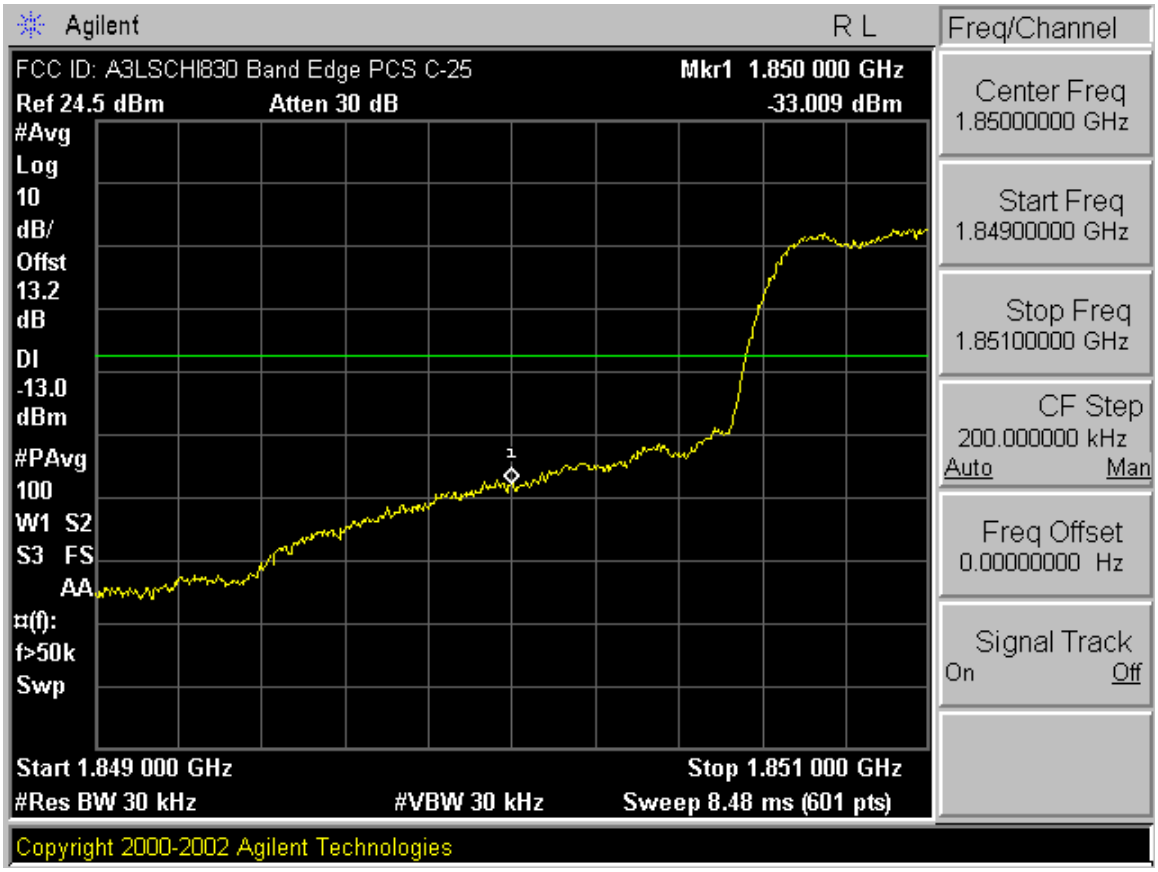
Agilent
R L
Freq/Channel
FCC ID: A3LSCHI830 Band Edge PCS C-25
Mkr1 1.850 000 GHz
Ref 24.5 dBm
Atten 30 dB
-33.009 dBm
#Avg
Log
10
dB/
Offst
13.2
dB
Dl
-13.0
dBm
#PAvg
100
W1 S2
S3 FS
AA
¤(f):
f>50k
Swp
Center Freq
1.85000000 GHz
Start Freq
1.84900000 GHz
Stop Freq
1.85100000 GHz
CF Step
200.000000 kHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Start 1.849 000 GHz
Stop 1.851 000 GHz
#Res BW 30 kHz
#VBW 30 kHz
Sweep 8.48 ms (601 pts)
Copyright 2000-2002 Agilent Technologies

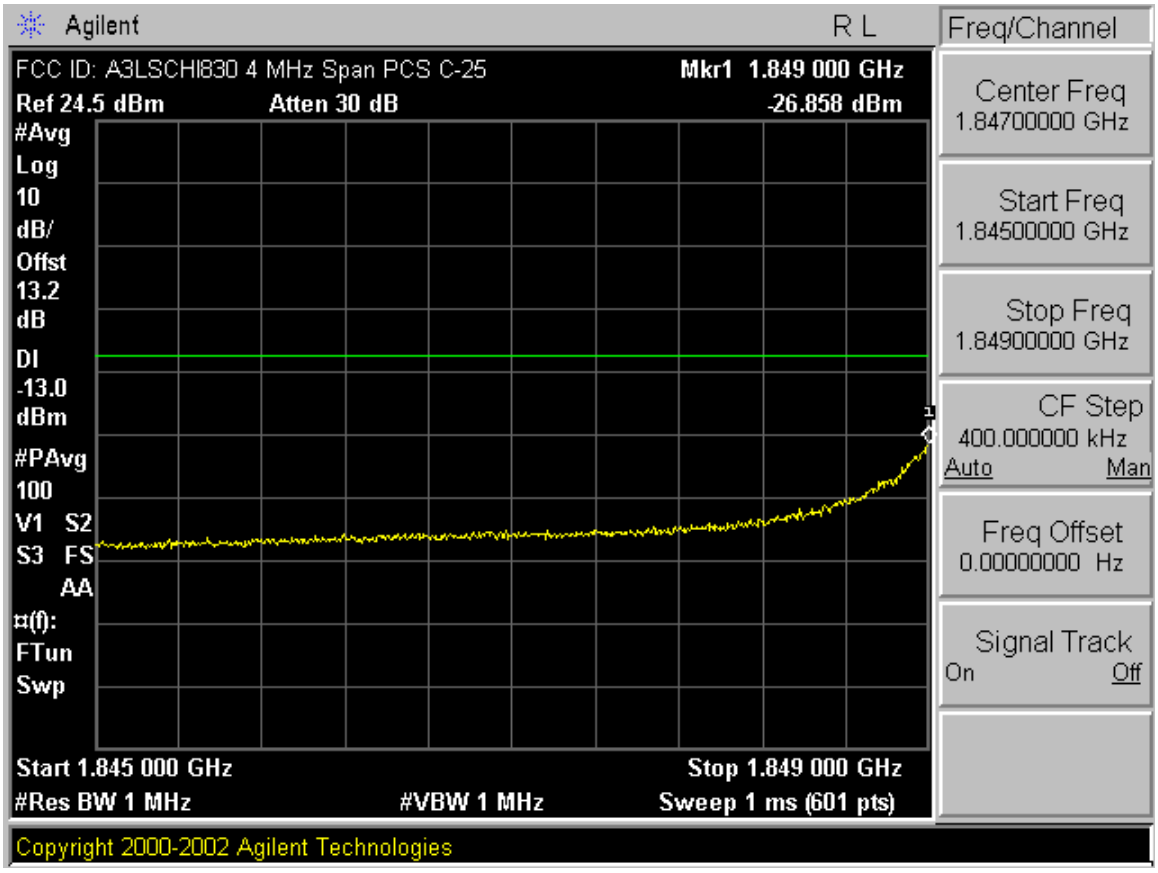
Agilent
R L
Freq/Channel
FCC ID: A3LSCHI830 4 MHz Span PCS C-25
Mkr1 1.849 000 GHz
Ref 24.5 dBm
Atten 30 dB
-26.858 dBm
#Avg
Log
10
dB/
Offst
13.2
dB
Dl
-13.0
dBm
#PAvg
100
V1 S2
S3 FS
AA
¤(f):
FTun
Swp
Center Freq
1.84700000 GHz
Start Freq
1.84500000 GHz
Stop Freq
1.84900000 GHz
CF Step
400.000000 kHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Start 1.845 000 GHz
Stop 1.849 000 GHz
#Res BW 1 MHz
#VBW 1 MHz
Sweep 1 ms (601 pts)
Copyright 2000-2002 Agilent Technologies

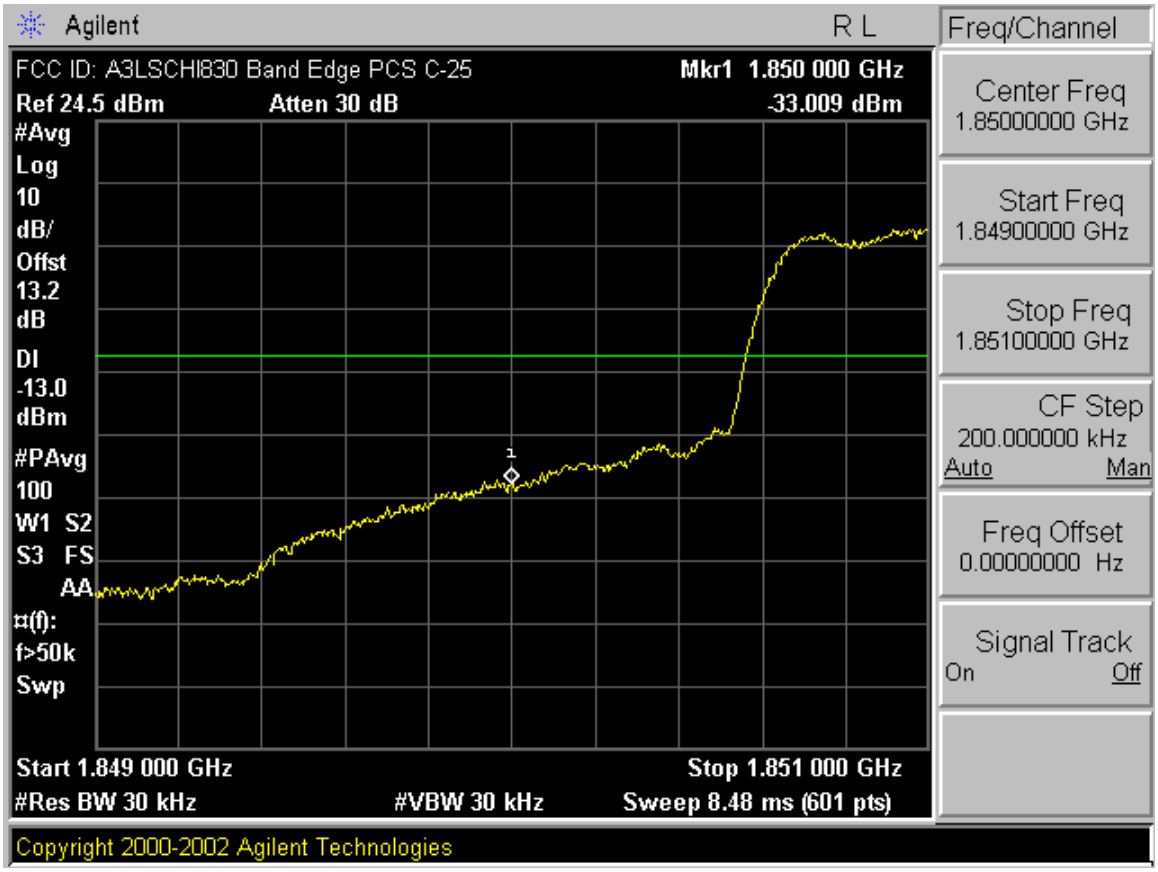
Agilent
R L
Freq/Channel
FCC ID: A3LSCHI830 Band Edge PCS C-25
Mkr1 1.850 000 GHz
Ref 24.5 dBm
Atten 30 dB
-33.009 dBm
#Avg
Log
10
dB/
Offst
13.2
dB
Dl
-13.0
dBm
#PAvg
100
W1 S2
S3 FS
AA
¤(f):
f>50k
Swp
Start 1.849 000 GHz
Stop 1.851 000 GHz
#Res BW 30 kHz
#VBW 30 kHz
Sweep 8.48 ms (601 pts)
Center Freq
1.85000000 GHz
Start Freq
1.84900000 GHz
Stop Freq
1.85100000 GHz
CF Step
200.000000 kHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies

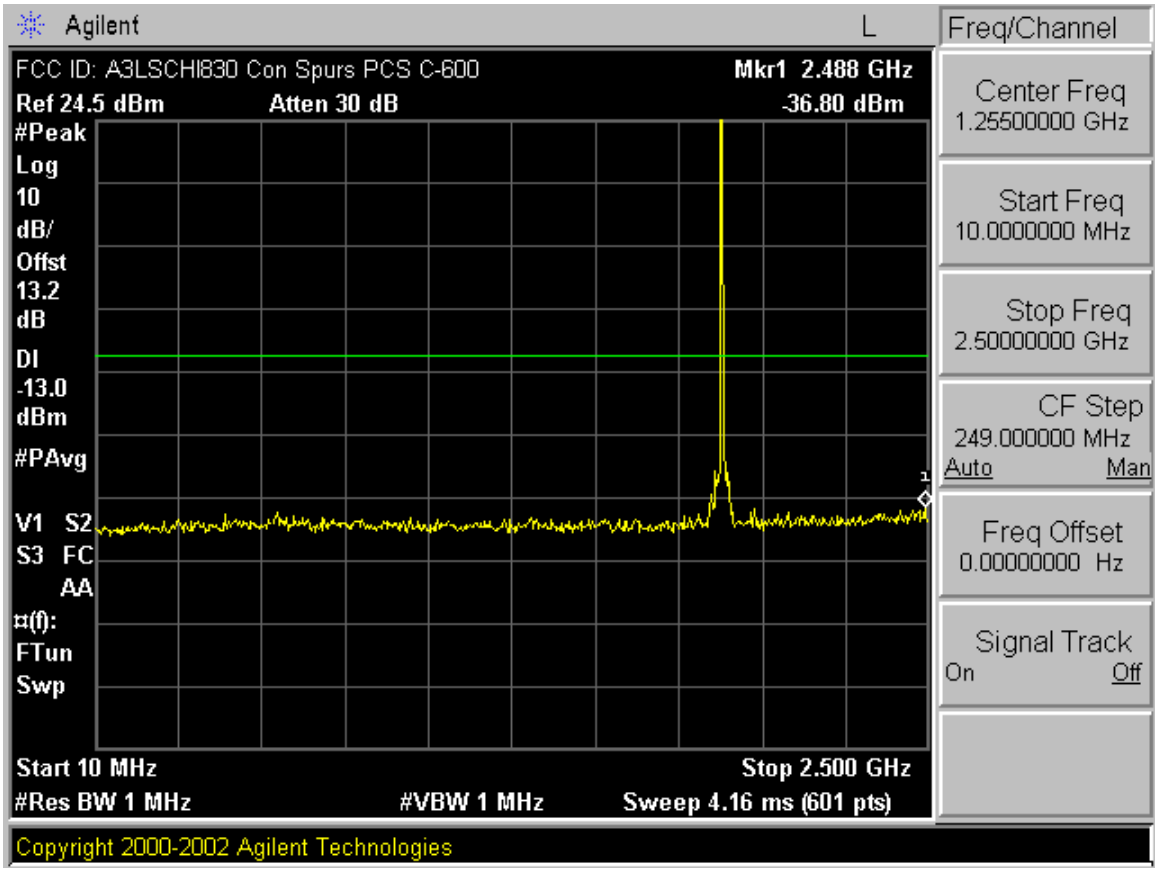
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Con Spurs PCS C-600
Mkr1 2.488 GHz
Ref 24.5 dBm
Atten 30 dB
-36.80 dBm
#Peak
Log
10
dB/
Offst
13.2
dB
Dl
-13.0
dBm
#PAvg
V1 S2
S3 FC
AA
¤(f):
FTun
Swp
Start 10 MHz
Stop 2.500 GHz
#Res BW 1 MHz
#VBW 1 MHz
Sweep 4.16 ms (601 pts)
Center Freq
1.25500000 GHz
Start Freq
10.0000000 MHz
Stop Freq
2.50000000 GHz
CF Step
249.000000 MHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies

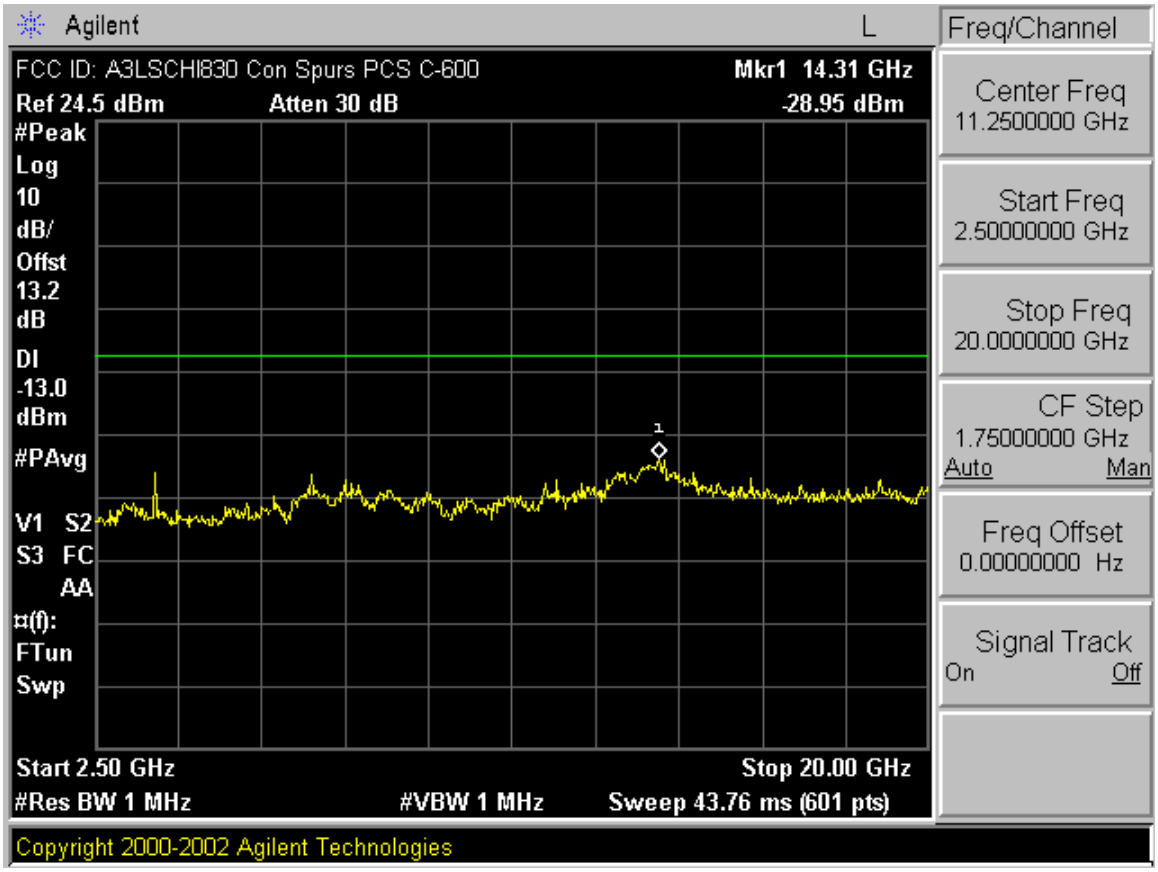
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Con Spurs PCS C-600
Mkr1 14.31 GHz
Ref 24.5 dBm
Atten 30 dB
-28.95 dBm
#Peak
Log
10
dB/
Offst
13.2
dB
Dl
-13.0
dBm
#PAvg
V1 S2
S3 FC
AA
¤(f):
FTun
Swp
Start 2.50 GHz
Stop 20.00 GHz
#Res BW 1 MHz
#VBW 1 MHz
Sweep 43.76 ms (601 pts)
Center Freq
11.2500000 GHz
Start Freq
2.50000000 GHz
Stop Freq
20.0000000 GHz
CF Step
1.75000000 GHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies

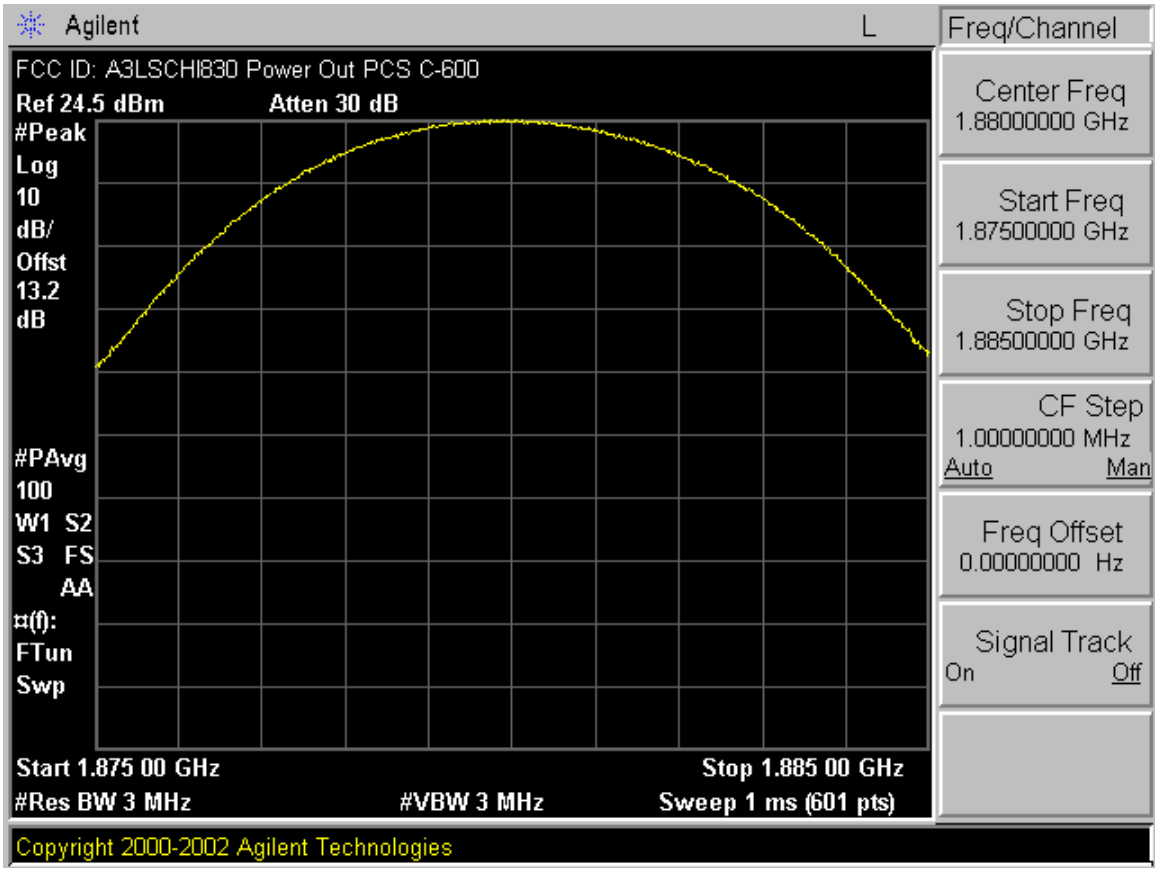
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Power Out PCS C-600
Ref 24.5 dBm
Atten 30 dB
#Peak
Log
10
dB/
Offst
13.2
dB
#PAvg
100
W1 S2
S3 FS
AA
¤(f):
FTun
Swp
Start 1.875 00 GHz
Stop 1.885 00 GHz
#Res BW 3 MHz
#VBW 3 MHz
Sweep 1 ms (601 pts)
Center Freq
1.88000000 GHz
Start Freq
1.87500000 GHz
Stop Freq
1.88500000 GHz
CF Step
1.00000000 MHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies

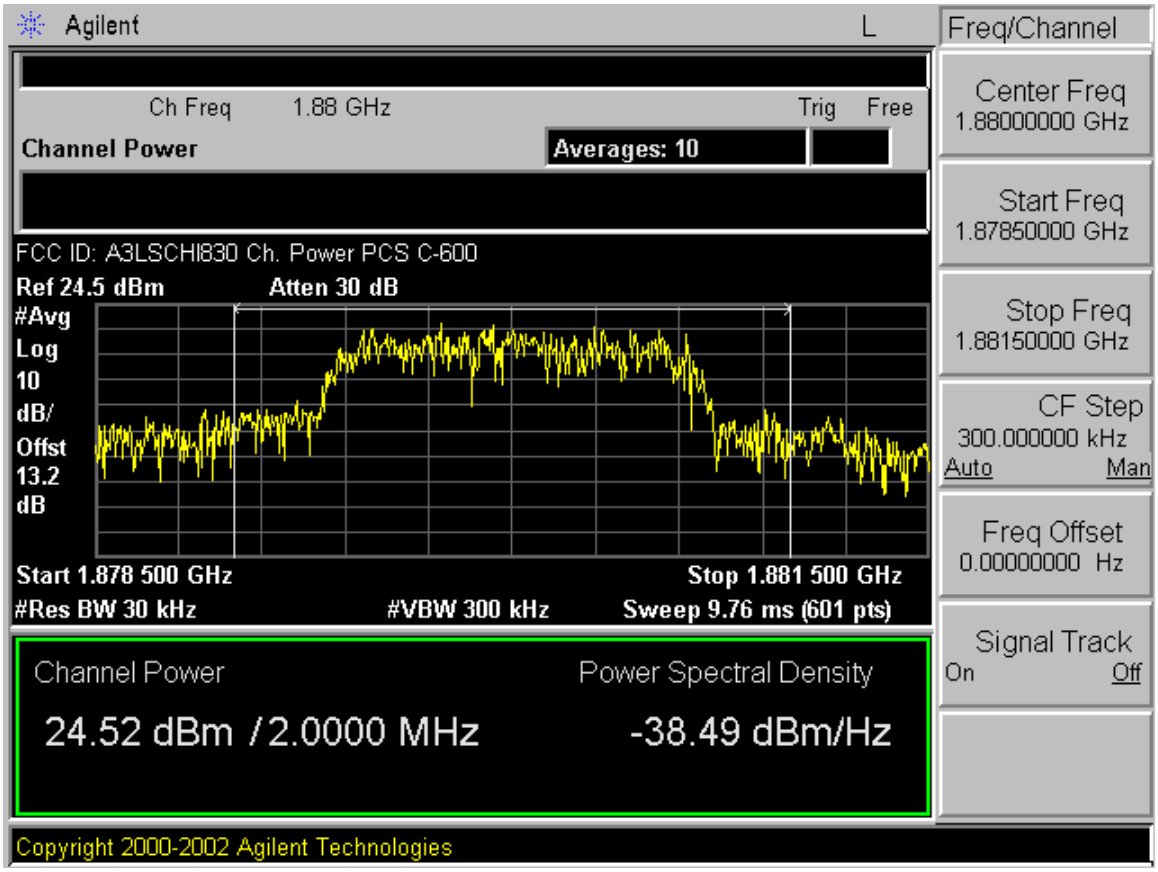
Agilent
L
Freq/Channel
Ch Freq 1.88 GHz
Trig Free
Channel Power
Averages: 10
FCC ID: A3LSCHI830 Ch. Power PCS C-600
Ref 24.5 dBm
Atten 30 dB
#Avg
Log
10
dB/
Offst
13.2
dB
Start 1.878 500 GHz
Stop 1.881 500 GHz
#Res BW 30 kHz
#VBW 300 kHz
Sweep 9.76 ms (601 pts)
Channel Power
Power Spectral Density
24.52 dBm /2.0000 MHz
-38.49 dBm/Hz
Center Freq
1.88000000 GHz
Start Freq
1.87850000 GHz
Stop Freq
1.88150000 GHz
CF Step
300.000000 kHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies

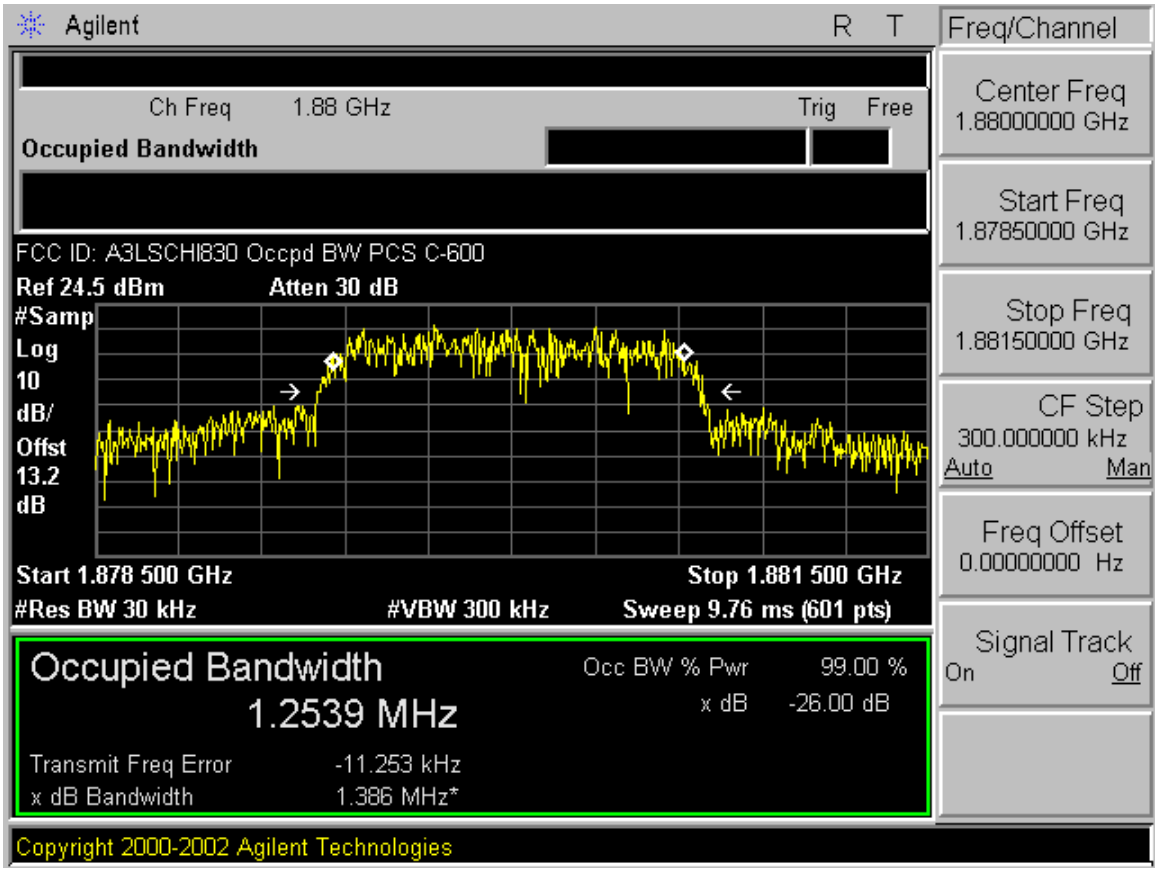
Agilent
R T
Freq/Channel
Ch Freq 1.88 GHz
Trig Free
Occupied Bandwidth
FCC ID: A3LSCHI830 Occpd BW PCS C-600
Ref 24.5 dBm
Atten 30 dB
#Samp
Log
10
dB/
Offst
13.2
dB
Start 1.878 500 GHz
Stop 1.881 500 GHz
#Res BW 30 kHz
#VBW 300 kHz
Sweep 9.76 ms (601 pts)
Occupied Bandwidth
1.2539 MHz
Occ BW % Pwr 99.00 %
x dB -26.00 dB
Transmit Freq Error -11.253 kHz
x dB Bandwidth 1.386 MHz*
Center Freq
1.88000000 GHz
Start Freq
1.87850000 GHz
Stop Freq
1.88150000 GHz
CF Step
300.000000 kHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies

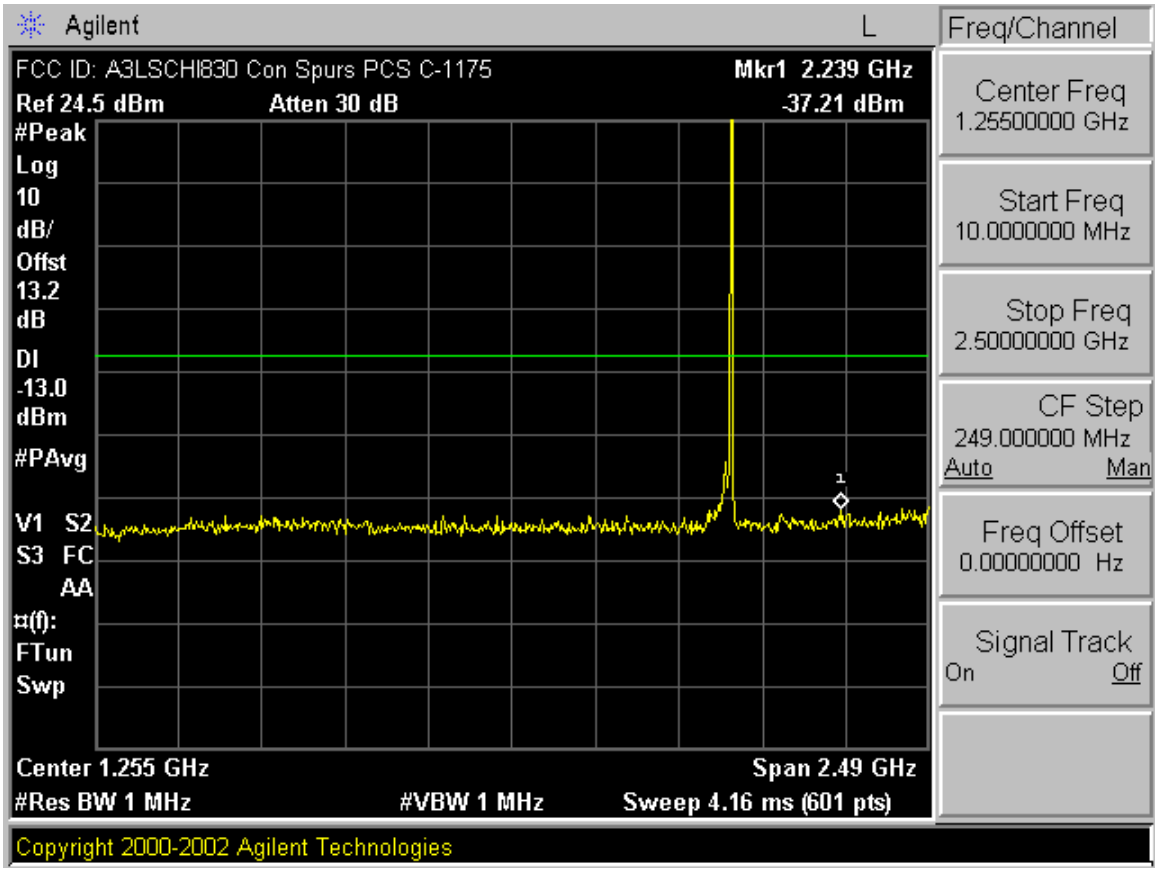
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Con Spurs PCS C-1175
Mkr1 2.239 GHz
Ref 24.5 dBm
Atten 30 dB
-37.21 dBm
#Peak
Log
10
dB/
Offst
13.2
dB
Dl
-13.0
dBm
#PAvg
V1 S2
S3 FC
AA
¤(f):
FTun
Swp
Center Freq
1.25500000 GHz
Start Freq
10.0000000 MHz
Stop Freq
2.50000000 GHz
CF Step
249.000000 MHz
Auto Man
Freq Offset
0.00000000 Hz
Signal Track
On Off
Center 1.255 GHz
Span 2.49 GHz
#Res BW 1 MHz
#VBW 1 MHz
Sweep 4.16 ms (601 pts)
Copyright 2000-2002 Agilent Technologies

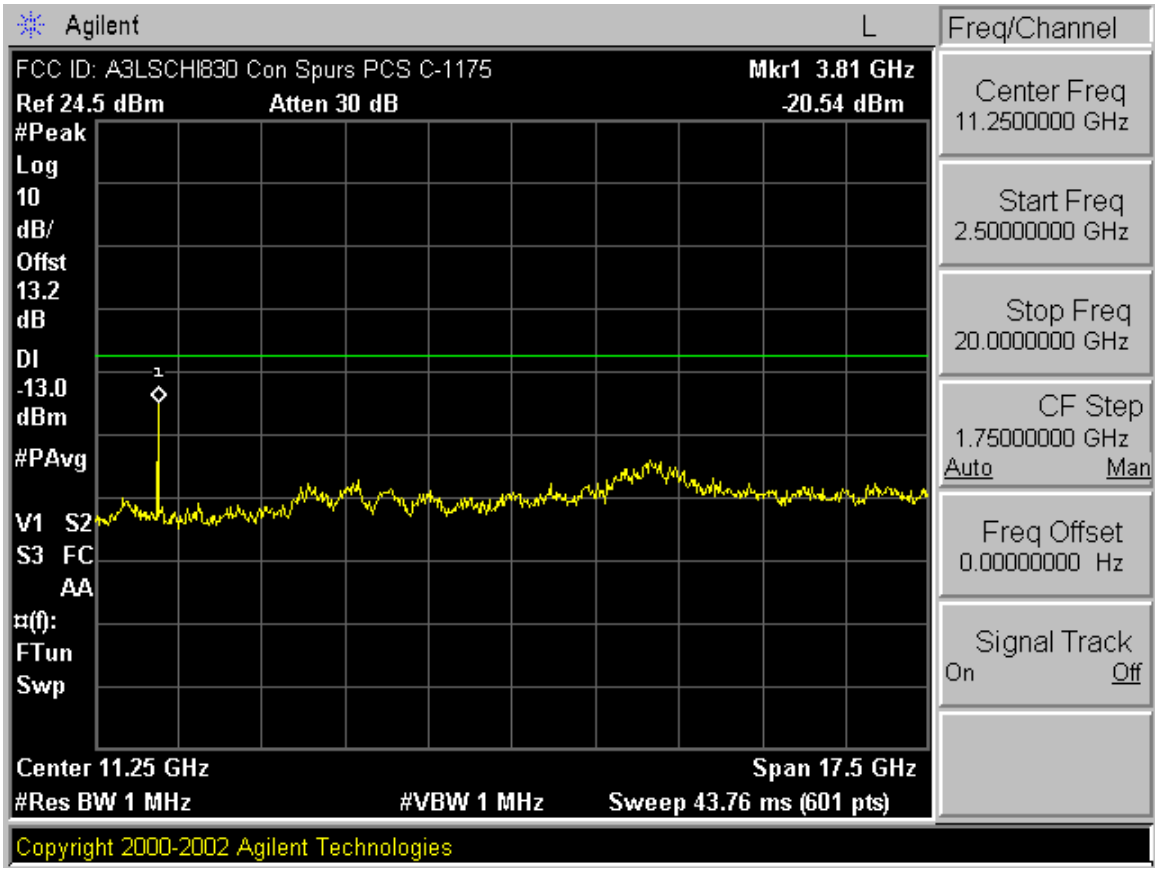
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Con Spurs PCS C-1175
Mkr1 3.81 GHz
Ref 24.5 dBm
Atten 30 dB
-20.54 dBm
#Peak
Log
10
dB/
Offst
13.2
dB
Dl
-13.0
dBm
#PAvg
V1 S2
S3 FC
AA
¤(f):
FTun
Swp
Center Freq
11.2500000 GHz
Start Freq
2.50000000 GHz
Stop Freq
20.0000000 GHz
CF Step
1.75000000 GHz
Auto Man
Freq Offset
0.00000000 Hz
Signal Track
On Off
Center 11.25 GHz
Span 17.5 GHz
#Res BW 1 MHz
#VBW 1 MHz
Sweep 43.76 ms (601 pts)
Copyright 2000-2002 Agilent Technologies

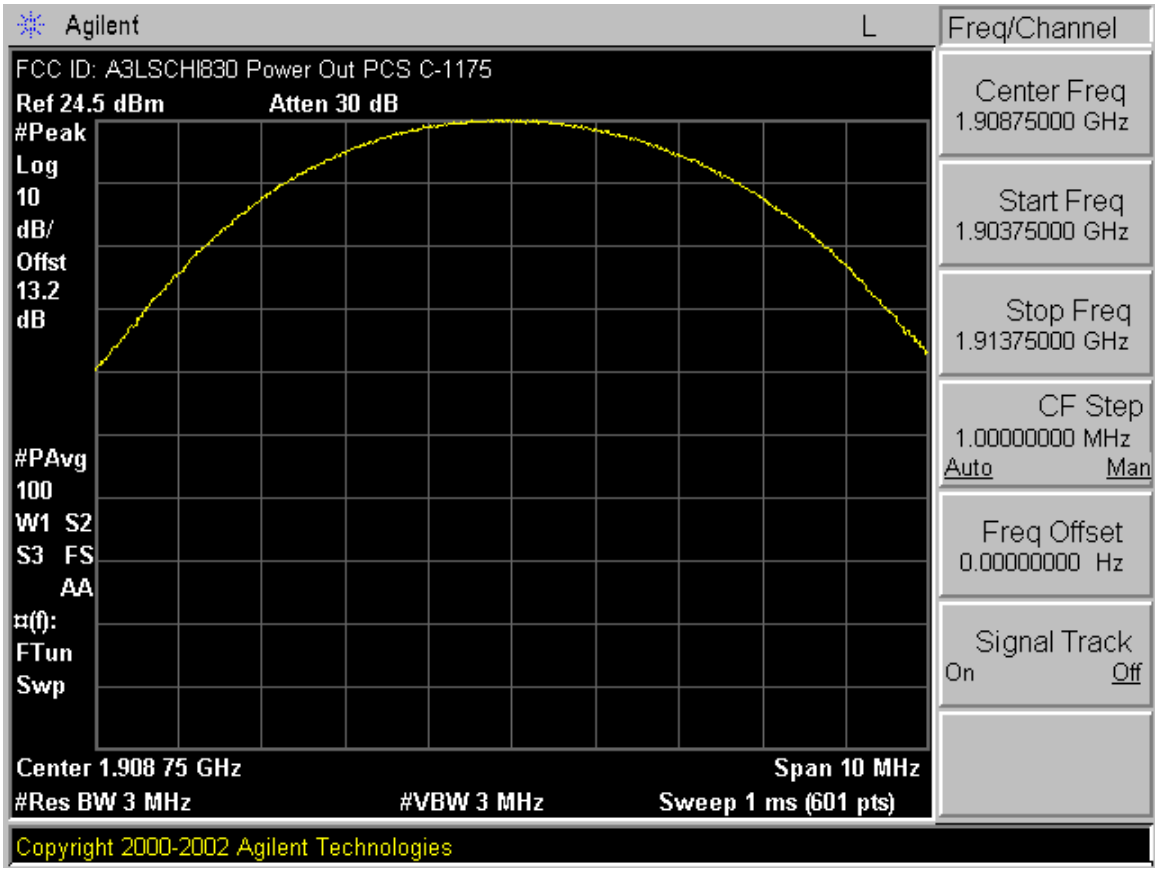
Agilent
L
Freq/Channel
FCC ID: A3LSCHI830 Power Out PCS C-1175
Ref 24.5 dBm
Atten 30 dB
#Peak
Log
10
dB/
Offst
13.2
dB
#PAvg
100
W1 S2
S3 FS
AA
¤(f):
FTun
Swp
Center 1.908 75 GHz
Span 10 MHz
#Res BW 3 MHz
#VBW 3 MHz
Sweep 1 ms (601 pts)
Center Freq
1.90875000 GHz
Start Freq
1.90375000 GHz
Stop Freq
1.91375000 GHz
CF Step
1.00000000 MHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies

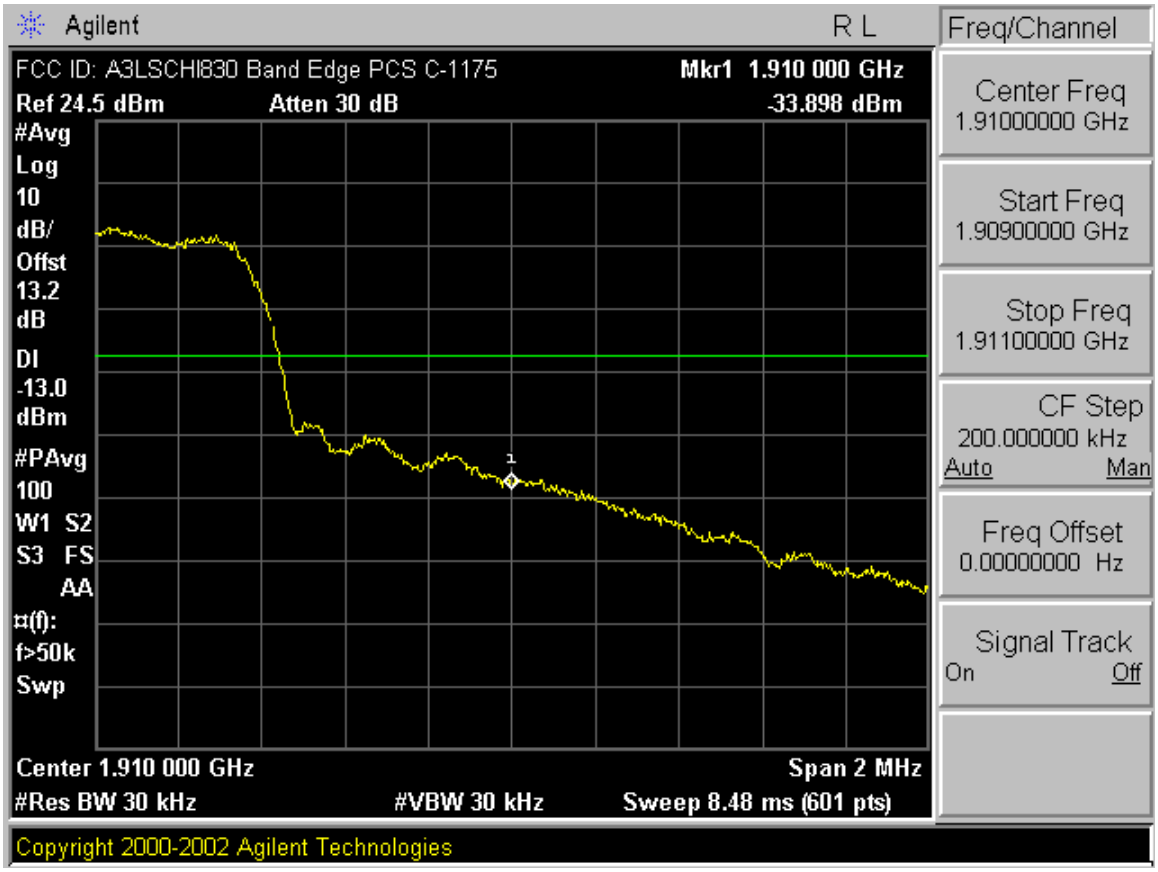
Agilent
R L
Freq/Channel
FCC ID: A3LSCHI830 Band Edge PCS C-1175
Mkr1 1.910 000 GHz
Ref 24.5 dBm
Atten 30 dB
-33.898 dBm
#Avg
Log
10
dB/
Offst
13.2
dB
Dl
-13.0
dBm
#PAvg
100
W1 S2
S3 FS
AA
¤(f):
f>50k
Swp
Center 1.910 000 GHz
Span 2 MHz
#Res BW 30 kHz
#VBW 30 kHz
Sweep 8.48 ms (601 pts)
Center Freq
1.91000000 GHz
Start Freq
1.90900000 GHz
Stop Freq
1.91100000 GHz
CF Step
200.000000 kHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies

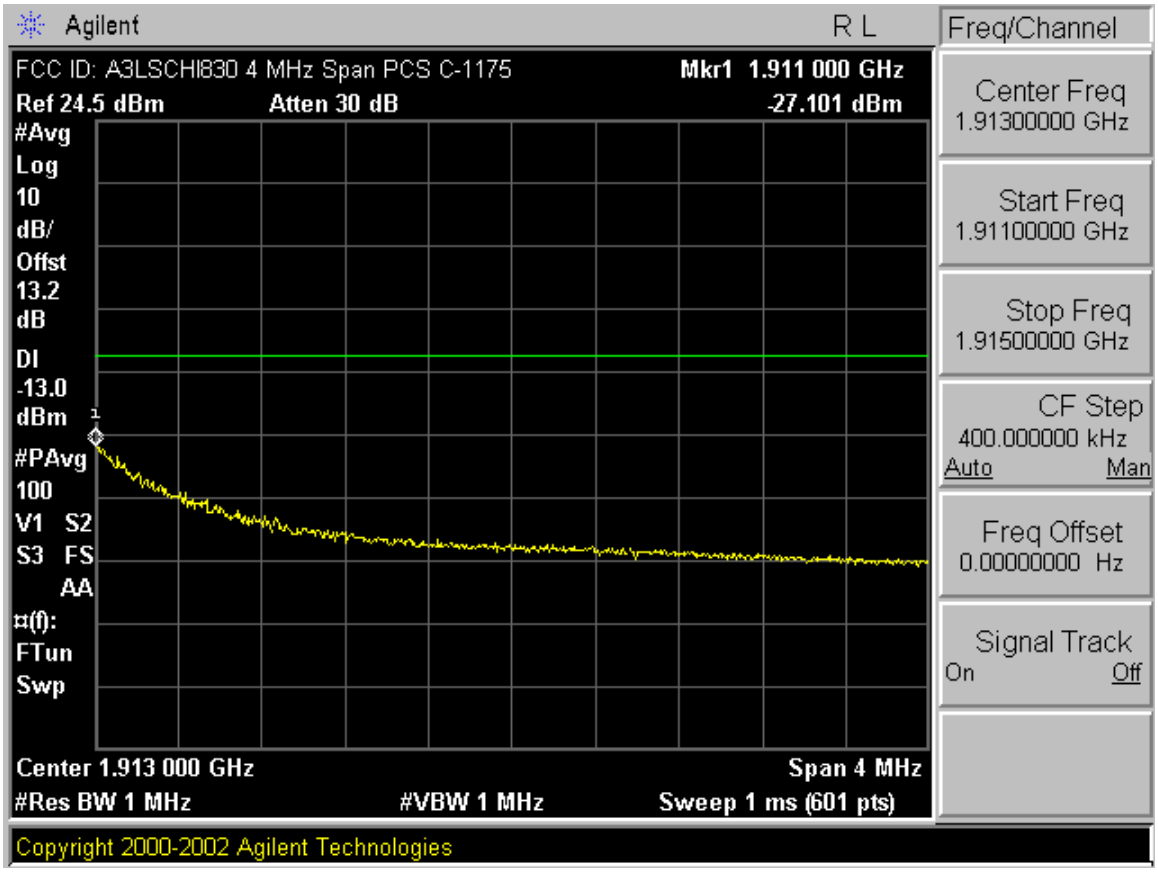
Agilent
R L
Freq/Channel
FCC ID: A3LSCHI830 4 MHz Span PCS C-1175
Mkr1 1.911 000 GHz
Ref 24.5 dBm
Atten 30 dB
-27.101 dBm
#Avg
Log
10
dB/
Offst
13.2
dB
Dl
-13.0
dBm
#PAvg
100
V1 S2
S3 FS
AA
¤(f):
FTun
Swp
Center 1.913 000 GHz
Span 4 MHz
#Res BW 1 MHz
#VBW 1 MHz
Sweep 1 ms (601 pts)
Center Freq
1.91300000 GHz
Start Freq
1.91100000 GHz
Stop Freq
1.91500000 GHz
CF Step
400.000000 kHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies

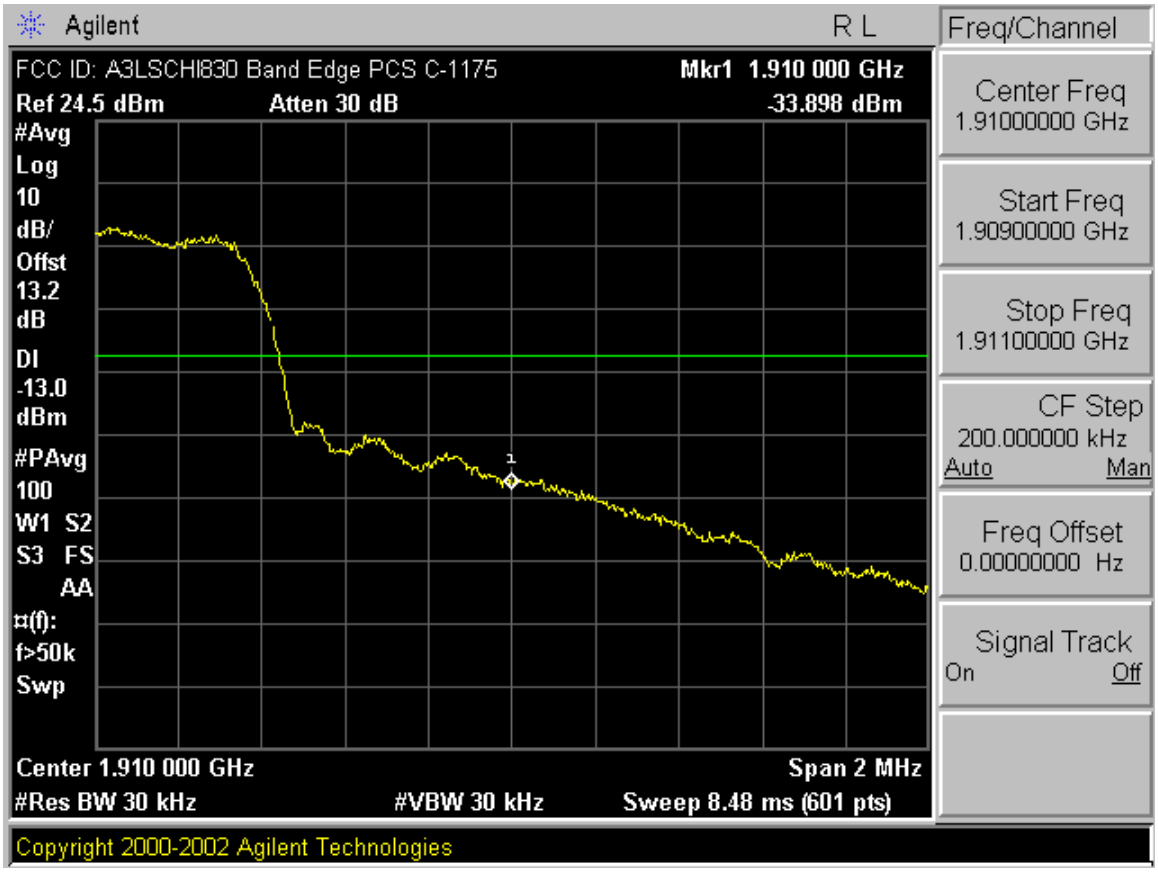
Agilent
R L
Freq/Channel
FCC ID: A3LSCHI830 Band Edge PCS C-1175
Mkr1 1.910 000 GHz
Ref 24.5 dBm
Atten 30 dB
-33.898 dBm
#Avg
Log
10
dB/
Offst
13.2
dB
Dl
-13.0
dBm
#PAvg
100
W1 S2
S3 FS
AA
¤(f):
f>50k
Swp
Center 1.910 000 GHz
Span 2 MHz
#Res BW 30 kHz
#VBW 30 kHz
Sweep 8.48 ms (601 pts)
Center Freq
1.91000000 GHz
Start Freq
1.90900000 GHz
Stop Freq
1.91100000 GHz
CF Step
200.000000 kHz
Auto
Man
Freq Offset
0.00000000 Hz
Signal Track
On
Off
Copyright 2000-2002 Agilent Technologies