

FCC RF Test Report

APPLICANT : SAMSUNG ELECTRONICS CO., LTD.
EQUIPMENT : Mobile
BRAND NAME : SAMSUNG
MODEL NAME : SCH-I939I
FCC ID : A3LSCHI939I
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jan. 03, 2014 and testing was completed on Jan. 25, 2014. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C.

TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Site.....	7
1.7 Applied Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency Channel	8
2.2 Pre-Scanned RF Power.....	9
2.3 Test Mode.....	11
2.4 Connection Diagram of Test System.....	13
2.5 Support Unit used in test configuration and system	14
2.6 EUT Operation Test Setup	14
2.7 Measurement Results Explanation Example.....	15
3 TEST RESULT	16
3.1 6dB Bandwidth Measurement	16
3.2 Output Power Measurement.....	19
3.3 Power Spectral Density Measurement	22
3.4 Conducted Band Edges and Spurious Emission Measurement	25
3.5 Radiated Band Edges and Spurious Emission Measurement	43
3.6 AC Conducted Emission Measurement.....	69
3.7 Antenna Requirements.....	73
4 LIST OF MEASURING EQUIPMENT	74
5 UNCERTAINTY OF EVALUATION	75

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR410307C	Rev. 01	Initial issue of report	Feb. 13, 2014

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 13.5 dB at 2359.860 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 3.04 dB at 13.620 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

SAMSUNG ELECTRONICS CO., LTD.

416 Maetan-3dong, Yeongtong-gu, Suwon-City, Gyeonggi-do, 443-742, Korea

1.2 Manufacturer

SAMSUNG ELECTRONICS CO., LTD.

416 Maetan-3dong, Yeongtong-gu, Suwon-City, Gyeonggi-do, 443-742, Korea

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile
Brand Name	SAMSUNG
Model Name	SCH-I939I
FCC ID	A3LSCHI939I
GSM Operating Band(s)	GSM 850/900/1800/1900MHz
GPRS/EGPRS Multislot Class	GPRS Class 10, EGPRS Class 10
WCDMA Operating Band(s)	FDDI/FDDII/FDDV
CDMA Operating Band(s)	BC0
Wi-Fi Specification	2.4GHz 802.11b/g/n (HT20) 5GHz 802.11a/n (HT20/HT40)
Bluetooth Version	Bluetooth v3.0+EDR, Bluetooth v4.0 LE
NFC Specification	Type A/B
HW Version	I939I.02
SW Version	I939IKEUAMK1
EUT Stage	Pre-Production

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz 802.11a/n: 5745~5825MHz.
Maximum (Peak) Output Power to Antenna	<2412 MHz ~ 2462 MHz> 802.11b : 16.73 dBm (0.0471 W) 802.11g : 17.84 dBm (0.0608 W) 802.11n HT20 : 17.68 dBm (0.0586 W) <5745 MHz ~ 5825 MHz> 802.11a : 19.53 dBm (0.0897 W) 802.11n HT20 : 18.95 dBm (0.0785 W) 802.11n HT40 : 17.45 dBm (0.0556 W)
Antenna Type	802.11b/g/n : FPCB Antenna with gain -1.00 dBi 802.11a/n : FPCB Antenna with gain 2.6 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Site

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.			
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755-3320-2398			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-SZ	03CH01-SZ	CO01-SZ	831040

Note: The test site complies with ANSI C63.4 2003 requirement.

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ANSI C63.4-2003

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane for 2.4GHz, Z plane for 5GHz) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4	149	5745	159	5795
	151	5755	161	5805
	153	5765	165	5825
	157	5785	-	-

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	16.41	16.45	16.45	16.49
CH 06	2437 MHz	16.38	16.36	16.42	16.38
CH 11	2462 MHz	16.64	16.68	16.73	16.72

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	17.84	17.78	17.72	17.75	17.76	17.83	17.81	17.82
CH 06	2437 MHz	17.25	17.23	17.20	17.22	17.21	17.22	17.23	17.18
CH 11	2462 MHz	17.06	17.02	16.98	17.02	17.04	17.03	17.07	17.14

Channel	Frequency	2.4GHz 802.11n HT20 RF Power (dBm)							
		OFDM Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	17.68	17.65	17.63	17.62	17.63	17.64	17.61	17.63
CH 06	2437 MHz	17.14	17.09	17.10	17.11	17.13	17.11	17.19	17.14
CH 11	2462 MHz	16.96	16.92	16.95	16.94	16.98	17.08	17.02	17.11

Channel	Frequency	5GHz 802.11a RF Power (dBm)							
		OFDM Data Rate							
		6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 149	5745 MHz	19.53	19.41	19.43	19.41	19.45	19.46	19.47	19.49
CH 157	5785 MHz	19.01	18.98	18.92	18.96	18.98	18.92	18.95	19.06
CH 165	5825 MHz	19.17	19.12	19.22	19.25	19.28	19.22	19.28	19.32

Channel	Frequency	5GHz 802.11n HT20 RF Power (dBm)							
		OFDM Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 149	5745 MHz	18.95	18.91	18.92	18.90	18.92	18.88	18.91	18.93
CH 157	5785 MHz	18.52	18.51	18.45	18.48	18.44	18.47	18.46	18.43
CH 165	5825 MHz	18.88	18.86	18.82	18.84	18.75	18.76	18.85	18.91

Channel	Frequency	5GHz 802.11n HT40 RF Power (dBm)							
		OFDM Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH151	5755MHz	17.45	17.44	17.42	17.41	17.35	17.38	17.41	17.38
CH159	5795MHz	17.37	17.32	17.36	17.33	17.32	17.31	17.35	17.34

2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.

<2.4GHz>

Test Cases				
Conducted TCs	Test Items	Mode	Data Rate	Test Channel
	6dB BW Power Spectral Density	802.11b	5.5 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
	Output Power	802.11b	5.5 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
	Conducted Band Edge	802.11b	5.5 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
	Conducted Spurious Emission	802.11b	5.5 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
Radiated TCs	Radiated Band Edge	802.11b	5.5 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
	Radiated Spurious Emission	802.11b	5.5 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11


<5GHz>

Test Cases				
Conducted TCs	Test Items	Mode	Data Rate	Test Channel
	6dB BW Power Spectral Density	802.11a	6 Mbps	149/157/165
		802.11n HT20	MCS0	149/157/165
		802.11n HT40	MCS0	151/159
	Output Power	802.11a	6 Mbps	149/157/165
		802.11n HT20	MCS0	149/157/165
		802.11n HT40	MCS0	151/159
	Conducted Band Edge	802.11a	6 Mbps	149/165
		802.11n HT20	MCS0	149/165
		802.11n HT40	MCS0	151/159
	Conducted Spurious Emission	802.11a	6 Mbps	149/157/165
		802.11n HT20	MCS0	149/157/165
		802.11n HT40	MCS0	151/159
Radiated TCs	Radiated Spurious Emission	802.11a	6 Mbps	149/157/165
		802.11n HT20	MCS0	149/157/165
		802.11n HT40	MCS0	151/159


Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN (2.4GHz) Link + USB Cable (Charging from Adapter) + Earphone + NFC ON
	Mode 2 : GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + USB Cable (Charging from Adapter) + Earphone + NFC ON
Remark: The worst case of AC conducted emission is mode 2; only the test data of it was reported.	

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

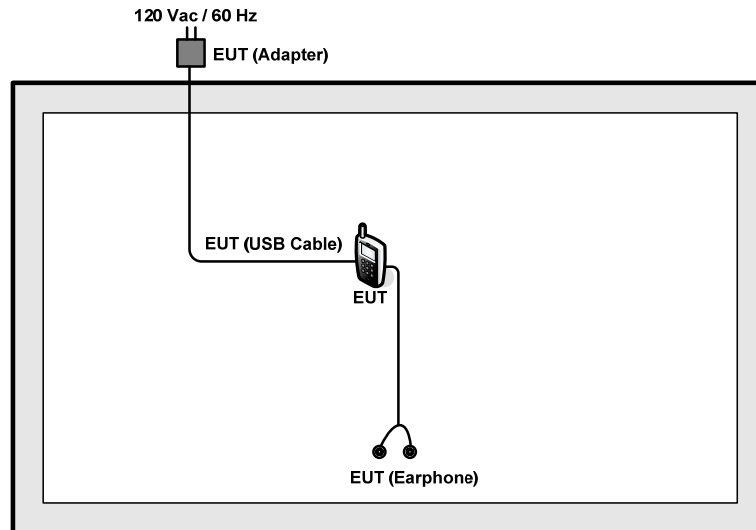

<AC Conducted Emission Mode>

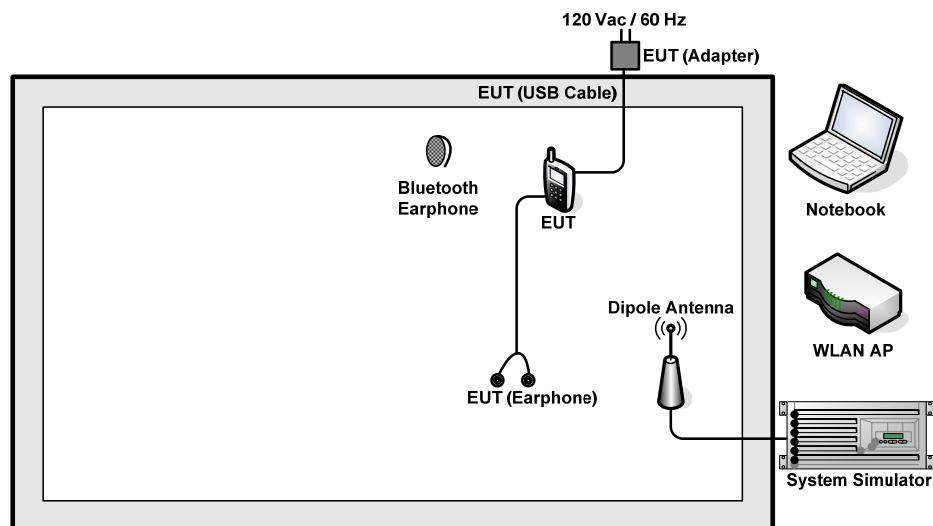

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMW 500	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	TOPWORD	3303DR	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-815	KA2DIR815A1	N/A	Unshielded, 1.8 m
4.	Notebook	Dell	Vostro2420	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-108	PYAHS-107W	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7.5 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 7.5 + 10 = 17.5 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

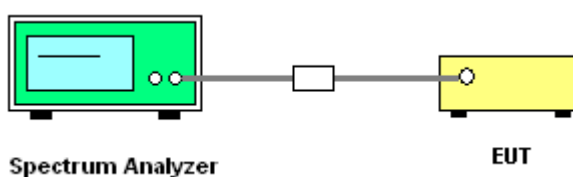


3.1.5 Test Result of 6dB Bandwidth

Test Band :	2.4GHz + 5GHz band 4	Temperature :	24~26℃
Test Engineer :	Blithe Li	Relative Humidity :	50~53%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
11b	5.5Mbps	1	1	2412	8.08	0.5	Pass
11b	5.5Mbps	1	6	2437	8.32	0.5	Pass
11b	5.5Mbps	1	11	2462	7.88	0.5	Pass
11g	6Mbps	1	1	2412	16.36	0.5	Pass
11g	6Mbps	1	6	2437	16.36	0.5	Pass
11g	6Mbps	1	11	2462	16.36	0.5	Pass
HT20	MCS0	1	1	2412	17.60	0.5	Pass
HT20	MCS0	1	6	2437	17.56	0.5	Pass
HT20	MCS0	1	11	2462	17.58	0.5	Pass

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
11a	6Mbps	1	149	5745	16.36	0.5	Pass
11a	6Mbps	1	157	5785	16.36	0.5	Pass
11a	6Mbps	1	165	5825	16.36	0.5	Pass
HT20	MCS0	1	149	5745	17.56	0.5	Pass
HT20	MCS0	1	157	5785	17.58	0.5	Pass
HT20	MCS0	1	165	5825	17.56	0.5	Pass
HT40	MCS0	1	151	5755	35.52	0.5	Pass
HT40	MCS0	1	159	5795	35.12	0.5	Pass

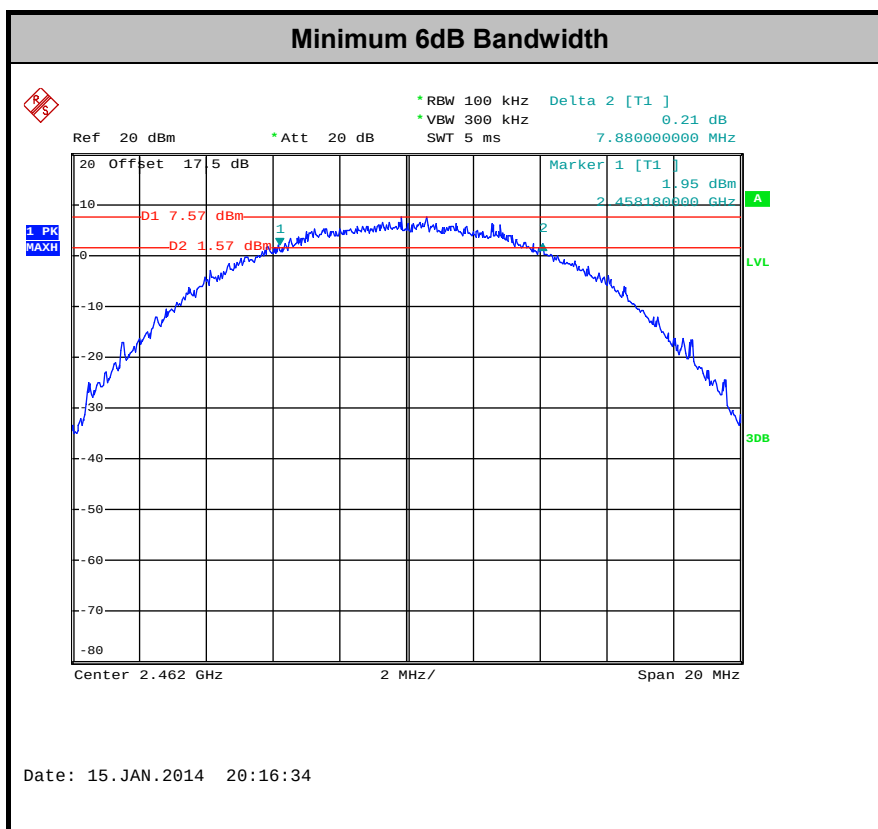

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz and 5725-5850MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

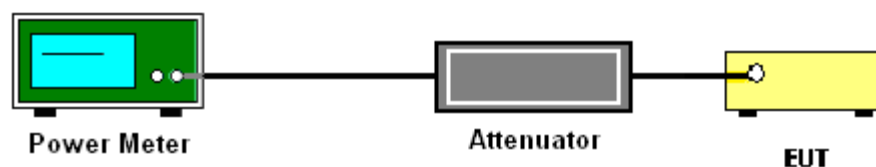

3.2.5 Test Result of Peak Output Power

Test Mode :	2.4GHz + 5GHz band 4	Temperature :	24~26℃
Test Engineer :	Blithe Li	Relative Humidity :	50~53%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	RF Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	5.5Mbps	1	1	2412	16.45	30	-1.00	Pass
11b	5.5Mbps	1	6	2437	16.42	30	-1.00	Pass
11b	5.5Mbps	1	11	2462	16.73	30	-1.00	Pass
11g	6Mbps	1	1	2412	17.84	30	-1.00	Pass
11g	6Mbps	1	6	2437	17.25	30	-1.00	Pass
11g	6Mbps	1	11	2462	17.06	30	-1.00	Pass
HT20	MCS0	1	1	2412	17.68	30	-1.00	Pass
HT20	MCS0	1	6	2437	17.14	30	-1.00	Pass
HT20	MCS0	1	11	2462	16.96	30	-1.00	Pass

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	RF Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11a	6Mbps	1	149	5745	19.53	30	2.6	Pass
11a	6Mbps	1	157	5785	19.01	30	2.6	Pass
11a	6Mbps	1	165	5825	19.17	30	2.6	Pass
HT20	MCS0	1	149	5745	18.95	30	2.6	Pass
HT20	MCS0	1	157	5785	18.52	30	2.6	Pass
HT20	MCS0	1	165	5825	18.88	30	2.6	Pass
HT40	MCS0	1	151	5755	17.45	30	2.6	Pass
HT40	MCS0	1	159	5795	17.37	30	2.6	Pass

Note: Measured power (dBm) has offset with cable loss.

3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	2.4GHz + 5GHz band 4	Temperature :	24~26℃
Test Engineer :	Blithe Li	Relative Humidity :	50~53%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Duty Factor (dB)	Average Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	5.5Mbps	1	1	2412	0.25	13.92	30	-1.00	Pass
11b	5.5Mbps	1	6	2437	0.25	14.12	30	-1.00	Pass
11b	5.5Mbps	1	11	2462	0.25	14.68	30	-1.00	Pass
11g	6Mbps	1	1	2412	0.30	10.66	30	-1.00	Pass
11g	6Mbps	1	6	2437	0.30	11.45	30	-1.00	Pass
11g	6Mbps	1	11	2462	0.30	11.28	30	-1.00	Pass
HT20	MCS0	1	1	2412	0.35	9.89	30	-1.00	Pass
HT20	MCS0	1	6	2437	0.35	10.63	30	-1.00	Pass
HT20	MCS0	1	11	2462	0.35	10.42	30	-1.00	Pass

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Duty Factor (dB)	Average Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11a	6Mbps	1	149	5745	0.32	12.71	30	2.6	Pass
11a	6Mbps	1	157	5785	0.32	11.64	30	2.6	Pass
11a	6Mbps	1	165	5825	0.32	12.63	30	2.6	Pass
HT20	MCS0	1	149	5745	0.33	10.85	30	2.6	Pass
HT20	MCS0	1	157	5785	0.33	10.00	30	2.6	Pass
HT20	MCS0	1	165	5825	0.33	10.82	30	2.6	Pass
HT40	MCS0	1	151	5755	0.63	8.78	30	2.6	Pass
HT40	MCS0	1	159	5795	0.63	8.54	30	2.6	Pass

Note: Measured power (dBm) has offset with cable loss and duty factor.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

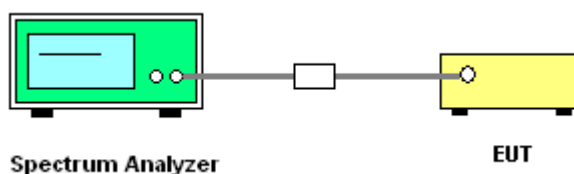


3.3.5 Test Result of Power Spectral Density

Test Mode :	2.4GHz + 5GHz band 4	Temperature :	24~26℃
Test Engineer :	Blithe Li	Relative Humidity :	50~53%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Peak Power Density (dBm/3kHz)	Max. Limits (dBm/3kHz)	DG (dBi)	Pass/Fail
11b	5.5Mbps	1	1	2412	-9.39	8	-1.00	Pass
11b	5.5Mbps	1	6	2437	-8.58	8	-1.00	Pass
11b	5.5Mbps	1	11	2462	-8.48	8	-1.00	Pass
11g	6Mbps	1	1	2412	-15.54	8	-1.00	Pass
11g	6Mbps	1	6	2437	-13.53	8	-1.00	Pass
11g	6Mbps	1	11	2462	-13.96	8	-1.00	Pass
HT20	MCS0	1	1	2412	-15.35	8	-1.00	Pass
HT20	MCS0	1	6	2437	-15.05	8	-1.00	Pass
HT20	MCS0	1	11	2462	-15.37	8	-1.00	Pass

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Peak Power Density (dBm/3kHz)	Max. Limits (dBm/3kHz)	DG (dBi)	Pass/Fail
11a	6Mbps	1	149	5745	-12.14	8	2.6	Pass
11a	6Mbps	1	157	5785	-11.01	8	2.6	Pass
11a	6Mbps	1	165	5825	-10.62	8	2.6	Pass
HT20	MCS0	1	149	5745	-14.03	8	2.6	Pass
HT20	MCS0	1	157	5785	-14.24	8	2.6	Pass
HT20	MCS0	1	165	5825	-12.93	8	2.6	Pass
HT40	MCS0	1	151	5755	-19.16	8	2.6	Pass
HT40	MCS0	1	159	5795	-18.88	8	2.6	Pass

Note: Measured power density (dBm) has offset with cable loss.

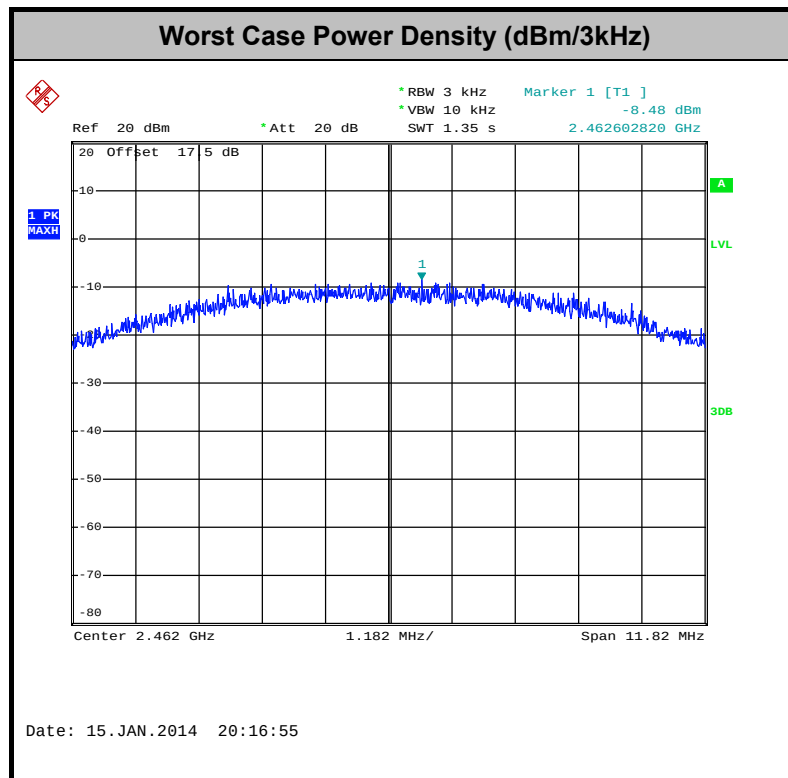

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

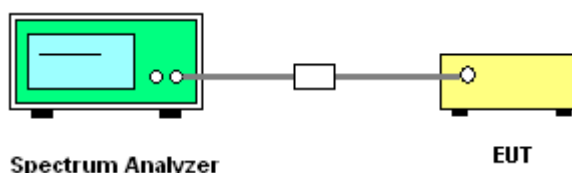


3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	24~26℃
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Blithe Li

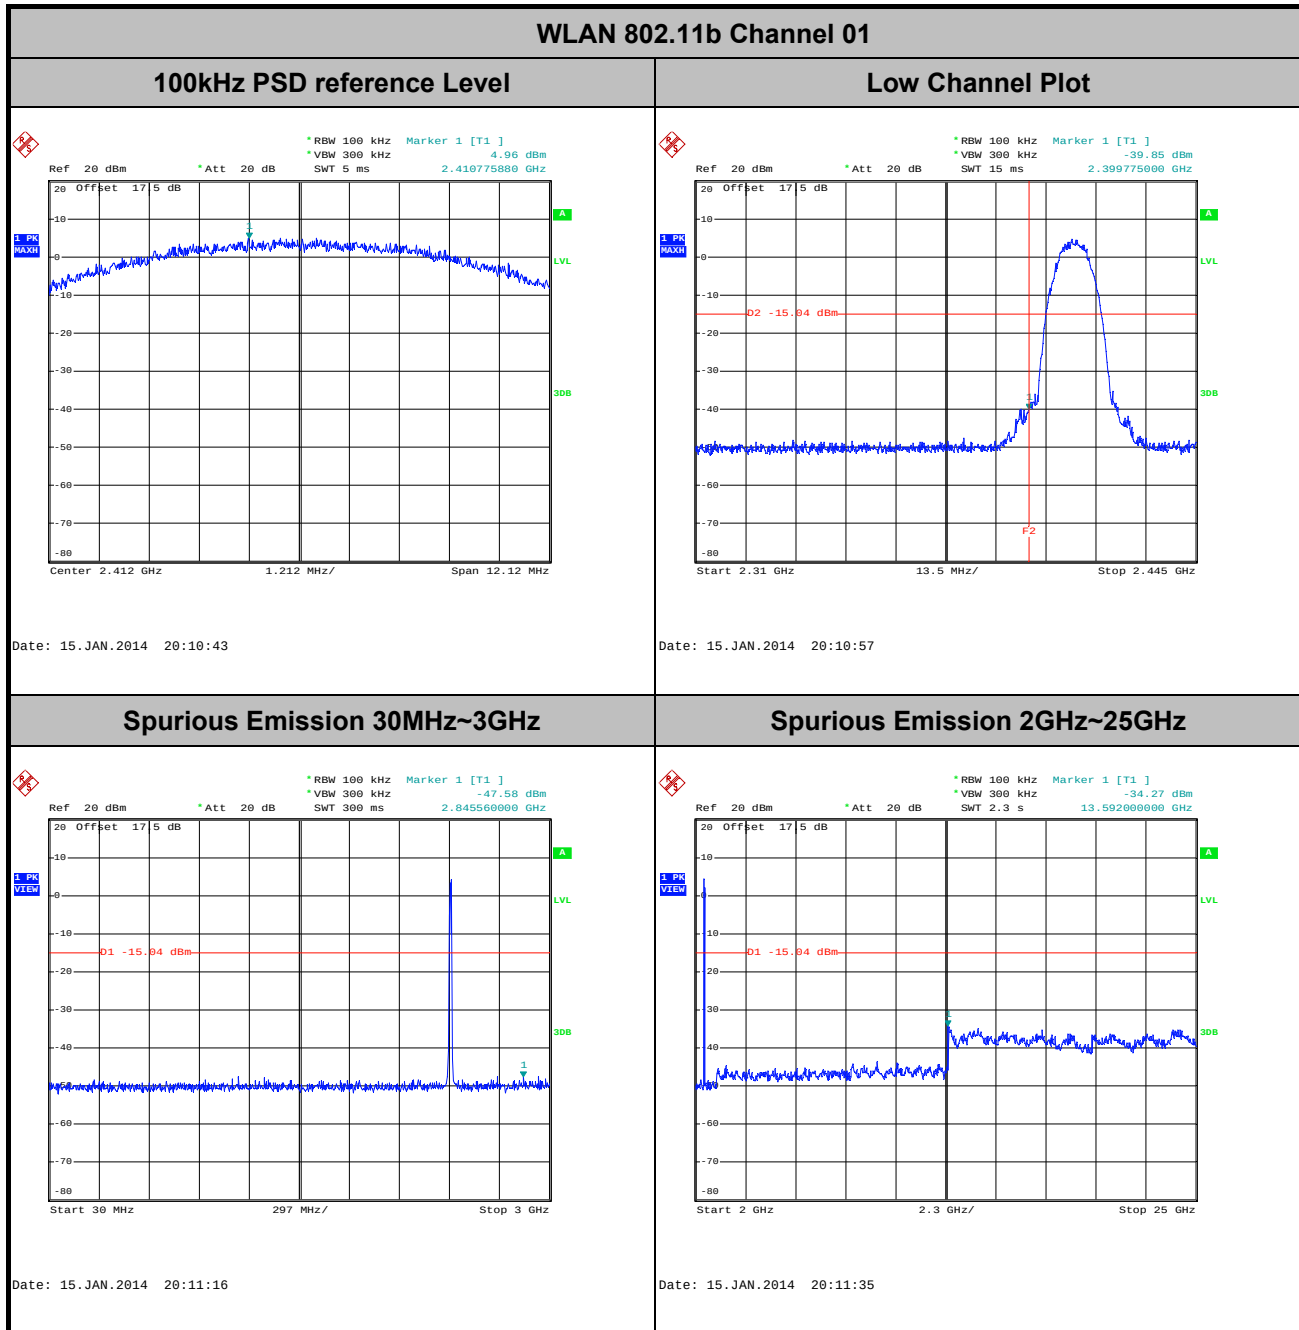





Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Blithe Li

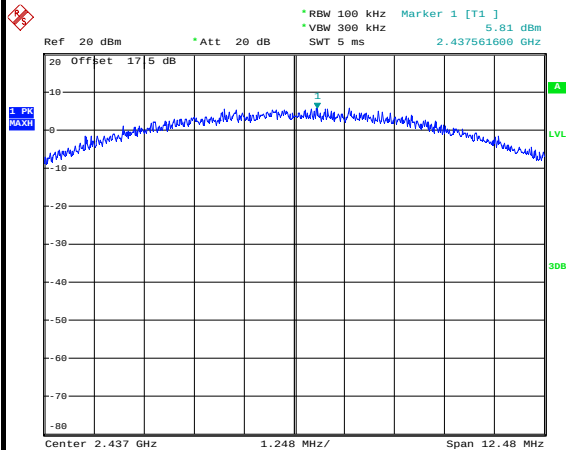WLAN 802.11b Channel 06**100kHz PSD reference Level**

Date: 15.JAN.2014 20:13:37

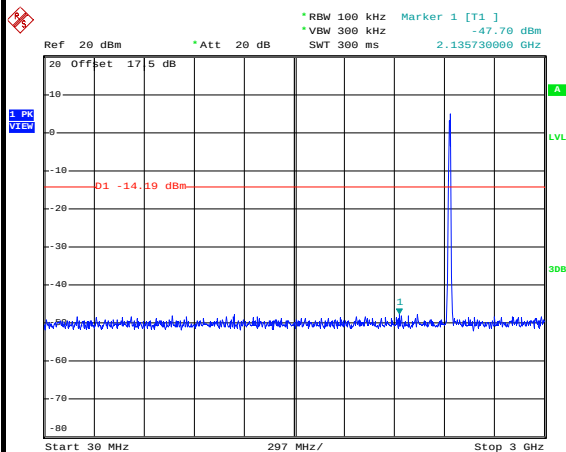Spurious Emission 30MHz~3GHz


Date: 15.JAN.2014 20:13:57

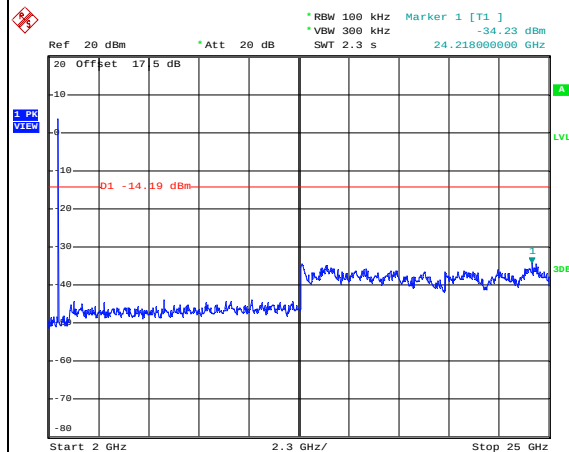Spurious Emission 2GHz~25GHz


Date: 15.JAN.2014 20:14:16




Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Blithe Li

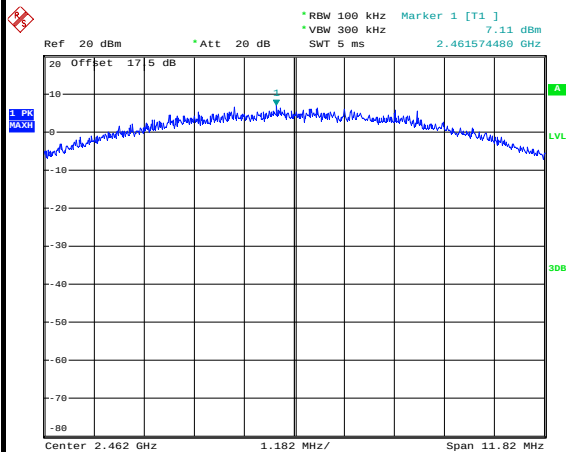WLAN 802.11b Channel 11**100kHz PSD reference Level**


Date: 15.JAN.2014 20:17:04

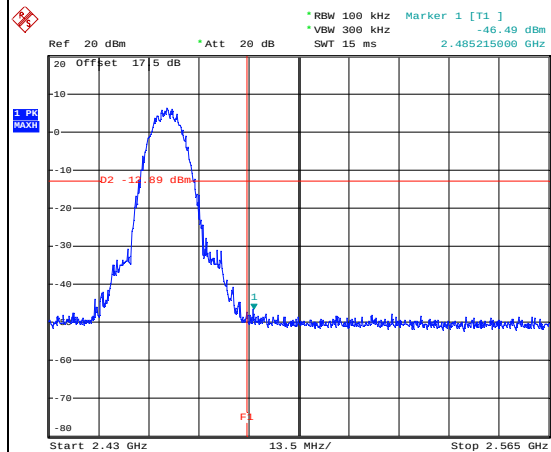High Channel Plot

Date: 15.JAN.2014 20:17:18

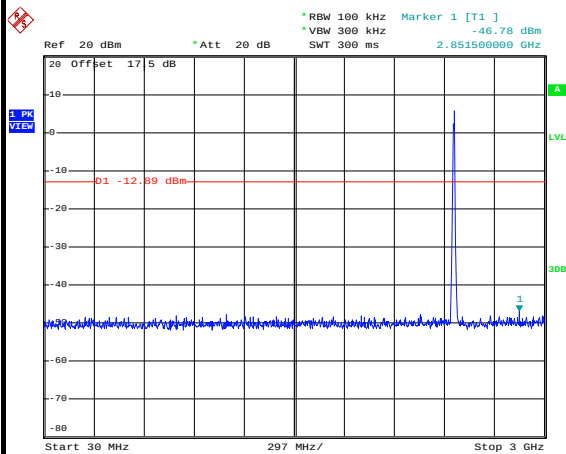Spurious Emission 30MHz~3GHz

Date: 15.JAN.2014 20:17:37

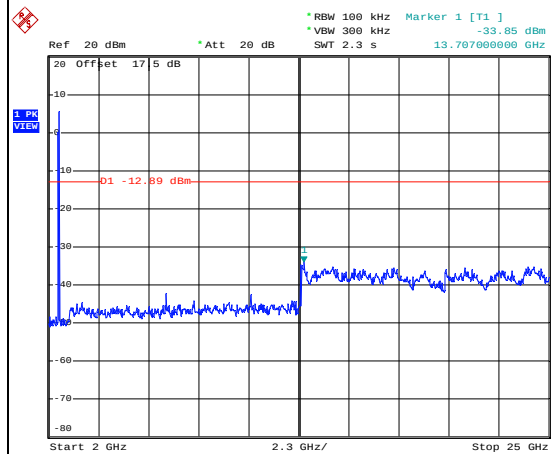Spurious Emission 2GHz~25GHz


Date: 15.JAN.2014 20:17:56



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Blithe Li


WLAN 802.11g Channel 01

100kHz PSD reference Level

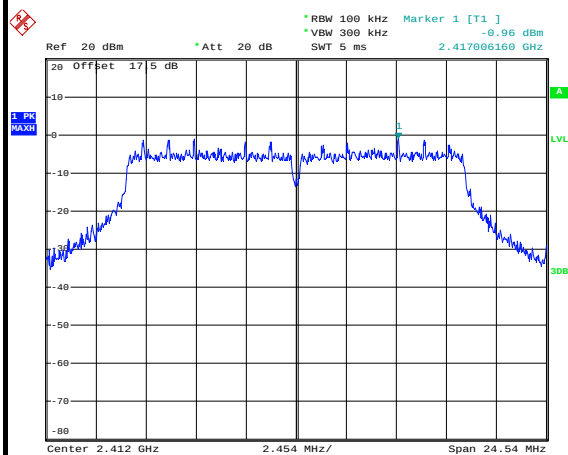


Date: 15.JAN.2014 20:27:41

Low Channel Plot

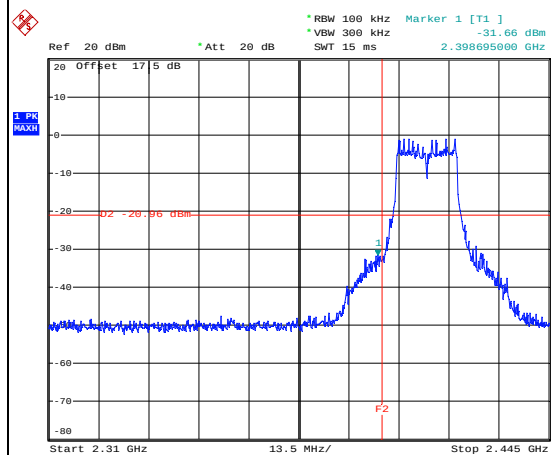


Date: 15.JAN.2014 20:27:55

Spurious Emission 30MHz~3GHz

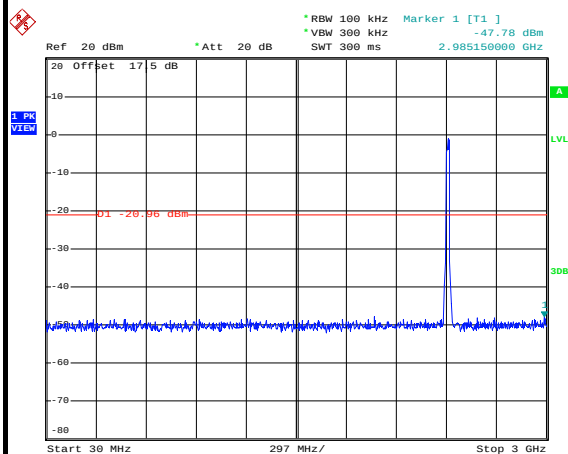

Date: 15.JAN.2014 20:28:14

Spurious Emission 2GHz~25GHz

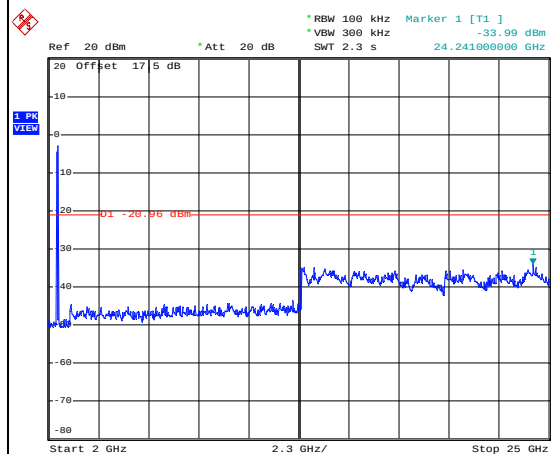


Date: 15.JAN.2014 20:28:33



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Blithe Li


WLAN 802.11g Channel 06

100kHz PSD reference Level

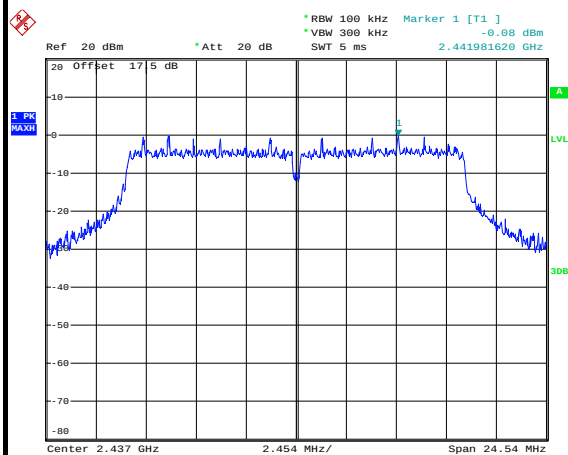


Date: 15.JAN.2014 20:24:03

Spurious Emission 30MHz~3GHz

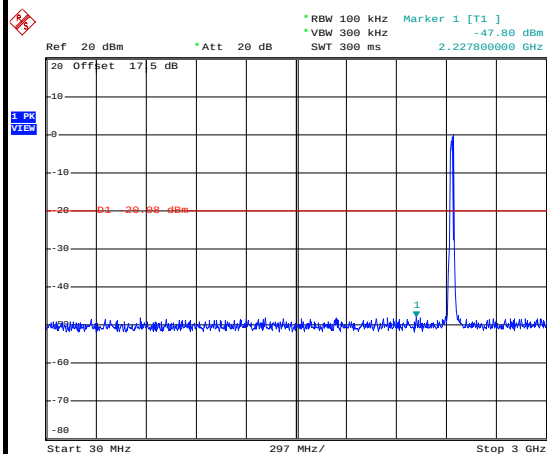

Date: 15.JAN.2014 20:24:23

Spurious Emission 2GHz~25GHz

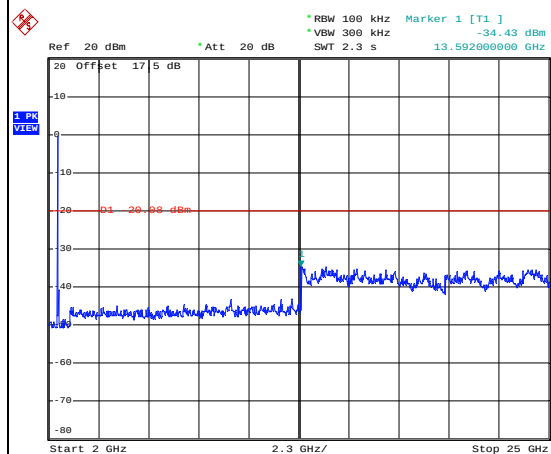


Date: 15.JAN.2014 20:24:41



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Blithe Li


WLAN 802.11g Channel 11

100kHz PSD reference Level

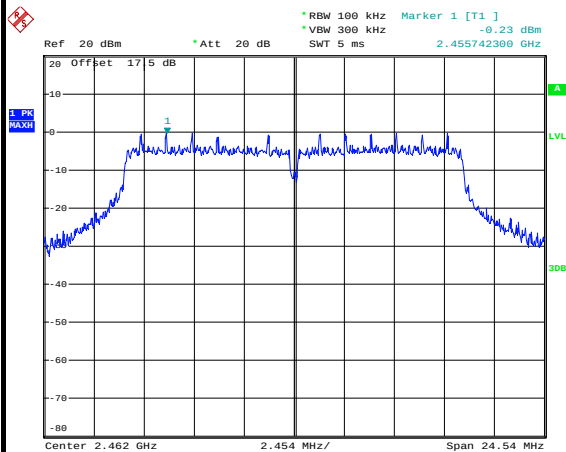


Date: 15.JAN.2014 20:20:34

High Channel Plot

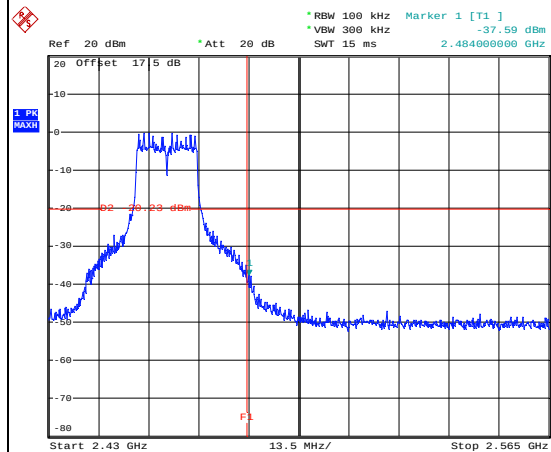


Date: 15.JAN.2014 20:20:48

Spurious Emission 30MHz~3GHz

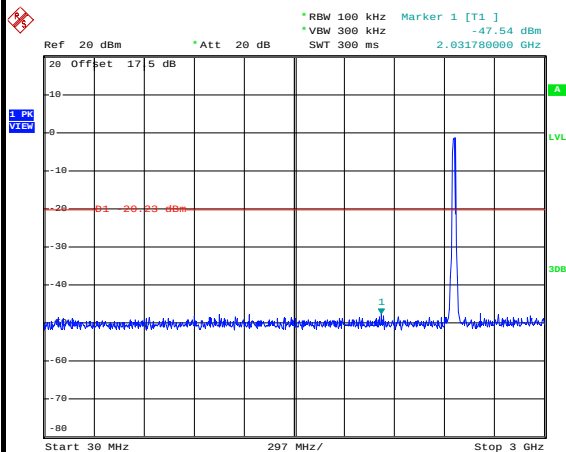

Date: 15.JAN.2014 20:21:08

Spurious Emission 2GHz~25GHz

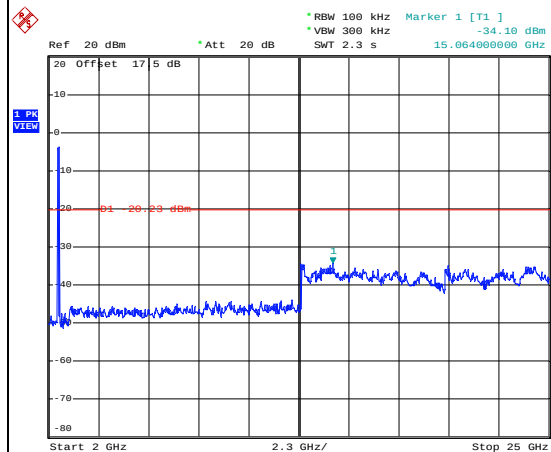


Date: 15.JAN.2014 20:21:26



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Blithe Li


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

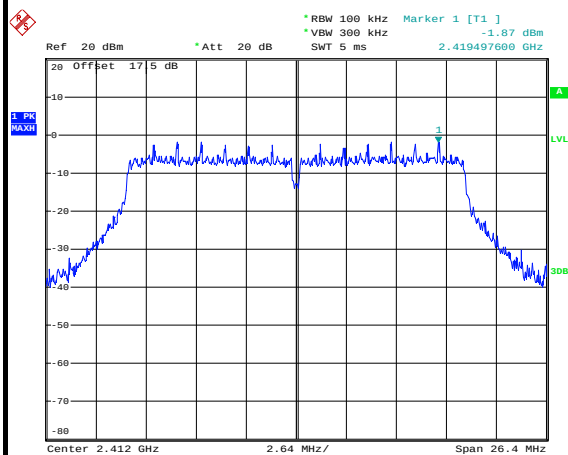


Date: 15.JAN.2014 20:34:00

Low Channel Plot

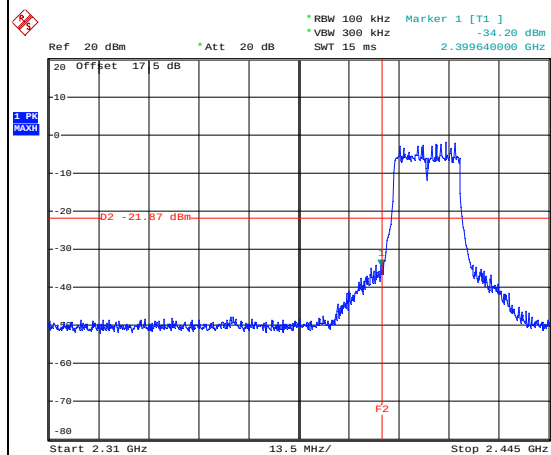


Date: 15.JAN.2014 20:34:14

Spurious Emission 30MHz~3GHz

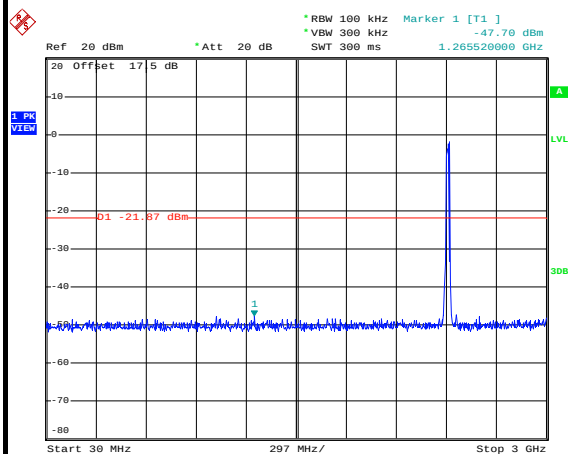

Date: 15.JAN.2014 20:34:33


Spurious Emission 2GHz~25GHz

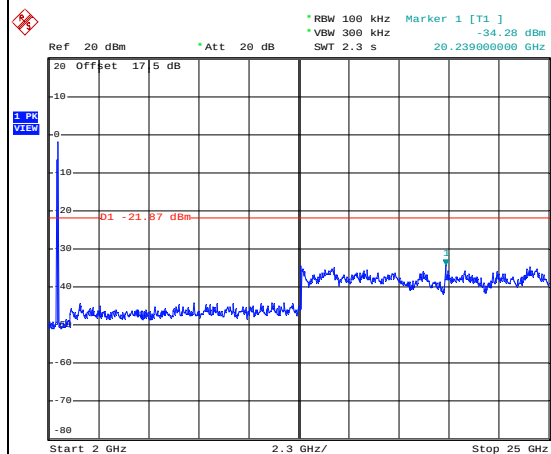


Date: 15.JAN.2014 20:34:52




Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Blithe Li

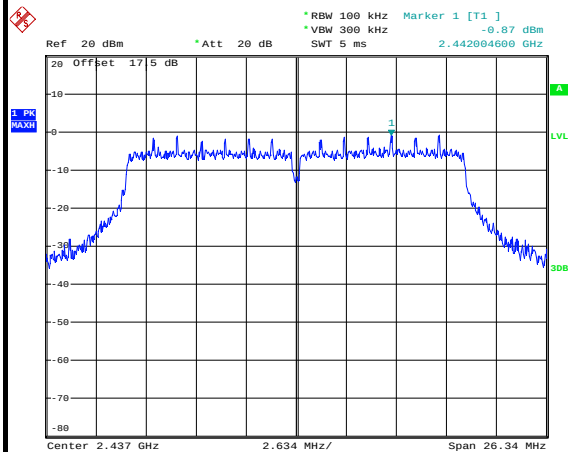WLAN 802.11n HT20 Channel 06**100kHz PSD reference Level**

Date: 15.JAN.2014 20:41:14

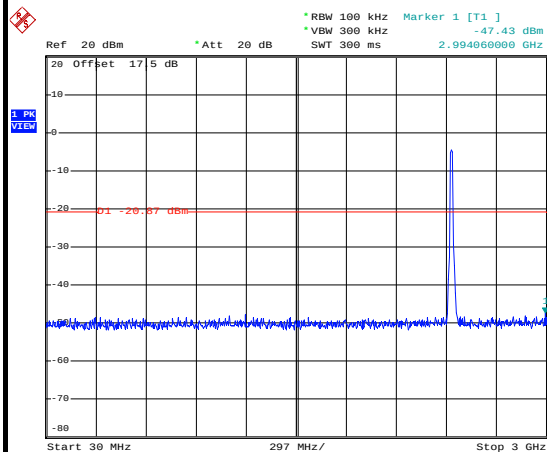Spurious Emission 30MHz~3GHz

Date: 15.JAN.2014 20:41:34

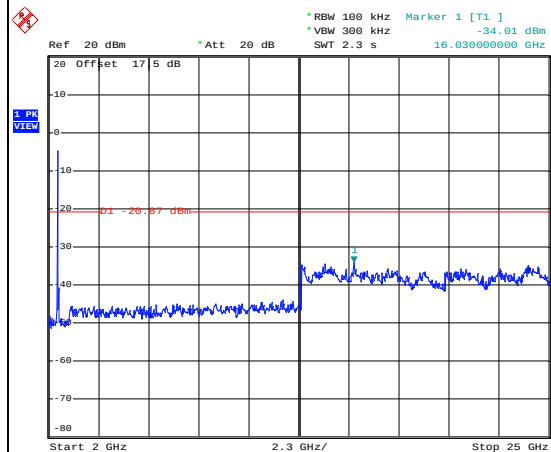Spurious Emission 2GHz~25GHz


Date: 15.JAN.2014 20:41:52



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Blithe Li


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

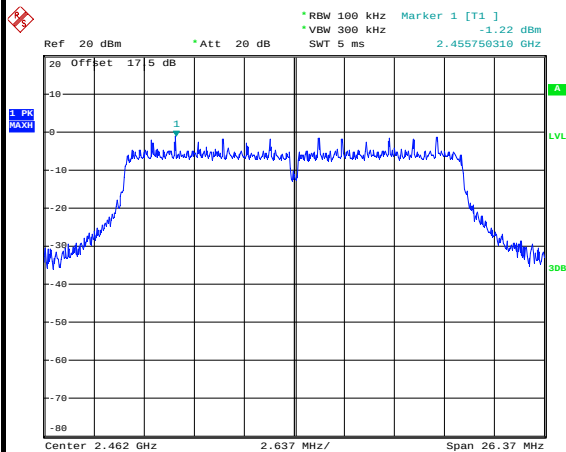


Date: 15.JAN.2014 20:44:23

High Channel Plot

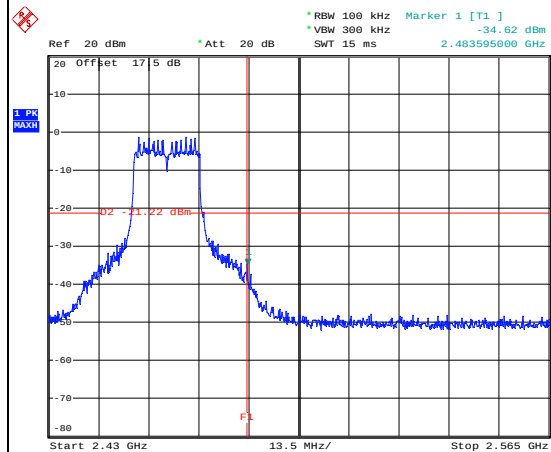


Date: 15.JAN.2014 20:44:37

Spurious Emission 30MHz~3GHz

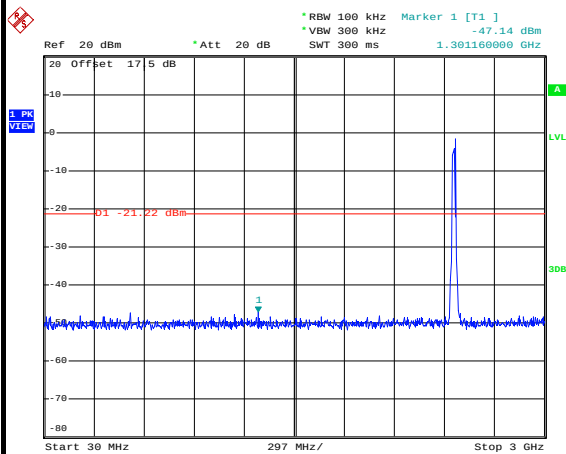

Date: 15.JAN.2014 20:44:56

Spurious Emission 2GHz~25GHz

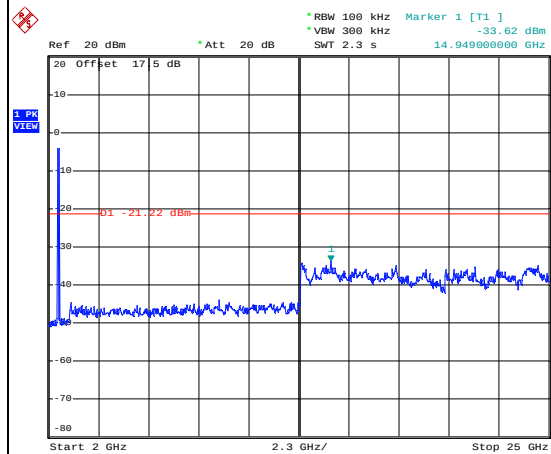


Date: 15.JAN.2014 20:45:15



Test Mode :	802.11a	Temperature :	24~26°C
Test Band :	5GHz Low	Relative Humidity :	50~53%
Test Channel :	149	Test Engineer :	Blithe Li


WLAN 802.11a Channel 149

100kHz PSD reference Level

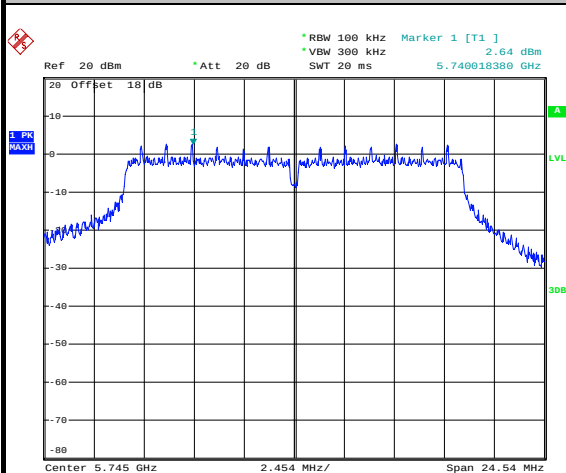


Date: 15.JAN.2014 20:53:55

Low Channel Plot

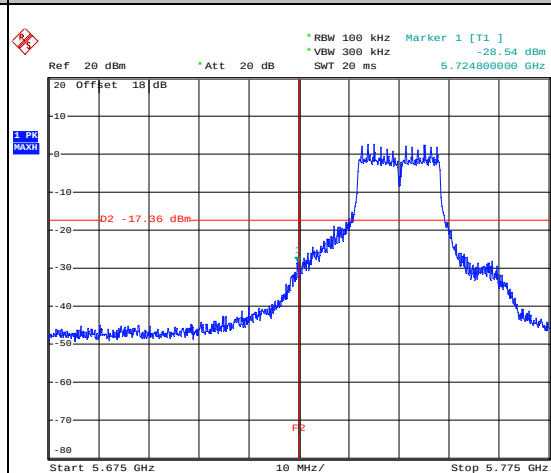


Date: 15.JAN.2014 20:54:09

Spurious Emission 30MHz~6GHz

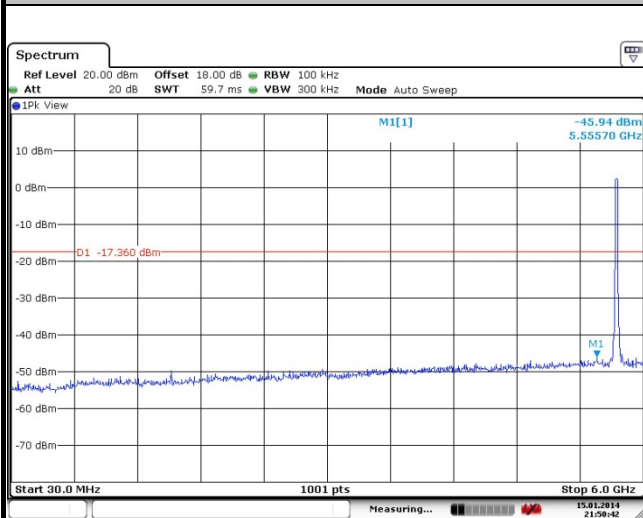

Date: 15.JAN.2014 21:50:42

Spurious Emission 5GHz~40GHz

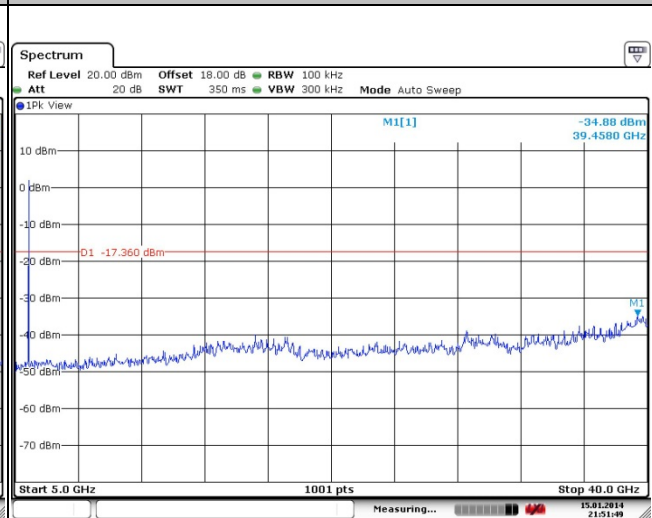


Date: 15.JAN.2014 21:51:49



Test Mode :	802.11a	Temperature :	24~26°C
Test Band :	5GHz Mid	Relative Humidity :	50~53%
Test Channel :	157	Test Engineer :	Blithe Li


WLAN 802.11a Channel 157

100kHz PSD reference Level

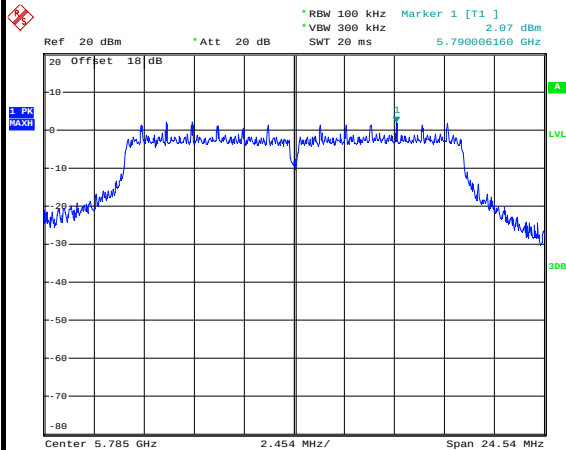


Date: 15.JAN.2014 21:03:02

Spurious Emission 30MHz~6GHz

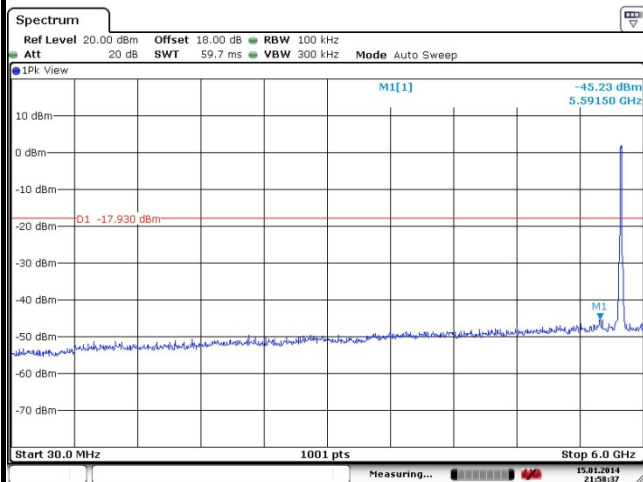

Date: 15.JAN.2014 21:58:37

Spurious Emission 5GHz~40GHz

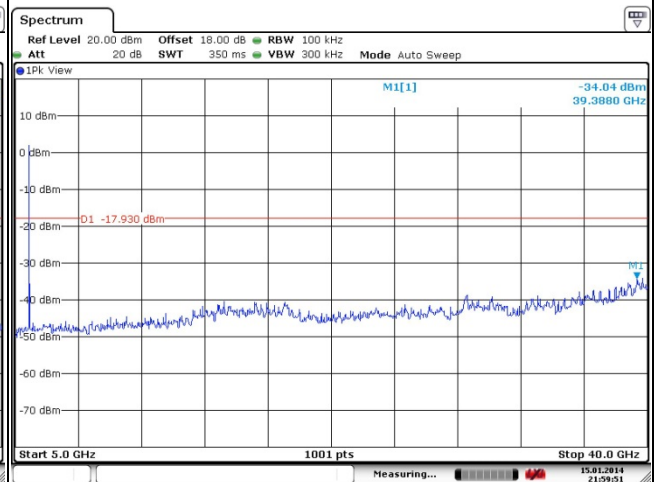


Date: 15.JAN.2014 21:59:51



Test Mode :	802.11a	Temperature :	24~26°C
Test Band :	5GHz High	Relative Humidity :	50~53%
Test Channel :	165	Test Engineer :	Blithe Li


WLAN 802.11a Channel 165

100kHz PSD reference Level

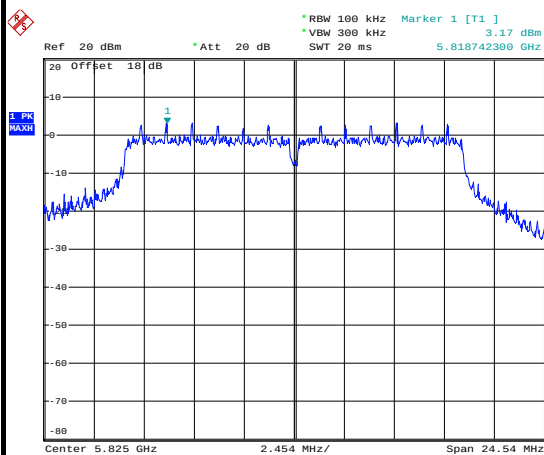


Date: 15.JAN.2014 21:12:11

High Channel Plot

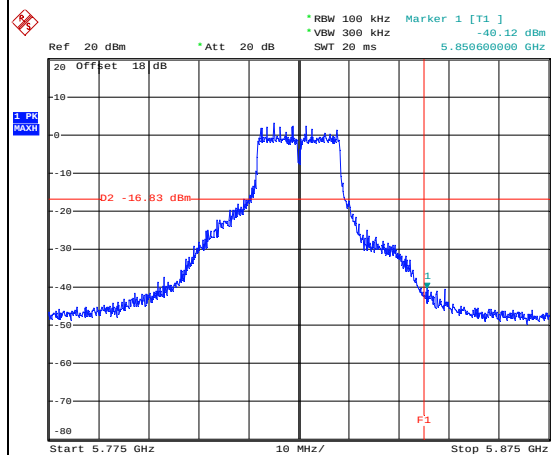


Date: 15.JAN.2014 21:22:43

Spurious Emission 30MHz~6GHz

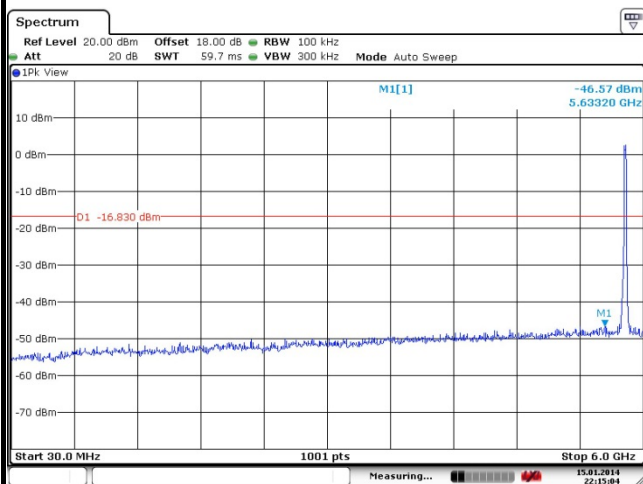

Date: 15.JAN.2014 22:15:04

Spurious Emission 5GHz~40GHz

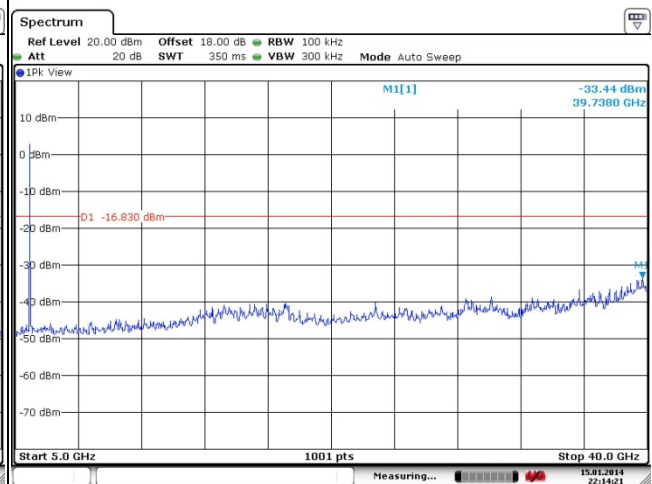


Date: 15.JAN.2014 22:14:21



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	5GHz Low	Relative Humidity :	50~53%
Test Channel :	149	Test Engineer :	Blithe Li


WLAN 802.11n HT20 Channel 149

100kHz PSD reference Level

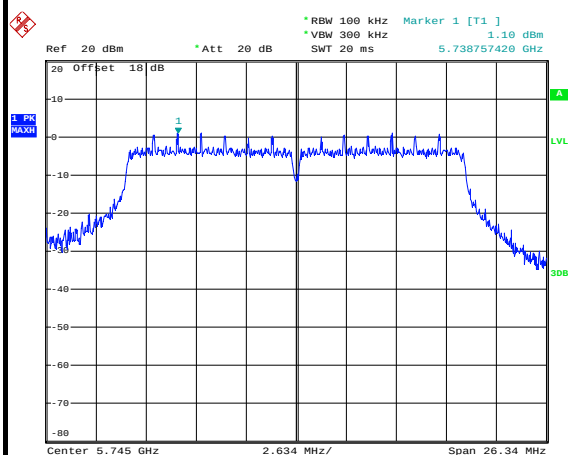


Date: 15.JAN.2014 21:27:34

Low Channel Plot

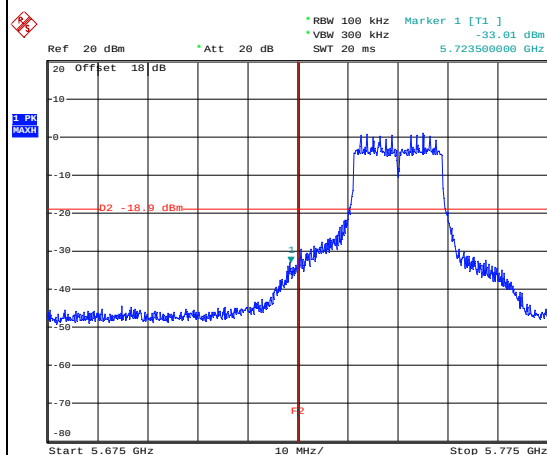


Date: 15.JAN.2014 21:31:05

Spurious Emission 30MHz~6GHz

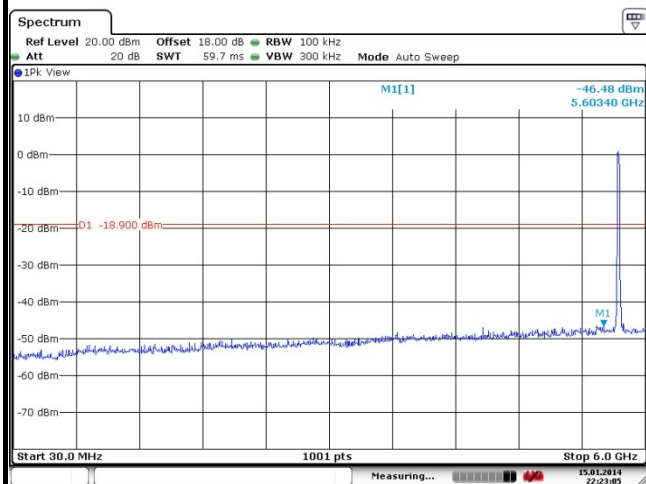

Date: 15.JAN.2014 22:23:05

Spurious Emission 5GHz~40GHz

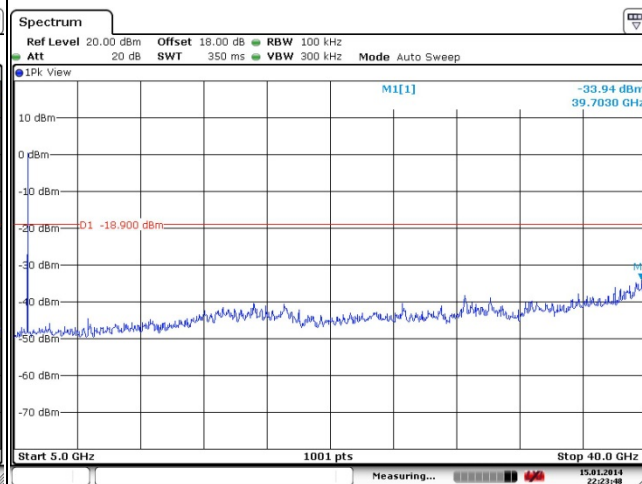


Date: 15.JAN.2014 22:23:48



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	5GHz Mid	Relative Humidity :	50~53%
Test Channel :	157	Test Engineer :	Blithe Li


WLAN 802.11n HT20 Channel 157

100kHz PSD reference Level

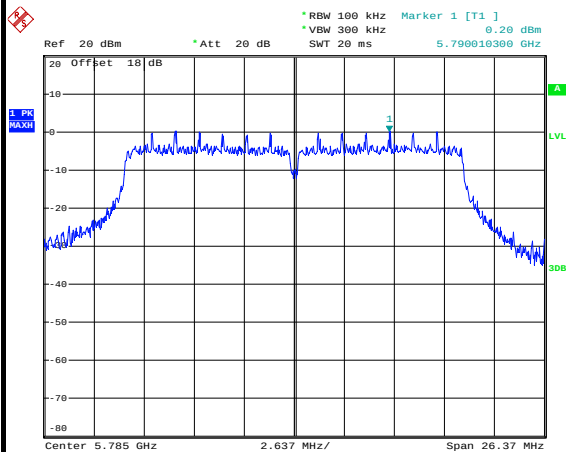


Date: 15.JAN.2014 21:35:26

Spurious Emission 30MHz~6GHz

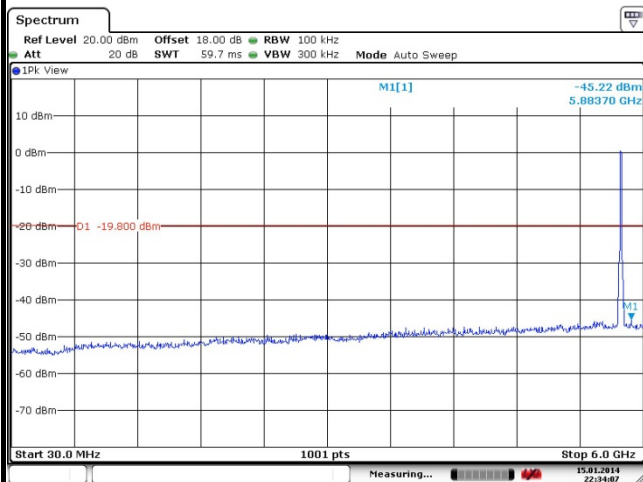

Date: 15.JAN.2014 22:34:07

Spurious Emission 5GHz~40GHz

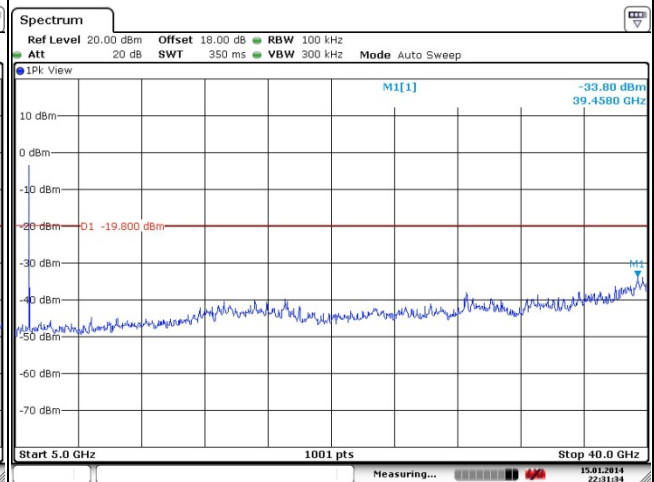


Date: 15.JAN.2014 22:31:34



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	5GHz High	Relative Humidity :	50~53%
Test Channel :	165	Test Engineer :	Blithe Li


WLAN 802.11n HT20 Channel 165

100kHz PSD reference Level

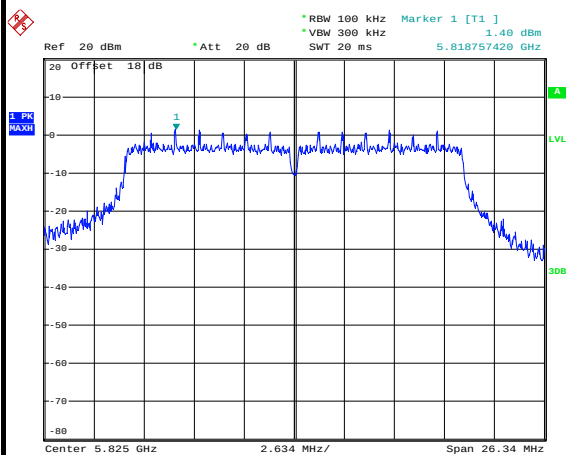


Date: 15.JAN.2014 21:42:50

High Channel Plot

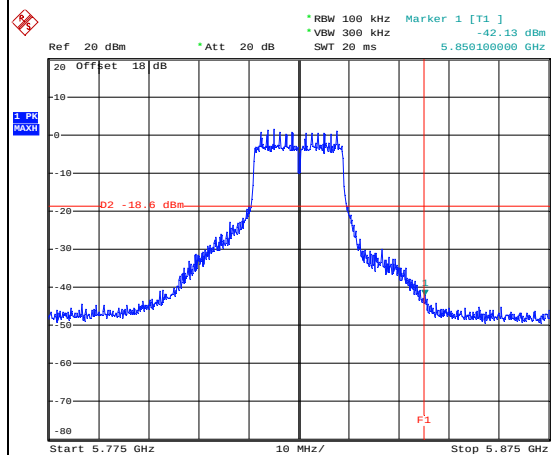


Date: 15.JAN.2014 21:43:04

Spurious Emission 30MHz~6GHz

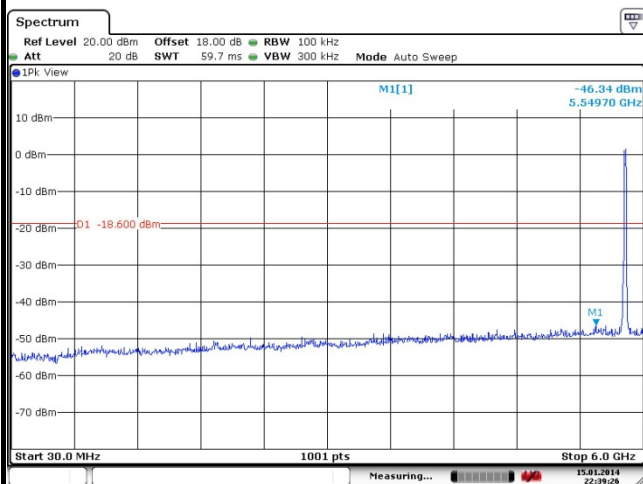

Date: 15.JAN.2014 22:39:26

Spurious Emission 5GHz~40GHz

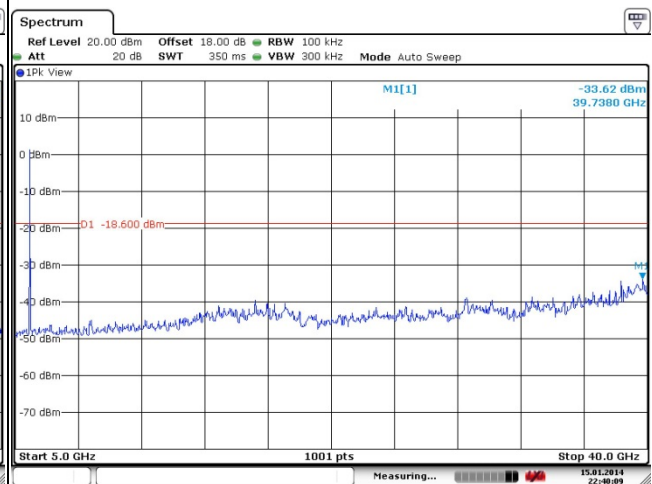


Date: 15.JAN.2014 22:40:09



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	5GHz Low	Relative Humidity :	50~53%
Test Channel :	151	Test Engineer :	Blithe Li


WLAN 802.11n HT40 Channel 151

100kHz PSD reference Level

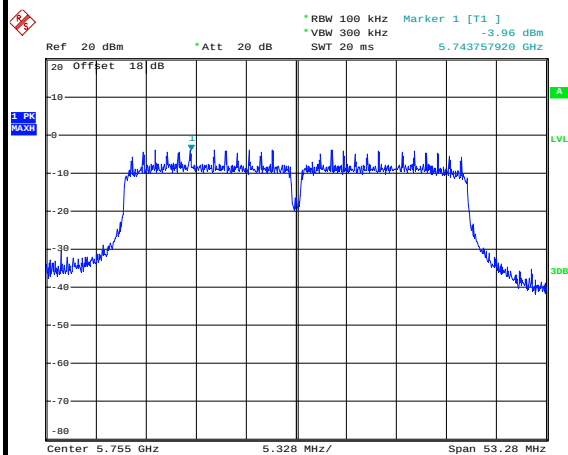


Date: 15.JAN.2014 21:51:21

Low Channel Plot

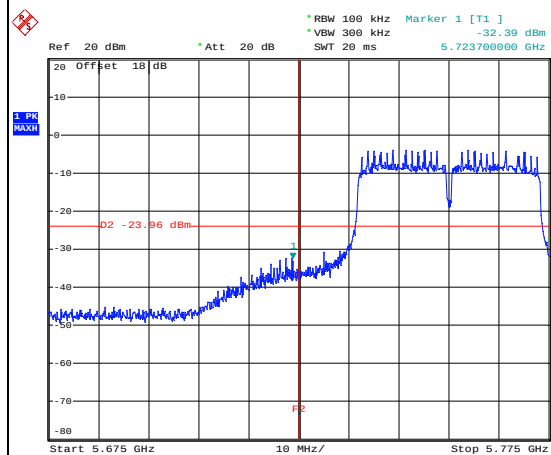


Date: 15.JAN.2014 21:51:35

Spurious Emission 30MHz~6GHz

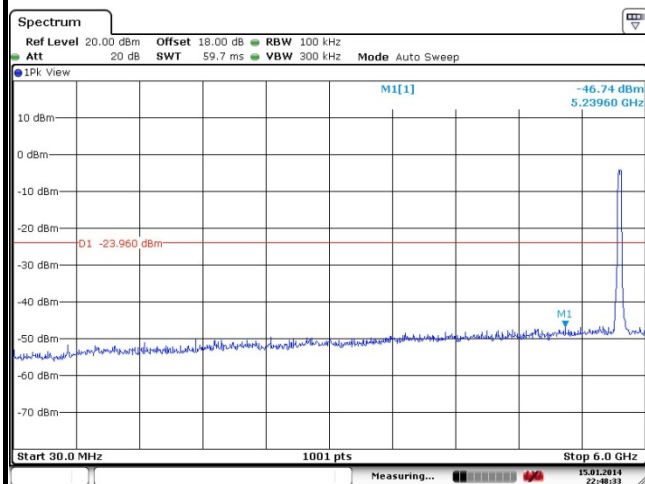

Date: 15.JAN.2014 22:48:33

Spurious Emission 5GHz~40GHz

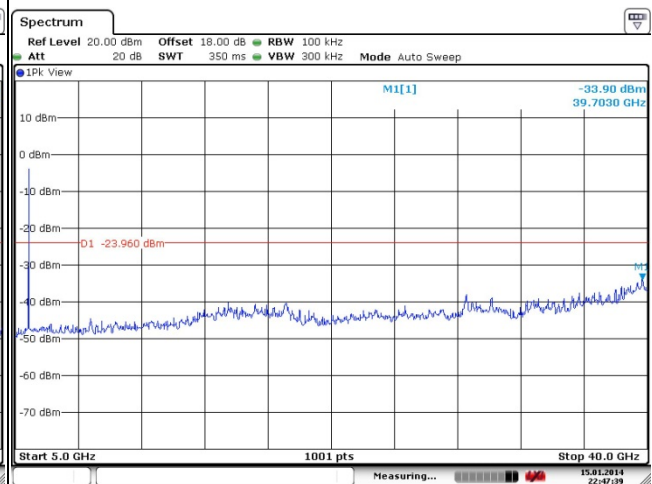


Date: 15.JAN.2014 22:47:39



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	5GHz High	Relative Humidity :	50~53%
Test Channel :	159	Test Engineer :	Blithe Li


WLAN 802.11n HT40 Channel 159

100kHz PSD reference Level

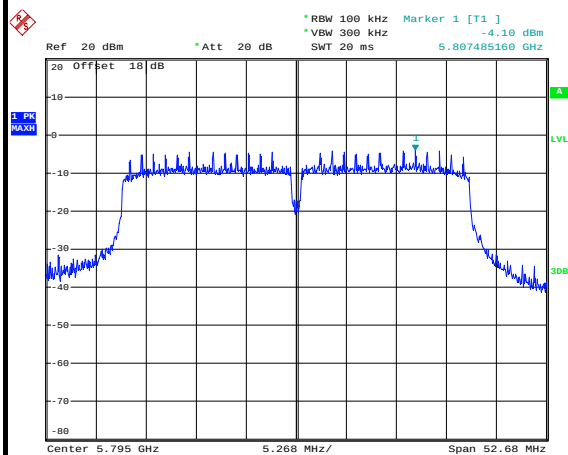


Date: 15.JAN.2014 21:58:33

High Channel Plot

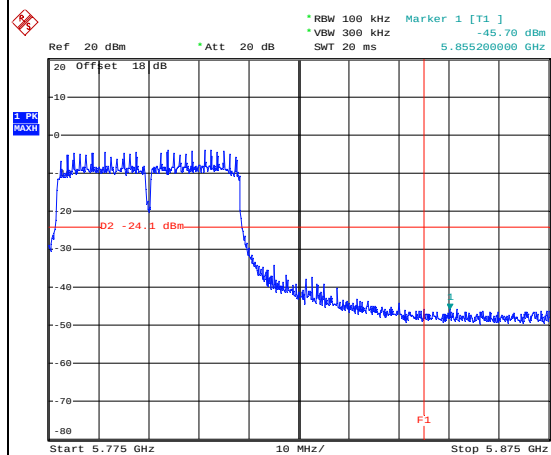


Date: 15.JAN.2014 21:58:47

Spurious Emission 30MHz~6GHz

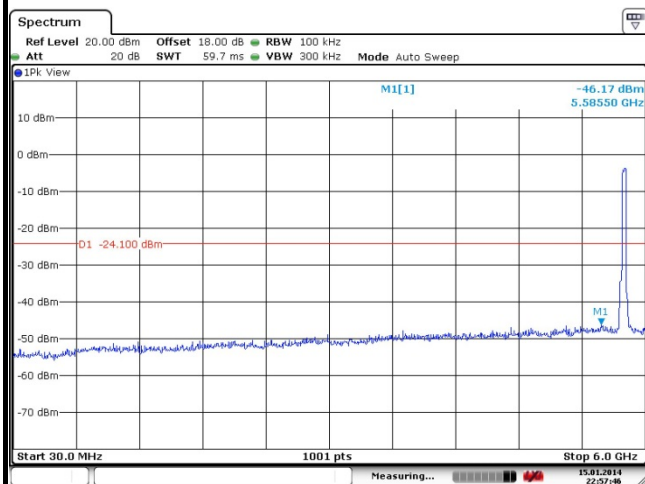

Date: 15.JAN.2014 22:57:46

Spurious Emission 5GHz~40GHz

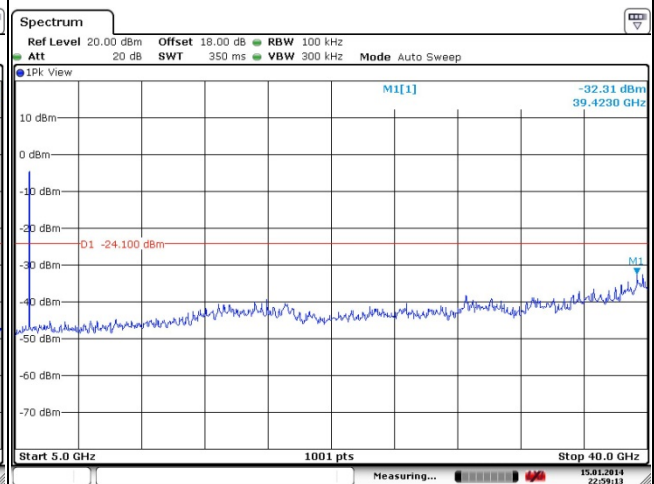

Date: 15.JAN.2014 22:59:13

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	94.32	1.594	0.627	1kHz
802.11g	93.34	1.402	0.713	1kHz
2.4GHz 802.11n HT20	92.31	1.296	0.772	1kHz
802.11a	92.84	1.400	0.714	1kHz
5GHz 802.11n HT20	92.69	1.293	0.773	1kHz
5GHz 802.11n HT40	86.59	0.641	1.561	3kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

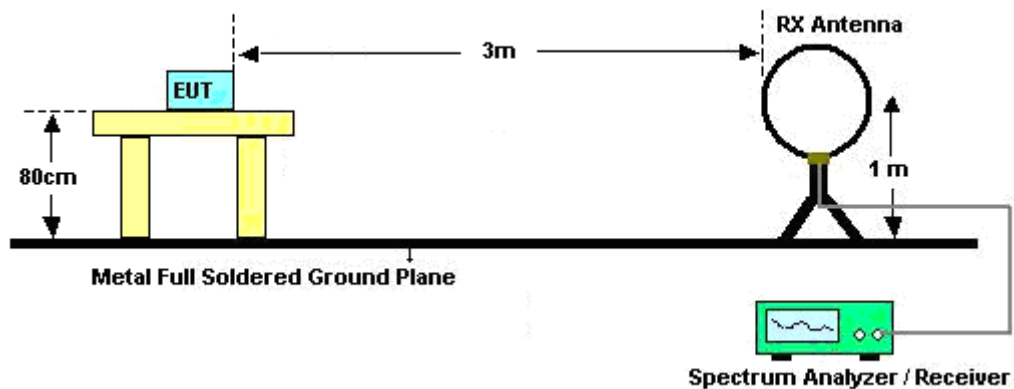

For radiated emissions from 30MHz to 1GHz

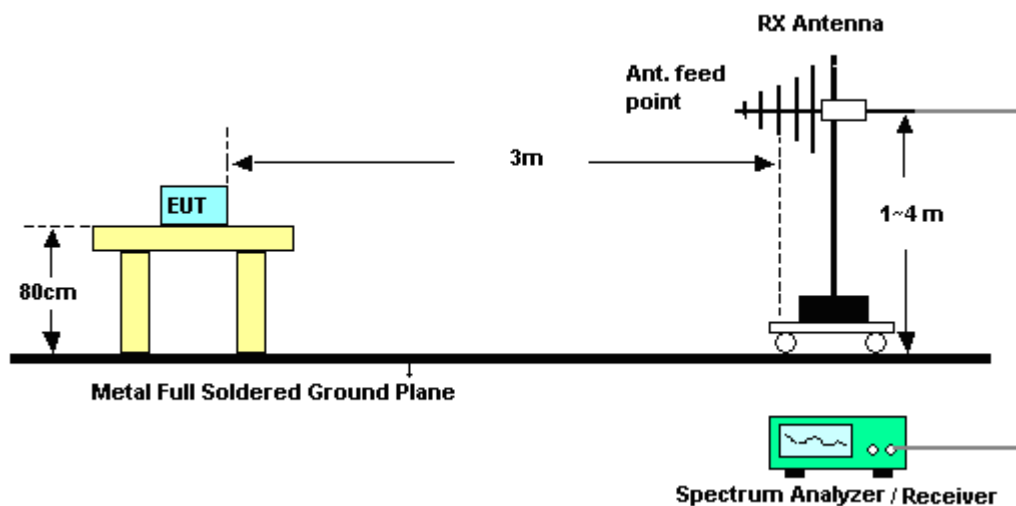

For radiated emissions above 1GHz

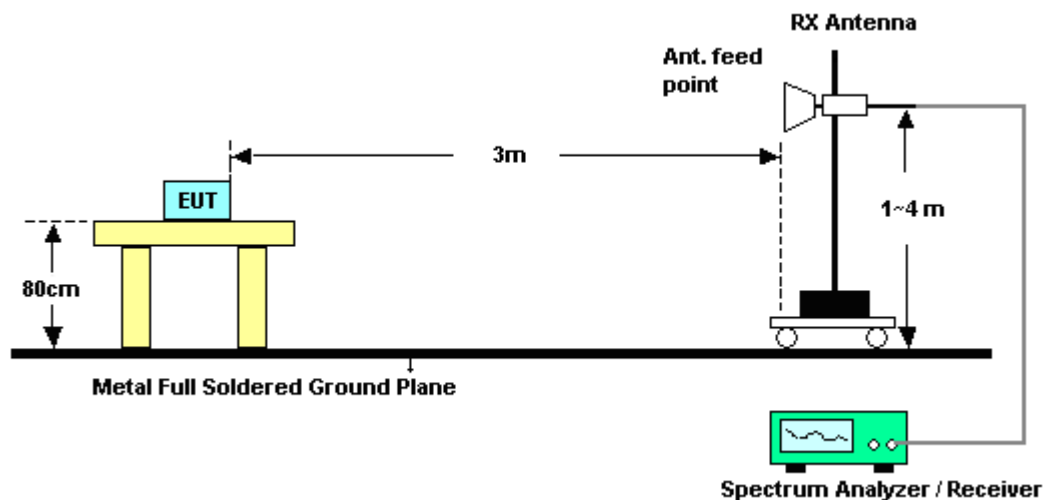

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Test Mode :	802.11b	Temperature :	23~25°C
Test Band :	Low	Relative Humidity :	48~52%
Test Channel :	01	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2318.01	49.11	-24.89	74	42.59	31.64	5.53	30.65	123	62	Peak
2317.02	38.95	-15.05	54	32.52	31.55	5.53	30.65	123	62	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2387.4	49.22	-24.78	74	42.24	31.98	5.59	30.59	107	264	Peak
2316.93	38.58	-15.42	54	32.15	31.55	5.53	30.65	107	264	Average

Test Mode :	802.11b	Temperature :	23~25°C
Test Band :	High	Relative Humidity :	48~52%
Test Channel :	11	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2489.17	49.94	-24.06	74	42.2	32.5	5.71	30.47	146	60	Peak
2484.07	38.58	-15.42	54	30.93	32.41	5.71	30.47	146	60	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2499.7	49.98	-24.02	74	42.18	32.5	5.74	30.44	101	267	Peak
2494.09	38.61	-15.39	54	30.81	32.5	5.74	30.44	101	267	Average

Test Mode :	802.11g	Temperature :	23~25°C
Test Band :	Low	Relative Humidity :	48~52%
Test Channel :	01	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.38	51.68	-22.32	74	44.7	31.98	5.59	30.59	145	51	Peak
2389.74	39.81	-14.19	54	32.83	31.98	5.59	30.59	145	51	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.56	53.08	-20.92	74	46.1	31.98	5.59	30.59	111	329	Peak
2359.86	40.5	-13.5	54	33.75	31.81	5.56	30.62	111	329	Average

Test Mode :	802.11g	Temperature :	23~25°C
Test Band :	High	Relative Humidity :	48~52%
Test Channel :	11	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.74	54.16	-19.84	74	46.51	32.41	5.71	30.47	116	52	Peak
2483.53	40.31	-13.69	54	32.66	32.41	5.71	30.47	116	52	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.65	52.82	-21.18	74	45.17	32.41	5.71	30.47	106	296	Peak
2483.68	39.84	-14.16	54	32.19	32.41	5.71	30.47	106	296	Average



Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Band :	Low	Relative Humidity :	48~52%
Test Channel :	01	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.74	51.64	-22.36	74	44.66	31.98	5.59	30.59	122	63	Peak
2389.74	40.07	-13.93	54	33.09	31.98	5.59	30.59	122	63	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.92	51.97	-22.03	74	44.93	31.98	5.62	30.56	107	283	Peak
2389.92	39.15	-14.85	54	32.11	31.98	5.62	30.56	107	283	Average

Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Band :	High	Relative Humidity :	48~52%
Test Channel :	11	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	51.61	-22.39	74	43.96	32.41	5.71	30.47	116	176	Peak
2484.04	39.36	-14.64	54	31.71	32.41	5.71	30.47	116	176	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.74	53.6	-20.4	74	45.95	32.41	5.71	30.47	106	338	Peak
2483.59	40.27	-13.73	54	32.62	32.41	5.71	30.47	106	338	Average

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Note: Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	96.01	-	-	88.88	32.07	5.62	30.56	123	62	Peak
2412	90.29	-	-	83.16	32.07	5.62	30.56	123	62	Average
4824	39.43	-34.57	74	54.51	33.82	8.36	57.26	102	185	Peak

Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	98.37	-	-	91.24	32.07	5.62	30.56	107	264	Peak
2412	93.16	-	-	86.03	32.07	5.62	30.56	107	264	Average
4824	36.23	-37.77	74	51.31	33.82	8.36	57.26	102	185	Peak

Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	96.13	-	-	88.77	32.24	5.65	30.53	172	56	Peak
2437	90.88	-	-	83.52	32.24	5.65	30.53	172	56	Average
4874	41.26	-32.74	74	56.09	33.93	8.41	57.17	103	200	Peak
7311	37.32	-36.68	74	50.6	33.89	9.99	57.16	152	324	Peak

Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	96.79	-	-	89.43	32.24	5.65	30.53	127	269	Peak
2437	91.52	-	-	84.16	32.24	5.65	30.53	127	269	Average
4874	35.65	-38.35	74	50.48	33.93	8.41	57.17	103	200	Peak
7311	36.98	-37.02	74	50.26	33.89	9.99	57.16	152	324	Peak

Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	94.51	-	-	87	32.33	5.68	30.5	146	60	Peak
2462	89.35	-	-	81.84	32.33	5.68	30.5	146	60	Average
4924	44.8	-29.2	74	59.37	34.05	8.46	57.08	120	190	Peak
7386	37.59	-36.41	74	50.68	33.94	10.02	57.05	145	203	Peak

Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	95.09	-	-	87.58	32.33	5.68	30.5	101	267	Peak
2462	89.79	-	-	82.28	32.33	5.68	30.5	101	267	Average
4924	36.34	-37.66	74	50.91	34.05	8.46	57.08	120	190	Peak
7386	37.32	-36.68	74	50.41	33.94	10.02	57.05	145	203	Peak

Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
125.06	16.65	-26.85	43.5	33.86	12	1.37	30.58	-	-	Peak
179.38	22.25	-21.25	43.5	40.98	10.05	1.62	30.4	-	-	Peak
412.18	31.86	-14.14	46	42.68	16.48	2.33	29.63	145	289	Peak
749.74	25.93	-20.07	46	31.91	19.96	3.06	29	-	-	Peak
916.58	26.01	-19.99	46	30.38	21.03	3.38	28.78	-	-	Peak
975.75	26.49	-27.51	54	30.42	21.3	3.47	28.7	-	-	Peak
2412	95.74	-	-	88.61	32.07	5.62	30.56	110	328	Peak
2412	87.21	-	-	80.08	32.07	5.62	30.56	110	328	Average
4824	37.61	-36.39	74	52.69	33.82	8.36	57.26	102	185	Peak

Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
62.01	18.61	-21.39	40	40.28	7.86	1.01	30.54	-	-	Peak
182.29	15.98	-27.52	43.5	34.84	9.9	1.63	30.39	-	-	Peak
408.3	21.98	-24.02	46	32.91	16.39	2.32	29.64	-	-	Peak
634.31	24.16	-21.84	46	31.83	18.67	2.82	29.16	-	-	Peak
771.08	25.77	-20.23	46	31.62	20.02	3.1	28.97	-	-	Peak
935.01	26.44	-19.56	46	30.59	21.18	3.42	28.75	162	325	Peak
2412	95.9	-	-	88.77	32.07	5.62	30.56	111	329	Peak
2412	87.17	-	-	80.04	32.07	5.62	30.56	111	329	Average
4824	36.31	-37.69	74	51.39	33.82	8.36	57.26	102	185	Peak

Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	93.74	-	-	86.38	32.24	5.65	30.53	142	44	Peak
2437	84.83	-	-	77.47	32.24	5.65	30.53	142	44	Average
4874	38.21	-35.79	74	53.04	33.93	8.41	57.17	103	200	Peak
7311	37.25	-36.75	74	50.53	33.89	9.99	57.16	152	324	Peak

Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	91.23	-	-	83.87	32.24	5.65	30.53	100	258	Peak
2437	83.08	-	-	75.72	32.24	5.65	30.53	100	258	Average
4874	36.07	-37.93	74	50.9	33.93	8.41	57.17	103	200	Peak
7311	37.32	-36.68	74	50.6	33.89	9.99	57.16	152	324	Peak

Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	92.44	-	-	84.93	32.33	5.68	30.5	116	52	Peak
2462	83.67	-	-	76.16	32.33	5.68	30.5	116	52	Average
4924	38.75	-35.25	74	53.32	34.05	8.46	57.08	120	190	Peak
7386	36.75	-37.25	74	49.84	33.94	10.02	57.05	145	203	Peak

Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	92.53	-	-	85.02	32.33	5.68	30.5	106	296	Peak
2462	83.6	-	-	76.09	32.33	5.68	30.5	106	296	Average
4924	35.36	-38.64	74	49.93	34.05	8.46	57.08	120	190	Peak
7386	37.59	-36.41	74	50.68	33.94	10.02	57.05	145	203	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	92.87	-	-	85.74	32.07	5.62	30.56	122	63	Peak
2412	84.11	-	-	76.98	32.07	5.62	30.56	122	63	Average
4924	36.65	-37.35	74	51.22	34.05	8.46	57.08	120	190	Peak
7386	37.8	-36.2	74	50.89	33.94	10.02	57.05	145	203	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	91.01	-	-	83.88	32.07	5.62	30.56	107	283	Peak
2412	82.12	-	-	74.99	32.07	5.62	30.56	107	283	Average
4924	36.35	-37.65	74	50.92	34.05	8.46	57.08	120	190	Peak
7386	37.82	-36.18	74	50.91	33.94	10.02	57.05	145	203	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	92	-	-	84.64	32.24	5.65	30.53	147	61	Peak
2437	83.22	-	-	75.86	32.24	5.65	30.53	147	61	Average
4874	36.76	-37.24	74	51.59	33.93	8.41	57.17	103	200	Peak
7311	37.6	-36.4	74	50.88	33.89	9.99	57.16	152	324	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	91.99	-	-	84.63	32.24	5.65	30.53	105	250	Peak
2437	83.18	-	-	75.82	32.24	5.65	30.53	105	250	Average
4874	35.88	-38.12	74	50.71	33.93	8.41	57.17	103	200	Peak
7311	37.48	-36.52	74	50.76	33.89	9.99	57.16	152	324	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	90.99	-	-	83.48	32.33	5.68	30.5	116	176	Peak
2462	81.48	-	-	73.97	32.33	5.68	30.5	116	176	Average
4924	38.62	-35.38	74	53.19	34.05	8.46	57.08	120	190	Peak
7386	37.25	-36.75	74	50.34	33.94	10.02	57.05	145	203	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	92.98	-	-	85.47	32.33	5.68	30.5	106	338	Peak
2462	83.45	-	-	75.94	32.33	5.68	30.5	106	338	Average
4924	35.87	-38.13	74	50.44	34.05	8.46	57.08	120	190	Peak
7386	36.82	-37.18	74	49.91	33.94	10.02	57.05	145	203	Peak

Test Mode :	802.11a	Temperature :	23~25°C
Test Channel :	149	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 5745 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5745	93.68	-	-	80.15	34	9.14	29.61	119	19	Peak
5745	85.2	-	-	71.67	34	9.14	29.61	119	19	Average
11490	47.26	-26.74	74	52.52	37.77	13.39	56.42	145	265	Peak

Test Mode :	802.11a	Temperature :	23~25°C
Test Channel :	149	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 5745 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5745	87.93	-	-	74.4	34	9.14	29.61	101	83	Peak
5745	79.68	-	-	66.15	34	9.14	29.61	101	83	Average
11490	49.83	-24.17	74	55.09	37.77	13.39	56.42	145	265	Peak

Test Mode :	802.11a	Temperature :	23~25°C
Test Channel :	157	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 5785 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5785	95.57	-	-	82.05	34	9.16	29.64	119	34	Peak
5785	86.91	-	-	73.39	34	9.16	29.64	119	34	Average
11570	47.48	-26.52	74	52.57	37.86	13.41	56.36	105	198	Peak

Test Mode :	802.11a	Temperature :	23~25°C
Test Channel :	157	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 5785 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5785	90.38	-	-	76.86	34	9.16	29.64	100	95	Peak
5785	81.85	-	-	68.33	34	9.16	29.64	100	95	Average
11570	50.66	-23.34	74	55.75	37.86	13.41	56.36	105	198	Peak

Test Mode :	802.11a	Temperature :	23~25°C
Test Channel :	165	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 5825 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5825	96.65	-	-	83.14	34	9.17	29.66	106	7	Peak
5825	88.27	-	-	74.76	34	9.17	29.66	106	7	Average
11650	46.4	-27.6	74	51.38	37.91	13.42	56.31	146	347	Peak

Test Mode :	802.11a	Temperature :	23~25°C
Test Channel :	165	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 5825 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5825	88.41	-	-	74.9	34	9.17	29.66	100	108	Peak
5825	80.23	-	-	66.72	34	9.17	29.66	100	108	Average
11650	50.18	-23.82	74	55.16	37.91	13.42	56.31	146	347	Peak

Test Mode :	5GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	149	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 5745 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5745	93.22	-	-	79.69	34	9.14	29.61	130	356	Peak
5745	84.42	-	-	70.89	34	9.14	29.61	130	356	Average
11490	47.54	-26.46	74	52.8	37.77	13.39	56.42	145	265	Peak

Test Mode :	5GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	149	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 5745 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5745	85.01	-	-	71.48	34	9.14	29.61	100	16	Peak
5745	76.27	-	-	62.74	34	9.14	29.61	100	16	Average
11490	50.27	-23.73	74	55.53	37.77	13.39	56.42	145	265	Peak

Test Mode :	5GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	157	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 5785 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
62.01	15.77	-24.23	40	37.44	7.86	1.01	30.54	-	-	Peak
194.9	21.29	-22.21	43.5	39.97	10	1.67	30.35	-	-	Peak
312.27	20.03	-25.97	46	33.48	14.46	2.05	29.96	-	-	Peak
514.03	22.66	-23.34	46	31.96	17.44	2.57	29.31	-	-	Peak
745.86	24.65	-21.35	46	30.65	19.94	3.06	29	-	-	Peak
940.83	25.64	-20.36	46	29.71	21.23	3.45	28.75	145	250	Peak
5785	93.89	-	-	80.37	34	9.16	29.64	143	357	Peak
5785	85.07	-	-	71.55	34	9.16	29.64	143	357	Average
11570	47.06	-26.94	74	52.15	37.86	13.41	56.36	105	198	Peak

Test Mode :	5GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	157	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 5785 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
62.01	18.78	-21.22	40	40.45	7.86	1.01	30.54	-	-	Peak
107.6	14.87	-28.63	43.5	33.67	10.53	1.31	30.64	-	-	Peak
312.27	17.97	-28.03	46	31.42	14.46	2.05	29.96	-	-	Peak
566.41	22.81	-23.19	46	30.83	18.53	2.69	29.24	-	-	Peak
775.93	24.87	-21.13	46	30.68	20.03	3.12	28.96	-	-	Peak
893.3	26.32	-19.68	46	30.96	20.85	3.32	28.81	180	198	Peak
5785	87.6	-	-	74.08	34	9.16	29.64	102	104	Peak
5785	79.1	-	-	65.58	34	9.16	29.64	102	104	Average
11570	50.81	-23.19	74	55.9	37.86	13.41	56.36	105	198	Peak

Test Mode :	5GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	165	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 5825 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5825	94.41	-	-	80.9	34	9.17	29.66	129	6	Peak
5825	85.71	-	-	72.2	34	9.17	29.66	129	6	Average
11650	45.82	-28.18	74	50.8	37.91	13.42	56.31	146	347	Peak

Test Mode :	5GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	165	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 5825 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5825	88.05	-	-	74.54	34	9.17	29.66	100	83	Peak
5825	79.68	-	-	66.17	34	9.17	29.66	100	83	Average
11650	50.13	-23.87	74	55.11	37.91	13.42	56.31	146	347	Peak

Test Mode :	5GHz 802.11n HT40	Temperature :	23~25°C
Test Channel :	151	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 5755 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5755	88.81	-	-	75.28	34	9.14	29.61	129	5	Peak
5755	80.45	-	-	66.92	34	9.14	29.61	129	5	Average
11510	46.86	-27.14	74	52.06	37.8	13.4	56.4	174	321	Peak

Test Mode :	5GHz 802.11n HT40	Temperature :	23~25°C
Test Channel :	151	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 5755 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5755	83.19	-	-	69.66	34	9.14	29.61	101	87	Peak
5755	74.89	-	-	61.36	34	9.14	29.61	101	87	Average
11510	49.8	-24.2	74	55	37.8	13.4	56.4	174	321	Peak

Test Mode :	5GHz 802.11n HT40	Temperature :	23~25°C
Test Channel :	159	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 5795 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5795	89.47	-	-	75.95	34	9.16	29.64	141	355	Peak
5795	81.12	-	-	67.6	34	9.16	29.64	141	355	Average
11590	47.67	-26.33	74	52.74	37.87	13.41	56.35	145	265	Peak

Test Mode :	5GHz 802.11n HT40	Temperature :	23~25°C
Test Channel :	159	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 5795 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5795	82.03	-	-	68.51	34	9.16	29.64	100	83	Peak
5795	74.12	-	-	60.6	34	9.16	29.64	100	83	Average
11590	50.23	-23.77	74	55.3	37.87	13.41	56.35	145	265	Peak

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

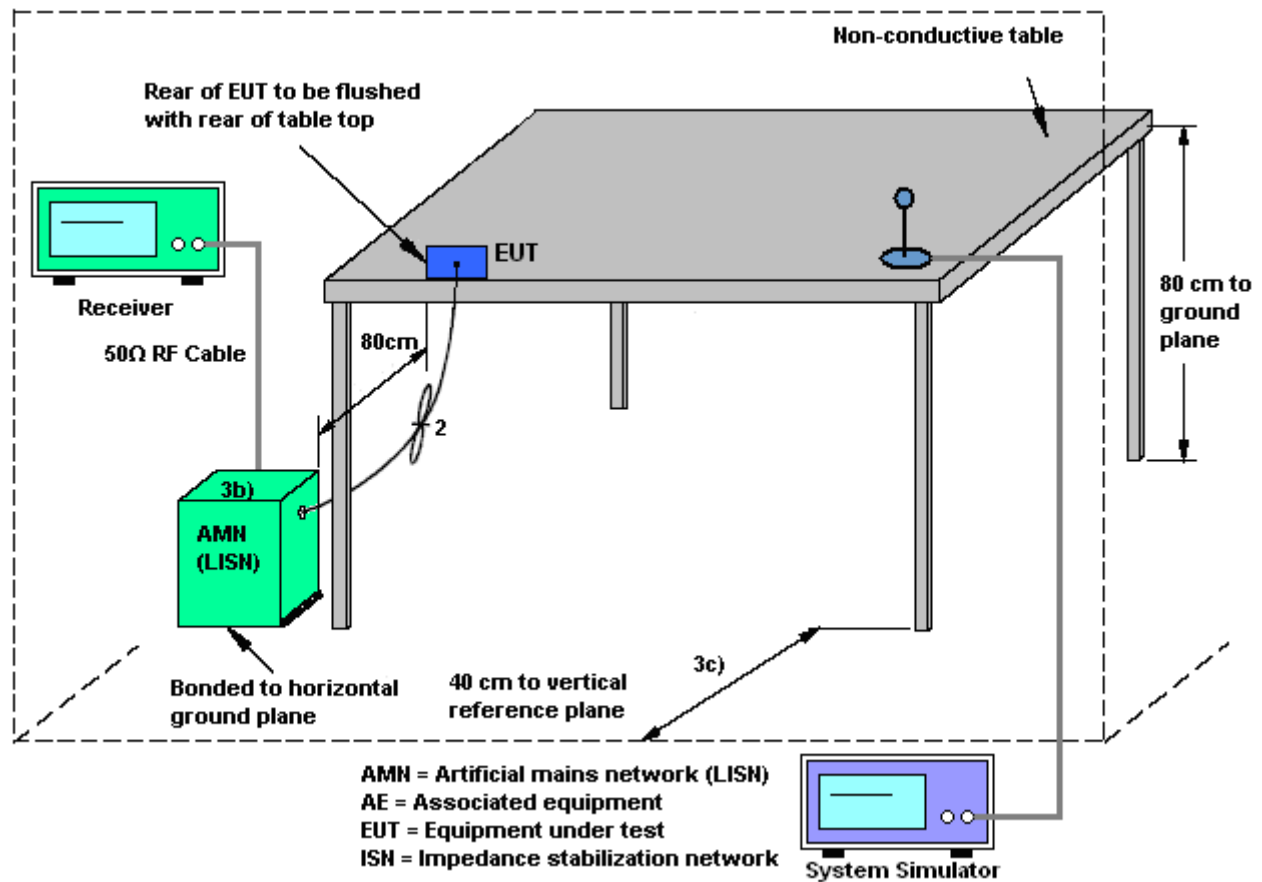

3.6.5 Test Result of AC Conducted Emission


Test Mode :	Mode 2	Temperature :	21~22℃
Test Engineer :	Henry Chen	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + USB Cable (Charging from Adapter) + Earphone + NFC Link		

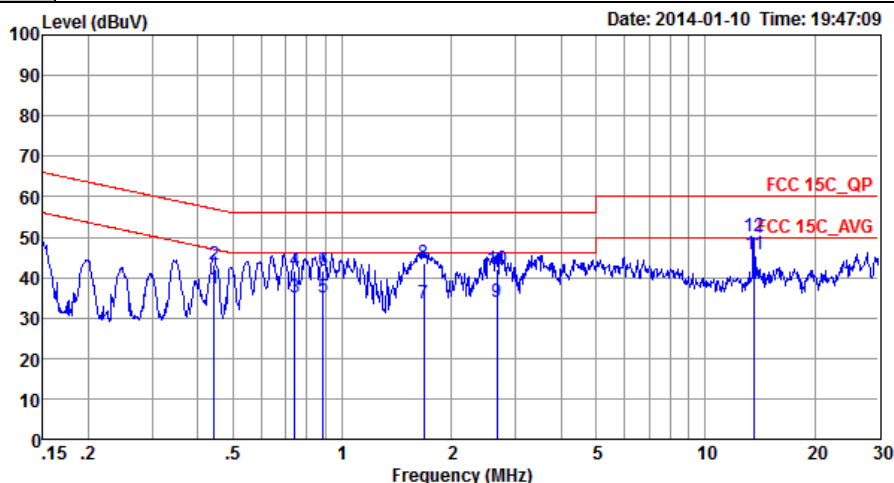

Site : C001-SZ
Condition: FCC 15C_QP LISN_L_20130328 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.44	37.29	-9.69	46.98	27.00	0.13	10.16	Average
2	0.44	43.29	-13.69	56.98	33.00	0.13	10.16	QP
3	0.74	34.92	-11.08	46.00	24.60	0.17	10.15	Average
4	0.74	41.62	-14.38	56.00	31.30	0.17	10.15	QP
5	0.88	35.14	-10.86	46.00	24.80	0.19	10.15	Average
6	0.88	41.74	-14.26	56.00	31.40	0.19	10.15	QP
7	1.68	33.60	-12.40	46.00	23.20	0.22	10.18	Average
8	1.68	43.60	-12.40	56.00	33.20	0.22	10.18	QP
9	2.66	33.86	-12.14	46.00	23.40	0.26	10.20	Average
10	2.66	42.16	-13.84	56.00	31.70	0.26	10.20	QP
11 *	13.62	45.94	-4.06	50.00	34.60	0.86	10.48	Average
12	13.62	50.04	-9.96	60.00	38.70	0.86	10.48	QP

Test Mode :	Mode 2	Temperature :	21~22℃
Test Engineer :	Henry Chen	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + USB Cable (Charging from Adapter) + Earphone + NFC Link		

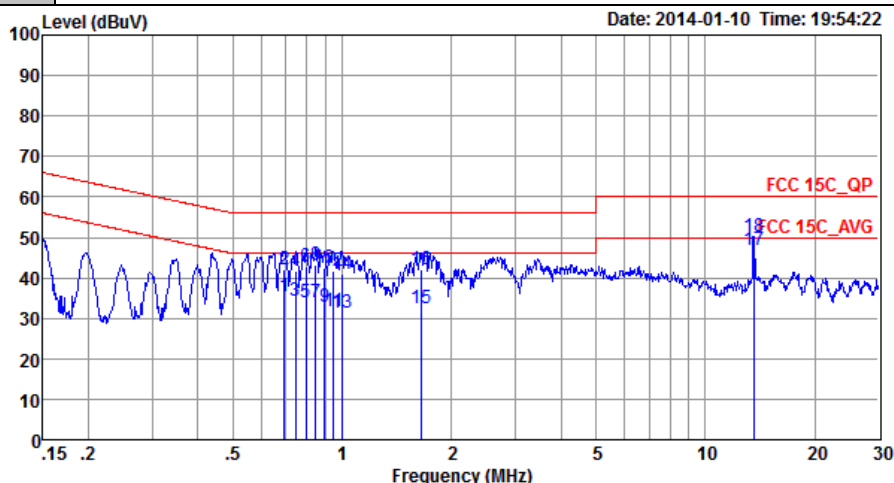

Site : C001-SZ
Condition: FCC 15C_QP LISN_N_20130328 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.69	35.39	-10.61	46.00	25.20	0.04	10.15	Average
2	0.69	41.99	-14.01	56.00	31.80	0.04	10.15	QP
3	0.74	34.49	-11.51	46.00	24.30	0.04	10.15	Average
4	0.74	41.69	-14.31	56.00	31.50	0.04	10.15	QP
5	0.80	33.99	-12.01	46.00	23.80	0.04	10.15	Average
6	0.80	42.69	-13.31	56.00	32.50	0.04	10.15	QP
7	0.84	34.09	-11.91	46.00	23.90	0.04	10.15	Average
8	0.84	43.19	-12.81	56.00	33.00	0.04	10.15	QP
9	0.89	32.69	-13.31	46.00	22.50	0.04	10.15	Average
10	0.89	42.39	-13.61	56.00	32.20	0.04	10.15	QP
11	0.95	31.79	-14.21	46.00	21.60	0.04	10.15	Average
12	0.95	41.79	-14.21	56.00	31.60	0.04	10.15	QP
13	1.00	31.29	-14.71	46.00	21.10	0.04	10.15	Average
14	1.00	40.99	-15.01	56.00	30.80	0.04	10.15	QP
15	1.64	32.43	-13.57	46.00	22.20	0.05	10.18	Average
16	1.64	41.93	-14.07	56.00	31.70	0.05	10.18	QP
17 *	13.62	46.96	-3.04	50.00	36.00	0.48	10.48	Average
18	13.62	50.26	-9.74	60.00	39.30	0.48	10.48	QP

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Mar. 28, 2013	Jan. 15, 2014	Mar. 27, 2014	Conducted (TH01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Jun. 17, 2013	Jan. 15, 2014	Jun. 16, 2014	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	N/A	Mar. 28, 2013	Jan. 15, 2014	Mar. 27, 2014	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA2411B	1207253	N/A	Mar. 28, 2013	Jan. 15, 2014	Mar. 27, 2014	Conducted (TH01-SZ)
Spectrum Analyzer	Agilent Technologies	N9038A	MY52260185	20Hz~26.5GHz	Apr. 04, 2013	Jan. 25, 2014	Apr. 03, 2014	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 26, 2013	Jan. 25, 2014	Oct. 25, 2014	Radiation (03CH01-SZ)
Bilog Antenna	SCHAFFNER	CBL6112B	2614	30MHz~2GHz	Dec. 26, 2013	Jan. 25, 2014	Dec. 25, 2014	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3000MHz GAIN 30db	Mar. 28, 2013	Jan. 25, 2014	Mar. 27, 2014	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	Mar. 28, 2013	Jan. 25, 2014	Mar. 27, 2014	Radiation (03CH01-SZ)
SHF-EHF-Horn	Schwarzbeck	BBHA9170	BBHA9170249	14GHz~40GHz	Nov. 22, 2013	Jan. 25, 2014	Nov. 21, 2014	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 29, 2013	Jan. 25, 2014	May 28, 2014	Radiation (03CH01-SZ)
Turn Table	EM Electronics	EM 1000	N/A	0 ~ 360 degree	N/A	Jan. 25, 2014	N/A	Radiation (03CH01-SZ)
Antenna Mast	EM Electronics	EM 1000	N/A	1 m - 4 m	N/A	Jan. 25, 2014	N/A	Radiation (03CH01-SZ)
ESCIO TEST Receiver	R&S	1142.8007.03	100724	9kHz~3GHz	Mar. 28, 2013	Jan. 10, 2014	Mar. 27, 2014	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Mar. 28, 2013	Jan. 10, 2014	Mar. 27, 2014	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Mar. 28, 2013	Jan. 10, 2014	Mar. 27, 2014	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	N/A	Nov. 19, 2013	Jan. 10, 2014	Nov. 18, 2014	Conduction (CO01-SZ)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.31
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.90
---	------