


Diagram of a two-story building. The building has a total height of 4.0 (two stories of 2.0 each) and a base width of 4.0 (two segments of 2.0 each). A roller support is located at the bottom left corner, with an upward arrow and the text "no ROLLING". A pin support is located at the bottom right corner. A horizontal force of 3.0 is applied at the top of the right support, pointing to the left. The building has a dashed line indicating a curved roofline.

1. Use FILM provided by SAMSUNG for letter and contents
2. Background color is White, letter color is BLACK
(reverse for SAMSUNG LOGO)

3. Put "Back paper" on the back side after the adhesive.
4. No blur and spread for letter
5. Proceed with manufacturing process after the approval of R&D Group
6. The spec. of product must be based on approved limit samples. **R**
7. Stock on as a ROLL
8. Follow drawing instruction above for CE or WEEE mark
9. Unify material and color as one color (blue) for glassine paper

MAT.		White Polypropylene 80 μ		FIN.		translucent opp laminating+uvp coating	
TITLE		SCH-M369 LABEL(R)-MAIN					
UNIT	mm	DESIGNED	CHECKED	APPROVED	PROJECTION		
TOLERANCE	+0.0 -0.1	Hong Mun Ki	Jo Kyeong Hwan	KIM JUNE SOP	SHEET NO 1/1		
SCALE	N/S						
Manufacture	HSINS	100226	100226	100226			
		Doc. CODE					

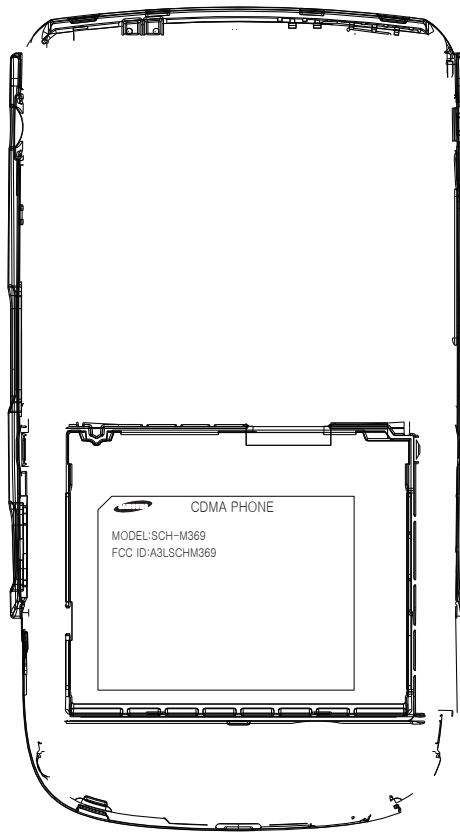

The label is placed inside the battery compartment.

The FCC ID Label shown will be readily visible at the time of purchase.