

APPENDIX F

The Validation Measurements

DUT: Dipole 835 MHz; Serial: 451

Program Name: 835MHz Dipole Validation 2005.06.16

Procedure Name: 835MHz @ 250mW

Procedure Notes:

Communication System: CDMA; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3017; ConvF(6.33, 6.33, 6.33); Calibrated: 2004-09-24
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn533; Calibrated: 2004-12-03
- Phantom: SAM 835/900 MHz; Type: SAM; Serial: TP-1141
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

835MHz @ 250mW/Area Scan (51x51x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 2.69 mW/g


835MHz @ 250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.7 V/m ; Power Drift = -0.071 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.45 mW/g

Maximum value of SAR (measured) = 2.64 mW/g

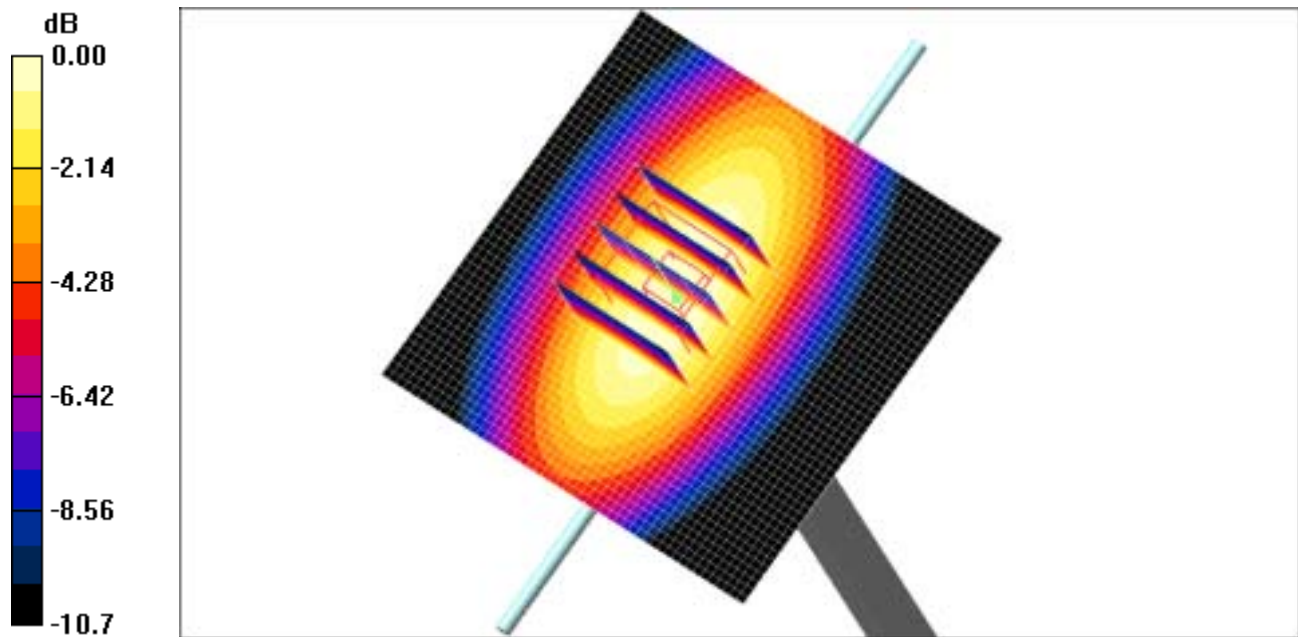

0 dB = 2.64 mW/g