

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-R610; Type: Cellular/PCS CDMA Phone with EVDO and Bluetooth; Serial: AE-021-F**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.9$  mho/m;  $\epsilon_r = 41.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 05-16-2007; Ambient Temp: 23.4°C; Tissue Temp: 21.5°C

Probe: ES3DV2 - SN3022; ConvF(6.05, 6.05, 6.05); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Right Head, Slide Out, Touch, Mid.ch**


**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.33 V/m

Peak SAR (extrapolated) = 0.682 W/kg

**SAR(1 g) = 0.522 mW/g; SAR(10 g) = 0.378 mW/g**

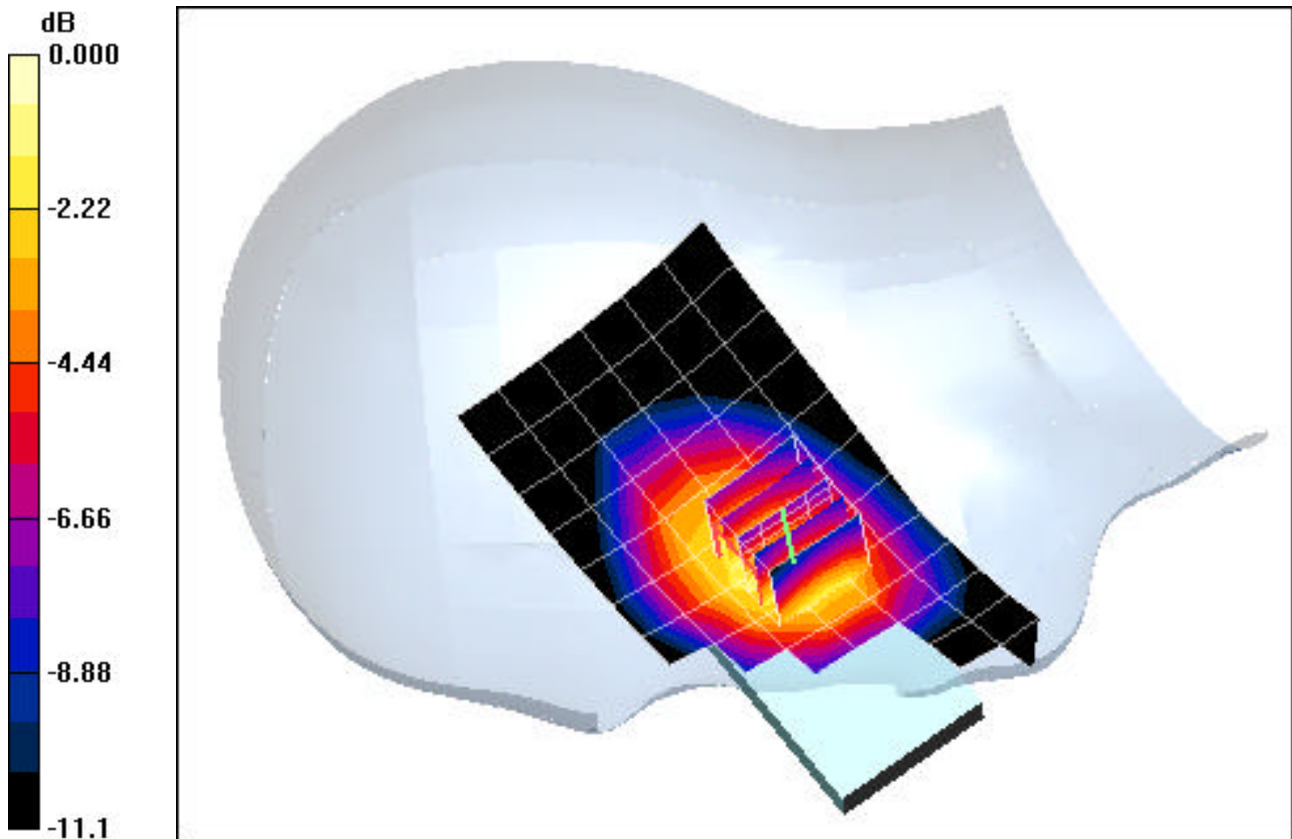

0 dB = 0.577mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-R610; Type: Cellular/PCS CDMA Phone with EVDO and Bluetooth; Serial: AE-021-F**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.9$  mho/m;  $\epsilon_r = 41.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 05-16-2007; Ambient Temp: 23.4°C; Tissue Temp: 21.5°C

Probe: ES3DV2 - SN3022; ConvF(6.05, 6.05, 6.05); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Right Head, Slide Out, Tilt, Mid.ch**


**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.5 V/m

Peak SAR (extrapolated) = 0.232 W/kg

**SAR(1 g) = 0.177 mW/g; SAR(10 g) = 0.129 mW/g**

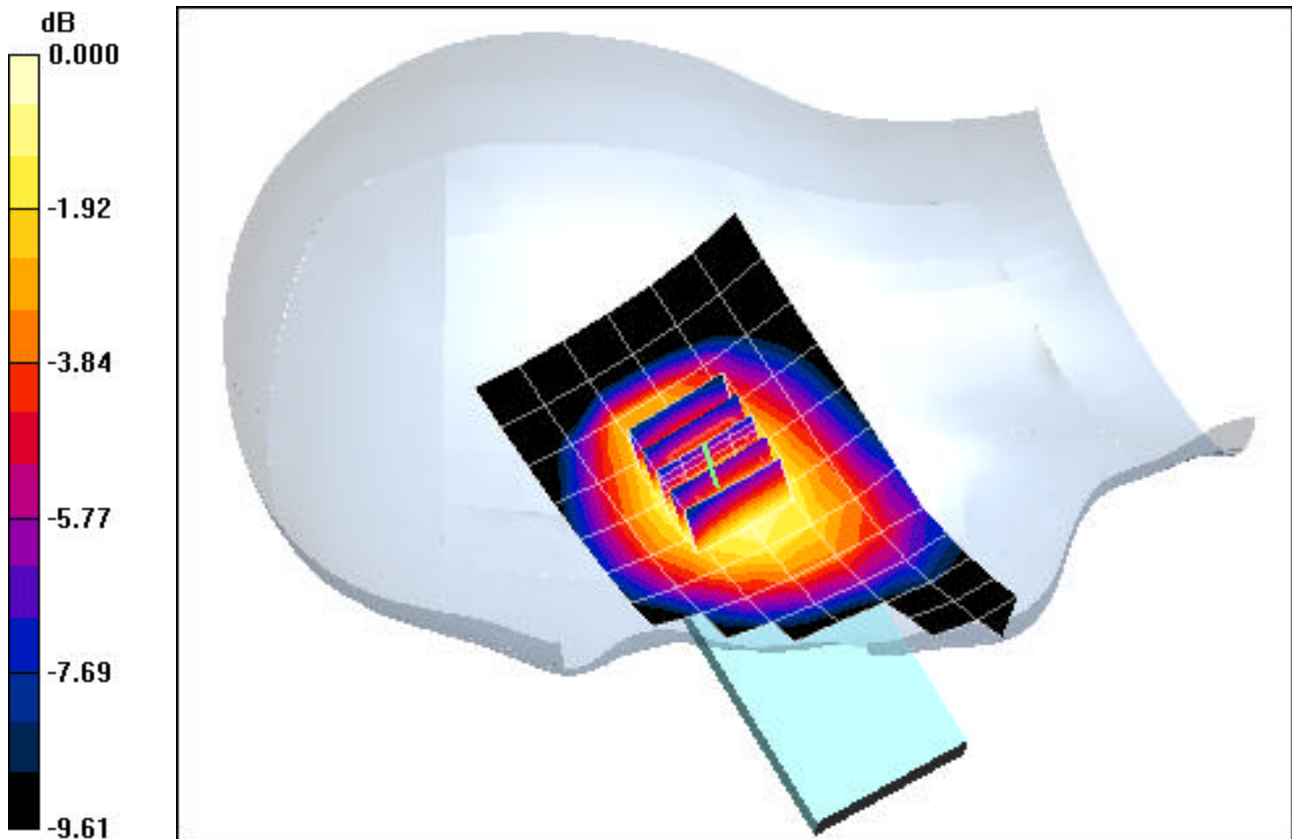

0 dB = 0.198mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-R610; Type: Cellular/PCS CDMA Phone with EVDO and Bluetooth; Serial: AE-021-F**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.9$  mho/m;  $\epsilon_r = 41.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Left Section

Test Date: 05-16-2007; Ambient Temp: 23.4°C; Tissue Temp: 21.5°C

Probe: ES3DV2 - SN3022; ConvF(6.05, 6.05, 6.05); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Left Head, Slide Out, Touch, Mid.ch**


**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.55 V/m

Peak SAR (extrapolated) = 0.559 W/kg

**SAR(1 g) = 0.420 mW/g; SAR(10 g) = 0.303 mW/g**

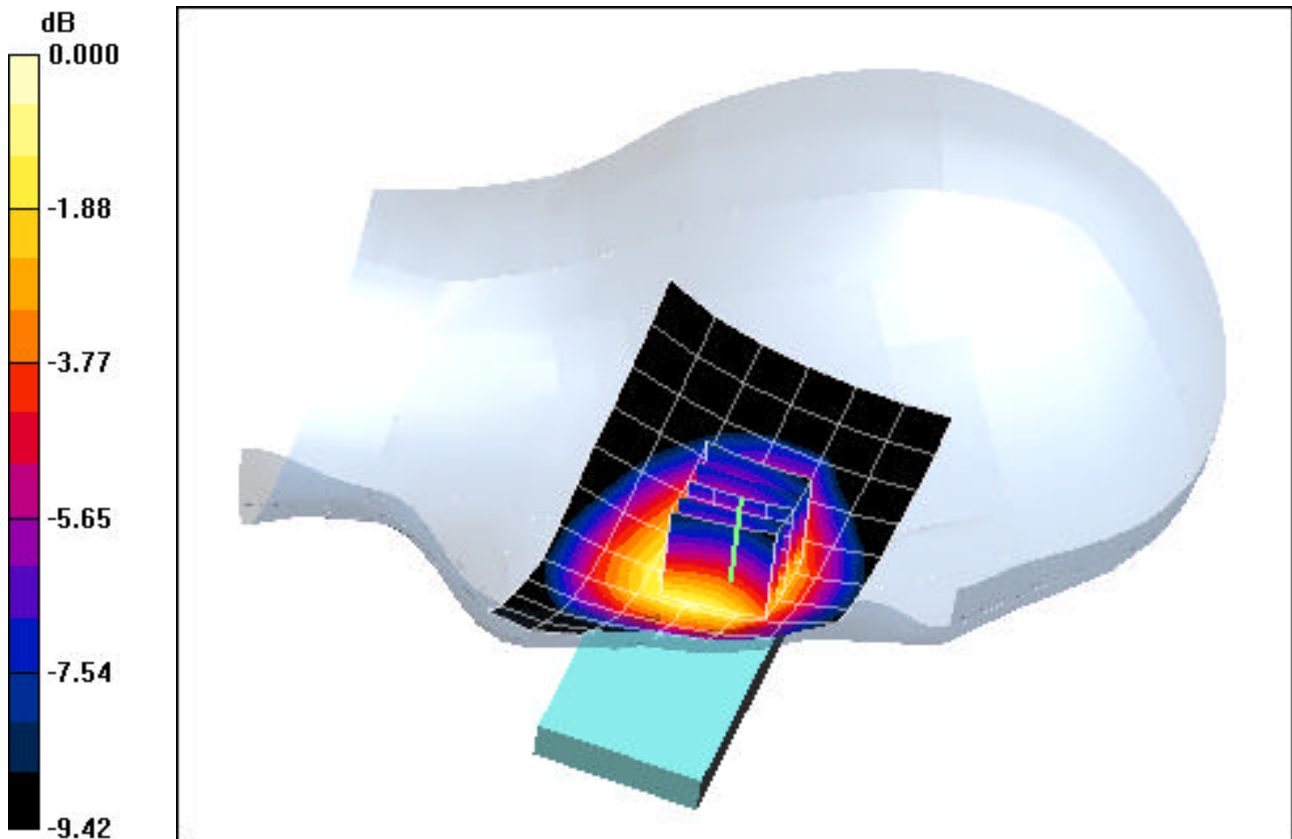

0 dB = 0.471mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-R610; Type: Cellular/PCS CDMA Phone with EVDO and Bluetooth; Serial: AE-021-F**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.9$  mho/m;  $\epsilon_r = 41.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Left Section

Test Date: 05-16-2007; Ambient Temp: 23.4°C; Tissue Temp: 21.5°C

Probe: ES3DV2 - SN3022; ConvF(6.05, 6.05, 6.05); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Left Head, Slide Out, Tilt, Mid.ch**


**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.3 V/m

Peak SAR (extrapolated) = 0.254 W/kg

**SAR(1 g) = 0.191 mW/g; SAR(10 g) = 0.138 mW/g**

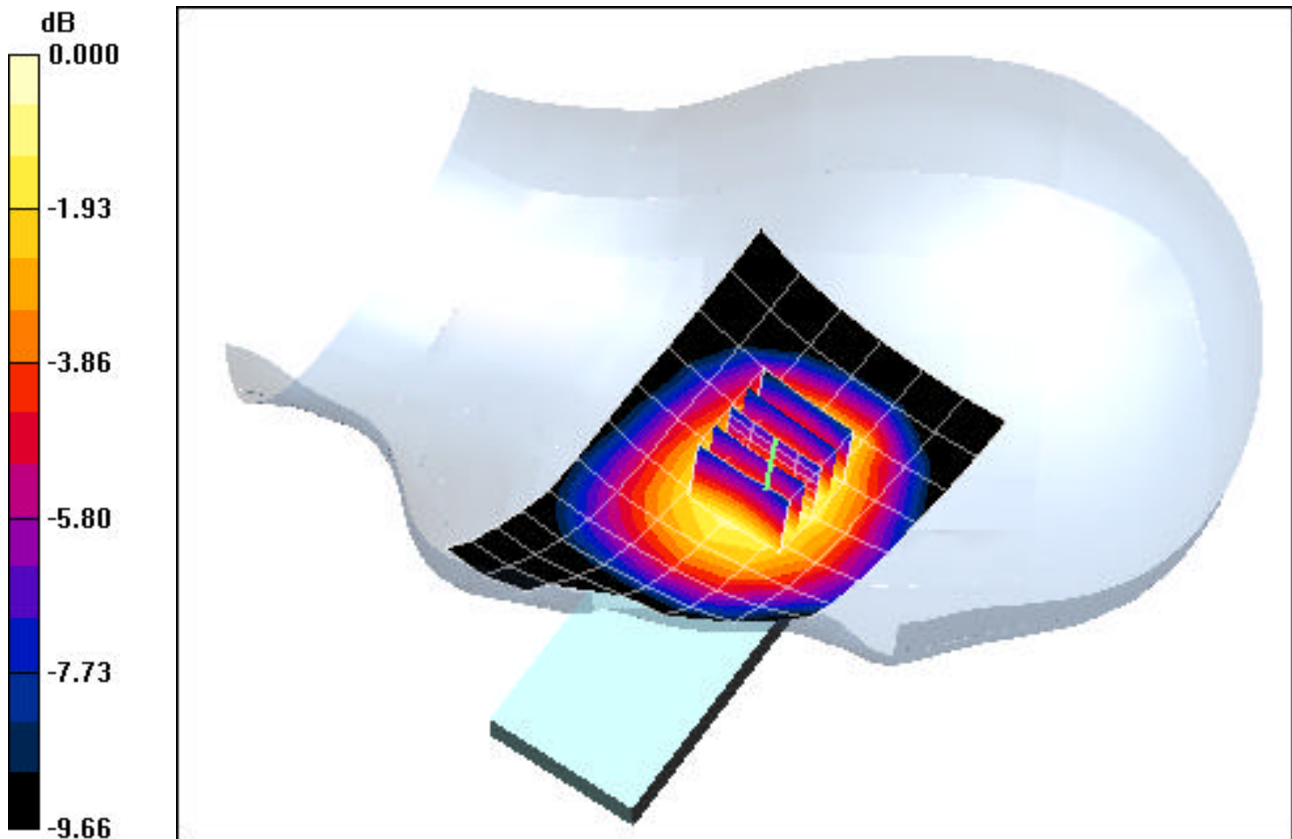

0 dB = 0.215mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-R610; Type: Cellular/PCS CDMA Phone with EVDO and Bluetooth; Serial: AE-021-F**

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ( $\sigma = 1.46$  mho/m;  $\epsilon_r = 40.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 05-17-2007; Ambient Temp: 23.7°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(5.03, 5.03, 5.03); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS CDMA, Right Head, Slide Out, Touch, Mid.ch**


**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.43 V/m

Peak SAR (extrapolated) = 0.674 W/kg

**SAR(1 g) = 0.460 mW/g; SAR(10 g) = 0.283 mW/g**

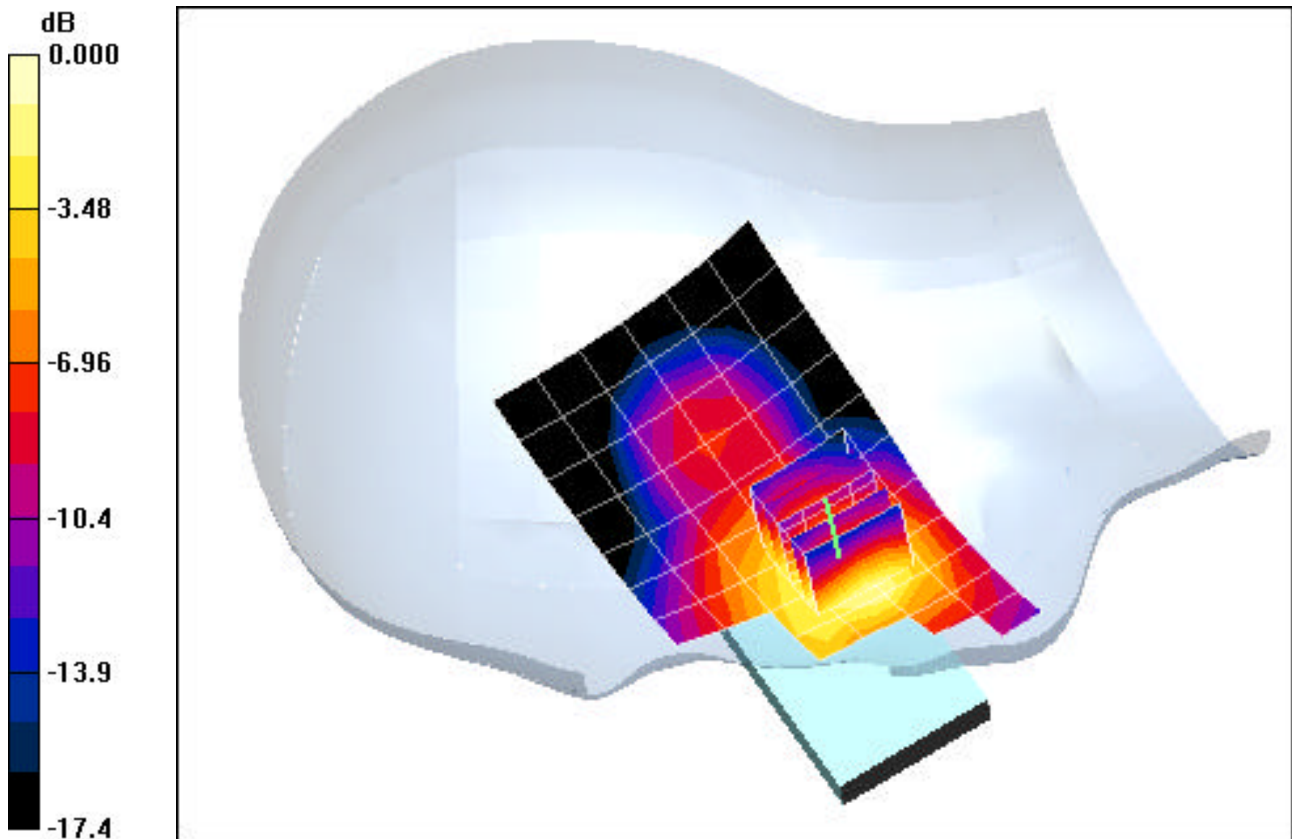

0 dB = 0.545mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-R610; Type: Cellular/PCS CDMA Phone with EVDO and Bluetooth; Serial: AE-021-F**

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ( $\sigma = 1.46$  mho/m;  $\epsilon_r = 40.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 05-17-2007; Ambient Temp: 23.7°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(5.03, 5.03, 5.03); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS CDMA, Right Head, Slide Out, Tilt, Mid.ch**


**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.4 V/m

Peak SAR (extrapolated) = 0.271 W/kg

**SAR(1 g) = 0.178 mW/g; SAR(10 g) = 0.107 mW/g**

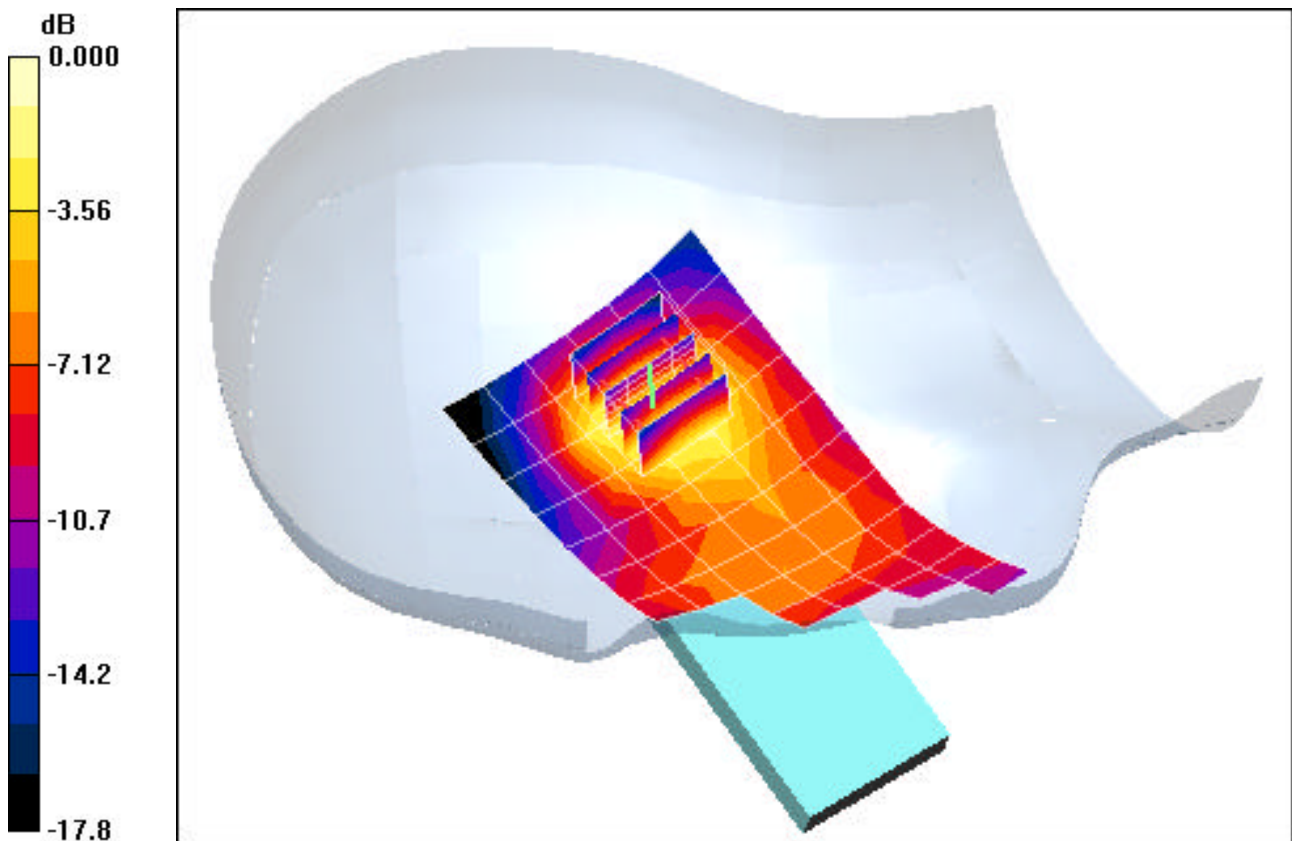

0 dB = 0.211mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-R610; Type: Cellular/PCS CDMA Phone with EVDO and Bluetooth; Serial: AE-021-F**

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ( $\sigma = 1.46$  mho/m;  $\epsilon_r = 40.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Left Section

Test Date: 05-17-2007; Ambient Temp: 23.7°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(5.03, 5.03, 5.03); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS CDMA, Left Head, Slide Out, Touch, Mid.ch**


**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.27 V/m

Peak SAR (extrapolated) = 0.559 W/kg

**SAR(1 g) = 0.390 mW/g; SAR(10 g) = 0.255 mW/g**

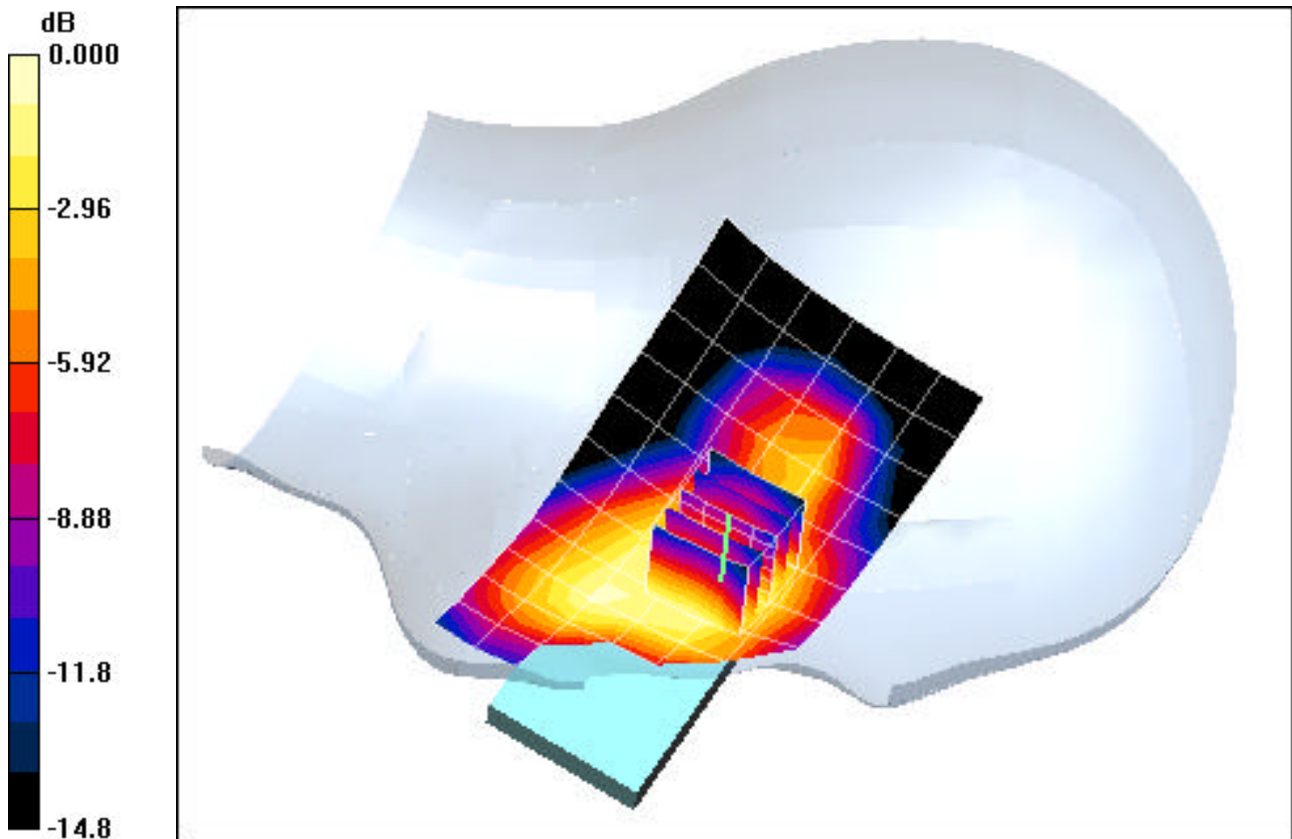

0 dB = 0.452mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-R610; Type: Cellular/PCS CDMA Phone with EVDO and Bluetooth; Serial: AE-021-F**

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ( $\sigma = 1.46$  mho/m;  $\epsilon_r = 40.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Left Section

Test Date: 05-17-2007; Ambient Temp: 23.7°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(5.03, 5.03, 5.03); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS CDMA, Left Head, Slide Out, Tilt, Mid.ch**


**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.9 V/m

Peak SAR (extrapolated) = 0.340 W/kg

**SAR(1 g) = 0.220 mW/g; SAR(10 g) = 0.131 mW/g**

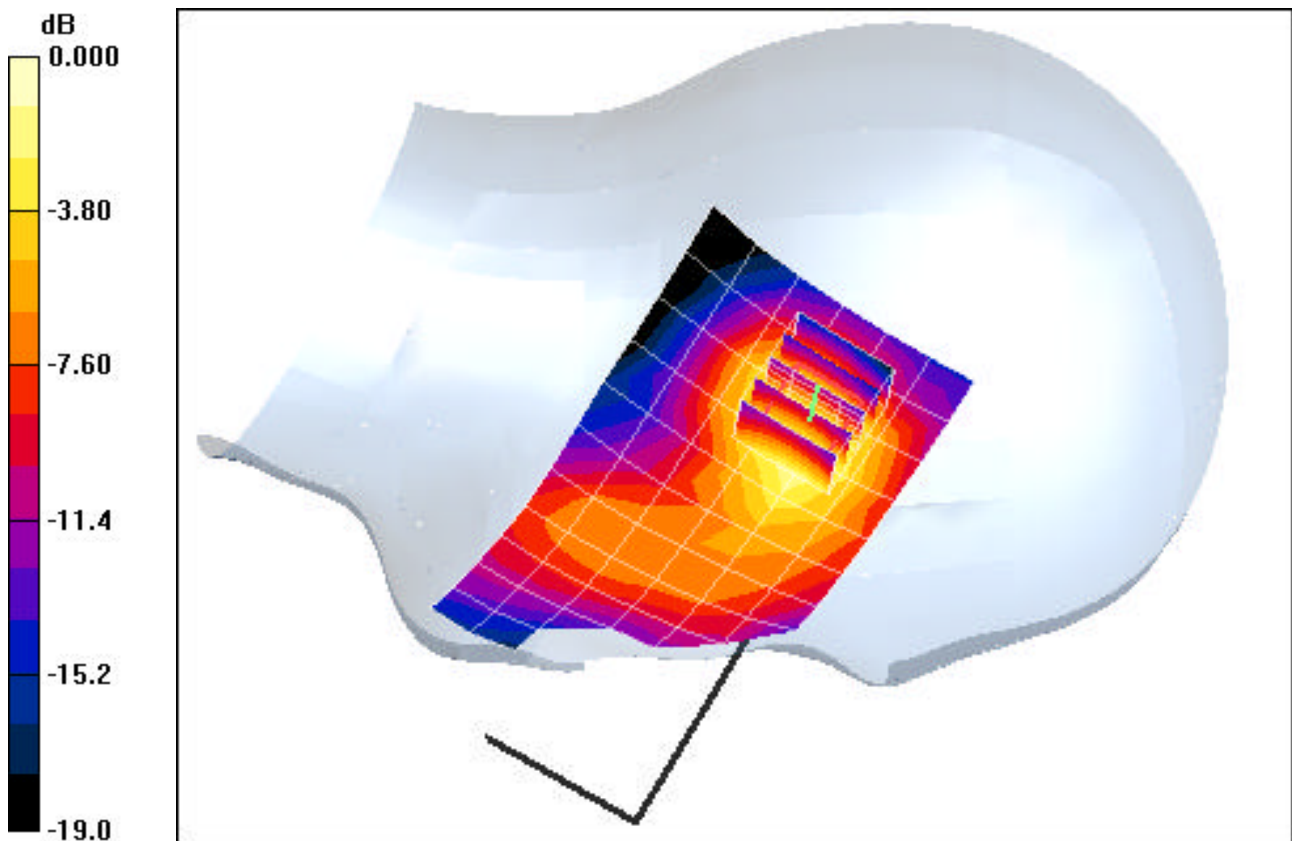

0 dB = 0.257mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-R610; Type: Cellular/PCS CDMA Phone with EVDO and Bluetooth; Serial: AE-021-F**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Muscle ( $\sigma = 0.99$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-22-2007; Ambient Temp: 23.2°C; Tissue Temp: 21.4°C

Probe: ES3DV2 - SN3022; ConvF(5.95, 5.95, 5.95); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Body SAR, Back side, Slide In, Mid.ch**


**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.4 V/m

Peak SAR (extrapolated) = 0.559 W/kg

**SAR(1 g) = 0.415 mW/g; SAR(10 g) = 0.293 mW/g**

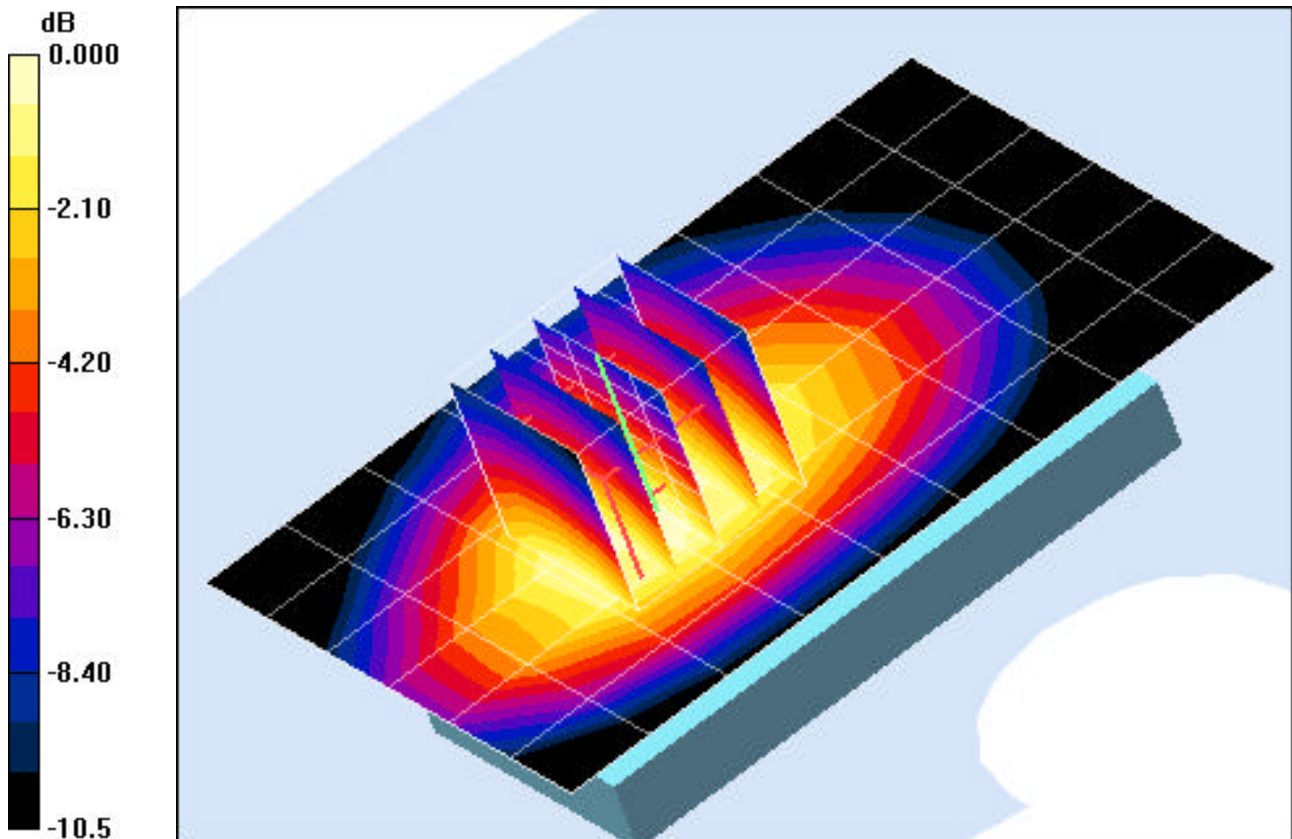

0 dB = 0.467mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-R610; Type: Cellular/PCS CDMA Phone with EVDO and Bluetooth; Serial: AE-021-F**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Muscle ( $\sigma = 0.99$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-22-2007; Ambient Temp: 23.2°C; Tissue Temp: 21.4°C

Probe: ES3DV2 - SN3022; ConvF(5.95, 5.95, 5.95); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Body SAR, Back side, Slide Out, Mid.ch**


**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.2 V/m

Peak SAR (extrapolated) = 0.539 W/kg

**SAR(1 g) = 0.420 mW/g; SAR(10 g) = 0.311 mW/g**

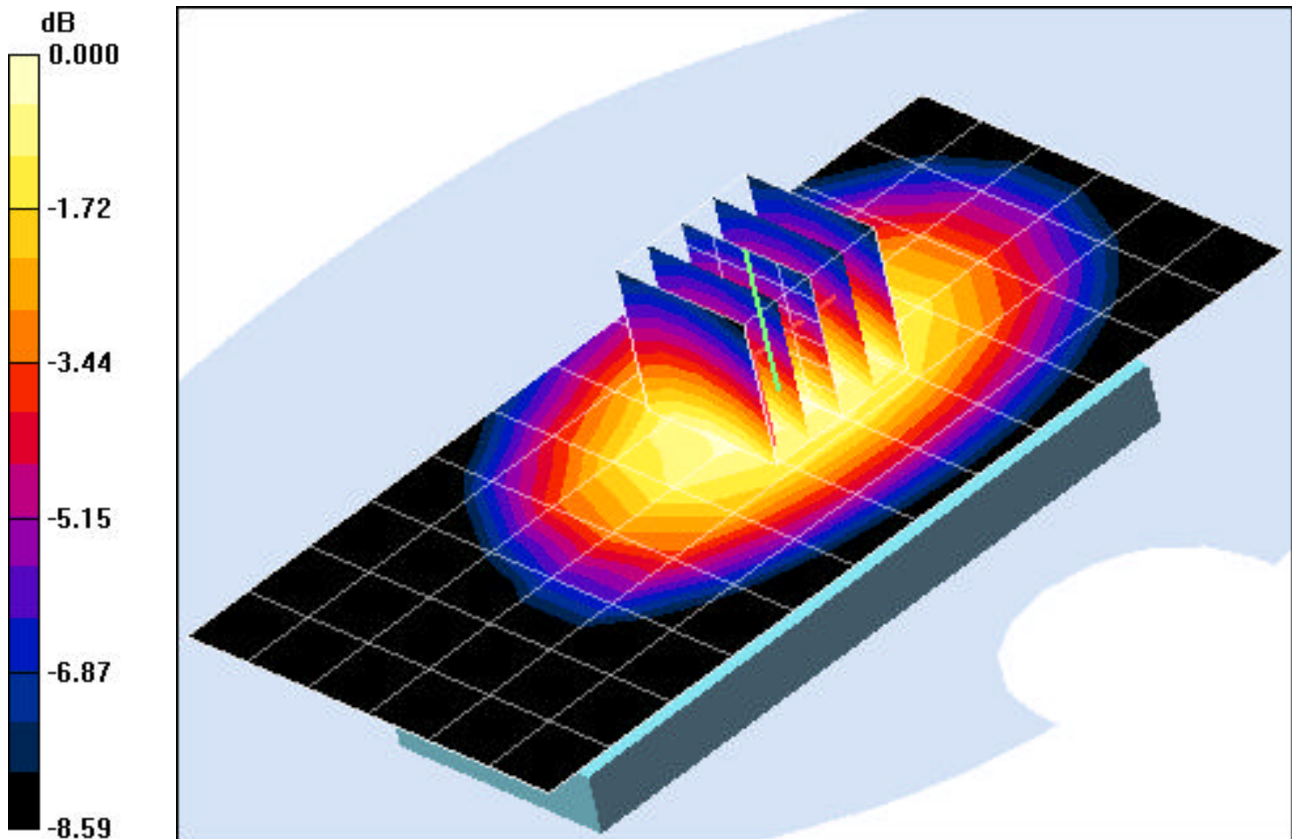

0 dB = 0.466mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-R610; Type: Cellular/PCS CDMA Phone with EVDO and Bluetooth; Serial: AE-021-F**

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Muscle ( $\sigma = 1.59$  mho/m;  $\epsilon_r = 54.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-22-2007; Ambient Temp: 23.2°C; Tissue Temp: 21.4°C

Probe: ES3DV2 - SN3022; ConvF(4.69, 4.69, 4.69); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS CDMA, Body SAR, Back side, Slide In, Mid.ch**


**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.1 V/m

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.614 mW/g; SAR(10 g) = 0.345 mW/g**

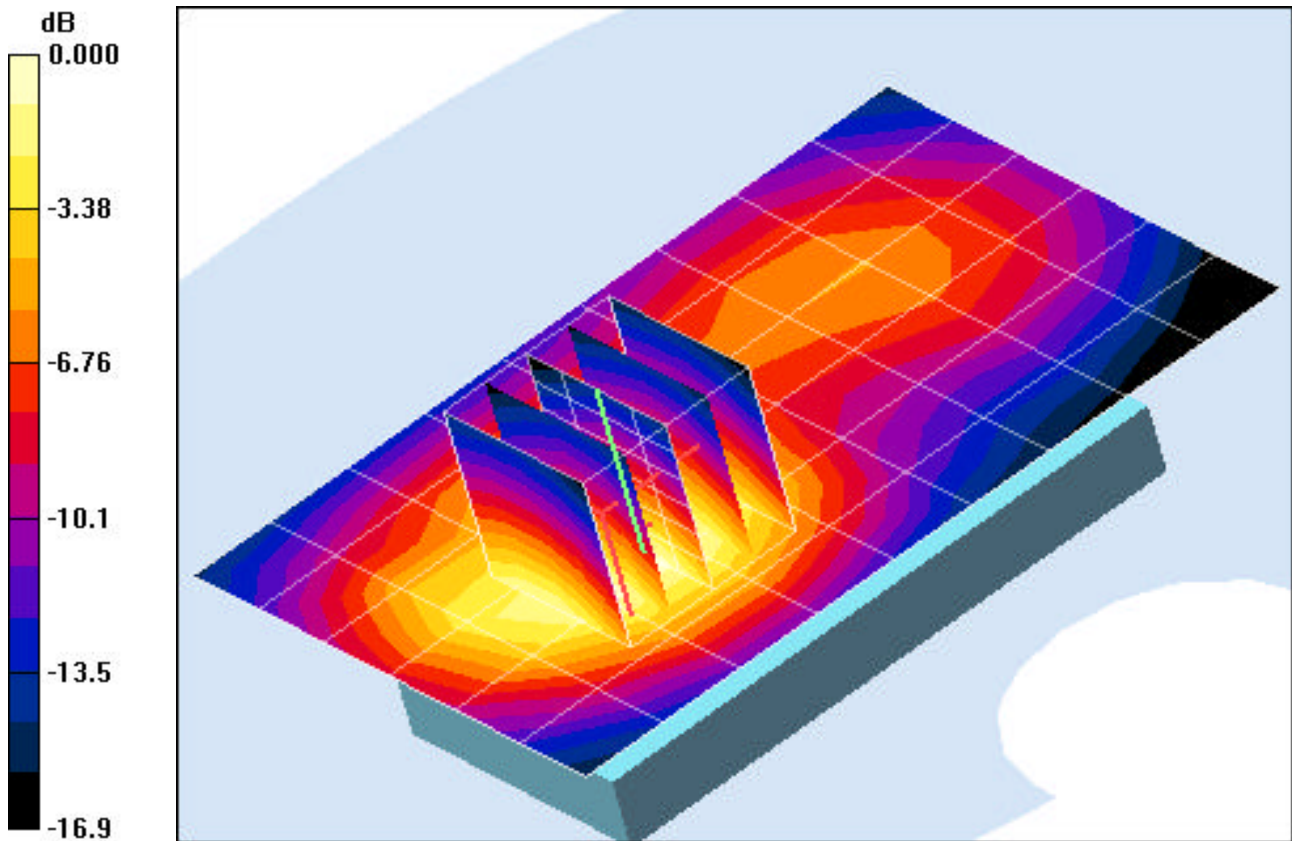

0 dB = 0.755mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-R610; Type: Cellular/PCS CDMA Phone with EVDO and Bluetooth; Serial: AE-021-F**

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Muscle ( $\sigma = 1.59$  mho/m;  $\epsilon_r = 54.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-22-2007; Ambient Temp: 23.2°C; Tissue Temp: 21.4°C

Probe: ES3DV2 - SN3022; ConvF(4.69, 4.69, 4.69); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS CDMA, Body SAR, Back side, Slide Out, Mid.ch**


**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.5 V/m

Peak SAR (extrapolated) = 1.18 W/kg

**SAR(1 g) = 0.703 mW/g; SAR(10 g) = 0.408 mW/g**

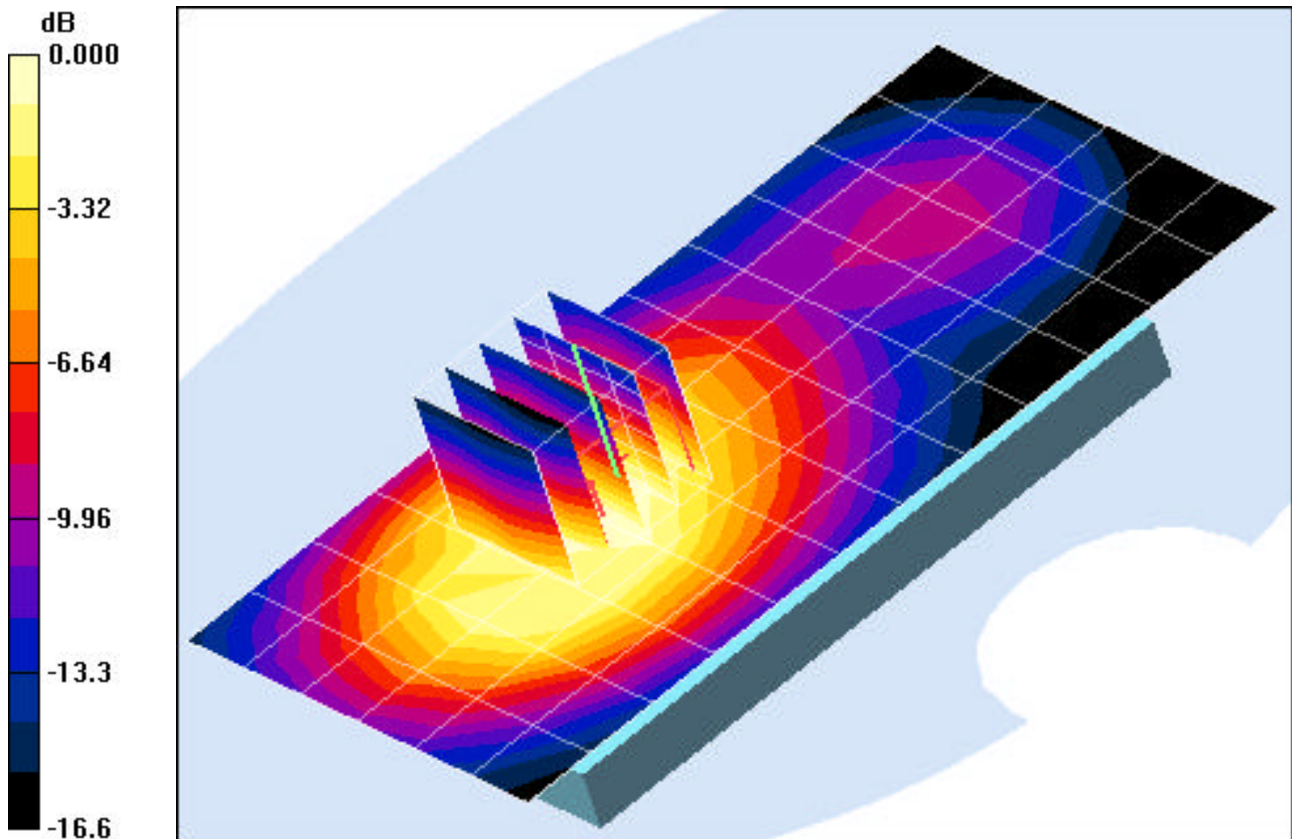

0 dB = 0.814mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-R610; Type: Cellular/PCS CDMA with EVDO and Bluetooth; Serial: AE-021-F**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.90$  mho/m,  $\epsilon_r = 41.5$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 05-16-2007; Ambient Temp: 23.4°C; Tissue Temp: 21.5°C

Probe: ES3DV2 - SN3022; ConvF(6.05, 6.05, 6.05); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Right Head, Slide Out, Touch, Mid.ch**


**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.33 V/m

Peak SAR (extrapolated) = 0.682 W/kg

**SAR(1 g) = 0.522 mW/g; SAR(10 g) = 0.378 mW/g**

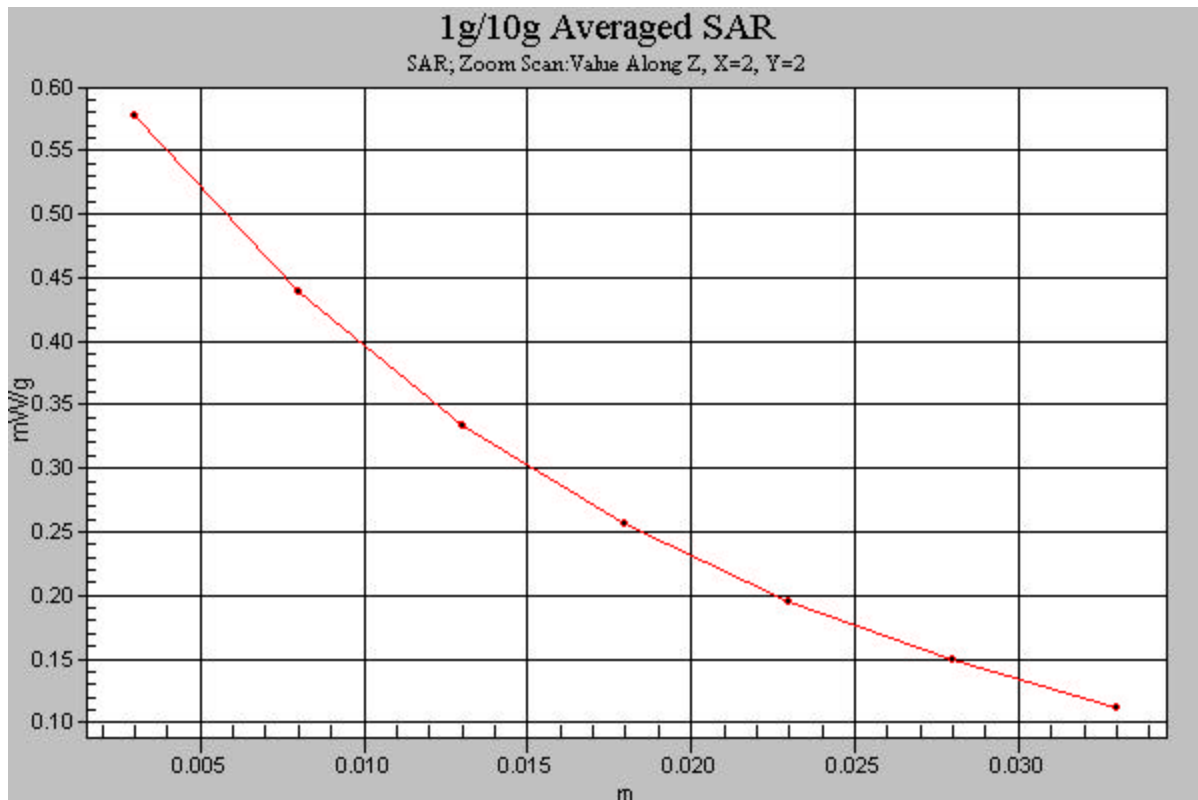

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-R610; Type: Cellular/PCS CDMA Phone with EVDO and Bluetooth; Serial: AE-021-F**

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ( $\sigma = 1.46$  mho/m,  $\epsilon_r = 40.11$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 05-17-2007; Ambient Temp: 23.7°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(5.03, 5.03, 5.03); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS CDMA, Right Head, Slide Out, Touch, Mid.ch**


**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.43 V/m

Peak SAR (extrapolated) = 0.674 W/kg

**SAR(1 g) = 0.460 mW/g; SAR(10 g) = 0.283 mW/g**

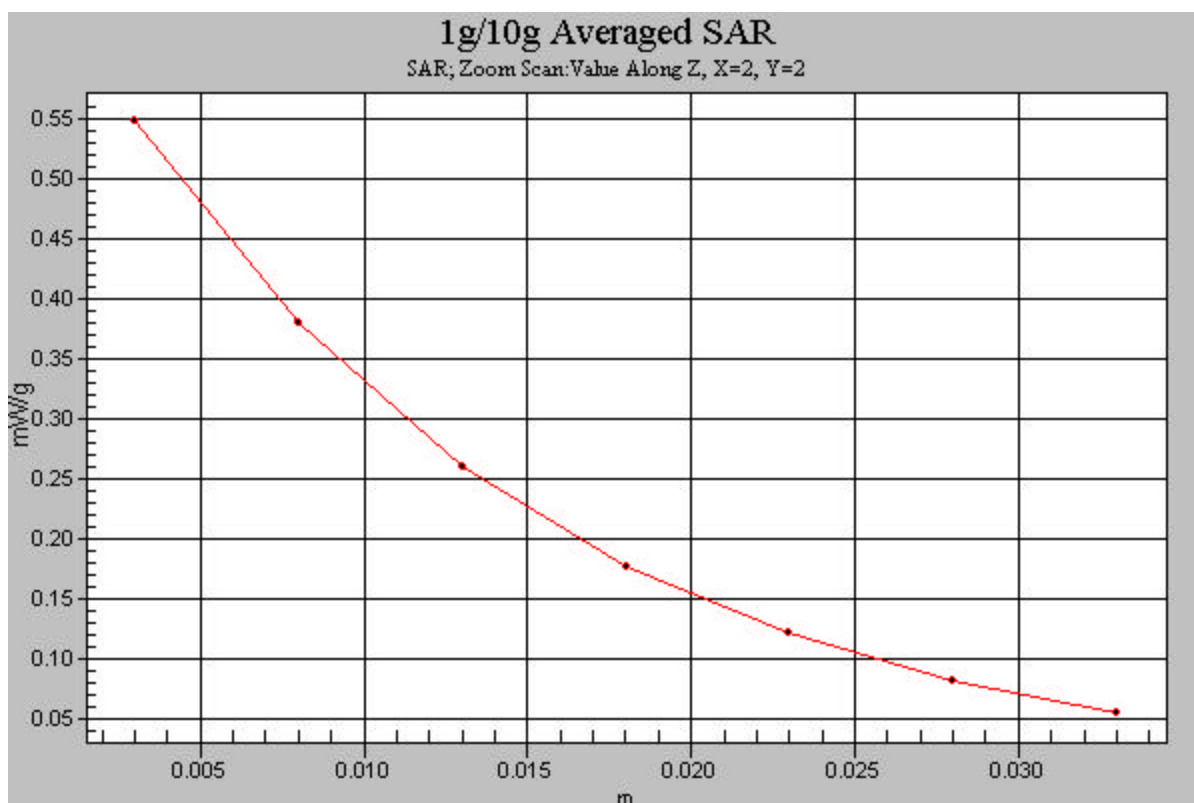

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-R610; Type: Cellular/PCS CDMA Phone with EVDO and Bluetooth; Serial: AE-021-F**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Muscle ( $\sigma = 0.99$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-22-2007; Ambient Temp: 23.2°C; Tissue Temp: 21.4°C

Probe: ES3DV2 - SN3022; ConvF(5.95, 5.95, 5.95); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Body SAR, Back side, Slide Out, Mid.ch**


**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.2 V/m

Peak SAR (extrapolated) = 0.539 W/kg

**SAR(1 g) = 0.420 mW/g; SAR(10 g) = 0.311 mW/g**

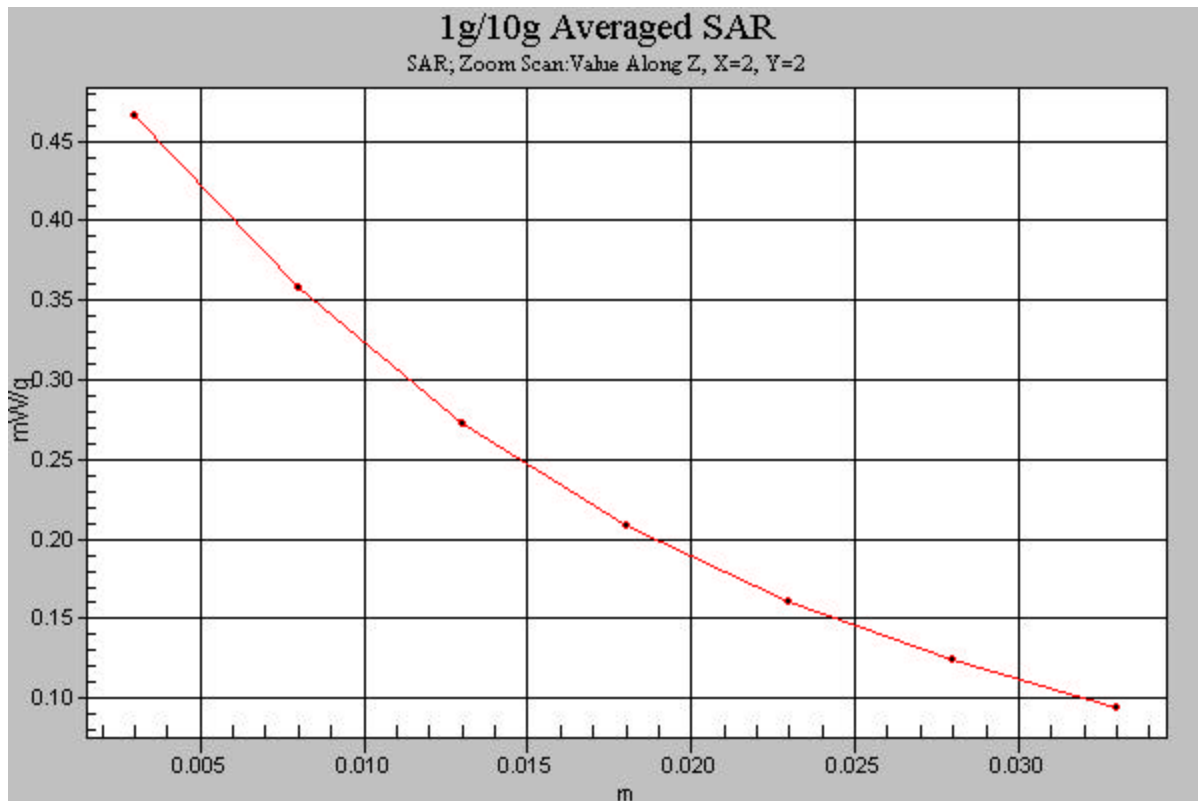

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SCH-R610; Type: Cellular/PCS CDMA Phone with EVDO and Bluetooth; Serial: AE-021-F**

Communication System: PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Muscle ( $\sigma = 1.59$  mho/m;  $\epsilon_r = 54.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-22-2007; Ambient Temp: 23.2°C; Tissue Temp: 21.4°C

Probe: ES3DV2 - SN3022; ConvF(4.69, 4.69, 4.69); Calibrated: 9/20/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS CDMA, Body SAR, Back side, Slide Out, Mid.ch**

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.5 V/m

Peak SAR (extrapolated) = 1.18 W/kg

**SAR(1 g) = 0.703 mW/g; SAR(10 g) = 0.408 mW/g**

