



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6554
<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE

Applicant Name:

Samsung Electronics, Co. Ltd.
18600 Broadwick St.
Rancho Dominguez, CA 90220 USA

Date of Testing:

September 01, 2006

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Test Report Serial No.:

0608280736

FCC ID: A3LSCHU340

APPLICANT: Samsung Electronics, Co. Ltd.

EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)

FCC Rule Part(s): FCC Part 15 Subpart B

FCC Classification: FCC Class B Digital Device (JBP)

Test Procedure: ANSI C63.4-2003 / EN55022: 1998 w/ A1 (2000) + A2 (2003)

The device bearing the FCC Identifier specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 (See Test Report). These measurements were performed with no deviation from the standards.

I authorize and attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

NVLAP accreditation does not constitute any product endorsement by NVLAP or any agency of the United States Government. PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortanez
President



NVLAP[®]
Lab Code 100431-0

PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 0608280736	Test Dates: September 01, 2006	EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)	FCC ID: A3LSCHU340	Page 1 of 13



TABLE OF CONTENTS

ATTACHMENT A. ATTESTATION STATEMENT(S)

ATTACHMENT B. TEST REPORT

FCC Class B MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 EVALUATION PROCEDURE	4
1.2 SCOPE	4
1.3 PCTEST TEST LOCATION	4
2.0 PRODUCT INFORMATION	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 OPERATION MODE	5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	5
3.0 DESCRIPTION OF TEST	6
3.1 CONDUCTED EMISSIONS	6
3.2 RADIATED EMISSIONS	7
4.0 SAMPLE CALCULATIONS	8
4.1 CONDUCTED EMISSION MEASUREMENT SAMPLE CALCULATION:	8
4.2 RADIATED EMISSION MEASUREMENT SAMPLE CALCULATION:	8
5.0 UNCERTAINTY OF MEASUREMENT	9
5.1 LINE CONDUCTED MEASUREMENT UNCERTAINTY CALCULATIONS:	9
5.2 RADIATED EMISSIONS MEASUREMENT UNCERTAINTY CALCULATIONS:	10
6.0 TEST EQUIPMENT CALIBRATION DATA	11
7.0 ENVIRONMENTAL CONDITIONS	12
8.0 CONCLUSION	13

ATTACHMENT C. SUMMARY OF TEST RESULTS

RADIATED TEST DATA

LINE-CONDUCTED TEST DATA/PLOT(S)

SUPPORT EQUIPMENT USED

ATTACHMENT D. FCC ID LABEL & LOCATION

ATTACHMENT E. BLOCK(S)/ SCHEMATIC(S) DIAGRAM

ATTACHMENT F. OPERATIONAL DESCRIPTION

ATTACHMENT G. TEST SETUP PHOTOGRAPHS

ATTACHMENT H. EXTERNAL PHOTOGRAPHS

ATTACHMENT I. INTERNAL PHOTOGRAPHS

ATTACHMENT J. USER'S MANUAL

PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 0608280736	Test Dates: September 01, 2006	EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)	FCC ID: A3LSCHU340	Page 2 of 13



MEASUREMENT REPORT



FCC Part 15B – Unintentional Radiators

A. § 2.1033 General Information

APPLICANT: Samsung Electronics, Co. Ltd.
APPLICANT ADDRESS: 18600 Broadwick St.
Rancho Dominguez, CA 90220 USA
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): FCC Part 15 Subpart B
FCC ID: A3LSCHU340
Test Device Serial No.: FD-147-C ☐ Production ☒ Pre-Production ☐ Engineering
FCC CLASSIFICATION: FCC Class B Digital Device (JBP)
DATE(S) OF TEST: September 01, 2006

A.1 Test Methodology

Both conducted and radiated measurements were taken using the methods and procedures described in ANSI C63.4-2003. Radiated testing was performed at an antenna-to-EUT distance of 3 meters.

A.2 Test Facility / NVLAP Accreditation

Conducted and radiated tests were performed at PCTEST Engineering Lab in Columbia, MD 21045, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC 2451).
- PCTEST Lab is accredited by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) in EMC, Telecommunication, and FCC for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. (NVLAP Lab code: 100431-0).
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and all Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.

PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 0608280736	Test Dates: September 01, 2006	EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)	FCC ID: A3LSCHU340	Page 3 of 13

1.0 INTRODUCTION

1.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) and FCC Public Notice dated July 12, 1995 entitled "Guidance on Measurement for Direct Sequence Spread Spectrum System" were used in the measurement of **Samsung Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA) (FCC ID: A3LSCHU340)**.

Deviation from measurement procedure.....NONE

1.2 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.3 PCTEST Test Location

The map at the right shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity are, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see Figure 1.3-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on January 27, 2006 and Industry Canada

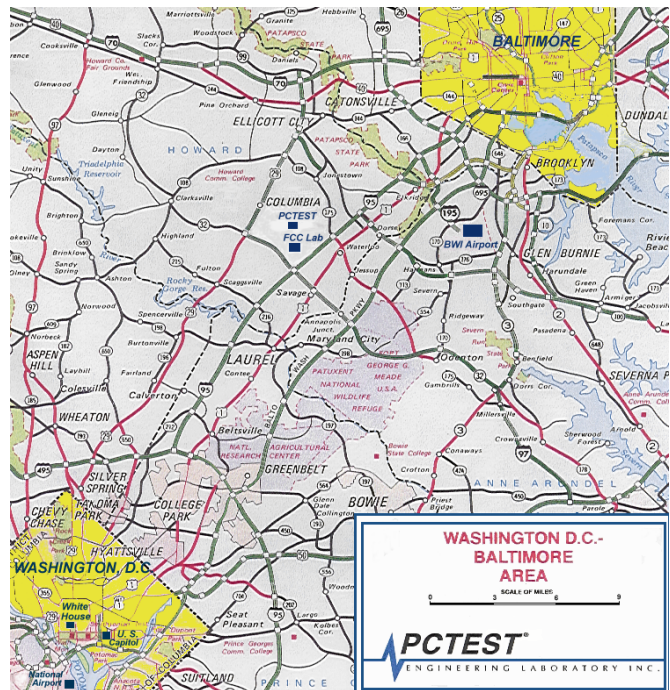


Figure 1.3-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 0608280736	Test Dates: September 01, 2006	EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)	FCC ID: A3LSCHU340	Page 4 of 13

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA) (FCC ID: A3LSCHU340)**.

2.2 Operation Mode

The Samsung Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA) (FCC ID: A3LSCHU340) was tested with a NOTEBOOK connected via USB interface port. Please see ATTACHMENT C for more information on the test setup and ATTACHMENT G for test setup photographs.

2.3 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing.

- None

PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 0608280736	Test Dates: September 01, 2006	EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)	FCC ID: A3LSCHU340	Page 5 of 13

3.0 DESCRIPTION OF TEST

3.1 Conducted Emissions



Figure 3.1-1. Shielded Enclosure Line-Conducted Test Facility

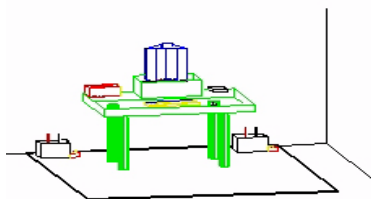


Figure 3.1-2. Line Conducted Emission Test Set-Up



Figure 3.1-3. Wooden Table & Bonded LISNs



Figure 3.1-4. LISN Schematic Diagram

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see Figure 3.1-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3.1-2). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (See Figure 3.1-3). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (See Figure 3.1-4). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150kHz to 30MHz with a 20ms sweep time. The frequencies producing the maximum level were re-examined using an EMI/Field Intensity Meter and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Attachment G. Each EME reported was calibrated using the HP8640D signal generator.

PCTEST™ PT. 15B TEST REPORT			CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 0608280736	Test Dates: September 01, 2006	EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)	FCC ID: A3LSCHU340	Page 6 of 13	

3.2 Radiated Emissions

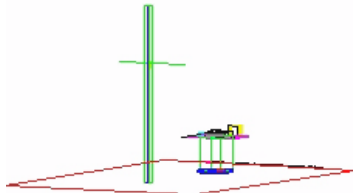


Figure 3.2-1. Meter Test Site




Figure 3.2-2. Dimensions of Outdoor Test Site

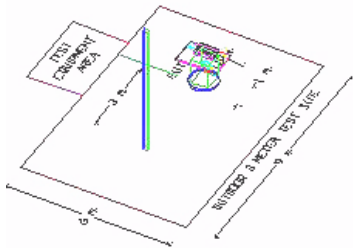


Figure 3.2-3. Turntable and System Setup

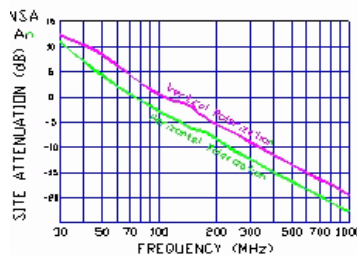


Figure 3.2-4. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made indoors at 1-meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, and turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using a bi-conical antenna and from 200 to 1000 MHz using a log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using RobertsTM Dipole antennas or horn antennas (see Figure 3.2-1). The test equipment was placed on a wooden and plastic bench situated on a 1.5m x 2m area adjacent to the measurement area (see Figure 3.2-2). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1MHz depending on the frequency or type of signal. Above 1GHz the detector function was set to CISPR average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3.2-3). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Attachment G. Each EME reported was calibrated using the HP8640D signal generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3.2-4.

PCTEST TM PT. 15B TEST REPORT			CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 0608280736	Test Dates: September 01, 2006	EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)	FCC ID: A3LSCHU340	Page 7 of 13	

4.0 SAMPLE CALCULATIONS

4.1 Conducted Emission Measurement Sample Calculation:

@ 20.3 MHz

Class B limit	= 250 μ V = 47.96 dB μ V
Reading	= - 67.8 dBm (calibrated level)
Convert to dB μ V	= - 67.8 + 107 = 39.2 dB μ V
$10^{(39.2/20)}$	= 91.2 μ V
Margin	= 39.2 - 47.96 = - 8.76 dB
	= 8.8 dB below limit

4.2 Radiated Emission Measurement Sample Calculation:

@ 66.7 MHz

Class B limit	= 100 μ V/m = 40.0 dB μ V/m
Reading	= - 76.0 dBm (calibrated level)
Convert to dB μ V	= - 76.0 + 107 = 31.0 dB μ V
Antenna Factor + Cable Loss	= 5.8 dB/m
Total	= 36.8 dB μ V/m
Margin	= 36.8 - 40.0 = - 3.2 dB
	= 3.2 dB below limit

Note:

$$\text{Level [dB}\mu\text{V]} = 20 \log_{10} (\text{Level } [\mu\text{V/m}])$$

$$\text{Level [dB}\mu\text{V]} = \text{Level [dBm]} + 107$$

PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 0608280736	Test Dates: September 01, 2006	EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)	FCC ID: A3LSCHU340	Page 8 of 13

5.0 UNCERTAINTY OF MEASUREMENT

5.1 Line Conducted Measurement Uncertainty Calculations:

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

Contribution (Line Conducted)	Probability Distribution	Uncertainty ($\pm$ dB)	
		9kHz-150kHz	150-30MHz
Receiver specification	Rectangular	1.5	1.5
LISN coupling specification	Rectangular	1.5	1.5
Cable and input attenuator calibration	Normal (k=2)	0.3	0.5
Mismatch: Receiver VRC $\Gamma_1 = 0.03$ LISN VRC $\Gamma_R = 0.8$ (9kHz) 0.2 (30MHz) Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	0.2	0.35
System repeatability	Std. deviation	0.2	0.05
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	1.26	1.30
Expanded uncertainty	Normal (k=2)	2.5	2.6

Table 5-1. Line Conducted Measurement Uncertainty Calculations

$$\text{Calculations for 150kHz to 30MHz: } u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)} = \pm \sqrt{\frac{1.5^2 + 1.5^2}{3} + \left(\frac{0.5}{2}\right)^2 + 0.35^2} = \pm 1.298\text{dB}$$

$$U = 2U_c(y) = \pm 2.6\text{dB}$$

PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 0608280736	Test Dates: September 01, 2006	EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)	FCC ID: A3LSCHU340	Page 9 of 13

5.2 Radiated Emissions Measurement Uncertainty Calculations:

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

Contribution (Radiated Emissions)	Probability Distribution	Uncertainties ($\pm$ dB)	
		3 m	10 m
Ambient Signals		-	-
Antenna factor calibration	Normal (k=2)	± 1.0	± 1.0
Cable loss calibration	Normal (k=2)	± 0.5	± 0.5
Receiver specification	Rectangular	± 1.5	± 1.5
Antenna directivity	Rectangular	+ 0.5 / - 0	+ 0.5
Antenna factor variation with height	Rectangular	± 2.0	± 0.5
Antenna phase centre variation	Rectangular	0.0	± 0.2
Antenna factor frequency interpolation	Rectangular	± 0.25	± 0.25
Measurement distance variation	Rectangular	± 0.6	± 0.4
Site imperfections	Rectangular	± 2.0	± 2.0
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67$ (Bi) 0.3 (Lp) Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	+ 1.1 - 1.25	± 0.5
System repeatability	Std. Deviation	± 0.5	± 0.5
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+ 2.19 / - 2.21	+ 1.74 / - 1.72
Expanded uncertainty	Normal (k=2)	+ 4.38 / - 4.42	+ 3.48 / - 3.44

Table 5-2. Radiated Emissions Measurement Uncertainty Calculations

Calculations for 3m-biconical antenna. Coverage factor of k=2 will ensure that the level of confidence will be approximately 95%, therefore:

$$U=2u_c(y) = 2 \times \pm 2.19 = \pm 4.38\text{dB}$$

PCTEST™ PT. 15B TEST REPORT	 CERTIFICATION REPORT (FCC PART 15B) 			Reviewed by: Quality Manager
Test Report S/N: 0608280736	Test Dates: September 01, 2006	EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)	FCC ID: A3LSCHU340	Page 10 of 13

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

TYPE	MODEL	CAL. DUE DATE	CAL. INTERVAL	SERIAL No.
Spectrum Analyzer/Tracking Generator	HP 8591A (9kHz-1.8GHz)	09/12/06	Annual	3144A02458
Spectrum Analyzer	HP 8591A (9kHz-1.8GHz)	10/15/06	Annual	3108A02053
Spectrum Analyzer	HP 8594A (9kHz-2.9GHz)	11/02/06	Annual	3051A00187
Spectrum Analyzer	HP 8566B (100Hz-22GHz)	12/22/06	Annual	3638A08713
PSG Signal Generator	Agilent E8257D (250kHz-20GHz)	02/11/07	Annual	MY45470194
Quasi-Peak Adapter	HP 85650A	12/22/06	Annual	2043A00301
Preamplifier	HP 8449B (1-26.5GHz)	12/22/06	Annual	3008A00985
Attenuation/Switch Driver	HP 11713A	12/22/06	Annual	N/A
Preselector	HP 85685A (20Hz-2GHz)	12/22/06	Annual	N/A
6dB Res BW Spec. Analyzer Display	OPT 462	12/22/06	Annual	3701A22204
Ailtech/Eaton Adapter	CCA-7 CISPR/ANSI QP Adapter	12/19/06	Annual	0194-04082
Ailtech/Eaton EMI/Field Intensity Meter	NM 37/57A-SL (30MHz – 1GHz)	06/07/07	Annual	0805-03334
Broadband Amplifier (2)	HP 8447D (0.1 – 1300MHz)	N/A	N/A	2443A01900, 1937A03348
Horn Antenna	EMCO Model 3115 (1-18GHz)	08/25/07	Bi-Annual	9704-5182
Roberts Dipoles	Compliance Design (1 set) A100	08/31/07	Bi-Annual	5118
EMCO LISN (3)	3816/2, 3816/2, 3725/2	10/26/06	Annual	1077, 1079, 2099
SOLAR LISN (2)	8012-50	11/18/07	Bi-Annual	0313233, 0310234
Microwave Preamp 40dB Gain	HP 83017A (0.5-26.5GHz)	N/A	N/A	3123A00181
Coax Cable	RG58	02/26/07	Annual	N/A
Microwave Cables	MicroCoax (1.0-26.5GHz)	02/26/07	Annual	N/A
Shielded Screen Room	RF Lindgren Model 26-2/2-0	N/A	N/A	6710 (PCT270)
Shielded Semi-Anechoic Chamber	Ray Proof Model S81	N/A	N/A	R2437 (PCT278)
Temperature & Humidity Chamber	ESPEC SCP-220	06/08/07	Annual	017620

Table 6-1. Annual Test Equipment Calibration Schedule

PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 0608280736	Test Dates: September 01, 2006	EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)	FCC ID: A3LSCHU340	Page 11 of 13

7.0 ENVIRONMENTAL CONDITIONS

The temperature is controlled within range of 15°C to 35°C.

The relative humidity is controlled within range of 10% to 75%.

The atmospheric pressure is controlled within the range 86-106kPa (860-1060mbar).

PCTEST™ PT. 15B TEST REPORT	 PCTEST wires		CERTIFICATION REPORT (FCC PART 15B)	 SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0608280736	Test Dates: September 01, 2006	EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)		FCC ID: A3LSCHU340	Page 12 of 13

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA) (FCC ID: A3LSCHU340)** has been tested to comply with the requirements specified in §15.107 and §15.109 of the FCC Rules.

PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 0608280736	Test Dates: September 01, 2006	EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)	FCC ID: A3LSCHU340	Page 13 of 13

ATTACHMENT C – TEST DATA**Summary of Results**

Test Date(s): September 01, 2006

Test Engineer:



FCC Part 15 Section	Description	Result
15.107	Conducted Emissions	PASS
15.109	Radiated Spurious Emissions	PASS

Table C-1. Summary of Test Results

PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 06080736	Test Dates: September 01, 2006	EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)	FCC ID: A3LSCHU340	Page C1

ATTACHMENT C – Test Data (Cont'd)

Radiated Test Data

FREQ (MHz)	Level (dBm)	AFCL (dB/m)	POL (H/V)	Height (m)	Azimuth (° angle)	F/S (mV/m)	Margin (dB)
66.44	-85.60	5.80	V	2.6	160	22.96	-12.8
133.09	-90.04	12.45	V	2.4	225	29.56	-14.1
157.32	-91.01	14.11	H	2.3	200	32.04	-13.4
166.25	-88.37	14.68	V	2.3	180	46.29	-10.2
300.50	-88.81	20.62	V	1.3	270	87.15	-7.2
481.30	-93.45	25.65	H	1.1	225	91.25	-6.8

Table C-2. Radiated Measurements at 3-meters

NOTES:


1. All modes of operation were investigated and the worst-case emissions are reported.
2. Radiated Emissions were measured from 30 MHz – 2000 MHz.

-
1. All readings are calibrated by HP8640D signal generator with accuracy traceable to the National Institute of Standards and Technology (NIST).
 2. AFCL = Antenna Factor (Roberts dipole) and Cable Loss (30 ft. RG58C/U).
 3. Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used with a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 06080736	Test Dates: September 01, 2006	EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)	FCC ID: A3LSCHU340	Page C2

ATTACHMENT C – Test Data (Cont'd)

Line Conducted Test Data

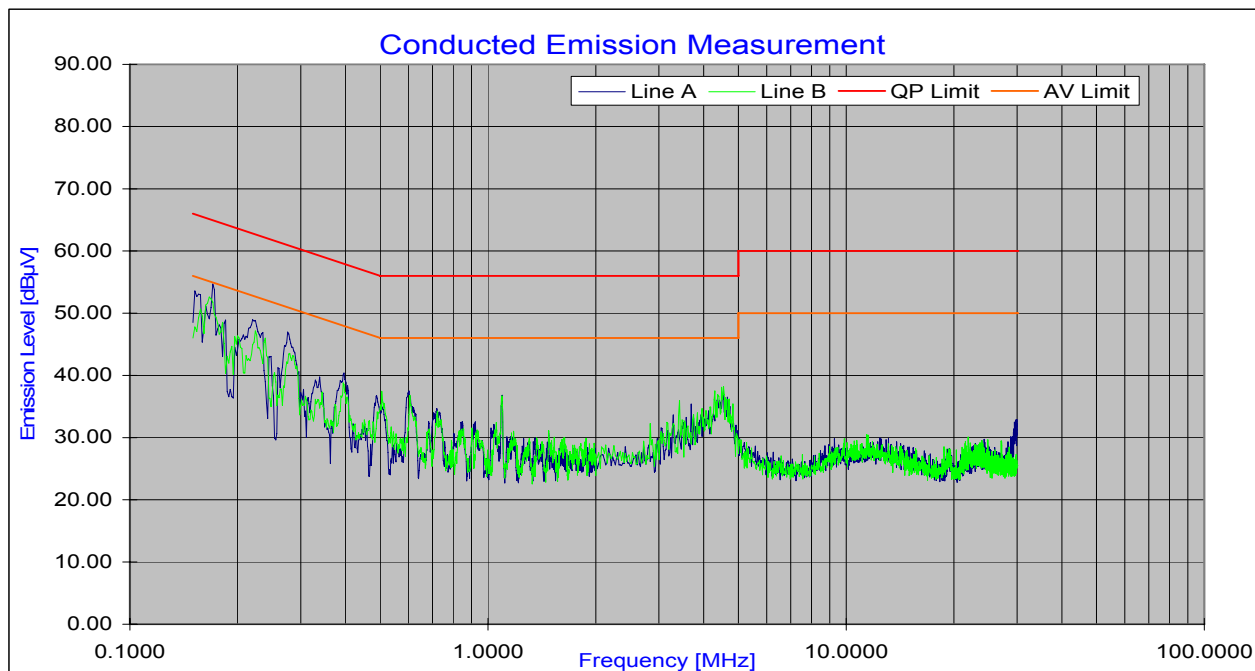

Ver. 1.1 ©PCTEST 2006.08

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	0.152	8.19	49.33	65.87	-16.54	40.16	55.87	-15.71
2	A	0.150	8.20	52.21	66.00	-13.79	37.62	56.00	-18.38
3	A	0.222	7.85	46.30	62.76	-16.46	34.11	52.76	-18.65
4	A	0.274	7.66	43.97	61.00	-17.03	39.62	51.00	-11.38
5	A	0.393	7.50	37.47	57.99	-20.52	32.56	47.99	-15.43
6	A	4.471	7.50	32.08	56.00	-23.92	22.21	46.00	-23.79
7	A	0.602	7.40	34.49	56.00	-21.51	29.16	46.00	-16.84
8	A	0.235	7.80	39.11	62.27	-23.16	26.55	52.27	-25.72
9	A	1.093	7.31	34.86	56.00	-21.14	31.37	46.00	-14.63
10	A	0.489	7.43	33.84	56.19	-22.35	26.97	46.19	-19.22
11	B	0.150	8.20	53.21	65.99	-12.78	46.55	55.99	-9.44
12	B	0.207	7.90	45.37	63.31	-17.94	39.46	53.31	-13.85
13	B	0.163	8.12	51.39	65.30	-13.91	47.58	55.30	-7.72
14	B	0.224	7.84	44.10	62.66	-18.56	38.88	52.66	-13.78
15	B	0.280	7.64	42.02	60.83	-18.81	36.38	50.83	-14.45
16	B	4.593	7.50	33.16	56.00	-22.84	22.80	46.00	-23.20
17	B	4.256	7.49	32.17	56.00	-23.83	22.32	46.00	-23.68
18	B	0.498	7.43	32.84	56.03	-23.19	26.86	46.03	-19.17
19	B	4.361	7.49	32.54	56.00	-23.46	22.53	46.00	-23.47
20	B	0.396	7.49	34.63	57.94	-23.31	28.64	47.94	-19.30

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: None.

PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 06080736	Test Dates: September 01, 2006	EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)	FCC ID: A3LSCHU340	Page C3



ATTACHMENT C – Test Data (Cont'd)

Test Support Equipment

1	Samsung Tri-Mode CDMA Phone	FCC ID: A3LSCHU340	S/N: FD-147-C
2	Samsung Data Link Cable	Model: PCB115UBE 1.1m Shielded USB Data Link Cable	S/N: DW1A121AS
3	Panasonic Toughbook w/ AC Adapter	FCC ID: CF-28 (DoC) Model: CF-AA1639A 1.8m Unshielded AC power cord 1.8m Unshielded DC power cord w/ ferrite bead on computer end	S/N: T0838ZA S/N: 020413255A
4	H/P Thinkjet Printer	FCC ID: DS16XU2225C 1.8m Unshielded AC power cord 1.0m Shielded parallel data cable	S/N: 2604S10169

Note: See Attachment G – Test Setup Photographs, for actual system test setup.

PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 06080736	Test Dates: September 01, 2006	EUT Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)	FCC ID: A3LSCHU340	Page C4