



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested: SCH-U340
FCC ID (Requested): A3LSCHU340
Report No: FD-230-R1/2
Job No: FD-230
Date issued: January 8, 2007

**Supplement Test Report FD-230-R1, dated November 23, 2006.
The test results contained in this Report supersede those.**

- Abstract -

All measurement reported here in accordance with FCC Rules, 47CFR
Part2, Part22, Part24.

Prepared By

SH ONG – Test Engineer

Checked By

WW JANG – Manager

Authorized By

SH PARK – Senior Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC Certification Information	3
1.1 §2.1033 General Information	3
2. INTRODUCTION	4
2.1 General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST	6
5. DESCRIPTION OF TESTS	7
5.1. Output Power Variation	7
5.2 Effective Radiated Power/Equivalent Isotropic Radiated Power	8
5.3 Radiated Spurious & Harmonic Emission	9
5.4 Occupied Bandwidth	11
5.5 Spurious and Harmonic Emissions at Antenna Terminal	11
5.5.1 Occupied Bandwidth Emission Limits	11
5.5.2 Conducted Spurious Emission	12
5.6 Frequency Stability / Temperature Variation	13
6. TEST DATA	14
6.1 Effective Radiated Power(E.R.P.)	14
6.2 Equivalent Isotropic Radiated Power(E.I.R.P.)	16
6.3 AMPS Radiated Spurious & Harmonic Measurement	17
6.4 Cellular CDMA Radiated Spurious & Harmonic Measurement	18
6.5 PCS CDMA Radiated Spurious & Harmonic Measurement	19
6.6 AMPS Radiated Spurious & Harmonic Conversion Table	20
6.7 CDMA Radiated Spurious & Harmonic Conversion Table	21
6.8 PCS Radiated Spurious & Harmonic Conversion Table	22
6.9 Frequency Stability	23
6.9.1 AMPS Frequency Stability Table	23
6.9.2 CDMA Frequency Stability Table	24
6.9.3 PCS Frequency Stability Table	25
6.9.4 AMPS Frequency Stability Graph	26
6.9.5 CDMA Frequency Stability Graph	28
6.9.6 PCS Frequency Stability Graph	30
7. SAMPLE CALCULATION	32
7.1 Emission Designator	
8. CONCLUSION	33
9. TEST PLOTS	34



MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1 §2.1033 General Information

- Applicant Name: SAMSUNG ELECTRONICS CO., LTD.
- Address: 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- Attention: SungJoo KIM, Engineering Manager (QA Lab)
- FCC ID: A3LSCHU340
- Quantity: Quantity production is planned
- Emission Designators: 40K0F8W, 40K0F1D(AMPS), 1M25F9W
- Tx Freq. Range: 824.04-848.97MHz (AMPS)
824.70-848.31MHz (CDMA)
1851.25-1908.75MHz (PCS CDMA)
- Rx Freq. Range: 869.04-893.97 MHz (AMPS)
869.70-893.31 MHz (CDMA)
1931.25-1988.75 MHz (PCS CDMA)
- Max. Power Rating: 0.447 W ERP AMPS(26.50 dBm)
0.401 W ERP CDMA(26.03 dBm)
0.318 W EIRP PCS CDMA (25.02 dBm)
- FCC Classification(s): Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type: Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)
- Modulation(s): AMPS/CDMA
- Frequency Tolerance: $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s): §24(E), §22(H), §2.
- Dates of Test: Nov 14-18, Dec 21, 2006
- Place of Test: SAMSUNG Lab,
- Test Report S/N: FD-230-R1/2

2. INTRODUCTION

2.1 General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742. The site have 1 Fully-anechoic chamber and measurement facility.

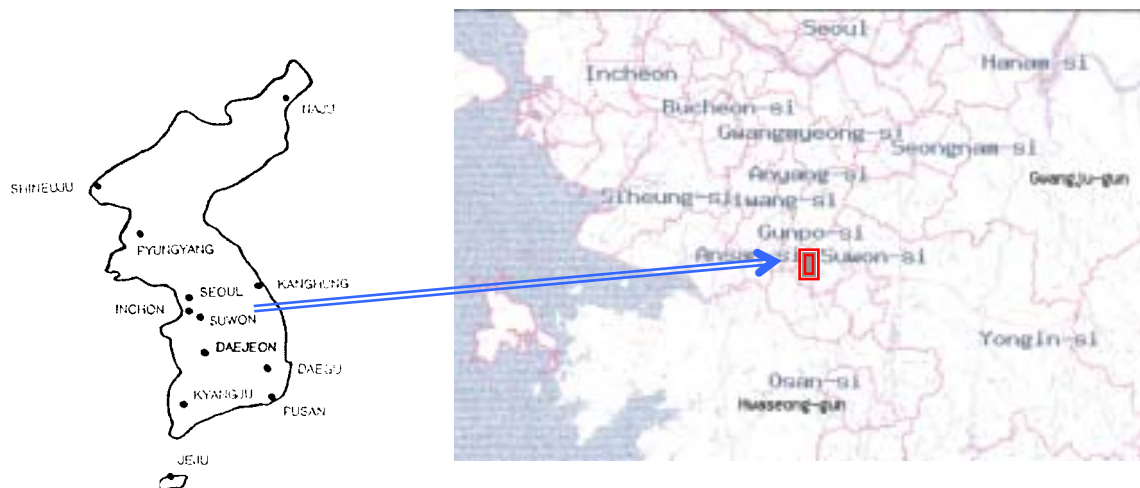


Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT at the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

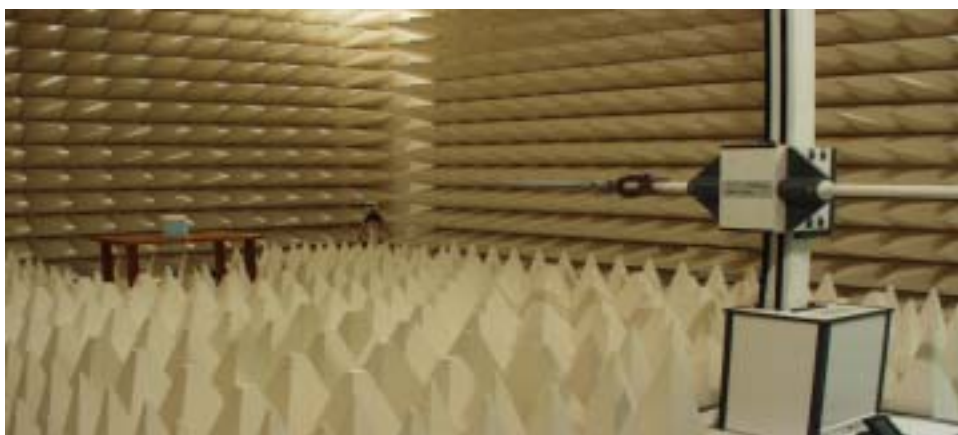


Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

- End of page -

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2007-10-01
	E4440A(3Hz~26.5GHz)	MY41000236	2007-04-14
	E4440A(3Hz~26.5GHz)	MY41000233	2007-04-05
Signal Generator	SMIQ03B	83824/021	2007-12-08
	SMR20	835197/030	2007-01-10
Power Meter	E4419B	GB41293846	2007-09-06
Power Sensor	8481B	3318A10325	2007-09-24
	8485A	3318A19924	2007-09-24
Amplifier	5S1G4	304866	2007-10-19
Pre-Amplifier	8449B	3008A00691	2008-01-02
Communication test set	8960	GB42230535	2008-01-02
	8960	GB42360886	2007-07-03
Antenna Master	MA240	240/618	Not Required
Controller	HD100	100/756	Not Required
Environmental Chamber	SH-241	92000548	2007-11-16
	SH-241	92000549	2007-11-16
Horn Antenna	HF906	360306/011	2007-03-31
Dipole Antenna	3121C-DB4	9007-588	2007-05-29
Receive Antenna	HL040	353255/020	2007-04-25
Divider	11636B	51941	Not Required
	11636B	51942	Not Required
	11636B	51946	Not Required
High Pass Filter	WHK1.0/15G-10SS	1	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1 Output Power Variation

Test Condition to measure the Output Power

This device was tested under all R.C.s and S.O.s and worst case is reported with RC3/SO55, with “All Up” power control bits.

The following procedures were followed according to FCC “SAR Measurement Procedures for 3G Devices”, May 2006.

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 5-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH0 and demodulation of RC 3,4 or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH0 data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 5-2 was applied.
5. FCHs were configured at full rate for maximum SAR with “All Up” power control bits.

Parameter	Units	Value
$\hat{I}_{or}$	dBm/1.23MHz	-104
Pilot Ec/Ior	dB	-7
Traffic Ec/Ior	dB	-7.4

Table 5-1
Parameters for Max. Power for RC1

Parameter	Units	Value
$\hat{I}_{or}$	dBm/1.23MHz	-86
Pilot Ec/Ior	dB	-7
Traffic Ec/Ior	dB	-7.4

Table 5-2
Parameters for Max. Power for RC1

Band	Channel	CDMA2000 RC	SO2	SO55	TDSO SO32
Cellular	1013	RC1	25.29	25.29	-
		RC3	25.30	25.30	25.32
	384	RC1	25.28	25.29	-
		RC3	25.30	25.30	25.33
	777	RC1	25.31	25.32	-
		RC3	25.33	25.33	25.33
PCS	25	RC1	25.23	25.25	-
		RC3	25.25	25.24	25.22
	600	RC1	25.31	25.30	-
		RC3	25.32	25.33	25.28
	1175	RC1	24.96	25.01	-
		RC3	25.09	25.10	25.15

Table 5-3
Maximum Power Output Table for SCH-U340

5.2 Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

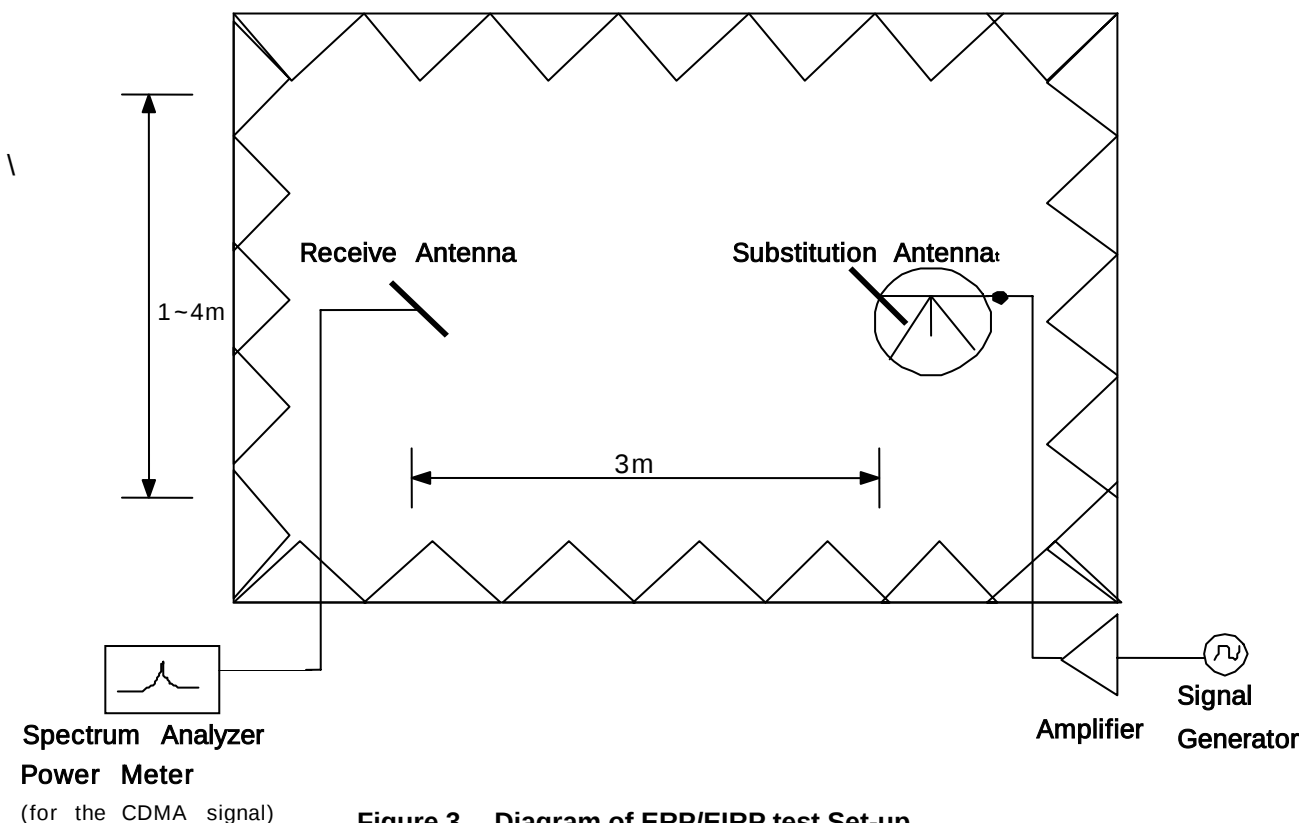


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA & PCS signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP is recorded.

5.3 Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

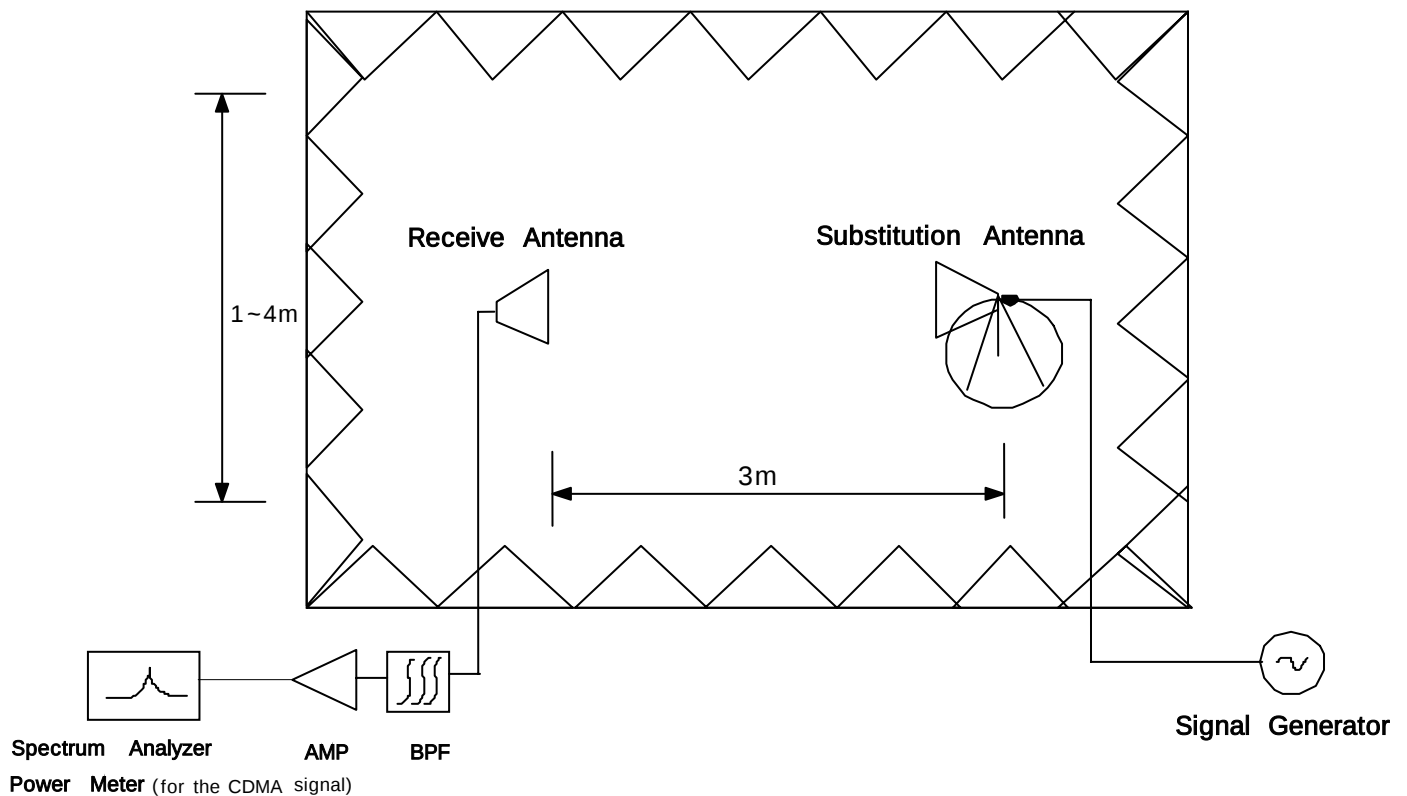


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.



SAMPLE CALCULATION

Example: Channel 600 PCS Mode 2nd Harmonic(3760MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760MHz. So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

- End of page -

5.4 Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.5 Spurious and Harmonic Emissions at Antenna Terminal

5.5.1 Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

- End of page -

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 – 835	869 – 880
B	835 – 845	880 – 890
A* High	845 – 846.5	890 – 891.5
B*	846.5 – 849	891.5 – 894

Table 2. Cellular Service Frequency Blocks

5.5.2 Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13 dBm, calculation shown below.

$$43 + 10\log(0.401 \text{ W}) = 39.03 \text{ dB}$$

$$26.03 \text{ dBm} - 39.03 \text{ dB} = -13 \text{ dBm}$$

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13 dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (PCS Mode : 10MHz to 20GHz). A display line was placed at -13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.6 Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +60°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +60°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

- End of page -

6. TEST DATA

6.1 Effective Radiated Power(E.R.P.)

Supply Voltage : 3.7VDC

Modulation : AMPS

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization	P/M (dBm)	Ant gain (dBd)	Ref level (dBm)
824.70	23.50	H	-16.00	0.00	-16.00
		V	-15.10	0.00	-15.10
836.49	25.00	H	-14.49	0.00	-14.49
		V	-13.64	0.00	-13.64
848.97	25.00	H	-14.49	0.00	-14.49
		V	-13.64	0.00	-13.64

■ Result

Frequency (MHz)	From EUT Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.04	-15.90	H1	173	23.60	0.229	Standard
836.52	-12.99	H1	182	26.50	0.447	Standard
848.31	-13.75	H1	179	25.74	0.375	Standard

NOTE : Standard batteries are the only battery options for this phone

Radiated measurements at 3 meters by Substitution Method

Supply Voltage : 3.7VDC

Modulation : CDMA

■ **Reference level**

Frequency (MHz)	Output (dBm)	Polarization	P/M (dBm)	Ant gain (dBd)	Ref level (dBm)
824.70	24	H	-15.39	0.00	-15.39
		V	-14.51	0.00	-14.51
836.52	25	H	-14.38	0.00	-14.38
		V	-13.50	0.00	-13.50
848.31	25	H	-14.38	0.00	-14.38
		V	-13.50	0.00	-13.50

■ **Result**

Frequency (MHz)	From EUT Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.70	-15.38	H1	171	24.01	0.252	Standard
836.52	-13.35	H1	175	26.03	0.401	Standard
848.31	-13.87	H1	178	25.51	0.356	Standard

NOTE : Standard batteries are the only battery options for this phone

Radiated measurements at 3 meters by Substitution Method

6.2 Equivalent Isotropic Radiated Power(E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization	P/M (dBm)	Ant gain (dBi)	Ref level (dBm)
1851.25	25	H	-15.39	8.13	-23.52
		V	-15.83	8.13	-23.96
1880.00	25	H	-15.48	8.11	-23.59
		V	-15.98	8.11	-24.09
1908.75	24	H	-16.40	8.33	-24.73
		V	-16.08	8.33	-24.41

■ Result

Frequency (MHz)	From EUT Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1851.25	-23.94	V	155	25.02	0.318	Standard
1880.00	-24.31	V	315	24.78	0.301	Standard
1908.75	-24.83	V	310	23.58	0.228	Standard

NOTE : Standard batteries are the only battery options for this phone

Radiated measurements at 3 meters by Substitution Method

6.3 AMPS Radiated Spurious & Harmonic measurement

Field Strength of SPURIOUS Radiation

Operating Frequency : 824.04 MHz(Low), 836.49MHz(Middle), 848.97MHz(High)

Measured Output Power : 26.50 dBm = 0.477W

Modulation Signal : AMPS

Limit : $43 + 10\log_{10}(P) = 39.50$ dBc

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
991	2	1648.08	-39.46	V	56.05
	3	2472.12	-57.44	H1	69.49
	4	3296.16	-63.09	H2	70.91
	5	4120.20	-	-	-
	6	4944.24	-	-	-
	7	5768.28	-	-	-
383	2	1672.98	-47.8	H1	63.67
	3	2509.47	-55.3	H1	66.84
	4	3345.96	-65.1	H2	73.15
	5	4182.45	-	-	-
	6	5018.94	-	-	-
	7	5855.43	-	-	-
799	2	1697.94	-46.36	H1	61.60
	3	2546.91	-57.14	H2	68.69
	4	3395.88	-62.17	H1	70.20
	5	4244.85	-	-	-
	6	5093.82	-	-	-
	7	5942.79	-	-	-

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.4 Cellular CDMA Radiated Spurious & Harmonic measurement

Field Strength of SPURIOUS Radiation

Operating Frequency : 824.70 MHz(Low), 836.52MHz(Middle), 848.31MHz(High)

Measured Output Power : 26.03 dBm = 0.401W

Modulation Signal : CDMA

$$\text{Limit : } 43 + 10\log_{10}(P) = 39.03 \text{ dBc}$$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
1013	2	1649.40	-30.64	H2	45.05
	3	2474.10	-60.17	H1	70.01
	4	3298.80	-61.03	H1	67.63
	5	4123.50	-63.36	V	65.95
	6	4948.20	-64.96	H1	65.01
	7	5772.90	-68.07	H1	65.83
384	2	1673.04	-42.51	H1	56.82
	3	2509.56	-60.75	H1	70.45
	4	3346.08	-66.33	V	71.80
	5	4182.68	-65.83	H1	68.94
	6	5019.12	-67.90	H1	68.29
	7	5855.64	-67.28	H2	65.06
777	2	1696.62	-38.57	H2	52.06
	3	2544.93	-53.15	H1	62.21
	4	3393.24	-61.03	H1	66.88
	5	4241.55	-64.08	H1	67.54
	6	5089.86	-66.18	H1	66.39
	7	5938.17	-67.89	H1	52.06

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.5 PCS CDMA Radiated Spurious & Harmonic measurement

Field Strength of SPURIOUS Radiation

Operating Frequency : 1851.25 MHz(Low), 1880.00 MHz(Middle), 1908.75MHz(High)

Measured Output Power : 25.02 dBm = 0.318 W

Modulation Signal : PCS

Limit : $43 + 10\log_{10}(P) = 38.02$ dBc

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
25	2	3702.50	-53.45	H1	53.70
	3	5553.75	-54.02	H2	48.35
	4	7405.55	-54.90	H1	44.95
	5	9256.25	-68.36	H1	53.73
	6	11107.50	-	-	-
	7	12958.75	-	-	-
600	2	3760.00	-52.16	H1	51.82
	3	5640.00	-55.71	H2	50.17
	4	7520.00	-59.20	H2	49.44
	5	9400.00	-68.84	H1	53.96
	6	11280.00	-	-	-
	7	13160.00	-	-	-
1175	2	3817.50	-41.83	V	41.05
	3	5726.25	-47.26	H2	41.19
	4	7635.00	-60.25	H2	50.23
	5	9543.75	-68.54	H2	55.83
	6	11452.50	-	-	-
	7	13361.25	-	-	-

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.6 AMPS Radiated Spurious & Harmonic Conversion Table

Date : 2006 . 12. 21

Test Engineer : SH ONG

Tx Cable loss
 Tx Horn Ant Gain
 Rx Cable loss + HPF Insertion loss + Attenuator
 Pre-Amp gain
 Air loss
 Tested Level from EUT
 = + + -
 = ERP +2.14-

CH	Har	Frequency (MHz)	Tx CL (dB)	Horn Gain (dB)	Tx Level @ (S/G 0dBm)	Tested Level EUT : H (dBm)	Tested Level EUT : V (dBm)	Amplitude of Emission EUT : H (dBm)	Amplitude of Emission EUT : V (dBm)	Result EUT : H (dBc)	Result EUT : V (dBc)
991	2	1648.08	7.26	8.03	0.77	-40.32	-39.46	-27.84	-27.41	56.48	56.05
	3	2472.12	9.20	9.55	0.35	-57.44	-58.51	-40.85	-41.38	69.49	70.02
	4	3296.16	10.36	9.64	-0.72	-63.09	-66.52	-42.27	-44.86	70.91	73.50
	5	4120.20	11.93	10.67	-1.26	-	-	-	-	-	-
	6	4944.24	13.21	11.05	-2.16	-	-	-	-	-	-
	7	5768.28	14.81	11.23	-3.58	-	-	-	-	-	-
383	2	1672.98	7.31	8.03	0.72	-47.80	-48.89	-35.03	-36.29	63.67	64.93
	3	2509.47	9.28	9.55	0.27	-55.30	-61.60	-38.20	-44.09	66.84	72.73
	4	3345.96	10.42	9.64	-0.78	-65.10	-66.39	-44.51	-45.48	73.15	74.12
	5	4182.45	12.29	10.67	-1.62	-	-	-	-	-	-
	6	5018.94	13.86	11.05	-2.81	-	-	-	-	-	-
	7	5855.43	14.64	11.23	-3.41	-	-	-	-	-	-
799	2	1697.94	7.38	8.03	0.65	-46.36	-48.99	-32.96	-35.49	61.60	64.13
	3	2546.91	9.35	9.55	0.20	-57.14	-60.64	-40.05	-43.00	68.69	71.64
	4	3395.88	10.51	9.64	-0.87	-62.17	-65.67	-41.56	-44.11	70.20	72.75
	5	4244.85	12.25	10.67	-1.58	-	-	-	-	-	-
	6	5093.82	13.96	11.05	-2.91	-	-	-	-	-	-
	7	5942.79	14.89	11.23	-3.66	-	-	-	-	-	-

6.7 CDMA Radiated Spurious & Harmonic Conversion Table

Date : 2006 . 11. 18

Test Engineer : JW LEE

Tx Cable loss
 Tx Horn Ant Gain
 Rx Cable loss + HPF Insertion loss + Attenuator
 Pre-Amp gain
 Air loss
 Tested Level from EUT
 = + + -
 = ERP +2.14 -

CH	Har	Frequency (MHz)	Tx CL (dB)	Horn Gain (dB)	Tx Level @ (S/G 0dBm)	Tested Level EUT : H (dBm)	Tested Level EUT : V (dBm)	Amplitude of Emission EUT : H (dBm)	Amplitude of Emission EUT : V (dBm)	Result EUT : H (dBc)	Result EUT : V (dBc)
1013	2	1649.40	7.12	8.03	0.91	-30.64	-32.45	-16.88	-19.19	45.05	47.36
	3	2474.10	8.96	9.55	0.59	-60.17	-60.92	-41.84	-42.23	70.01	70.40
	4	3298.80	10.70	9.64	-1.06	-61.03	-65.48	-39.46	-42.83	67.63	71.00
	5	4123.50	12.00	10.67	-1.33	-63.36	-63.88	-37.81	-37.78	65.98	65.95
	6	4948.20	13.20	11.05	-2.15	-64.96	-65.05	-36.84	-37.54	65.01	65.71
	7	5772.90	14.60	11.23	-3.37	-68.07	-68.67	-37.66	-38.80	65.83	66.97
384	2	1673.04	7.13	8.03	0.90	-42.51	-43.49	-28.65	-30.23	56.82	58.40
	3	2509.56	9.04	9.55	0.51	-60.75	-61.35	-42.28	-42.45	70.45	70.62
	4	3346.08	10.51	9.64	-0.87	-65.90	-66.33	-43.99	-43.63	72.16	71.80
	5	4182.68	12.15	10.67	-1.48	-65.83	-66.90	-40.77	-41.36	68.94	69.53
	6	5019.12	13.65	11.05	-2.60	-67.90	-68.05	-40.12	-40.42	68.29	68.59
	7	5855.64	14.64	11.23	-3.41	-67.28	-68.85	-36.89	-38.91	65.06	67.08
777	2	1696.62	7.19	8.03	0.84	-38.57	-40.60	-23.89	-26.16	52.06	54.33
	3	2544.93	9.08	9.55	0.47	-53.15	-55.66	-34.04	-36.23	62.21	64.40
	4	3393.24	10.48	9.64	-0.84	-61.03	-65.51	-38.71	-42.47	66.88	70.64
	5	4241.55	12.08	10.67	-1.41	-64.08	-66.42	-39.37	-40.74	67.54	68.91
	6	5089.86	13.88	11.05	-2.83	-66.18	-67.69	-38.22	-40.19	66.39	68.36
	7	5938.17	14.96	11.23	-3.73	-67.89	-67.52	-37.58	-37.78	65.75	65.95

6.8 PCS Radiated Spurious & Harmonic Conversion Table

Date : 2006 . 11. 18

Test Engineer : JW LEE

Tx Cable loss
 Tx Horn Ant Gain
 Rx Cable loss + HPF Insertion loss + Attenuator
 Pre-Amp gain
 Air loss
 Tested Level from EUT
 = + + -
 = EIRP -

CH	Har	Frequency (MHz)	Tx CL (dB)	Horn Gain (dB)	Tx Level @ (S/G 10dBm)	Tested Level EUT : H (dBm)	Tested Level EUT : V (dBm)	Amplitude of Emission EUT : H (dBm)	Amplitude of Emission EUT : V (dBm)	Result EUT : H (dBc)	Result EUT : V (dBc)
25	2	3702.50	11.41	9.73	8.32	-53.45	-54.77	-28.68	-29.11	53.70	54.13
	3	5553.75	14.42	11.15	6.73	-54.02	-57.83	-23.33	-27.65	48.35	52.67
	4	7405.00	17.56	11.44	3.88	-54.90	-55.23	-19.93	-21.49	44.95	46.51
	5	9256.25	20.07	12.17	2.10	-68.36	-66.75	-28.71	-29.09	53.73	54.11
	6	11107.50	22.31	13.66	1.35	-	-	-	-	-	-
	7	12958.75	23.91	13.27	-0.64	-	-	-	-	-	-
600	2	3760.00	11.58	9.73	8.15	-52.16	-55.86	-26.80	-30.52	51.82	55.54
	3	5640.00	14.56	11.15	6.59	-55.71	-57.77	-25.15	-27.63	50.17	52.65
	4	7520.00	17.88	11.44	3.56	-59.20	-62.47	-24.42	-29.17	49.44	54.19
	5	9400.00	19.89	12.17	2.28	-68.84	-68.08	-28.94	-29.92	53.96	54.94
	6	11280.00	22.82	13.66	0.84	-	-	-	-	-	-
	7	13160.00	24.20	13.27	-0.93	-	-	-	-	-	-
1175	2	3817.50	11.64	9.73	8.09	-42.38	-41.83	-17.02	-16.03	42.04	41.05
	3	5726.25	14.71	11.15	6.44	-47.26	-48.70	-16.17	-17.63	41.19	42.65
	4	7635.00	18.06	11.44	3.38	-60.25	-61.11	-25.21	-26.64	50.23	51.66
	5	9543.75	22.64	12.17	-0.47	-68.54	-69.20	-30.81	-31.72	55.83	56.74
	6	11452.50	24.14	13.66	-0.48	-	-	-	-	-	-
	7	13361.25	24.17	13.27	-0.90	-	-	-	-	-	-

6.9 Frequency Stability

6.9.1 AMPS Frequency Stability Table

Operating Frequency : 836,490,000 Hz

Channel : 383

Reference Voltage : 3.7VDC

Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	48.00	836,490,048	0.000006	0.057
100%		-30	49.00	836,490,049	0.000006	0.059
100%		-20	51.00	836,490,051	0.000006	0.061
100%		-10	60.00	836,490,060	0.000007	0.072
100%		0	59.00	836,490,059	0.000007	0.071
100%		+10	55.00	836,490,055	0.000007	0.066
100%		+20	48.00	836,490,048	0.000006	0.057
100%		+30	53.00	836,490,053	0.000006	0.063
100%		+40	57.00	836,490,057	0.000007	0.068
100%		+50	51.00	836,490,051	0.000006	0.061
100%		+60	51.00	836,490,051	0.000006	0.061
85%	3.35	+20	53.00	836,490,053	0.000006	0.063
115%	4.26	+20	57.00	836,490,057	0.000007	0.068
Batt. Endpoint	3.35	+20	53.00	836,490,053	0.000006	0.063

Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point

6.9.2 CDMA Frequency Stability Table

Operating Frequency : 836,520,000 Hz

Channel : 384

Reference Voltage : 3.7VDC

Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	18.56	9.38	0.000002	0.022
100%		-30	41.14	21.39	0.000005	0.049
100%		-20	24.68	-9.86	0.000003	0.030
100%		-10	-6.57	-12.63	-0.000001	-0.008
100%		0	18.81	40.19	0.000002	0.022
100%		+10	13.15	33.99	0.000002	0.016
100%		+20	18.56	9.38	0.000002	0.022
100%		+30	-38.10	-11.27	-0.000005	-0.046
100%		+40	-12.44	-15.31	-0.000001	-0.015
100%		+50	28.90	10.80	0.000003	0.035
100%		+60	6.61	11.51	0.000001	0.008
85%	3.35	+20	-10.03	17.51	-0.000001	-0.012
115%	4.26	+20	26.43	-37.33	0.000003	0.032
Batt. Endpoint	3.35	+20	-10.03	17.51	-0.000001	-0.012

Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point

6.9.3 PCS Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 600

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	37.47	1,880,000,037	0.000002	0.020
100%		-30	-41.63	1,879,999,958	-0.000002	-0.022
100%		-20	-20.15	1,879,999,980	-0.000001	-0.011
100%		-10	-30.81	1,879,999,969	-0.000002	-0.016
100%		0	24.13	1,880,000,024	0.000001	0.013
100%		+10	16.03	1,880,000,016	0.000001	0.009
100%		+20	37.47	1,880,000,037	0.000002	0.020
100%		+30	18.31	1,880,000,018	0.000001	0.010
100%		+40	-10.90	1,879,999,989	-0.000001	-0.006
100%		+50	8.18	1,880,000,008	0.000000	0.004
100%		+60	-12.27	1,879,999,988	-0.000001	-0.007
85%	3.35	+20	-20.58	1,879,999,979	-0.000001	-0.011
115%	4.26	+20	40.48	1,880,000,040	0.000002	0.022
Batt. Endpoint	3.35	+20	-20.58	1,879,999,979	-0.000001	-0.011

Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.


The EUT is tested down to the battery end point

6.9.4 AMPS Frequency Stability Graph

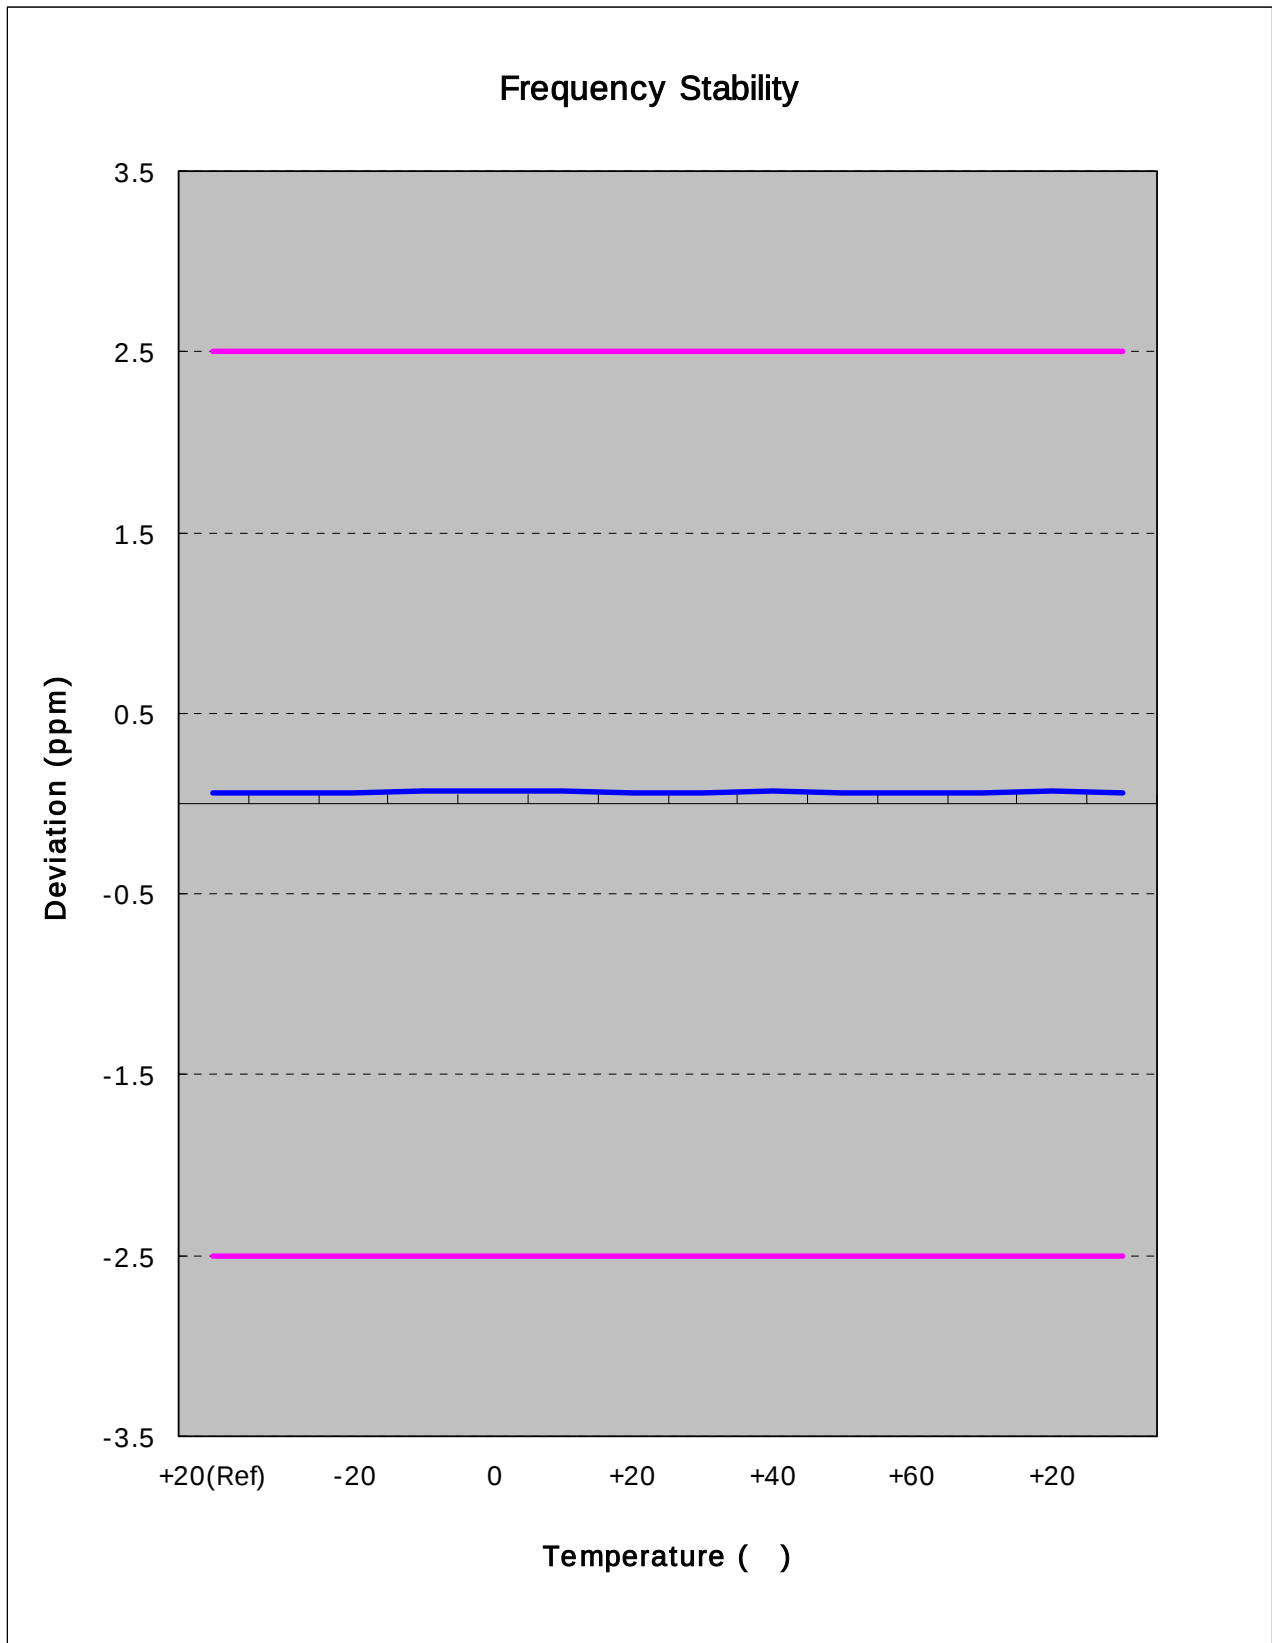


- End of page -

Zoom In

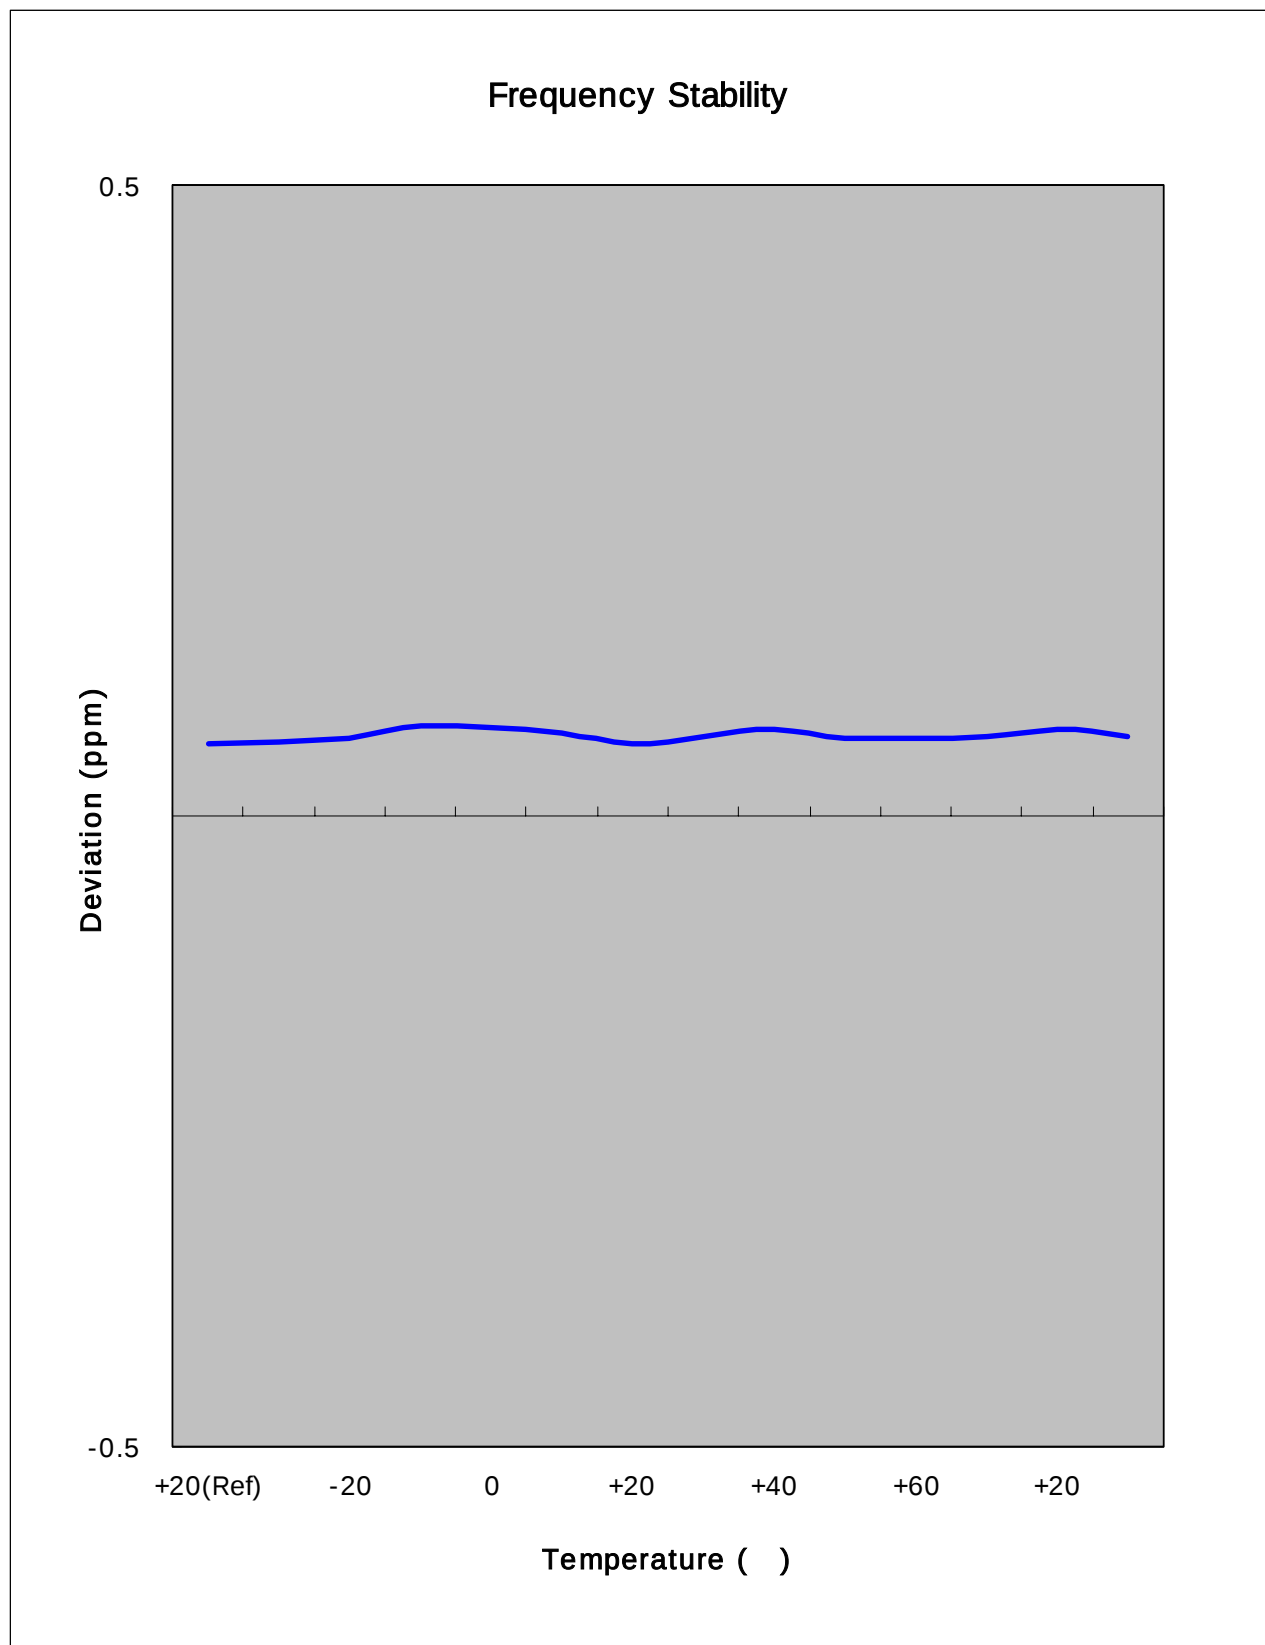


6.9.5 CDMA Frequency Stability Graph

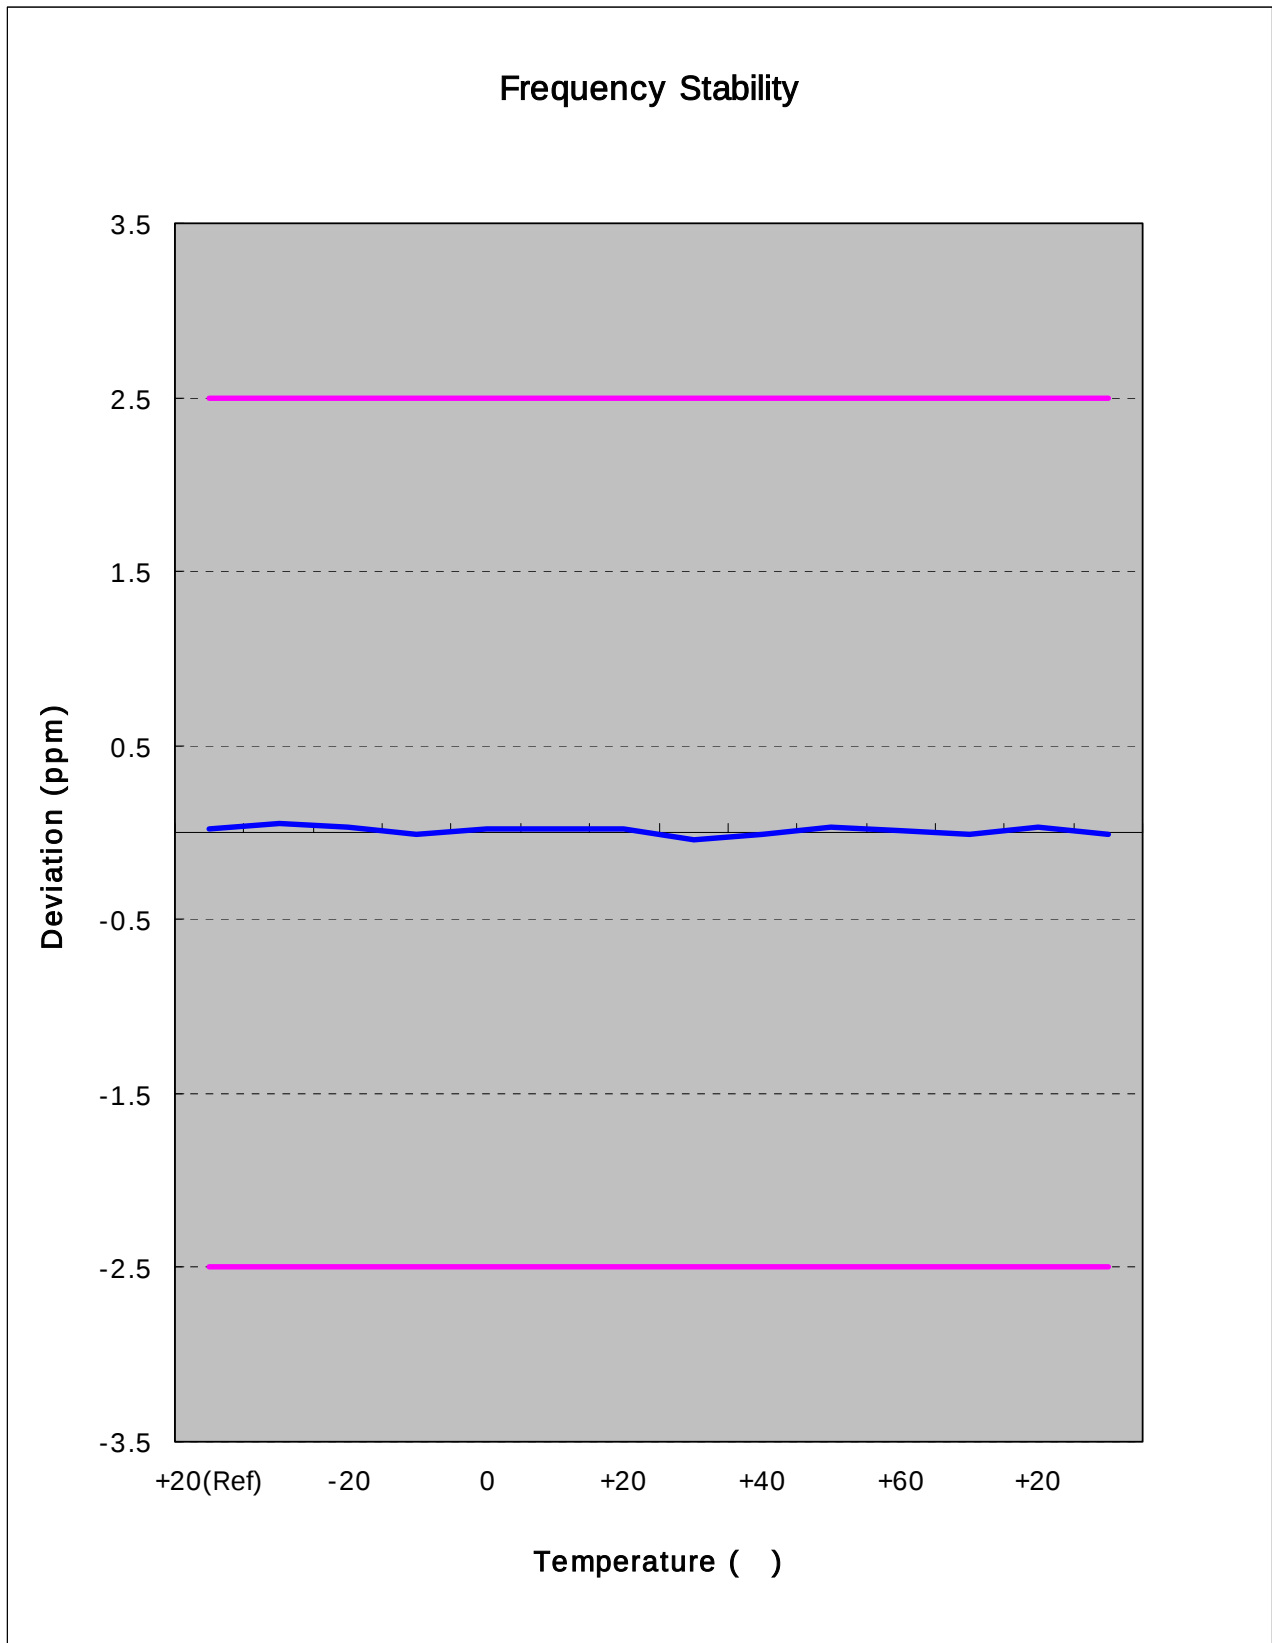


- End of page -

Zoom In

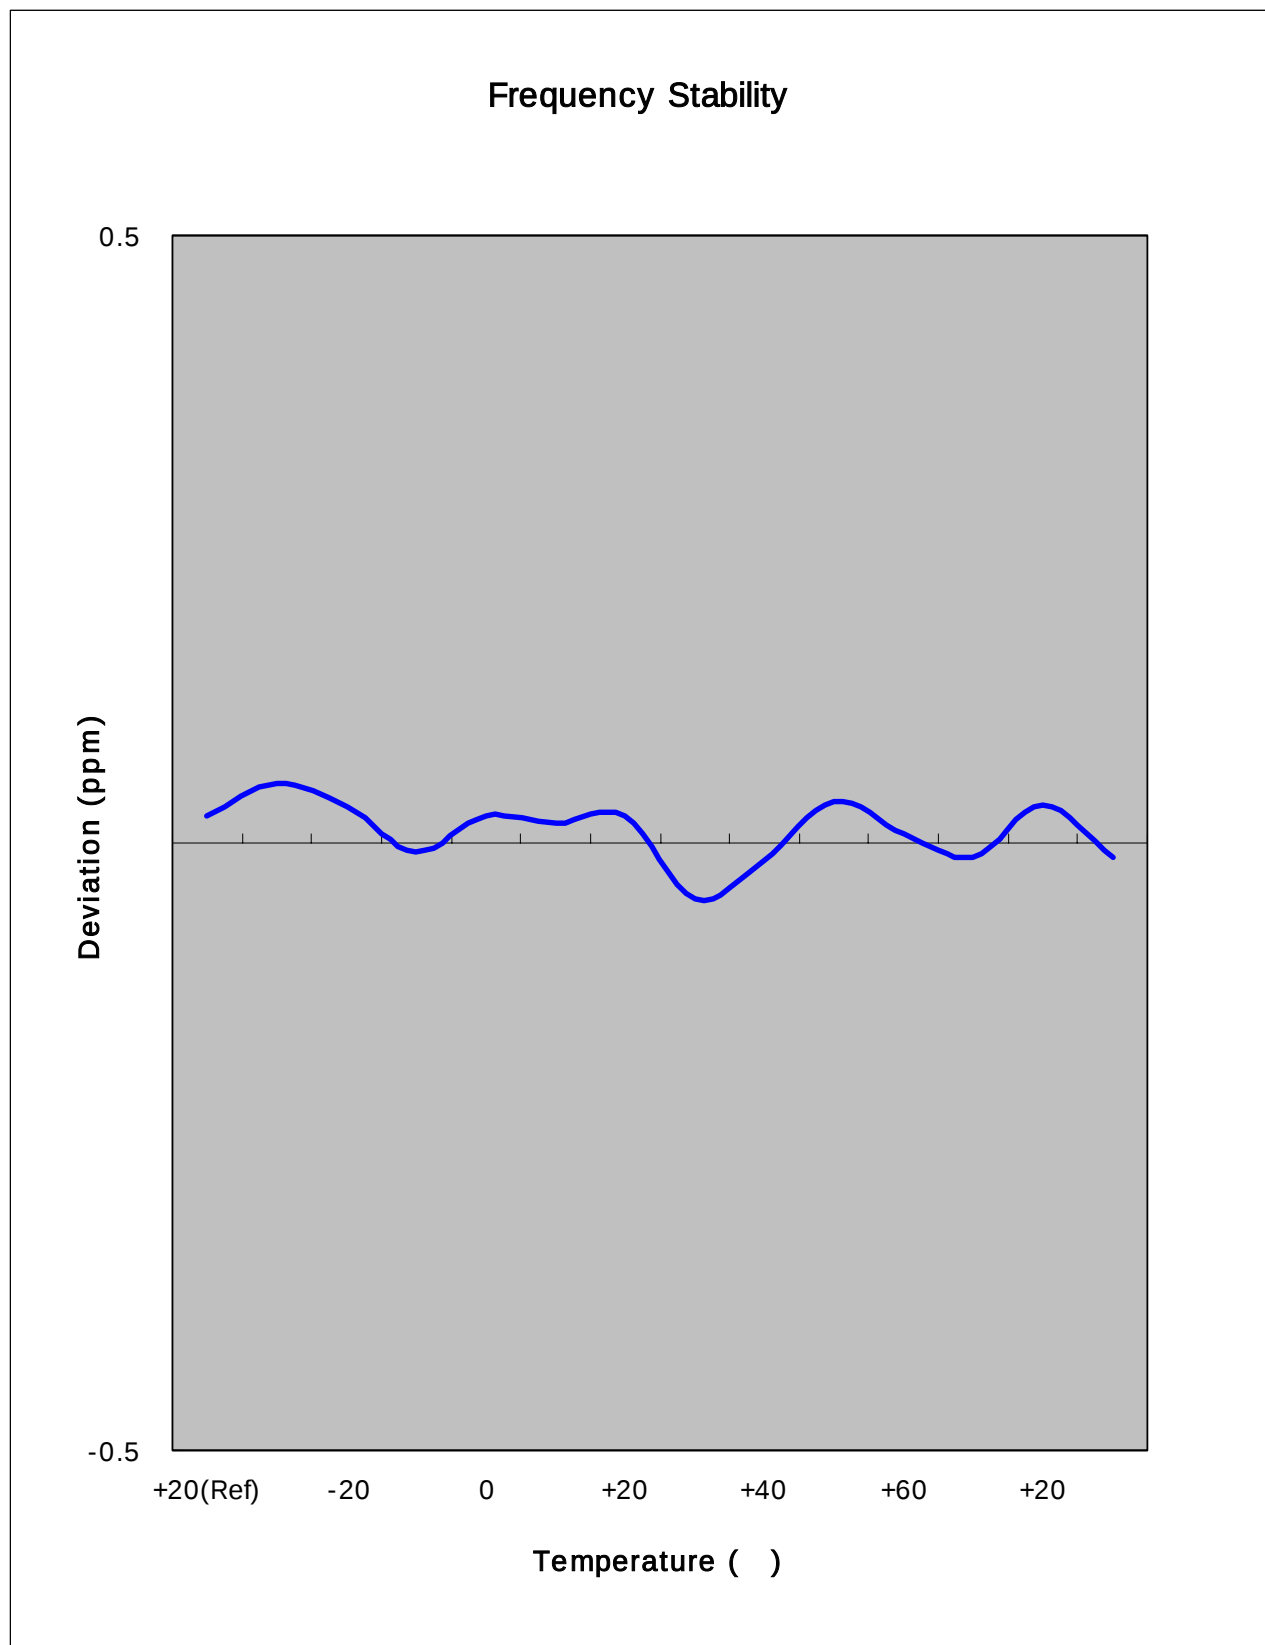

- End of page -


6.9.6 PCS Frequency Stability Graph

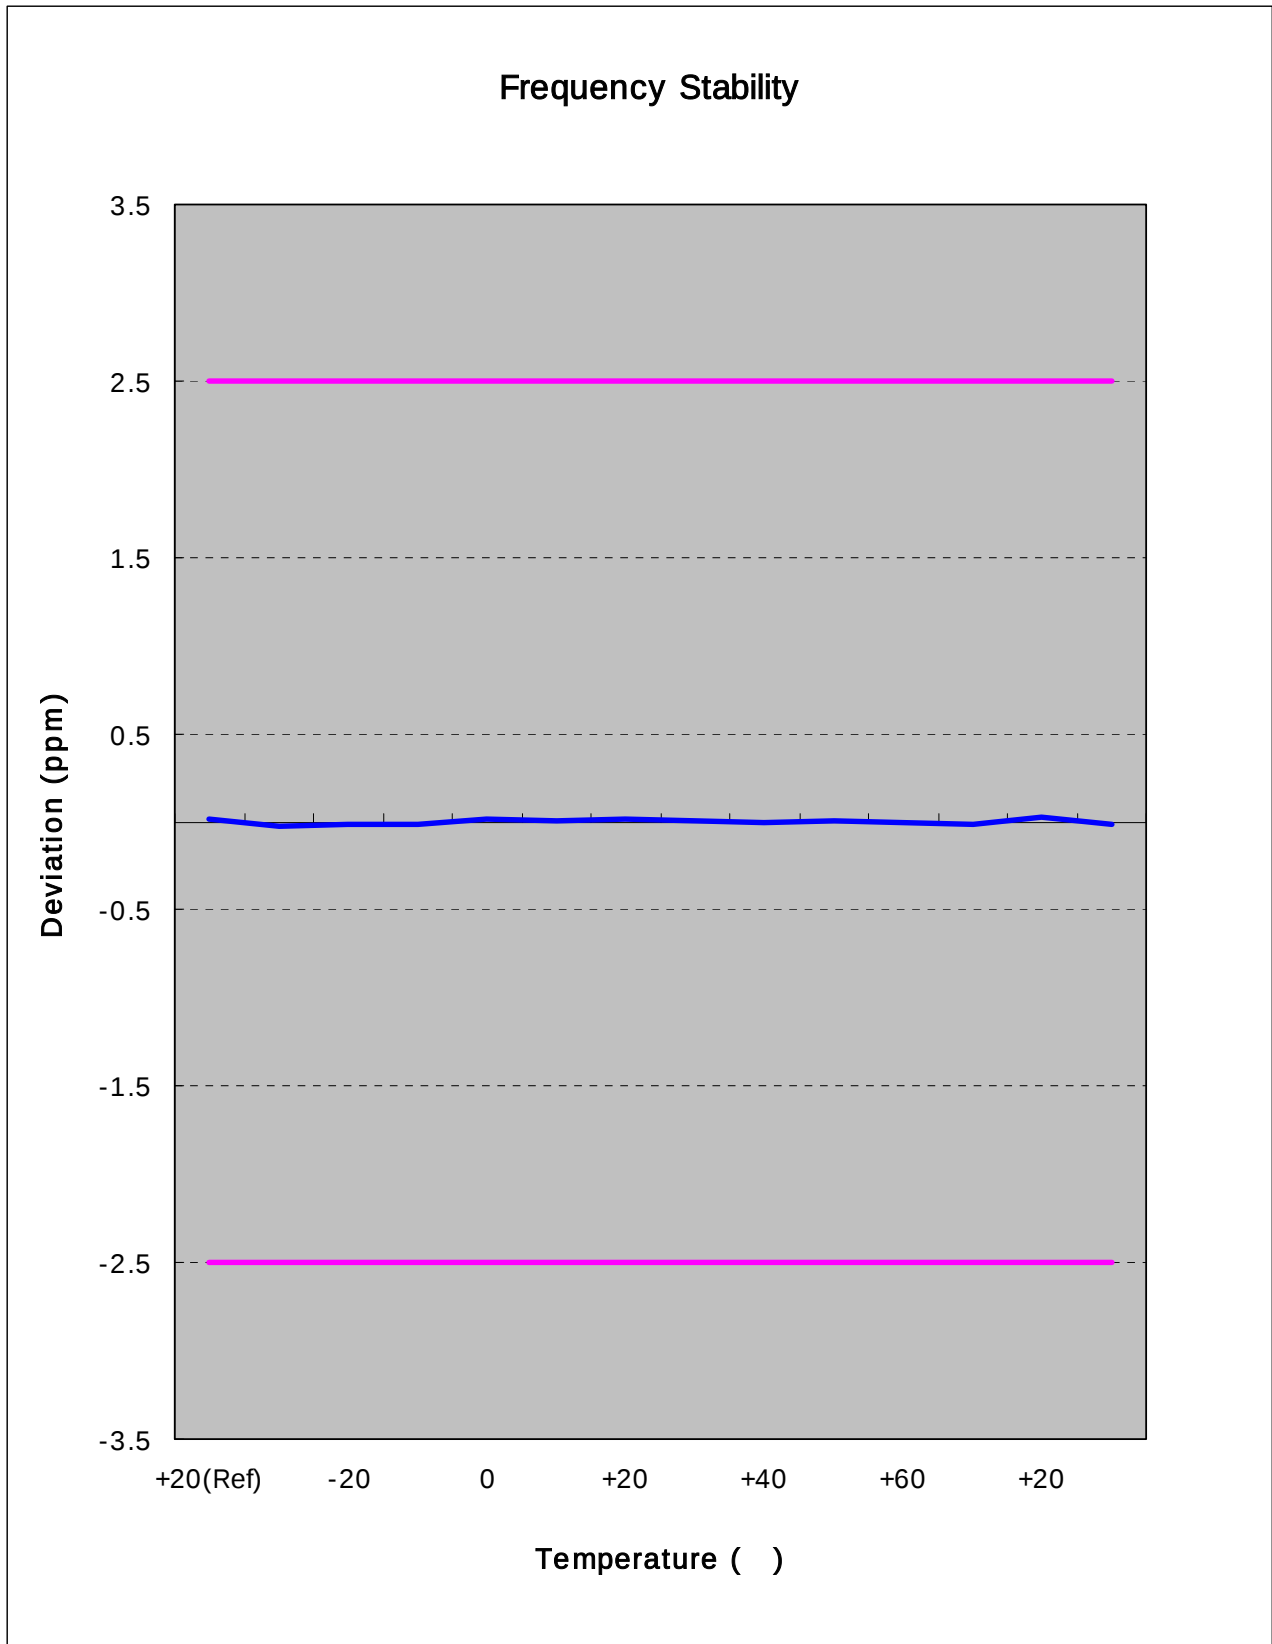

- End of page -

Zoom In

Frequency Stability

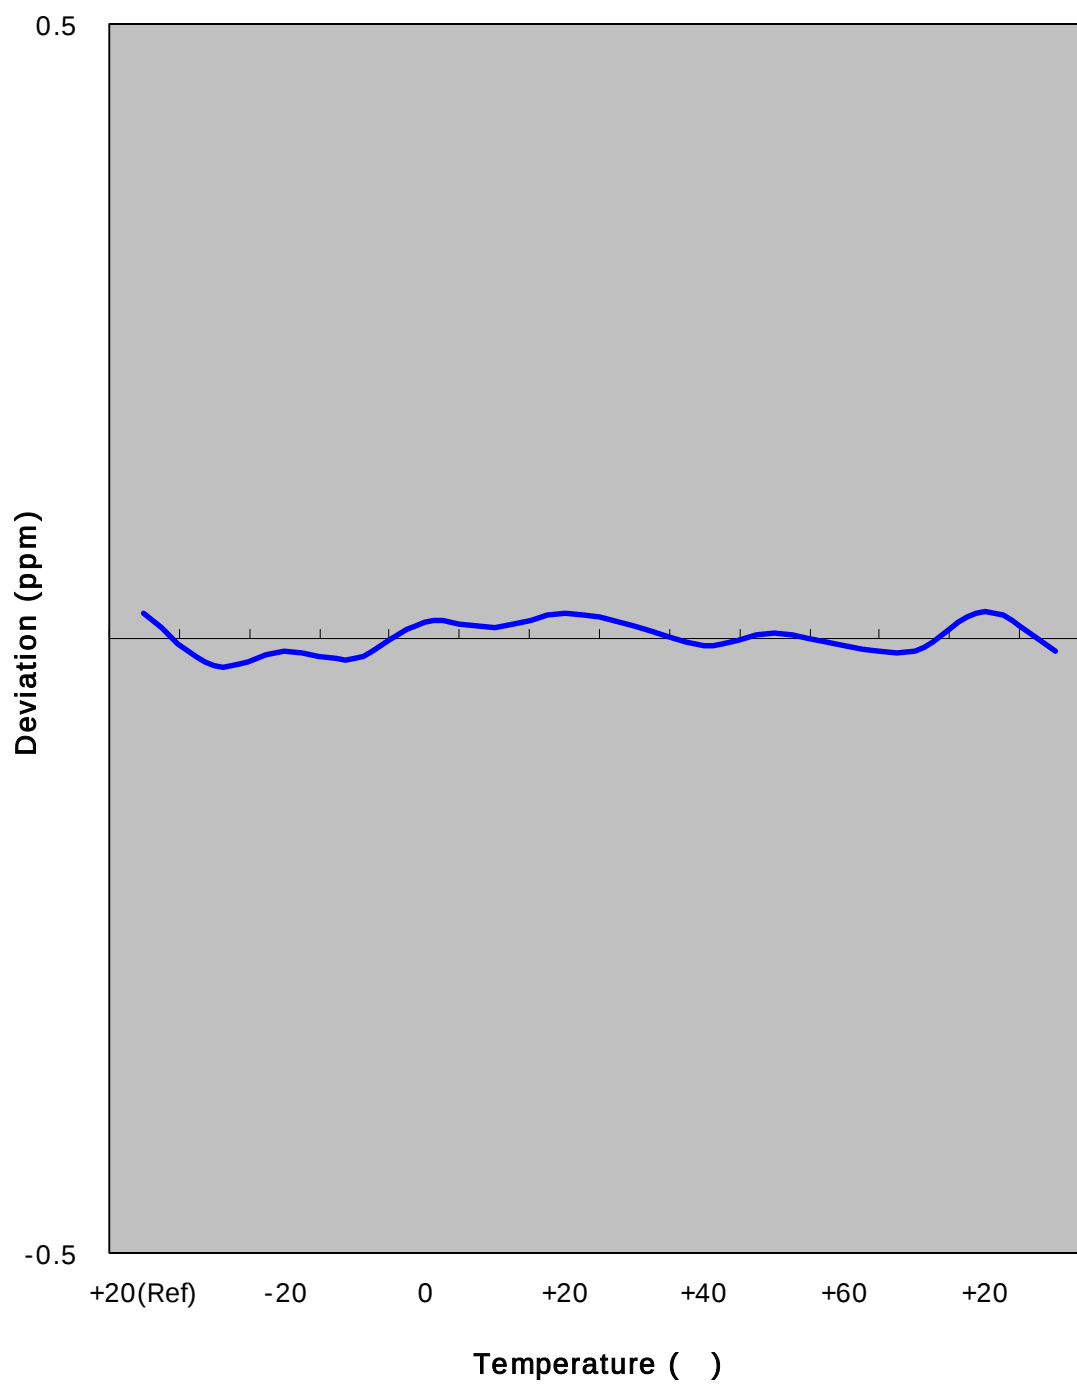

- End of page -

7. SAMPLE CALCULATION

7.1 Emission Designator

Emission Designator = 1M25F9W

Calculation : 2M + 2DK

CDMA BW = 1.25MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination(Audio/Data)

(Measured at the 99.75% power bandwidth)

- End of page -



8. CONCLUSION

The data collected shows that the SAMSUNG Dual-Band CDMA Phone with Bluetooth
FCC ID : A3LSCHU340 complies with all the requirements of Parts 2,22,24 of the FCC Rules.

- End of page -


9. TEST PLOTS

- End of page -

Measurement/Instrument Screen																									
Handoff Cntrl	Digital Transmit Power							Call Parm																	
	Digital Transmit Power 24.61 dBm							Control Ch Type																	
								ACC																	
								Anl MS TX Level																	
								2																	
	<table border="1"> <thead> <tr> <th>Call/Handoff Setup</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>Traffic Channel Type</td> <td>AUC</td> </tr> <tr> <td>AUC Channel</td> <td>991</td> </tr> <tr> <td>MS TX Level</td> <td>2</td> </tr> <tr> <td>SAT Color Code</td> <td>SAT2 (6000 Hz)</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td></td> <td></td> </tr> </tbody> </table>							Call/Handoff Setup	Value	Traffic Channel Type	AUC	AUC Channel	991	MS TX Level	2	SAT Color Code	SAT2 (6000 Hz)							Receiver Control	
	Call/Handoff Setup	Value																							
	Traffic Channel Type	AUC																							
	AUC Channel	991																							
	MS TX Level	2																							
	SAT Color Code	SAT2 (6000 Hz)																							
Execute Handoff																									
Close Menu																									
			Active Cell Status : Connected			Sys Type: AMPS																			
				IntRef	Offset				1 of 3																

Measurement/Instrument Screen																									
Handoff Cntrl	Digital Transmit Power							Call Parm																	
	Digital Transmit Power 24.59 dBm							Control Ch Type																	
								ACC																	
								Anl MS TX Level																	
								2																	
	<table border="1"> <thead> <tr> <th>Call/Handoff Setup</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>Traffic Channel Type</td> <td>AUC</td> </tr> <tr> <td>AUC Channel</td> <td>383</td> </tr> <tr> <td>MS TX Level</td> <td>2</td> </tr> <tr> <td>SAT Color Code</td> <td>SAT2 (6000 Hz)</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td></td> <td></td> </tr> </tbody> </table>							Call/Handoff Setup	Value	Traffic Channel Type	AUC	AUC Channel	383	MS TX Level	2	SAT Color Code	SAT2 (6000 Hz)							Receiver Control	
	Call/Handoff Setup	Value																							
	Traffic Channel Type	AUC																							
	AUC Channel	383																							
	MS TX Level	2																							
	SAT Color Code	SAT2 (6000 Hz)																							
Execute Handoff																									
Close Menu																									
			Active Cell Status : Connected			Sys Type: AMPS																			
				IntRef	Offset				1 of 3																

Measurement/Instrument Screen																									
Handoff Cntrl		Digital Transmit Power						Call Parm																	
		Digital Transmit Power 24.13 dBm Single						Control Ch Type																	
								ACC																	
										Anl NS TX Level															
										2															
		<table border="1"> <thead> <tr> <th>Call/Handoff Setup</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>Traffic Channel Type</td> <td>AUC</td> </tr> <tr> <td>AUC Channel</td> <td>799</td> </tr> <tr> <td>NS TX Level</td> <td>2</td> </tr> <tr> <td>SAT Color Code</td> <td>SAT2 (6000 Hz)</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td></td> <td></td> </tr> </tbody> </table>				Call/Handoff Setup	Value	Traffic Channel Type	AUC	AUC Channel	799	NS TX Level	2	SAT Color Code	SAT2 (6000 Hz)							Receiver Control			
Call/Handoff Setup	Value																								
Traffic Channel Type	AUC																								
AUC Channel	799																								
NS TX Level	2																								
SAT Color Code	SAT2 (6000 Hz)																								
Execute Handoff																									
Close Menu																									
		<table border="1"> <tr> <td colspan="2"></td> <td colspan="2">Active Cell Status : Connected</td> <td colspan="2">Sys Type: AMPS</td> </tr> <tr> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td></td> <td></td> <td></td> <td>IntRef</td> <td>Offset</td> <td></td> </tr> </table>						Active Cell Status : Connected		Sys Type: AMPS											IntRef	Offset			
		Active Cell Status : Connected		Sys Type: AMPS																					
			IntRef	Offset																					
						1 of 3																			

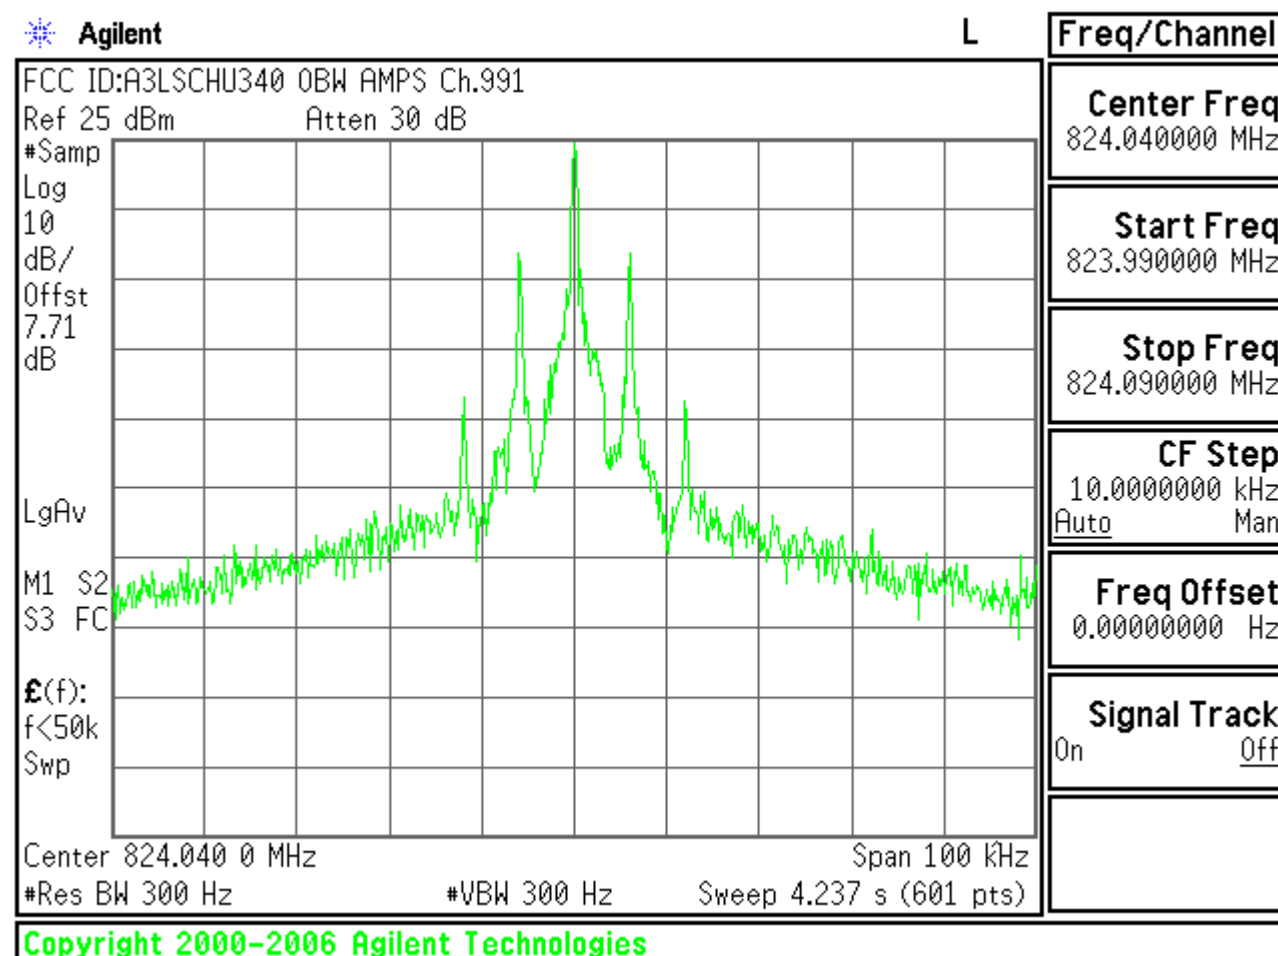

FCC ID:A3LSCHU340 0BW AMPS Ch.383

Ref 25 dBm

Atten 30 dB

#Samp

Log

10

dB/

Offst

7.71

dB

LgAv


M1 S2

S3 FC

$\mathcal{E}(f)$:

f<50k

Swp

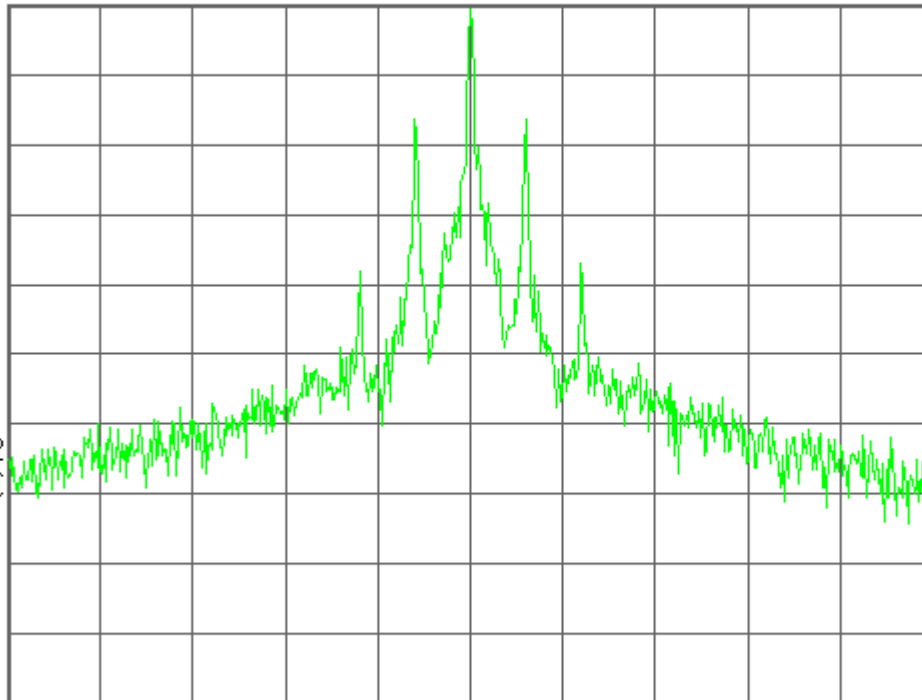

Center 836.490 0 MHz

Span 100 kHz

#Res BW 300 Hz

#VBW 300 Hz

Sweep 4.237 s (601 pts)

Center Freq

836.490000 MHz

Start Freq

836.440000 MHz

Stop Freq

836.540000 MHz

CF Step

10.0000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Copyright 2000-2006 Agilent Technologies

FCC ID:A3LSCHU340 0BW AMPS Ch.799

Ref 25 dBm

Atten 30 dB

#Samp

Log

10

dB/

Offst

7.71

dB

LgAv


M1 S2

S3 FC

$\mathcal{E}(f)$:

f<50k

Swp

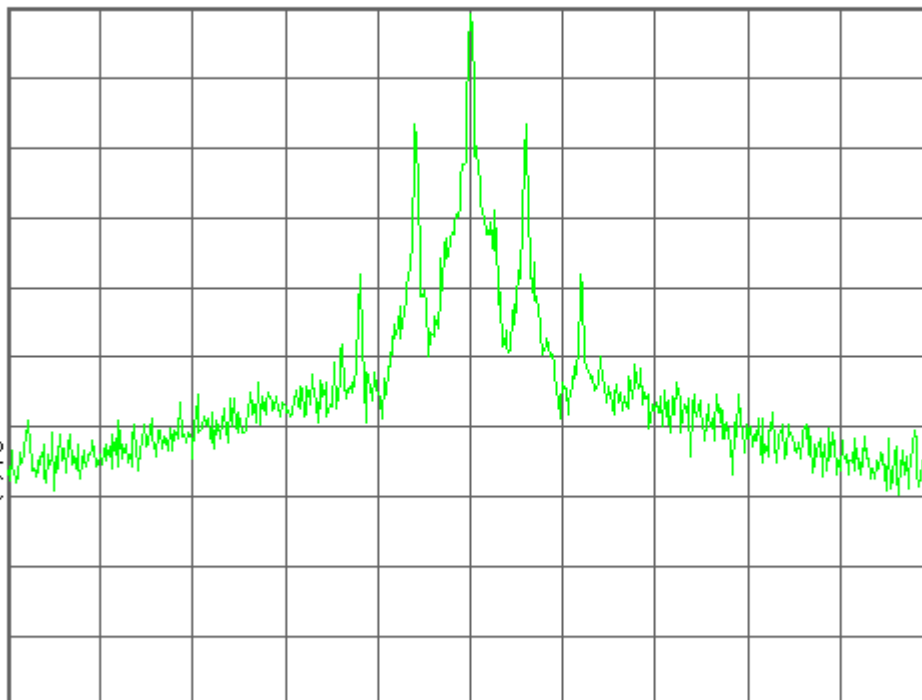

Center 848.970 0 MHz

Span 100 kHz

#Res BW 300 Hz

#VBW 300 Hz

Sweep 4.237 s (601 pts)

Center Freq

848.970000 MHz

Start Freq

848.920000 MHz

Stop Freq

849.020000 MHz

CF Step

10.0000000 kHz

Auto

Man

Freq Offset


0.00000000 Hz

Signal Track

On

Off

Copyright 2000-2006 Agilent Technologies

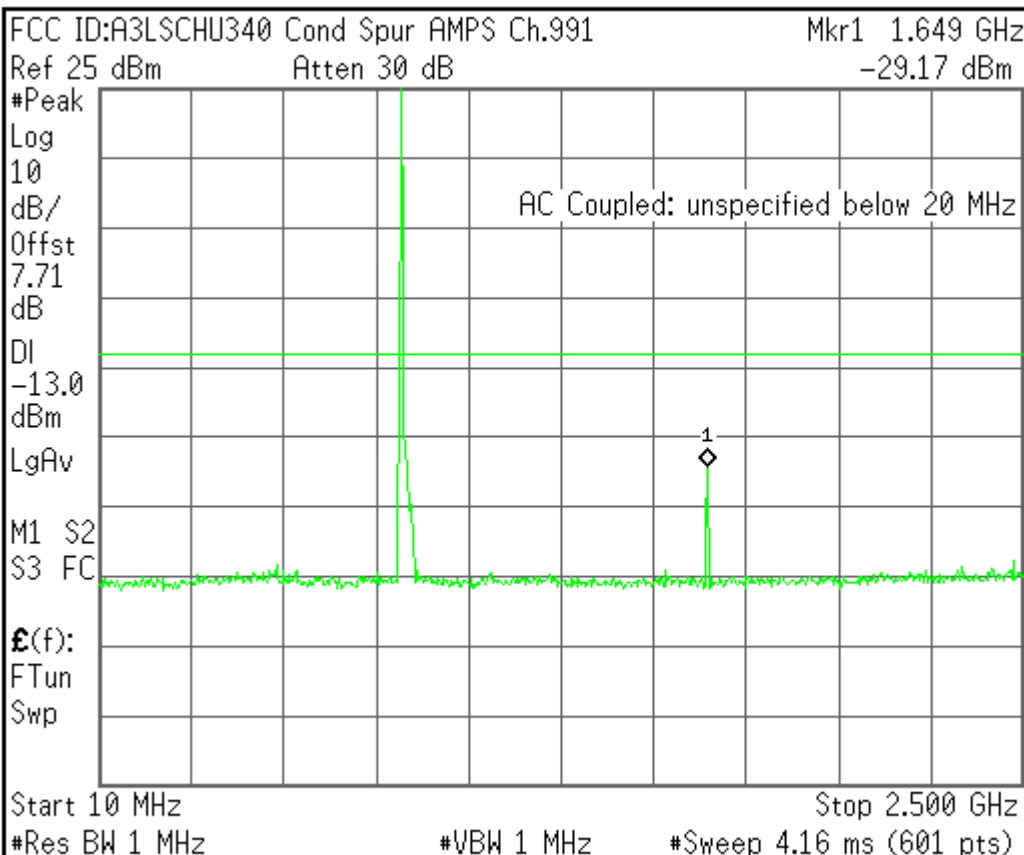

Freq/Channel

Center Freq
 1.25500000 GHz

Start Freq
 10.0000000 MHz


Stop Freq
 2.50000000 GHz

CF Step
 249.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

Copyright 2000-2006 Agilent Technologies

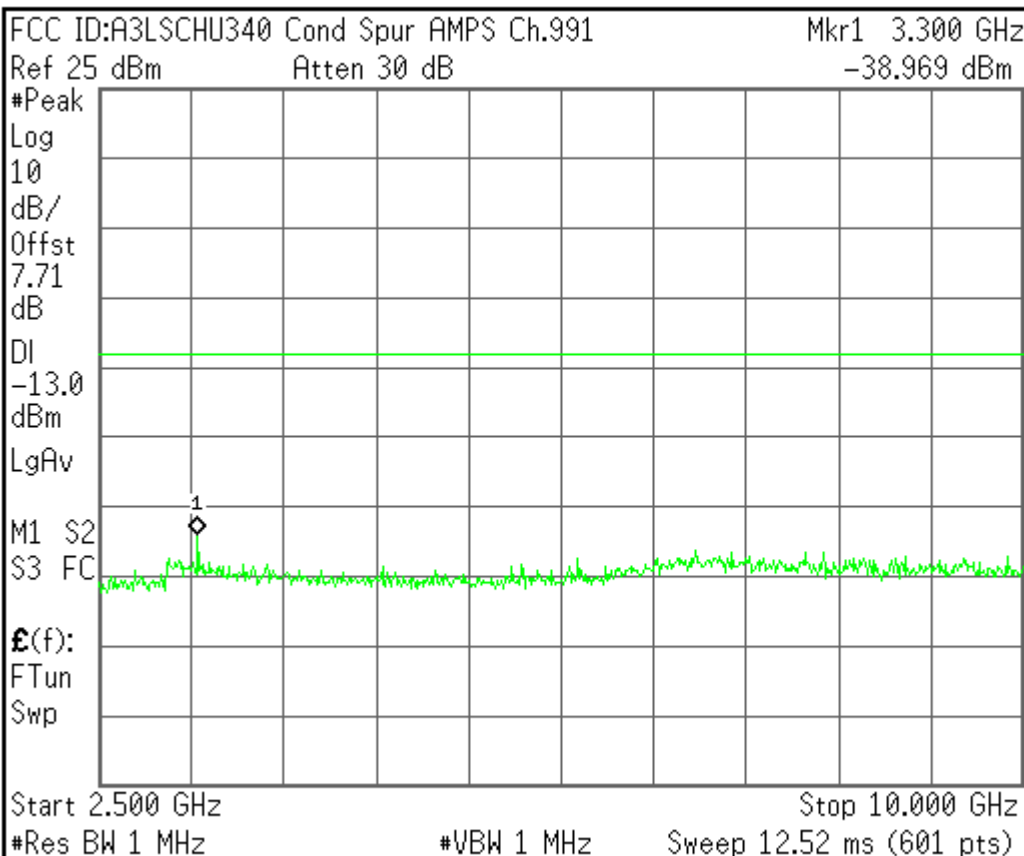

Freq/Channel

Center Freq
 6.25000000 GHz

Start Freq
 2.50000000 GHz


Stop Freq
 10.0000000 GHz

CF Step
 750.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

Copyright 2000-2006 Agilent Technologies

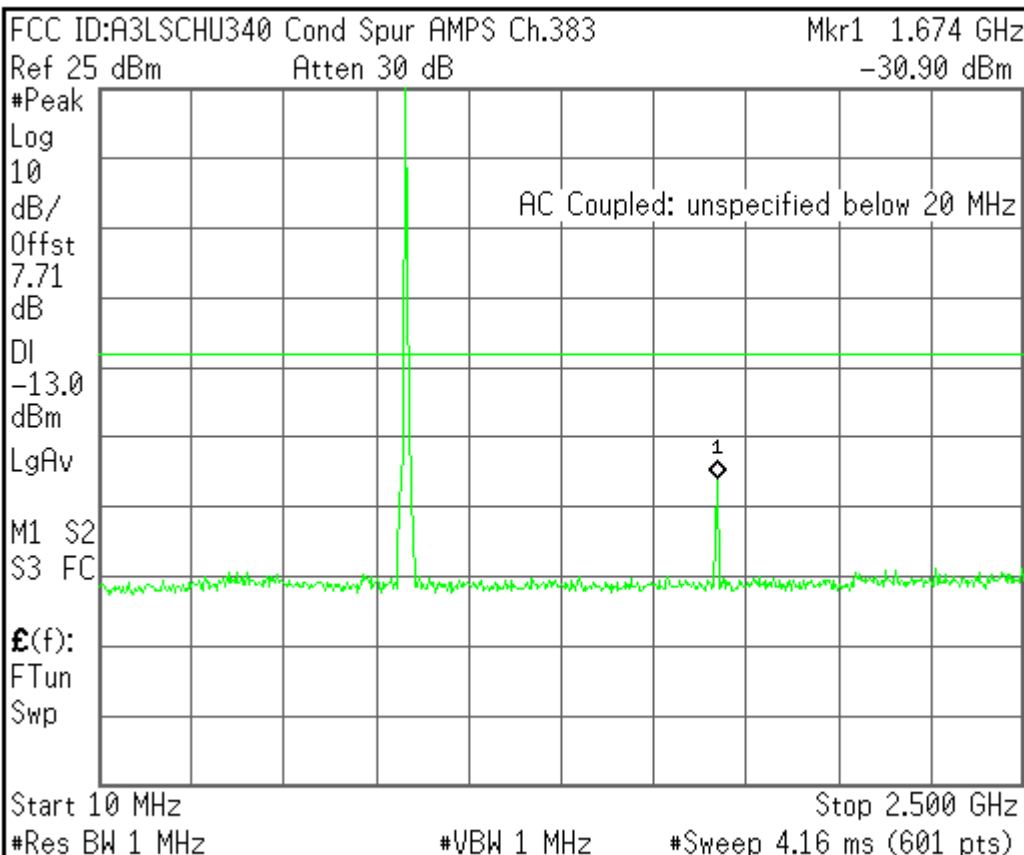

Freq/Channel

Center Freq
 1.25500000 GHz

Start Freq
 10.0000000 MHz


Stop Freq
 2.50000000 GHz

CF Step
 249.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

Copyright 2000-2006 Agilent Technologies

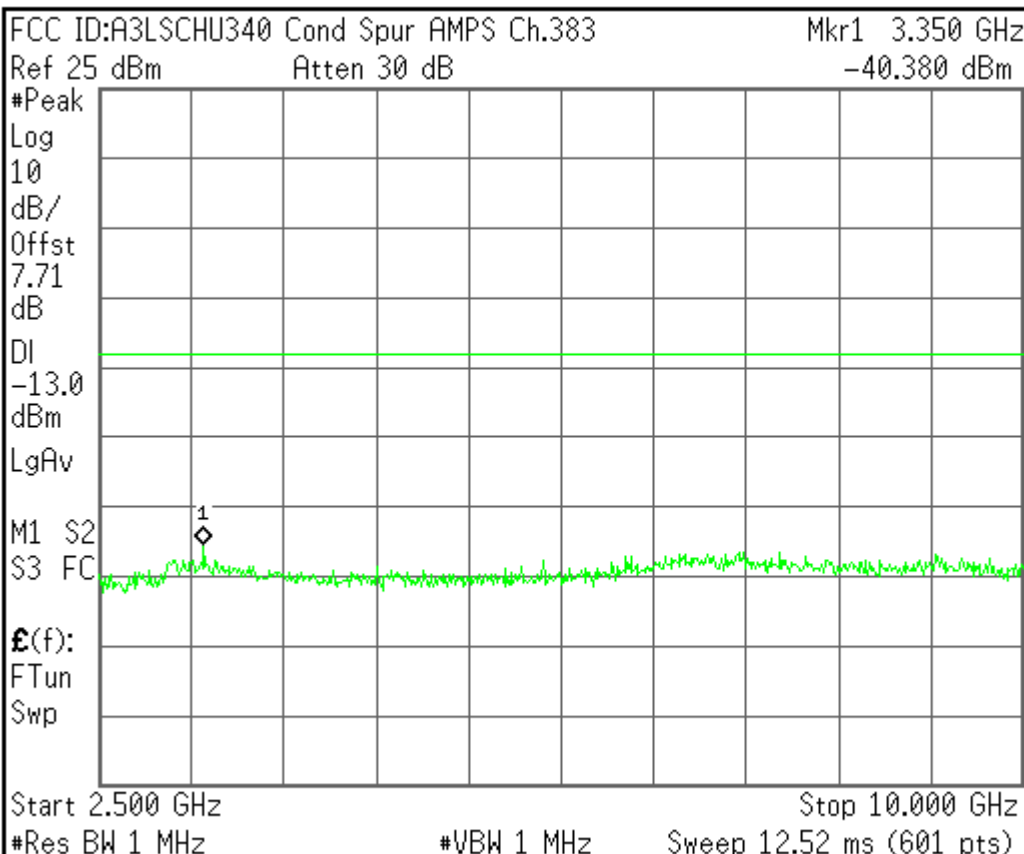

Freq/Channel

Center Freq
 6.25000000 GHz

Start Freq
 2.50000000 GHz


Stop Freq
 10.0000000 GHz

CF Step
 750.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

Copyright 2000-2006 Agilent Technologies

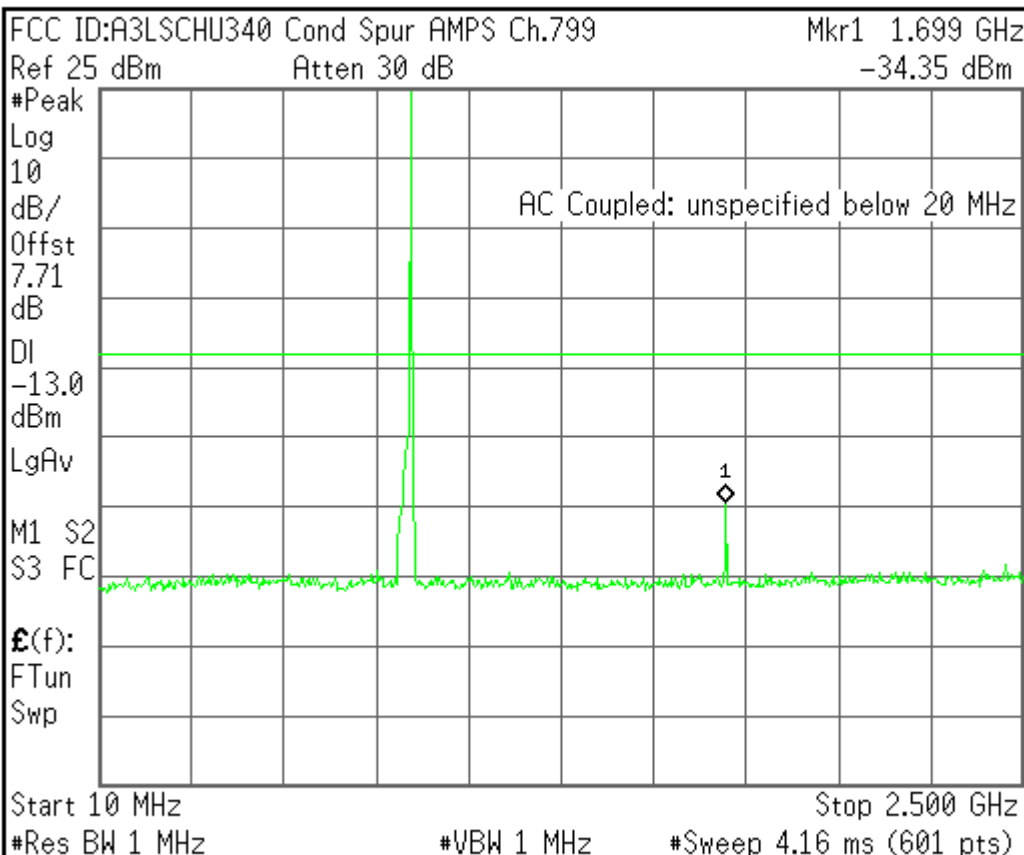

Freq/Channel

Center Freq
 1.25500000 GHz

Start Freq
 10.0000000 MHz


Stop Freq
 2.50000000 GHz

CF Step
 249.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

Copyright 2000-2006 Agilent Technologies

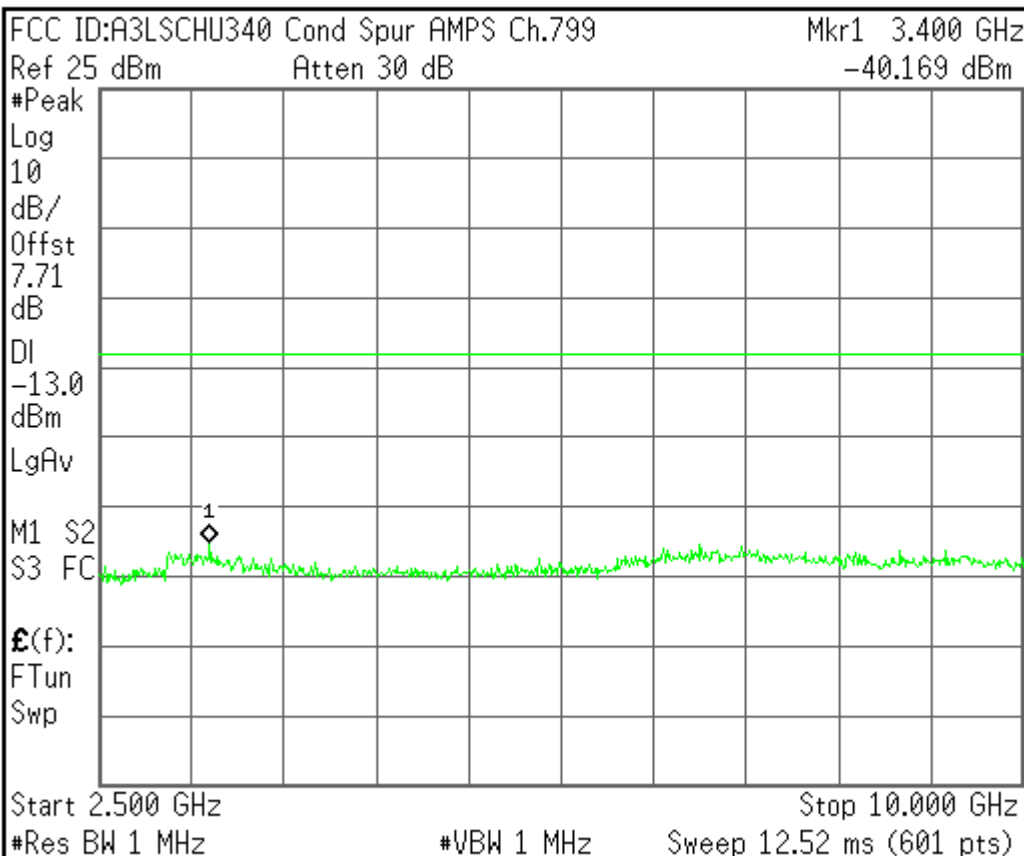

Freq/Channel

Center Freq
 6.25000000 GHz

Start Freq
 2.50000000 GHz

Stop Freq
 10.0000000 GHz

CF Step
 750.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off


Copyright 2000-2006 Agilent Technologies



Agilent

L

Freq/Channel

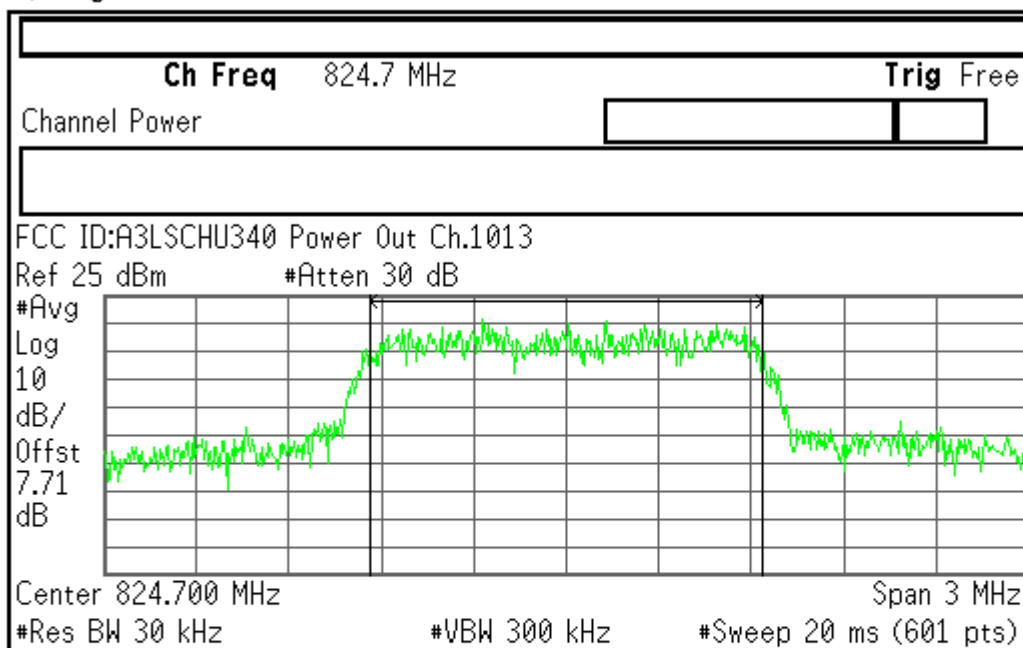Center Freq
824.700000 MHzStart Freq
823.200000 MHzStop Freq
826.200000 MHzCF Step
300.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Channel Power

24.96 dBm /1.2669 MHz

Power Spectral Density

-36.07 dBm/Hz


Copyright 2000-2006 Agilent Technologies



Agilent

L

Freq/Channel

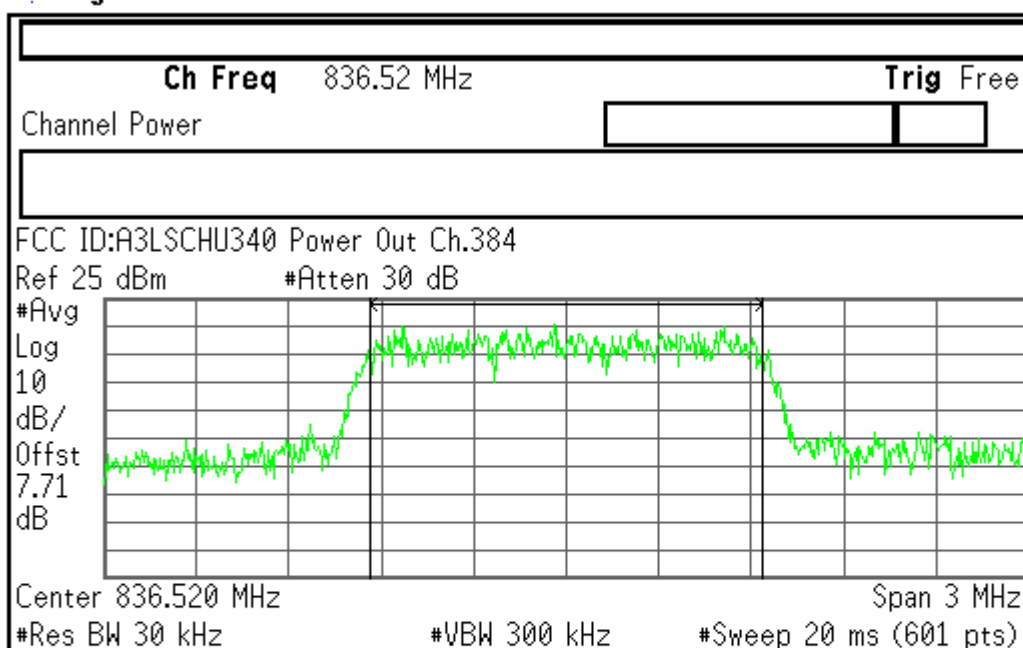Center Freq
836.520000 MHzStart Freq
835.020000 MHzStop Freq
838.020000 MHzCF Step
300.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Channel Power

24.89 dBm /1.2731 MHz

Power Spectral Density

-36.15 dBm/Hz

Copyright 2000-2006 Agilent Technologies

Ch Freq 848.31 MHz		Trig Free	
Channel Power			

FCC ID:A3LSCHU340 Power Out Ch.777

Ref 25 dBm #Atten 30 dB

#Avg

Log


10

dB/

Offst

7.71

dB

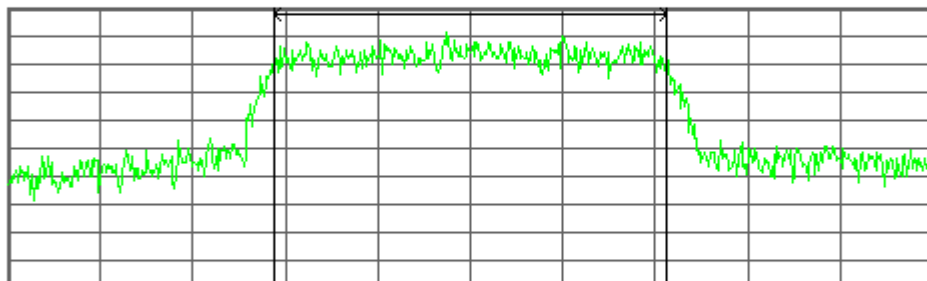

Center 848.310 MHz

Span 3 MHz

#Res BW 30 kHz

#VBW 300 kHz

#Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

24.96 dBm /1.2649 MHz

-36.07 dBm/Hz

Freq/Channel

Center Freq

848.310000 MHz

Start Freq

846.810000 MHz

Stop Freq

849.810000 MHz

CF Step

300.000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Copyright 2000-2006 Agilent Technologies

FCC ID:A3LSCHU340 Power Out Ch.1013
Ref 25 dBm Atten 30 dB

#Samp

Log


10

dB/

Offst

7.71

dB

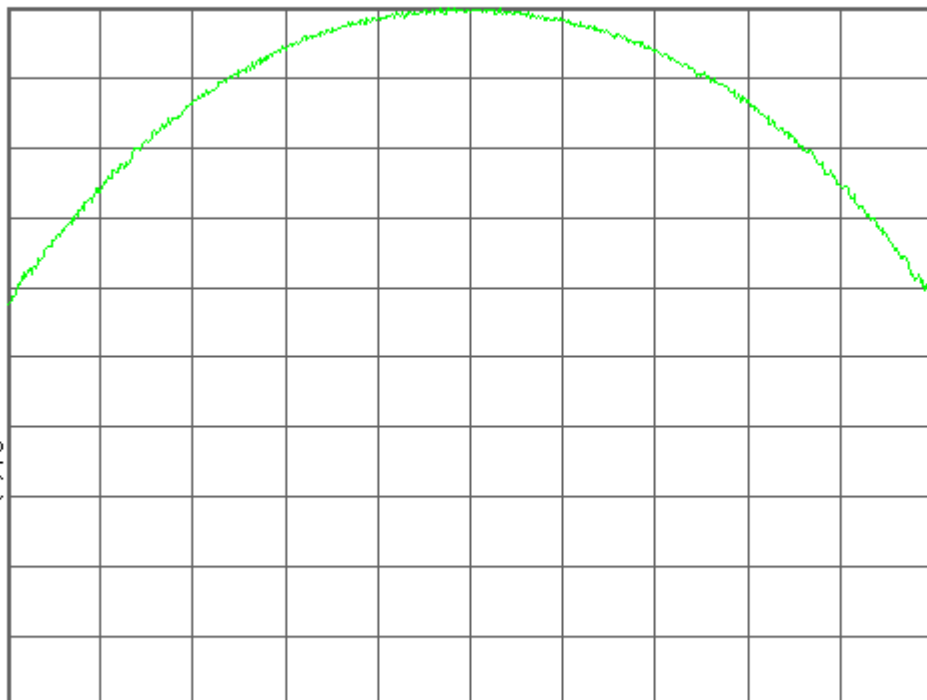

LgAv

100

W1 S2

S3 FC

£(f):

FTun

Swp

Center 824.70 MHz

Span 10 MHz

#Res BW 3 MHz

VBW 3 MHz

Sweep 1 ms (601 pts)

Freq/Channel

Center Freq

824.700000 MHz

Start Freq

819.700000 MHz

Stop Freq

829.700000 MHz

CF Step

1.00000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Copyright 2000-2006 Agilent Technologies

FCC ID:A3LSCHU340 Power Out Ch.384

Ref 25 dBm

Atten 30 dB

#Samp

Log

10

dB/

Offst

7.71

dB

LgAv

100


W1 S2

S3 FC

$E(f)$:

FTun

Swp

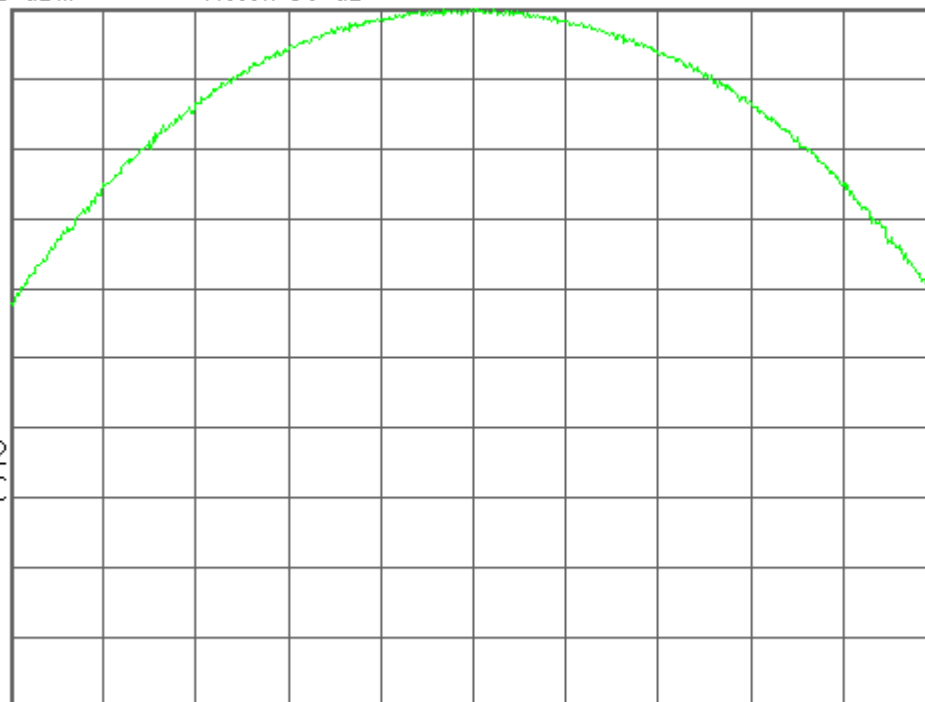

Center 836.52 MHz

Span 10 MHz

#Res BW 3 MHz

VBW 3 MHz

Sweep 1 ms (601 pts)

Center Freq
836.520000 MHz

Start Freq
831.520000 MHz

Stop Freq
841.520000 MHz

CF Step
1.00000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2006 Agilent Technologies

FCC ID:A3LSCHU340 Power Out Ch.777

Ref 25 dBm

Atten 30 dB

#Samp

Log

10

dB/

Offst

7.71

dB

LgAv

100


W1 S2

S3 FC

$E(f)$:

FTun

Swp

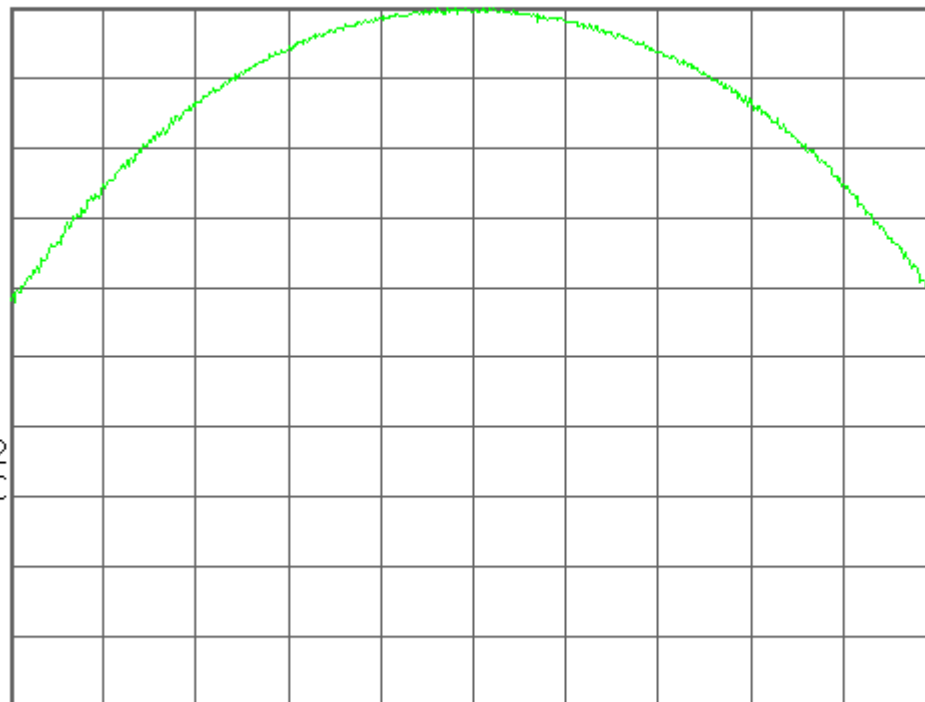

Center 848.31 MHz

Span 10 MHz

#Res BW 3 MHz

VBW 3 MHz

Sweep 1 ms (601 pts)

Center Freq
848.310000 MHz

Start Freq
843.310000 MHz

Stop Freq
853.310000 MHz

CF Step
1.00000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\SCREN031.GIF file saved

Ch Freq 824.7 MHz Trig Free
Occupied Bandwidth

Center Freq
824.700000 MHz

Start Freq
823.200000 MHz

Stop Freq
826.200000 MHz


CF Step
300.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LSCHU340 0BW Ch.1013

Ref 25 dBm #Atten 30 dB

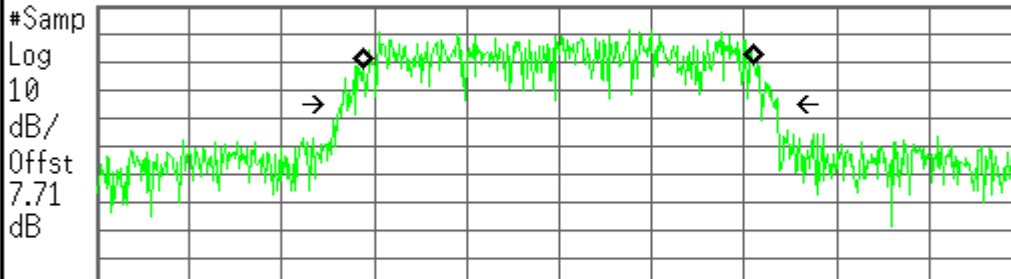

Center 824.700 MHz Span 3 MHz
#Res BW 30 kHz #VBW 300 kHz #Sweep 20 ms (601 pts)

Occupied Bandwidth 1.2669 MHz
Occ BW % Pwr 99.00 %
x dB -26.00 dB
Transmit Freq Error -2.915 kHz
x dB Bandwidth 1.413 MHz*

Copyright 2000-2006 Agilent Technologies

Ch Freq 836.52 MHz Trig Free
Occupied Bandwidth

Center Freq
836.520000 MHz

Start Freq
835.020000 MHz

Stop Freq
838.020000 MHz


CF Step
300.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LSCHU340 0BW Ch.384

Ref 25 dBm #Atten 30 dB

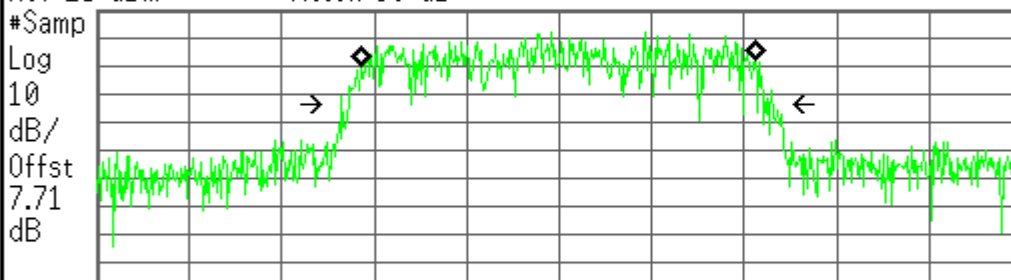

Center 836.520 MHz Span 3 MHz
#Res BW 30 kHz #VBW 300 kHz #Sweep 20 ms (601 pts)

Occupied Bandwidth 1.2731 MHz
Occ BW % Pwr 99.00 %
x dB -26.00 dB
Transmit Freq Error -2.913 kHz
x dB Bandwidth 1.402 MHz*

Copyright 2000-2006 Agilent Technologies

Ch Freq 848.31 MHz Trig Free
Occupied Bandwidth

Center Freq
848.310000 MHz

Start Freq
846.810000 MHz

Stop Freq
849.810000 MHz

CF Step
300.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LSCHU340 0BW Ch.777

Ref 25 dBm #Atten 30 dB



Center 848.310 MHz Span 3 MHz
#Res BW 30 kHz #VBW 300 kHz #Sweep 20 ms (601 pts)

Occupied Bandwidth 1.2649 MHz
Occ BW % Pwr 99.00 %
x dB -26.00 dB
Transmit Freq Error 2.375 kHz
x dB Bandwidth 1.401 MHz*

Copyright 2000-2006 Agilent Technologies

FCC ID:A3LSCHU340 Rx Spurious Emission Mkr1 881.12 MHz
Ref -50 dBm #Atten 0 dB -95.62 dBm

Center Freq
881.500000 MHz


Start Freq
869.000000 MHz

Stop Freq
894.000000 MHz

CF Step
2.50000000 MHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

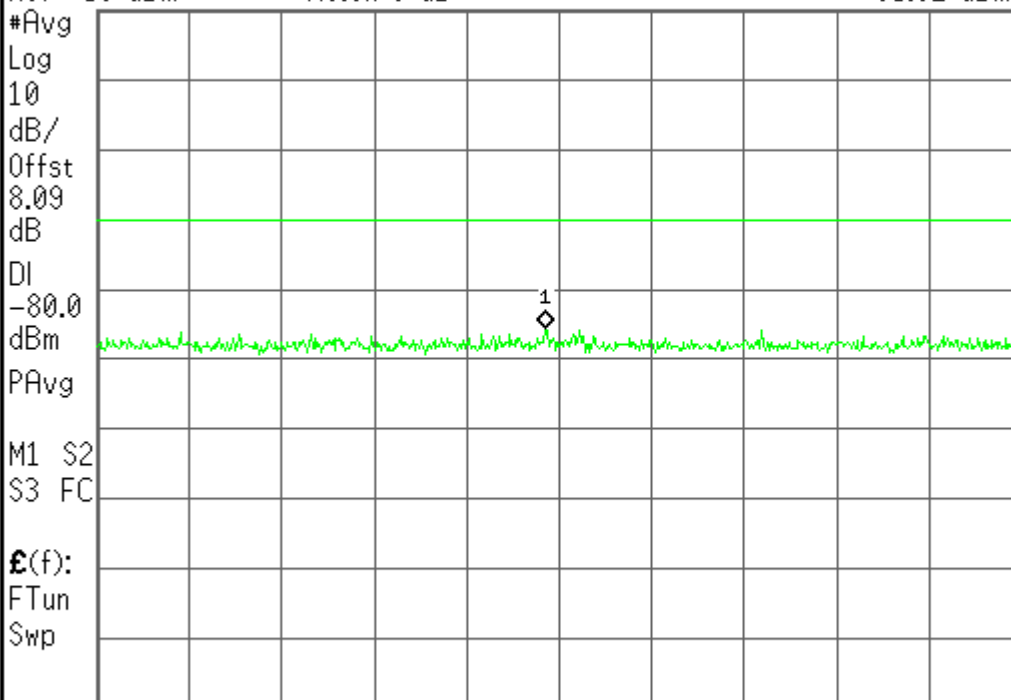

Center 881.50 MHz Span 25 MHz
#Res BW 30 kHz #VBW 30 kHz Sweep 105.9 ms (601 pts)

Copyright 2000-2006 Agilent Technologies

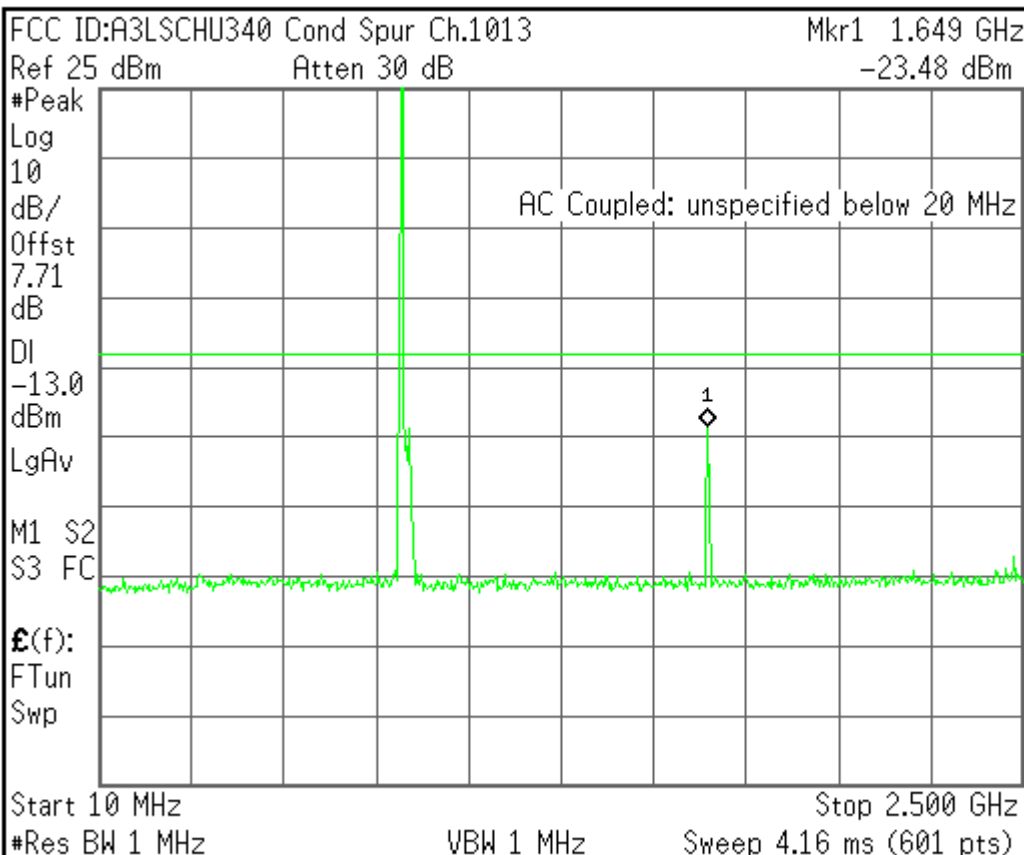

Freq/Channel

Center Freq
 1.25500000 GHz

Start Freq
 10.0000000 MHz


Stop Freq
 2.50000000 GHz

CF Step
 249.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

Copyright 2000-2006 Agilent Technologies

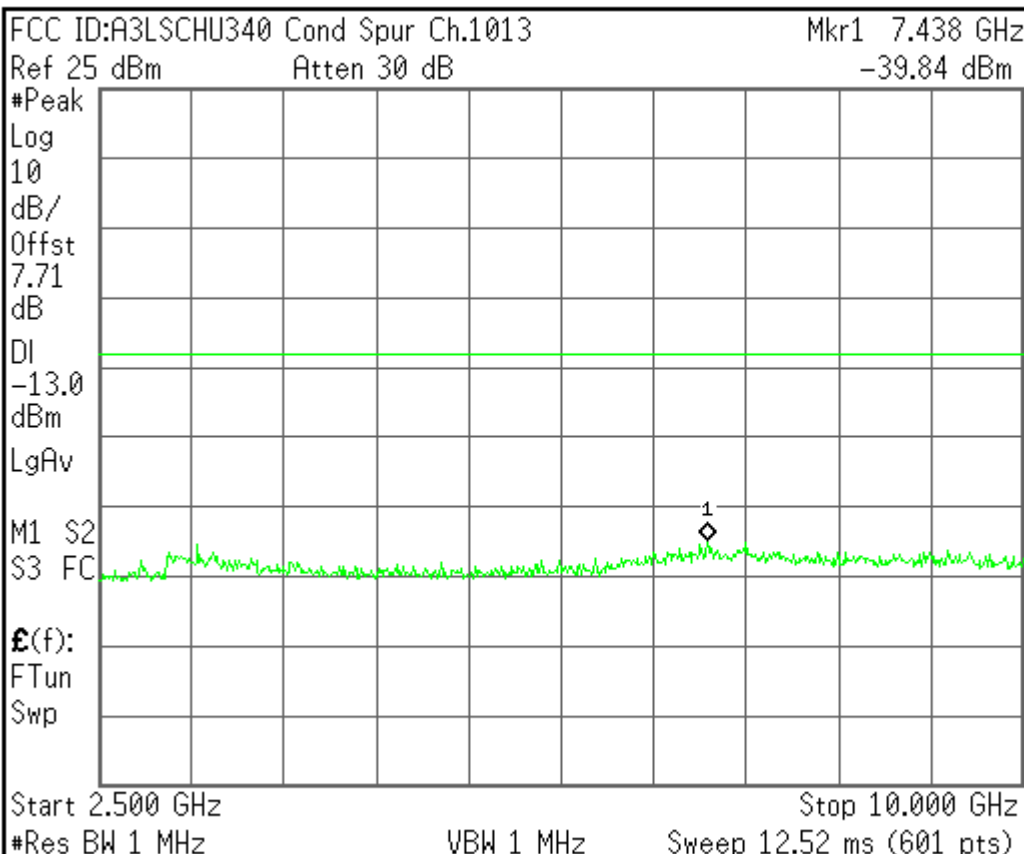

Freq/Channel

Center Freq
 6.25000000 GHz

Start Freq
 2.50000000 GHz


Stop Freq
 10.0000000 GHz

CF Step
 750.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

Copyright 2000-2006 Agilent Technologies

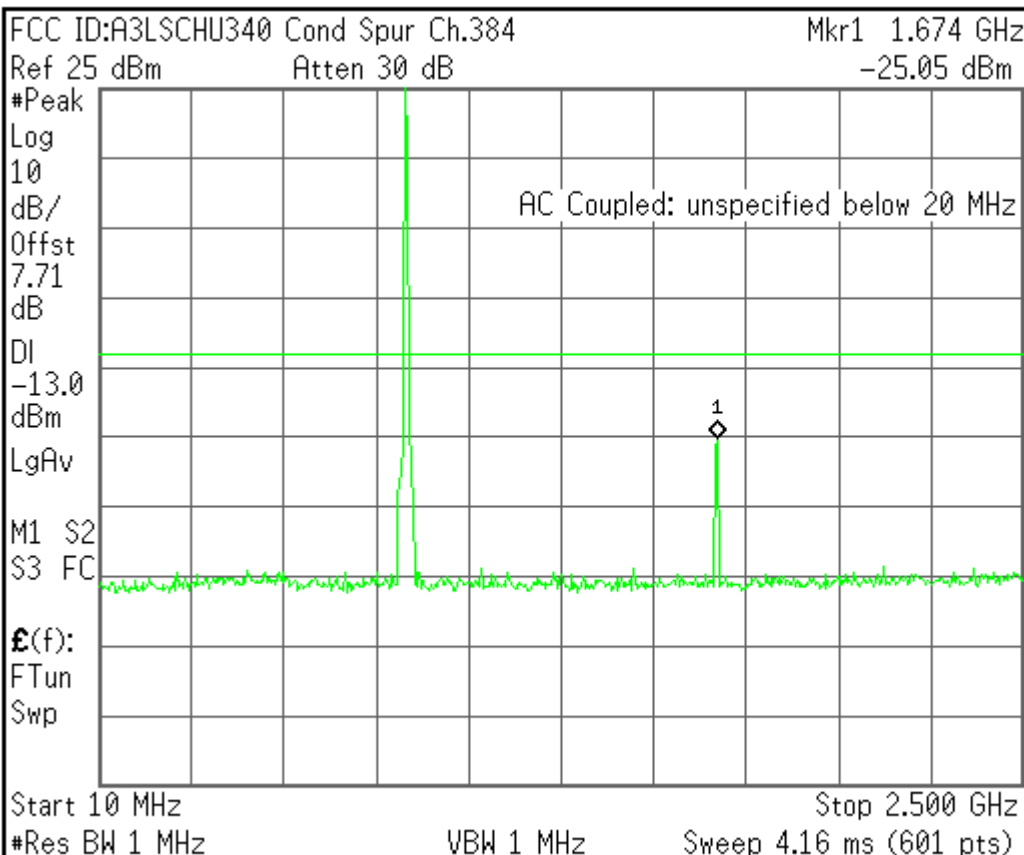

Freq/Channel

Center Freq
 1.25500000 GHz

Start Freq
 10.0000000 MHz


Stop Freq
 2.50000000 GHz

CF Step
 249.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

Copyright 2000-2006 Agilent Technologies

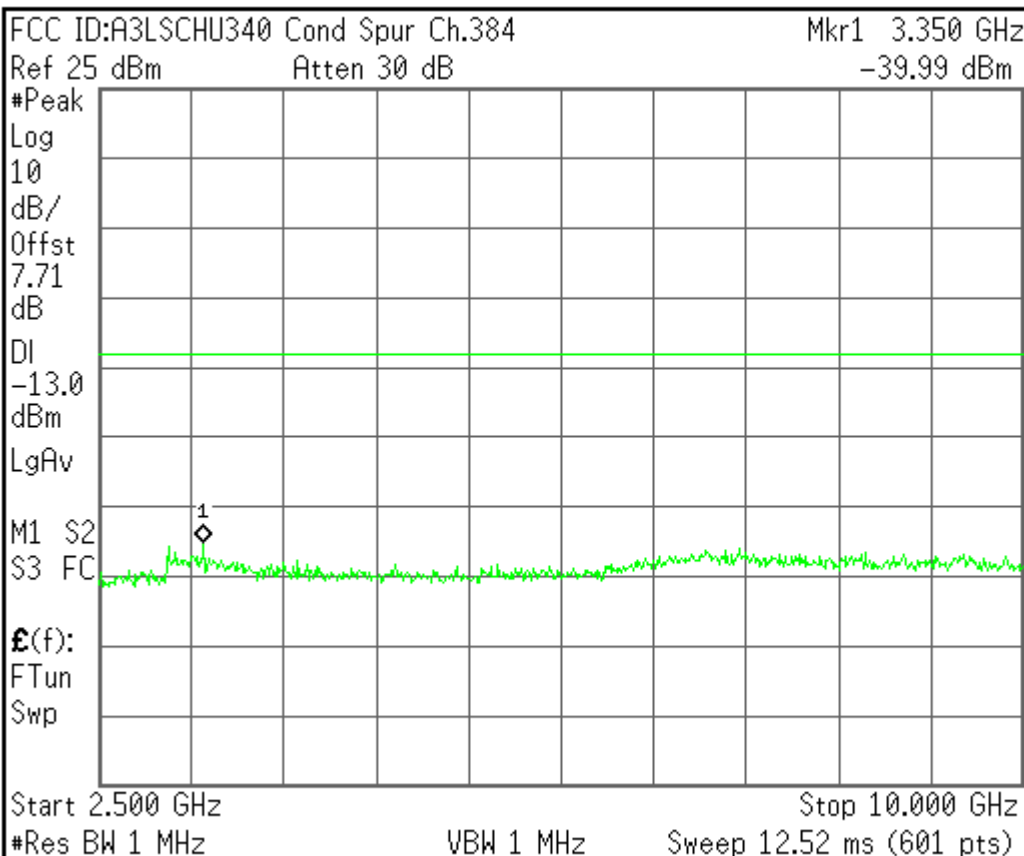

Freq/Channel

Center Freq
 6.25000000 GHz

Start Freq
 2.50000000 GHz


Stop Freq
 10.0000000 GHz

CF Step
 750.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

Copyright 2000-2006 Agilent Technologies

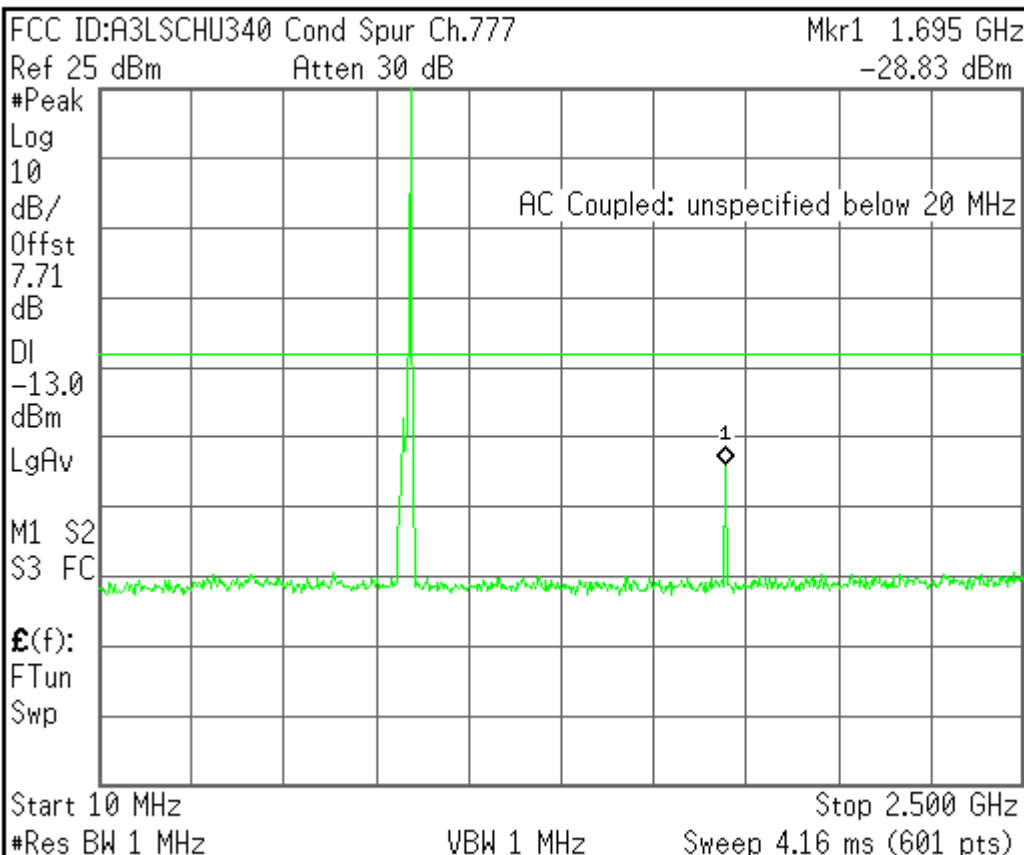

Freq/Channel

Center Freq
 1.25500000 GHz

Start Freq
 10.0000000 MHz


Stop Freq
 2.50000000 GHz

CF Step
 249.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

Copyright 2000-2006 Agilent Technologies

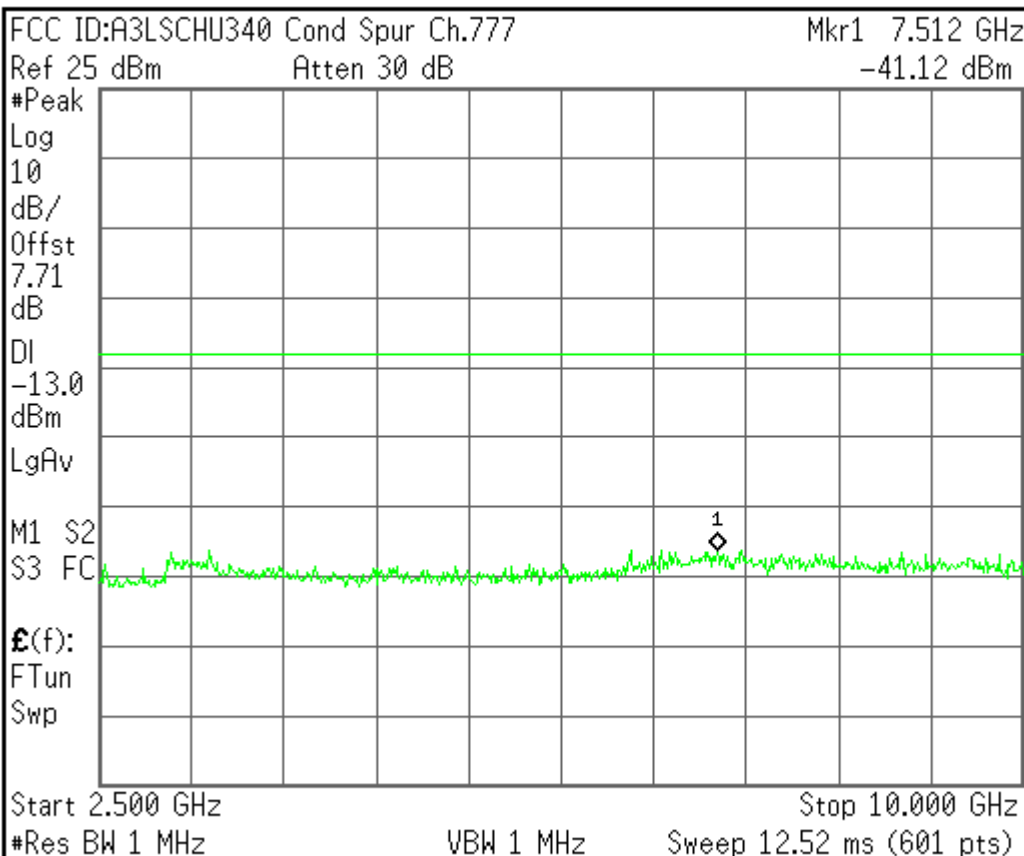

Freq/Channel

Center Freq
 6.25000000 GHz

Start Freq
 2.50000000 GHz


Stop Freq
 10.0000000 GHz

CF Step
 750.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

Copyright 2000-2006 Agilent Technologies

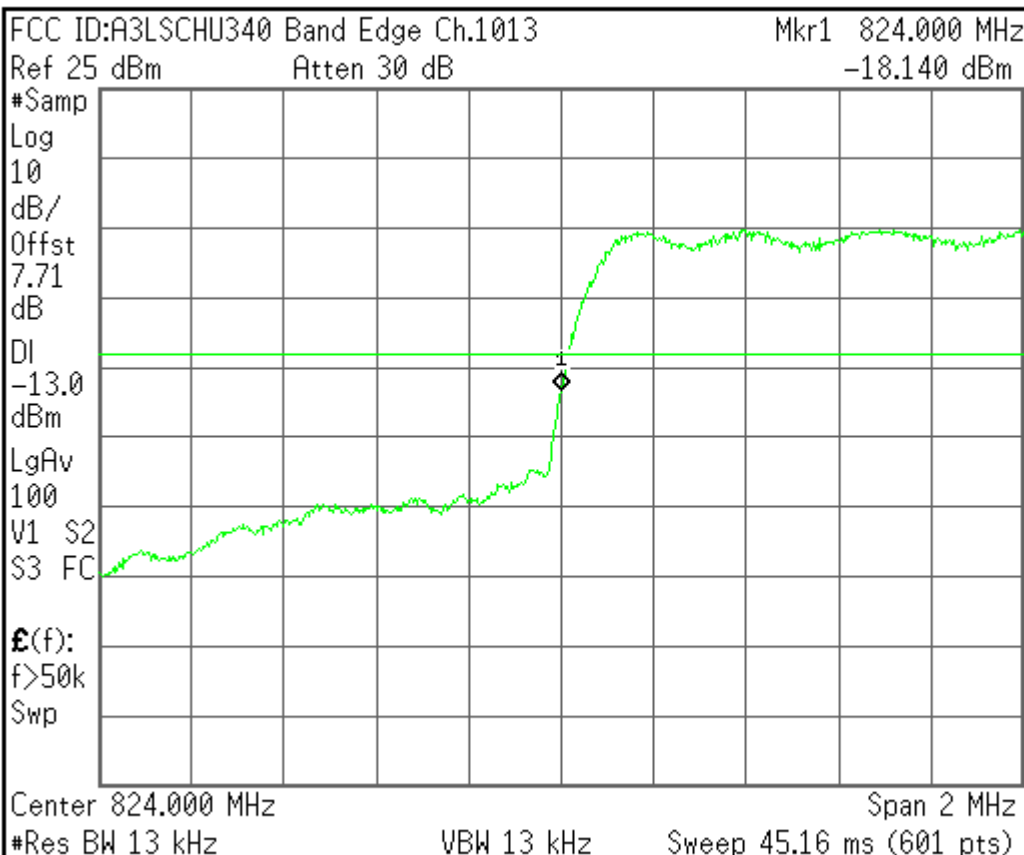

Freq/Channel

Center Freq
 824.000000 MHz

Start Freq
 823.000000 MHz


Stop Freq
 825.000000 MHz

CF Step
 200.000000 kHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

Copyright 2000-2006 Agilent Technologies

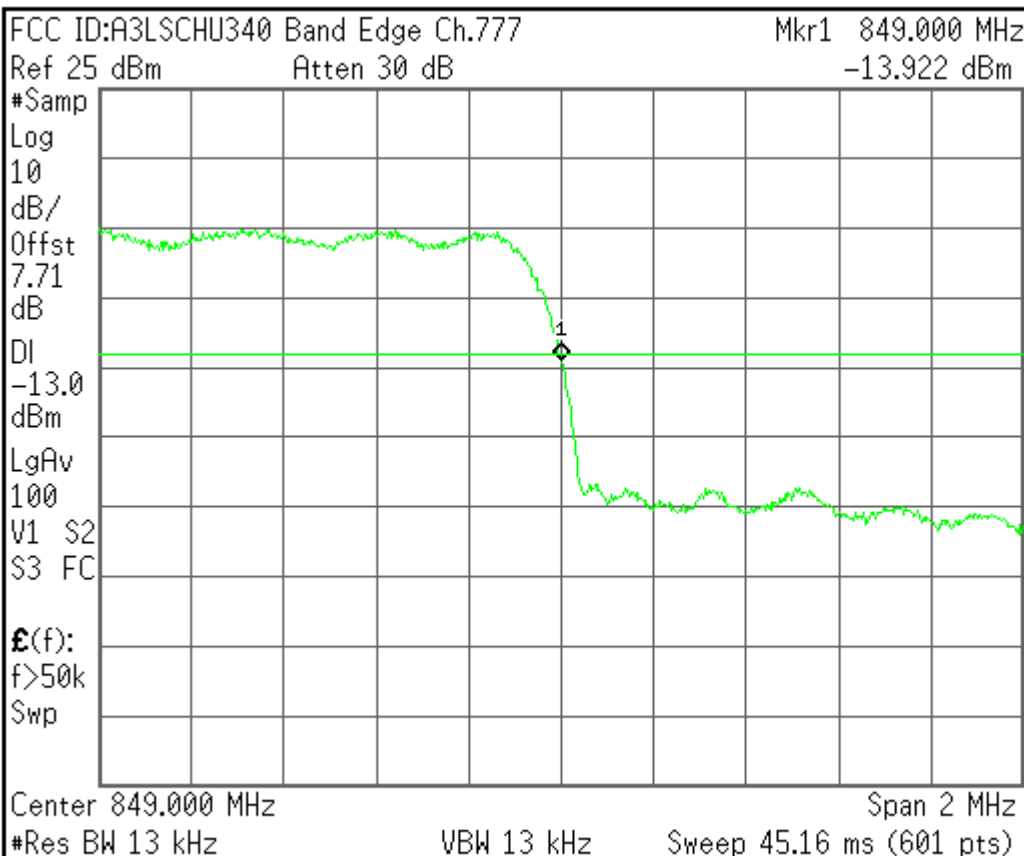

Freq/Channel

Center Freq
 849.000000 MHz

Start Freq
 848.000000 MHz

Stop Freq
 850.000000 MHz

CF Step
 200.000000 kHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

Copyright 2000-2006 Agilent Technologies

FCC ID:A3LSCHU340 4MHz Span Ch.1013

Mkr1 823.000 MHz

Ref 25 dBm

Atten 30 dB

-36.409 dBm

#Samp

Log

10

dB/

Offst

7.71

dB

DI

-13.0

dBm

LgAv

100


V1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

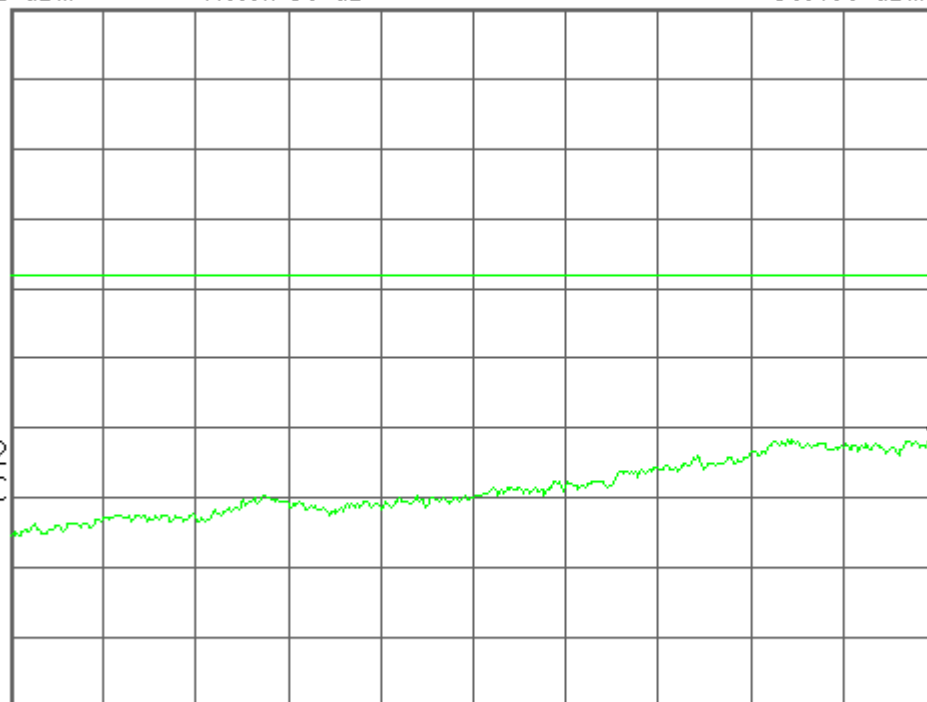

Center 821.000 MHz

Span 4 MHz

#Res BW 100 kHz

VBW 100 kHz

Sweep 1.56 ms (601 pts)

Center Freq
821.000000 MHz

Start Freq
819.000000 MHz

Stop Freq
823.000000 MHz

CF Step
400.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2006 Agilent Technologies

FCC ID:A3LSCHU340 4MHz Span Ch.777

Mkr1 850.087 MHz

Ref 25 dBm

Atten 30 dB

-28.563 dBm

#Samp

Log

10

dB/

Offst

7.71

dB

DI

-13.0

dBm

LgAv

100


V1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

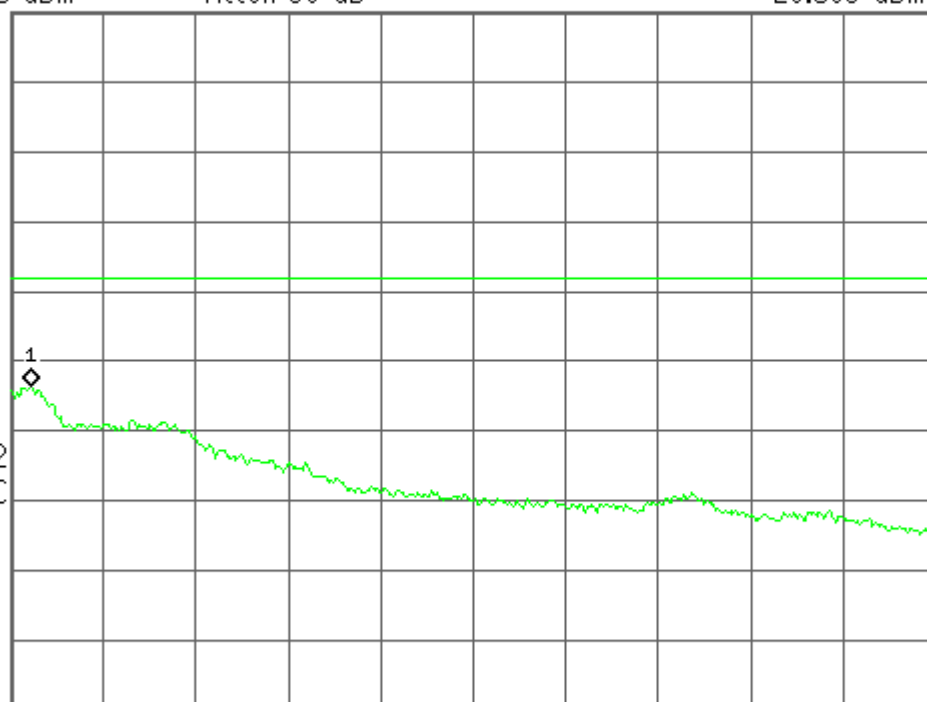

Center 852.000 MHz

Span 4 MHz

#Res BW 100 kHz

VBW 100 kHz

Sweep 1.56 ms (601 pts)

Center Freq
852.000000 MHz

Start Freq
850.000000 MHz

Stop Freq
854.000000 MHz

CF Step
400.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2006 Agilent Technologies



Agilent

L

Freq/Channel

Ch Freq 1.85125 GHz Trig Free

Channel Power

Center Freq
1.85125000 GHz

Start Freq
1.84975000 GHz

Stop Freq
1.85275000 GHz

CF Step
300.000000 kHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LSCHU340 Power Out Ch.25

Ref 25 dBm #Atten 30 dB

#Avg
Log
10
dB/
Offst
8.56
dB

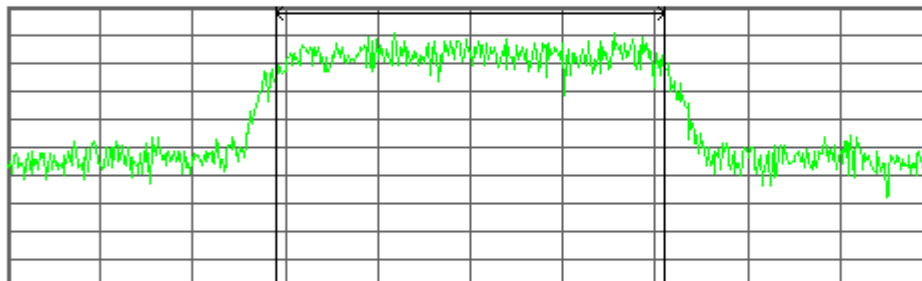

Center 1.851 250 GHz

Span 3 MHz

#Res BW 30 kHz

#VBW 300 kHz

#Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

24.91 dBm /1.2611 MHz

-36.10 dBm/Hz

Copyright 2000-2006 Agilent Technologies



Agilent

L

Freq/Channel

Ch Freq 1.88 GHz Trig Free

Channel Power

Center Freq
1.88000000 GHz

Start Freq
1.87850000 GHz

Stop Freq
1.88150000 GHz

CF Step
300.000000 kHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LSCHU340 Power Out Ch.600

Ref 25 dBm #Atten 30 dB

#Avg
Log
10
dB/
Offst
8.56
dB

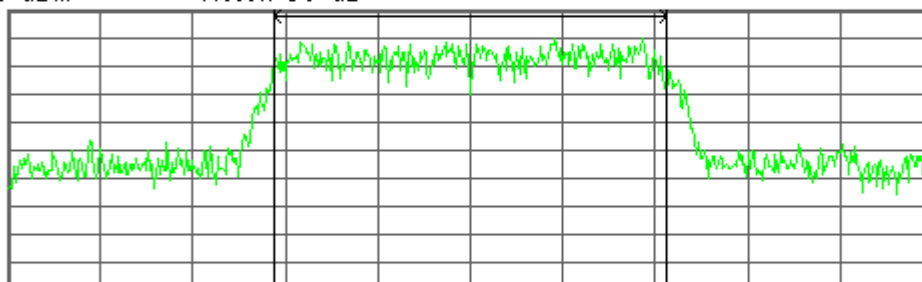

Center 1.880 000 GHz

Span 3 MHz

#Res BW 30 kHz

#VBW 300 kHz

#Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

25.00 dBm /1.2652 MHz

-36.02 dBm/Hz

Copyright 2000-2006 Agilent Technologies

Ch Freq 1.90875 GHz		Trig Free
Channel Power		

Center Freq 1.90875000 GHz

Start Freq 1.90725000 GHz

Stop Freq 1.91025000 GHz


CF Step 300.000000 kHz Auto Man
--

Freq Offset 0.00000000 Hz

Signal Track On Off

FCC ID:A3LSCHU340 Power Out Ch.1175


Ref 25 dBm #Atten 30 dB

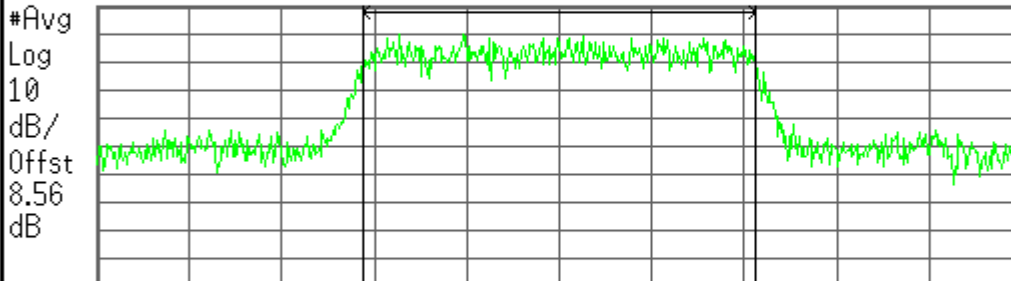

Center 1.908 750 GHz Span 3 MHz
#Res BW 30 kHz #VBW 300 kHz #Sweep 20 ms (601 pts)

Channel Power 25.00 dBm /1.2668 MHz	Power Spectral Density -36.03 dBm/Hz
---	--

Copyright 2000-2006 Agilent Technologies

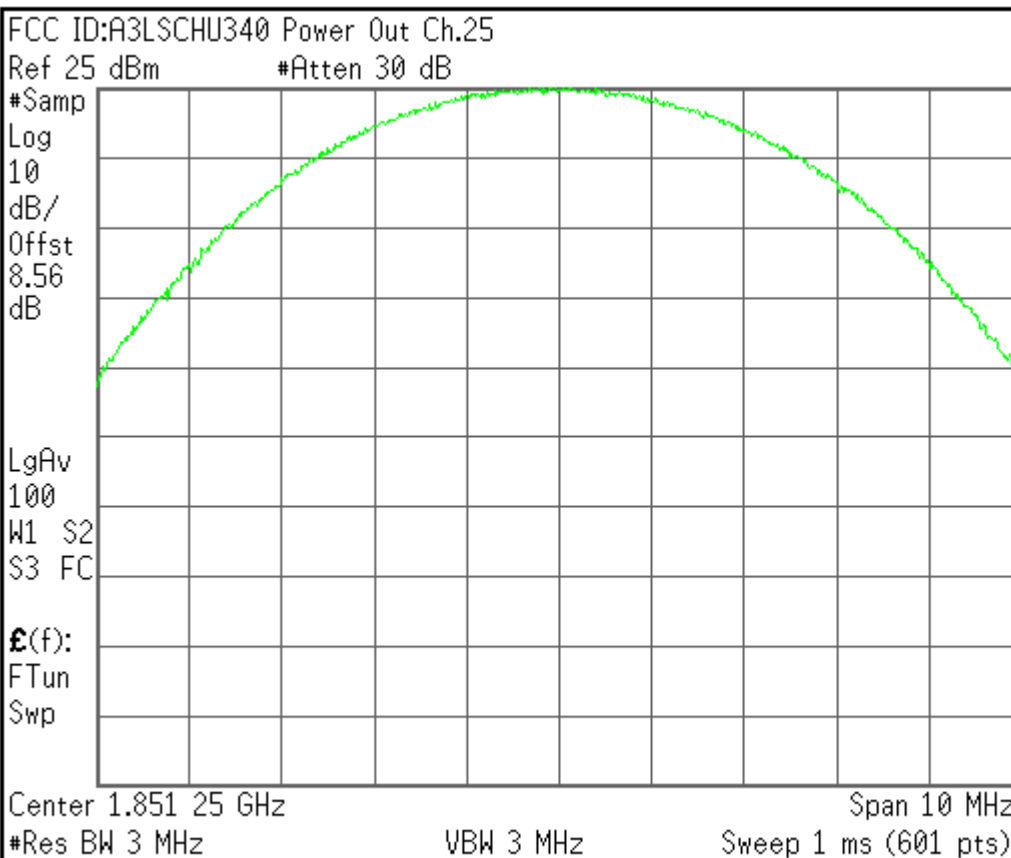

Center Freq 1.85125000 GHz

Start Freq 1.84625000 GHz

Stop Freq 1.85625000 GHz

CF Step 1.00000000 MHz Auto Man
--

Freq Offset 0.00000000 Hz

Signal Track On Off

Center 1.851 25 GHz Span 10 MHz
#Res BW 3 MHz VBW 3 MHz Sweep 1 ms (601 pts)

Copyright 2000-2006 Agilent Technologies

FCC ID:A3LSCHU340 Power Out Ch.600

Ref 25 dBm #Atten 30 dB

#Samp

Log

10

dB/

Offst

8.56

dB

LgAv

100


W1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

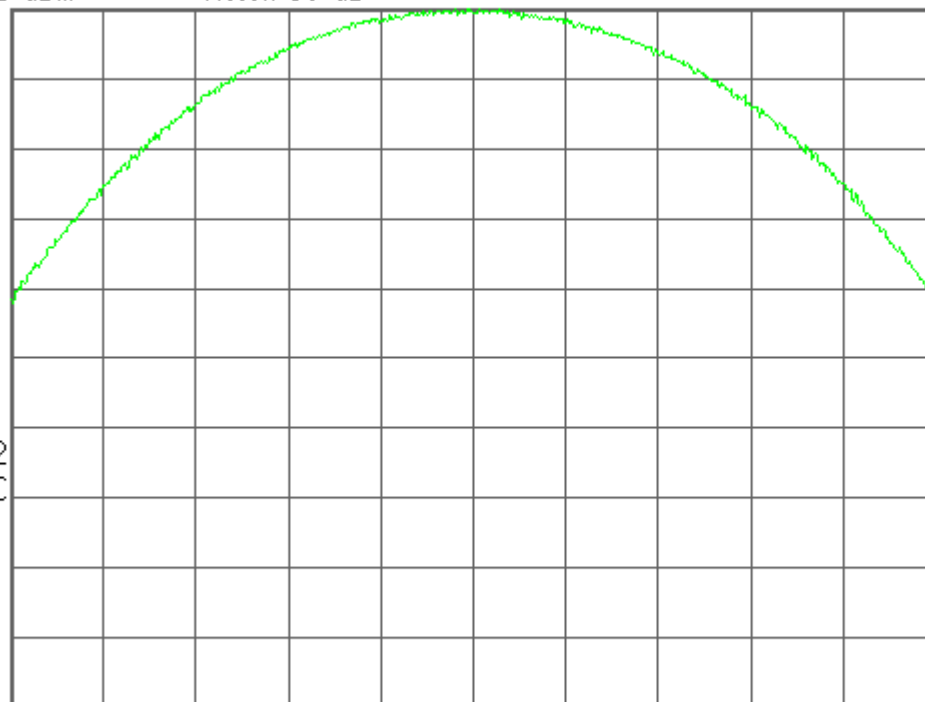

Center 1.880 00 GHz

Span 10 MHz

#Res BW 3 MHz

VBW 3 MHz

Sweep 1 ms (601 pts)

Center Freq

1.88000000 GHz

Start Freq

1.87500000 GHz

Stop Freq

1.88500000 GHz

CF Step

1.00000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Copyright 2000-2006 Agilent Technologies

FCC ID:A3LSCHU340 Power Out Ch.1175

Ref 25 dBm #Atten 30 dB

#Samp

Log

10

dB/

Offst

8.56

dB

LgAv

100


W1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

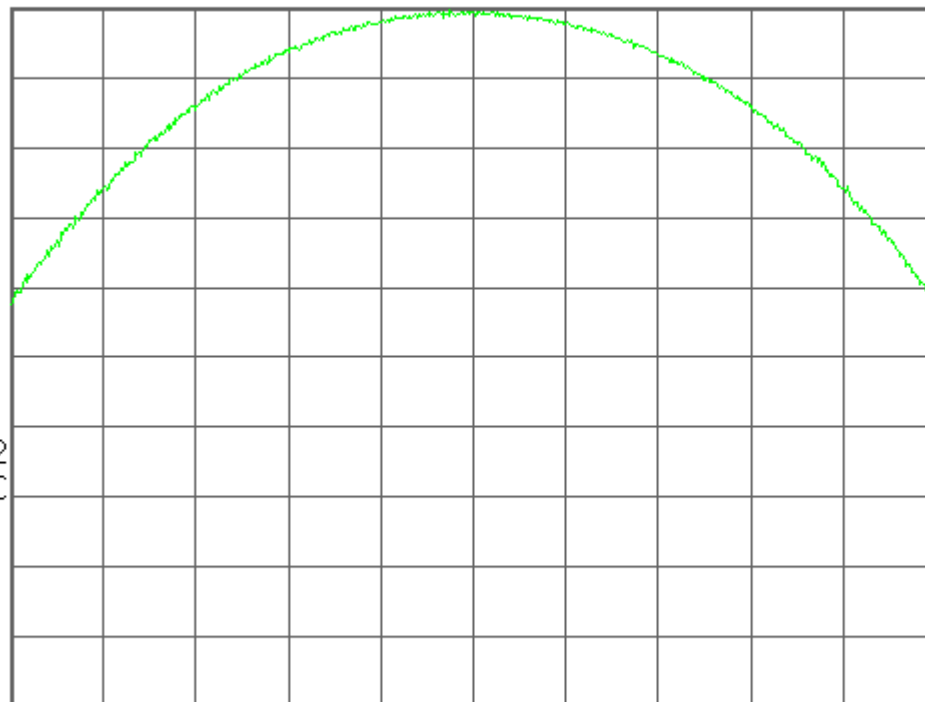

Center 1.908 75 GHz

Span 10 MHz

#Res BW 3 MHz

VBW 3 MHz

Sweep 1 ms (601 pts)

Center Freq

1.90875000 GHz

Start Freq

1.90375000 GHz

Stop Freq

1.91375000 GHz

CF Step

1.00000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Copyright 2000-2006 Agilent Technologies

Ch Freq 1.85125 GHz **Trig** Free

Occupied Bandwidth

Center Freq
1.85125000 GHz

Start Freq
1.84975000 GHz

Stop Freq
1.85275000 GHz

CF Step
1.00000000 Hz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LSCHU340 0BW Ch.25

Ref 25 dBm #Atten 30 dB

#Samp

Log


10

dB/

Offst

8.56

dB

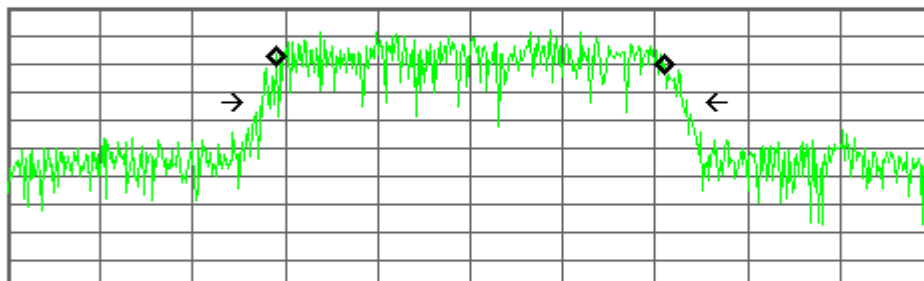

Center 1.851 250 GHz

Span 3 MHz

#Res BW 30 kHz

#VBW 300 kHz

#Sweep 20 ms (601 pts)

Occupied Bandwidth

Occ BW % Pwr 99.00 %
x dB -26.00 dB

1.2611 MHz

Transmit Freq Error 1.434 kHz

x dB Bandwidth 1.376 MHz*

Copyright 2000-2006 Agilent Technologies

Ch Freq 1.88 GHz **Trig** Free

Occupied Bandwidth

Center Freq
1.88000000 GHz

Start Freq
1.87850000 GHz

Stop Freq
1.88150000 GHz

CF Step
1.00000000 Hz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LSCHU340 0BW Ch.600

Ref 25 dBm #Atten 30 dB

#Samp

Log


10

dB/

Offst

8.56

dB

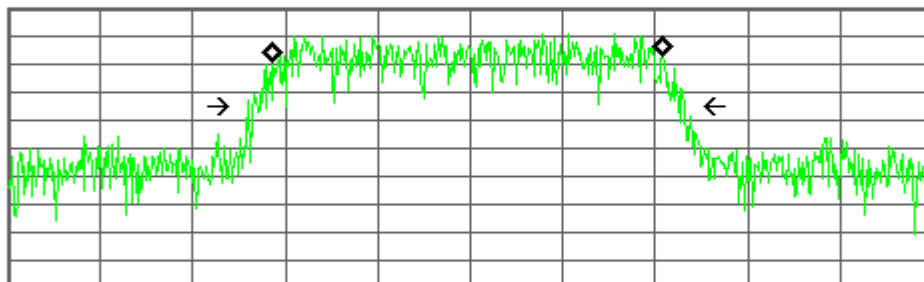

Start 1.878 500 GHz

Stop 1.881 500 GHz

#Res BW 30 kHz

#VBW 300 kHz

#Sweep 20 ms (601 pts)

Occupied Bandwidth

Occ BW % Pwr 99.00 %
x dB -26.00 dB

1.2652 MHz

Transmit Freq Error -6.712 kHz

x dB Bandwidth 1.417 MHz*

Copyright 2000-2006 Agilent Technologies

Ch Freq 1.90875 GHz **Trig** Free
Occupied Bandwidth

Center Freq
1.90875000 GHz

Start Freq
1.90725000 GHz

Stop Freq
1.91025000 GHz

CF Step
1.00000000 Hz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LSCHU340 0BW Ch.1175

Ref 25 dBm #Atten 30 dB

#Samp

Log


10

dB/

Offst

8.56

dB

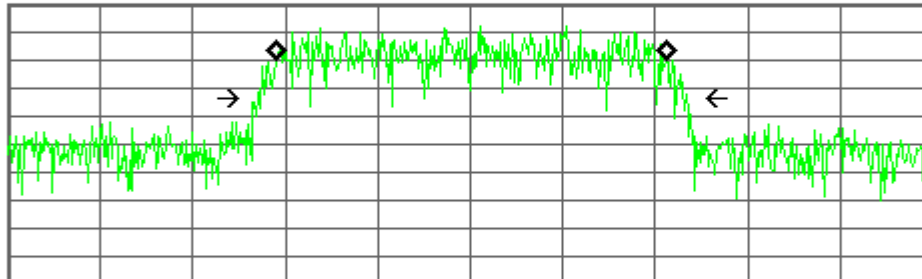

Center 1.908 750 GHz

Span 3 MHz

#Res BW 30 kHz

#VBW 300 kHz

#Sweep 20 ms (601 pts)

Occupied Bandwidth

1.2668 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 2.985 kHz

x dB Bandwidth 1.394 MHz*

FCC ID:A3LSCHU340 Cond Spur Ch.25

Mkr1 342 MHz

Ref 25 dBm

#Atten 30 dB

-43.21 dBm

#Peak

Log

10

dB/

Offst

8.56

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Start 10 MHz

Stop 2.500 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Freq/Channel

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

1.00000000 Hz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Copyright 2000-2006 Agilent Technologies

FCC ID:A3LSCHU340 Cond Spur Ch.25

Mkr1 3.70 GHz

Ref 25 dBm

#Atten 30 dB

-29.40 dBm

#Peak

Log

10

dB/

Offst

8.56

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

Start 2.50 GHz

Stop 20.00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 43.76 ms (601 pts)

Freq/Channel

Center Freq

11.2500000 GHz

Start Freq

2.50000000 GHz

Stop Freq

20.0000000 GHz

CF Step

1.00000000 Hz

Auto

Man

Freq Offset



0.00000000 Hz


Signal Track

On

Off

Copyright 2000-2006 Agilent Technologies

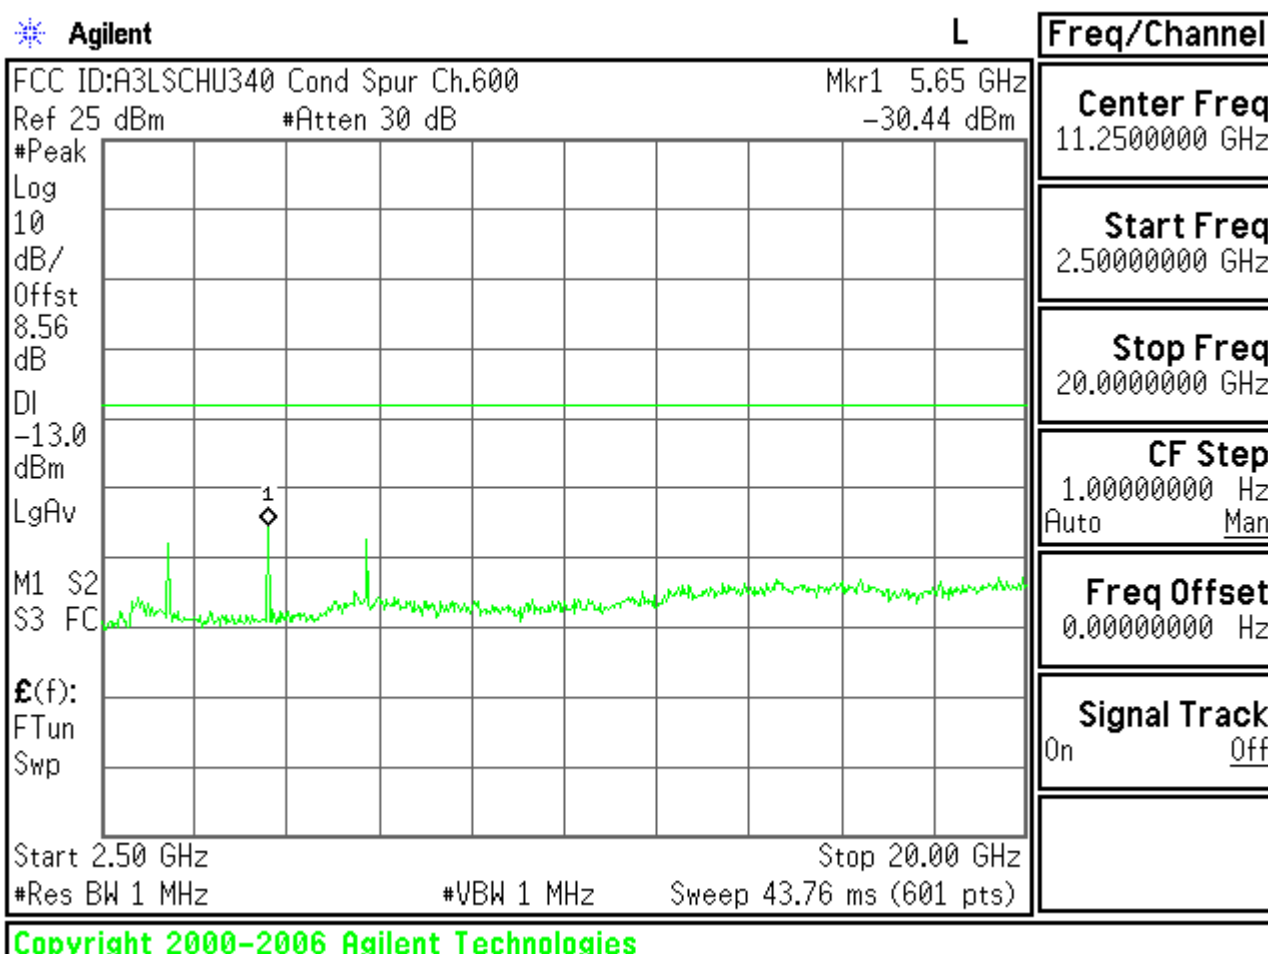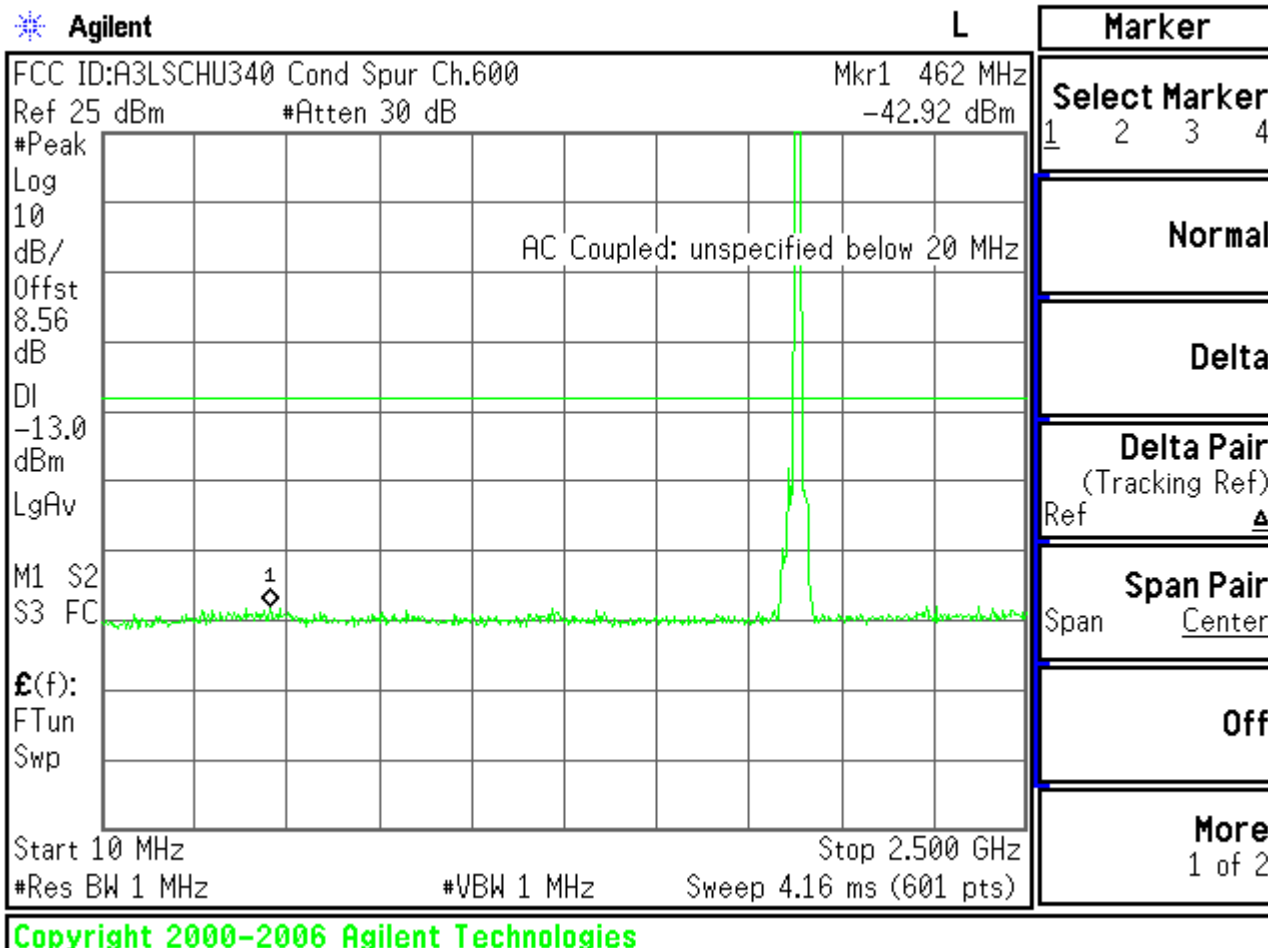

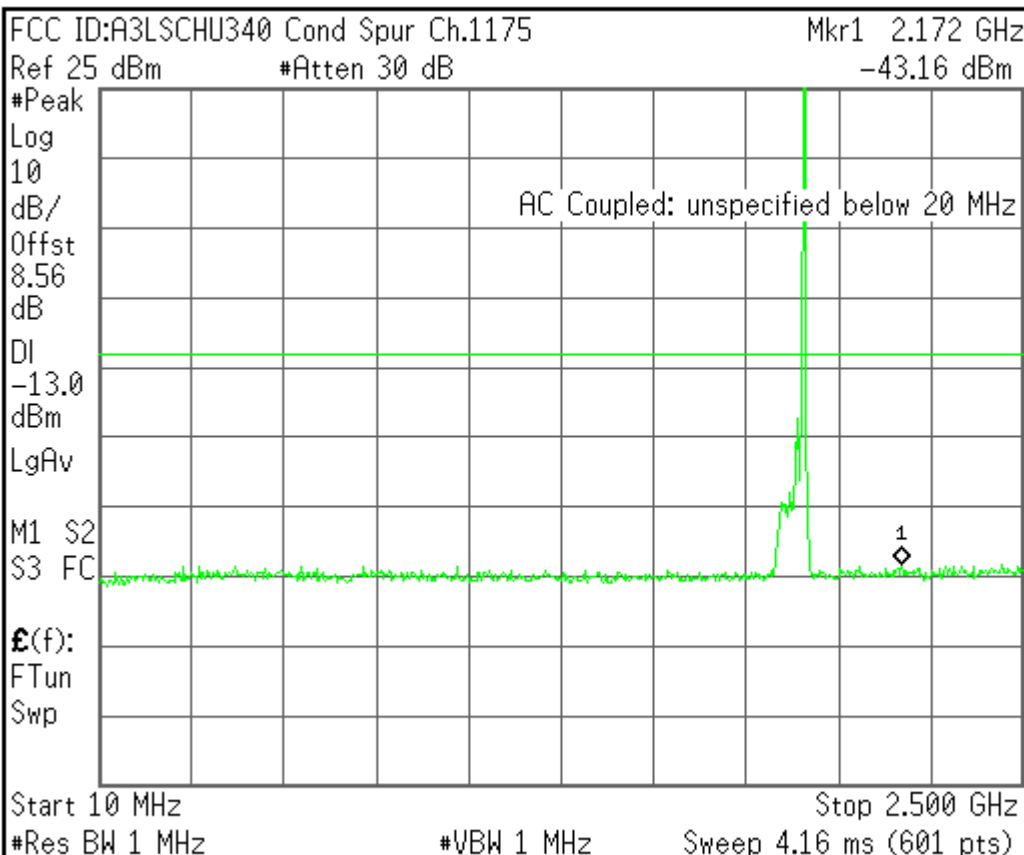

Freq/Channel

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz


Stop Freq
2.50000000 GHz

CF Step
1.00000000 Hz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2006 Agilent Technologies

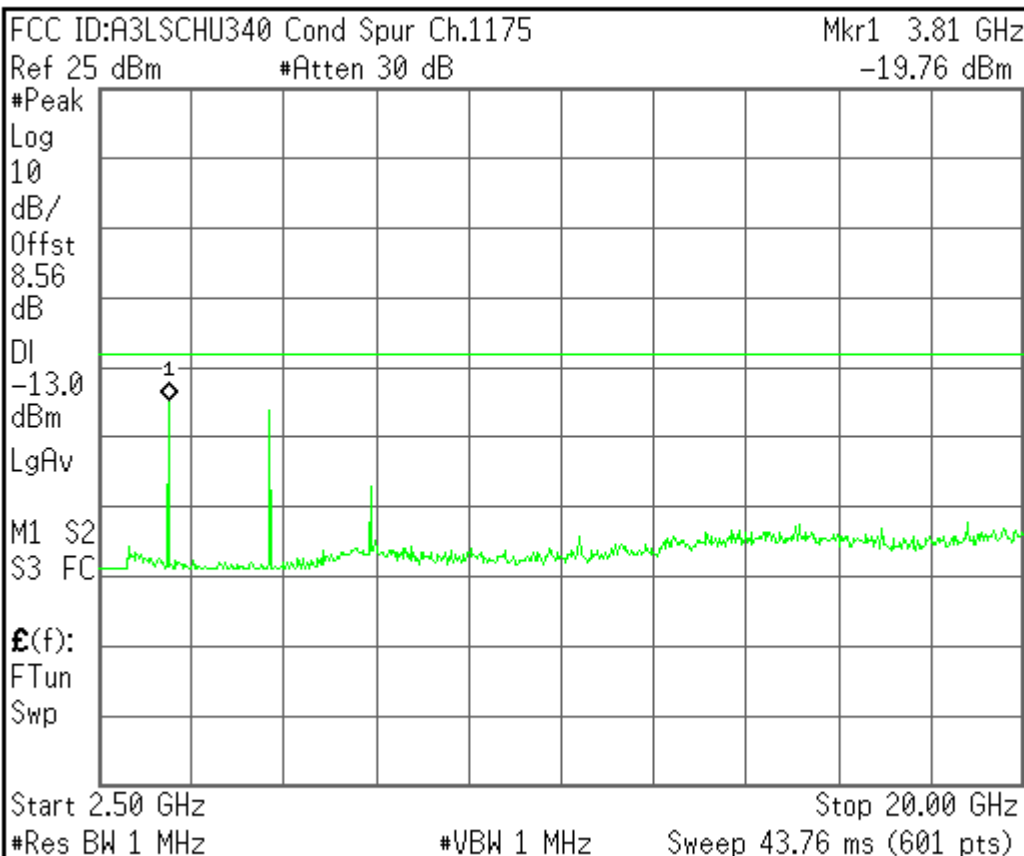

Freq/Channel

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz


Stop Freq
20.0000000 GHz

CF Step
1.00000000 Hz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2006 Agilent Technologies

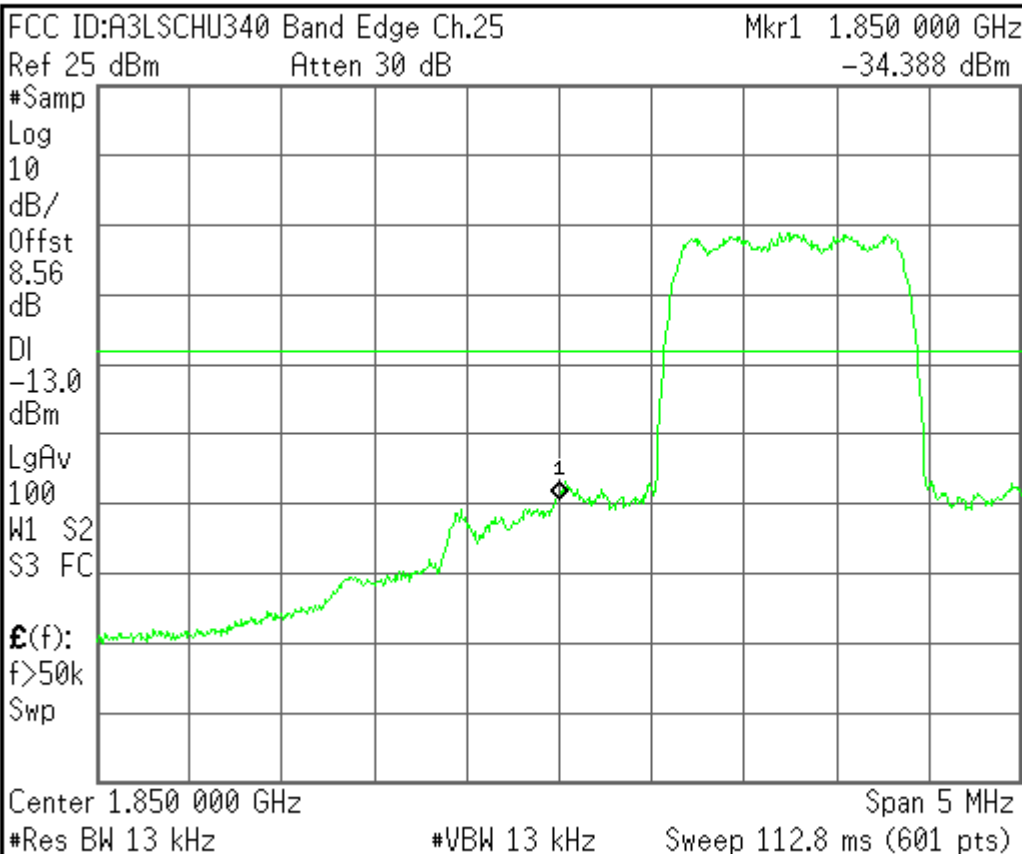

Freq/Channel

Center Freq
1.85000000 GHz

Start Freq
1.84750000 GHz


Stop Freq
1.85250000 GHz

CF Step
500.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2006 Agilent Technologies

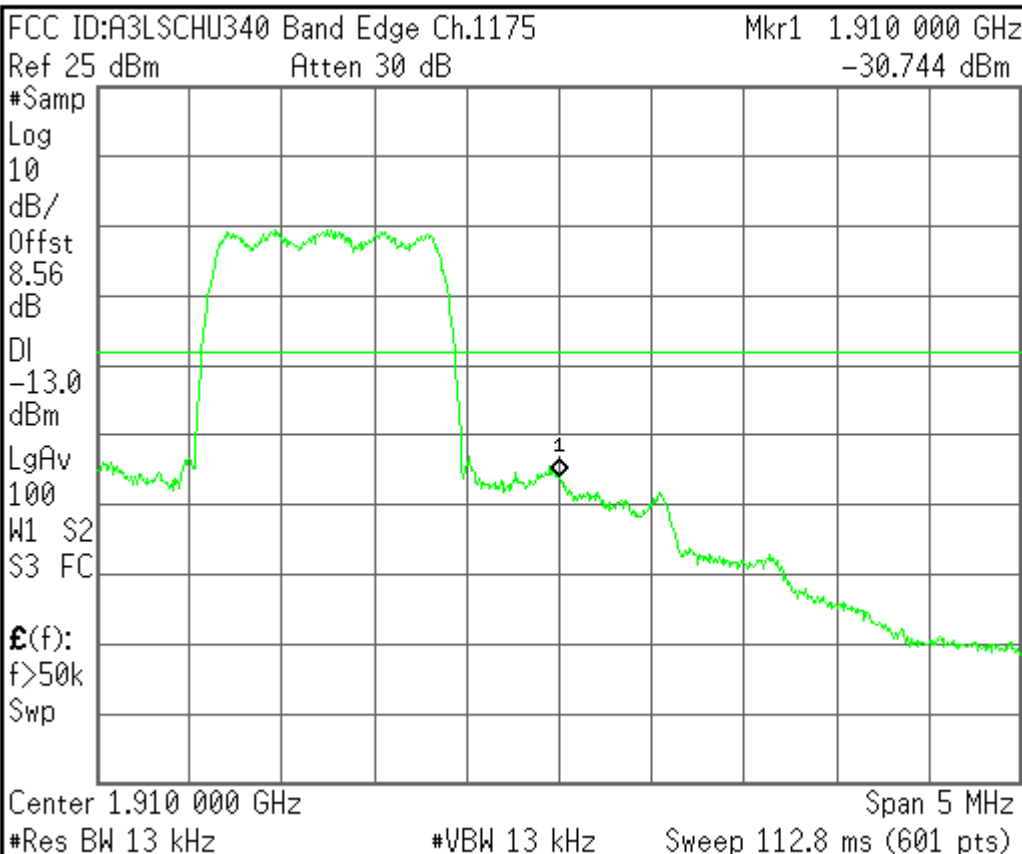

Freq/Channel

Center Freq
1.91000000 GHz

Start Freq
1.90750000 GHz


Stop Freq
1.91250000 GHz

CF Step
500.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2006 Agilent Technologies

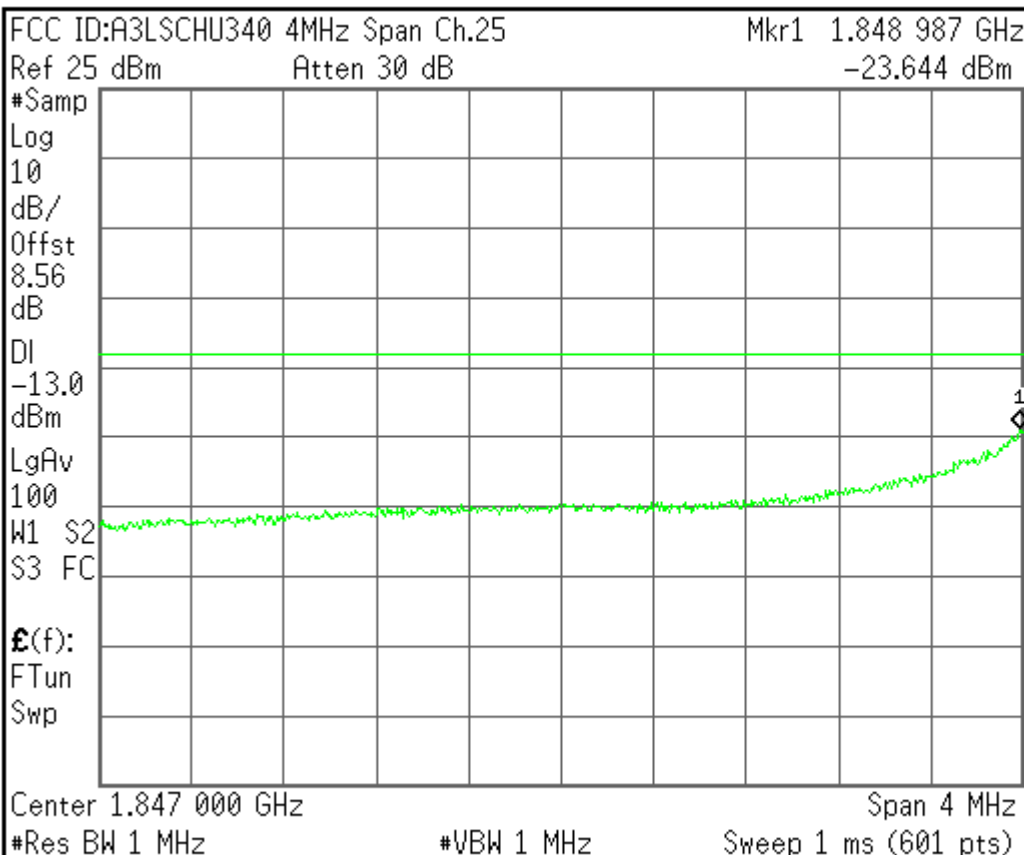

Center Freq
 1.84700000 GHz

Start Freq
 1.84500000 GHz


Stop Freq
 1.84900000 GHz

CF Step
 400.000000 kHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

Copyright 2000-2006 Agilent Technologies

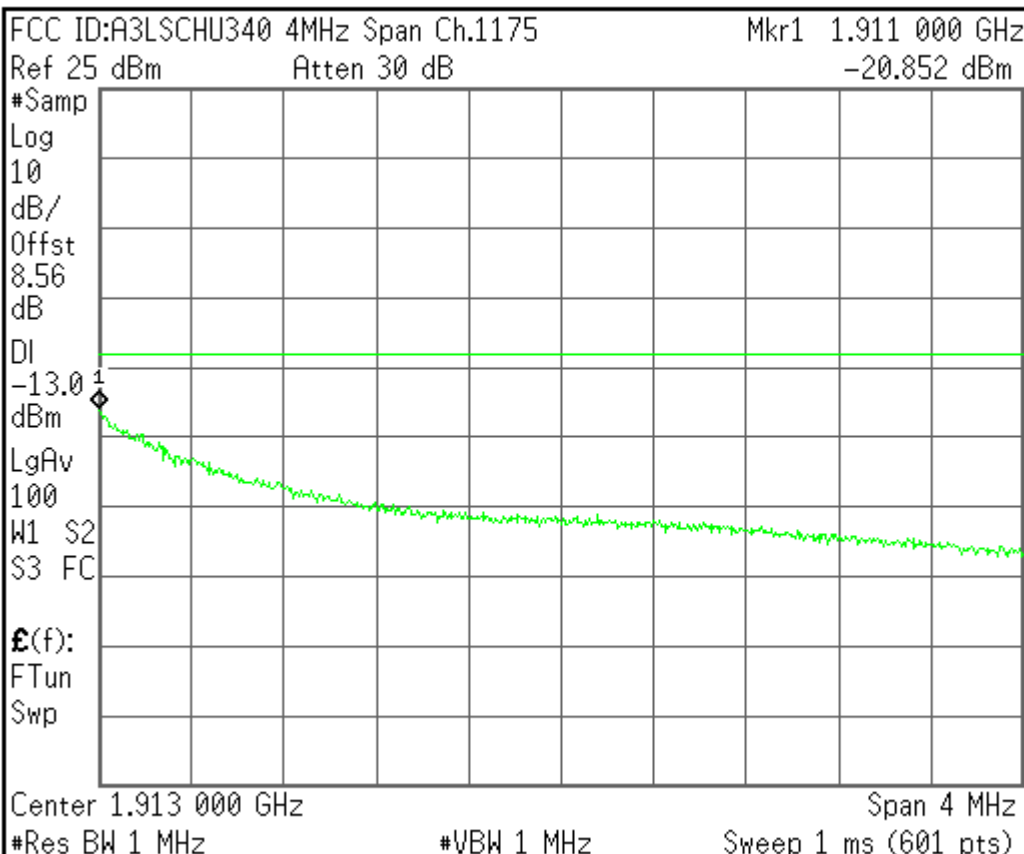

Center Freq
 1.91300000 GHz

Start Freq
 1.91100000 GHz

Stop Freq
 1.91500000 GHz

CF Step
 400.000000 kHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

Copyright 2000-2006 Agilent Technologies