

PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

http://www.pctestlab.com



MEASUREMENT REPORT FCC Part 15.407 UNII 802.11a/n/ac

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

12/27/2016-2/6/2017

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Test Report Serial No.:

1M1703080090-05.A3L

FCC ID:

A3LSCV35

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SCV35

EUT Type:

Portable Handset

FCC Classification:

Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s):

Part 15.407

Test Procedure(s):

KDB 789033 D02 v01r03, KDB 648474 D03 v01r04, KDB 662911 D01 v02r01

UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	ANT1		ANT2		MIMO	
			Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
1	20	5180 - 5240	30.832	14.89	33.037	15.19	63.727	18.04
2A		5260 - 5320	33.884	15.30	35.075	15.45	68.241	18.34
2C		5500 - 5720	32.659	15.14	34.198	15.34	66.078	18.20
3		5745 - 5825	33.963	15.31	35.075	15.45	68.318	18.35
1	40	5190 - 5230	34.041	15.32	29.174	14.65	62.825	17.98
2A		5270 - 5310	30.339	14.82	31.261	14.95	61.600	17.90
2C		5510 - 5710	35.156	15.46	31.189	14.94	65.988	18.19
3		5755 - 5795	30.832	14.89	32.359	15.10	62.698	17.97
1	80	5210	30.832	14.89	30.832	14.89	61.664	17.90
2A		5290	28.576	14.56	32.434	15.11	61.010	17.85
2C		5530 - 5690	34.198	15.34	30.339	14.82	64.537	18.10
3		5775	31.915	15.04	31.696	15.01	63.611	18.04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02 v01r03. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez
President



FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 1 of 260

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.3
/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.

TABLE OF CONTENTS

FCC PART 15.407 MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 Scope	4
1.2 PCTEST Test Location	4
2.0 PRODUCT INFORMATION	5
2.1 Equipment Description	5
2.2 Device Capabilities	5
2.3 Test Configuration	7
2.4 EMI Suppression Device(s)/Modifications	7
3.0 DESCRIPTION OF TESTS	8
3.1 Evaluation Procedure	8
3.2 AC Line Conducted Emissions	8
3.3 Radiated Emissions	9
3.4 Environmental Conditions	9
4.0 ANTENNA REQUIREMENTS	10
5.0 MEASUREMENT UNCERTAINTY	11
6.0 TEST EQUIPMENT CALIBRATION DATA	12
7.0 TEST RESULTS	13
7.1 Summary	13
7.2 26dB Bandwidth Measurement – 802.11a/n/ac	14
7.3 6dB Bandwidth Measurement – 802.11a/n/ac	47
7.4 UNII Output Power Measurement – 802.11a/n/ac	58
7.5 Maximum Power Spectral Density – 802.11a/n/ac	68
7.6 Frequency Stability	112
7.7 Radiated Spurious Emission Measurements – Above 1GHz	116
7.7.1 Antenna-1 Radiated Spurious Emission Measurements	120
7.7.2 Antenna-2 Radiated Spurious Emission Measurements	133
7.7.3 Simultaneous Tx Radiated Spurious Emissions Measurements	146
7.7.4 Antenna-1 Radiated Band Edge Measurements (20MHz BW)	158
7.7.5 Antenna-1 Radiated Band Edge Measurements (40MHz BW)	167
7.7.6 Antenna-1 Radiated Band Edge Measurements (80MHz BW)	176
7.7.7 Antenna-2 Radiated Band Edge Measurements (20MHz BW)	185
7.7.8 Antenna-2 Radiated Band Edge Measurements (40MHz BW)	194
7.7.9 Antenna-2 Radiated Band Edge Measurements (80MHz BW)	203
7.7.10 MIMO Radiated Band Edge Measurements (20MHz BW)	212
7.7.11 MIMO Radiated Band Edge Measurements (40MHz BW)	221
7.7.12 MIMO Radiated Band Edge Measurements (80MHz BW)	230
7.8 Radiated Spurious Emissions Measurements – Below 1GHz	239
7.9 Line-Conducted Test Data	244
8.0 CONCLUSION	250
Appendix A. 802.11a Dual Tx	251
A.1 Summary	251
A.2 Output Power Measurement	252
A.3 Power Spectral Density	253
A.4 Dual Tx Radiated Restricted Band Edge Measurements	253

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 2 of 260



MEASUREMENT REPORT

FCC Part 15.407



§ 2.1033 General Information

APPLICANT: Samsung Electronics Co., Ltd.

APPLICANT ADDRESS: 129, Samsung-ro,
Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA

FCC RULE PART(S): Part 15.407

BASE MODEL: SCV35

FCC ID: A3LSCV35

FCC CLASSIFICATION: Unlicensed National Information Infrastructure (UNII)

Test Device Serial No.: 08CCC, 052BC, 0910E, 2E952, 0910E ☐ Production ☒ Pre-Production ☐ Engineering

DATE(S) OF TEST: 12/27/2016-2/6/2017

TEST REPORT S/N: 1M1703080090-05.A3L

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 3 of 260

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2014 on January 22, 2015.

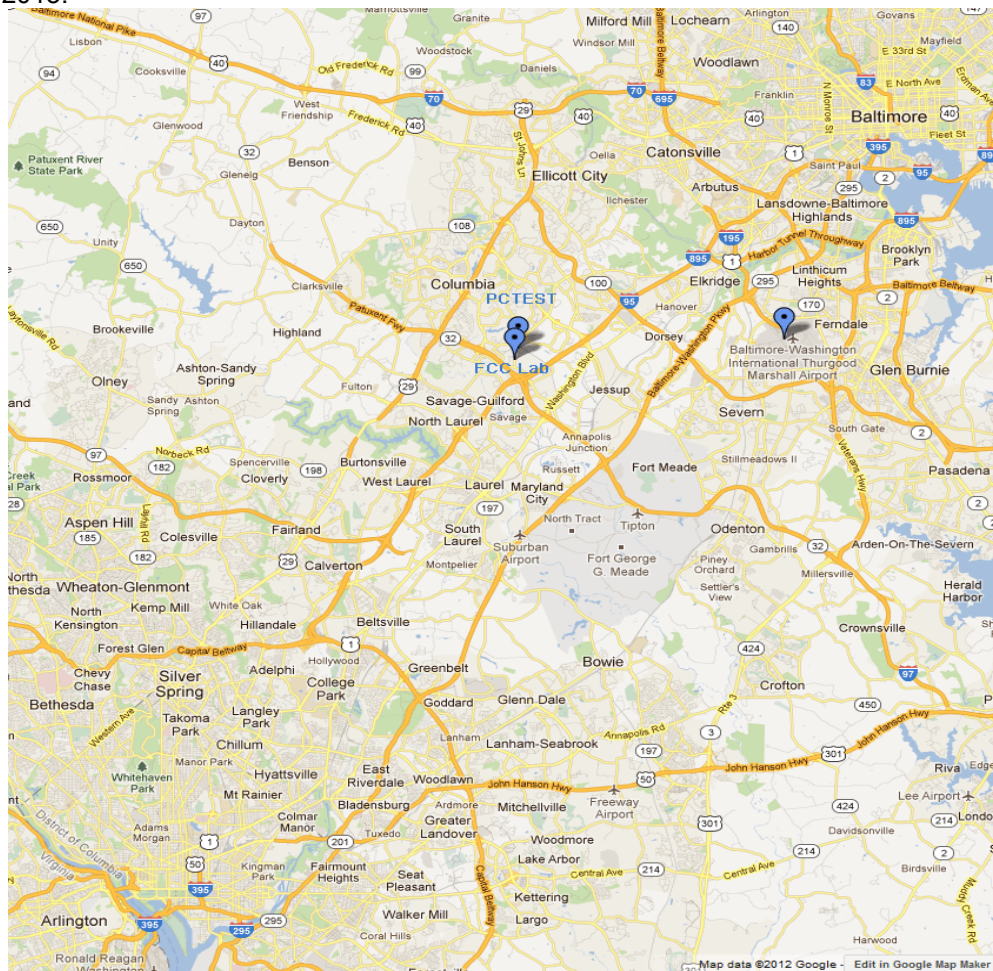


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 4 of 260

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.3
/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSCV35**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC, ANT+

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Table 2-1. 802.11a / 802.11n / 802.11ac (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	118	5590		
				:	:		
				142	5710	159	5795

Table 2-2. 802.11n / 802.11ac (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				:	:		
				138	5690		

Table 2-3. 802.11ac (80MHz BW) Frequency / Channel Operations

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 5 of 260

Notes:

- 5GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033 D02 v01r03. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		ANT1	ANT2	MIMO
5GHz	a	99.0	98.3	N/A
	n (HT20)	98.9	98.2	96.6
	n (HT40)	97.9	97.6	95.7
	ac (HT40)	97.9	97.7	95.9
	ac (HT80)	95.5	93.2	88.9

Table 2-4. Measured Duty Cycles

- The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
5GHz	11a	✓	✓	✗	✗	✓	✓
	11n (20MHz)	✓	✓	✓	✓	✓	✓
	11n (40MHz)	✓	✓	✓	✓	✓	✓
	11ac (80MHz)	✓	✓	✓	✓	✓	✓

Table 2-5. Frequency / Channel Operations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)

6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)

13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)

29.3/32.5, 58.5/65, 87.8/97.5, 117/130, 175.5/195, 234/260, 263.3/292.5, 292.5/325, 351/390, 390/433.3 (ac – 80MHz BW)

13/14.4, 26.28.9, 39/43.3, 52/57.8, 78/86.7, 104/115.6, 117/130, 130/144.4Mbps (MIMO n/ac – 20MHz)

156/173Mbps (MIMO ac – 20MHz)

27/30, 54/60, 81/90, 108/120, 162/180, 216/240, 243/270, 270/300Mbps (MIMO n/ac – 40MHz) 324/360,

360/400Mbps (MIMO ac – 40MHz)

58.5/65, 117/130, 175.5/195, 234/260, 351/390, 468/520, 526.5/585, 585/650, 702/780, 780/866.7Mbps (MIMO ac – 80MHz)

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset	Page 6 of 260	

3. This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in this test report.

Scenario A – Config-1: ANT1 transmitting in 2.4GHz mode and ANT2 in 5GHz mode

Description	2.4 GHz Tx	5 GHz Tx
Antenna	1	2
Channel	6	165
Operating Frequency(MHz)	2437	5825
Data Rate (Mbps)	1	MCS0
Mode	802.11b	802.11n

Table 2-6. Config-1 (ANT1 2.4GHz & ANT2 5GHz)

Scenario B – Config-2: ANT1 transmitting in 5GHz mode and ANT2 in 2.4GHz mode

Description	5 GHz Tx	2.4 GHz Tx
Antenna	1	2
Channel	153	1
Operating Frequency(MHz)	5765	2412
Data Rate (Mbps)	MCS0	1
Mode	802.11n	802.11b

Table 2-7. Config-2 (ANT1 5GHz & ANT2 2.4GHz)

Scenario C – Config-3: ANT1 transmitting in 2.4GHz + 5GHz mode and ANT2 in 2.4GHz + 5GHz mode

Description	2.4 + 5 GHz Tx	2.4 + 5 GHz Tx
Antenna	1, 2	1, 2
Channel	1 and 165	1 and 165
Operating Frequency(MHz)	2412 and 5825	2412 and 5825
Data Rate (Mbps)	6 and MCS0	6 and MCS0
Mode	802.11g/n/a/ac	802.11g/n/a/ac

Table 2-8. Config-3 (ANT1 2.4 + 5GHz & ANT2 2.4 + 5GHz)

2.3 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v01r03. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on a certified wireless charging pad (WCP) while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 7 of 260

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v01r03 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 8 of 260

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. A 72.4cm high PVC support structure is placed on top of the turntable. A 3" (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm. For measurements above 1GHz, a high density expanded polystyrene block is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 9 of 260

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 10 of 260

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 11 of 260

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2006.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	4/11/2016	Annual	4/11/2017	WL25-1
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/11/2016	Annual	7/11/2017	RE1
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	3/1/2016	Annual	3/1/2017	US42510244
Agilent	N9030A	PXA Signal Analyzer (26.5GHz)	7/20/2016	Annual	7/20/2017	MY49432391
Agilent	N9038A	MXE EMI Receiver	4/21/2016	Annual	4/21/2017	MY51210133
Anritsu	MA2411B	Pulse Power Sensor	10/14/2015	Biennial	10/14/2017	846215
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	7/30/2015	Biennial	7/30/2017	121034
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	7/6/2016	Annual	7/6/2017	441119
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	7/6/2016	Annual	7/6/2017	441119
Emco	3115	Horn Antenna (1-18GHz)	3/10/2016	Biennial	3/10/2018	9704-5182
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/23/2016	Biennial	8/23/2018	135427
EMCO	3160-10	Small Horn (26.5 - 40GHz)	8/23/2016	Biennial	8/23/2018	130993
Espec	ESX-2CA	Environmental Chamber	3/4/2016	Annual	3/4/2017	17620
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	4/26/2016	Annual	4/26/2017	251425001
Pasternack	NMLC-1	Line Conducted Emissions Cable (NM)	4/28/2015	Biennial	4/28/2017	NMLC-1
PCTEST	-	EMC Switch System	7/6/2016	Annual	7/6/2017	NM2
Rhode & Schwarz	TS-PR18	Pre-Amplifier	3/7/2016	Annual	3/7/2017	101622
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/15/2016	Annual	7/15/2017	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	7/27/2016	Annual	7/27/2017	103200
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/7/2016	Annual	3/7/2017	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/7/2016	Annual	3/7/2017	100040
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	3/7/2016	Annual	3/7/2017	100037
Solar Electronics	8012-50-R-24-BNC	Line Impedance Stabilization Network	7/30/2015	Biennial	7/30/2017	310233
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	3/14/2016	Biennial	3/14/2018	A051107
Sunol Sciences	DRH-118	Horn Antenna	7/1/2015	Biennial	7/1/2017	A060215

Table 6-1. Annual Test Equipment Calibration Schedule

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 12 of 260

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSCV35
 Method/System: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.407(e)	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
15.407 (a.1.iv), (a.2), (a.3)	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a)		PASS	Section 7.4
15.407 (a.1.iv), (a.2), (a.3)	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a)		PASS	Section 7.5
15.407(g)	Frequency Stability	N/A		PASS	Section 7.6
15.407(h)	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b.1), (2), (3), (4)	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b)	RADIATED	PASS	Section 7.7
15.205, 15.407(b.1), (4), (5), (6)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 7.7, 7.8
15.407	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 7.9

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation," Version 4.4.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.1.5.

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset	Page 13 of 260	

7.2 26dB Bandwidth Measurement – 802.11a/n/ac

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r03, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

KDB 789033 D02 v01r03 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.


FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 14 of 260

Antenna-1 26 dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	22.40
	5200	40	a	6	21.63
	5240	48	a	6	22.70
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	21.61
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	23.36
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	23.98
	5190	38	n (40MHz)	13.5/15 (MCS0)	43.80
	5230	46	n (40MHz)	13.5/15 (MCS0)	44.60
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	81.62
Band 2A	5260	52	a	6	23.11
	5280	56	a	6	23.04
	5320	64	a	6	22.94
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	24.88
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	22.65
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	24.46
	5270	54	n (40MHz)	13.5/15 (MCS0)	46.62
	5310	62	n (40MHz)	13.5/15 (MCS0)	48.96
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	86.33
Band 2C	5500	100	a	6	23.80
	5600	120	a	6	24.71
	5720	144	a	6	24.95
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	22.24
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	24.35
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	24.41
	5510	102	n (40MHz)	13.5/15 (MCS0)	46.22
	5590	118	n (40MHz)	13.5/15 (MCS0)	49.01
	5710	142	n (40MHz)	13.5/15 (MCS0)	47.01
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	91.10
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	93.26
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	88.97

Table 7-2. Conducted Bandwidth Measurements

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 15 of 260

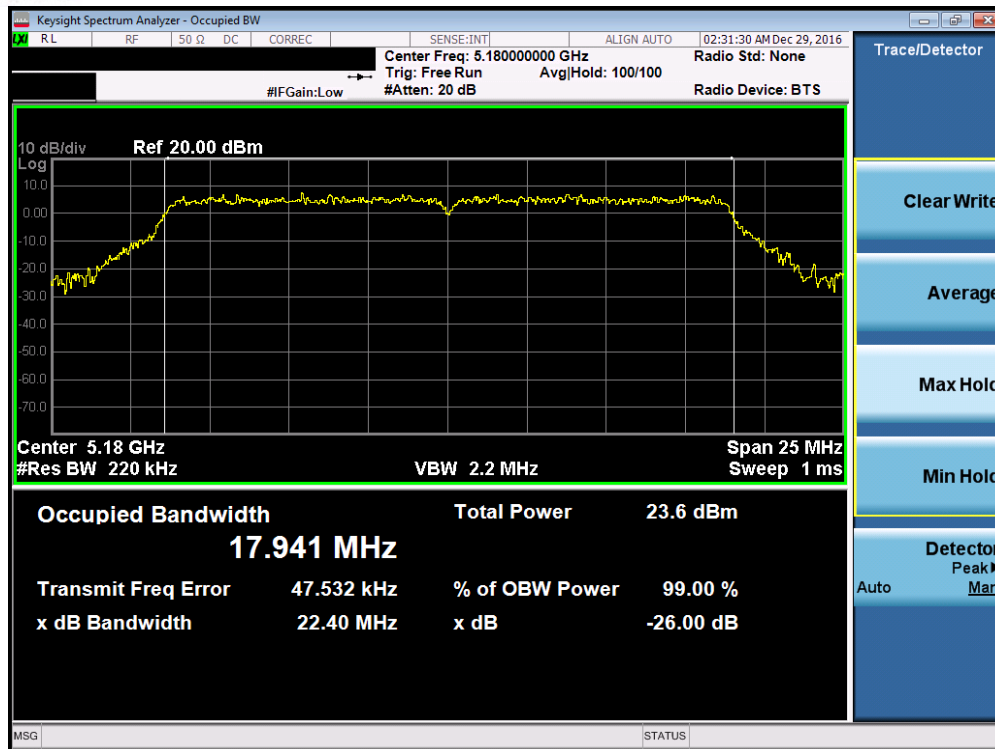


Plot 7-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

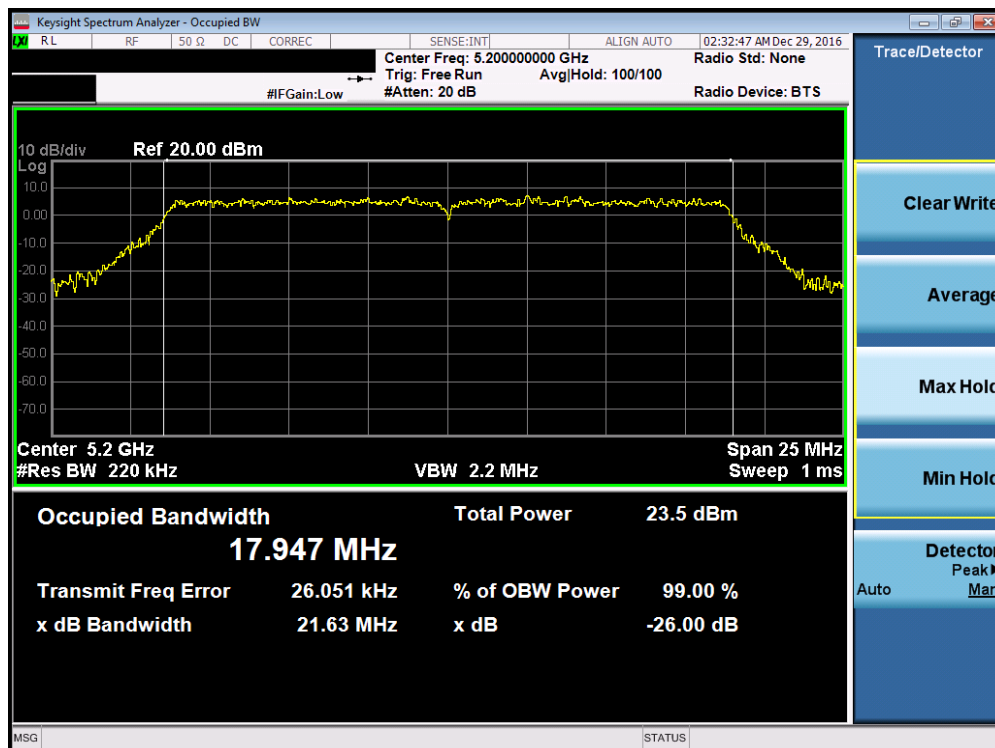


Plot 7-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 16 of 260

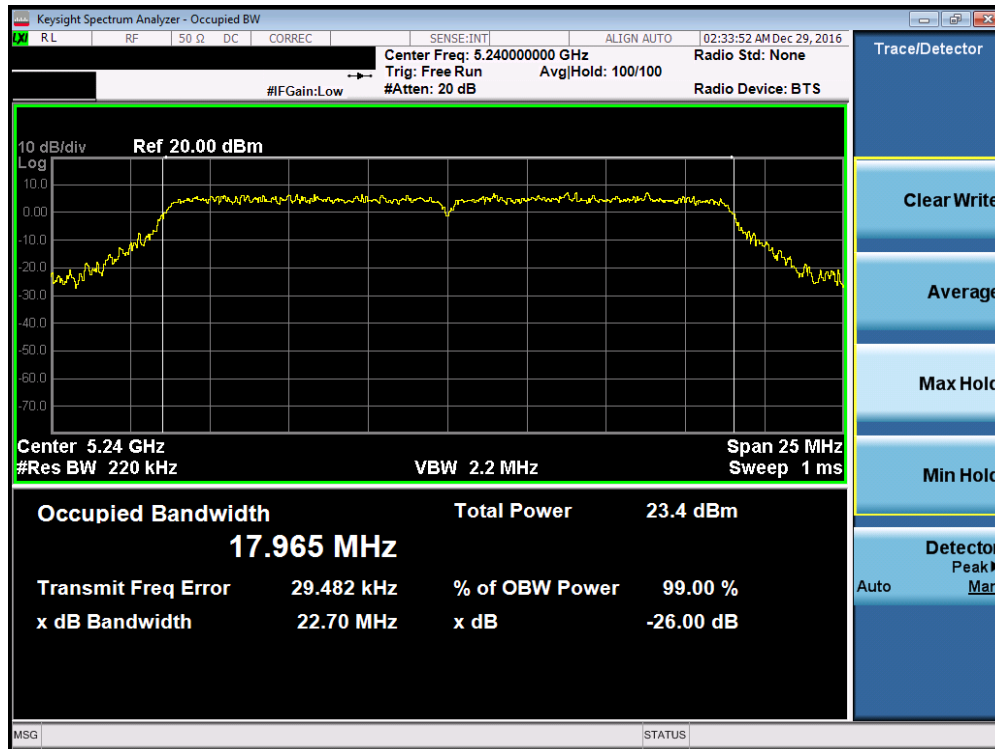


Plot 7-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

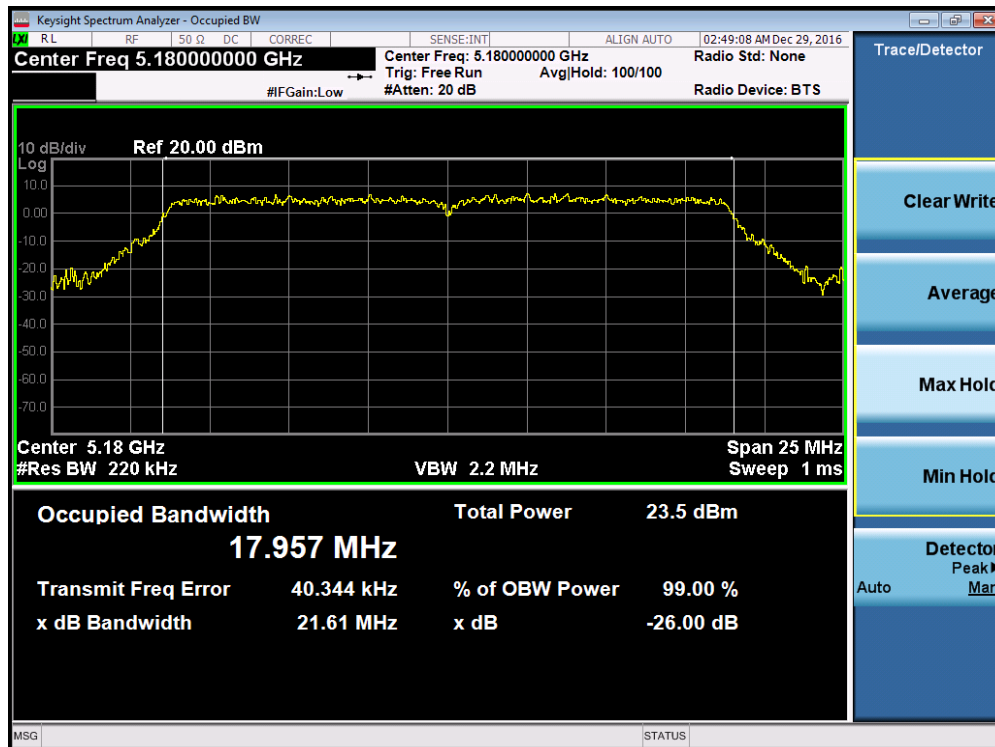


Plot 7-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 17 of 260

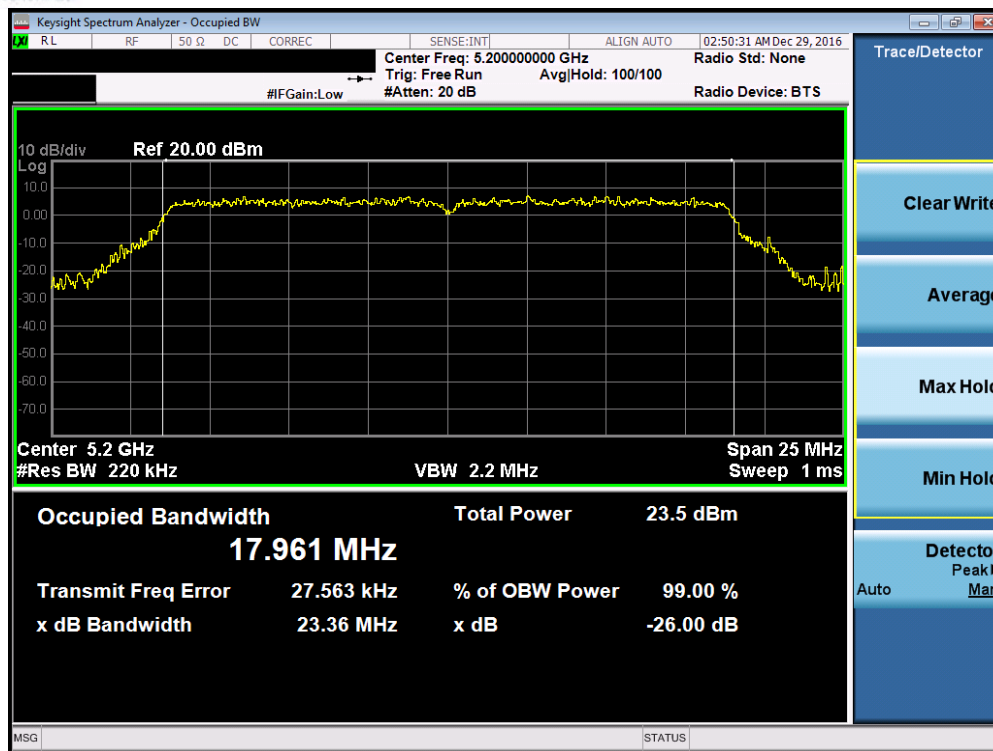


Plot 7-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

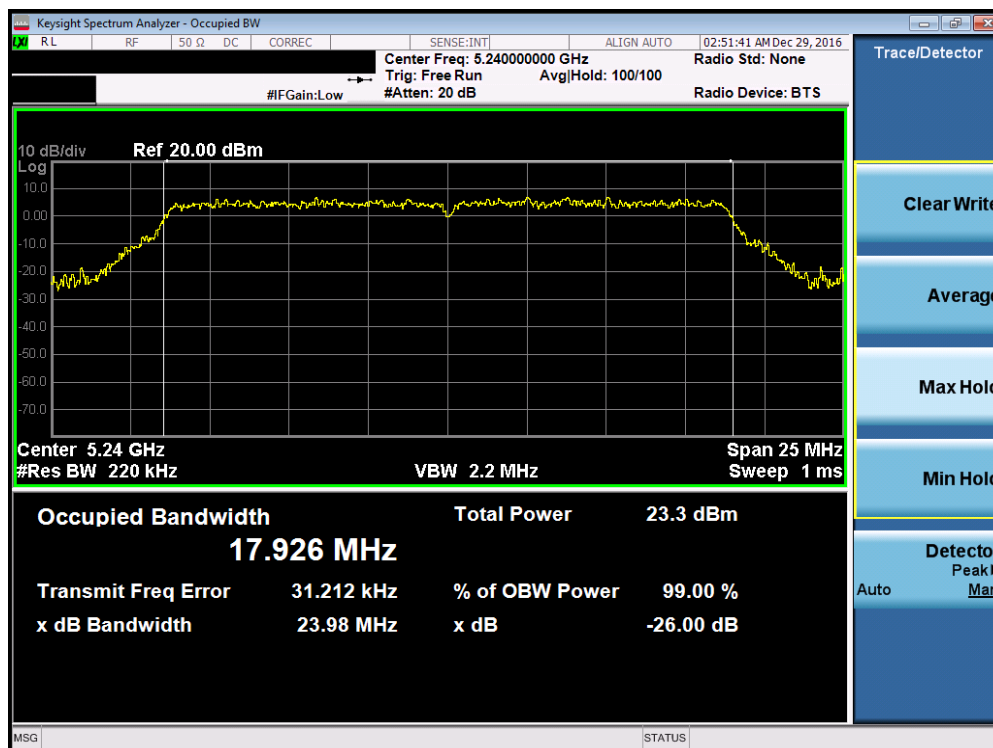


Plot 7-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 18 of 260

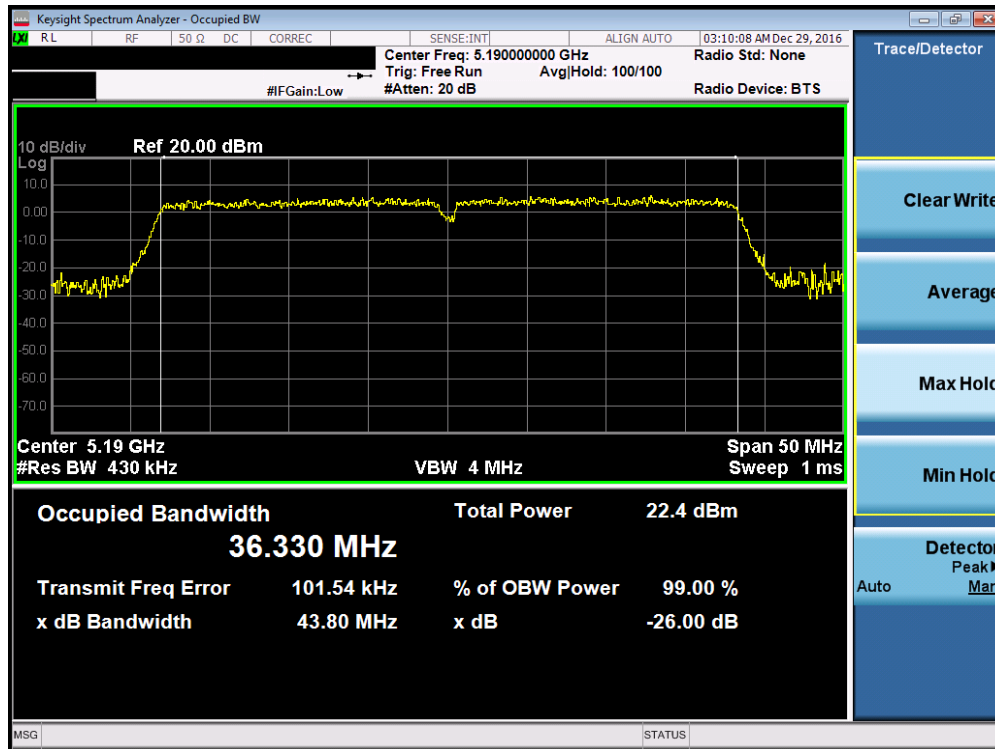


Plot 7-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

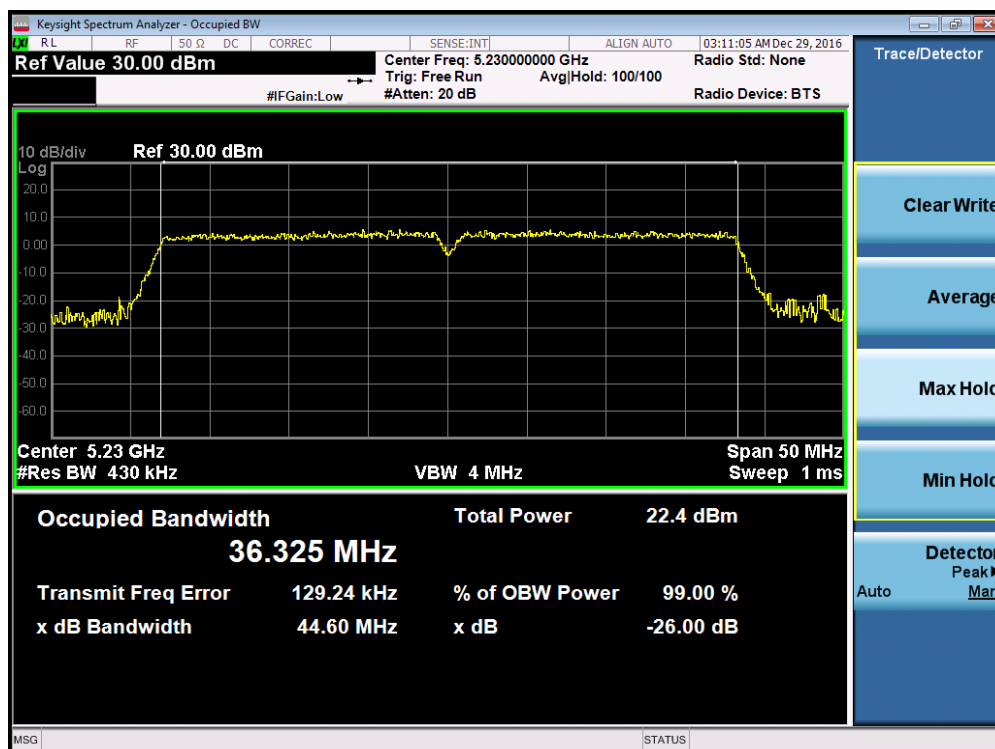


Plot 7-8. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 19 of 260

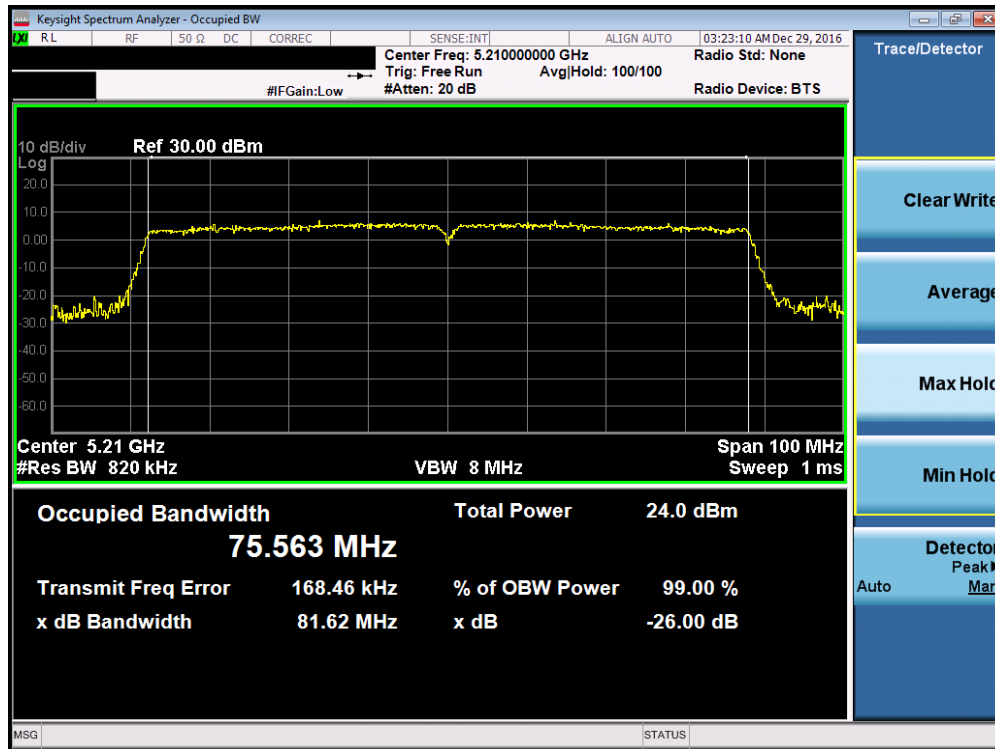


Plot 7-9. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

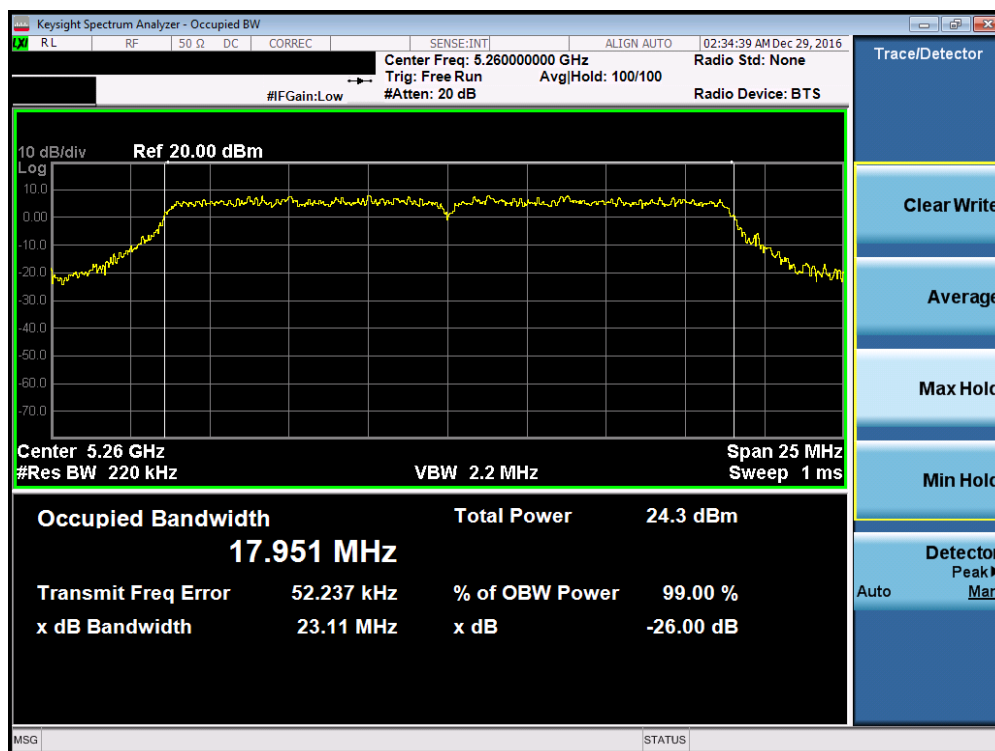


Plot 7-10. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 20 of 260

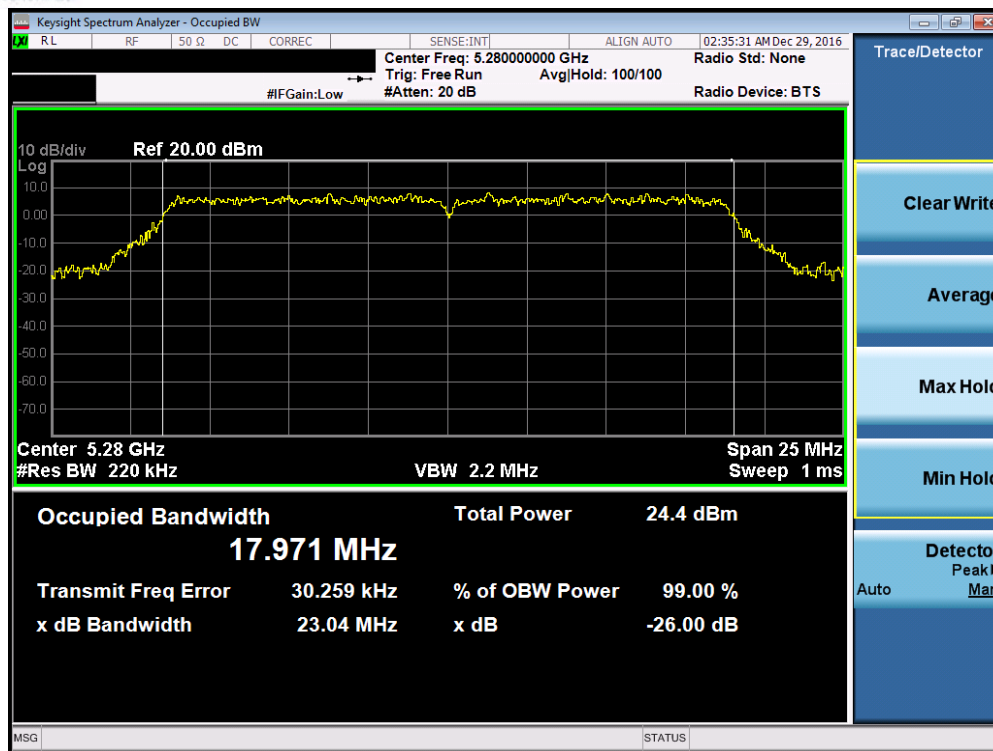


Plot 7-11. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

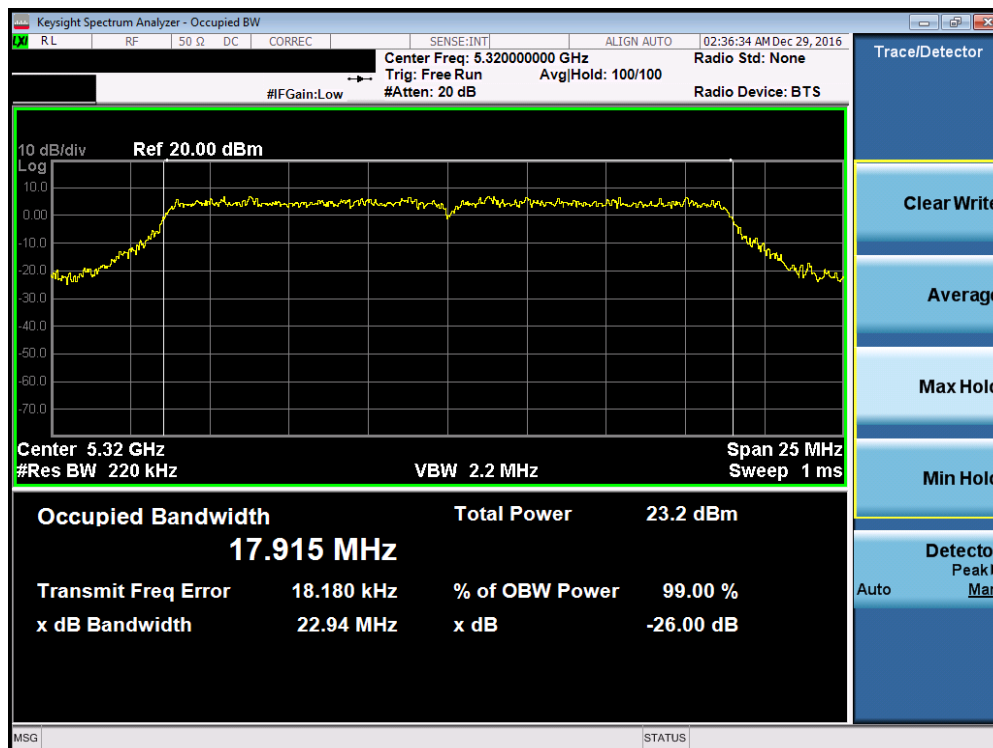


Plot 7-12. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 21 of 260

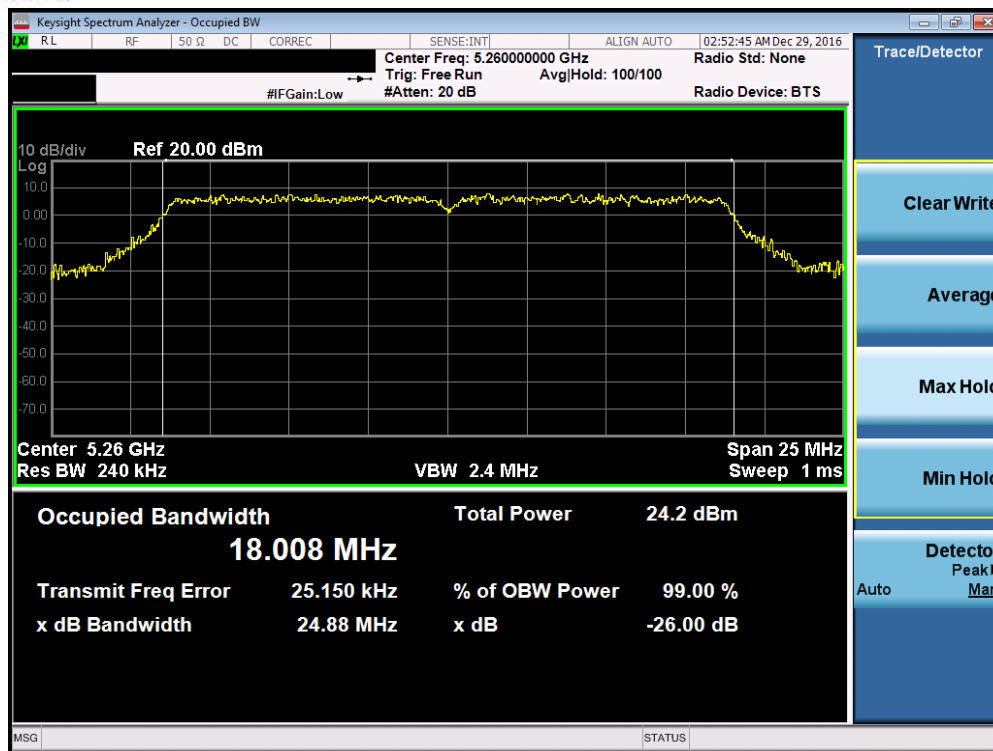


Plot 7-13. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

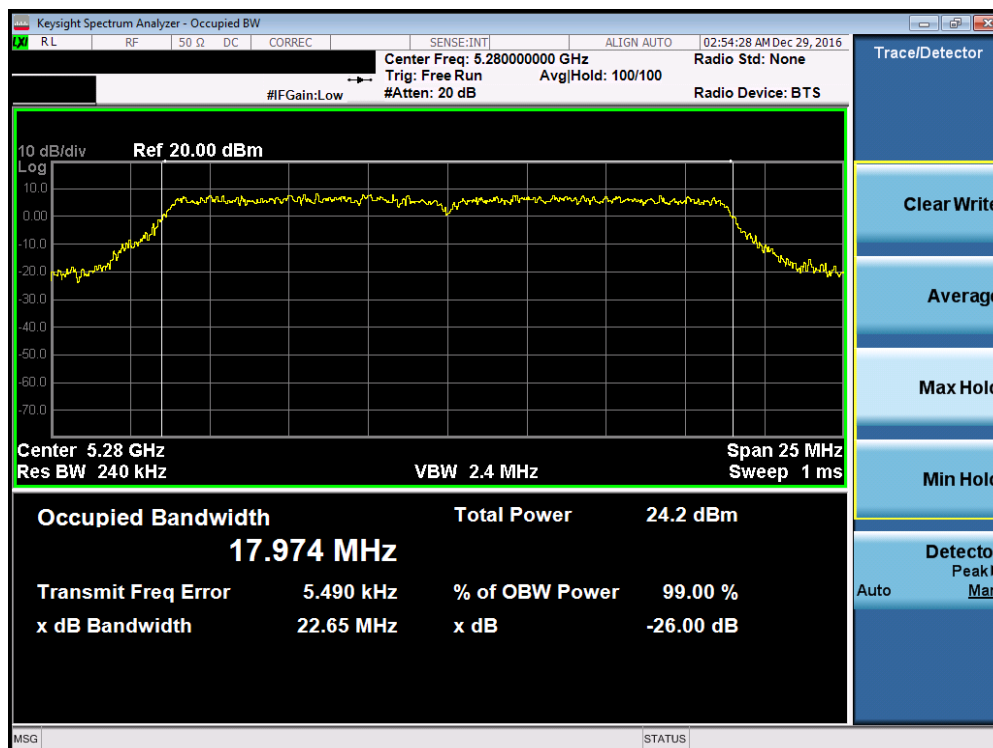


Plot 7-14. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 22 of 260

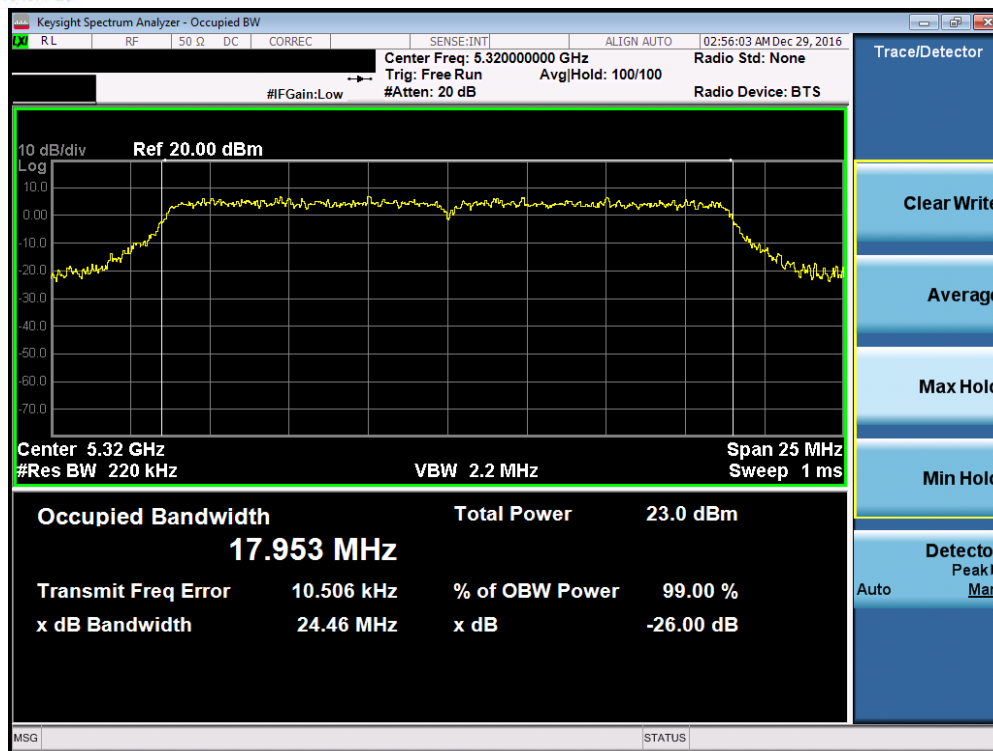


Plot 7-15. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

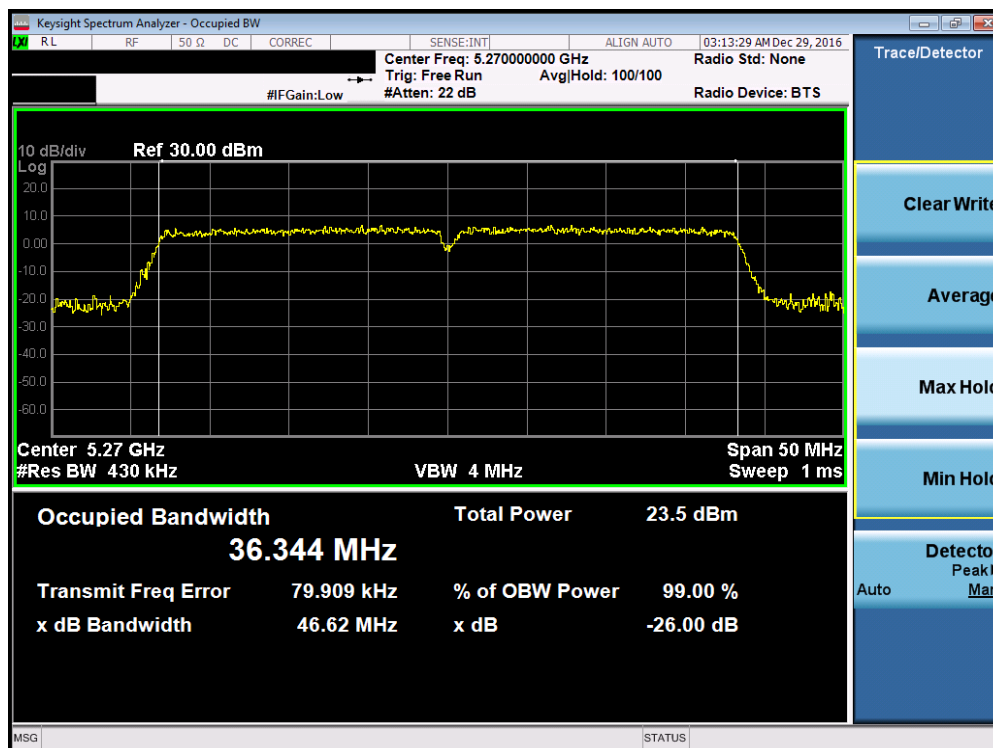


Plot 7-16. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 23 of 260

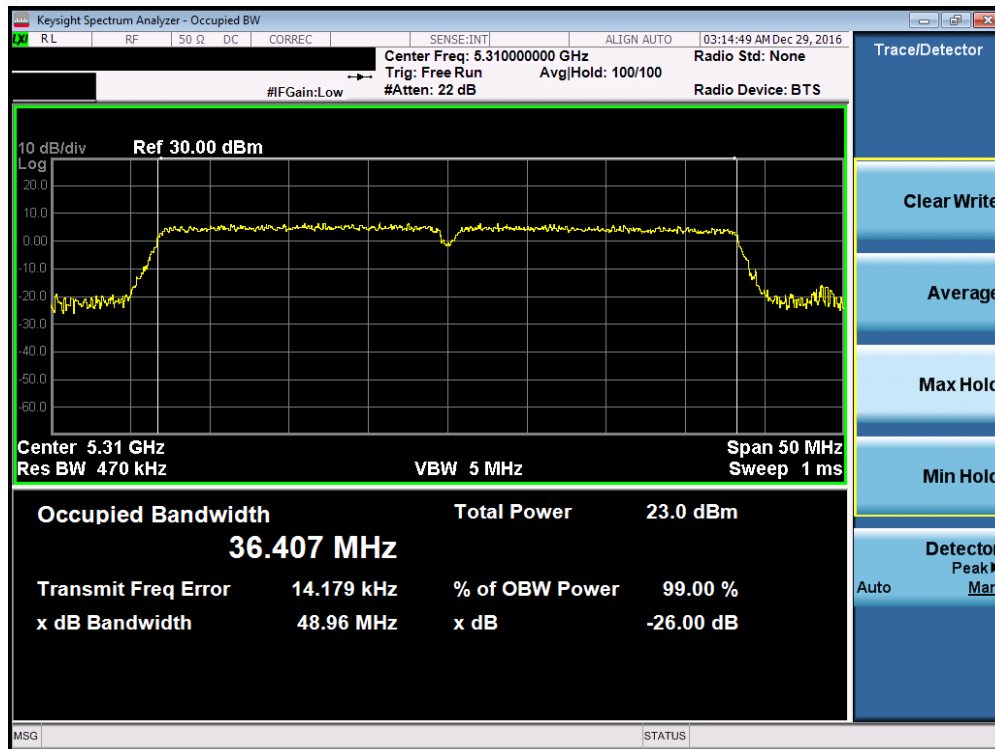


Plot 7-17. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

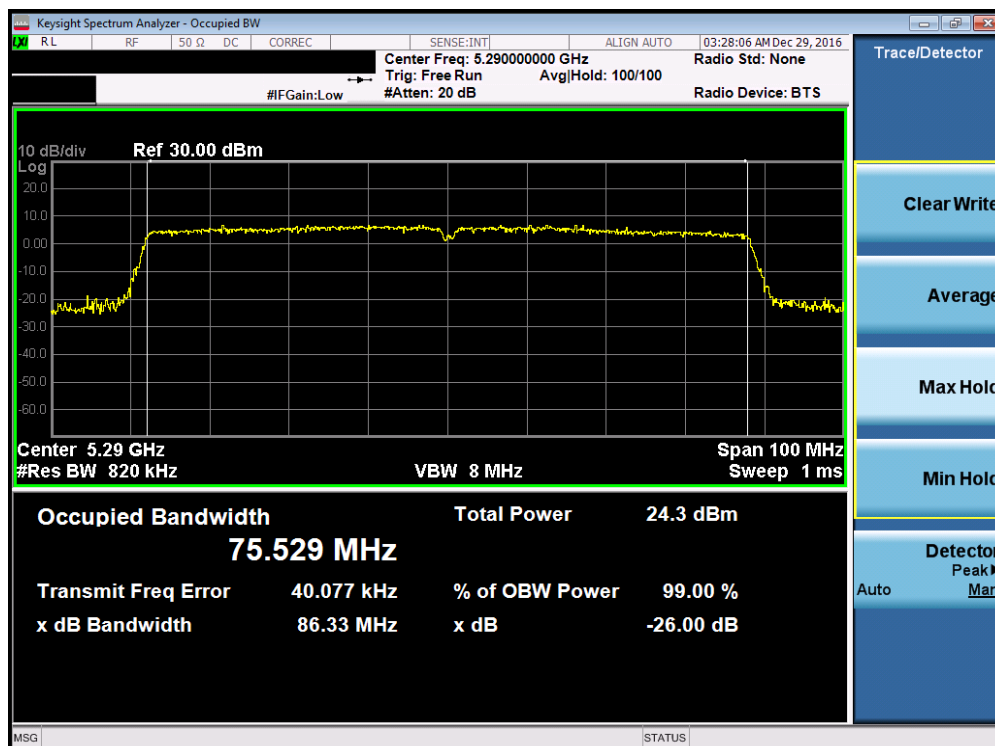


Plot 7-18. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 24 of 260

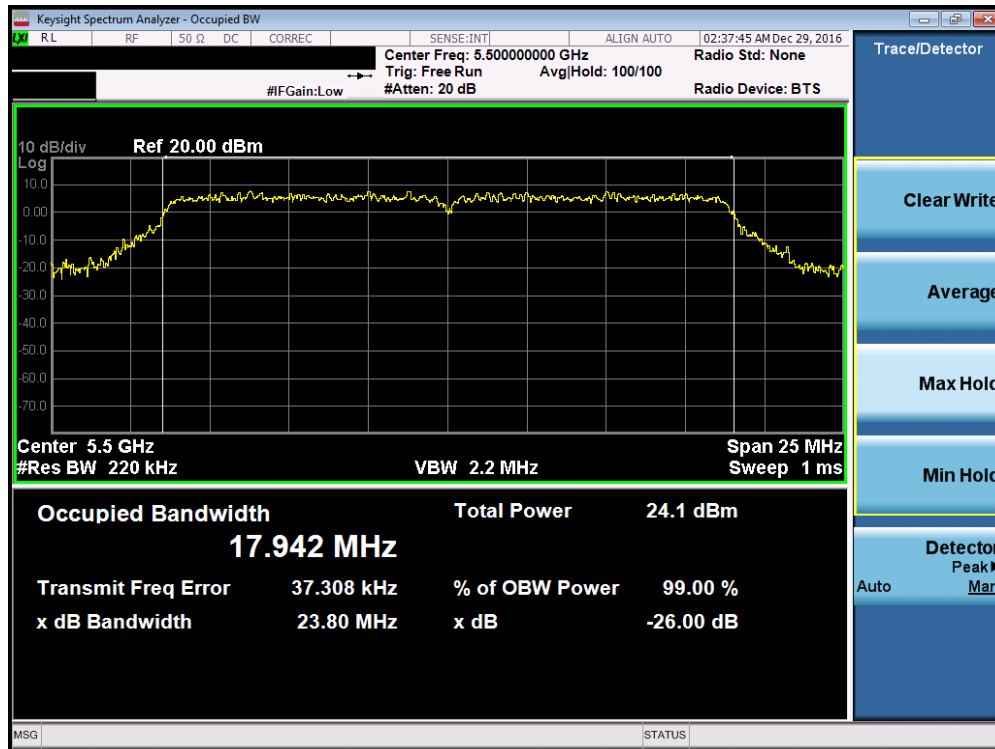


Plot 7-19. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

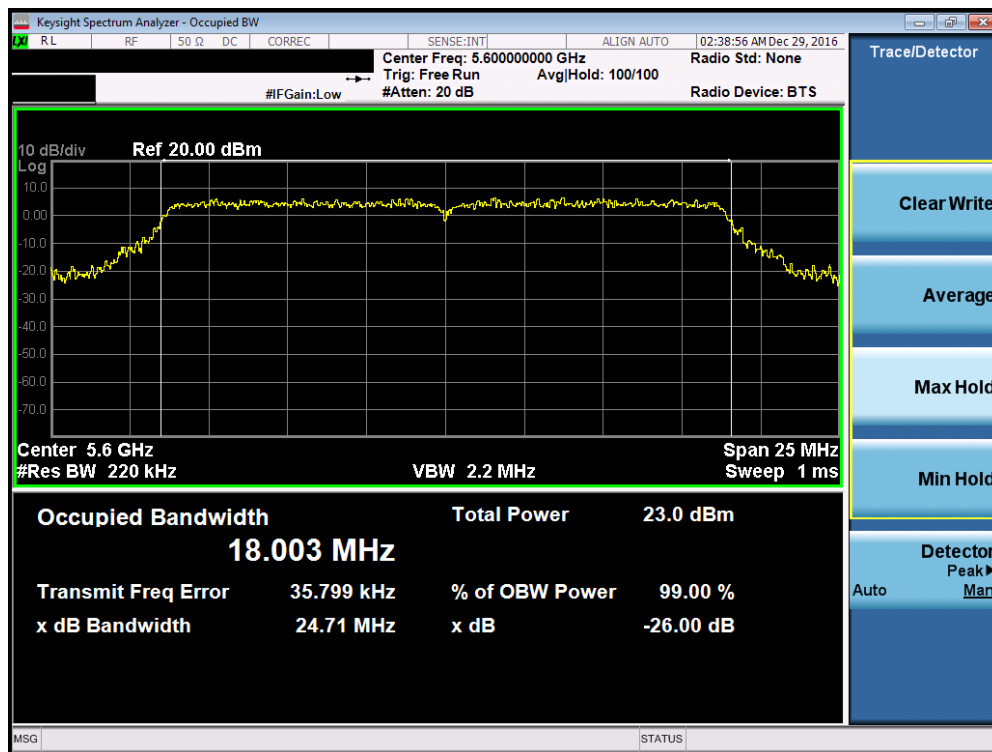


Plot 7-20. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 120)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 25 of 260

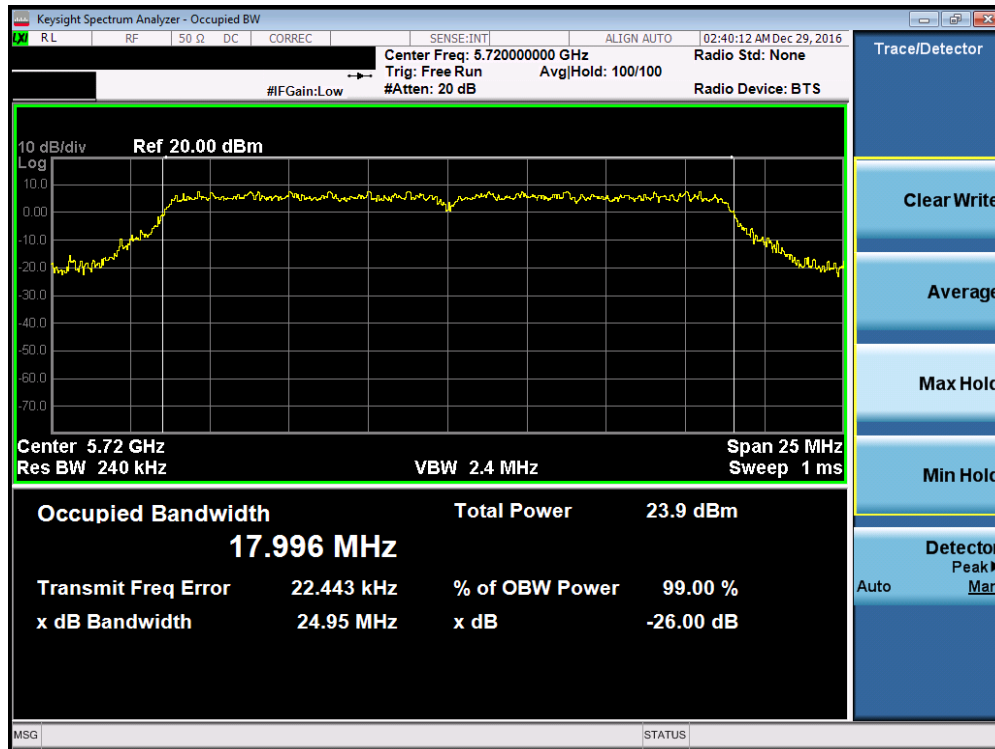


Plot 7-21. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 144)

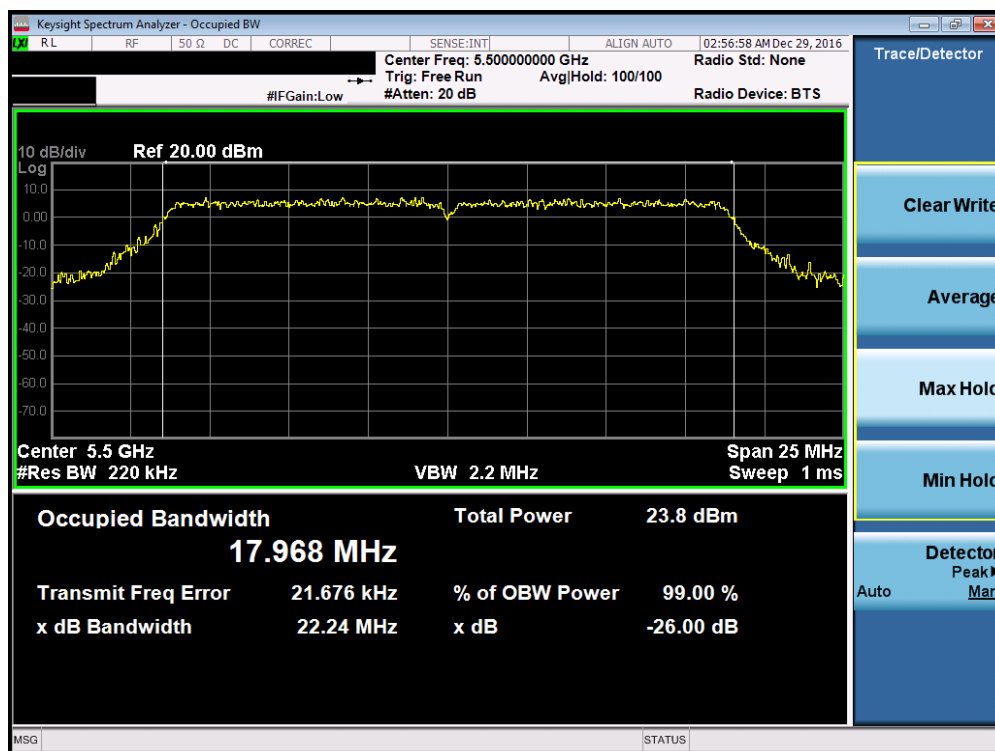


Plot 7-22. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 26 of 260

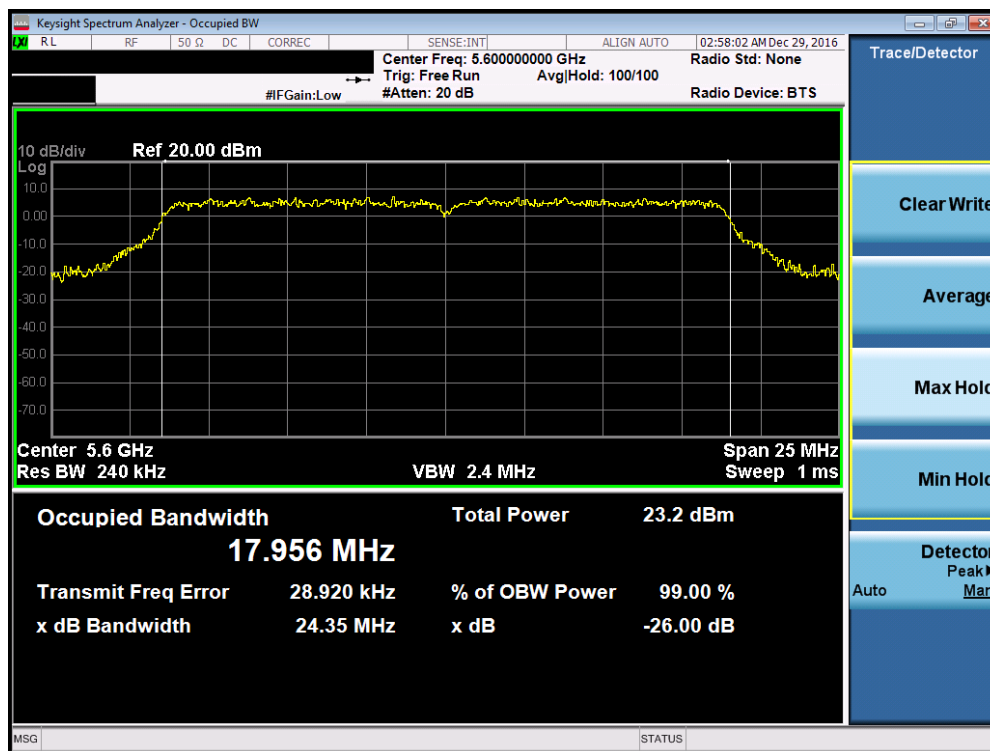


Plot 7-23. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

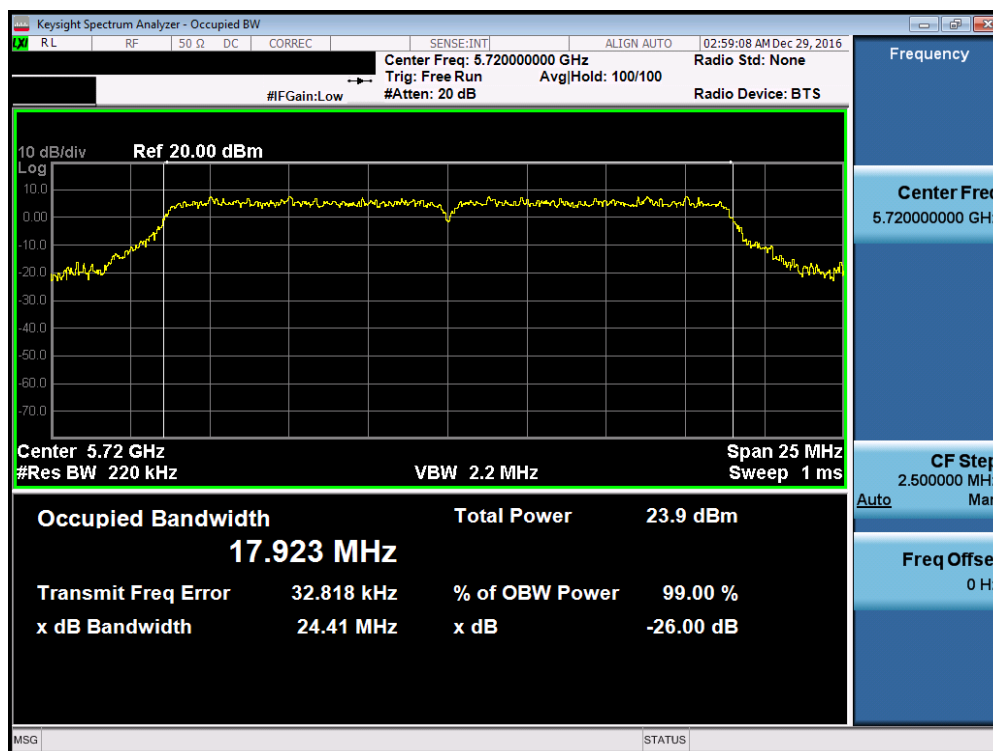


Plot 7-24. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 27 of 260

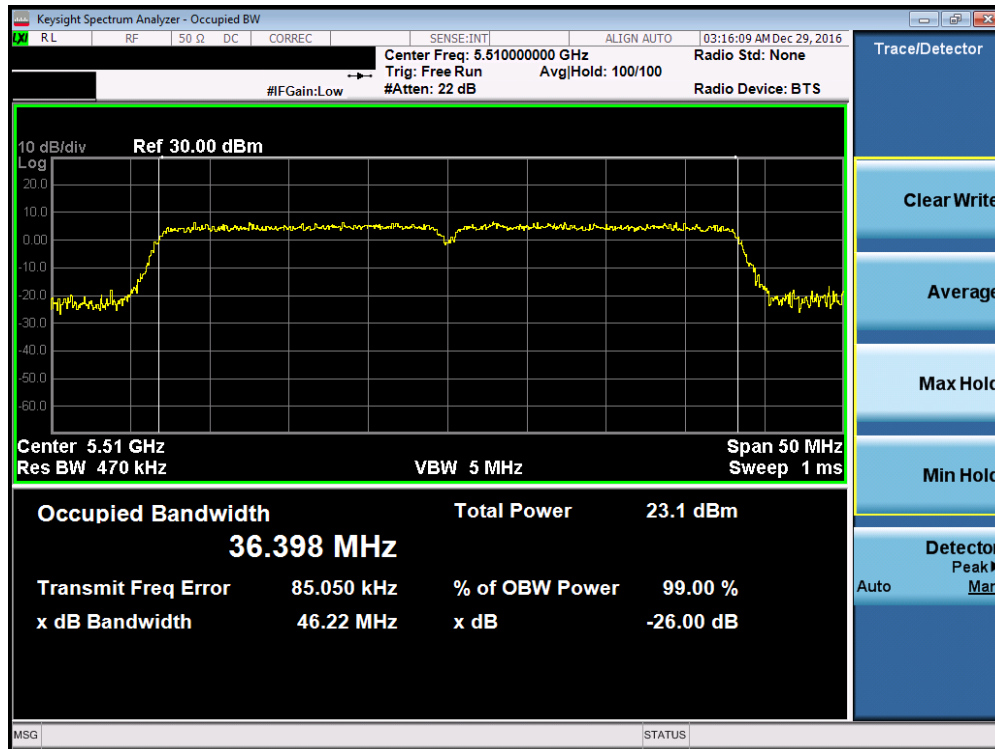


Plot 7-25. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

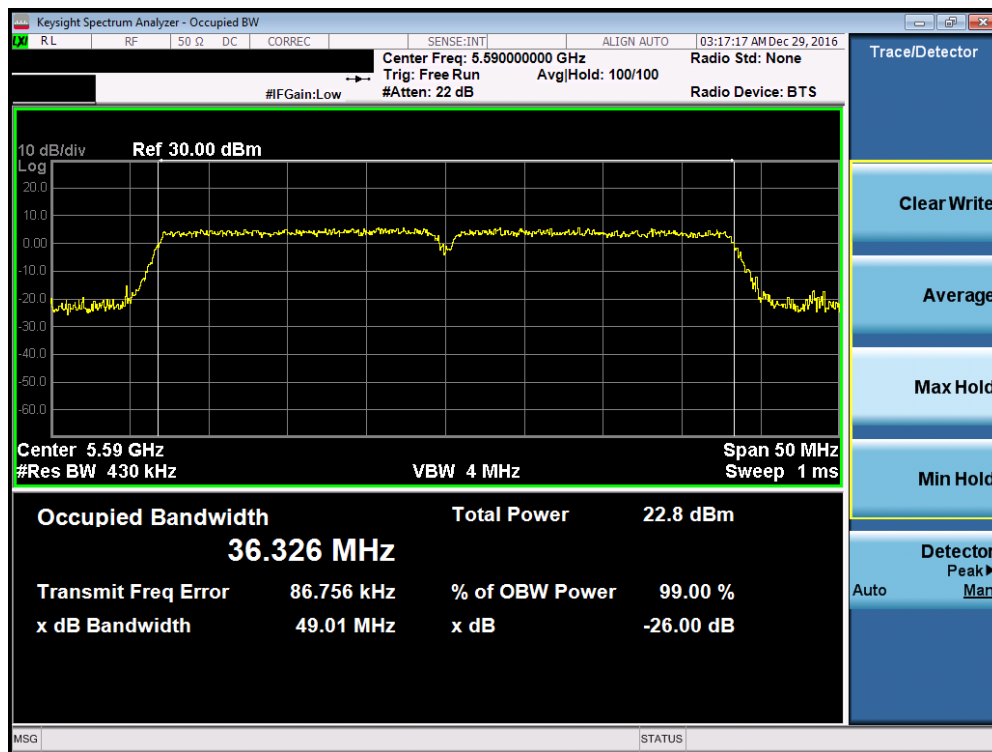


Plot 7-26. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 28 of 260

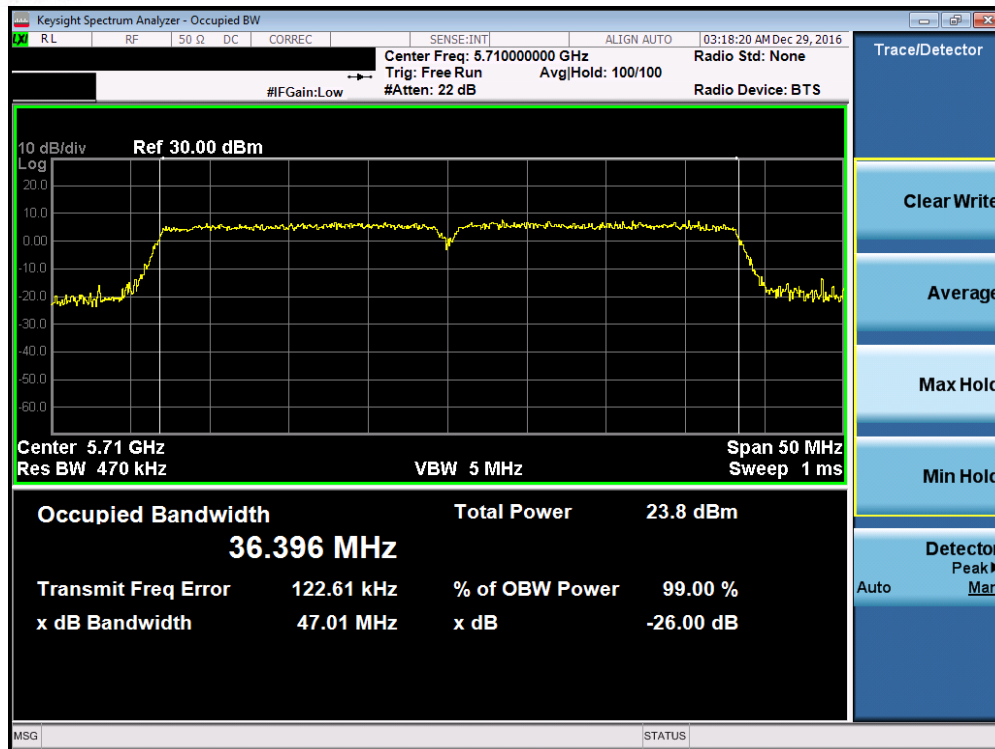


Plot 7-27. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

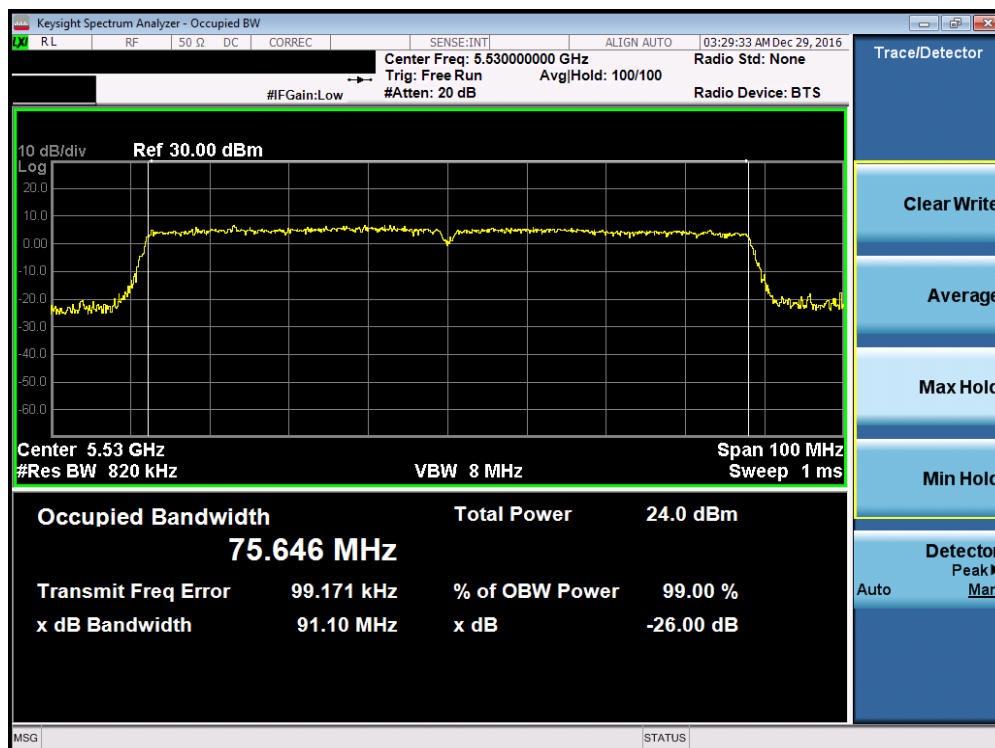


Plot 7-28. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 29 of 260

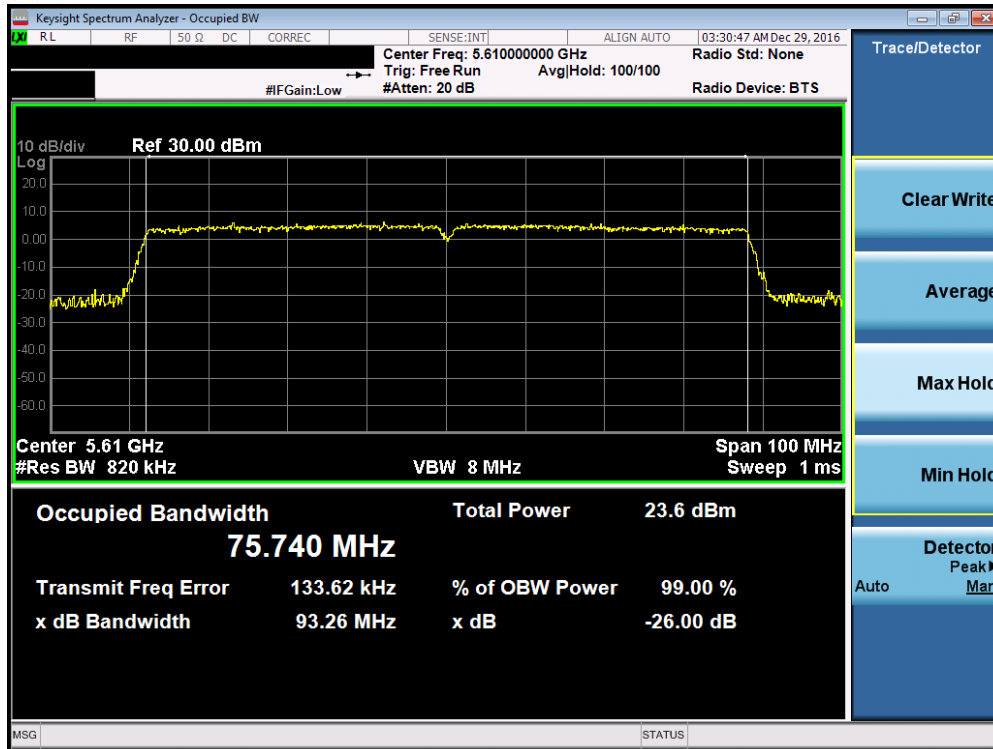

Plot 7-29. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

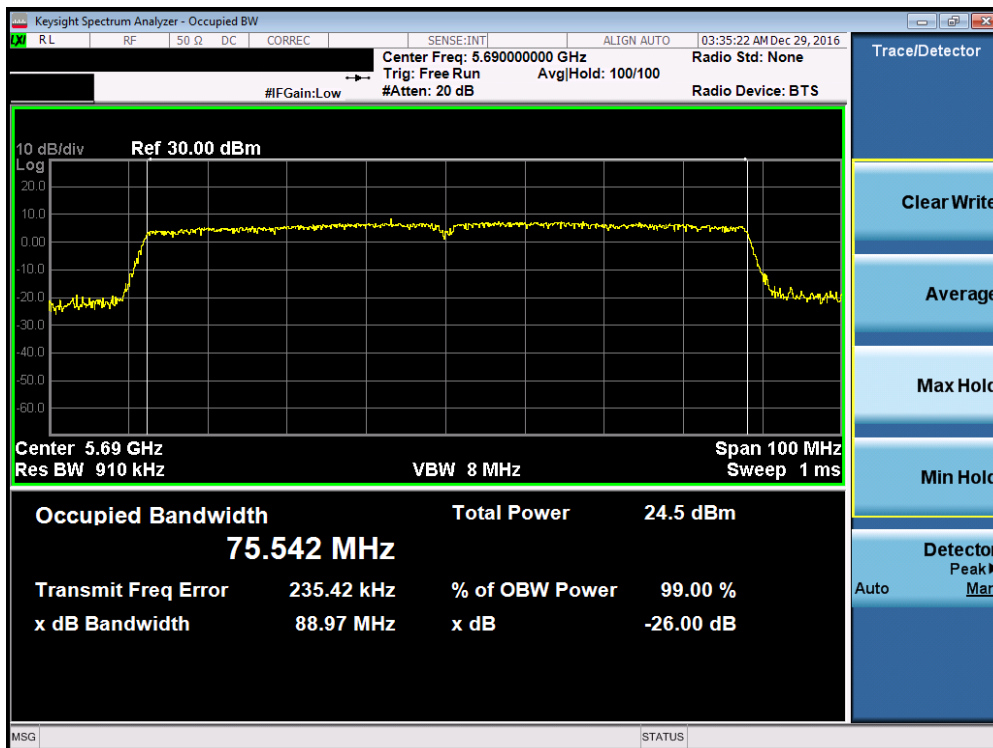

Plot 7-30. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)


FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 30 of 260

Antenna-2 26dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	21.29
	5200	40	a	6	21.28
	5240	48	a	6	21.16
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	21.48
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	21.44
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	21.42
	5190	38	n (40MHz)	13.5/15 (MCS0)	39.78
	5230	46	n (40MHz)	13.5/15 (MCS0)	39.56
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	80.19
Band 2A	5260	52	a	6	21.27
	5280	56	a	6	21.29
	5320	64	a	6	21.38
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	21.69
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	21.45
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	21.58
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.80
	5310	62	n (40MHz)	13.5/15 (MCS0)	39.70
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	81.33
Band 2C	5500	100	a	6	21.25
	5600	120	a	6	21.32
	5720	144	a	6	21.35
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	21.79
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	21.54
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	21.43
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.72
	5590	118	n (40MHz)	13.5/15 (MCS0)	39.64
	5710	142	n (40MHz)	13.5/15 (MCS0)	39.70
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	80.79
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	81.64
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	81.29

Table 7-3. Conducted Bandwidth Measurements

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 31 of 260

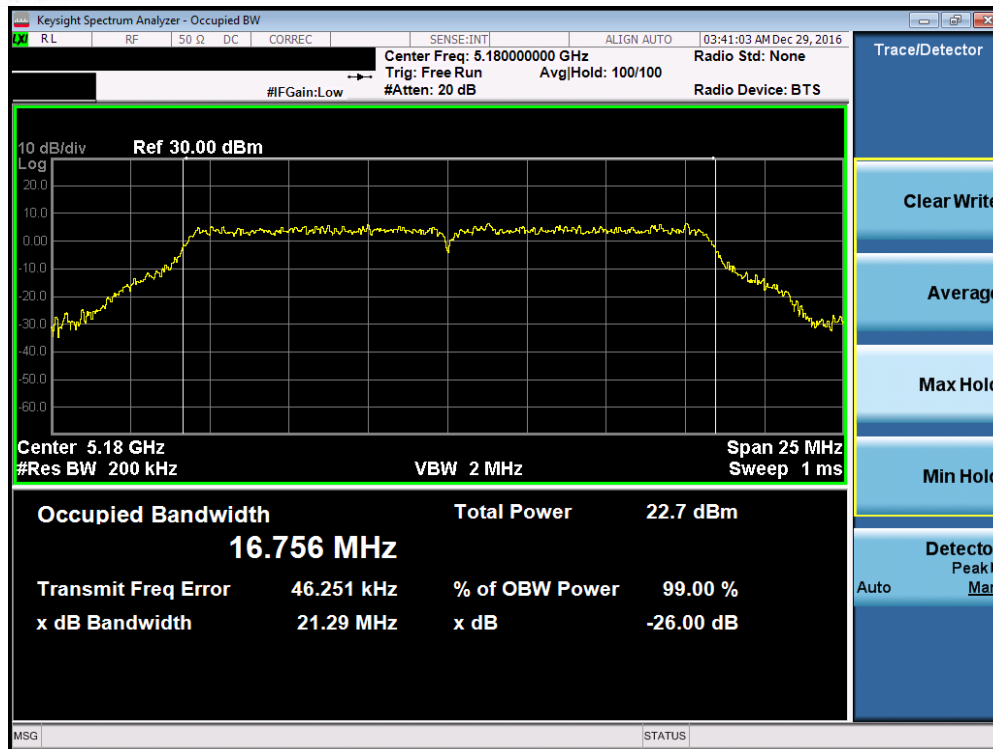


Plot 7-31. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

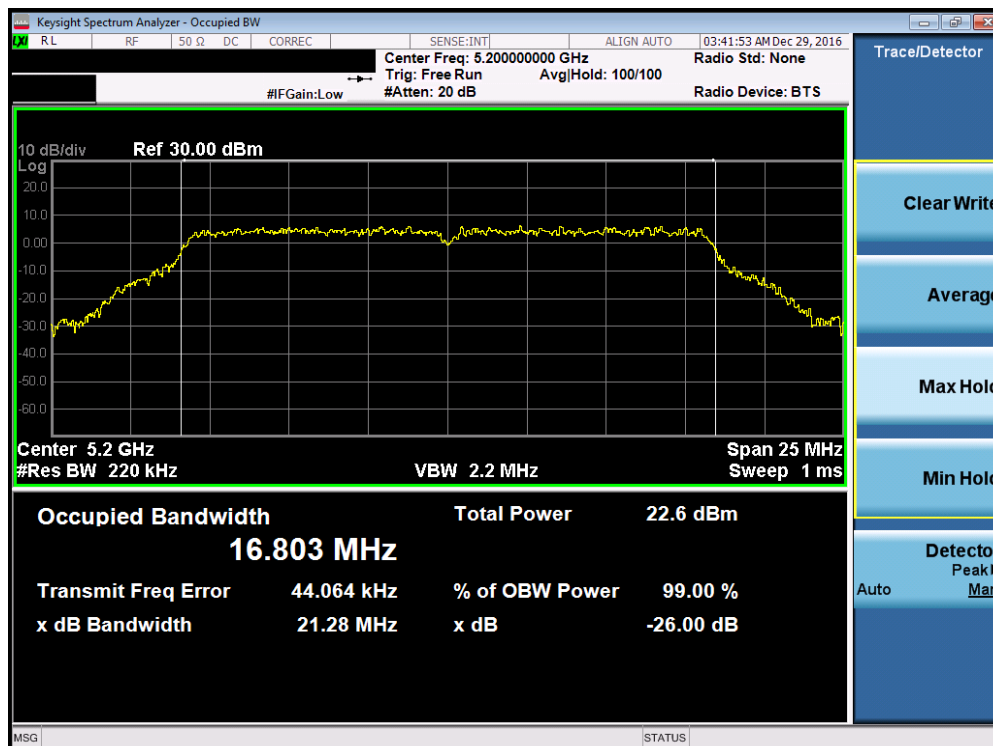


Plot 7-32. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 32 of 260

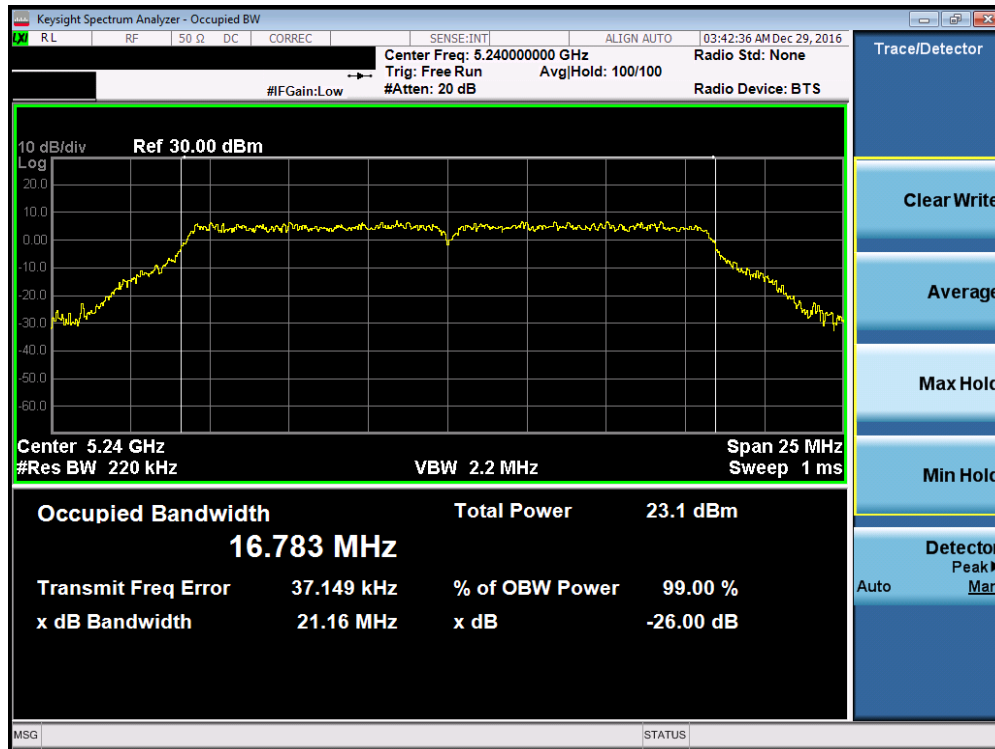


Plot 7-33. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

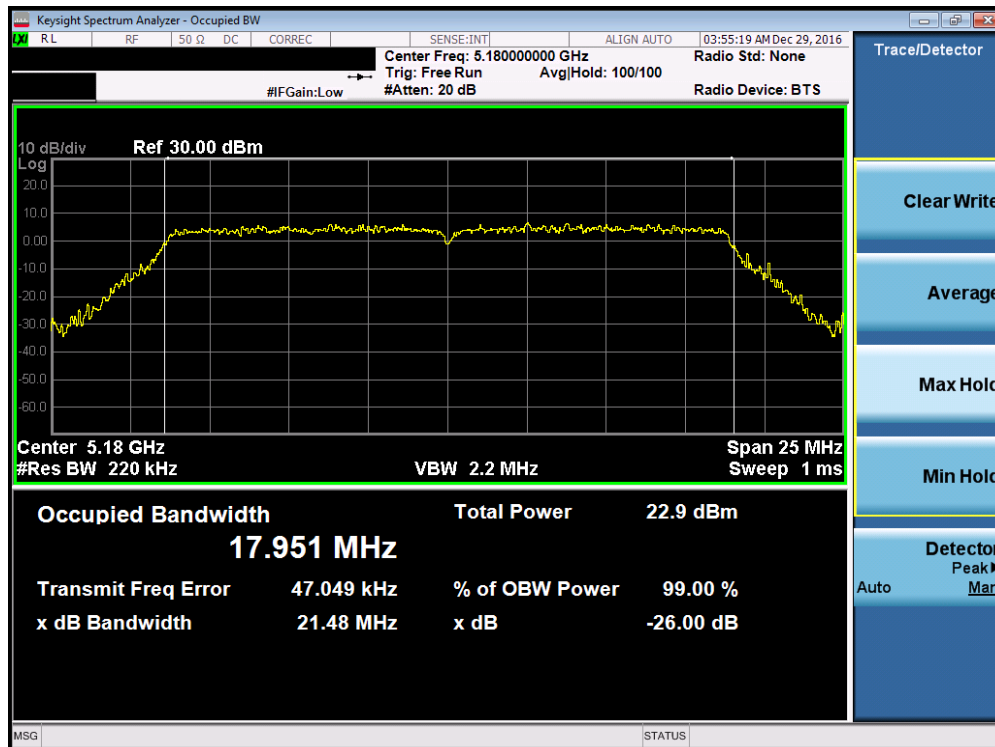


Plot 7-34. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 33 of 260

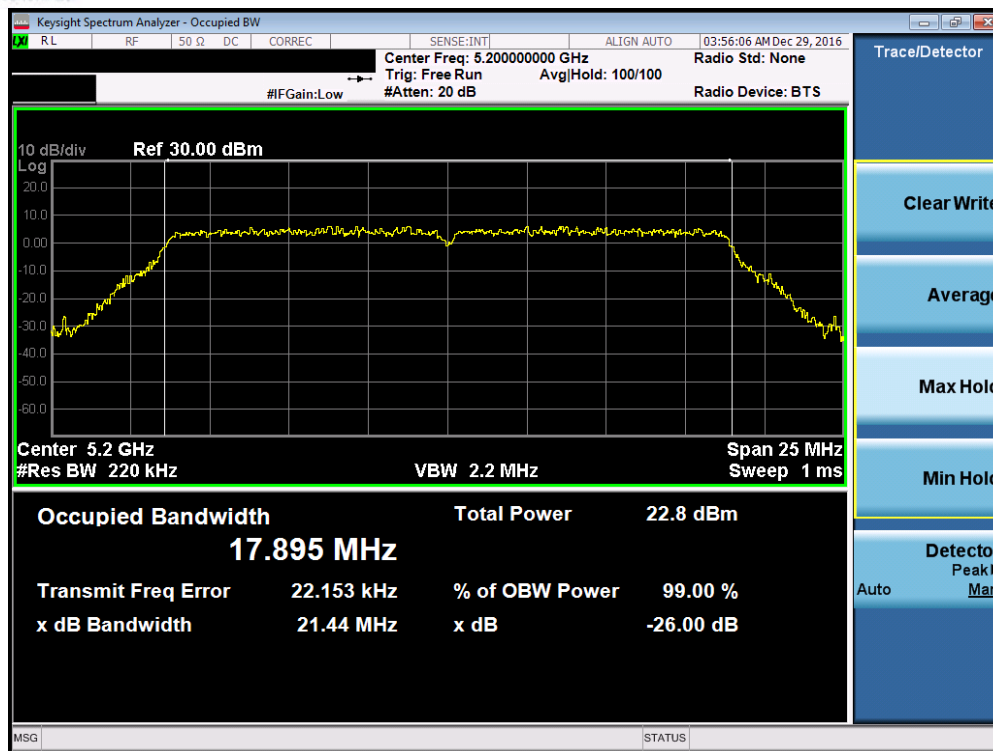


Plot 7-35. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

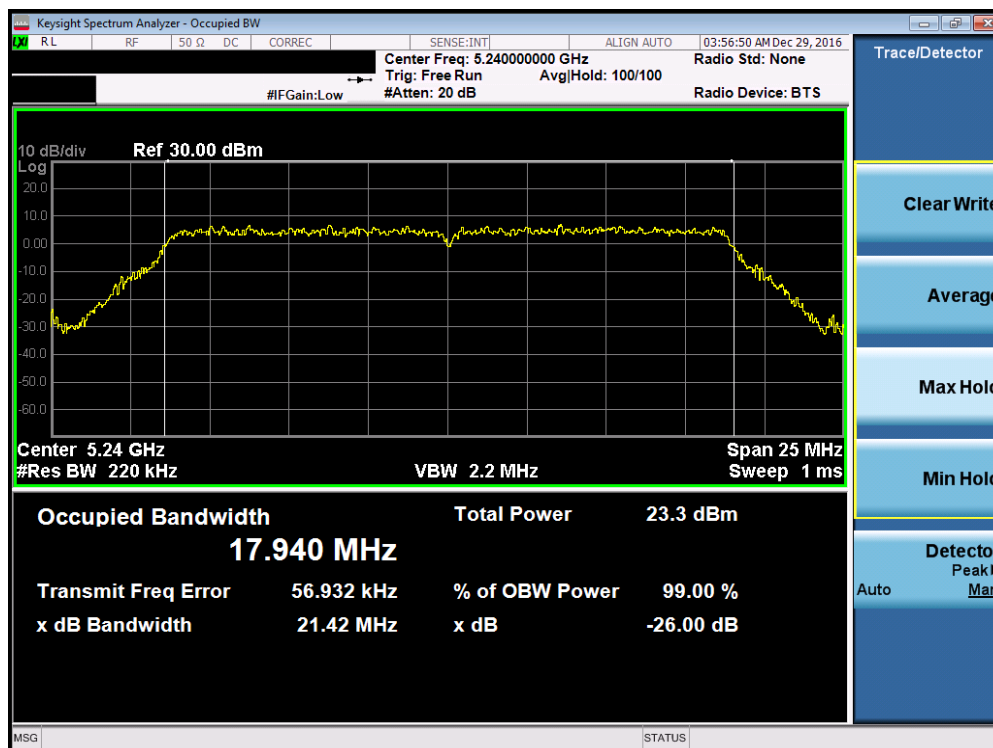


Plot 7-36. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 34 of 260

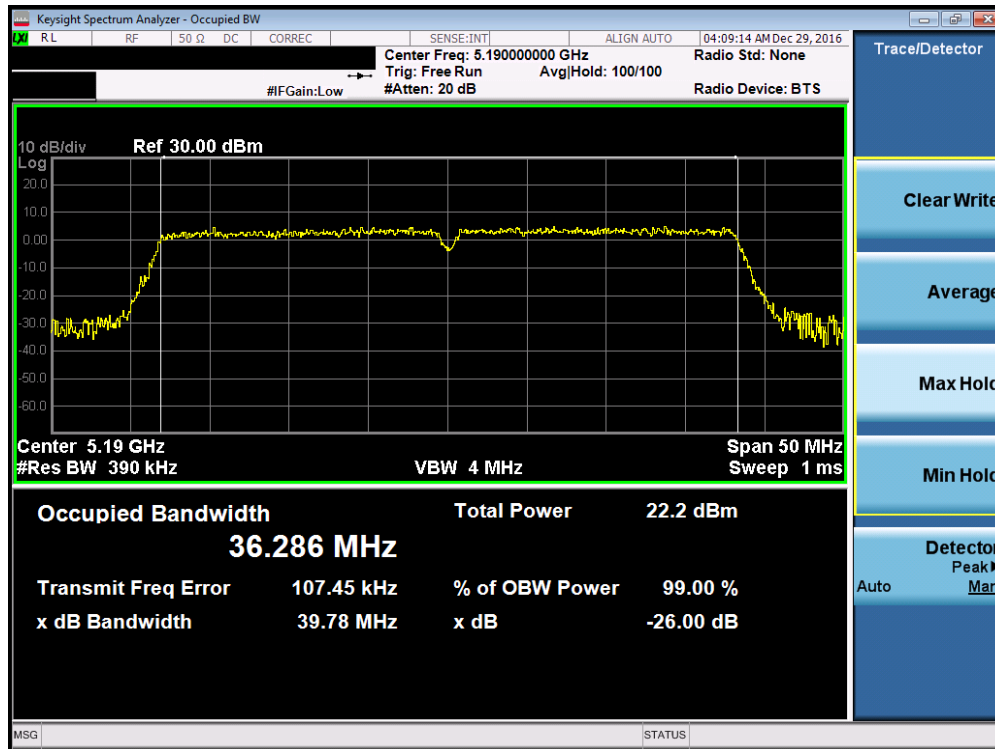


Plot 7-37. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

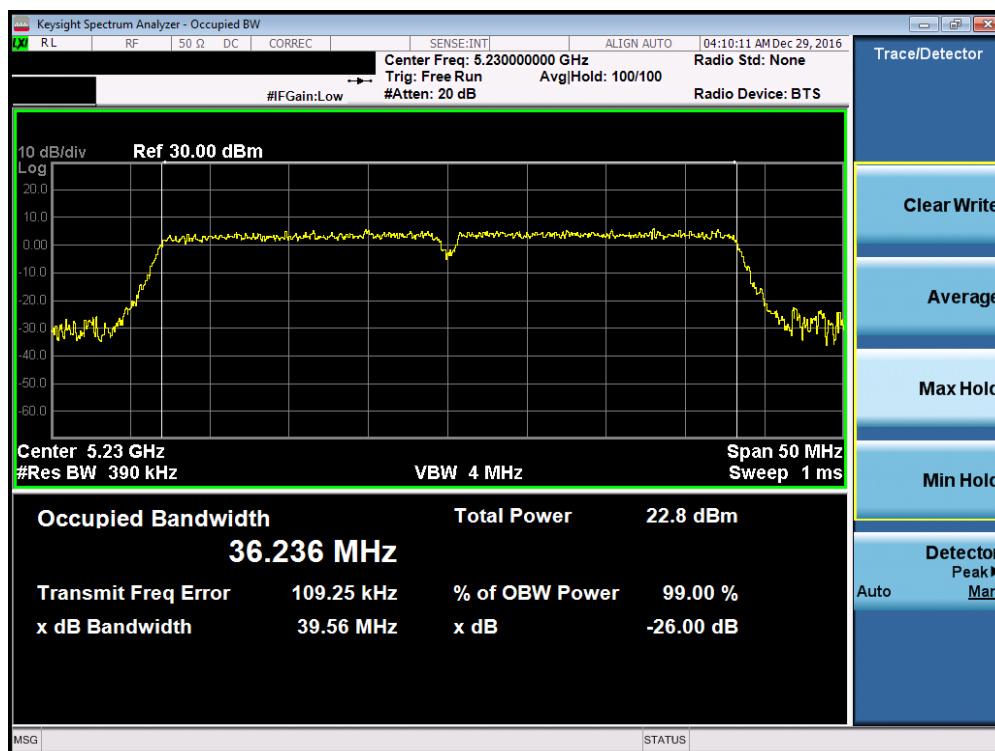


Plot 7-38. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 35 of 260

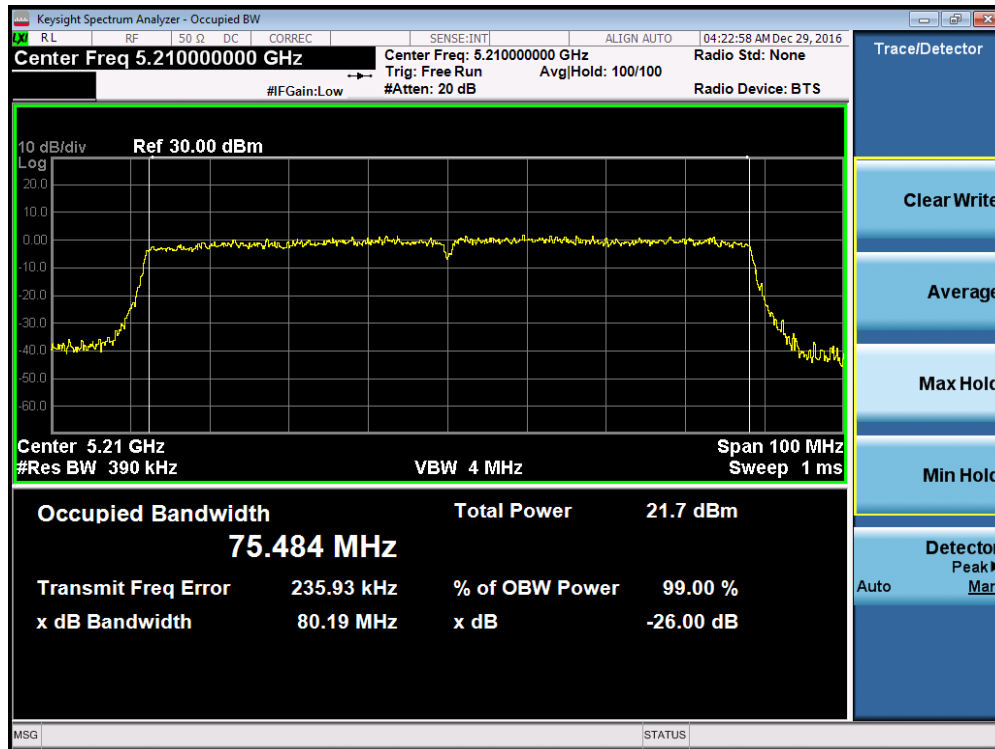


Plot 7-39. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

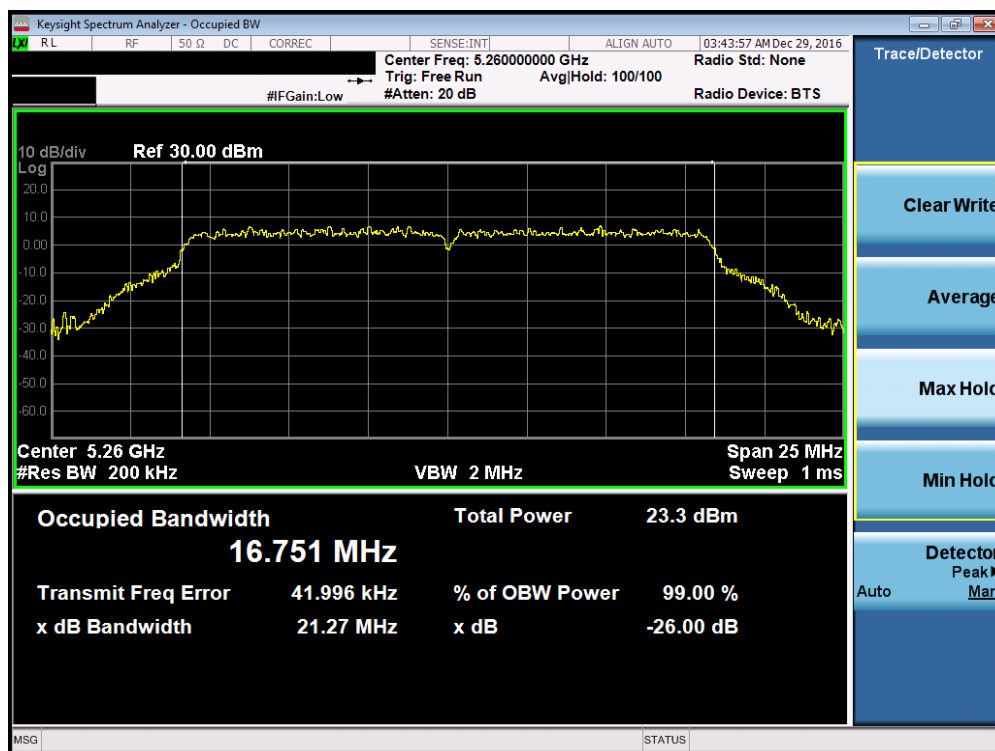


Plot 7-40. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 36 of 260

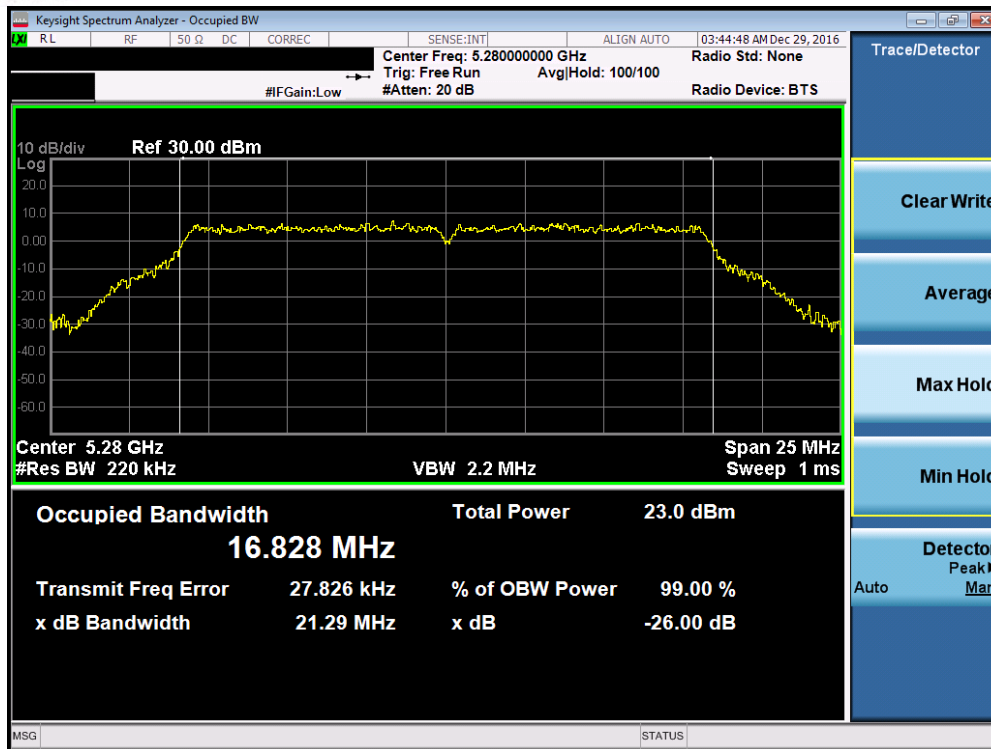


Plot 7-41. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

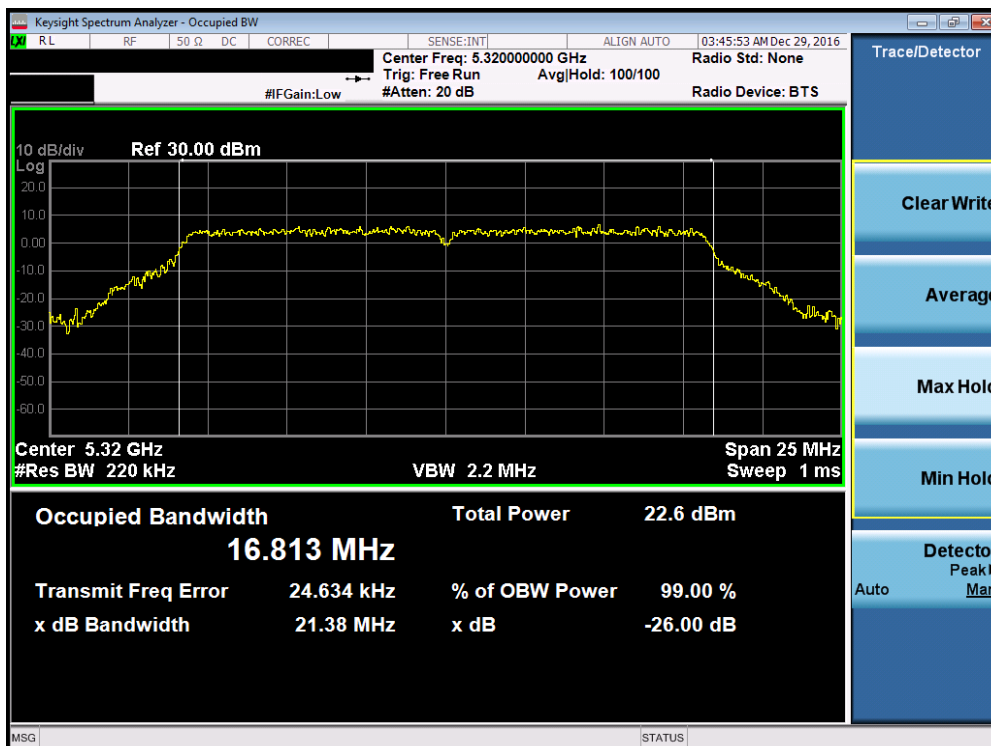


Plot 7-42. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 37 of 260

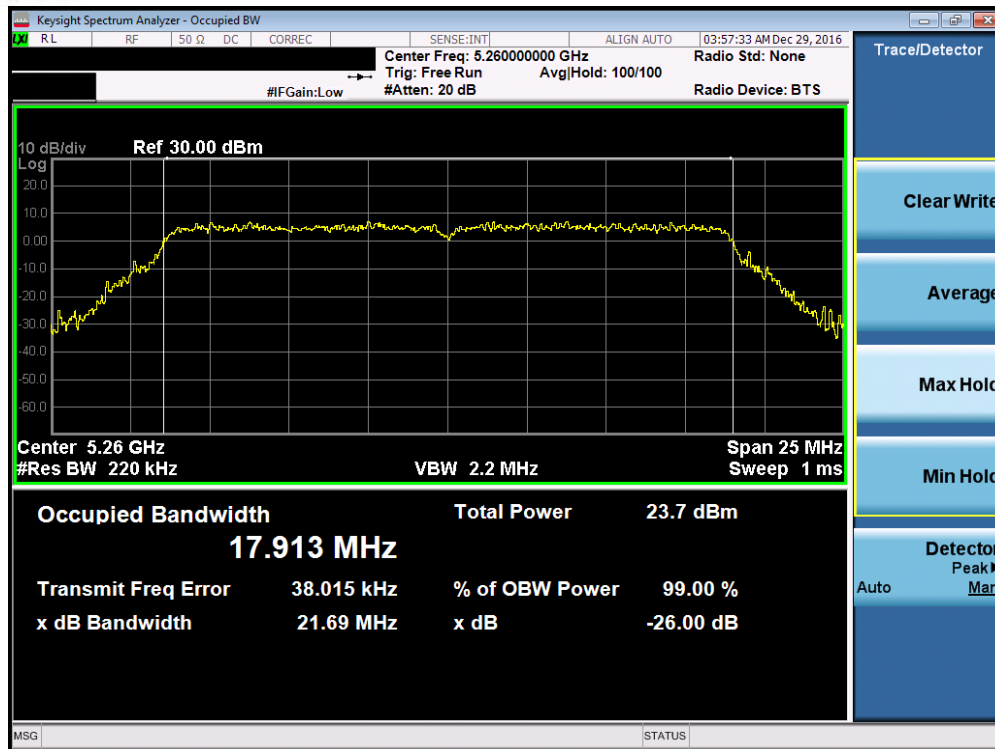


Plot 7-43. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

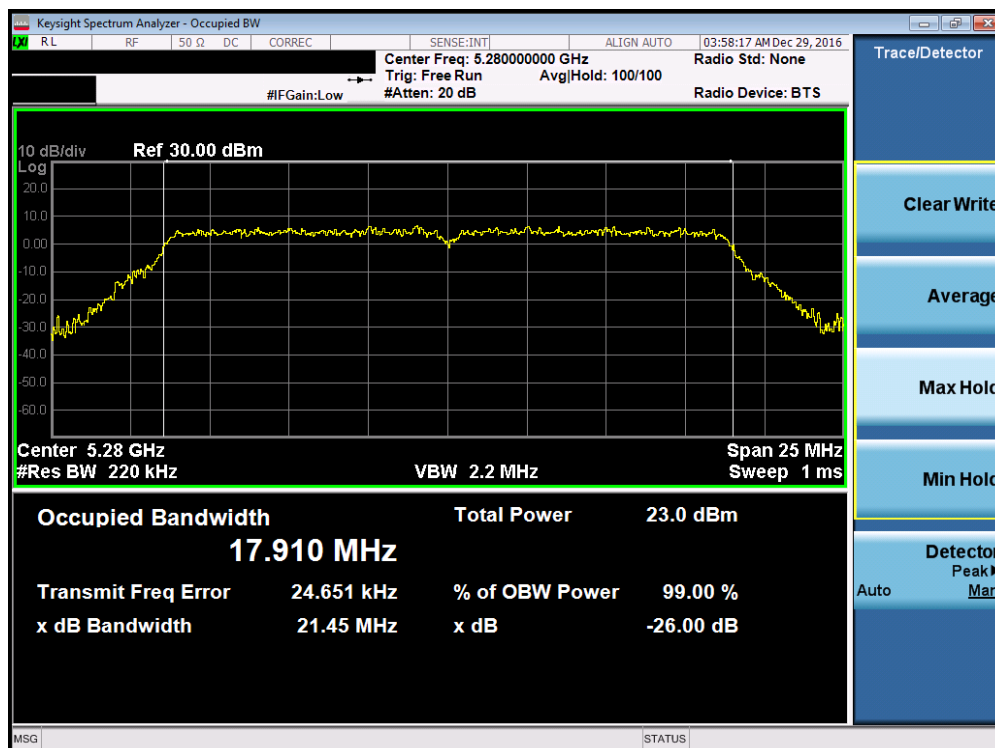


Plot 7-44. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 38 of 260

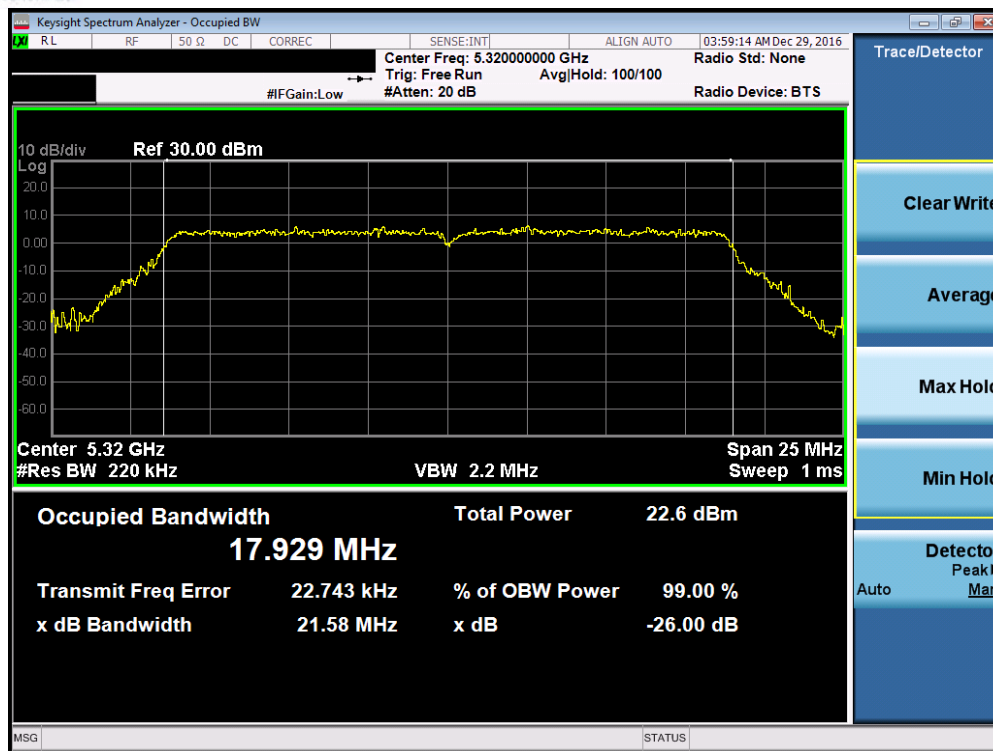


Plot 7-45. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

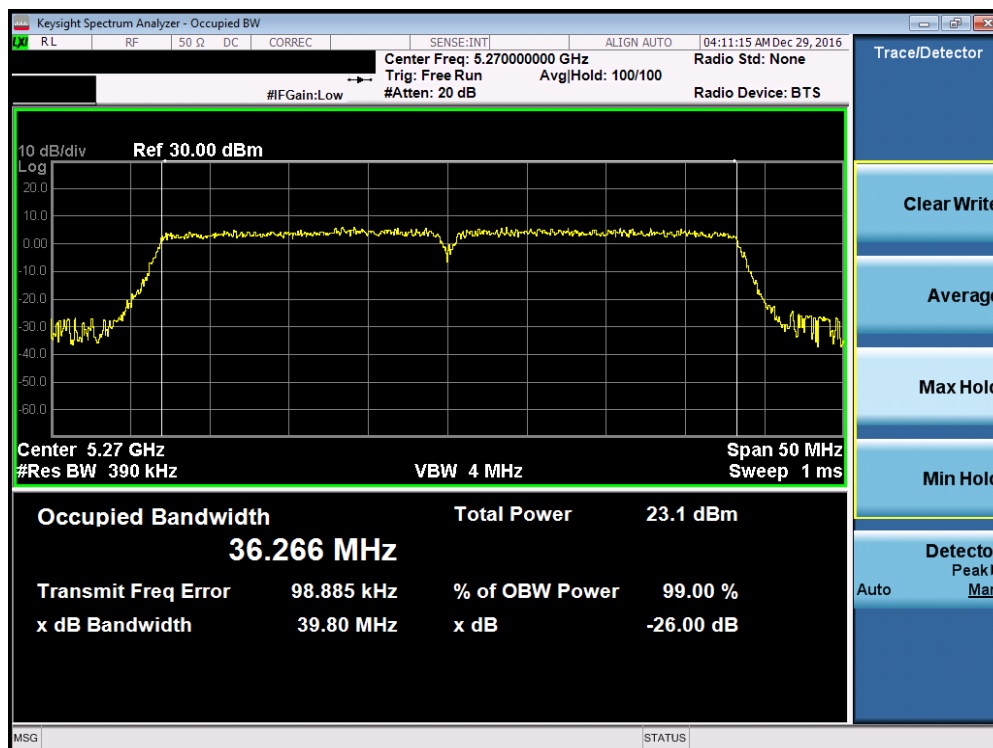


Plot 7-46. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 39 of 260

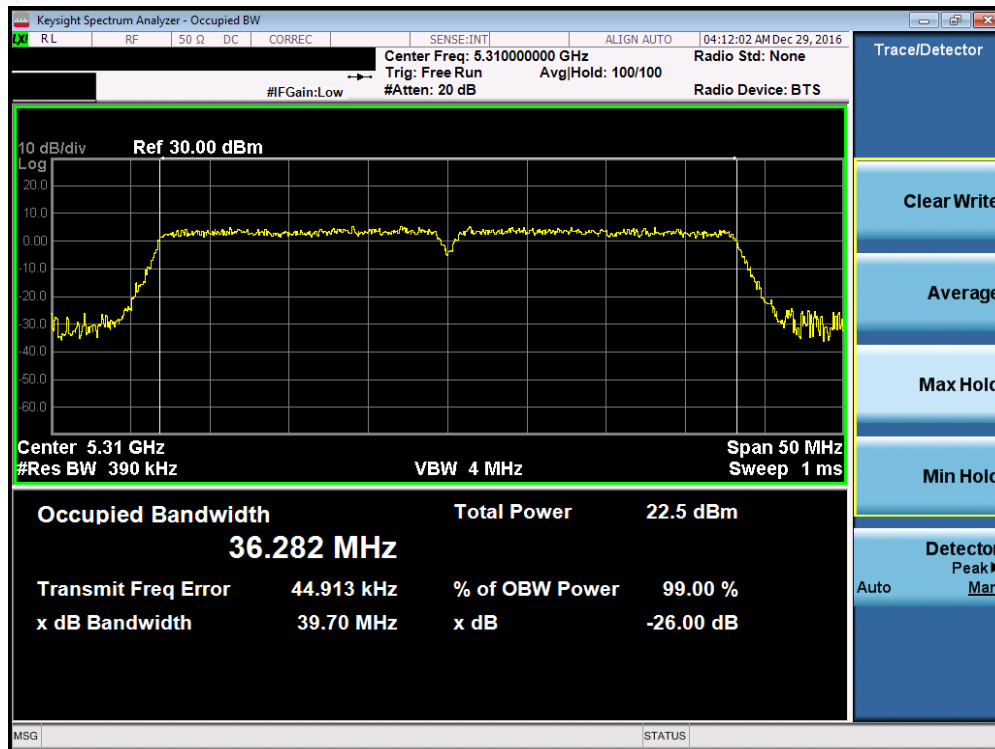


Plot 7-47. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

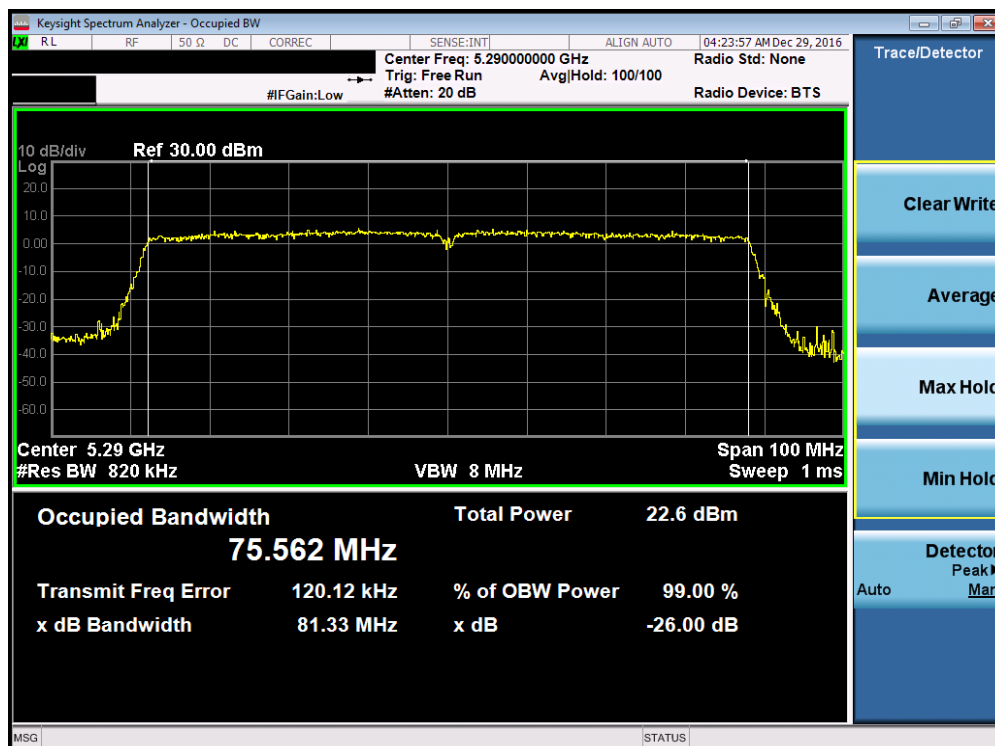


Plot 7-48. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 40 of 260

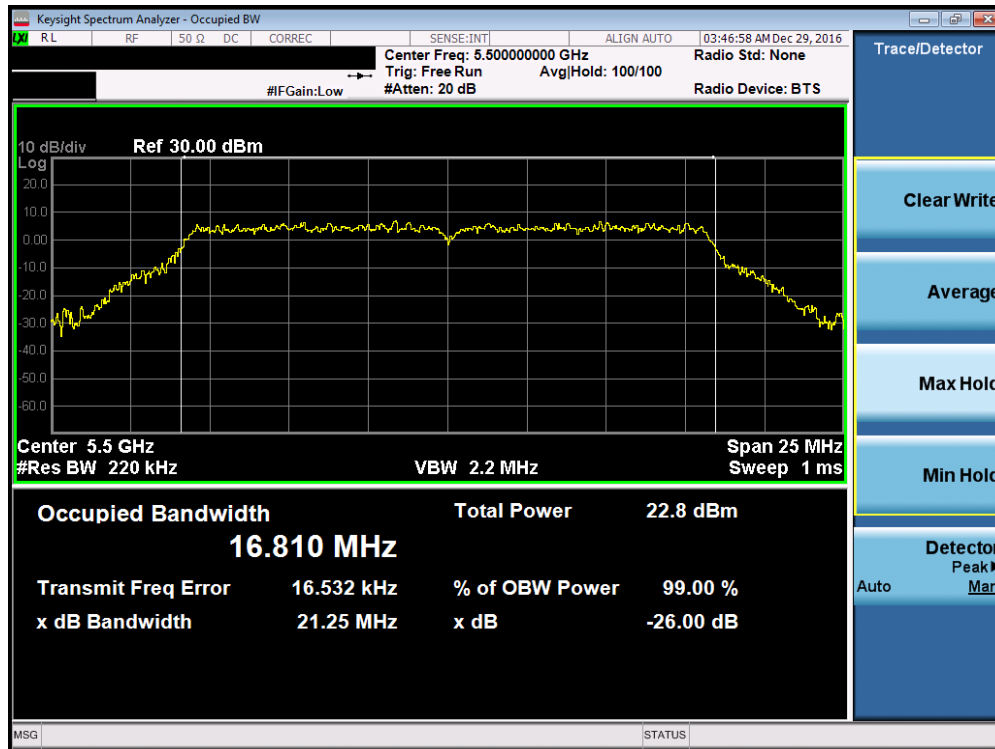


Plot 7-49. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

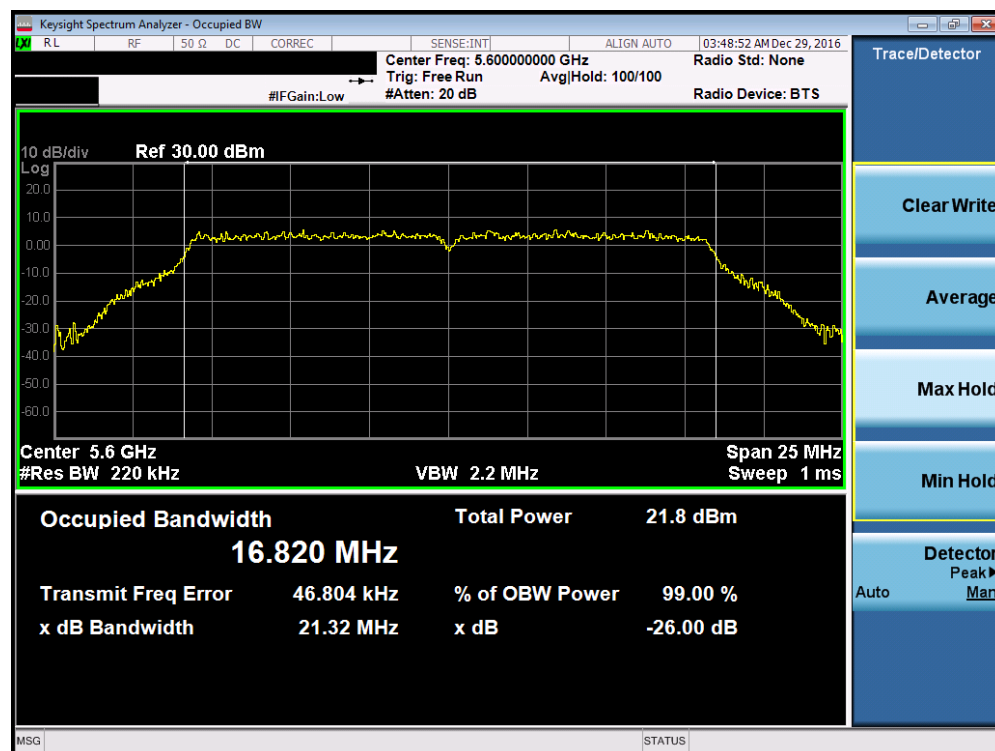


Plot 7-50. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 120)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 41 of 260

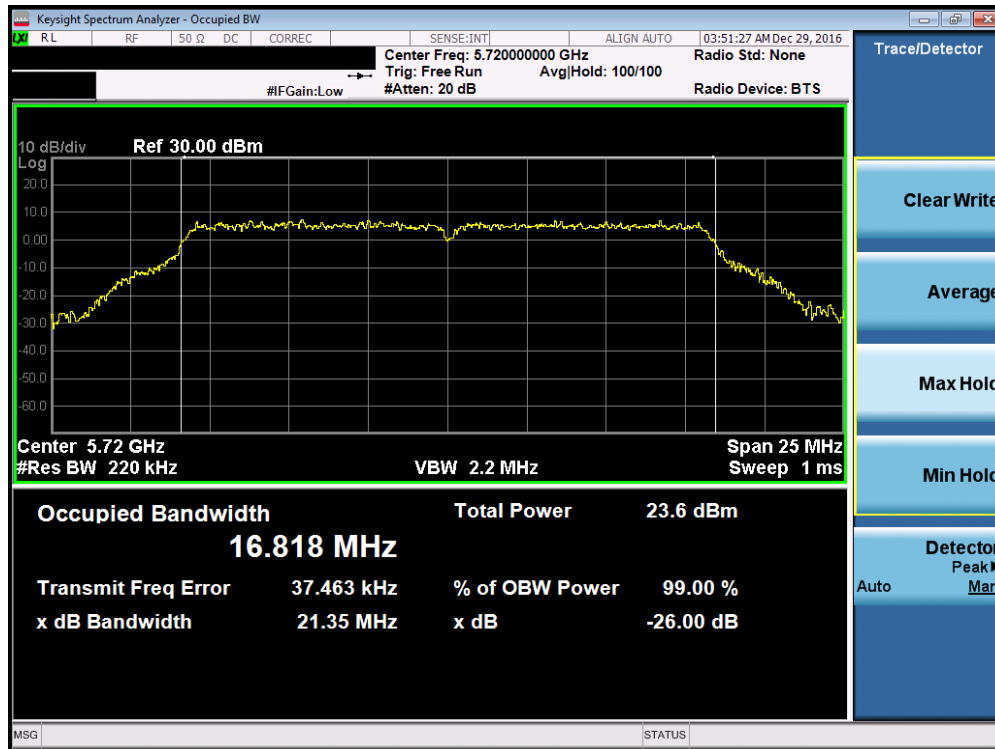


Plot 7-51. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 144)

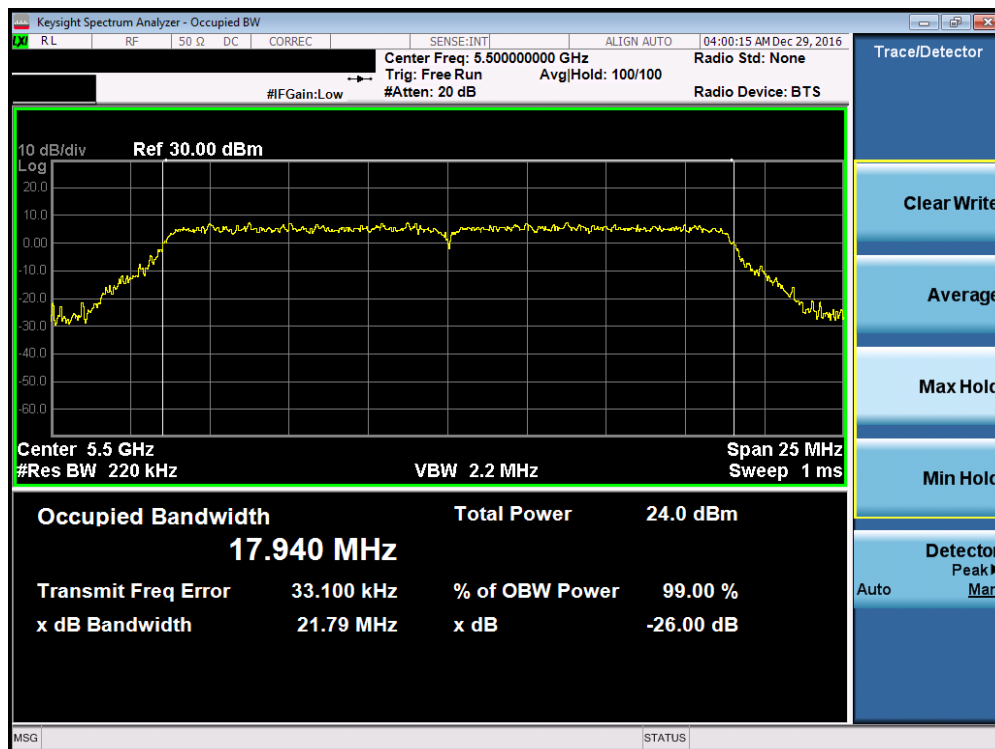


Plot 7-52. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 42 of 260

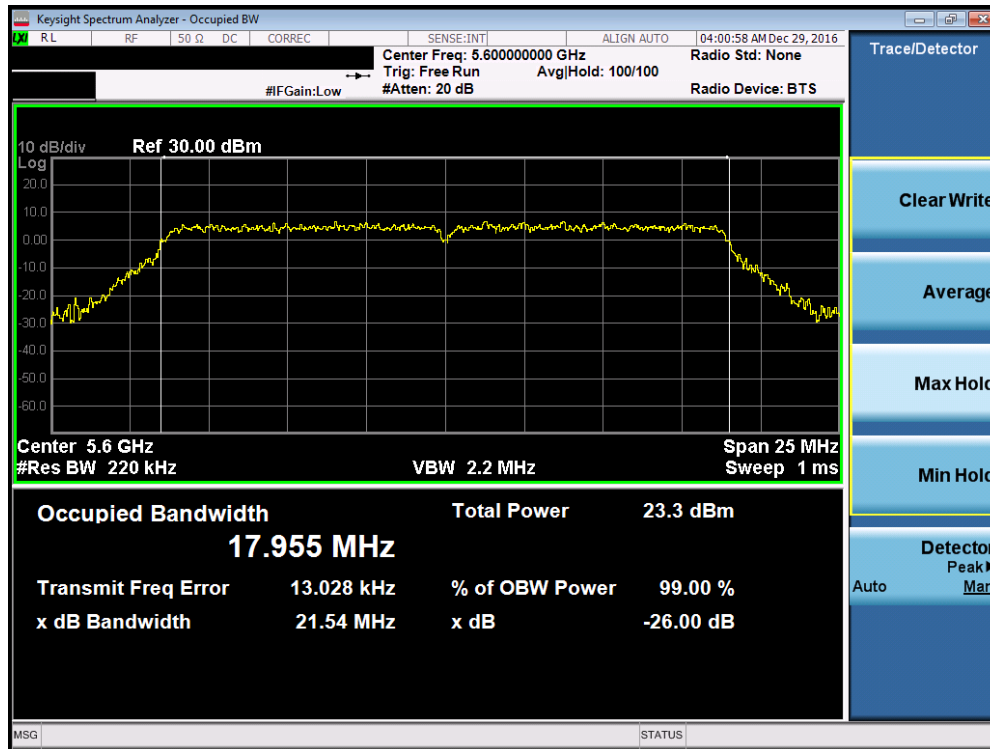


Plot 7-53. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

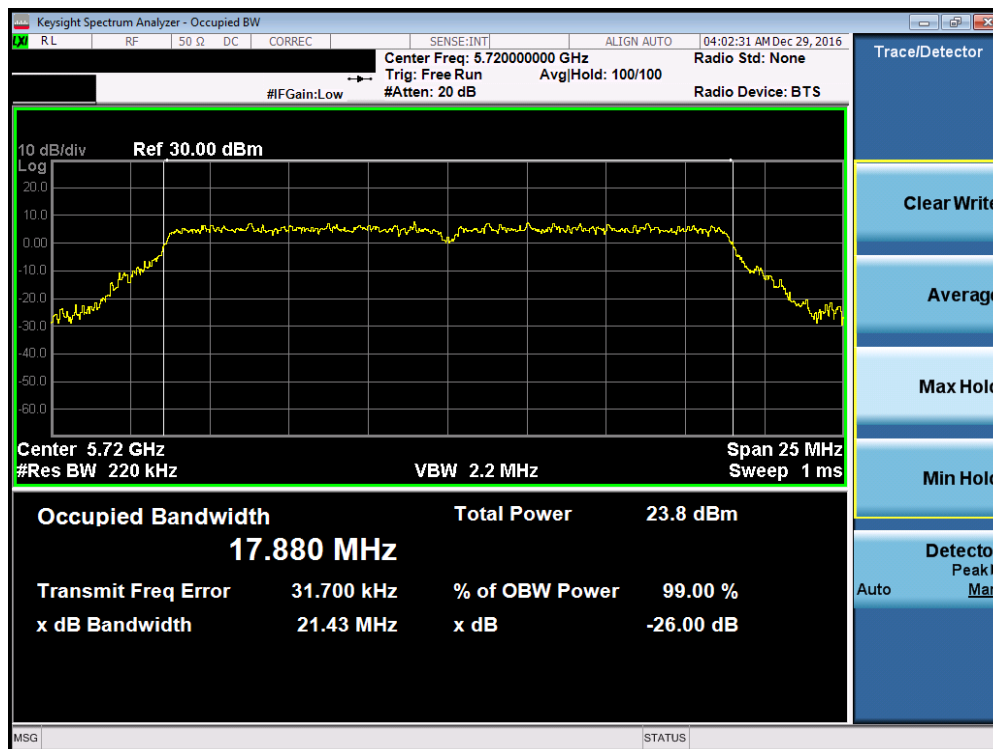


Plot 7-54. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 43 of 260

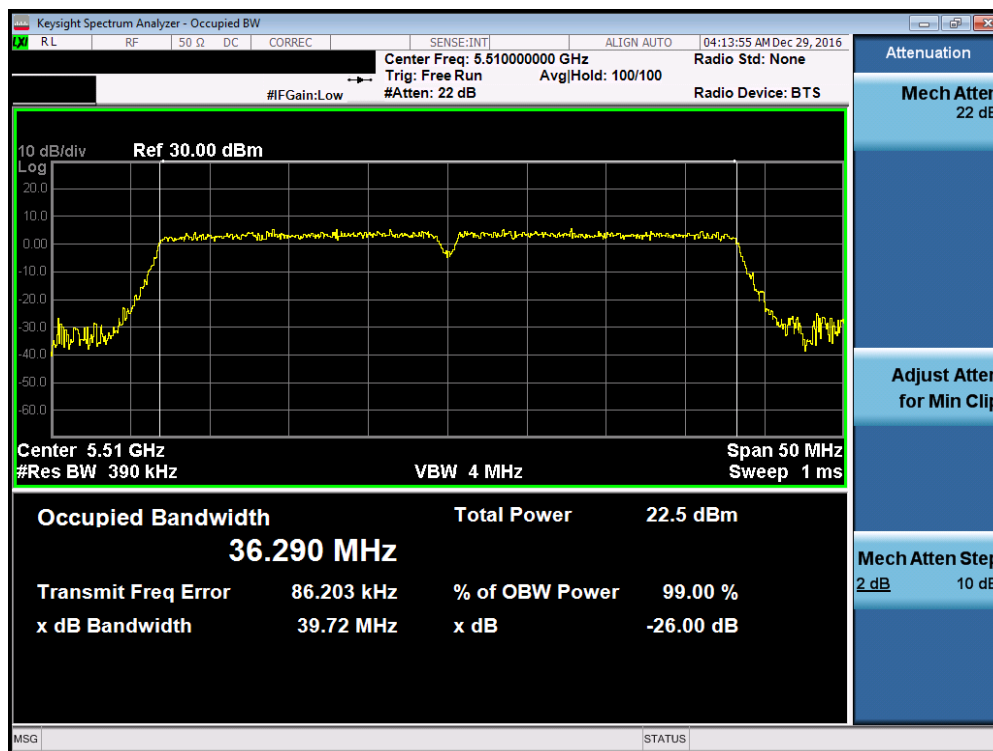


Plot 7-55. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

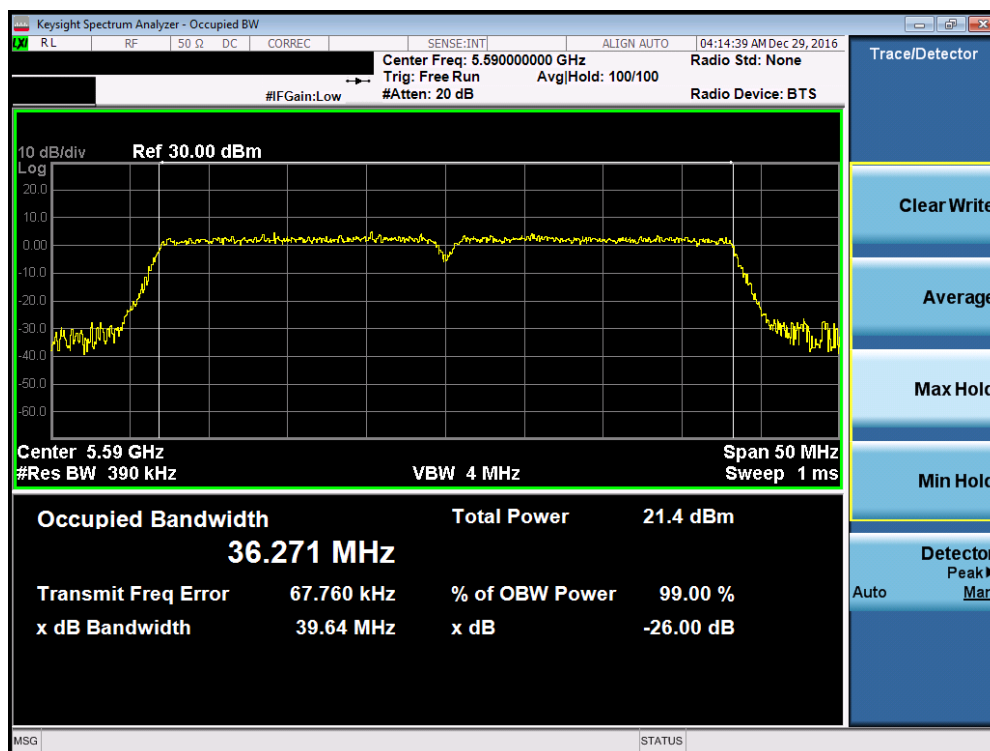


Plot 7-56. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 44 of 260

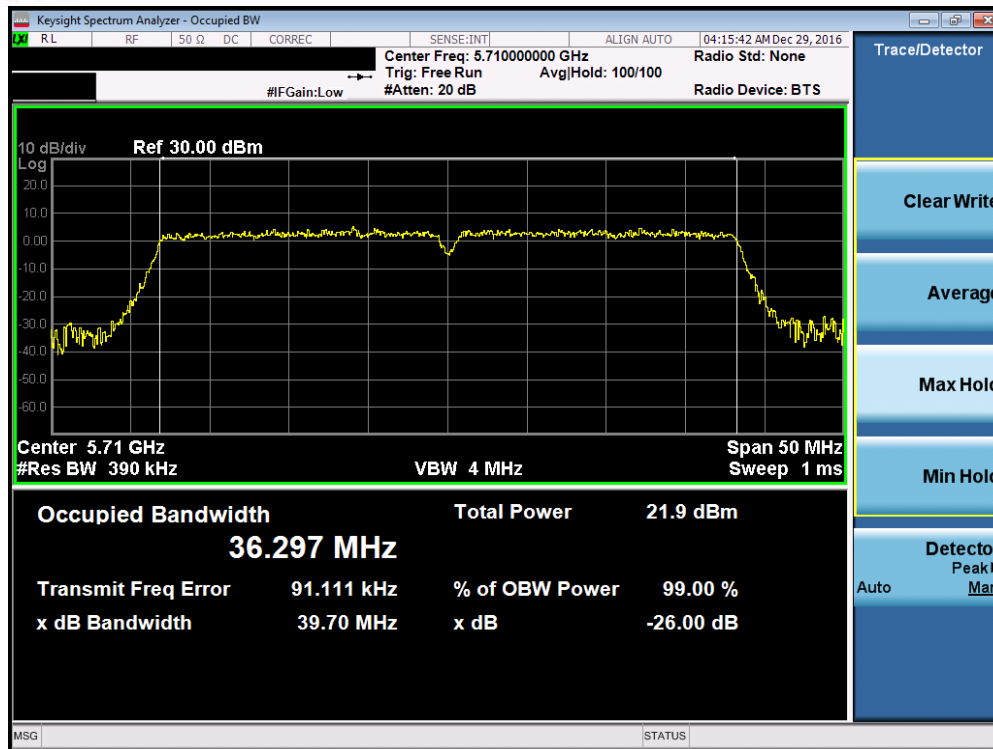


Plot 7-57. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

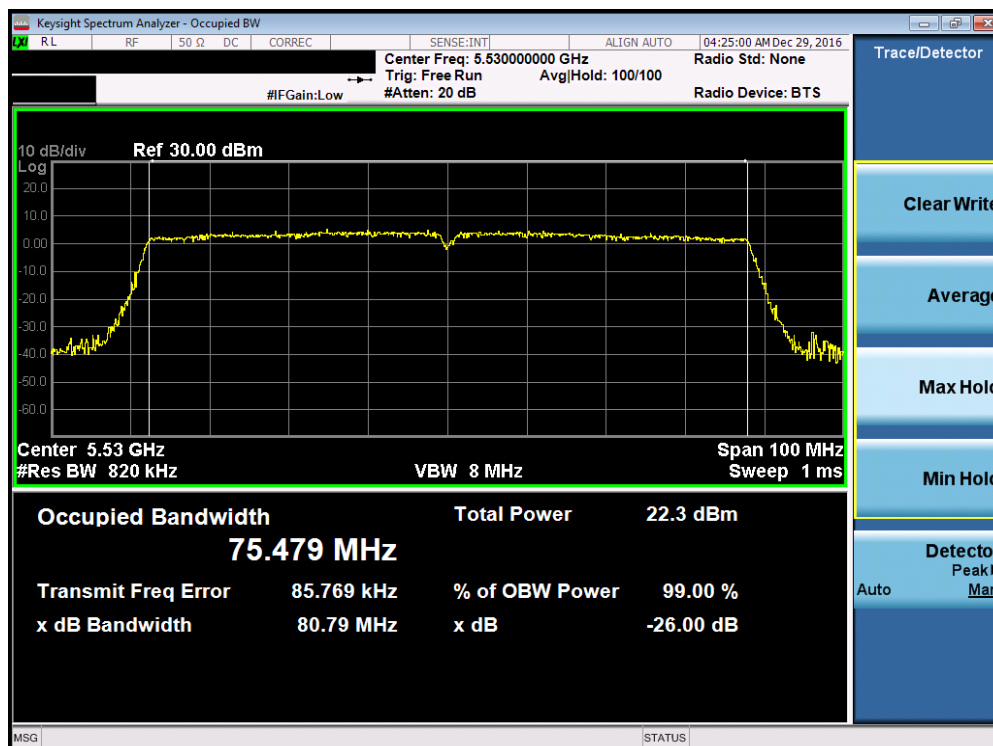


Plot 7-58. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 45 of 260

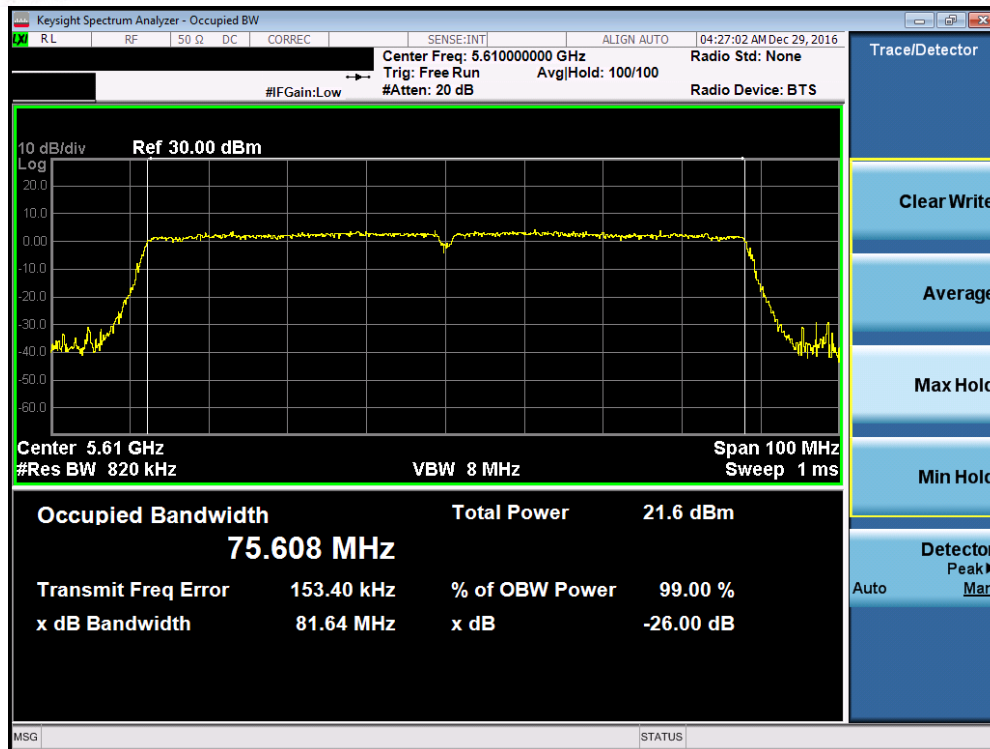

Plot 7-59. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

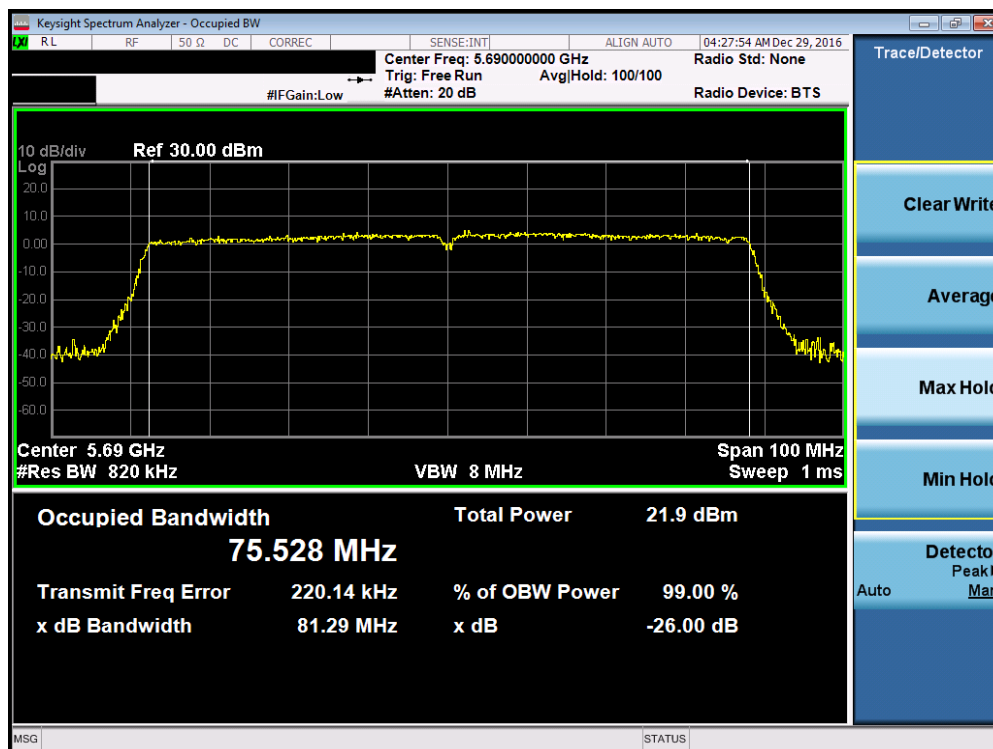

Plot 7-60. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 46 of 260

7.3 6dB Bandwidth Measurement – 802.11a/n/ac

§15.407 (e)

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r03, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

KDB 789033 D02 v01r03 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-2. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 47 of 260

Antenna-1 6 dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	a	6	17.60
	5785	157	a	6	17.58
	5825	165	a	6	17.60
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.57
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.60
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.61
	5755	151	n (40MHz)	13.5/15 (MCS0)	36.34
	5795	159	n (40MHz)	13.5/15 (MCS0)	36.04
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.42

Table 7-4. Conducted Bandwidth Measurements

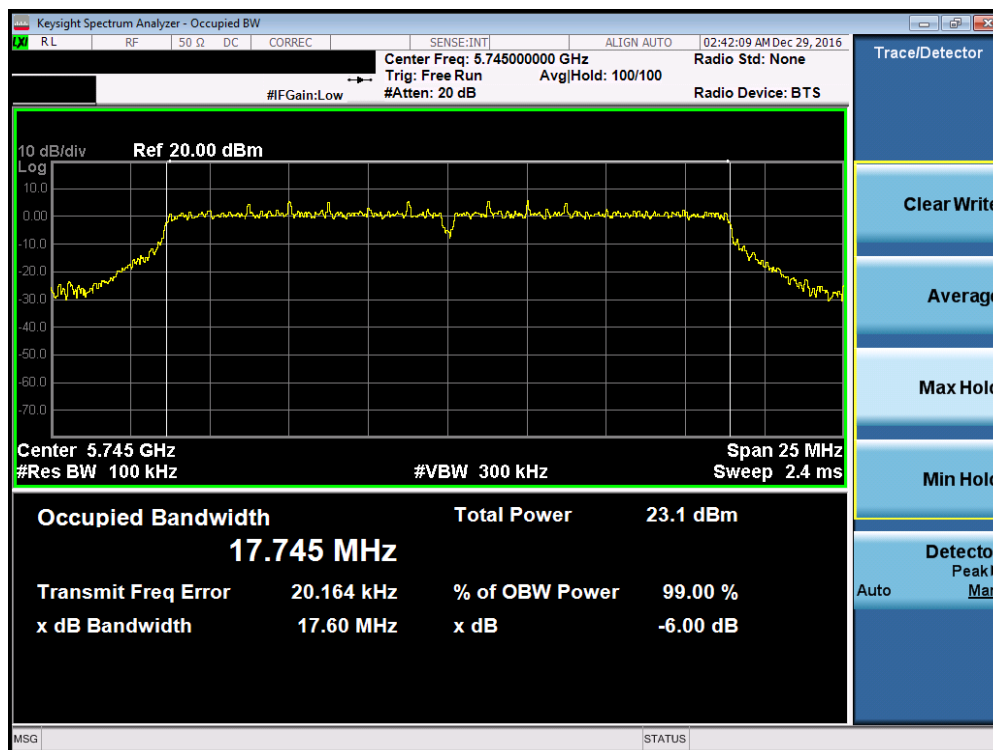


Plot 7-61. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 149)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 48 of 260

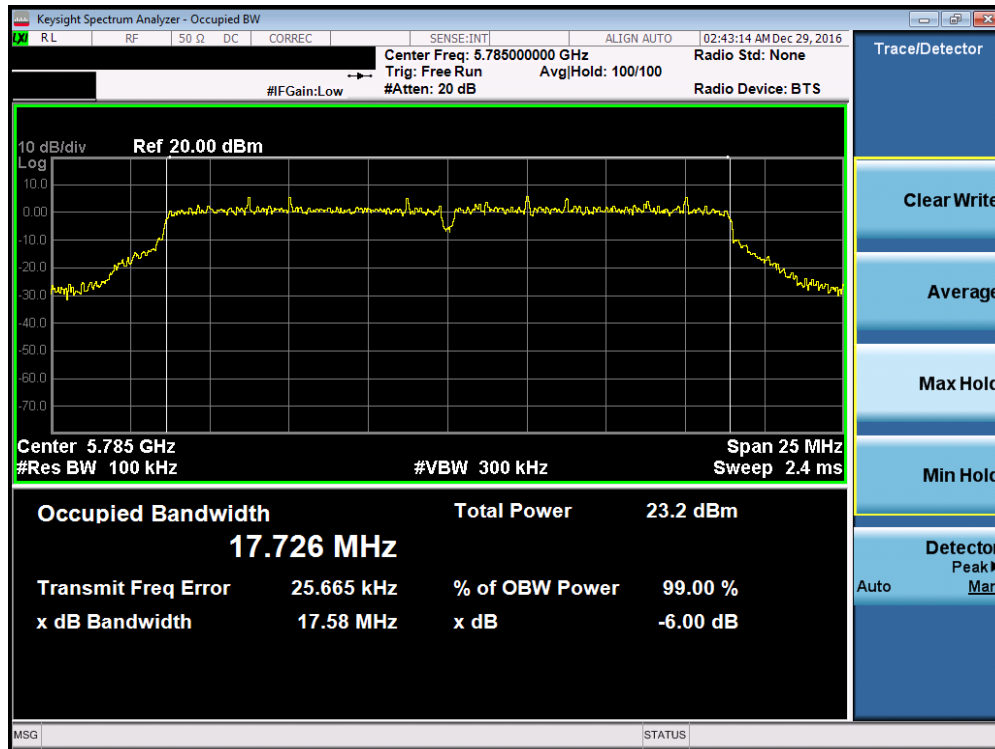


Plot 7-62. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 157)

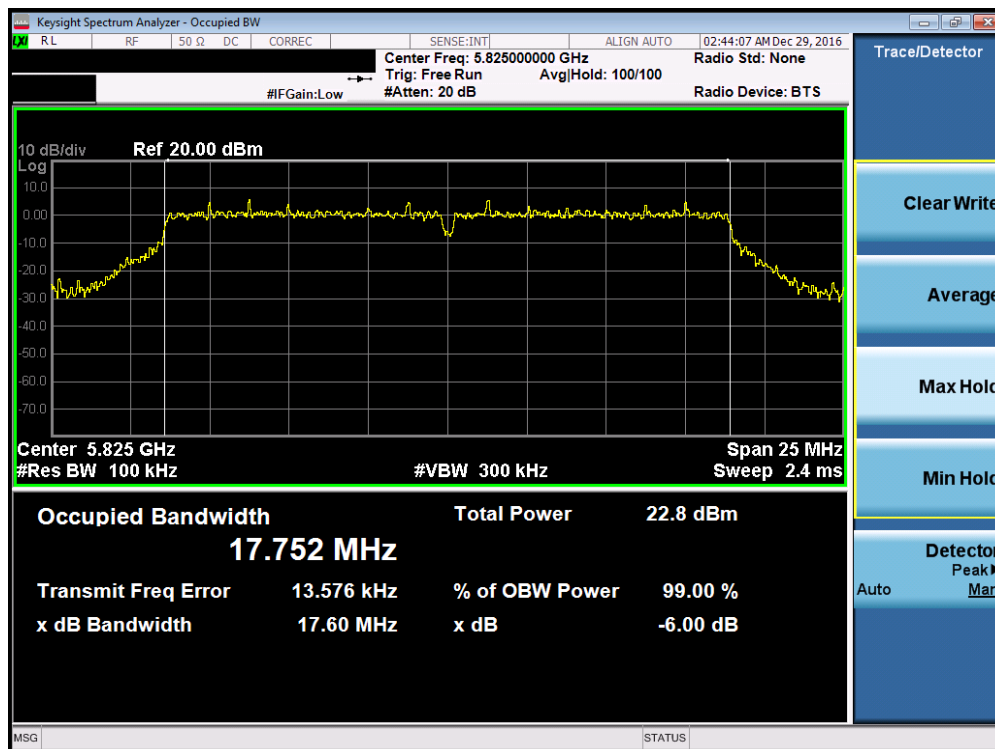


Plot 7-63. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 49 of 260

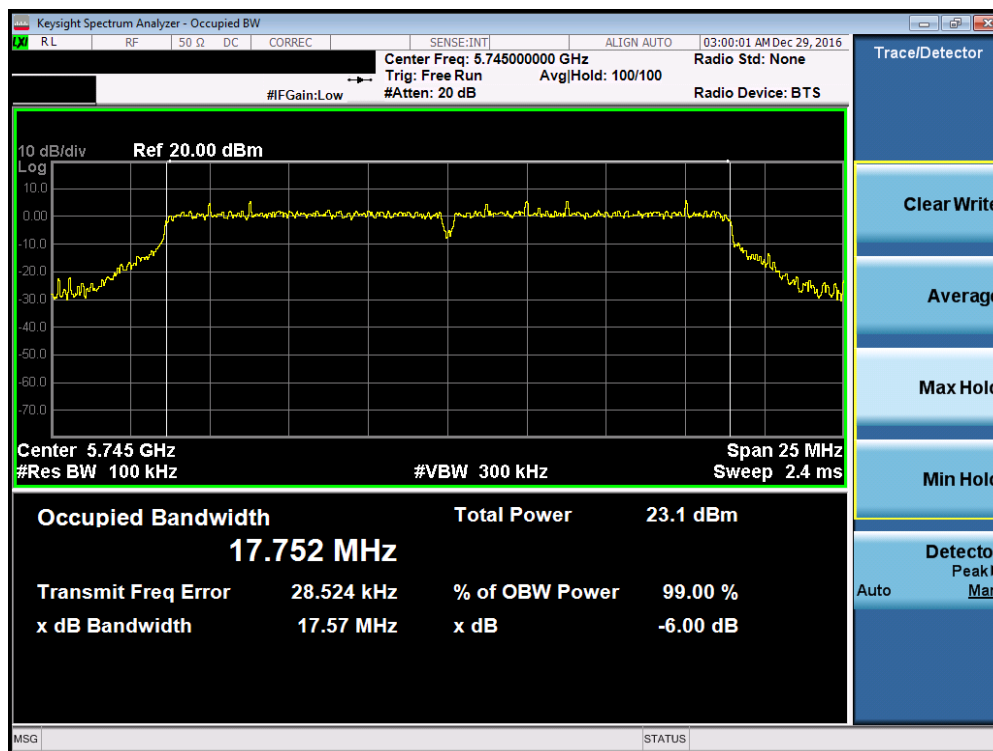


Plot 7-64. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

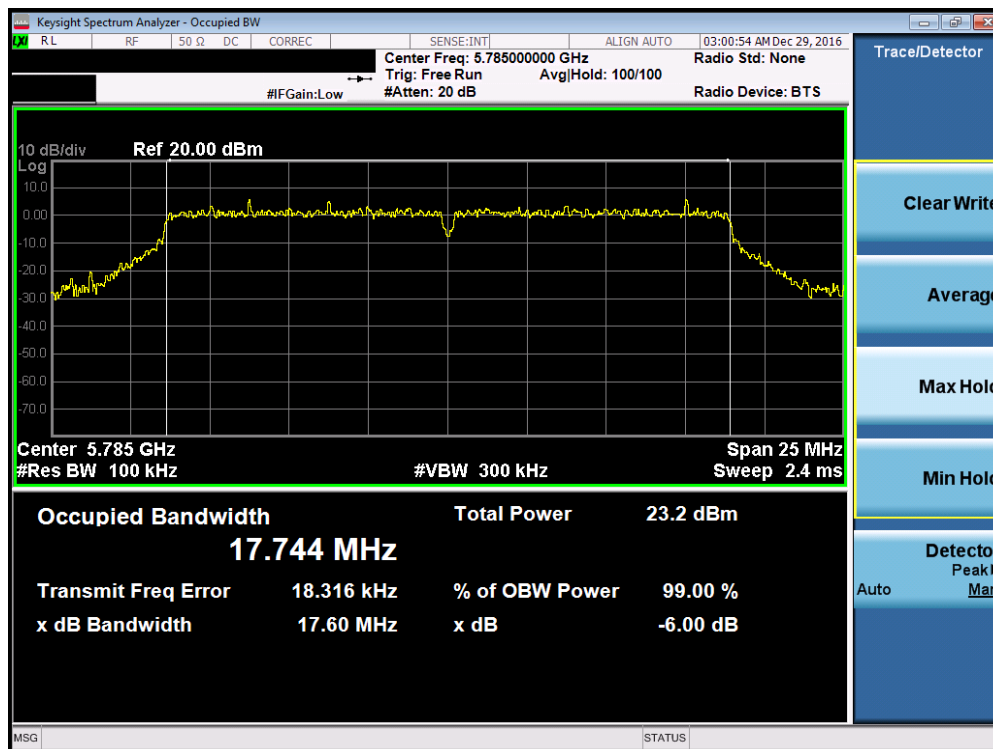


Plot 7-65. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 50 of 260

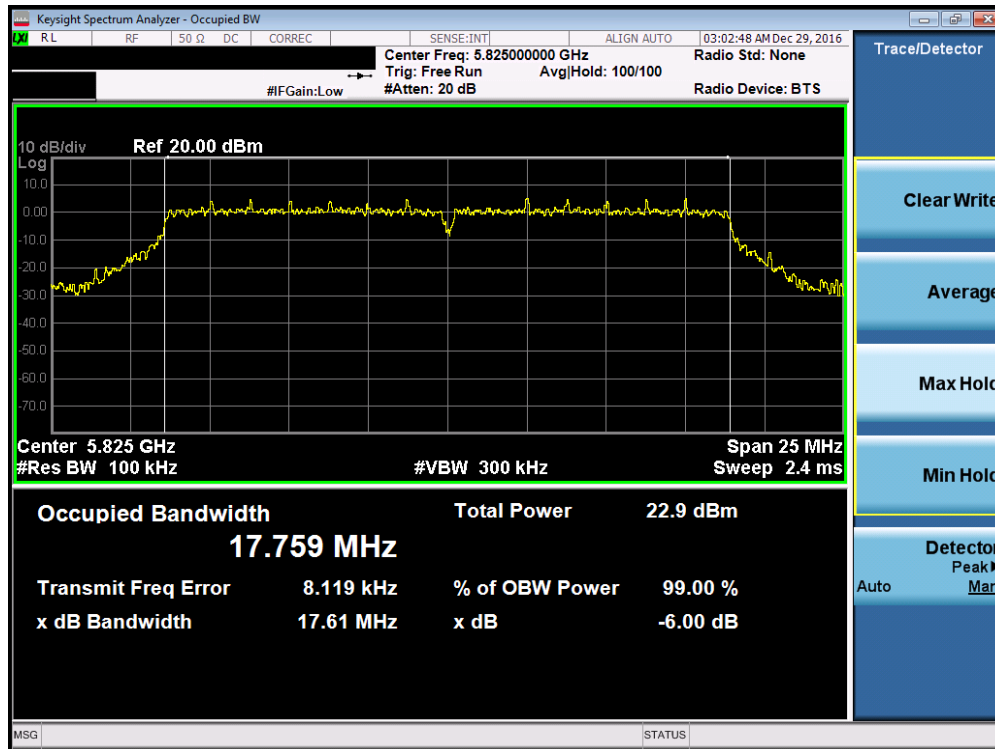


Plot 7-66. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

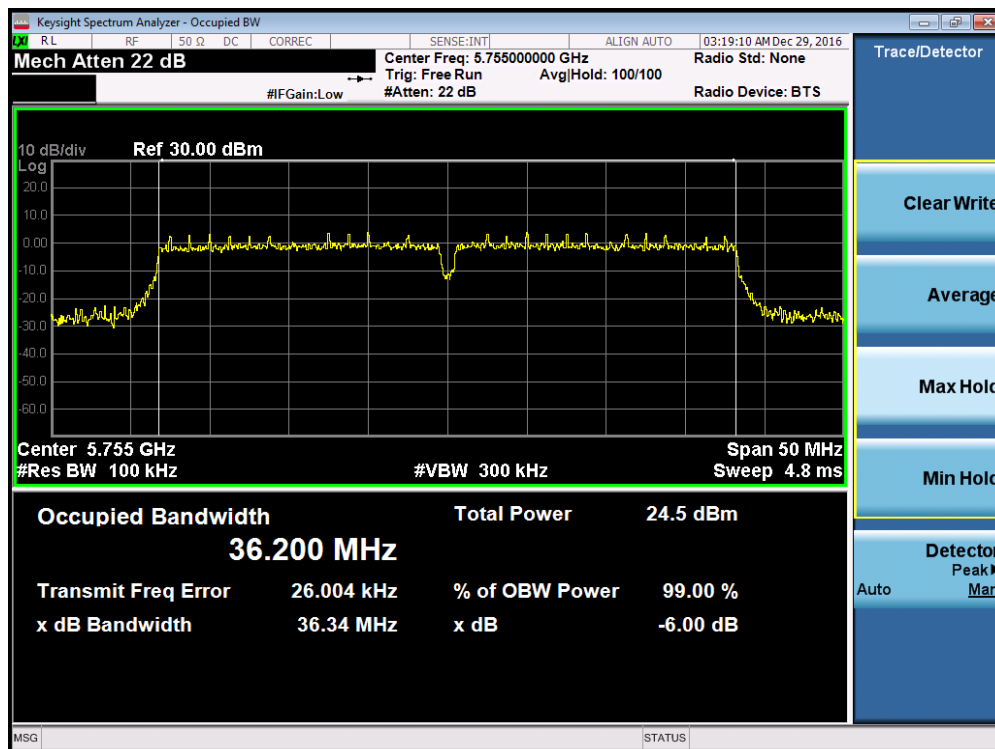


Plot 7-67. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 51 of 260

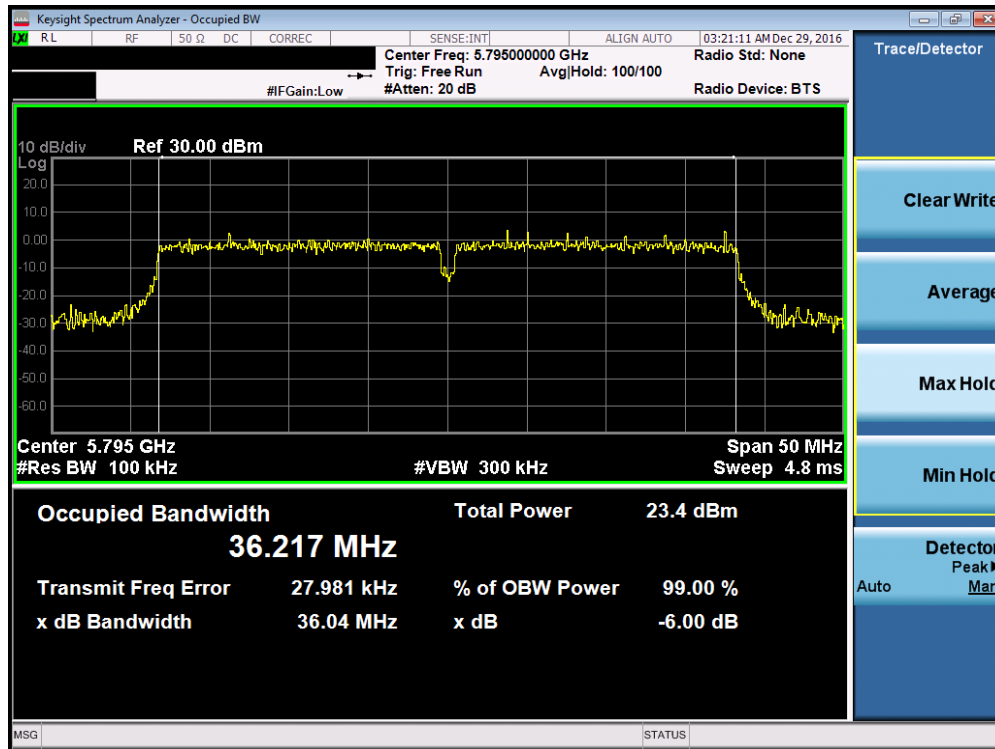

Plot 7-68. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

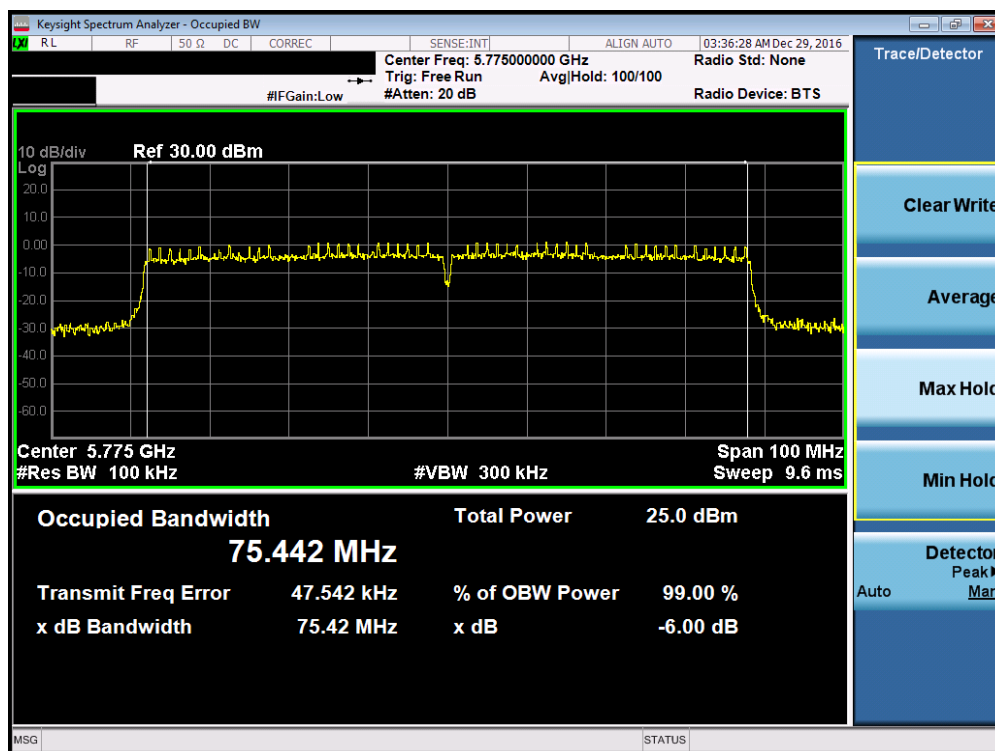


Plot 7-69. 6dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 52 of 260

Antenna-2 6dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	a	6	16.38
	5785	157	a	6	16.36
	5825	165	a	6	16.36
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.60
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.60
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.60
	5755	151	n (40MHz)	13.5/15 (MCS0)	36.33
	5795	159	n (40MHz)	13.5/15 (MCS0)	36.33
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.41

Table 7-5. Conducted Bandwidth Measurements

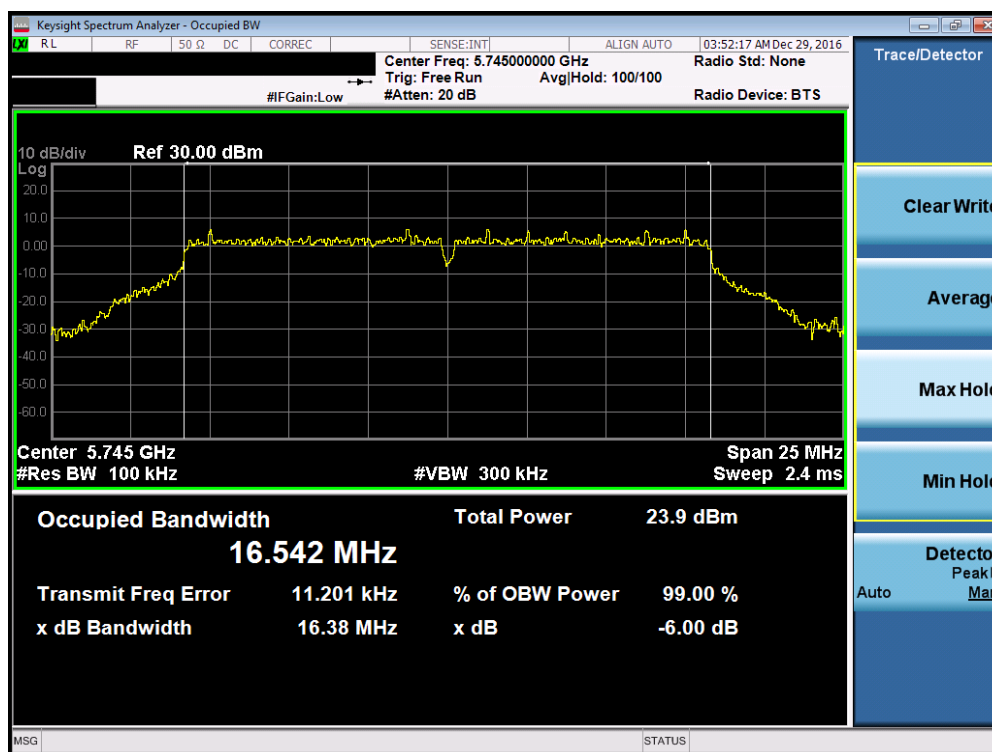


Plot 7-70. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 149)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 53 of 260

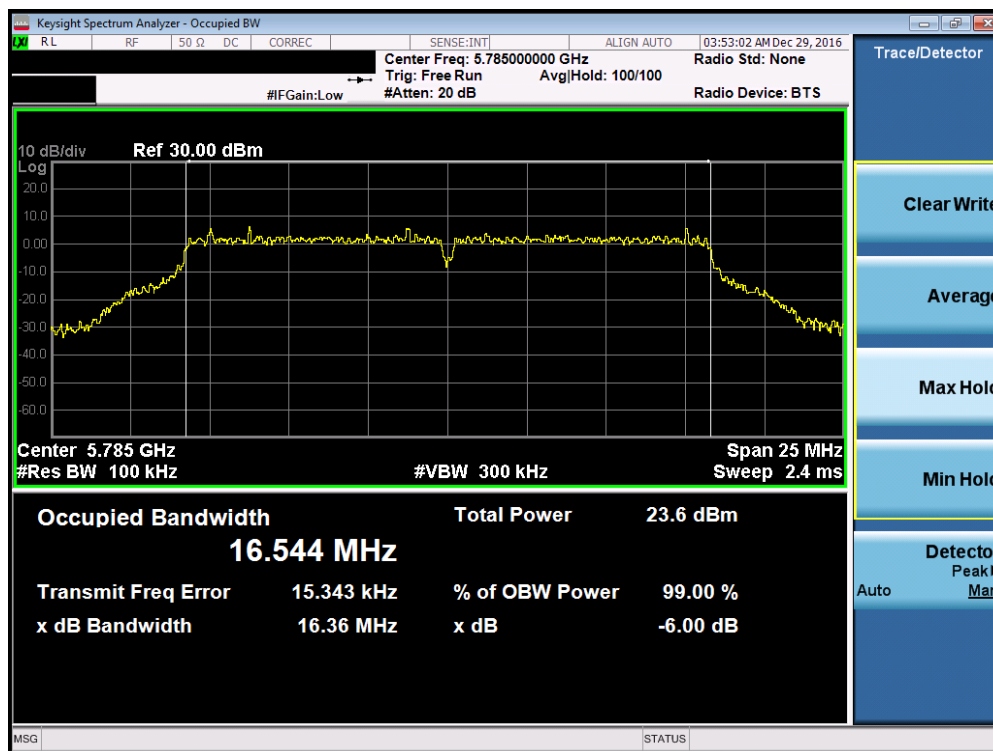


Plot 7-71. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 157)

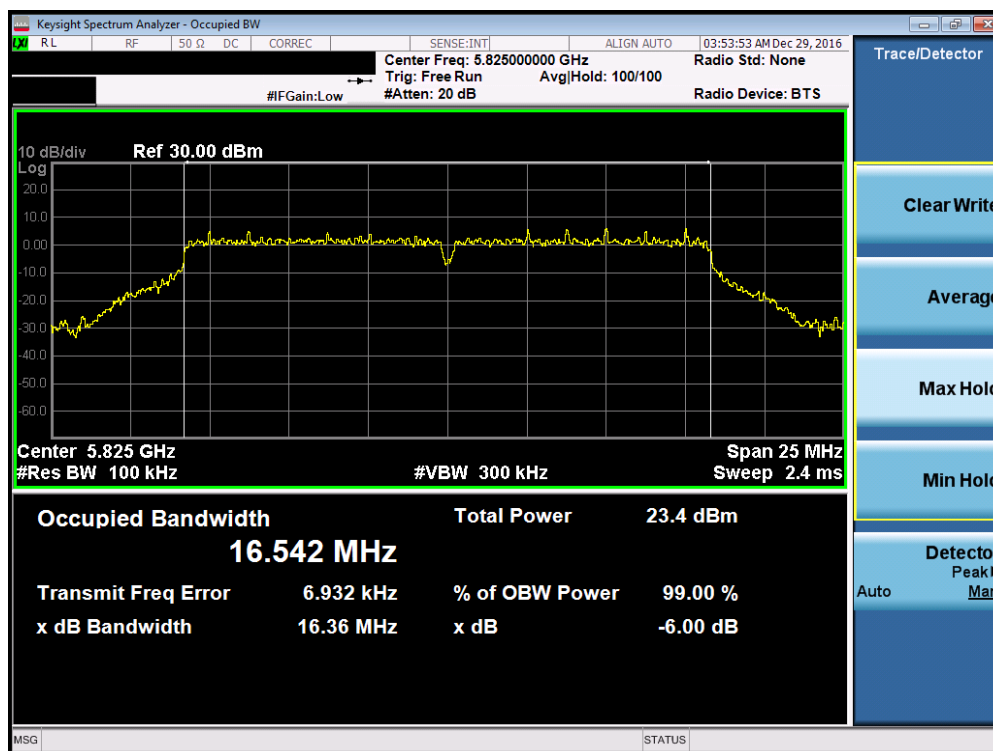


Plot 7-72. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 54 of 260

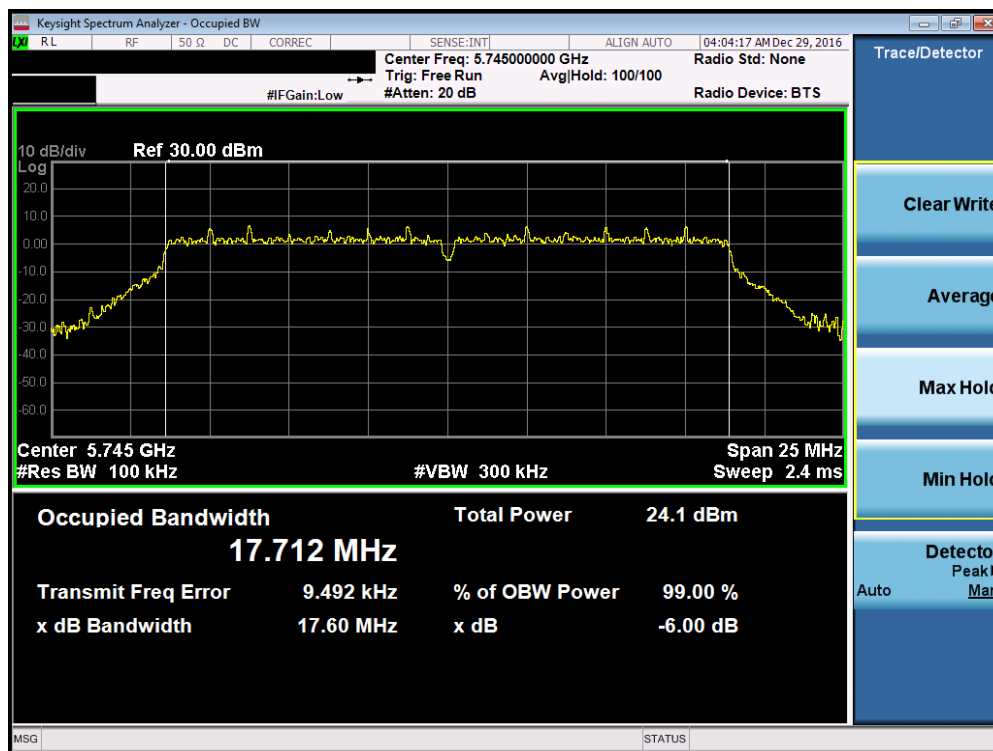


Plot 7-73. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

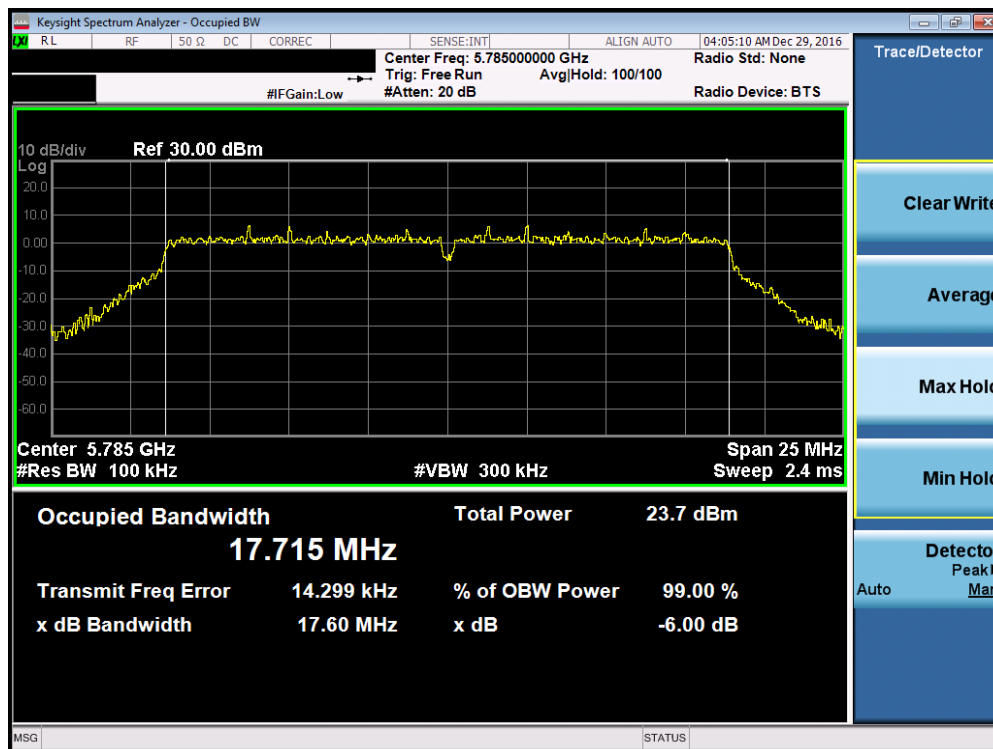


Plot 7-74. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 55 of 260

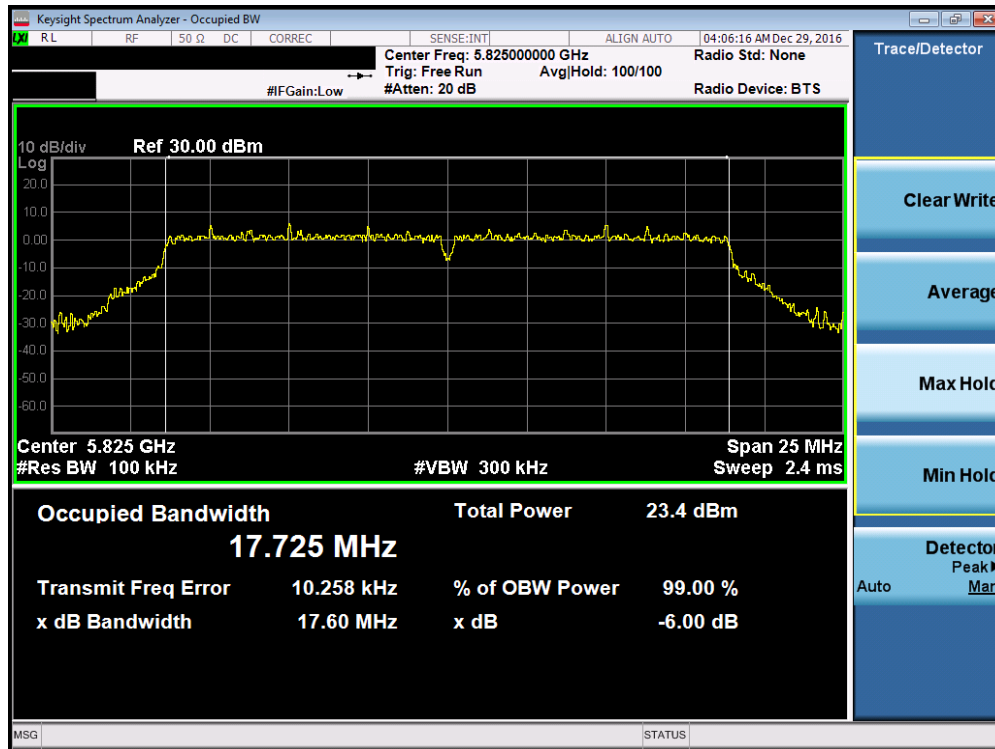


Plot 7-75. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

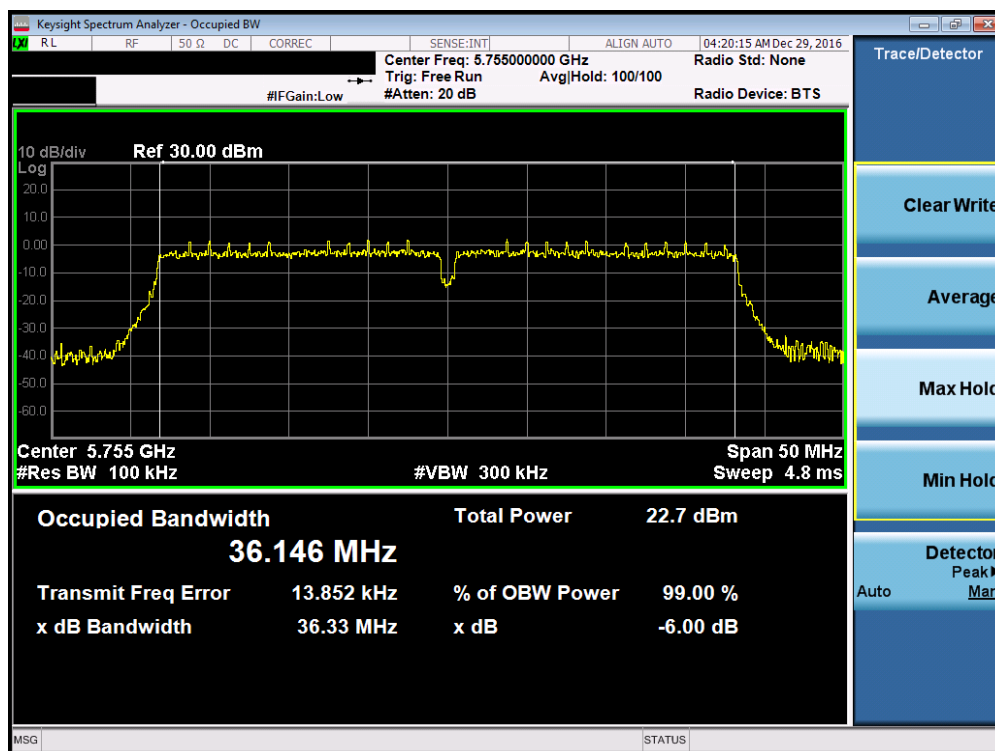


Plot 7-76. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 56 of 260

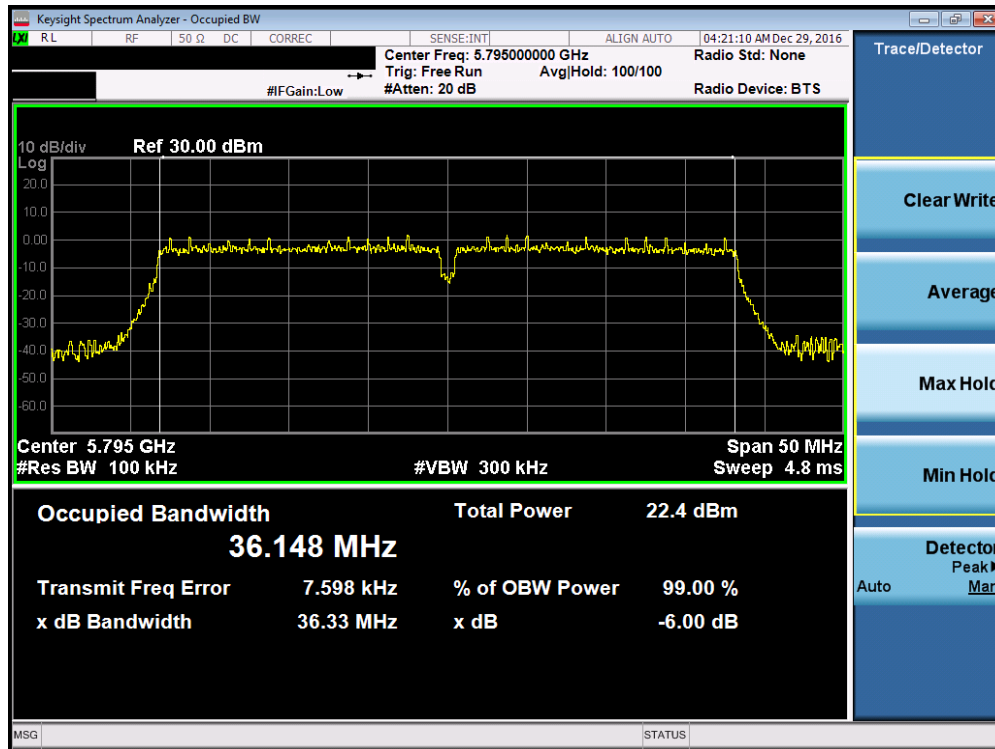

Plot 7-77. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

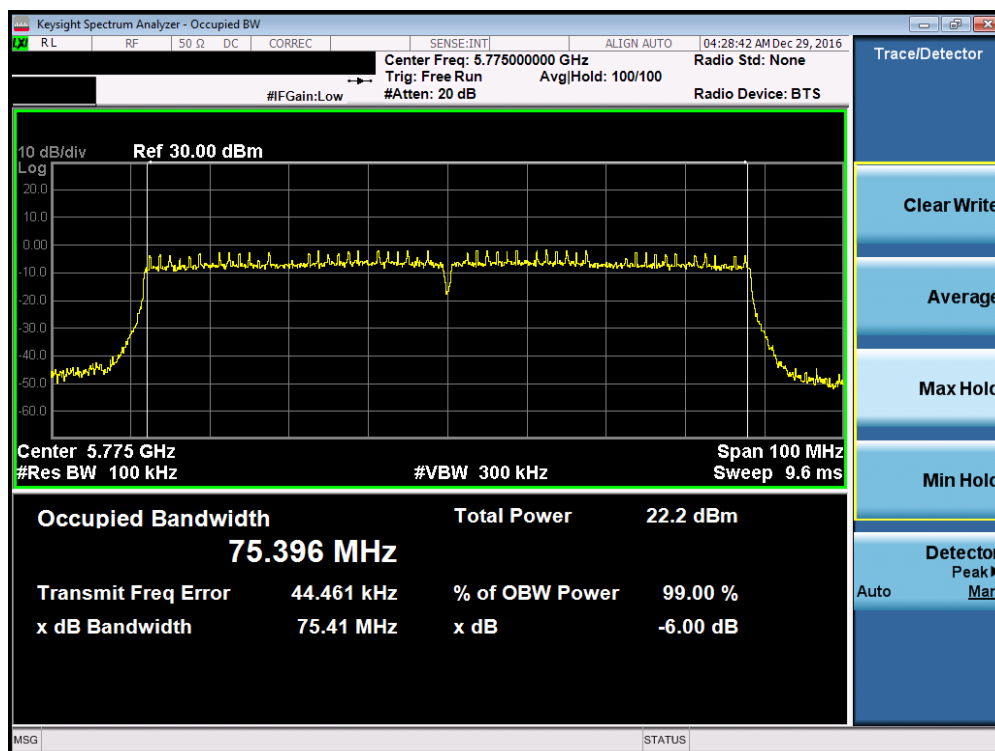

Plot 7-78. 6dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 57 of 260

7.4 UNII Output Power Measurement – 802.11a/n/ac

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3)

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r03, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm).

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(22.65) = 24.55\text{dBm}$.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(21.63) = 24.35\text{dBm}$.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm).

Test Procedure Used

KDB 789033 D02 v01r03 – Section E)3)b) Method PM-G
KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

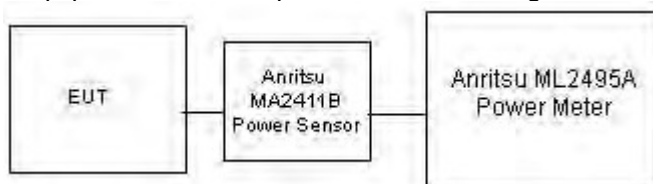


Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 58 of 260

Antenna-1 Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			802.11a	802.11n	802.11ac
5180	36	AVG	14.84	14.85	14.74
5200	40	AVG	14.84	14.86	14.82
5220	44	AVG	14.87	14.85	14.81
5240	48	AVG	14.78	14.80	14.89
5260	52	AVG	15.29	15.29	15.29
5280	56	AVG	15.19	15.26	15.27
5300	60	AVG	15.27	15.30	15.29
5320	64	AVG	15.10	15.11	15.07
5500	100	AVG	14.81	14.76	14.81
5520	104	AVG	14.83	14.71	14.75
5540	108	AVG	14.68	14.58	14.60
5560	112	AVG	14.77	14.76	14.70
5580	116	AVG	14.75	14.85	14.96
5600	120	AVG	15.05	15.14	14.99
5620	124	AVG	14.83	14.97	14.83
5640	128	AVG	14.82	15.12	15.08
5660	132	AVG	14.82	14.87	14.82
5680	136	AVG	15.02	14.80	14.84
5700	140	AVG	14.94	14.97	14.97
5720	144	AVG	14.69	14.68	14.59
5745	149	AVG	15.22	15.11	15.07
5765	153	AVG	15.31	15.36	15.31
5785	157	AVG	15.20	15.13	15.02
5805	161	AVG	15.15	15.12	15.10
5825	165	AVG	15.31	15.20	15.16

Table 7-6. 20MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 59 of 260

Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]	
			IEEE Transmission Mode	
			802.11n	802.11ac
5190	38	AVG	15.32	15.15
5230	46	AVG	15.27	15.10
5270	54	AVG	14.78	14.69
5310	62	AVG	14.82	14.70
5510	102	AVG	15.40	15.24
5550	110	AVG	15.47	15.29
5590	118	AVG	15.46	15.29
5630	126	AVG	14.50	14.40
5670	134	AVG	14.45	14.56
5710	142	AVG	14.55	14.63
5755	151	AVG	14.73	14.89
5795	159	AVG	14.82	14.80

Table 7-7. 40MHz BW (UNII) Maximum Conducted Output Power

5GHz (80MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	Detector	IEEE Transmission Mode
			802.11ac
5210	42	AVG	14.89
5290	58	AVG	14.56
5530	106	AVG	15.16
5610	122	AVG	15.34
5690	138	AVG	15.33
5775	155	AVG	15.04

Table 7-8. 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 60 of 260

Antenna-2 Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			802.11a	802.11n	802.11ac
5180	36	AVG	14.98	15.02	14.88
5200	40	AVG	15.02	15.01	15.06
5220	44	AVG	15.19	15.04	14.98
5240	48	AVG	15.10	15.07	15.08
5260	52	AVG	15.37	15.34	15.22
5280	56	AVG	15.42	15.25	15.27
5300	60	AVG	15.31	15.24	15.34
5320	64	AVG	15.41	15.29	15.45
5500	100	AVG	15.30	15.20	15.34
5520	104	AVG	15.11	15.29	15.14
5540	108	AVG	15.21	15.26	15.14
5560	112	AVG	15.25	15.23	15.32
5580	116	AVG	15.35	15.28	15.23
5600	120	AVG	15.29	15.24	15.32
5620	124	AVG	15.30	15.21	15.22
5640	128	AVG	15.23	15.30	15.26
5660	132	AVG	15.23	15.26	15.12
5680	136	AVG	15.28	15.26	15.14
5700	140	AVG	15.33	15.18	15.19
5720	144	AVG	15.13	15.20	15.13
5745	149	AVG	14.43	14.47	14.39
5765	153	AVG	14.42	14.45	14.41
5785	157	AVG	14.42	14.48	14.36
5805	161	AVG	15.16	15.45	15.40
5825	165	AVG	15.36	15.45	15.42

Table 7-9. 20MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 61 of 260

Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]	
			IEEE Transmission Mode	
			802.11n	802.11ac
5190	38	AVG	14.52	14.46
5230	46	AVG	14.65	14.62
5270	54	AVG	14.72	14.74
5310	62	AVG	14.95	14.83
5510	102	AVG	14.85	14.87
5550	110	AVG	14.78	14.79
5590	118	AVG	14.89	14.94
5630	126	AVG	14.86	14.89
5670	134	AVG	14.76	14.91
5710	142	AVG	14.87	14.85
5755	151	AVG	15.02	15.03
5795	159	AVG	15.10	15.05

Table 7-10. 40MHz BW (UNII) Maximum Conducted Output Power

5GHz (80MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	Detector	IEEE Transmission Mode
			802.11ac
5210	42	AVG	14.89
5290	58	AVG	15.11
5530	106	AVG	14.80
5610	122	AVG	14.82
5690	138	AVG	14.69
5775	155	AVG	15.01

Table 7-11. 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 62 of 260

MIMO Maximum Conducted Output Power Measurements

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			ANT1	ANT2	CDD
5180	36	AVG	14.84	14.98	17.92
5200	40	AVG	14.84	15.02	17.94
5220	44	AVG	14.87	15.19	18.04
5240	48	AVG	14.78	15.10	17.95
5260	52	AVG	15.29	15.37	18.34
5280	56	AVG	15.19	15.42	18.32
5300	60	AVG	15.27	15.31	18.30
5320	64	AVG	15.10	15.41	18.27
5500	100	AVG	14.81	15.30	18.07
5520	104	AVG	14.83	15.11	17.98
5540	108	AVG	14.68	15.21	17.96
5560	112	AVG	14.77	15.25	18.03
5580	116	AVG	14.75	15.35	18.07
5600	120	AVG	15.05	15.29	18.18
5620	124	AVG	14.83	15.30	18.08
5640	128	AVG	14.82	15.23	18.04
5660	132	AVG	14.82	15.23	18.04
5680	136	AVG	15.02	15.28	18.16
5700	140	AVG	14.94	15.33	18.15
5720	144	AVG	14.69	15.13	17.93
5745	149	AVG	15.22	14.43	17.85
5765	153	AVG	15.31	14.42	17.90
5785	157	AVG	15.20	14.42	17.84
5805	161	AVG	15.15	15.16	18.17
5825	165	AVG	15.31	15.36	18.35

Table 7-12. MIMO 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 63 of 260

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			ANT1	ANT2	MIMO
5180	36	AVG	14.85	15.02	17.95
5200	40	AVG	14.86	15.01	17.95
5220	44	AVG	14.85	15.04	17.96
5240	48	AVG	14.80	15.07	17.95
5260	52	AVG	15.29	15.34	18.33
5280	56	AVG	15.26	15.25	18.27
5300	60	AVG	15.30	15.24	18.28
5320	64	AVG	15.11	15.29	18.21
5500	100	AVG	14.76	15.20	18.00
5520	104	AVG	14.71	15.29	18.02
5540	108	AVG	14.58	15.26	17.94
5560	112	AVG	14.76	15.23	18.01
5580	116	AVG	14.85	15.28	18.08
5600	120	AVG	15.14	15.24	18.20
5620	124	AVG	14.97	15.21	18.10
5640	128	AVG	15.12	15.30	18.22
5660	132	AVG	14.87	15.26	18.08
5680	136	AVG	14.80	15.26	18.05
5700	140	AVG	14.97	15.18	18.09
5720	144	AVG	14.68	15.20	17.96
5745	149	AVG	15.11	14.47	17.81
5765	153	AVG	15.36	14.45	17.94
5785	157	AVG	15.13	14.48	17.83
5805	161	AVG	15.12	15.45	18.30
5825	165	AVG	15.20	15.45	18.34

Table 7-13. MIMO 20MHz BW 802.11n (UNII) Maximum Conducted Output Power

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 64 of 260

Freq [MHz]	Channel	Detector	5GHz (20MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			ANT1	ANT2	MIMO
5180	36	AVG	14.74	14.88	17.82
5200	40	AVG	14.82	15.06	17.95
5220	44	AVG	14.81	14.98	17.91
5240	48	AVG	14.89	15.08	18.00
5260	52	AVG	15.29	15.22	18.27
5280	56	AVG	15.27	15.27	18.28
5300	60	AVG	15.29	15.34	18.33
5320	64	AVG	15.07	15.45	18.27
5500	100	AVG	14.81	15.34	18.09
5520	104	AVG	14.75	15.14	17.96
5540	108	AVG	14.60	15.14	17.89
5560	112	AVG	14.70	15.32	18.03
5580	116	AVG	14.96	15.23	18.11
5600	120	AVG	14.99	15.32	18.17
5620	124	AVG	14.83	15.22	18.04
5640	128	AVG	15.08	15.26	18.18
5660	132	AVG	14.82	15.12	17.98
5680	136	AVG	14.84	15.14	18.00
5700	140	AVG	14.97	15.19	18.09
5720	144	AVG	14.59	15.13	17.88
5745	149	AVG	15.07	14.39	17.75
5765	153	AVG	15.31	14.41	17.89
5785	157	AVG	15.02	14.36	17.71
5805	161	AVG	15.10	15.40	18.26
5825	165	AVG	15.16	15.42	18.30

Table 7-14. MIMO 20MHz BW 802.11ac (UNII) Maximum Conducted Output Power

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 65 of 260

Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			ANT1	ANT2	MIMO
5190	38	AVG	15.32	14.52	17.95
5230	46	AVG	15.27	14.65	17.98
5270	54	AVG	14.78	14.72	17.76
5310	62	AVG	14.82	14.95	17.90
5510	102	AVG	15.40	14.85	18.14
5550	110	AVG	15.47	14.78	18.15
5590	118	AVG	15.46	14.89	18.19
5630	126	AVG	14.50	14.86	17.69
5670	134	AVG	14.45	14.76	17.62
5710	142	AVG	14.55	14.87	17.72
5755	151	AVG	14.73	15.02	17.89
5795	159	AVG	14.82	15.10	17.97

Table 7-15. MIMO 40MHz BW 802.11n (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]		
			IEEE Transmission Mode		
			ANT1	ANT2	MIMO
5190	38	AVG	15.15	14.46	17.83
5230	46	AVG	15.10	14.62	17.88
5270	54	AVG	14.69	14.74	17.73
5310	62	AVG	14.70	14.83	17.78
5510	102	AVG	15.24	14.87	18.07
5550	110	AVG	15.29	14.79	18.06
5590	118	AVG	15.29	14.94	18.13
5630	126	AVG	14.40	14.89	17.66
5670	134	AVG	14.56	14.91	17.75
5710	142	AVG	14.63	14.85	17.75
5755	151	AVG	14.89	15.03	17.97
5795	159	AVG	14.80	15.05	17.94

Table 7-16. MIMO 40MHz BW 802.11ac (UNII) Maximum Conducted Output Power

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 66 of 260

5GHz (80MHz) Conducted Power [dBm]					
Freq [MHz]	Channel	Detector	IEEE Transmission Mode		
			ANT1	ANT2	MIMO
5210	42	AVG	14.89	14.89	17.90
5290	58	AVG	14.56	15.11	17.85
5530	106	AVG	15.16	14.80	17.99
5610	122	AVG	15.34	14.82	18.10
5690	138	AVG	15.33	14.69	18.03
5775	155	AVG	15.04	15.01	18.04

Table 7-17. MIMO 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power

Note:

Per KDB 662911 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 5180MHz the average conducted output power was measured to be 14.85 dBm for Antenna-1 and 15.02 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(14.85 \text{ dBm} + 15.02 \text{ dBm}) = (30.55 \text{ mW} + 31.77 \text{ mW}) = 62.32 \text{ mW} = 17.95 \text{ dBm}$$

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 67 of 260

7.5 Maximum Power Spectral Density – 802.11a/n/ac

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3)

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r03, and at the appropriate frequencies. Method SA-1, as defined in KDB 789033 D02 v01r03, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

KDB 789033 D02 v01r03 – Section F

KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-4. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 68 of 260

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.3

/2017


© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.

Antenna-1 Power Spectral Density Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]	Pass / Fail
Band 1	5180	36	a	6	6.29	11.0	-4.71	Pass
	5200	40	a	6	6.10	11.0	-4.90	Pass
	5240	48	a	6	6.35	11.0	-4.65	Pass
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	6.50	11.0	-4.50	Pass
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	6.43	11.0	-4.57	Pass
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	6.11	11.0	-4.89	Pass
	5190	38	n (40MHz)	13.5/15 (MCS0)	2.75	11.0	-8.25	Pass
	5230	46	n (40MHz)	13.5/15 (MCS0)	2.15	11.0	-8.85	Pass
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	0.12	11.0	-10.88	Pass
Band 2A	5260	52	a	6	7.20	11.0	-3.80	Pass
	5280	56	a	6	6.82	11.0	-4.19	Pass
	5320	64	a	6	5.87	11.0	-5.13	Pass
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	7.40	11.0	-3.60	Pass
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	6.68	11.0	-4.32	Pass
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	6.80	11.0	-4.20	Pass
	5270	54	n (40MHz)	13.5/15 (MCS0)	3.67	11.0	-7.33	Pass
	5310	62	n (40MHz)	13.5/15 (MCS0)	2.54	11.0	-8.46	Pass
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	0.45	11.0	-10.55	Pass
Band 2C	5500	100	a	6	6.44	11.0	-4.56	Pass
	5600	120	a	6	5.69	11.0	-5.31	Pass
	5720	144	a	6	6.62	11.0	-4.38	Pass
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	6.71	11.0	-4.29	Pass
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	5.84	11.0	-5.16	Pass
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	7.10	11.0	-3.90	Pass
	5510	102	n (40MHz)	13.5/15 (MCS0)	3.04	11.0	-7.96	Pass
	5590	118	n (40MHz)	13.5/15 (MCS0)	2.09	11.0	-8.91	Pass
	5710	142	n (40MHz)	13.5/15 (MCS0)	4.12	11.0	-6.89	Pass
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-0.15	11.0	-11.15	Pass
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	-0.86	11.0	-11.86	Pass
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-2.51	11.0	-13.51	Pass

Table 7-18. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements

FCC ID: A3LSCV35		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 69 of 260

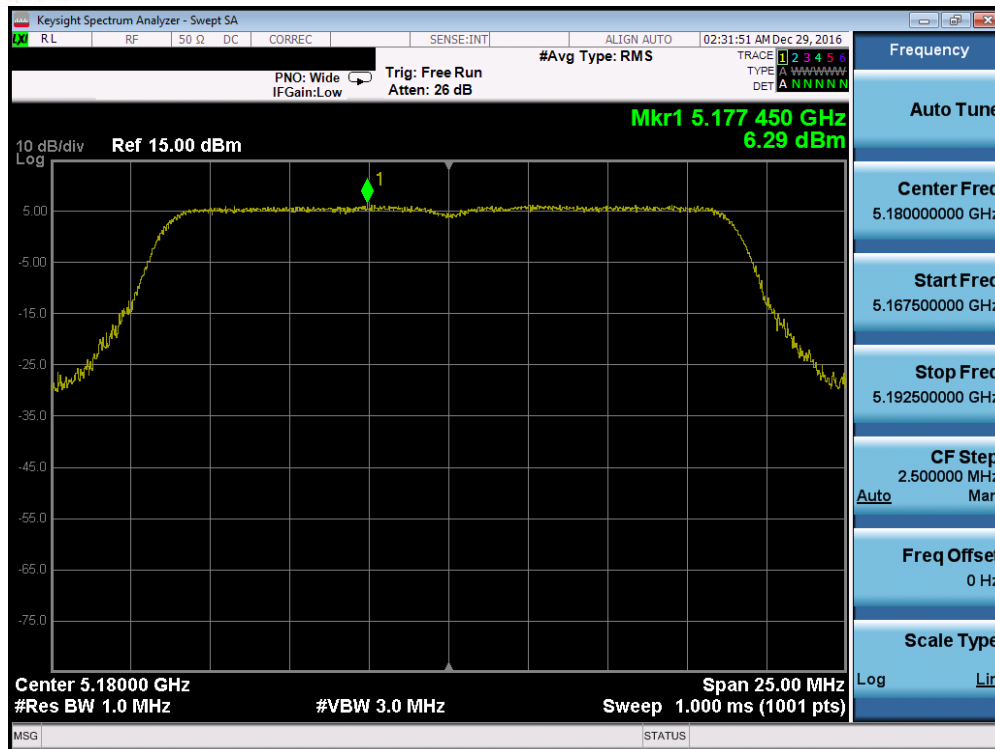


Plot 7-79. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

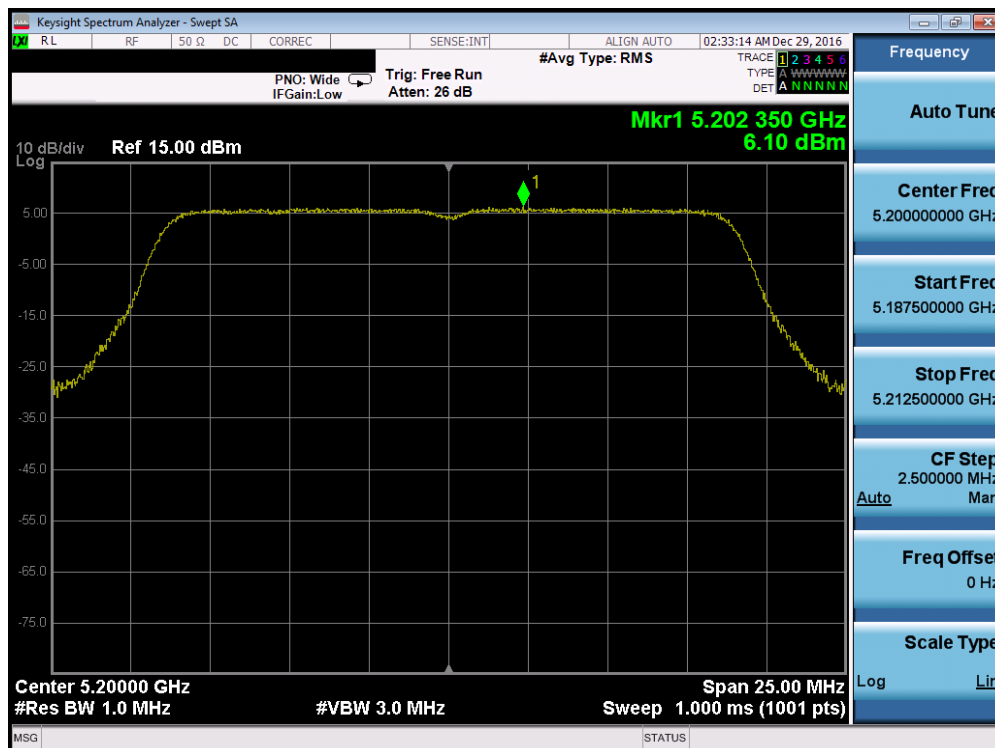


Plot 7-80. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 70 of 260

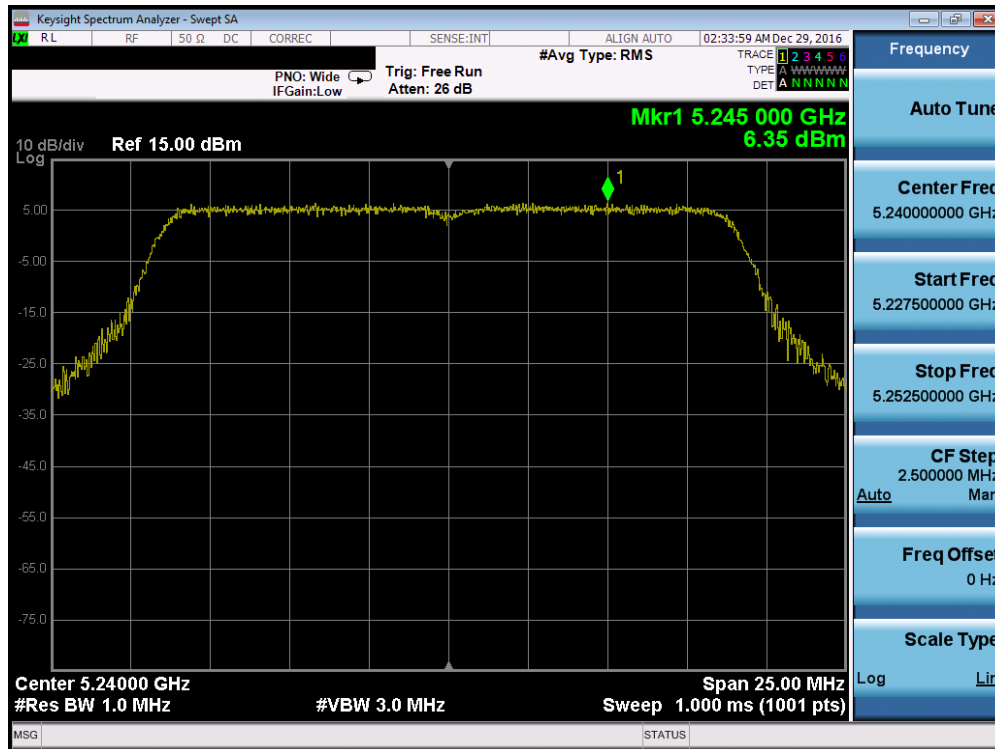


Plot 7-81. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

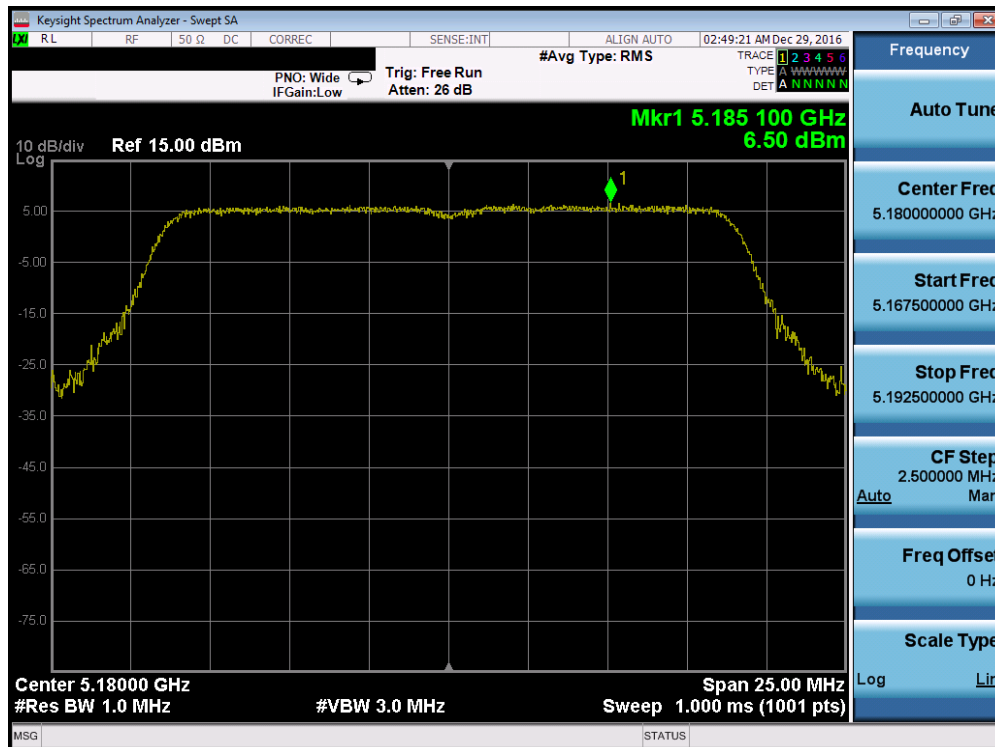


Plot 7-82. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 71 of 260

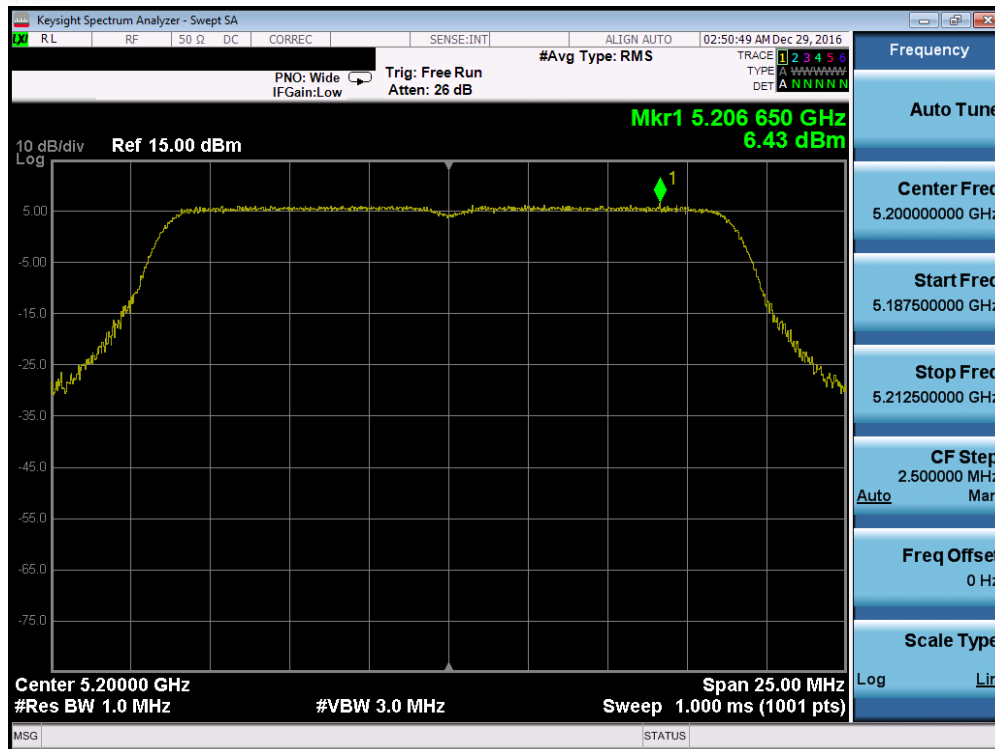

Plot 7-83. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

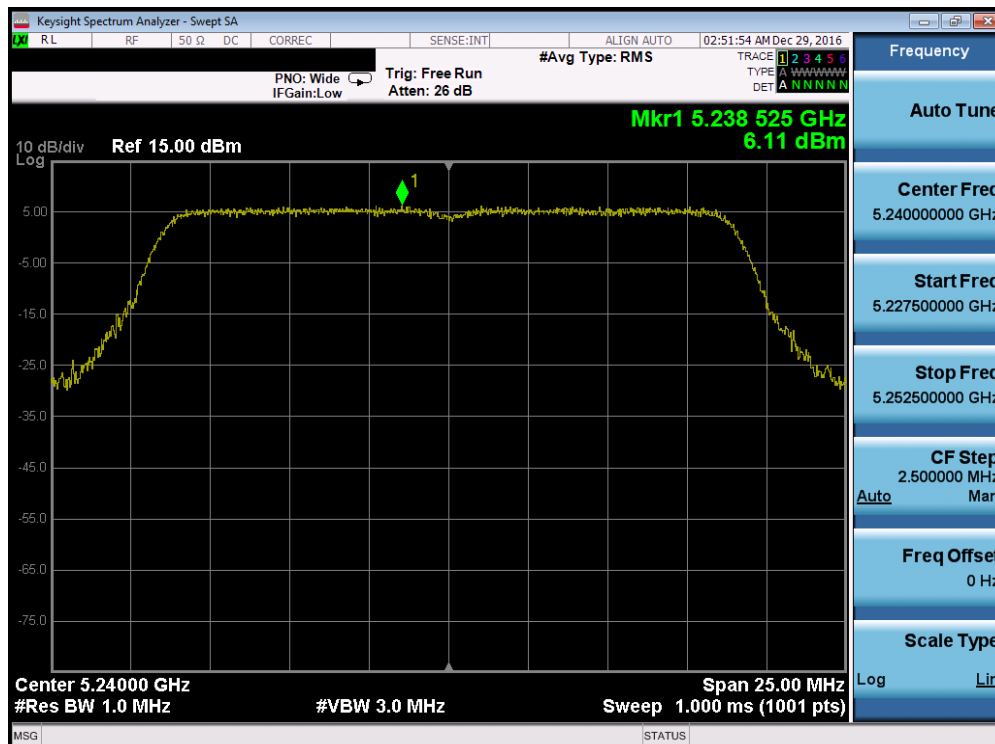


Plot 7-84. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 72 of 260




Plot 7-85. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

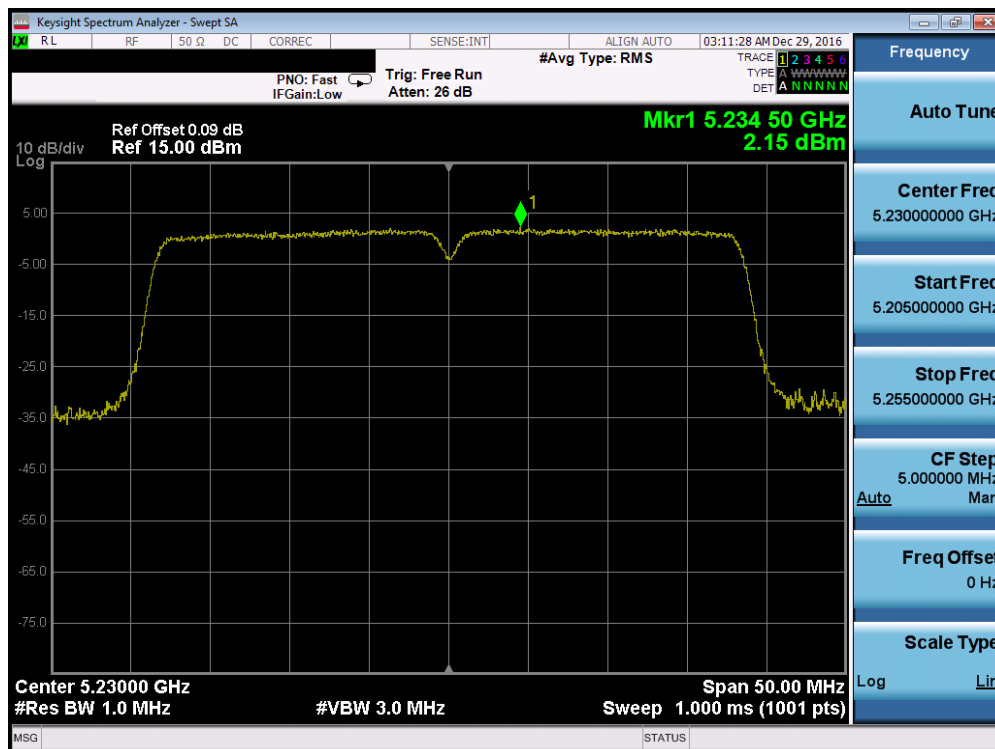


Plot 7-86. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 73 of 260

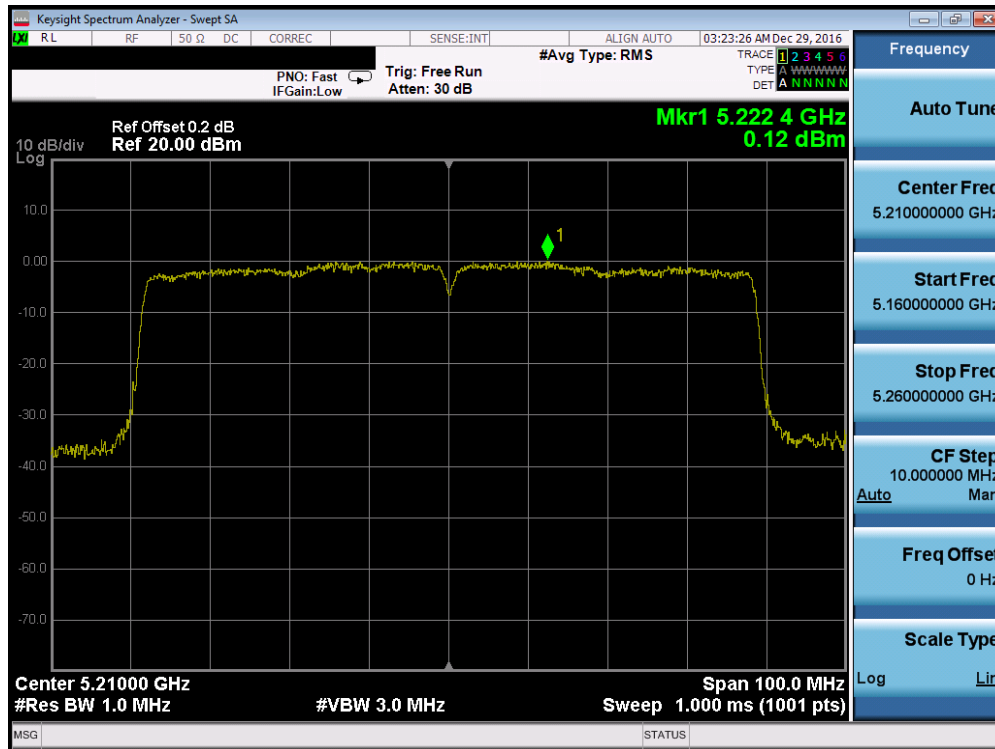


Plot 7-87. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

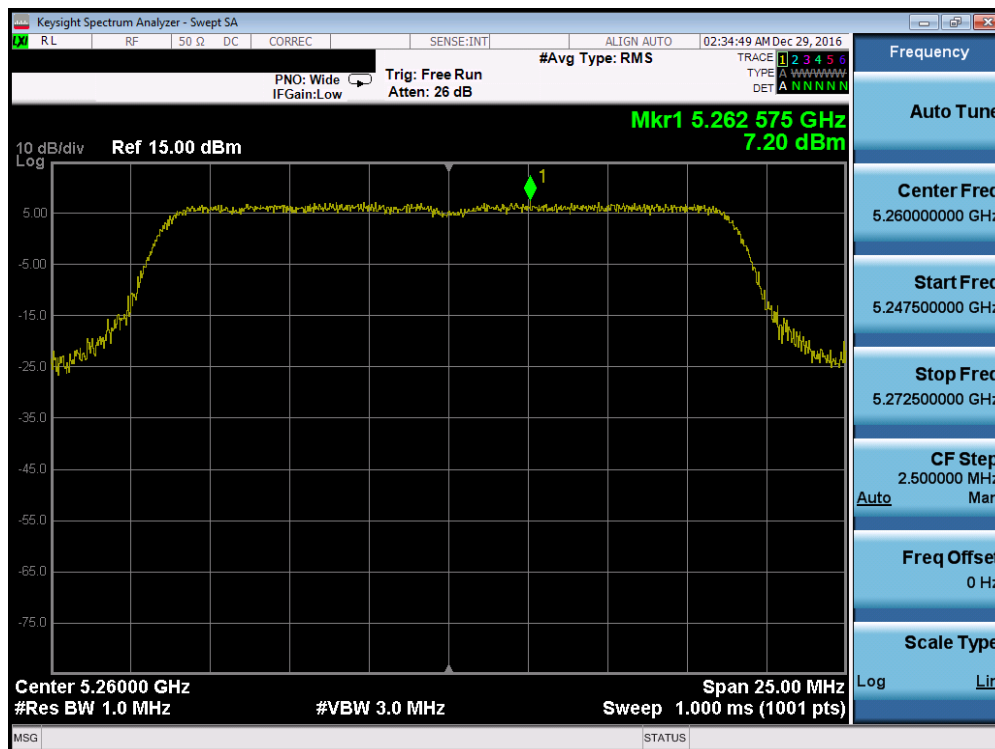


Plot 7-88. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 74 of 260

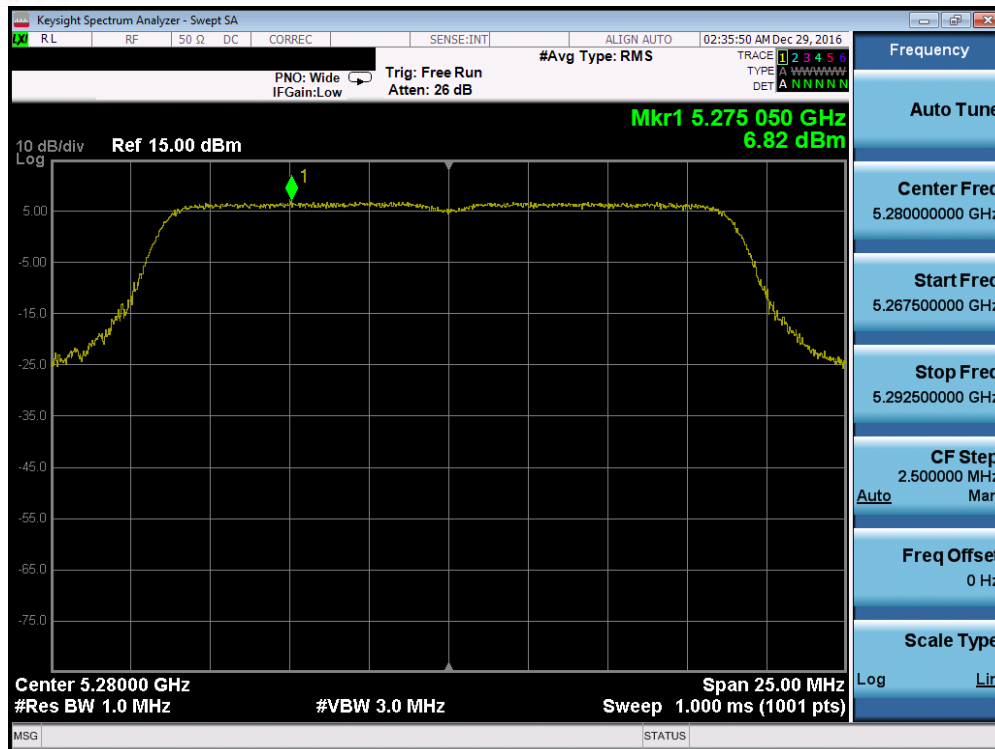


Plot 7-89. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 56)

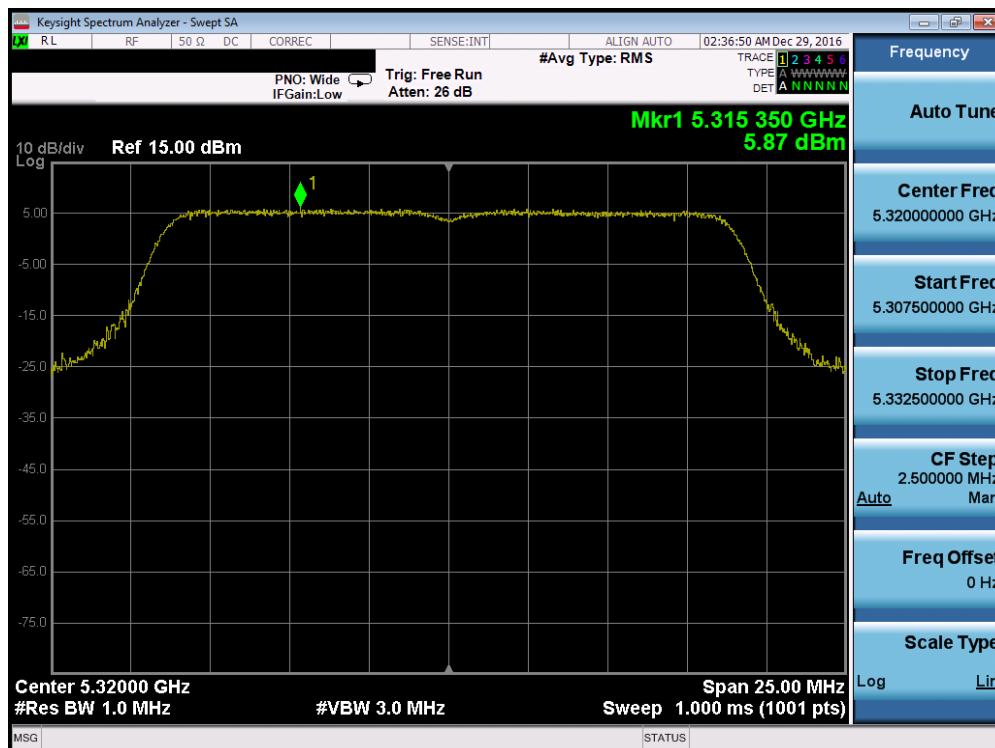


Plot 7-90. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 75 of 260

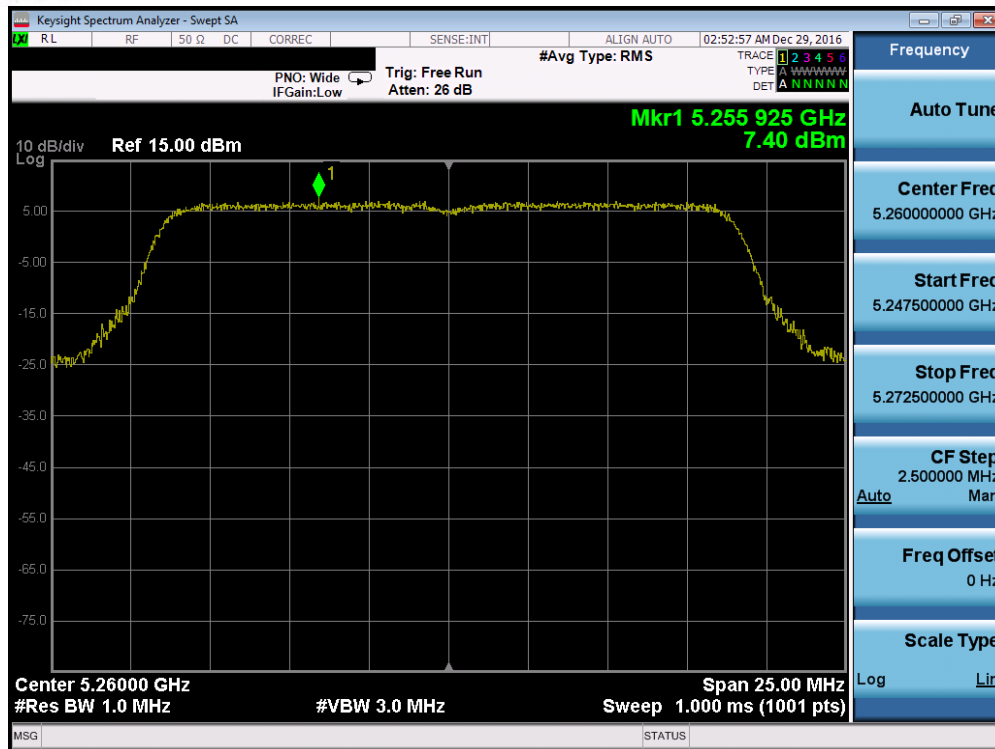


Plot 7-91. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

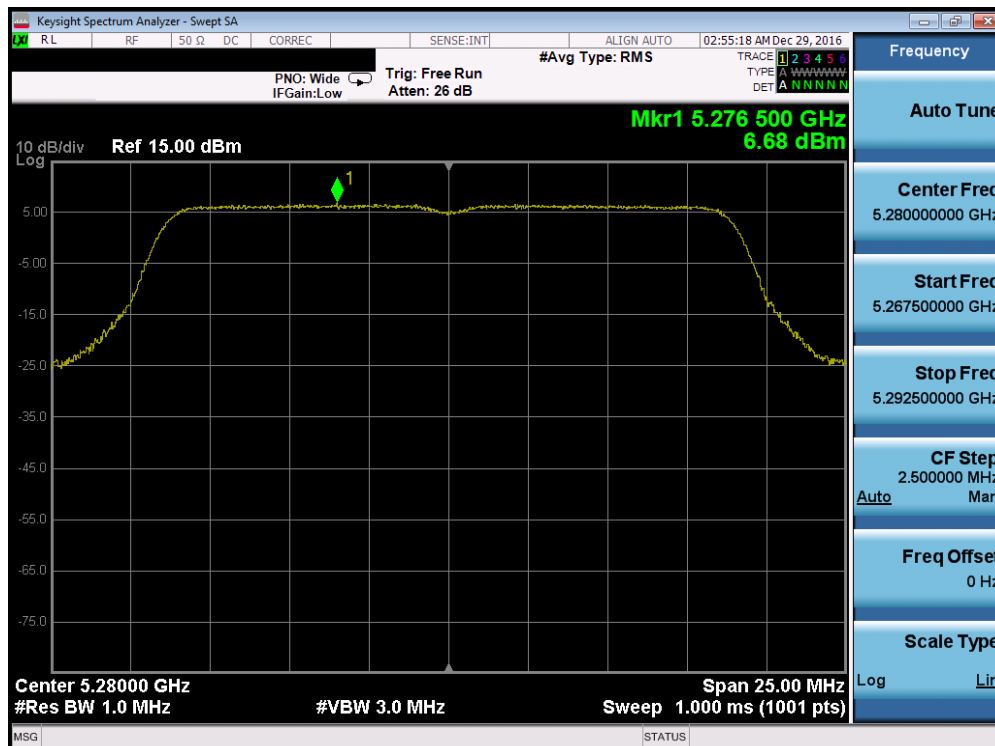


Plot 7-92. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 76 of 260

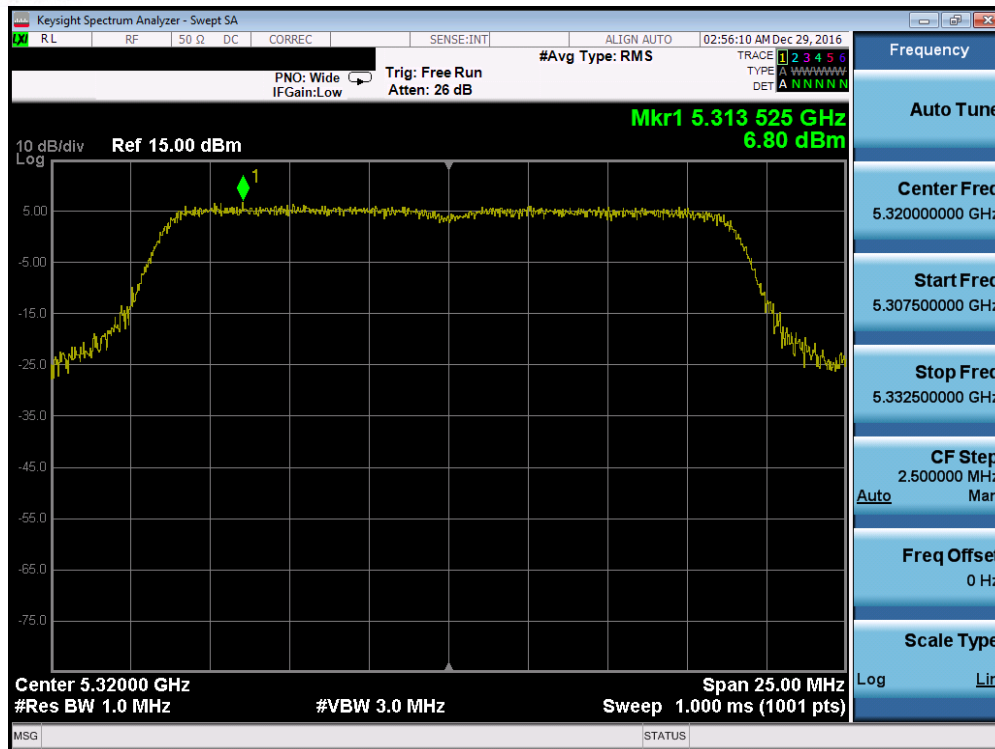


Plot 7-93. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

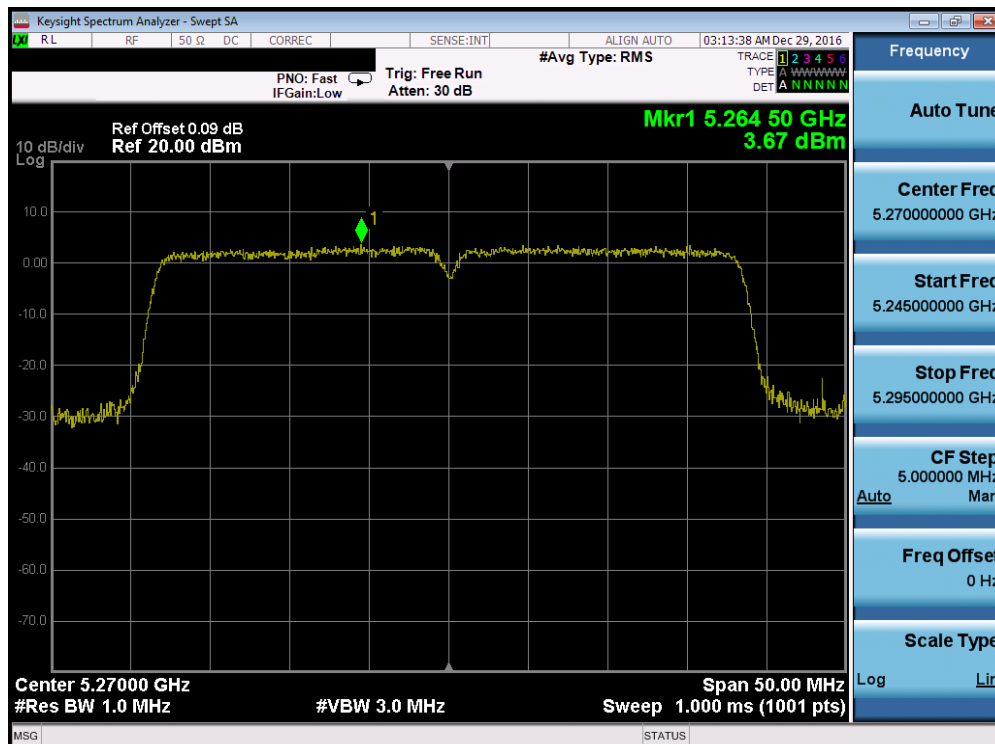


Plot 7-94. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 77 of 260

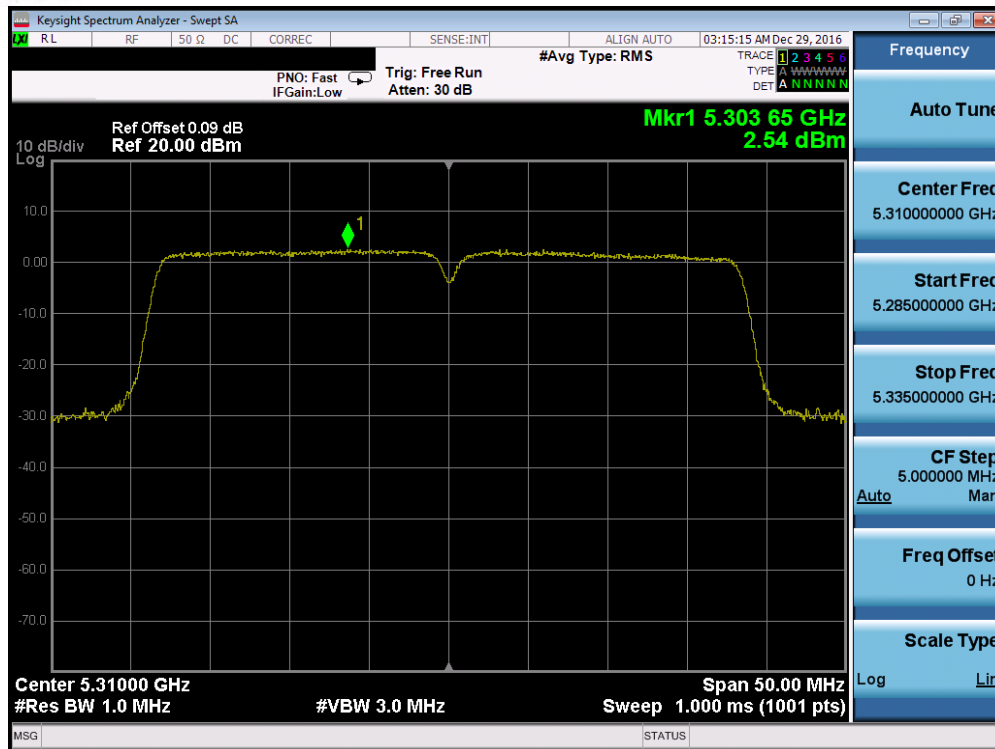


Plot 7-95. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

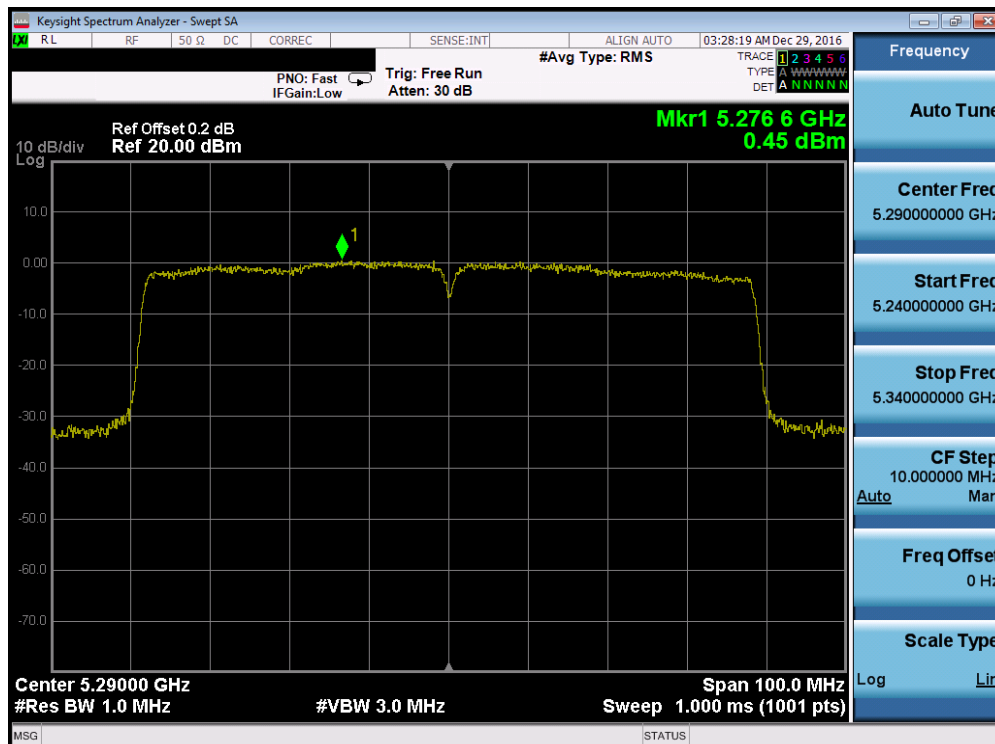


Plot 7-96. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 78 of 260

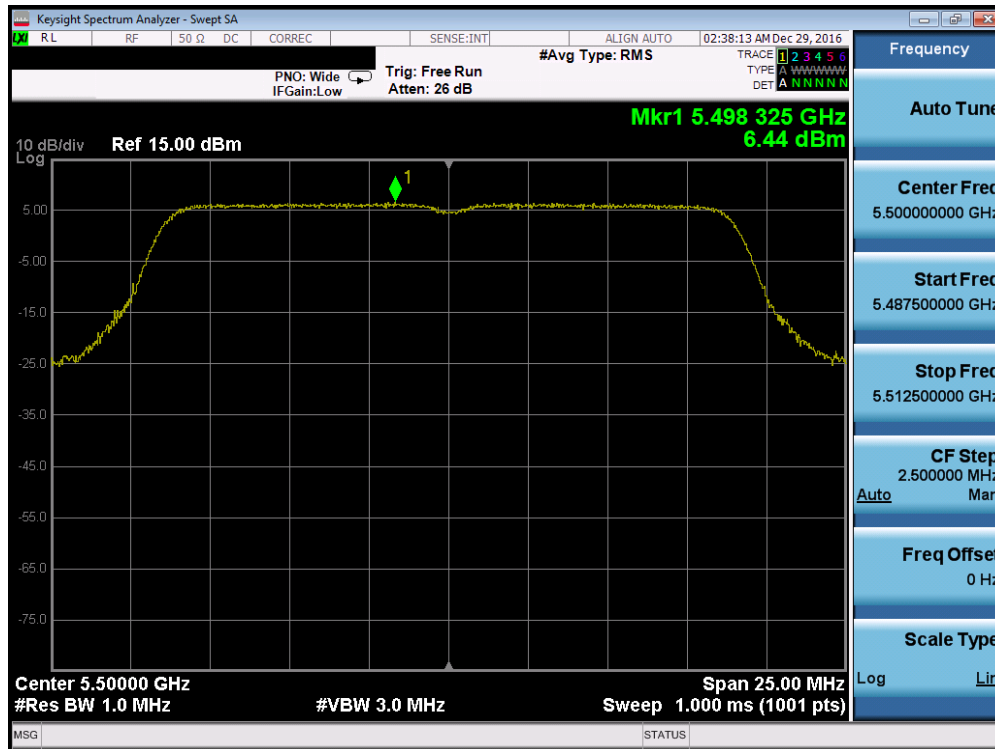


Plot 7-97. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 100)

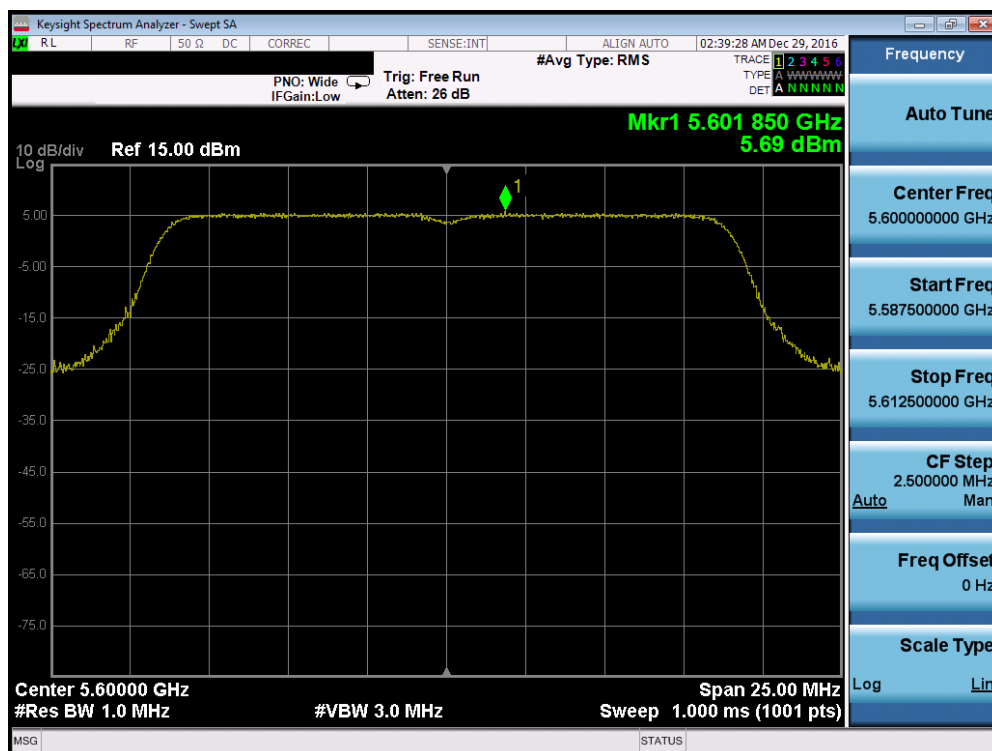


Plot 7-98. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 120)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 79 of 260

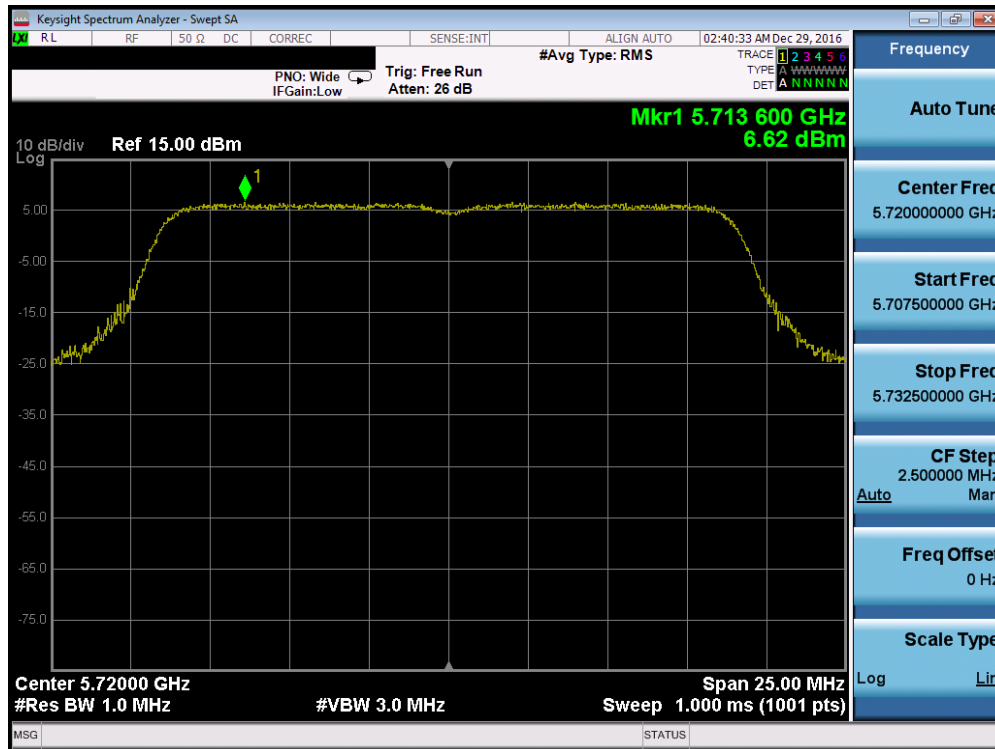


Plot 7-99. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 144)

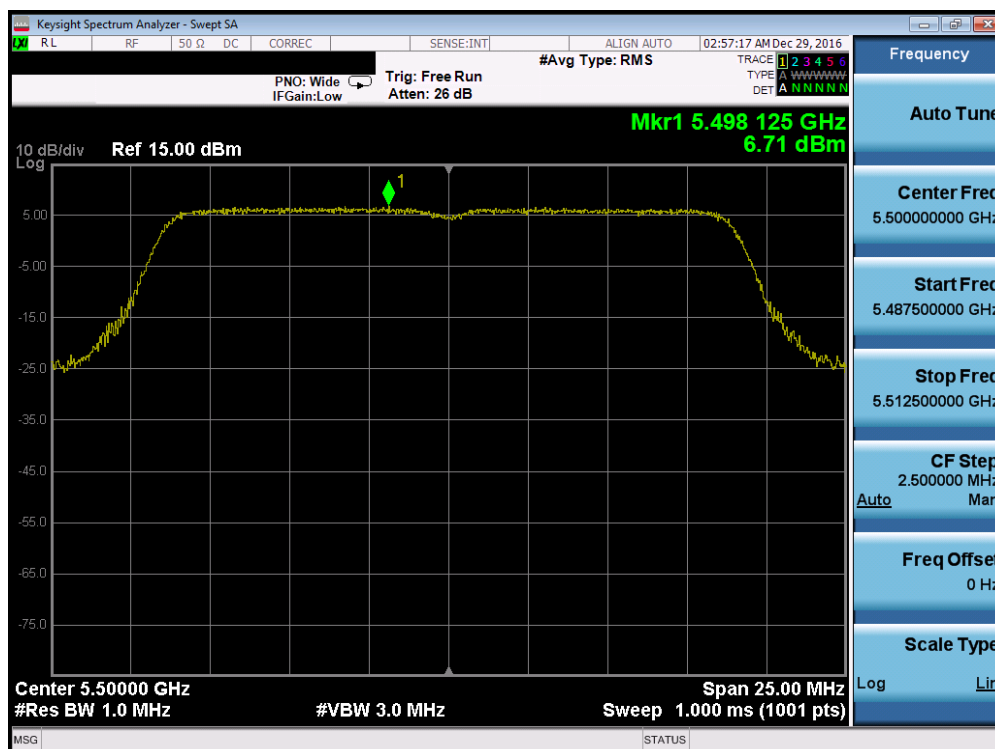


Plot 7-100. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 80 of 260

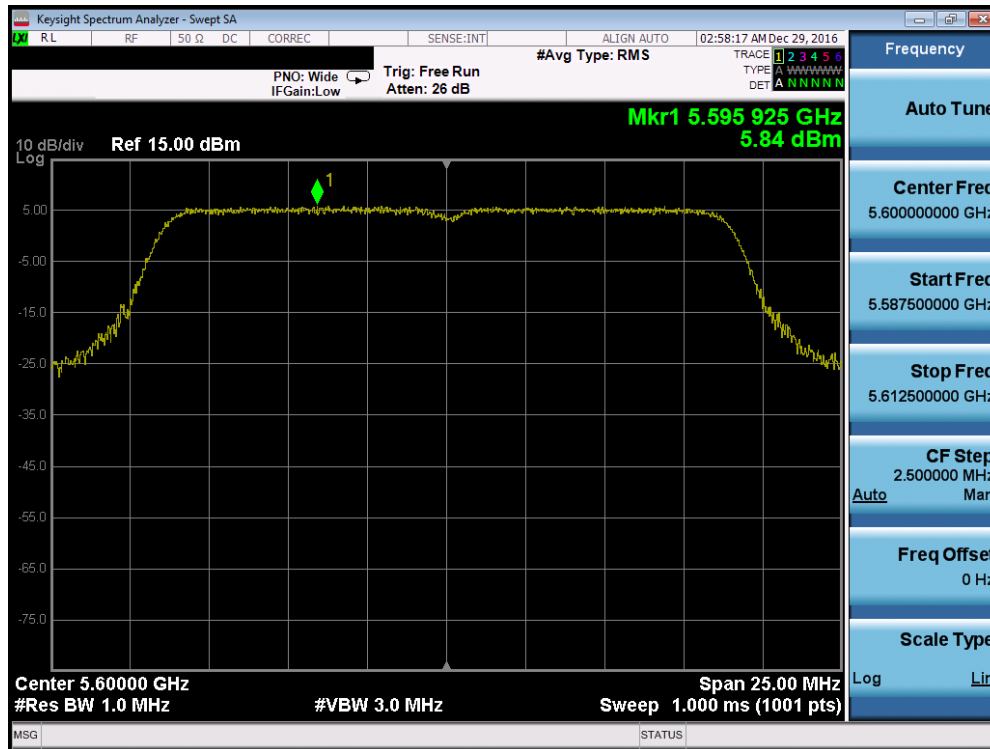


Plot 7-101. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

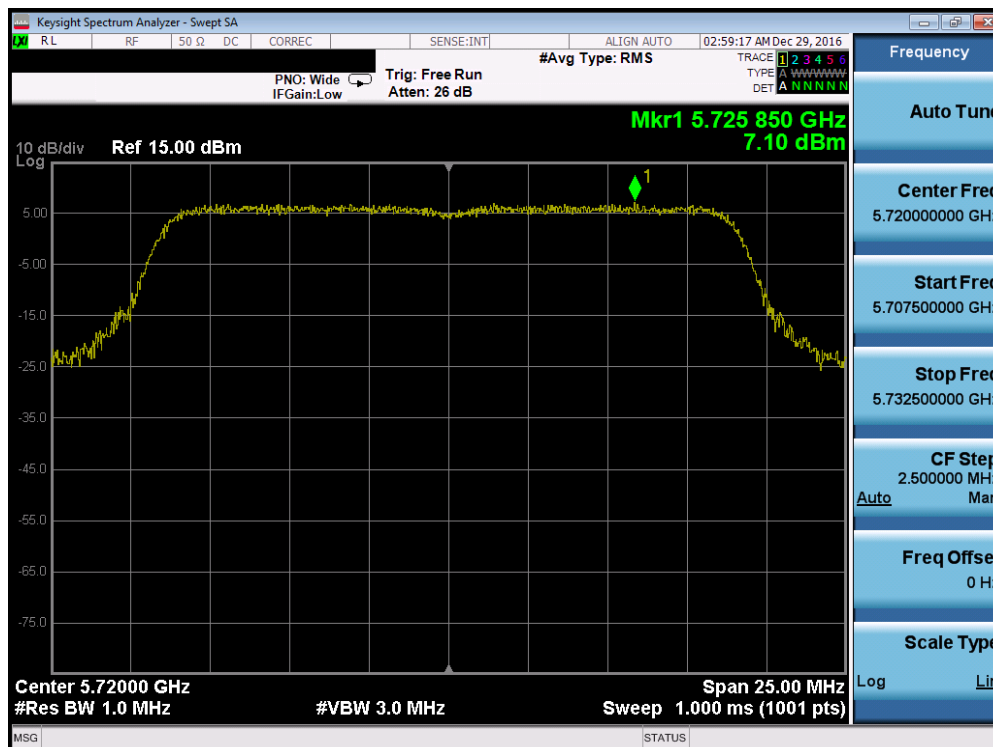


Plot 7-102. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 81 of 260

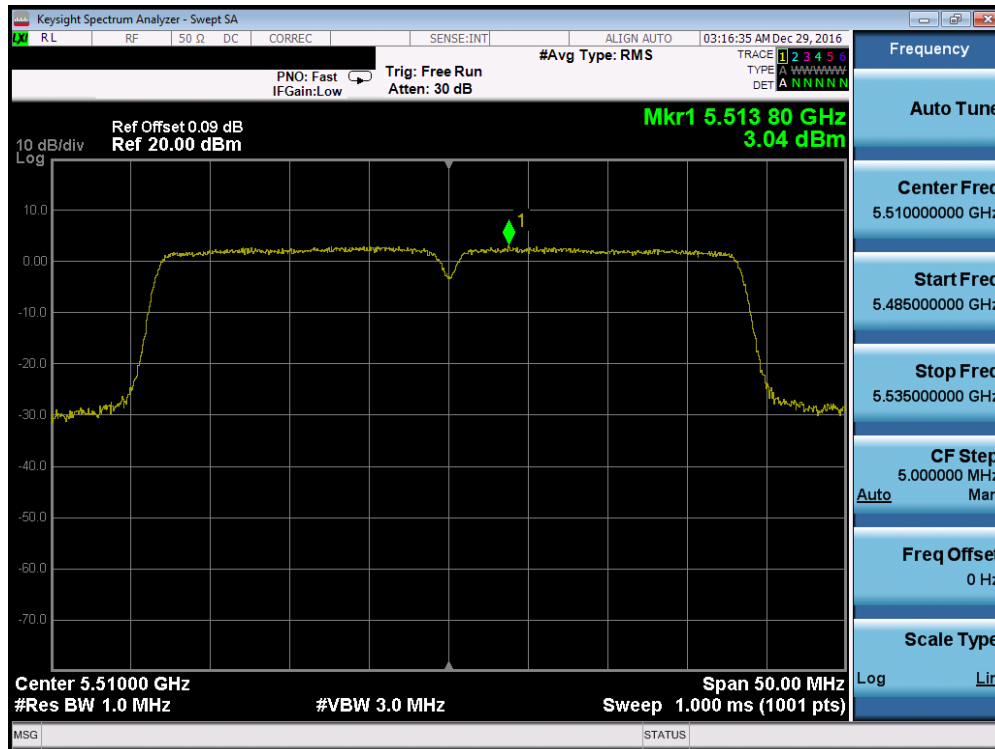


Plot 7-103. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

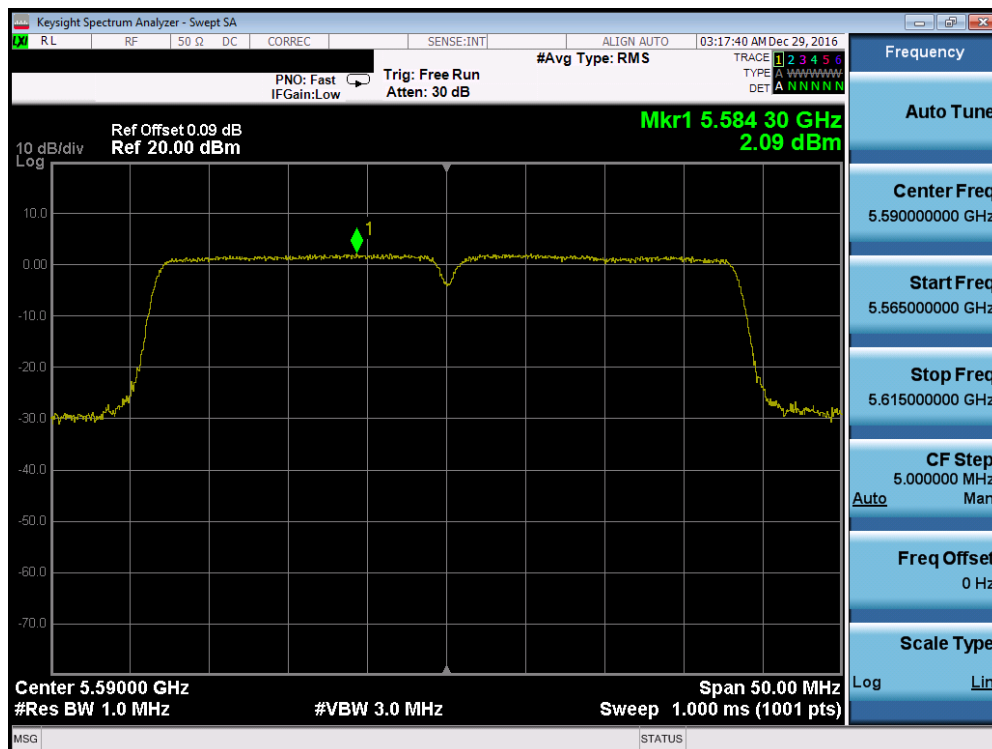


Plot 7-104. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 82 of 260

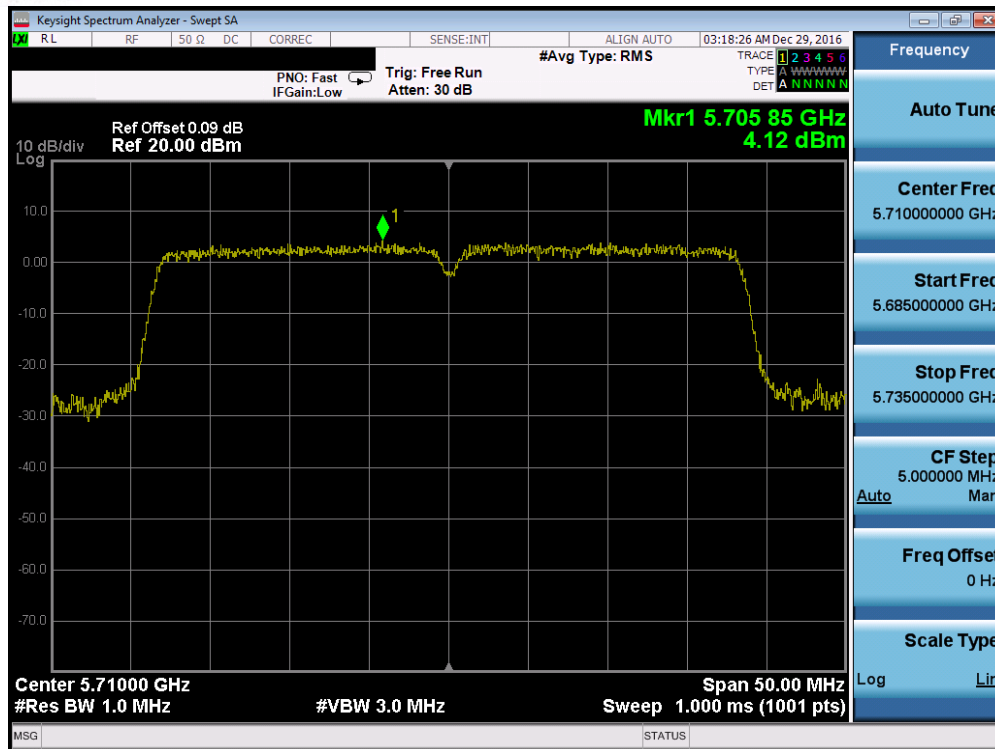


Plot 7-105. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

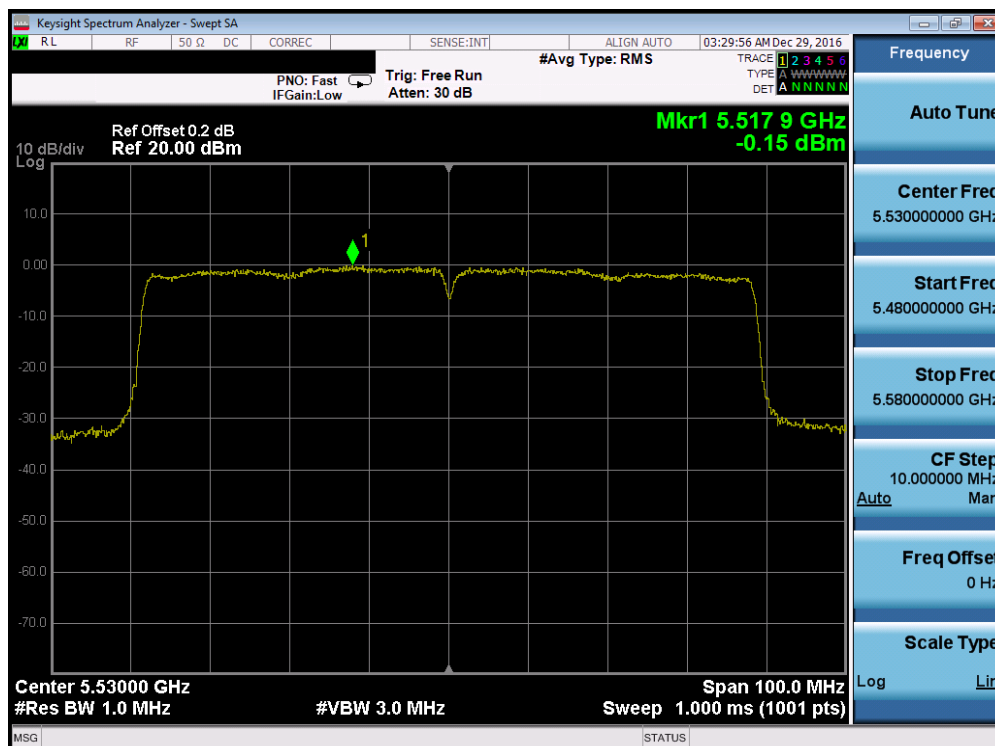


Plot 7-106. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 83 of 260

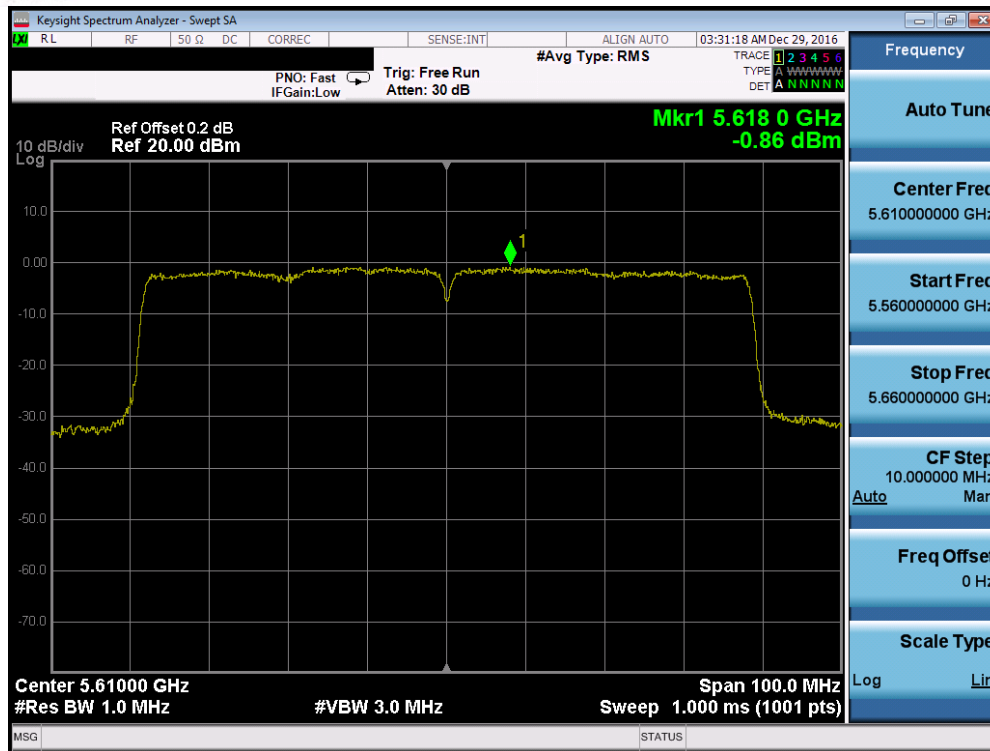

Plot 7-107. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

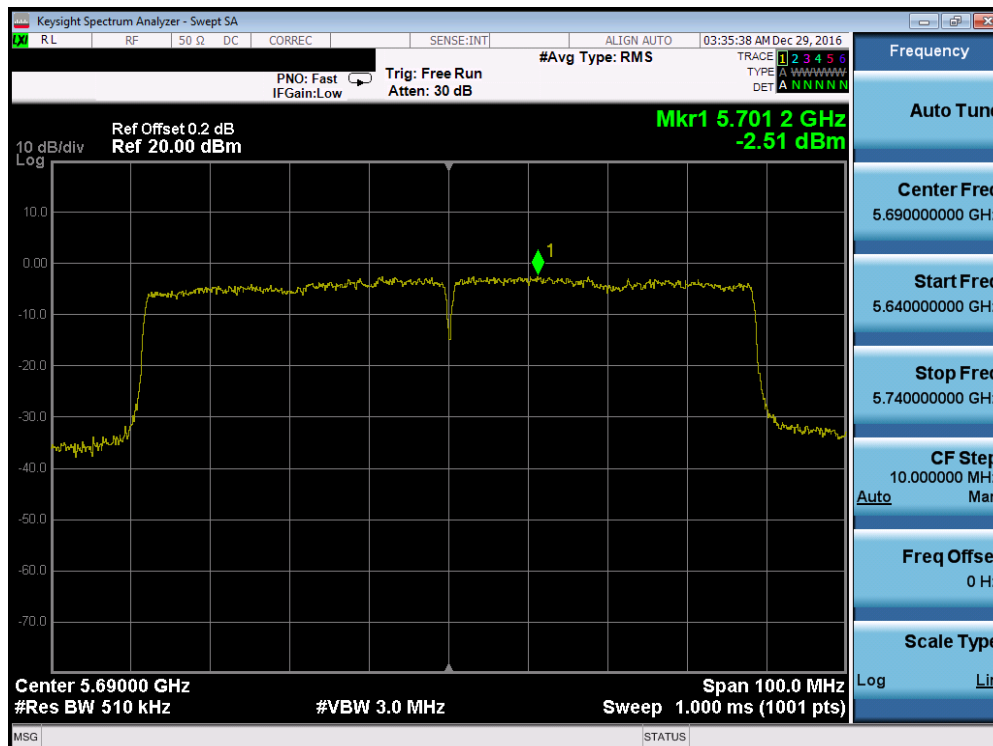


Plot 7-108. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 84 of 260


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]	Pass / Fail
Band 3	5745	149	a	6	3.31	30.0	-26.69	Pass
	5785	157	a	6	3.15	30.0	-26.85	Pass
	5825	165	a	6	2.65	30.0	-27.35	Pass
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	3.45	30.0	-26.55	Pass
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	2.93	30.0	-27.07	Pass
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	2.79	30.0	-27.21	Pass
	5755	151	n (40MHz)	13.5/15 (MCS0)	1.20	30.0	-28.80	Pass
	5795	159	n (40MHz)	13.5/15 (MCS0)	0.96	30.0	-29.04	Pass
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	1.92	30.0	-28.08	Pass

Table 7-19. Band 3 Conducted Power Spectral Density Measurements

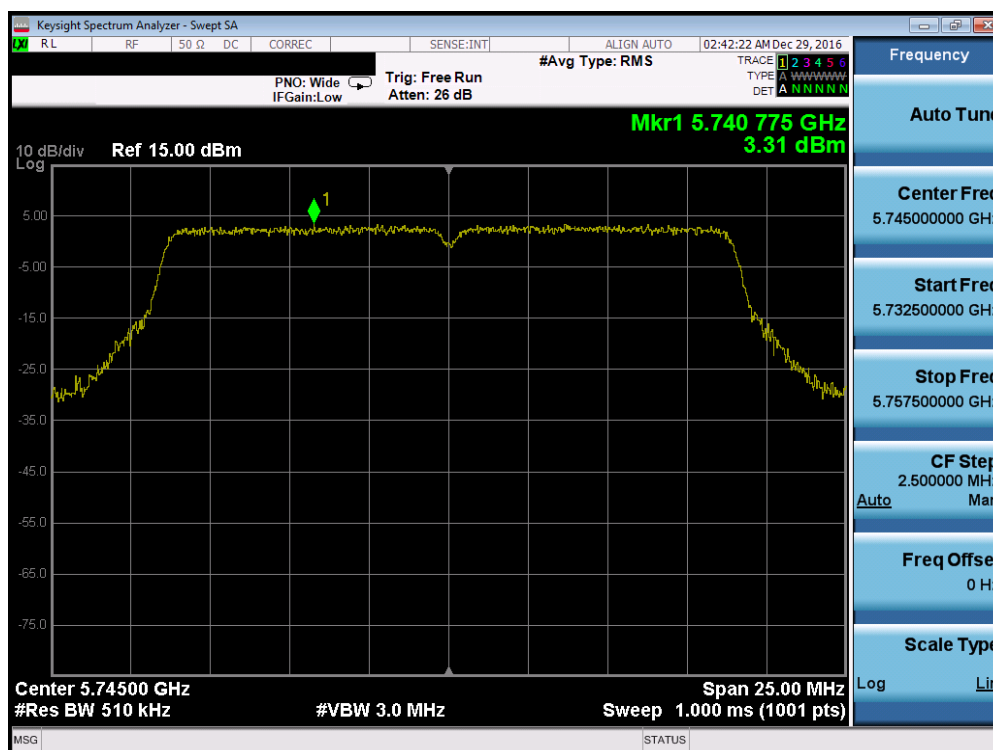


Plot 7-109. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 149)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 85 of 260

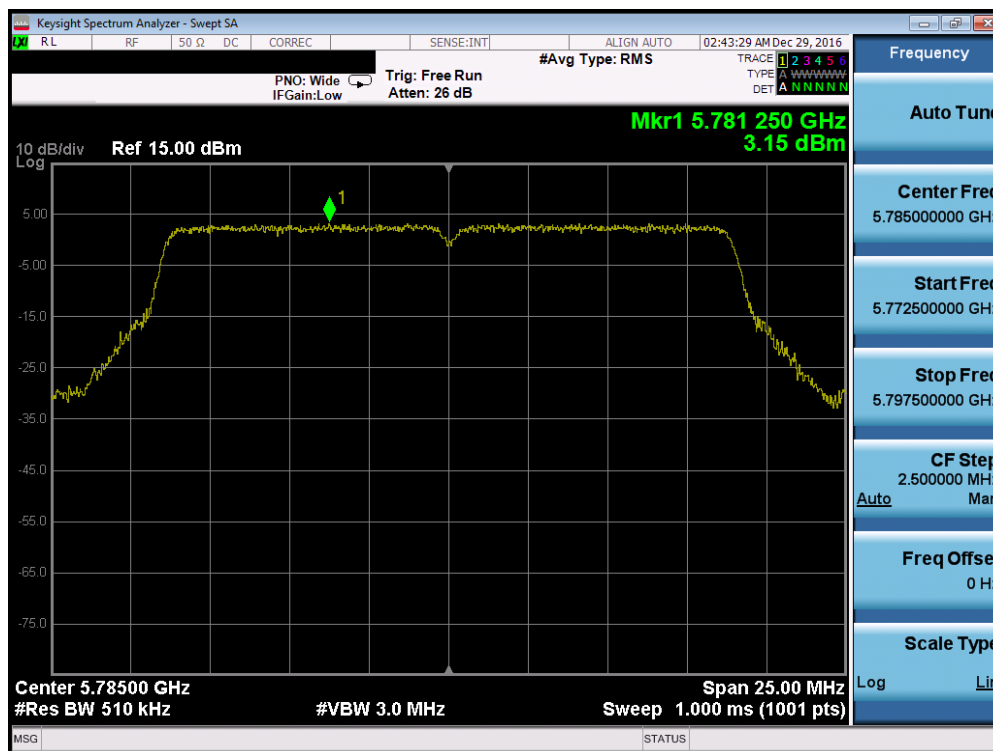


Plot 7-110. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 157)

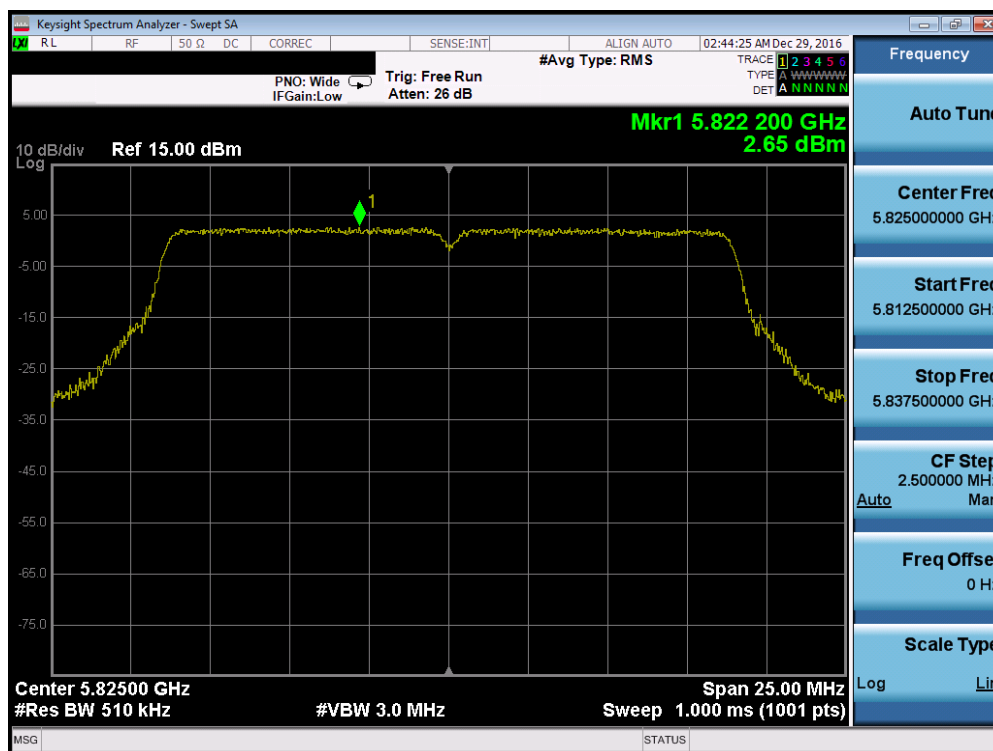


Plot 7-111. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 86 of 260

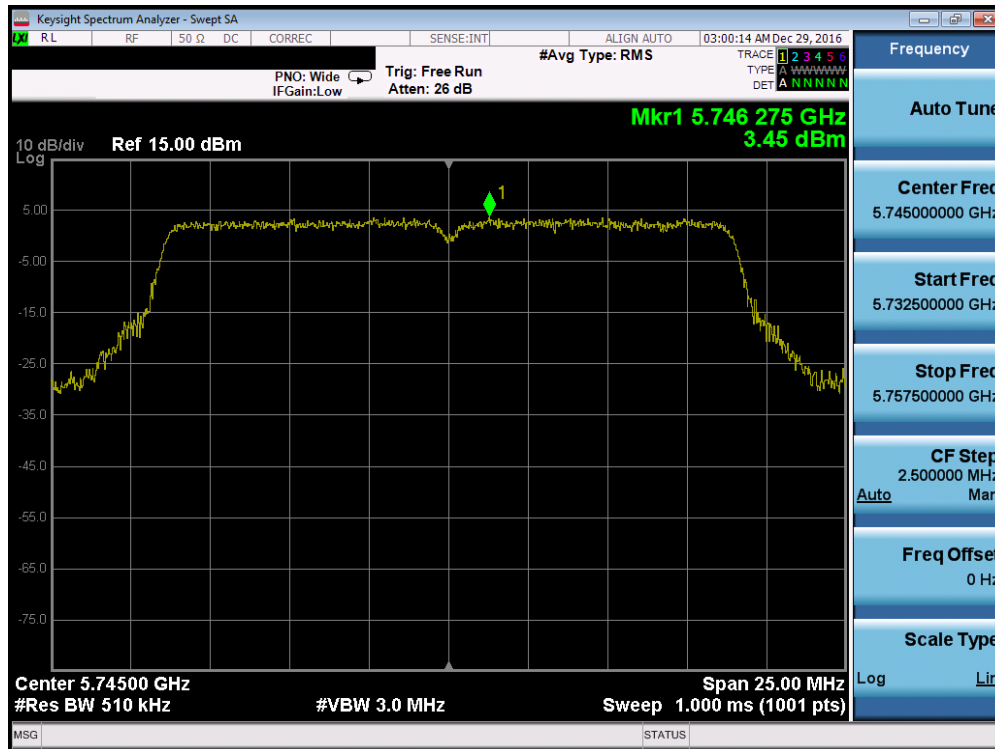


Plot 7-112. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

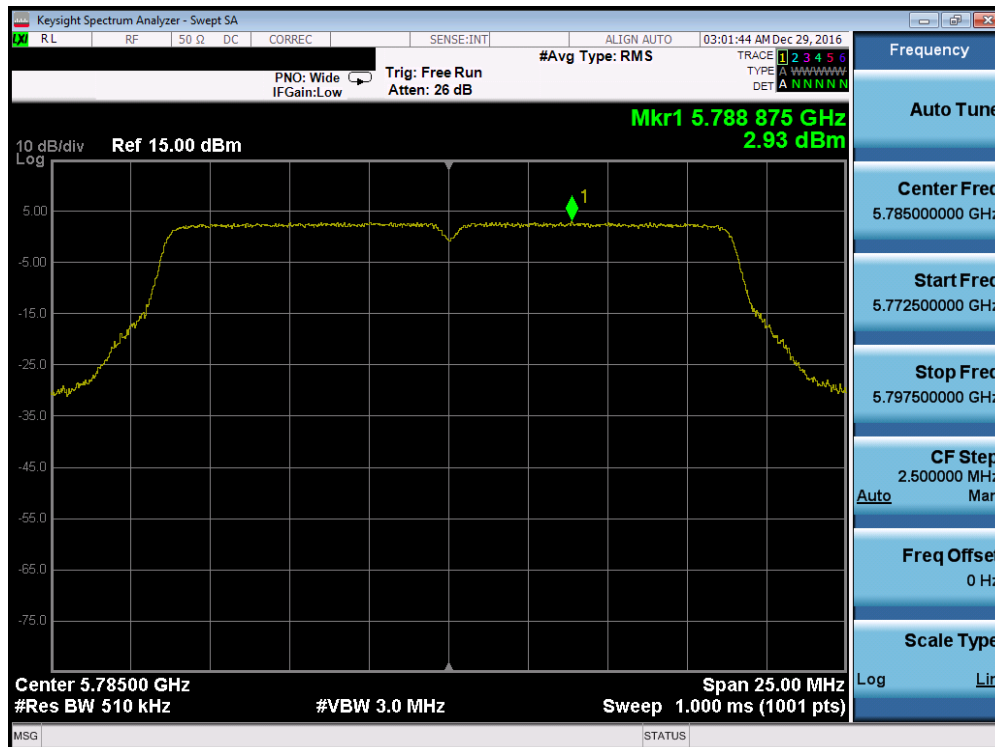


Plot 7-113. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 87 of 260

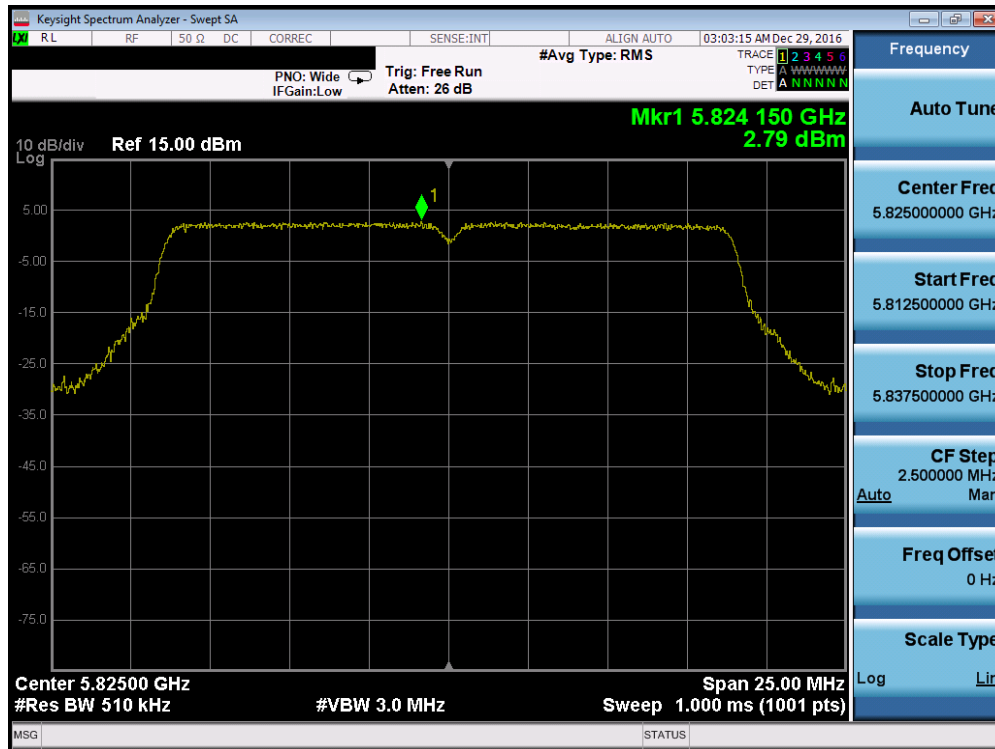


Plot 7-114. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

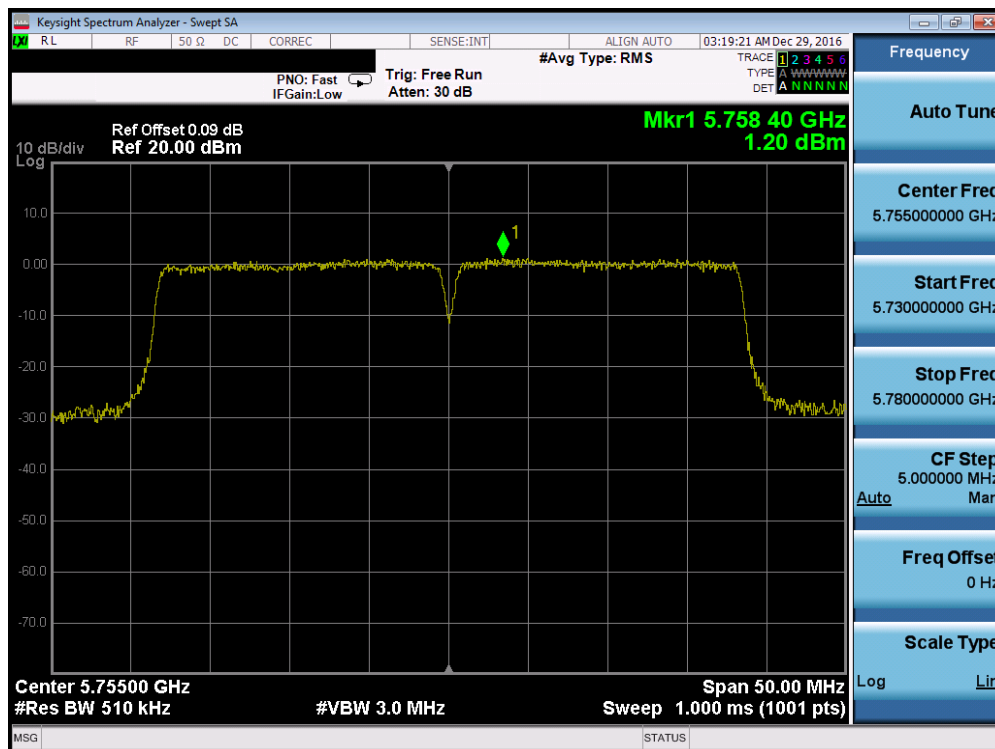


Plot 7-115. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 88 of 260

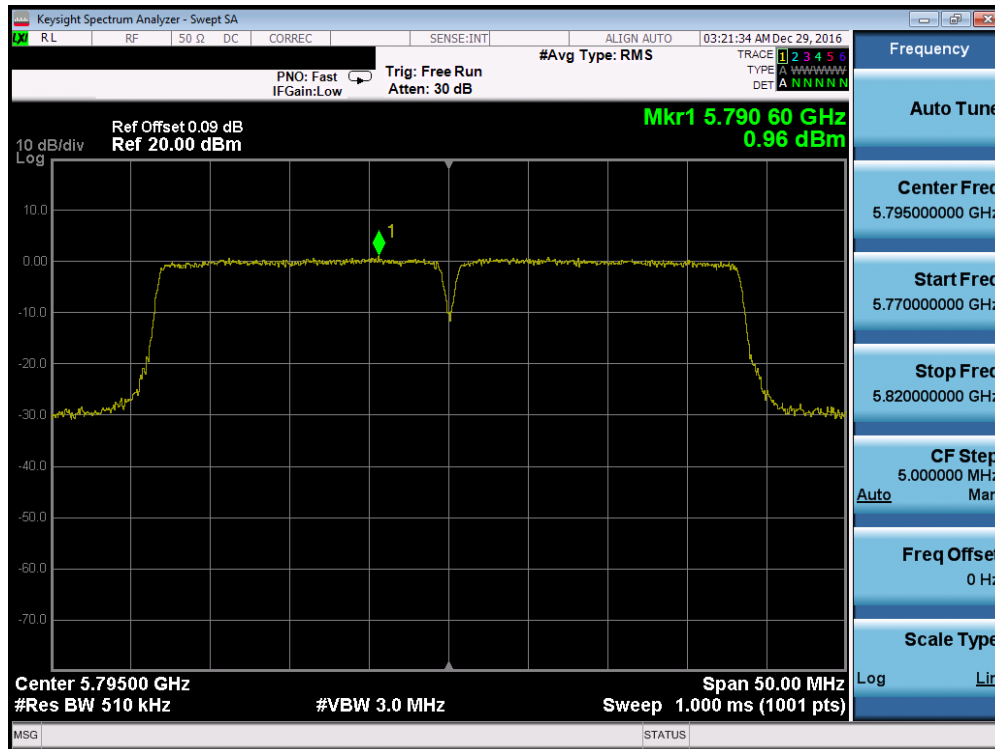

Plot 7-116. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

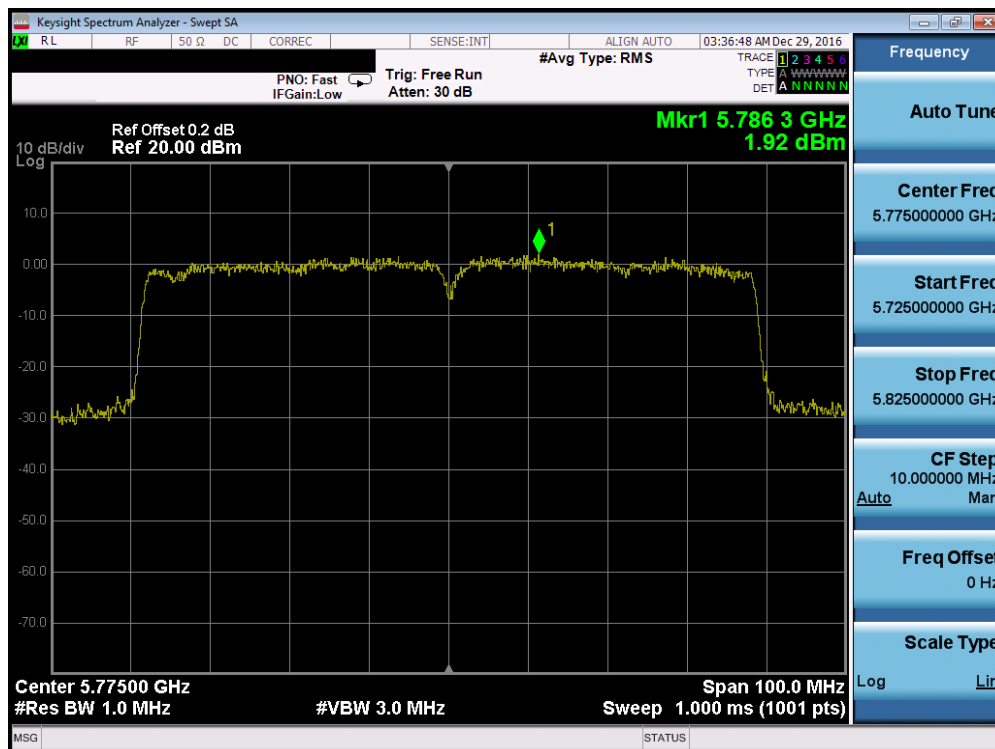

Plot 7-117. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3LSCV35	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1703080090-05.A3L	Test Dates: 12/27/2016-2/6/2017	EUT Type: Portable Handset		Page 89 of 260