

MEASUREMENT REPORT

LTE

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

1/24-2/20/2018

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M1801230010-03.A3L

FCC ID:

A3LSCV39

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SCV39

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part(s):

22 & 27

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03,
KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




FCC ID: A3LSCV39	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 1 of 113

T A B L E O F C O N T E N T S


1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Measurement Procedure.....	6
3.2	Block C Frequency Range	6
3.3	Block A Frequency Range.....	6
3.4	Cellular - Base Frequency Blocks	6
3.5	Cellular - Mobile Frequency Blocks	6
3.6	AWS - Base Frequency Blocks	7
3.7	AWS - Mobile Frequency Blocks.....	7
3.8	BRS/EBS Frequency Block	7
3.9	Radiated Power and Radiated Spurious Emissions	8
4.0	MEASUREMENT UNCERTAINTY	9
5.0	TEST EQUIPMENT CALIBRATION DATA	10
6.0	SAMPLE CALCULATIONS	11
7.0	TEST RESULTS.....	12
7.1	Summary	12
7.2	Occupied Bandwidth	14
7.3	Spurious and Harmonic Emissions at Antenna Terminal	35
7.4	Band Edge Emissions at Antenna Terminal	56
7.5	Uplink Carrier Aggregation	73
7.6	Radiated Power (ERP/EIRP).....	82
7.7	Radiated Spurious Emissions Measurements	87
7.8	Uplink Carrier Aggregation Radiated Measurements	96
7.9	Frequency Stability / Temperature Variation	104
8.0	CONCLUSION.....	113

FCC ID: A3LSCV39		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 2 of 113	



MEASUREMENT REPORT

LTE



Mode	FCC Rule Part	Tx Frequency (MHz)	ERP/EIRP		Emission Designator	Modulation
			Max. Power (W)	Max. Power (dBm)		
LTE Band 17	27	706.5 - 713.5	0.066	18.21	4M54G7D	QPSK
LTE Band 17	27	706.5 - 713.5	0.054	17.34	4M52W7D	16QAM
LTE Band 17	27	706.5 - 713.5	0.044	16.46	4M51W7D	64QAM
LTE Band 17	27	709 - 711	0.068	18.35	9M02G7D	QPSK
LTE Band 17	27	709 - 711	0.055	17.39	9M02W7D	16QAM
LTE Band 17	27	709 - 711	0.045	16.53	9M02W7D	64QAM
LTE Band 13	27	779.5 - 784.5	0.052	17.16	4M52G7D	QPSK
LTE Band 13	27	779.5 - 784.5	0.043	16.35	4M50W7D	16QAM
LTE Band 13	27	779.5 - 784.5	0.035	15.40	4M50W7D	64QAM
LTE Band 13	27	782	0.052	17.16	8M98G7D	QPSK
LTE Band 13	27	782	0.043	16.31	8M99W7D	16QAM
LTE Band 13	27	782	0.028	14.54	8M96W7D	64QAM
LTE Band 5/26	22H	824.7 - 848.3	0.115	20.62	1M09G7D	QPSK
LTE Band 5/26	22H	824.7 - 848.3	0.086	19.35	1M09W7D	16QAM
LTE Band 5/26	22H	824.7 - 848.3	0.071	18.52	1M10W7D	64QAM
LTE Band 5/26	22H	825.5 - 847.5	0.113	20.54	2M71G7D	QPSK
LTE Band 5/26	22H	825.5 - 847.5	0.091	19.59	2M71W7D	16QAM
LTE Band 5/26	22H	825.5 - 847.5	0.071	18.52	2M70W7D	64QAM
LTE Band 5/26	22H	826.5 - 846.5	0.125	20.96	4M52G7D	QPSK
LTE Band 5/26	22H	826.5 - 846.5	0.091	19.60	4M52W7D	16QAM
LTE Band 5/26	22H	826.5 - 846.5	0.071	18.53	4M52W7D	64QAM
LTE Band 5/26	22H	829 - 844	0.111	20.47	8M97G7D	QPSK
LTE Band 5/26	22H	829 - 844	0.093	19.70	8M98W7D	16QAM
LTE Band 5/26	22H	829 - 844	0.071	18.52	9M00W7D	64QAM
LTE Band 26	22H	831.5 - 841.5	0.124	20.93	13M5G7D	QPSK
LTE Band 26	22H	831.5 - 841.5	0.104	20.16	13M5W7D	16QAM
LTE Band 26	22H	831.5 - 841.5	0.084	19.25	13M4W7D	64QAM
LTE Band 41	27	2498.5 - 2687.5	0.216	23.35	4M52G7D	QPSK
LTE Band 41	27	2498.5 - 2687.5	0.161	22.06	4M52W7D	16QAM
LTE Band 41	27	2498.5 - 2687.5	0.130	21.13	4M52W7D	64QAM
LTE Band 41	27	2501 - 2685	0.246	23.91	9M00G7D	QPSK
LTE Band 41	27	2501 - 2685	0.181	22.58	8M99W7D	16QAM
LTE Band 41	27	2501 - 2685	0.154	21.86	8M99W7D	64QAM
LTE Band 41	27	2503.5 - 2682.5	0.200	23.00	13M5G7D	QPSK
LTE Band 41	27	2503.5 - 2682.5	0.151	21.79	13M5W7D	16QAM
LTE Band 41	27	2503.5 - 2682.5	0.140	21.45	13M5W7D	64QAM
LTE Band 41	27	2506 - 2680	0.231	23.63	18M0G7D	QPSK
LTE Band 41	27	2506 - 2680	0.176	22.45	18M0W7D	16QAM
LTE Band 41	27	2506 - 2680	0.150	21.75	17M9W7D	64QAM

EUT Overview

FCC ID: A3LSCV39	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 3 of 113

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSCV39		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 4 of 113	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSCV39**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

Test Device Serial No.: 9CD11, 9CDC3, 9CD30, 9CDB7

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC, ANT+

LTE Band 26 (814.7 – 849 MHz) overlaps the entire frequency range of LTE Band 5 (824 – 849 MHz). Therefore, test data provided in this report covers Band 5 and the portion of Band 26 subject to Part 22.

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSCV39		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 5 of 113	

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03) were used in the measurement of the EUT.

3.2 Block C Frequency Range

Two paired channels of 11 megahertz each are available for assignment in Block C in the 746-757 MHz and 776-787 MHz bands. In the event that no licenses for two channels in this Block C are assigned based on the results of the first auction in which such licenses were offered because the auction results do not satisfy the applicable reserve price, the spectrum in the 746-757 MHz and 776-787 MHz bands will instead be made available for assignment at a subsequent auction as follows: (i) Two paired channels of 6 megahertz each available for assignment in Block C1 in the 746-752 MHz and 776-782 MHz bands. (ii) Two paired channels of 5 megahertz each available for assignment in Block C2 in the 752-757 MHz and 782-787 MHz bands.

3.3 Block A Frequency Range

698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;
Block B: 704-710 MHz and 734-740 MHz; and
Block C: 710-716 MHz and 740-746 MHz.


3.4 Cellular - Base Frequency Blocks



BLOCK 1: 869 – 880 MHz (A* Low + A)
BLOCK 2: 880 – 890 MHz (B)

BLOCK 3: 890 – 891.5 MHz (A* High)
BLOCK 4: 891.5 – 894 MHz (B*)

3.5 Cellular - Mobile Frequency Blocks

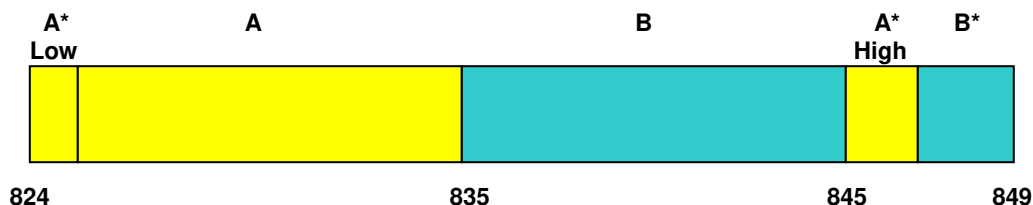


BLOCK 1: 824 – 835 MHz (A* Low + A)
BLOCK 2: 835 – 845 MHz (B)


BLOCK 3: 845 – 846.5 MHz (A* High)
BLOCK 4: 846.5 – 849 MHz (B*)

FCC ID: A3LSCV39	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 6 of 113


3.6 AWS - Base Frequency Blocks

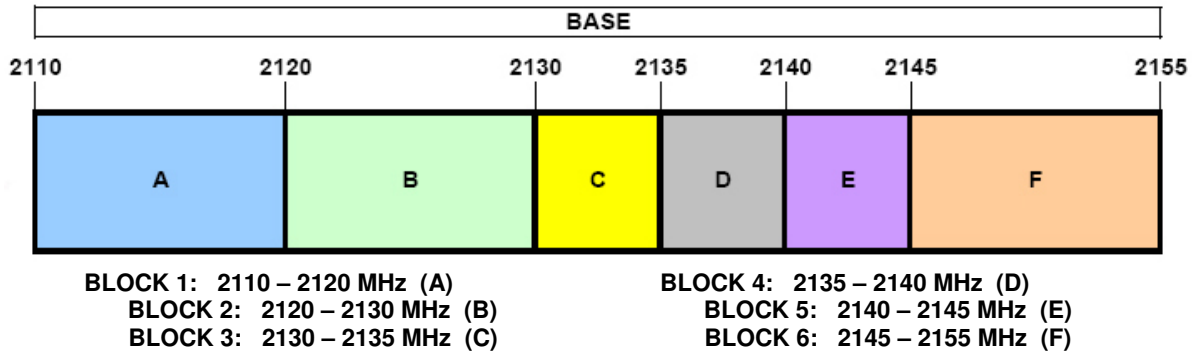

3.7 AWS - Mobile Frequency Blocks

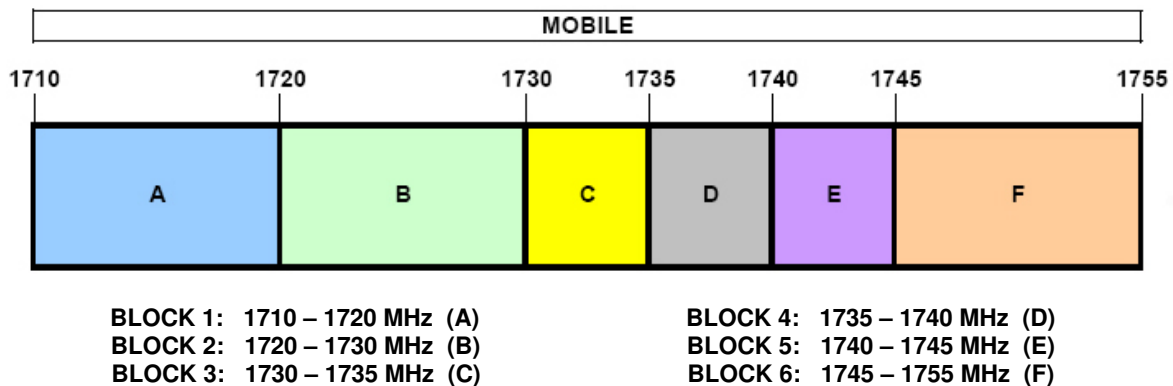

3.8 BRS/EBS Frequency Block

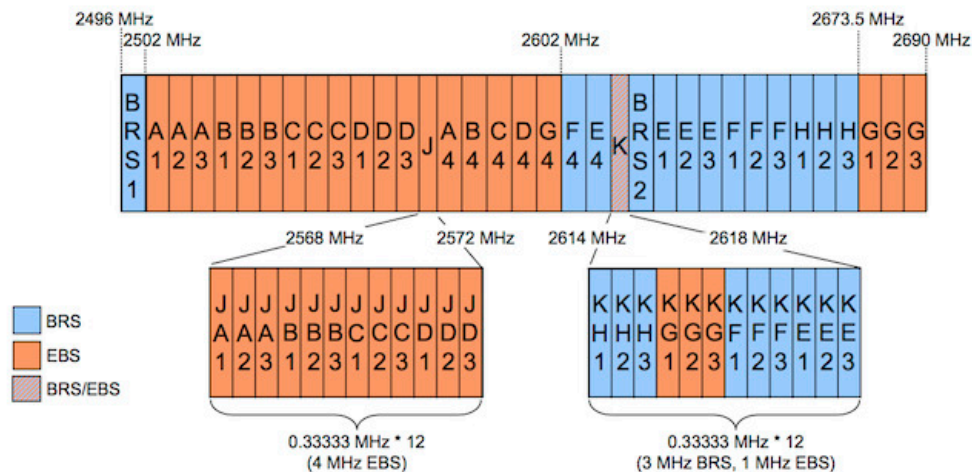

FCC ID: A3LSCV39	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 7 of 113

3.9 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power [Watts]})$. For Band 41, the calculated P_d levels are compared to the absolute spurious emission limit of -25dBm which is equivalent to the required minimum attenuation of $55 + 10\log_{10}(\text{Power [Watts]})$.

FCC ID: A3LSCV39	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 8 of 113

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSCV39	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 9 of 113

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9020A	MXA Signal Analyzer	1/24/2018	Annual	1/24/2019	US46470561
Anritsu	MT8820C	Radio Communication Analyzer	5/23/2017	Annual	5/23/2018	6201240328
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/23/2016	Biennial	8/23/2018	135427
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	12/1/2016	Biennial	12/1/2018	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	4/26/2016	Biennial	4/26/2018	128337
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	5/19/2017	Annual	5/19/2018	251425001
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	3/24/2017	Annual	3/24/2018	11401010036
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
OML	DPL26	Diplexer	N/A			N/A
Rohde & Schwarz	CMW500	Radio Communication Tester	10/13/2017	Annual	10/13/2018	102060
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	4/19/2017	Annual	4/19/2018	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/31/2017	Annual	7/31/2018	100348
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102135
Rohde & Schwarz	TC-TA18	Cross-Pol Antenna 400MHz-18GHz	10/30/2017	Annual	10/30/2018	101058
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/11/2017	Annual	5/11/2018	100040
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	3/30/2016	Biennial	3/30/2018	9105-2404
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/2/2016	Biennial	3/2/2018	N/A
Sunol	DRH-118	Horn Antenna (1-18GHz)	8/11/2017	Biennial	8/11/2019	A050307
Sunol Sciences	JB6	JB6 Antenna	9/27/2016	Biennial	9/27/2018	A082816

Table 5-1. Test Equipment

Note:

Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSCV39	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 10 of 113

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: A3LSCV39		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 11 of 113	

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSCV39
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 2.917(a) 27.53(c) 27.53(g)	Out of Band Emissions	$> 43 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions			Section 7.3, 7.4
27.53(m)	Out of Band Emissions	Undesirable emissions must meet the limits detailed in 27.53(m)			Section 7.3, 7.4
2.1046	Transmitter Conducted Output Power	N/A			See RF Exposure Report
2.1055 22.355 27.54	Frequency Stability	< 2.5 ppm (Part 22) and fundamental emissions stay within authorized frequency block (Part 247)			Section 7.9

Table 7-1. Summary of Conducted Test Results

FCC ID: A3LSCV39	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 12 of 113

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
22.913(a)(5)	Effective Radiated Power / Equivalent Isotropic Radiated Power (Band 5/26)	< 7 Watts max. ERP	RADIATED	PASS	Section 7.6
27.50(b)(10) 27.50(c)(10)	Effective Radiated Power / Equivalent Isotropic Radiated Power (Band 17, 13)	< 3 Watts max. ERP			Section 7.6
27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 41)	< 2 Watts max. EIRP			Section 7.6
2.1053 22.917(a) 27.53(c) 27.53(g)	Undesirable Emissions	> 43 + 10log ₁₀ (P[Watts]) for all out-of-band emissions			Section 7.7
27.53(f)	Undesirable Emissions (Band 13)	< -70 dBW/MHz (for wideband signals) < -80 dBW (for discrete emissions less than 700Hz BW) For all emissions in the band 1559 – 1610 MHz			Section 7.7
27.53(m)	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 27.53(m)			Section 7.7

Table 7-2. Summary of Radiated Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots (Sections 4), 7.3, 7.4) were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "LTE Automation," Version 4.8.

FCC ID: A3LSCV39	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 13 of 113

7.2 Occupied Bandwidth

\$2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

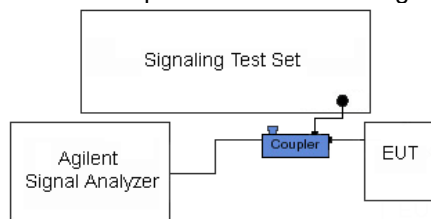



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSCV39	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 14 of 113

Band 17

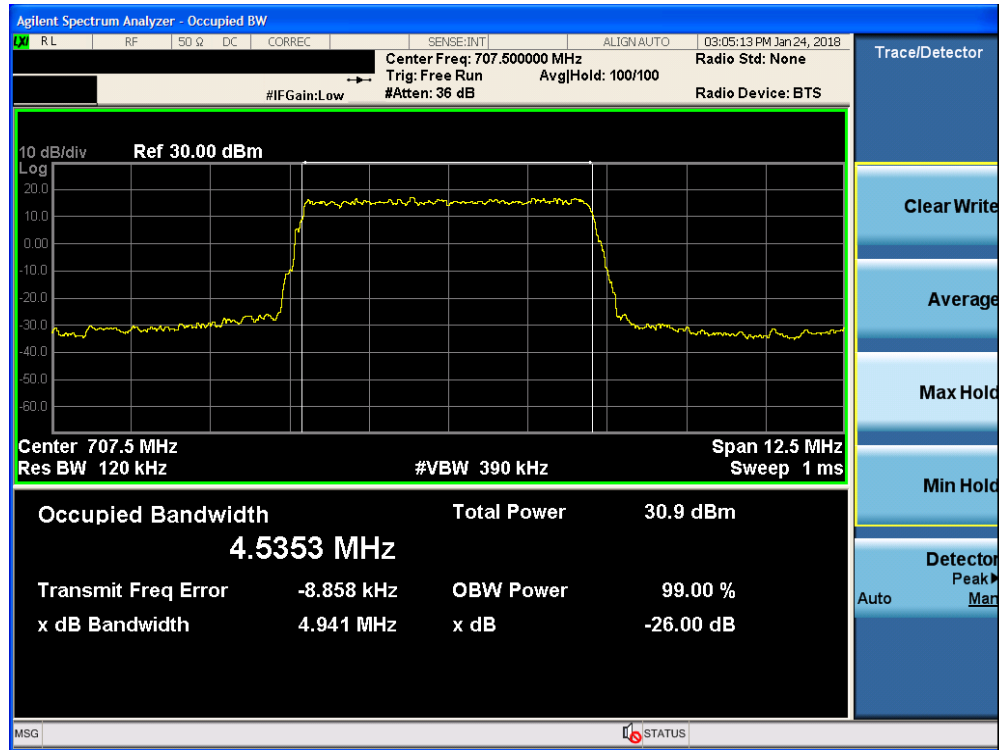


Plot 7-1. Occupied Bandwidth Plot (Band 17 - 5.0MHz QPSK - Full RB Configuration)

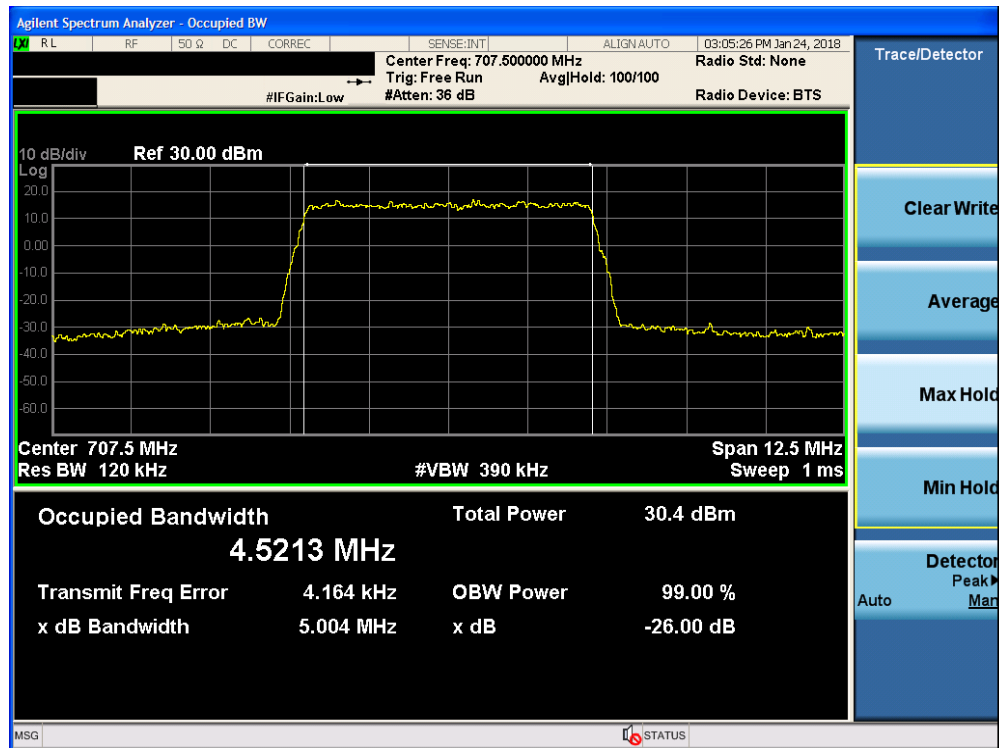


Plot 7-2. Occupied Bandwidth Plot (Band 17 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 15 of 113

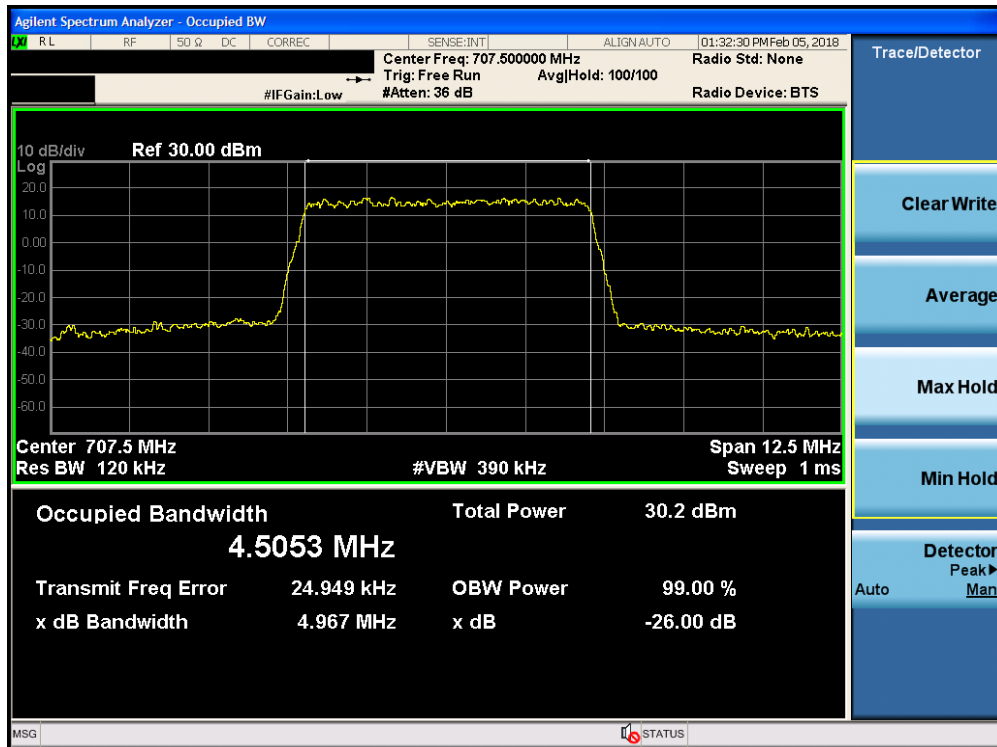


Plot 7-3. Occupied Bandwidth Plot (Band 17 - 5.0MHz 64-QAM - Full RB Configuration)

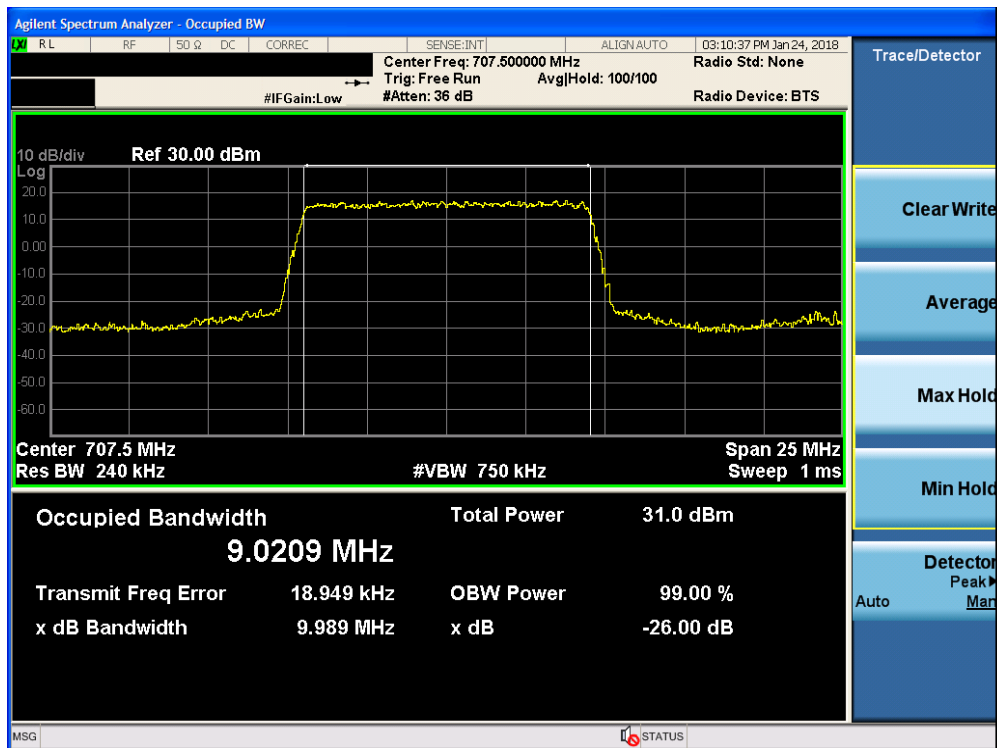


Plot 7-4. Occupied Bandwidth Plot (Band 17 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 16 of 113

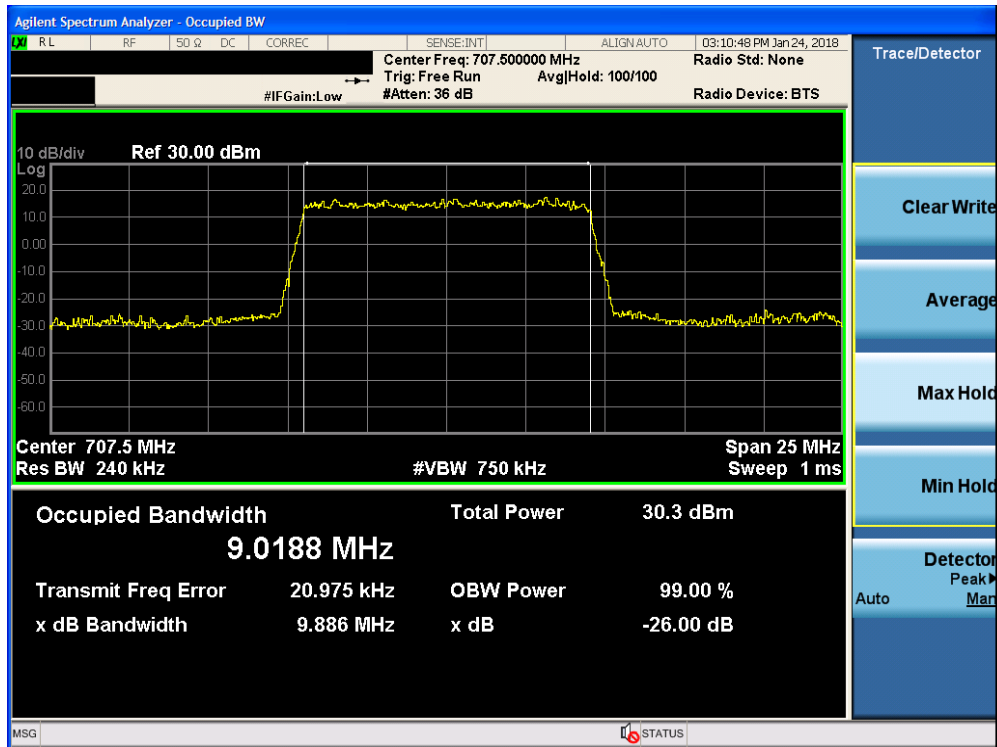


Plot 7-5. Occupied Bandwidth Plot (Band 17 - 10.0MHz 16-QAM - Full RB Configuration)

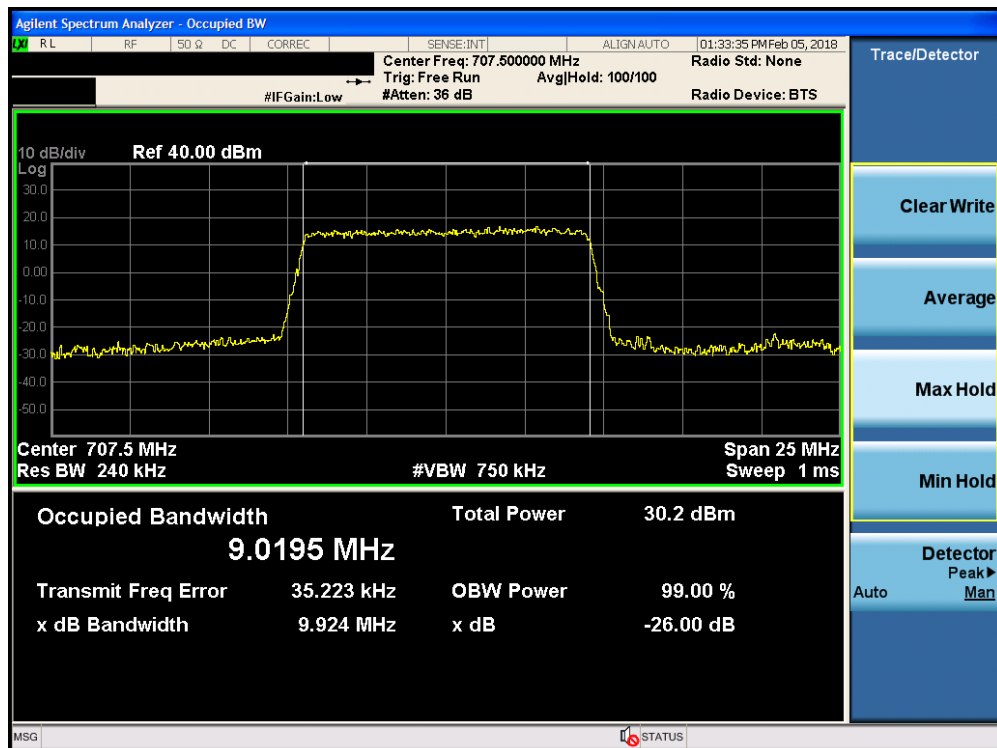


Plot 7-6. Occupied Bandwidth Plot (Band 17 - 10.0MHz 64-QAM - Full RB Configuration)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 17 of 113

Band 13

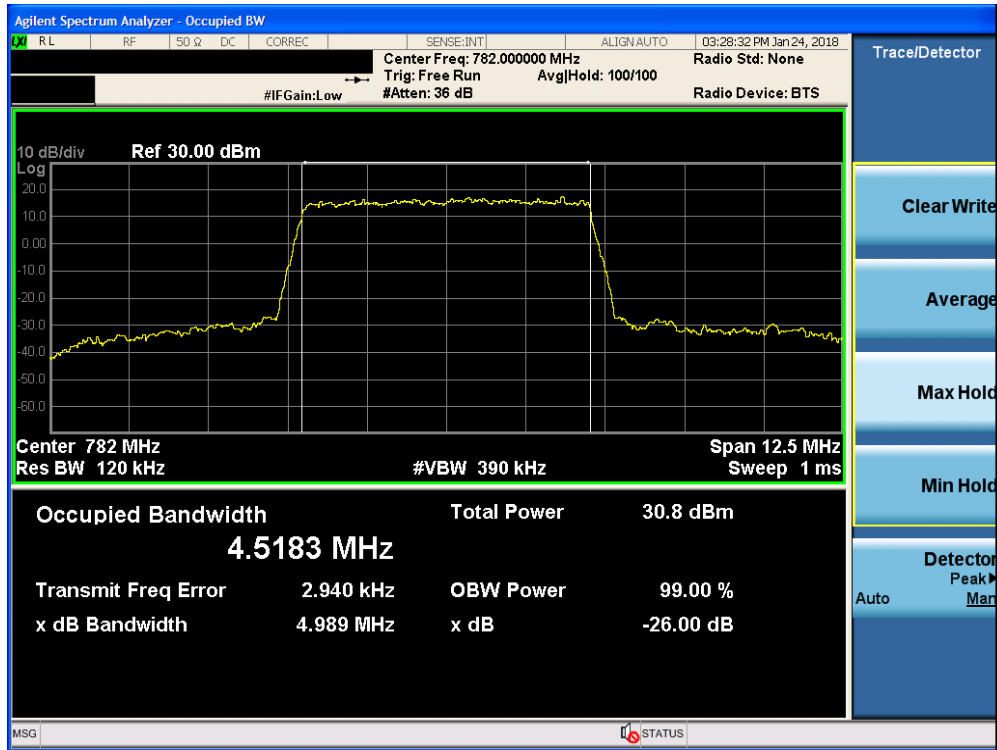


Plot 7-7. Occupied Bandwidth Plot (Band 13 - 5.0MHz QPSK - Full RB Configuration)

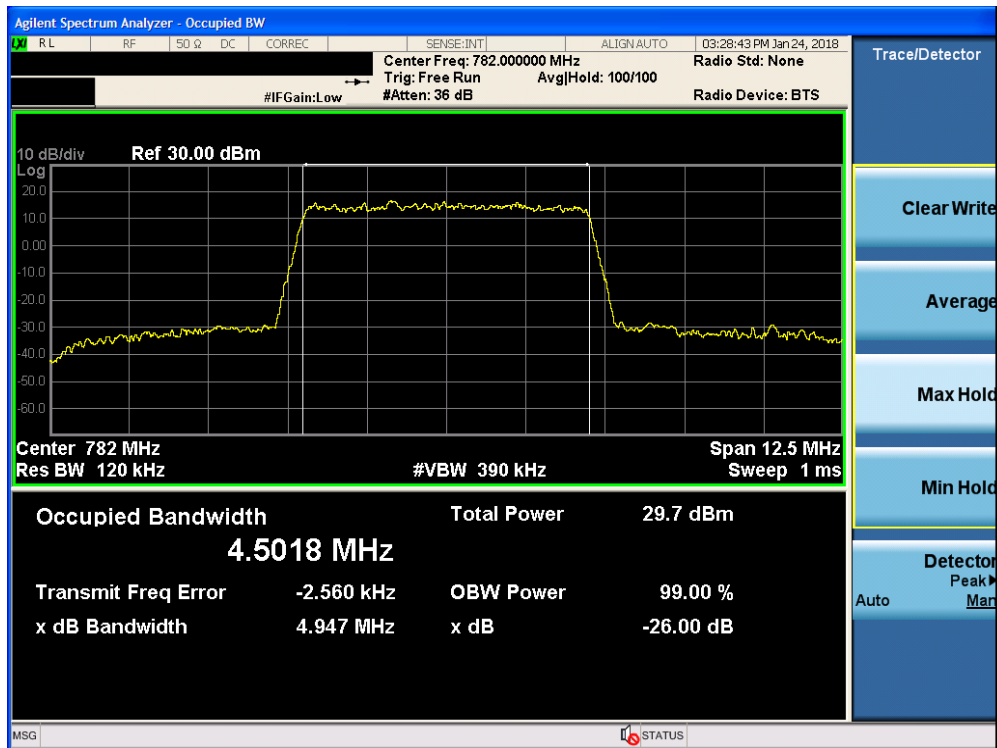


Plot 7-8. Occupied Bandwidth Plot (Band 13 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSCV39	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 18 of 113

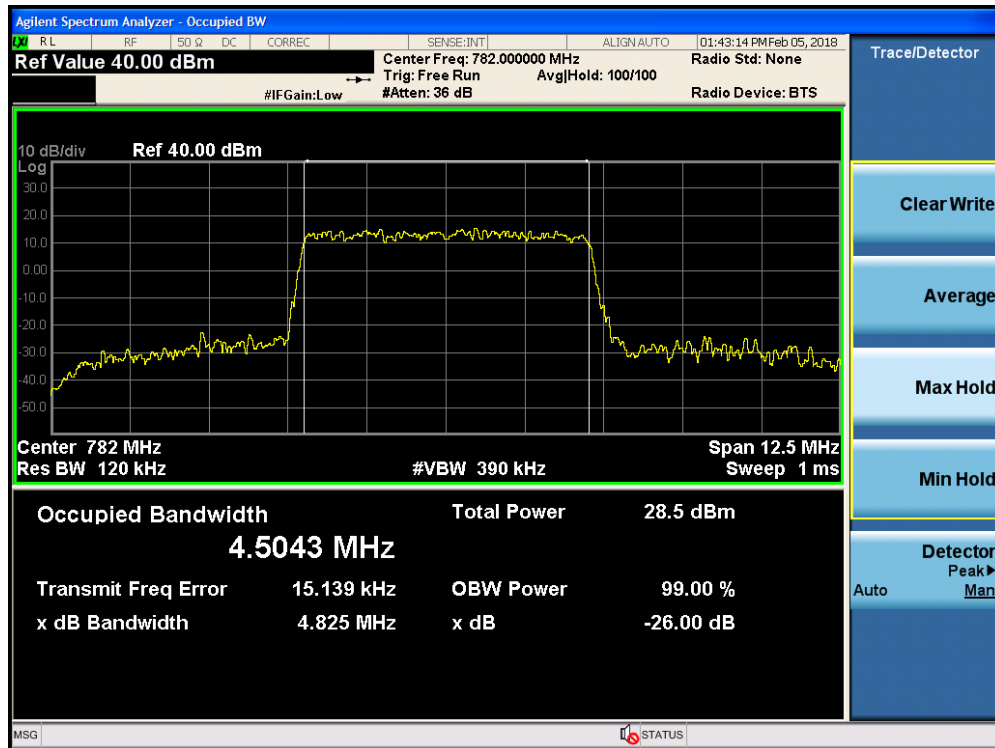


Plot 7-9. Occupied Bandwidth Plot (Band 13 - 5.0MHz 64-QAM - Full RB Configuration)

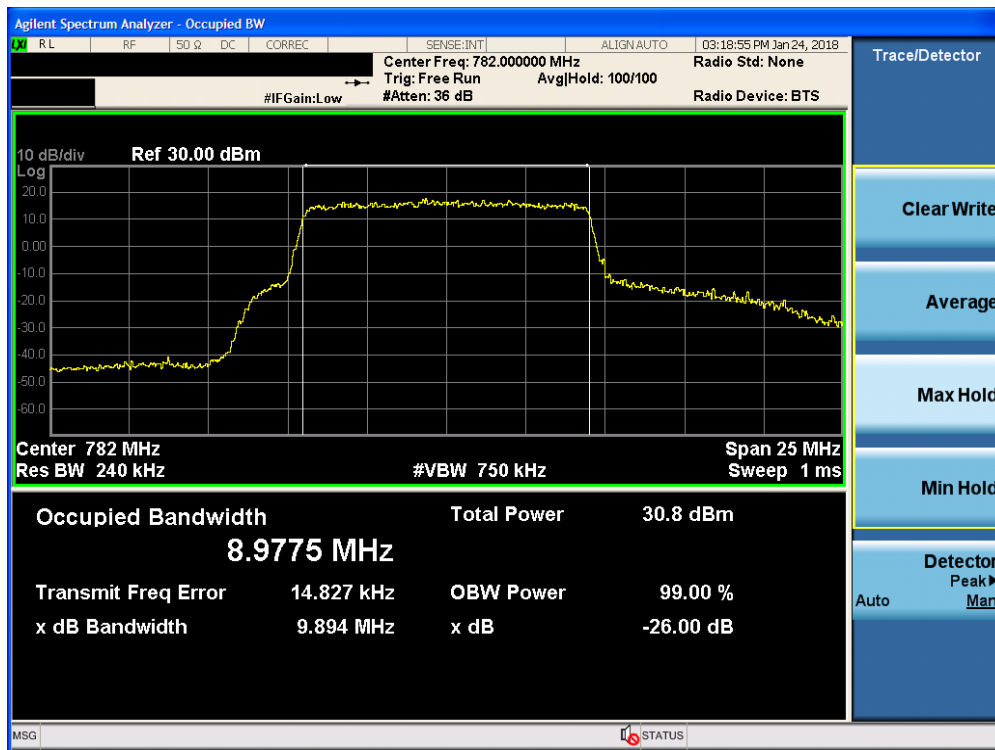


Plot 7-10. Occupied Bandwidth Plot (Band 13 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSCV39	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 19 of 113

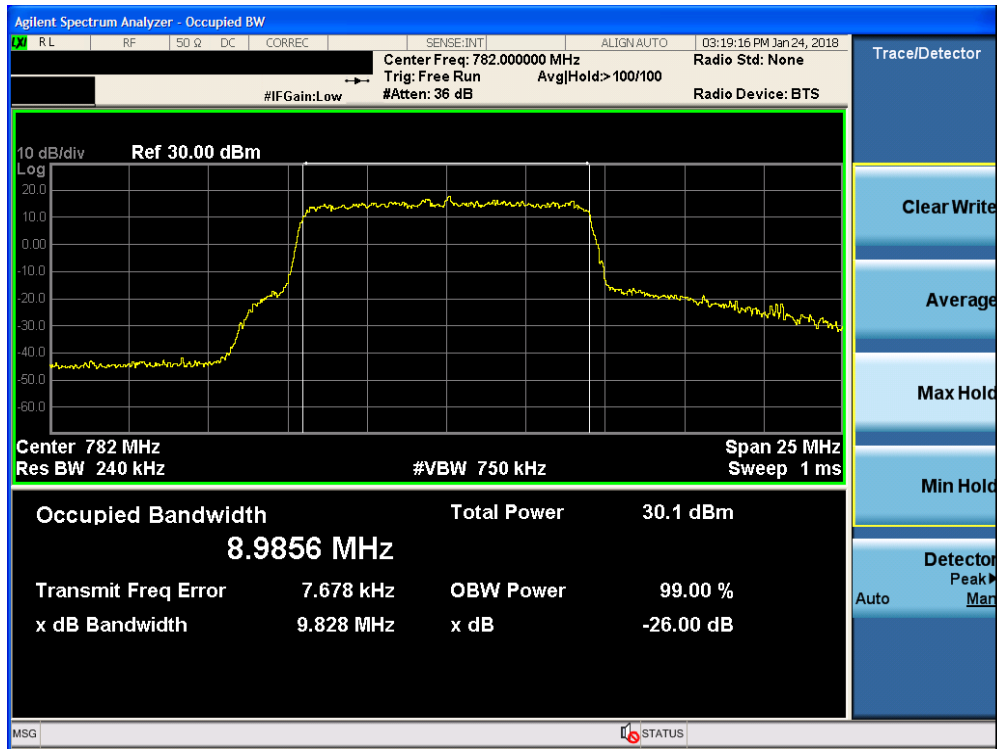


Plot 7-11. Occupied Bandwidth Plot (Band 13 - 10.0MHz 16-QAM - Full RB Configuration)

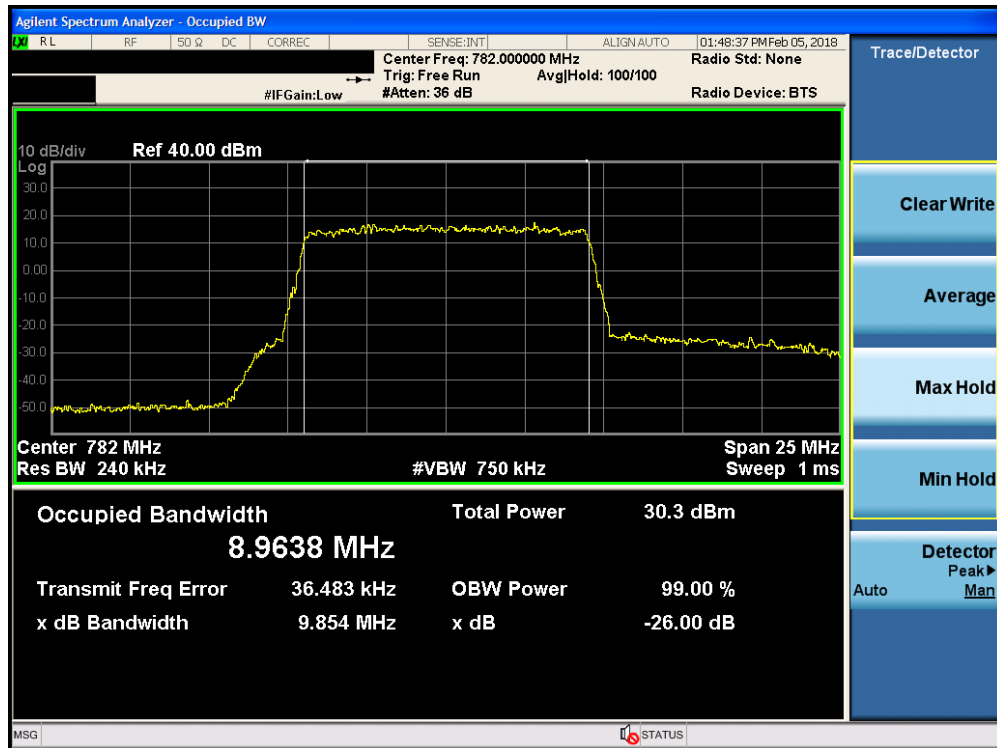


Plot 7-12. Occupied Bandwidth Plot (Band 13 - 10.0MHz 64-QAM - Full RB Configuration)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 20 of 113

Band 5/26

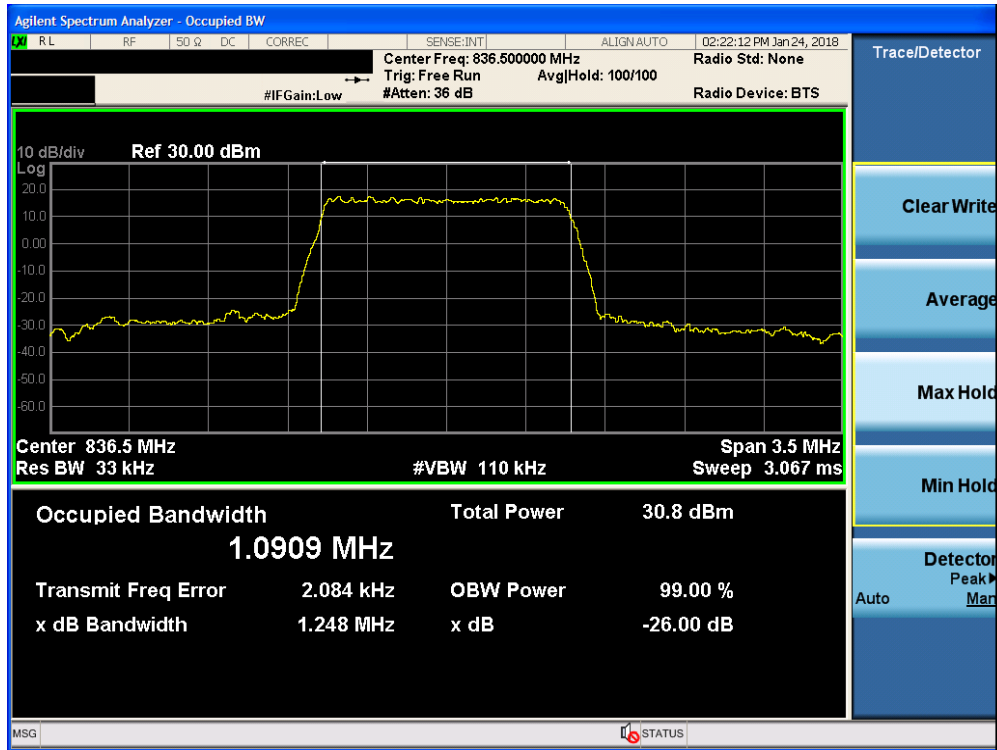


Plot 7-13. Occupied Bandwidth Plot (Band 5/26 - 1.4MHz QPSK - Full RB Configuration)

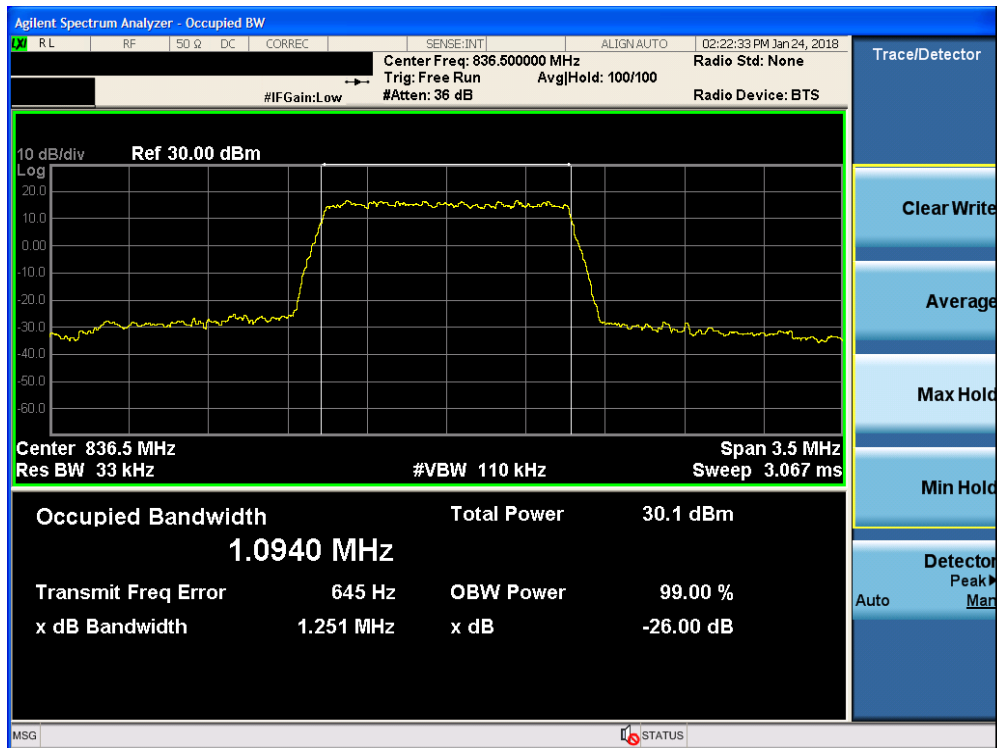


Plot 7-14. Occupied Bandwidth Plot (Band 5/26 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 21 of 113

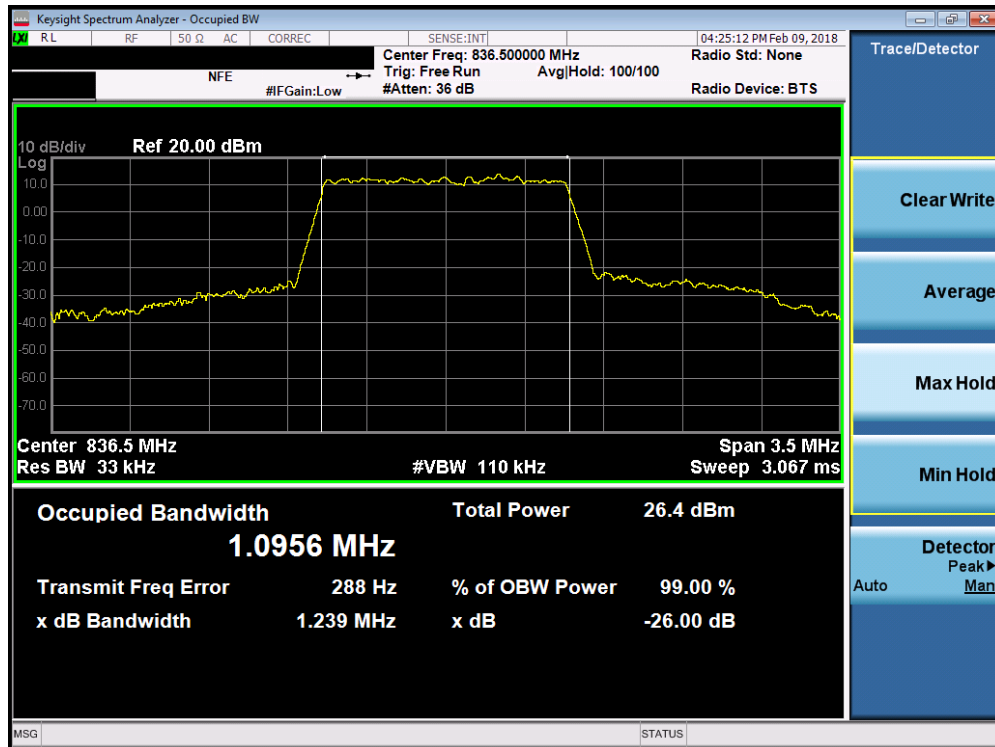


Plot 7-15. Occupied Bandwidth Plot (Band 5/26 - 1.4MHz 64-QAM - Full RB Configuration)

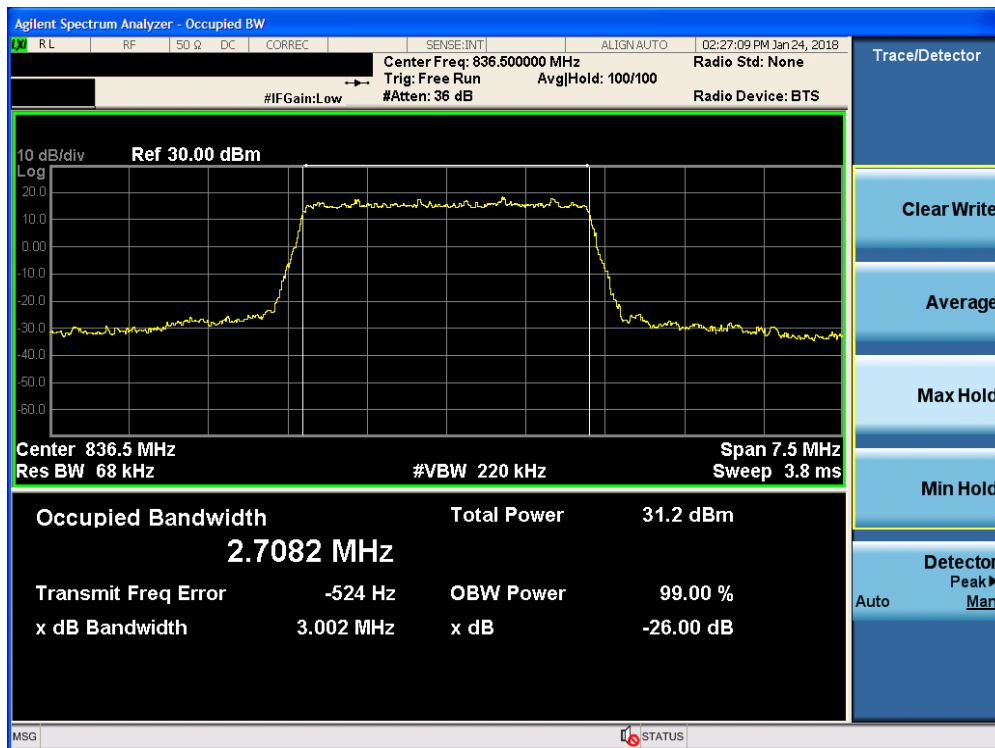


Plot 7-16. Occupied Bandwidth Plot (Band 5/26 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSCV39	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 22 of 113

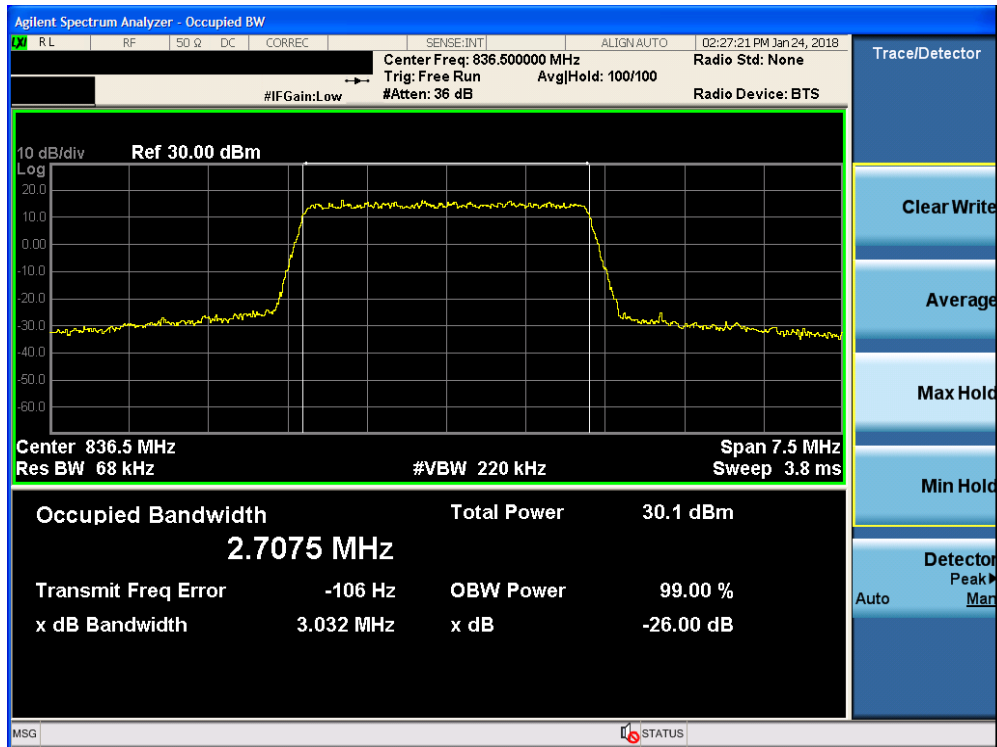


Plot 7-17. Occupied Bandwidth Plot (Band 5/26 - 3.0MHz 16-QAM - Full RB Configuration)

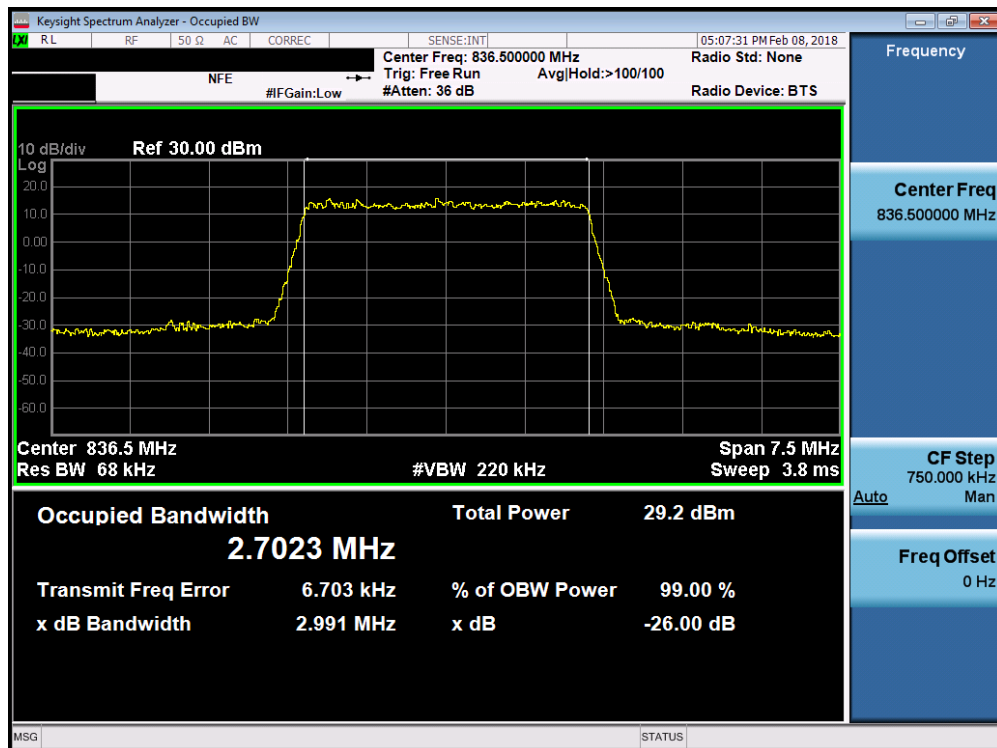


Plot 7-18. Occupied Bandwidth Plot (Band 5/26 - 3.0MHz 64-QAM - Full RB Configuration)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 23 of 113

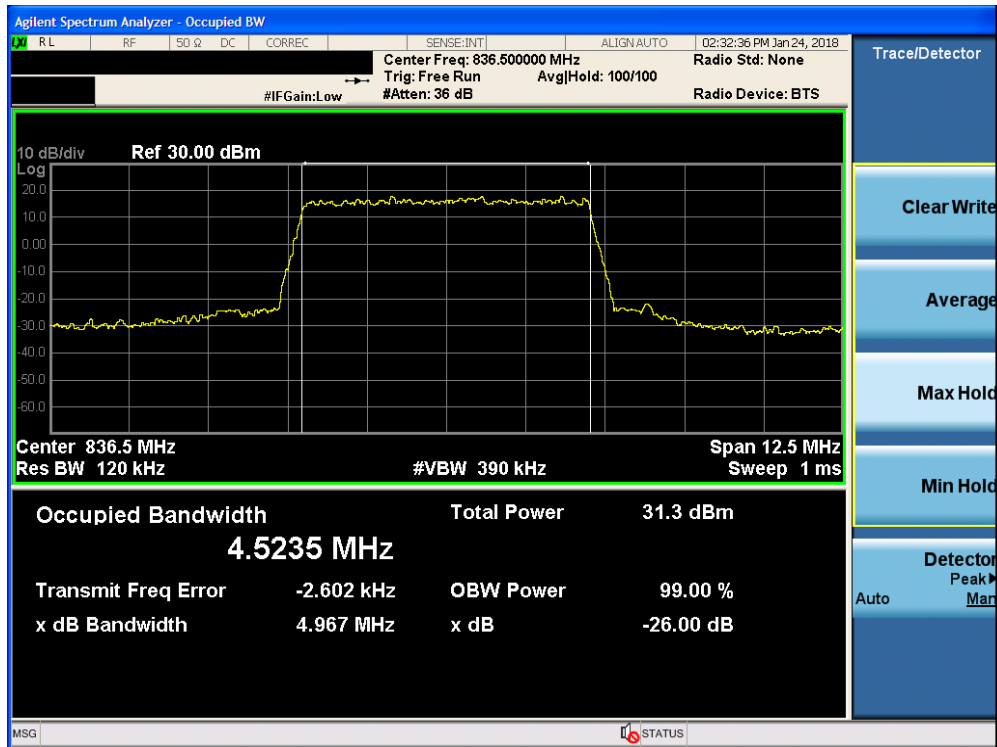


Plot 7-19. Occupied Bandwidth Plot (Band 5/26 - 5.0MHz QPSK - Full RB Configuration)

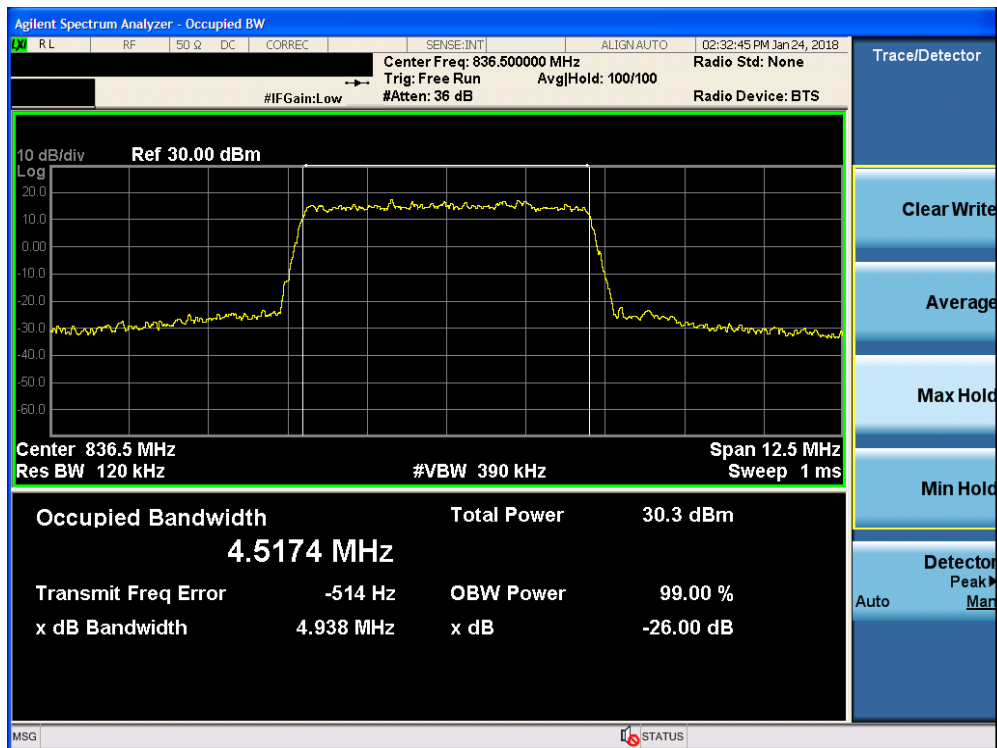


Plot 7-20. Occupied Bandwidth Plot (Band 5/26 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 24 of 113

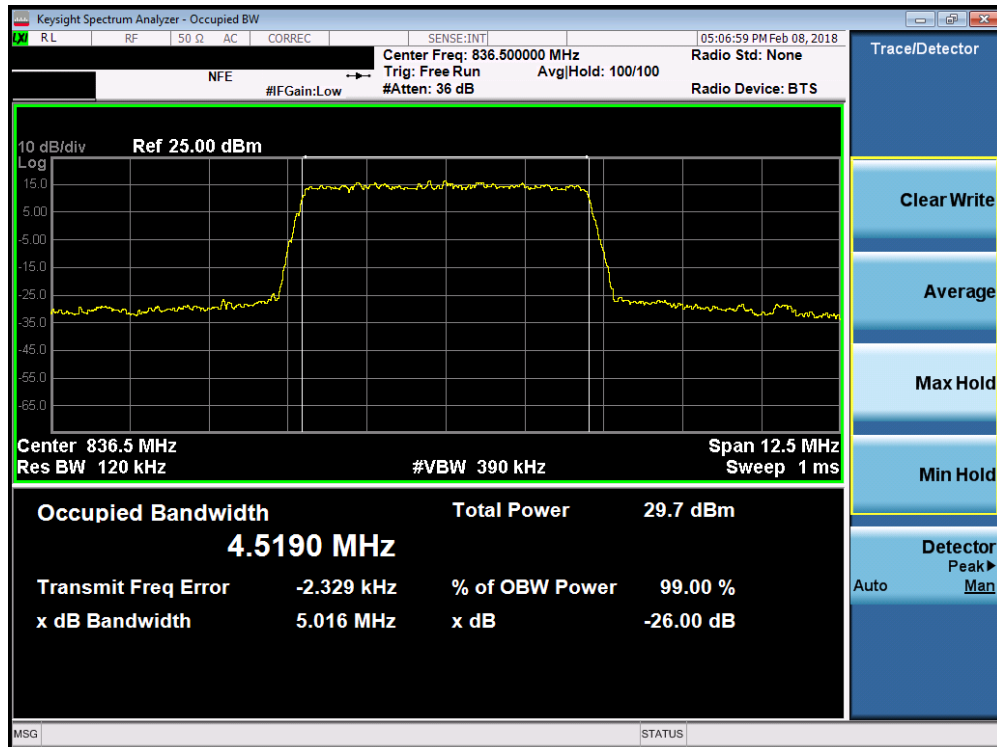


Plot 7-21. Occupied Bandwidth Plot (Band 5/26 - 5.0MHz 64-QAM - Full RB Configuration)

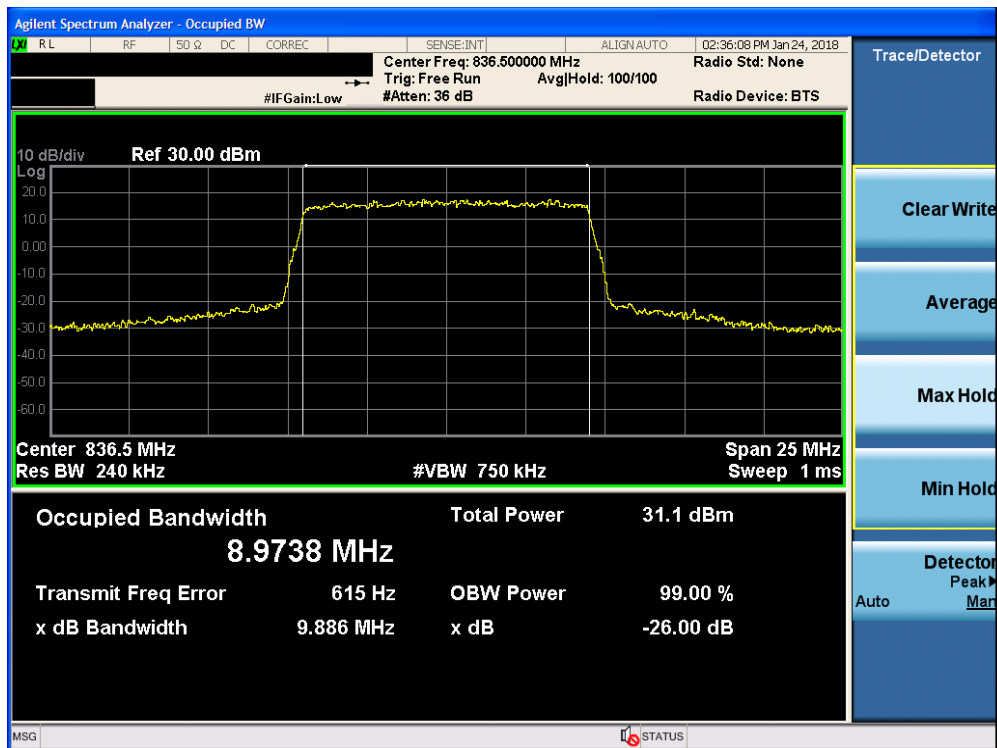


Plot 7-22. Occupied Bandwidth Plot (Band 5/26 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 25 of 113	

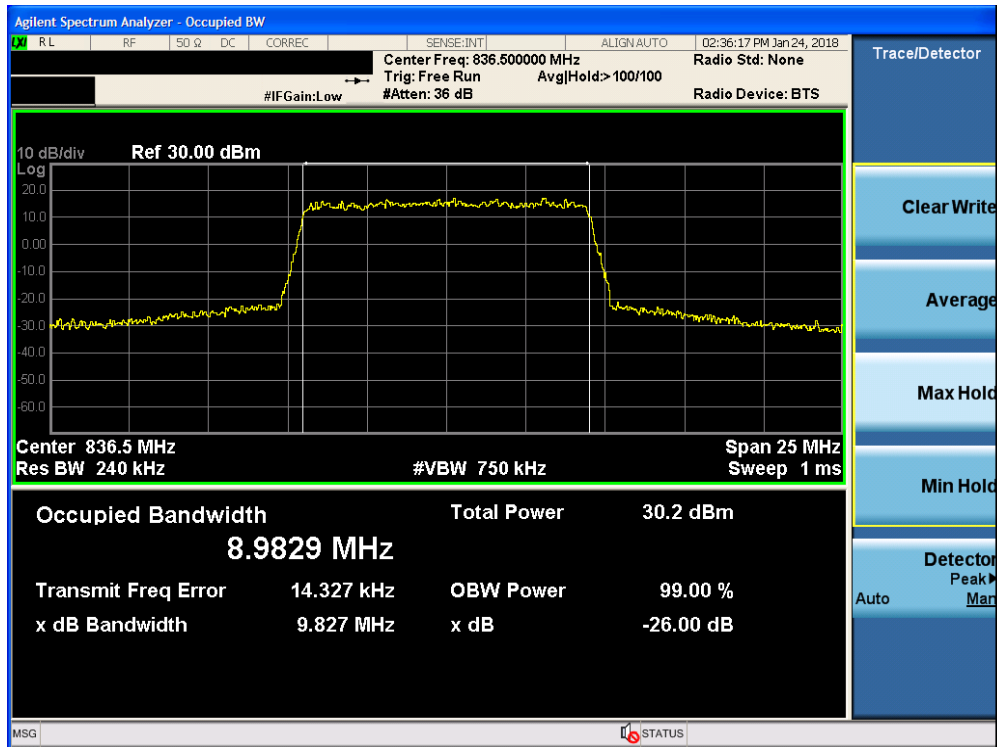


Plot 7-23. Occupied Bandwidth Plot (Band 5/26 - 10.0MHz 16-QAM - Full RB Configuration)

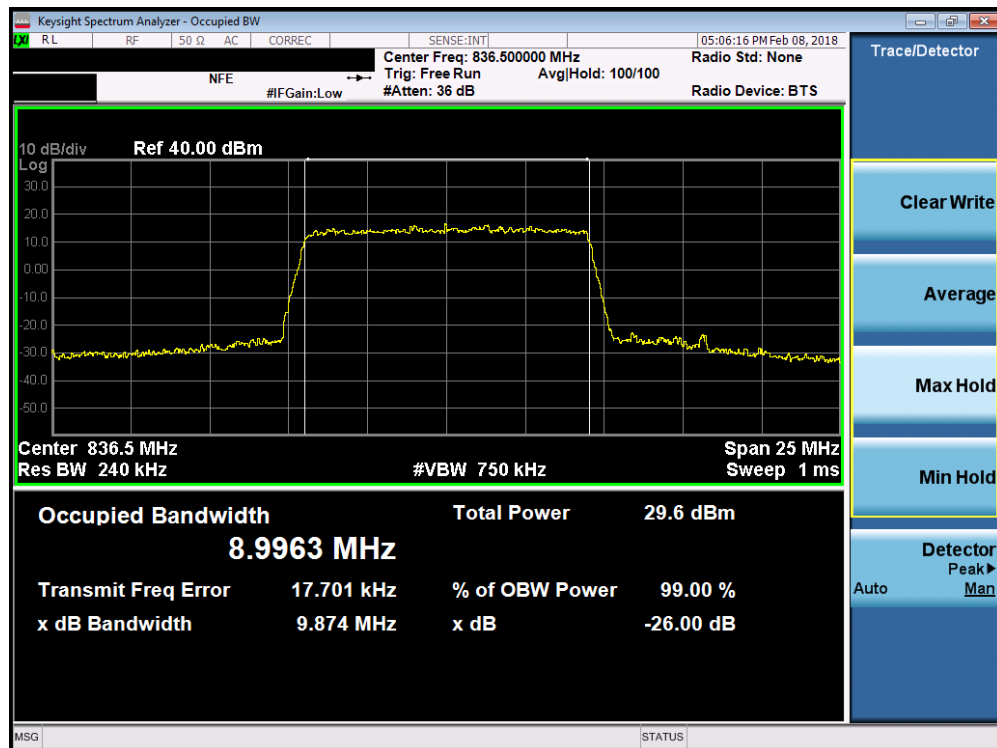


Plot 7-24. Occupied Bandwidth Plot (Band 5/26 - 10.0MHz 64-QAM - Full RB Configuration)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 26 of 113

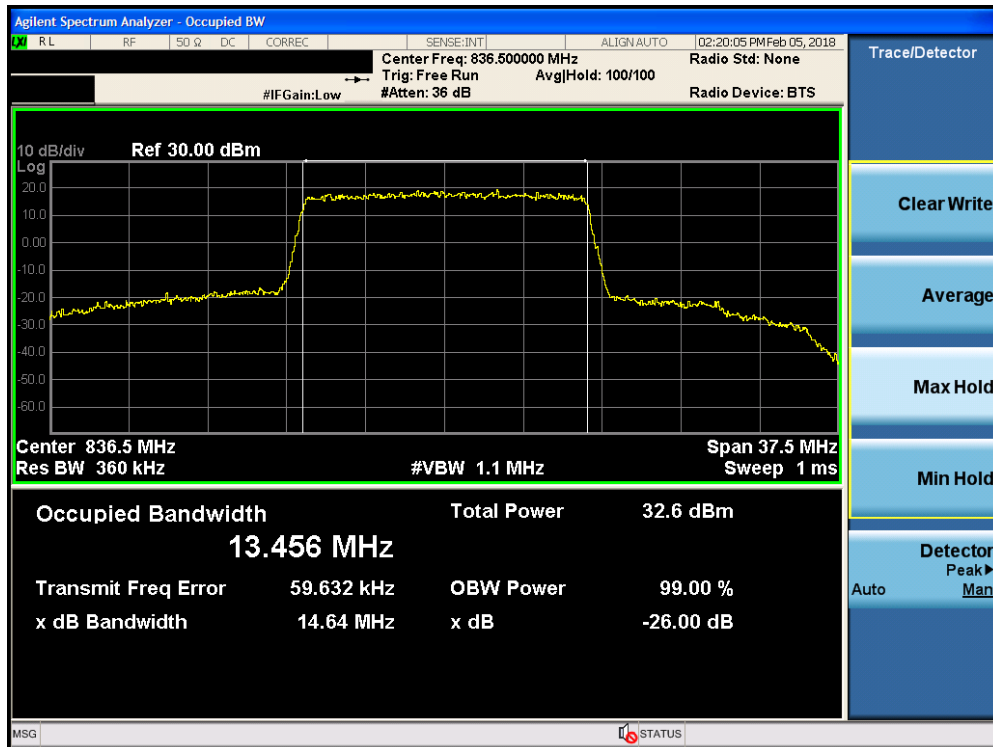


Plot 7-25. Occupied Bandwidth Plot (Band 26 - 15.0MHz QPSK - Full RB Configuration)

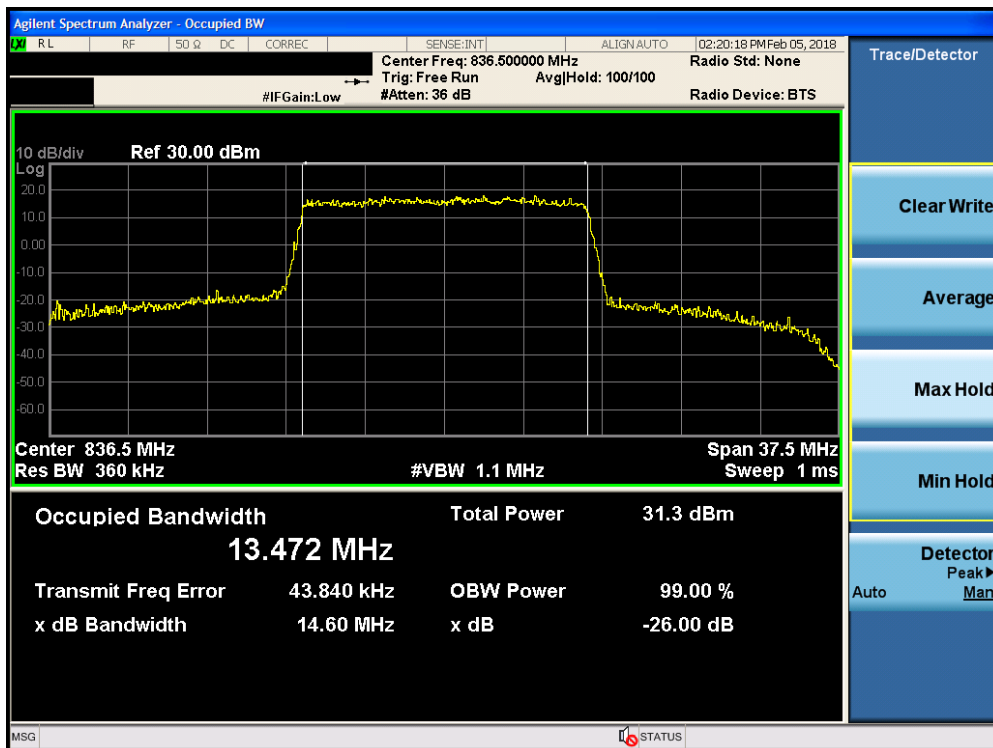

Plot 7-26. Occupied Bandwidth Plot (Band 26 - 15.0MHz 16-QAM - Full RB Configuration)


FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 27 of 113

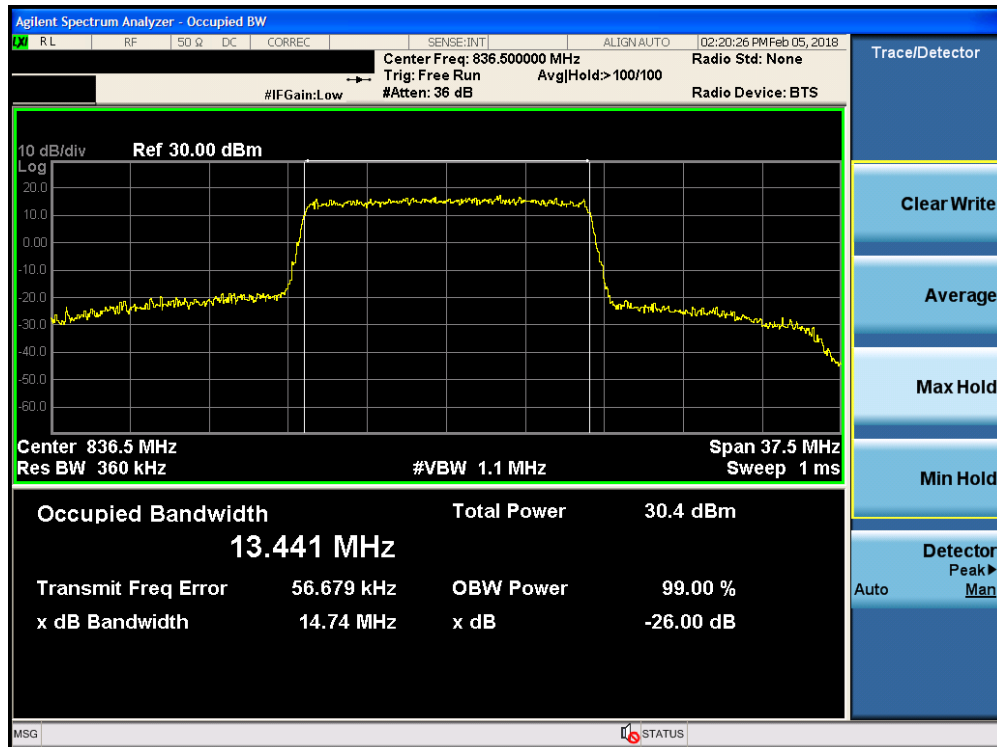


Plot 7-27. Occupied Bandwidth Plot (Band 26 - 15.0MHz 64-QAM - Full RB Configuration)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 28 of 113

Band 41

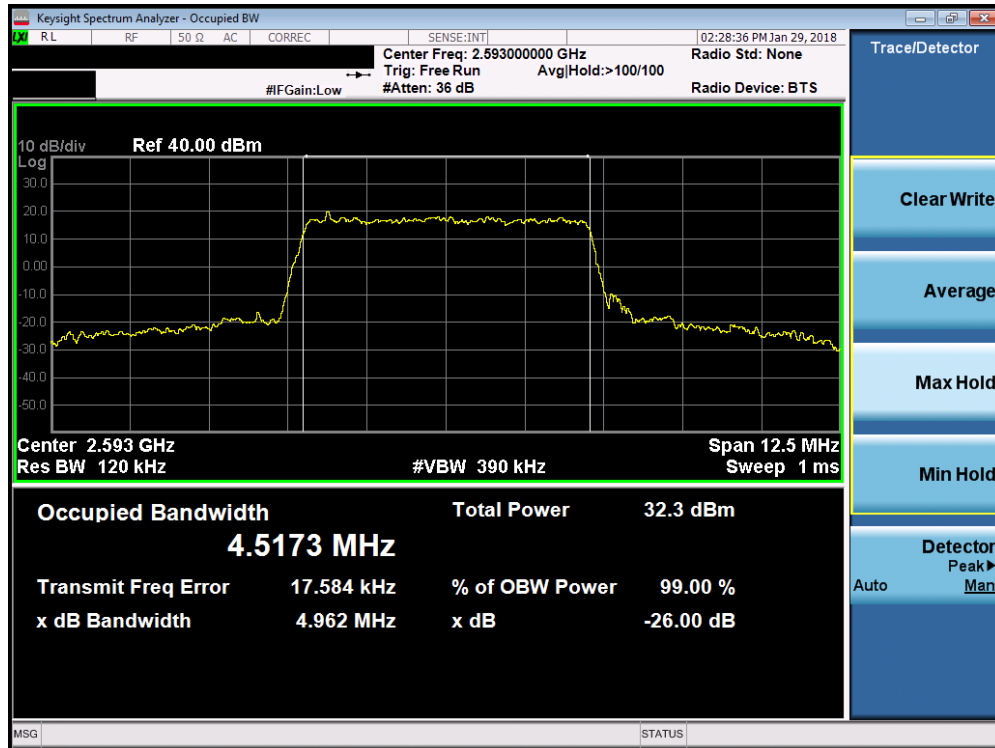


Plot 7-28. Occupied Bandwidth Plot (Band 41 - 5.0MHz QPSK - Full RB Configuration)

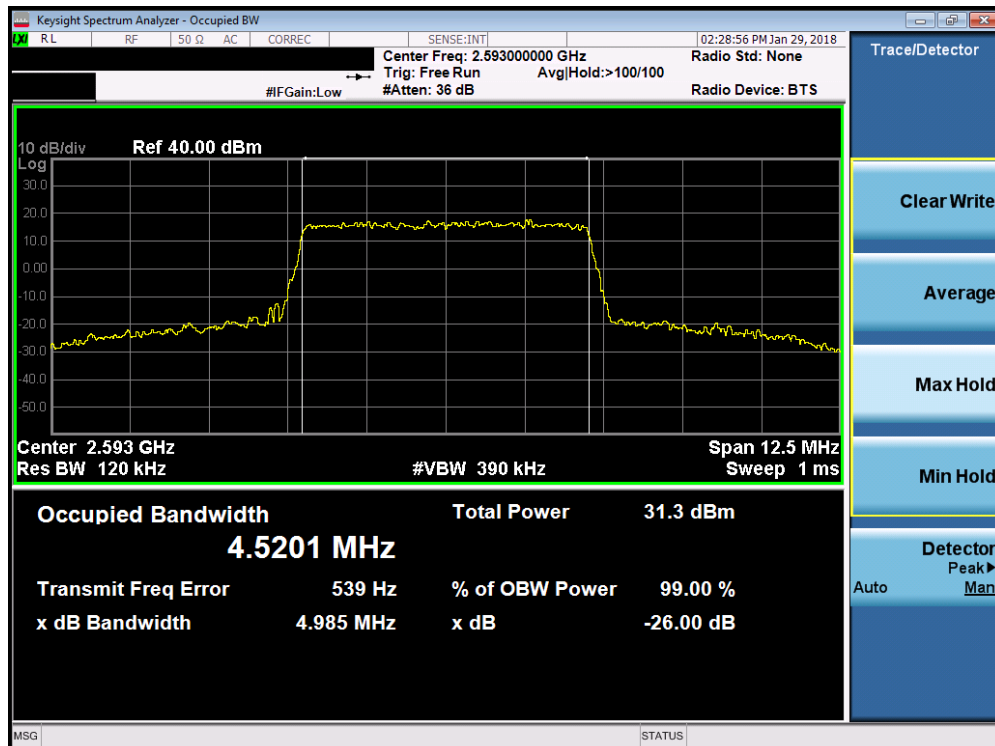

Plot 7-29. Occupied Bandwidth Plot (Band 41 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 29 of 113	

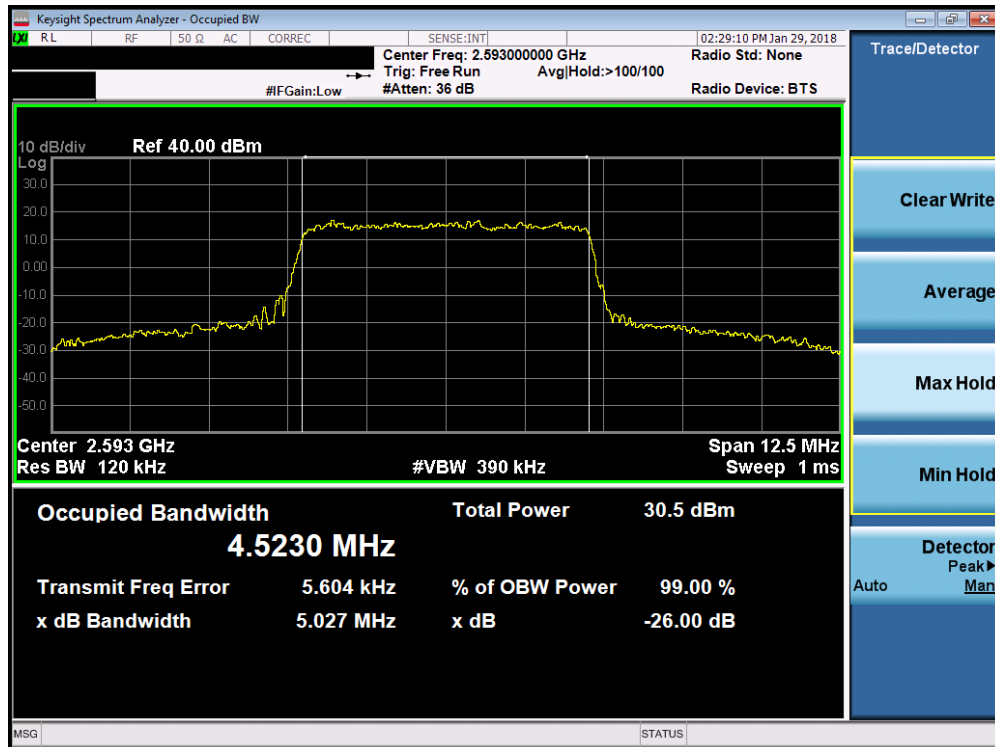


Plot 7-30. Occupied Bandwidth Plot (Band 41 - 5.0MHz 64-QAM - Full RB Configuration)




Plot 7-31. Occupied Bandwidth Plot (Band 41 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSCV39	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 30 of 113

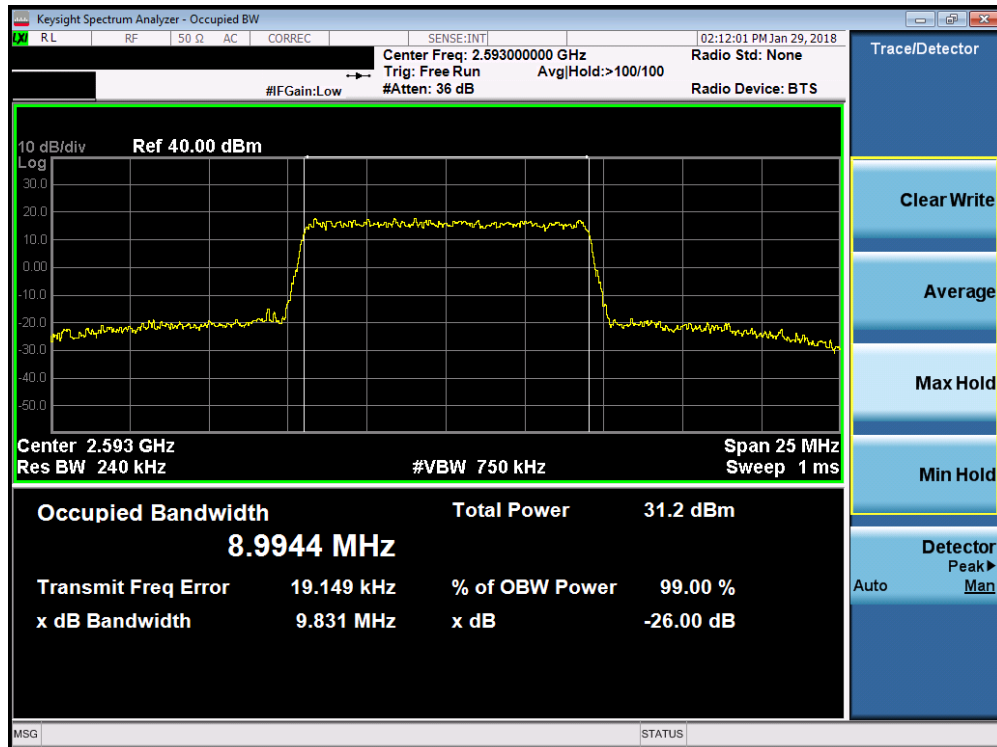


Plot 7-32. Occupied Bandwidth Plot (Band 41 - 10.0MHz 16-QAM - Full RB Configuration)

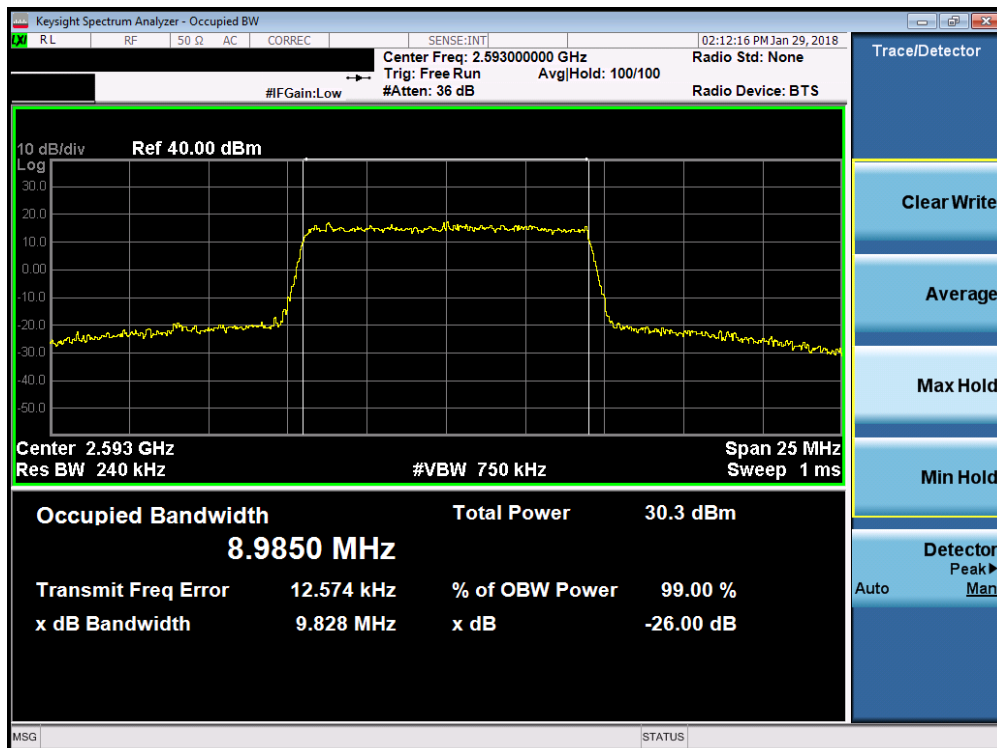


Plot 7-33. Occupied Bandwidth Plot (Band 41 - 10.0MHz 64-QAM - Full RB Configuration)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 31 of 113

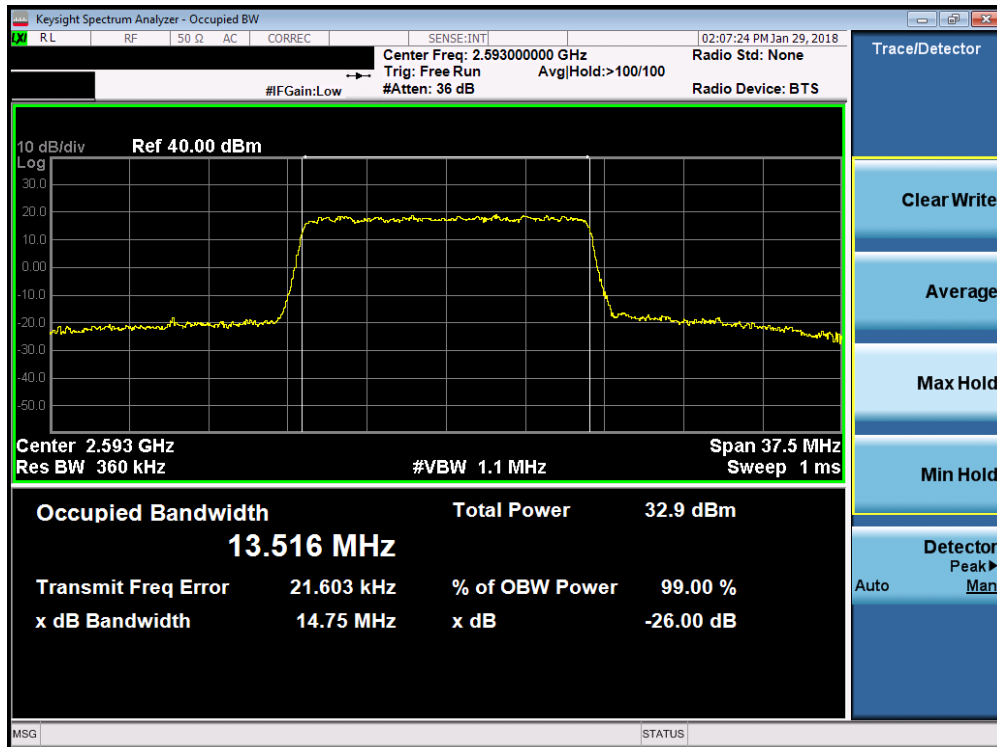


Plot 7-34. Occupied Bandwidth Plot (Band 41 - 15.0MHz QPSK - Full RB Configuration)

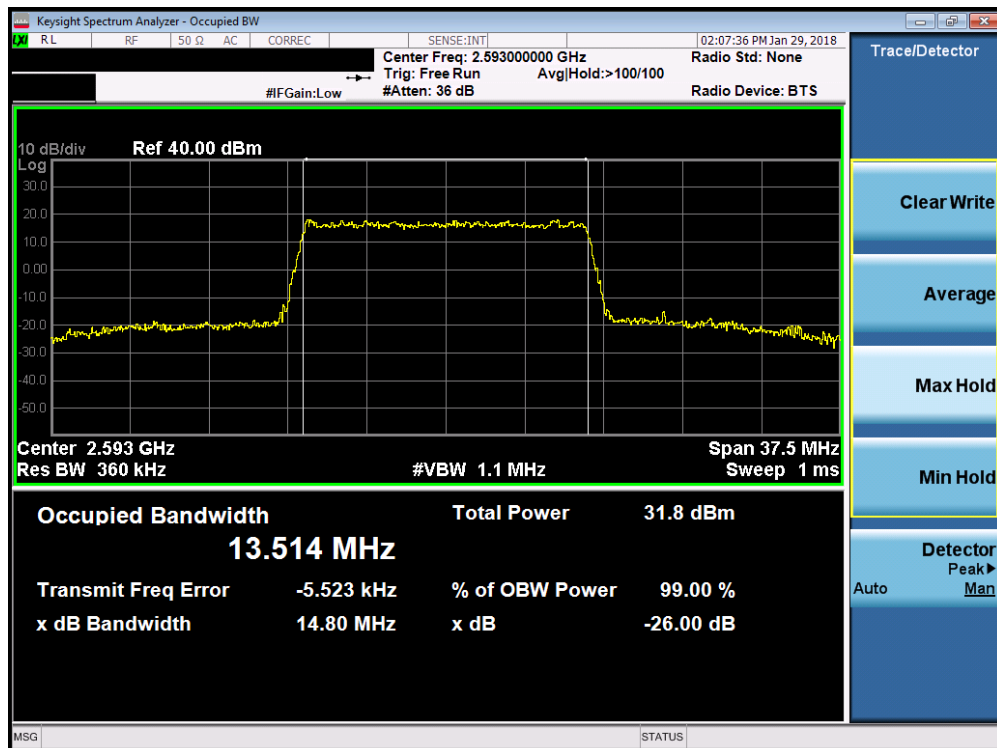


Plot 7-35. Occupied Bandwidth Plot (Band 41 - 15.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 32 of 113

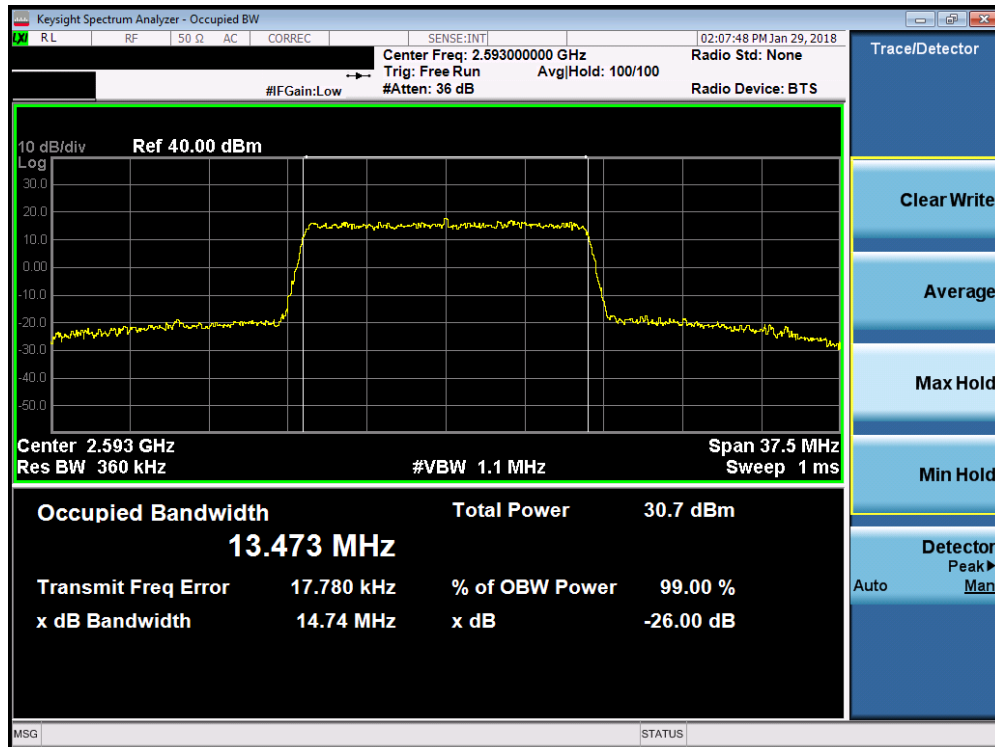


Plot 7-36. Occupied Bandwidth Plot (Band 41 - 15.0MHz 64-QAM - Full RB Configuration)

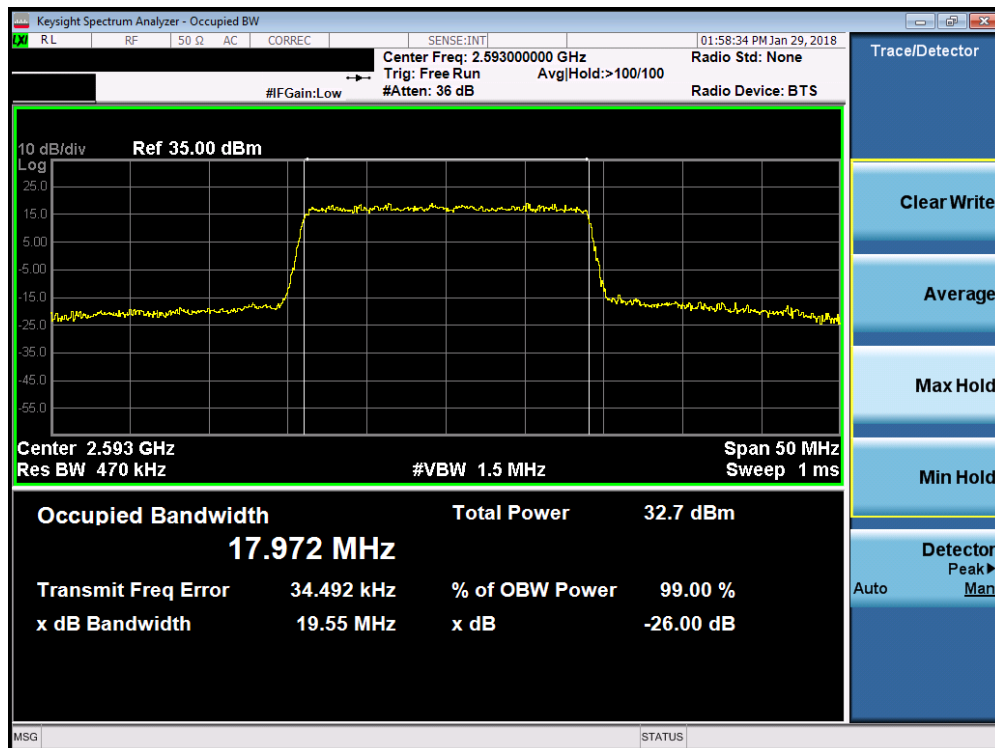


Plot 7-37. Occupied Bandwidth Plot (Band 41 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSCV39	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 33 of 113

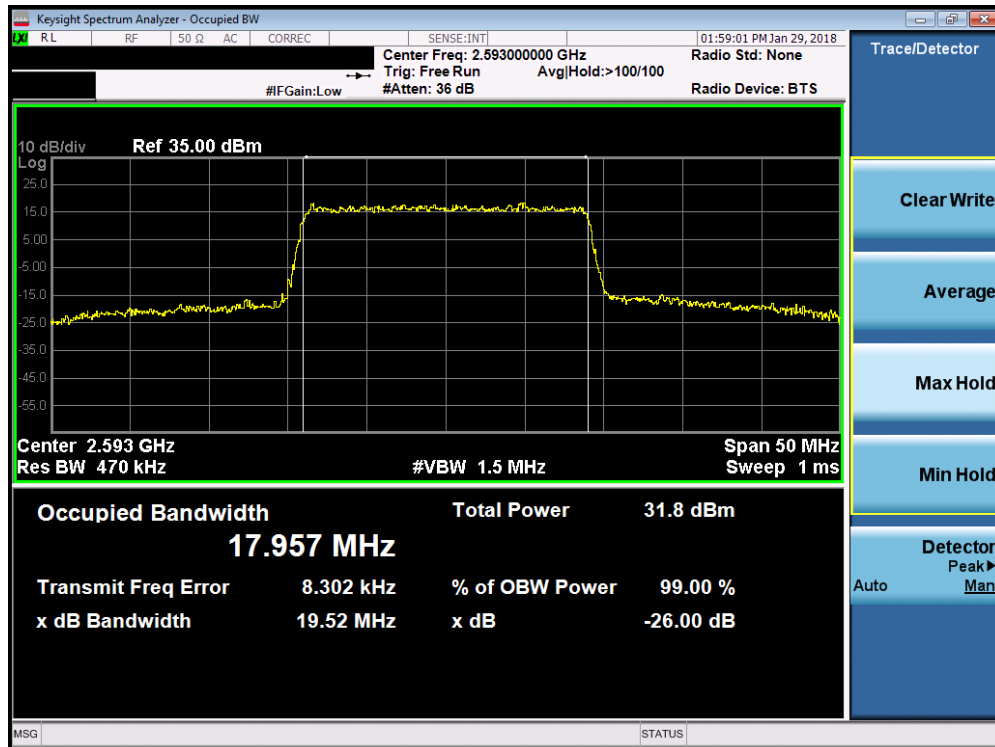

Plot 7-38. Occupied Bandwidth Plot (Band 41 - 20.0MHz 16-QAM - Full RB Configuration)

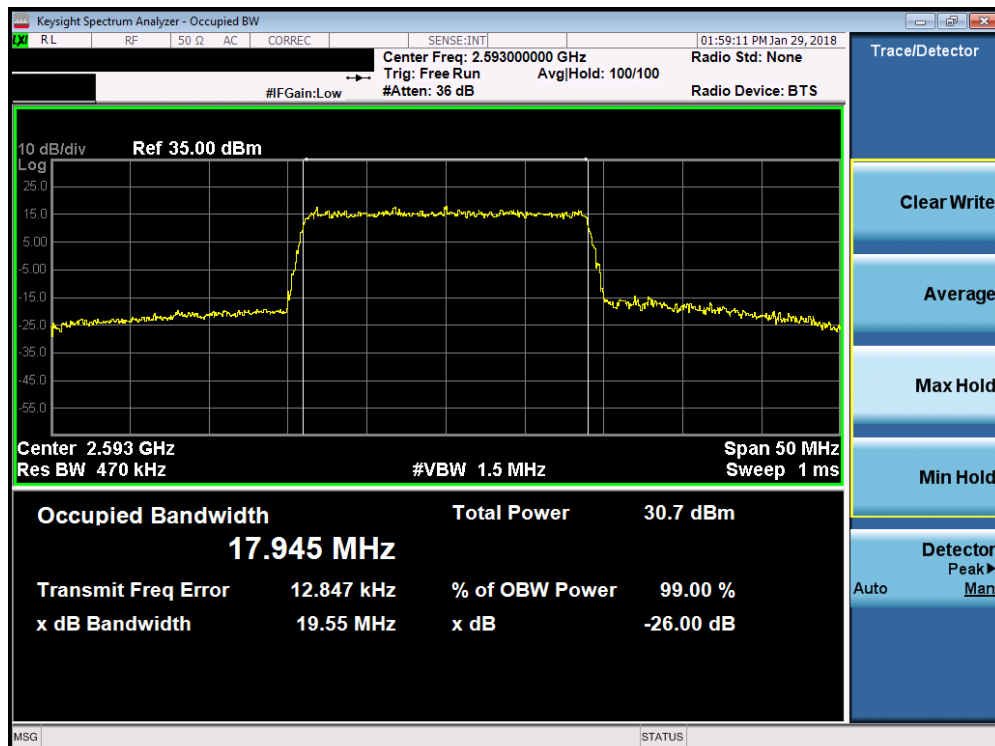

Plot 7-39. Occupied Bandwidth Plot (Band 41 - 20.0MHz 64-QAM - Full RB Configuration)

FCC ID: A3LSCV39	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 34 of 113

7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §22.917(a) §27.53(c)(2) §27.53(g) §27.53(m)

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

For Band 41, the minimum permissible attenuation level of any spurious emission is $55 + \log_{10}(P_{\text{Watts}})$.

Test Procedure Used

KDB 971168 D01 v03 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

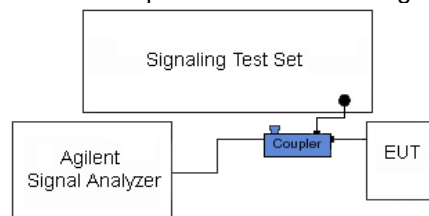



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSCV39	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 35 of 113

Band 17

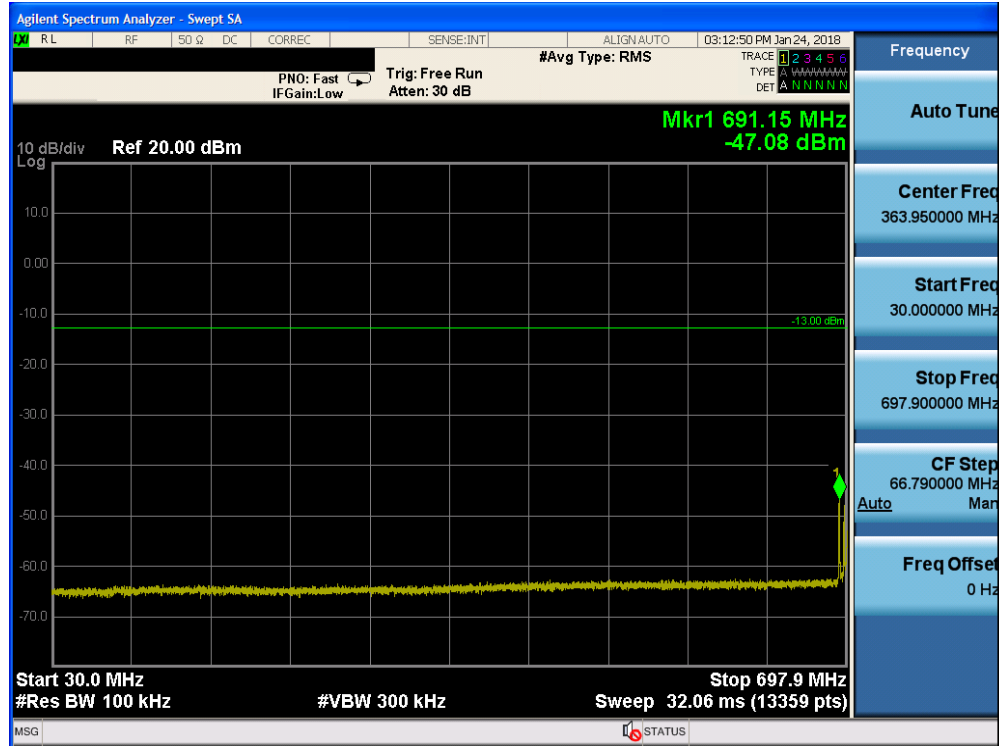


Plot 7-40. Conducted Spurious Plot (Band 17 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

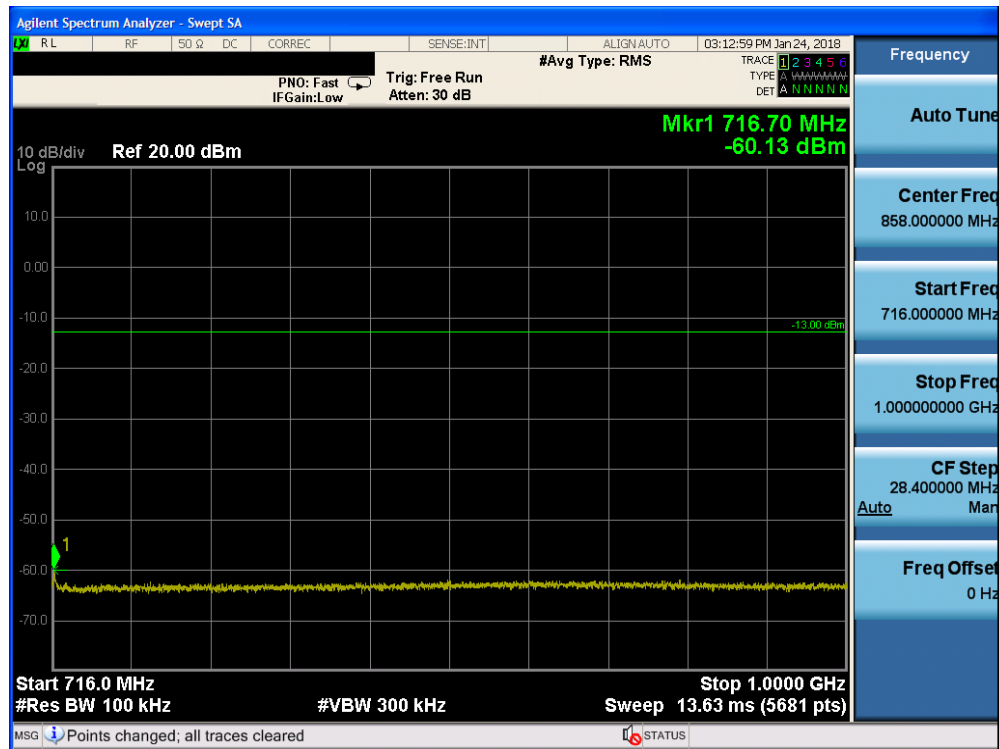


Plot 7-41. Conducted Spurious Plot (Band 17 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: A3LSCV39	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 36 of 113

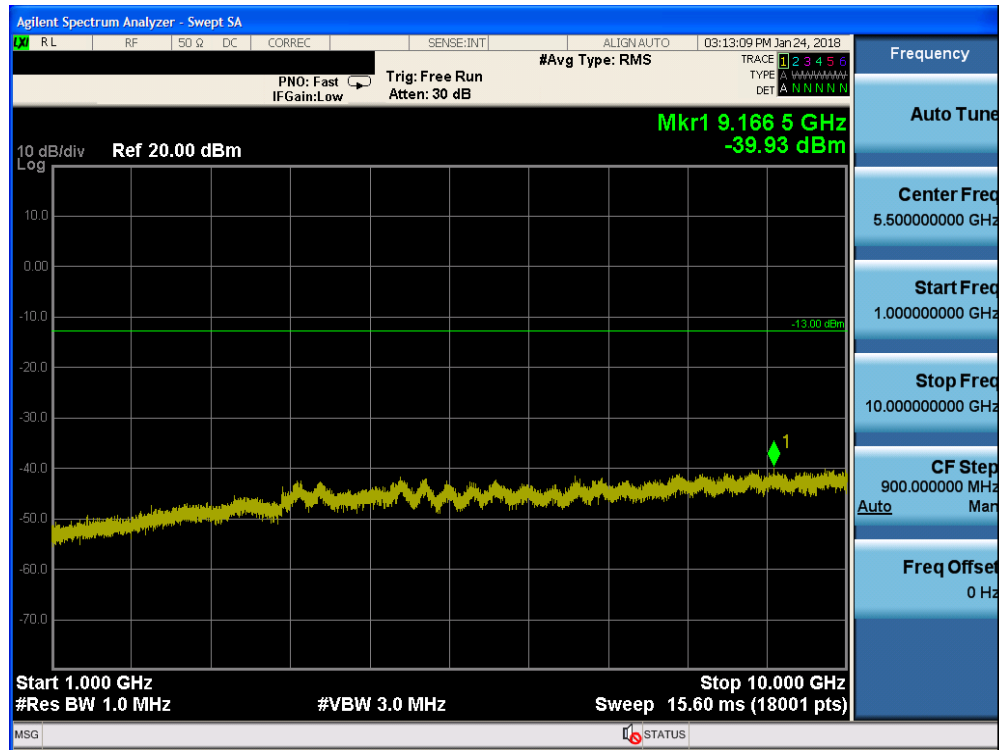


Plot 7-42. Conducted Spurious Plot (Band 17 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

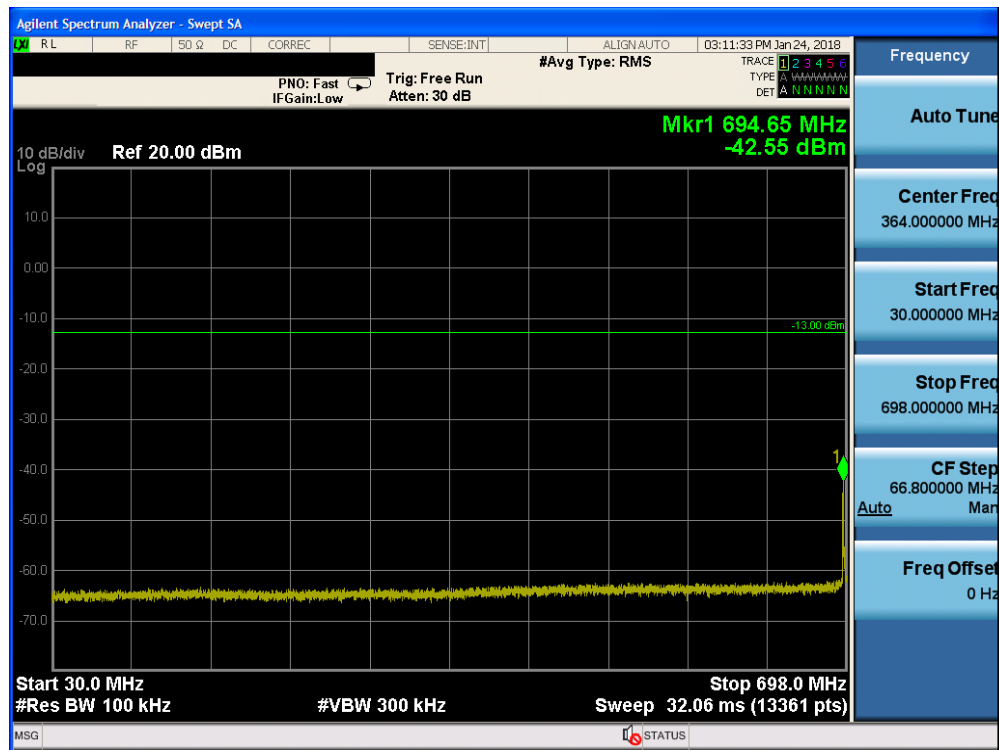


Plot 7-43. Conducted Spurious Plot (Band 17 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 37 of 113

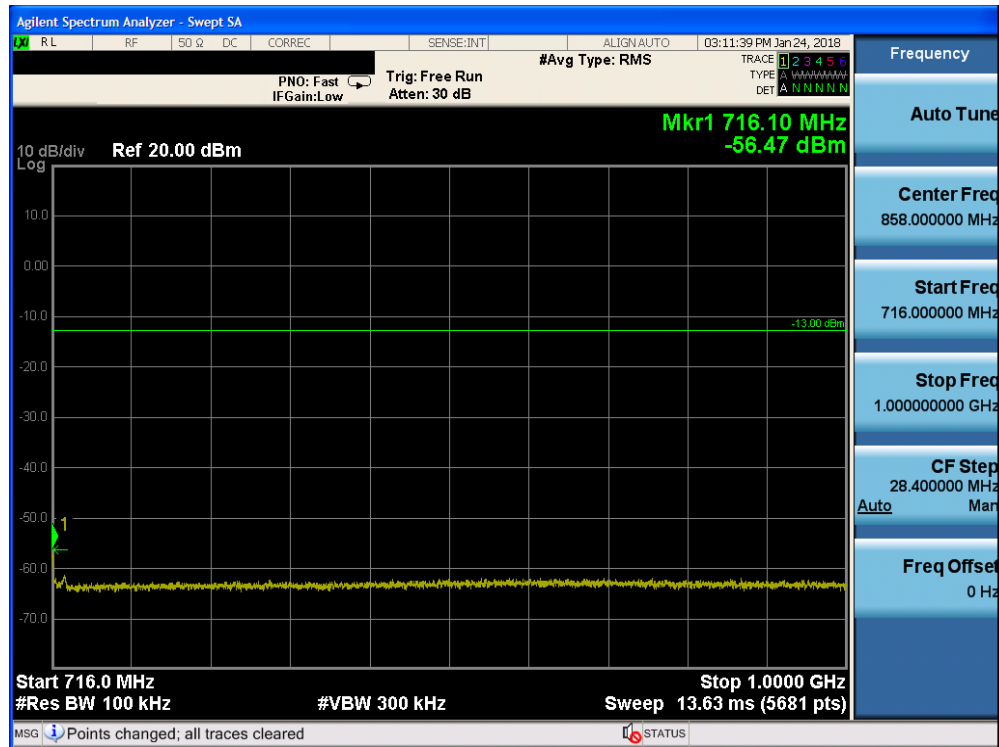


Plot 7-44. Conducted Spurious Plot (Band 17 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

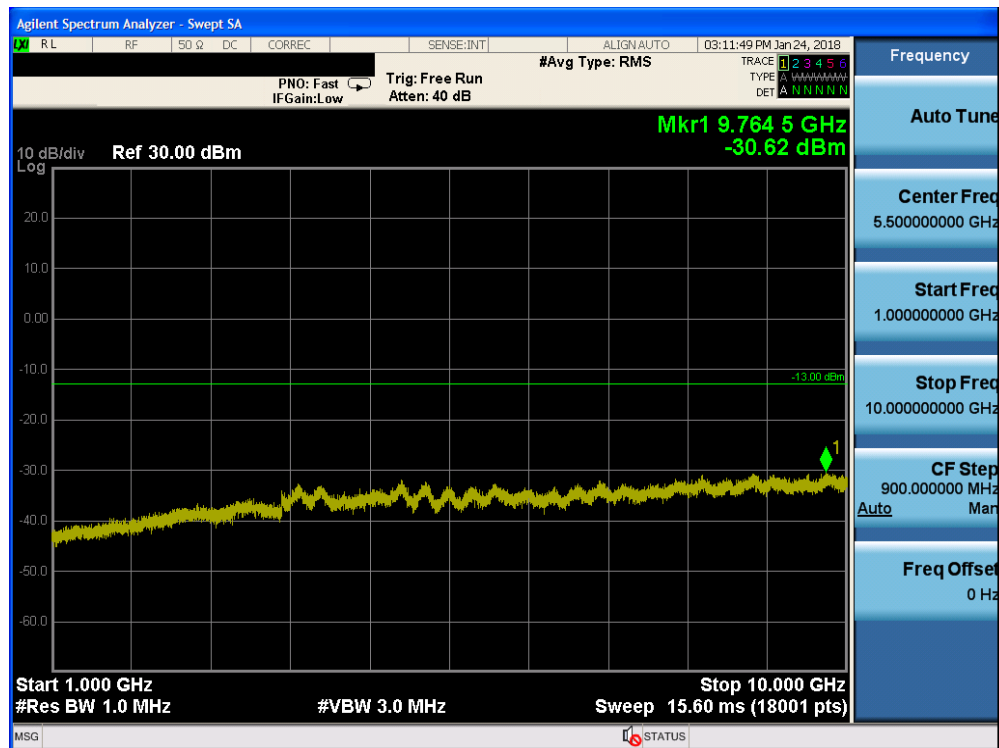


Plot 7-45. Conducted Spurious Plot (Band 17 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 38 of 113

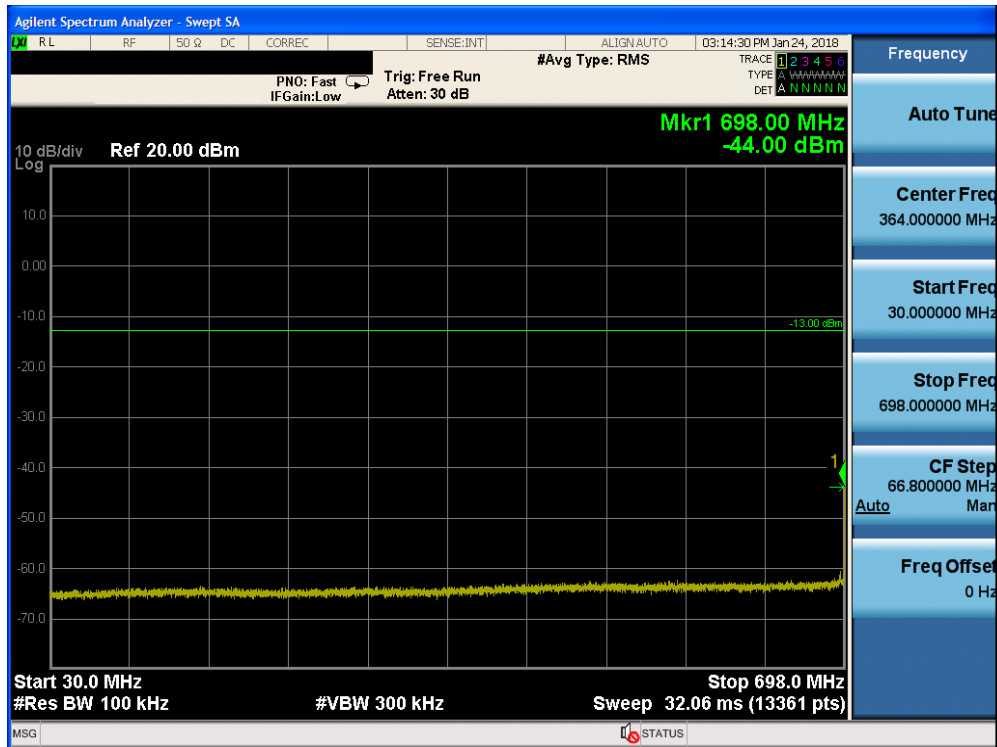


Plot 7-46. Conducted Spurious Plot (Band 17 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

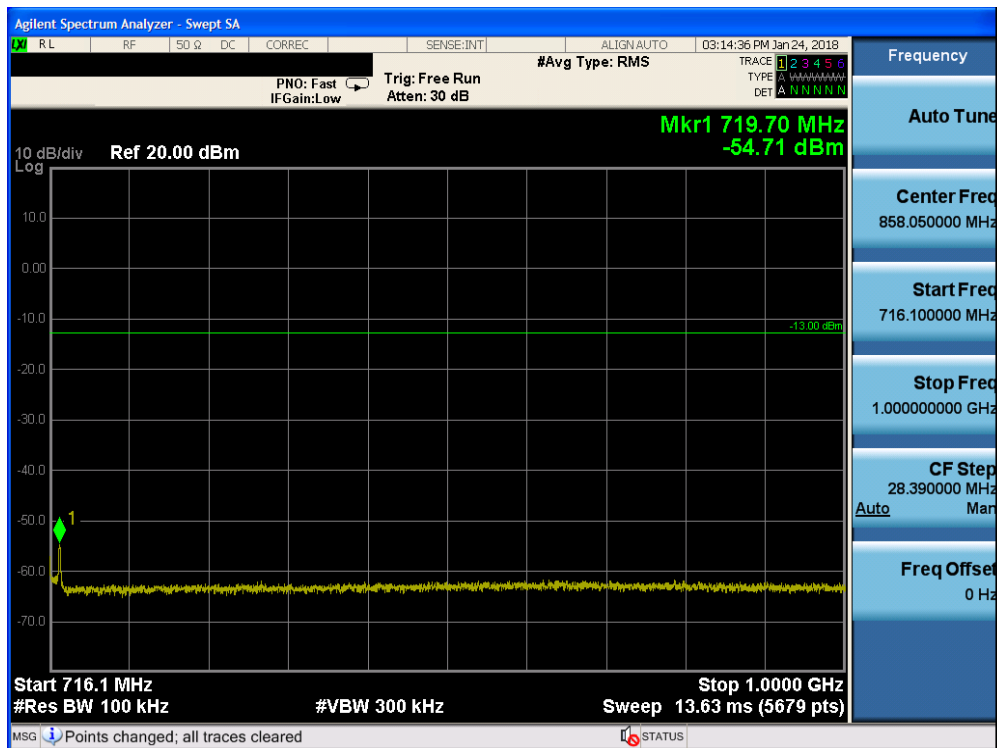

Plot 7-47. Conducted Spurious Plot (Band 17 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: A3LSCV39	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 39 of 113

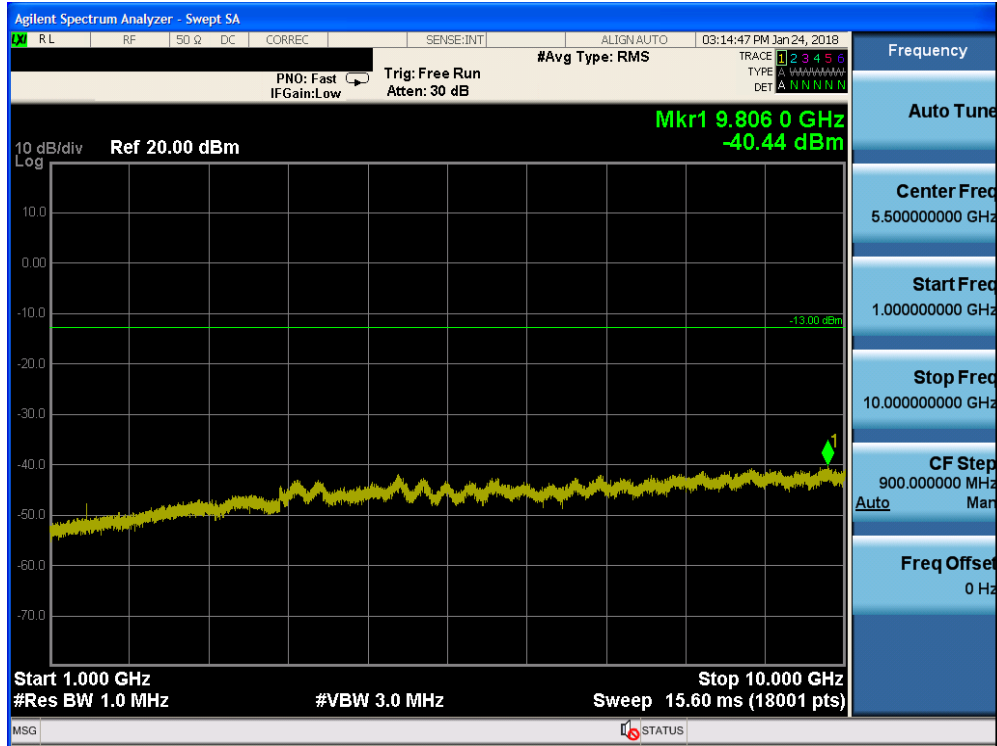


Plot 7-48. Conducted Spurious Plot (Band 17 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: A3LSCV39	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 40 of 113

Band 13

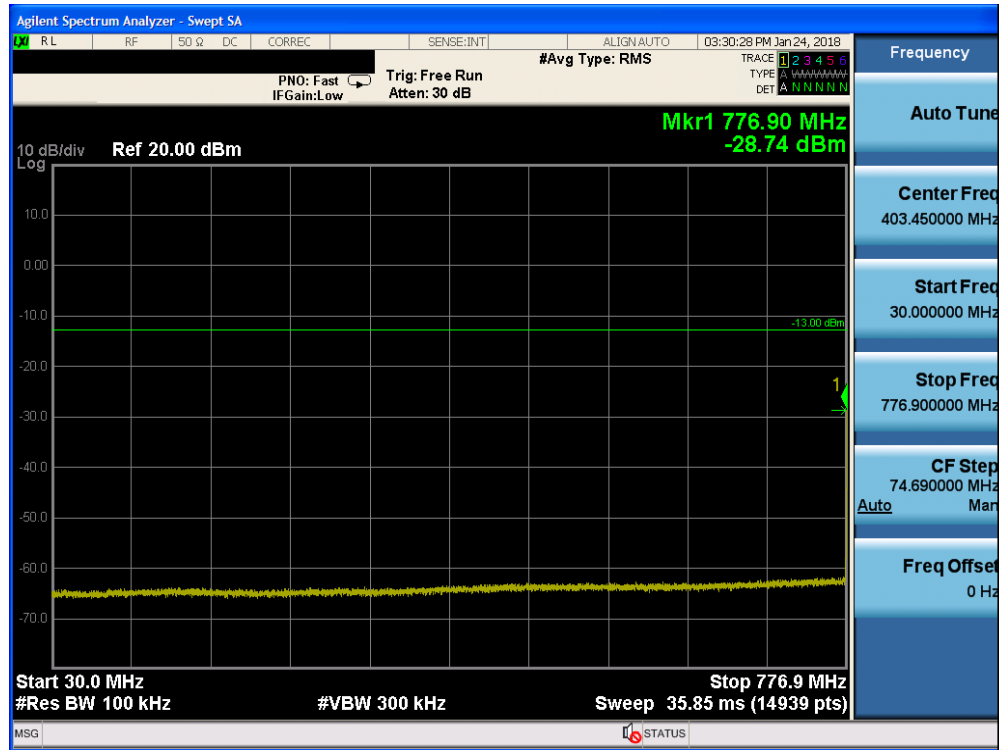


Plot 7-49. Conducted Spurious Plot (Band 13 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

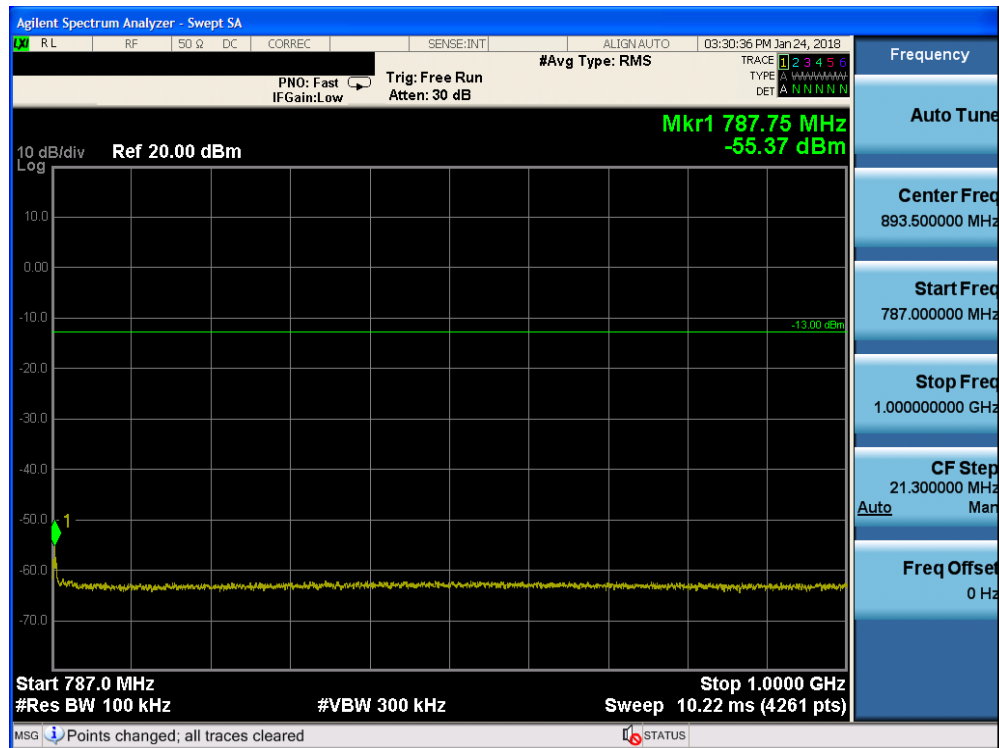


Plot 7-50. Conducted Spurious Plot (Band 13 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: A3LSCV39	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 41 of 113

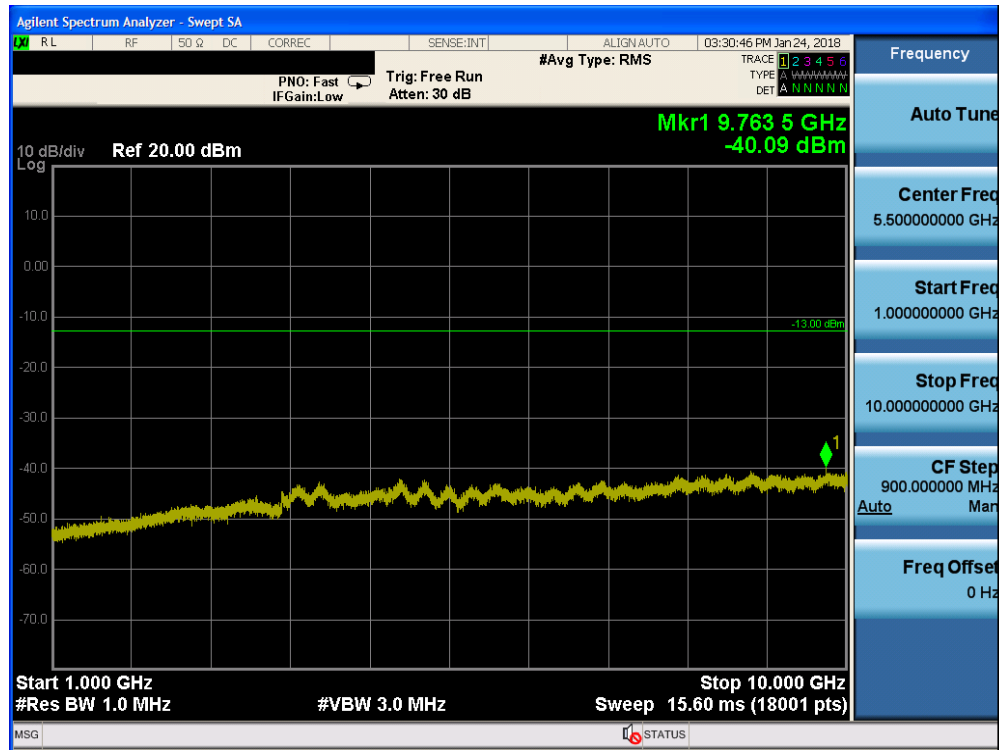


Plot 7-51. Conducted Spurious Plot (Band 13 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

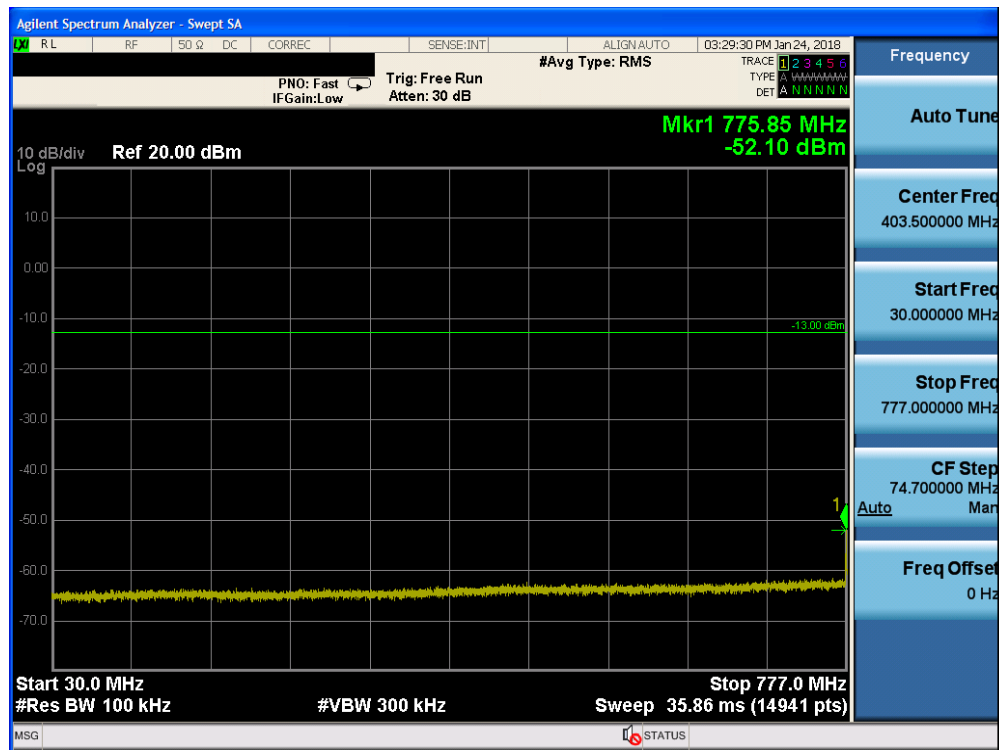


Plot 7-52. Conducted Spurious Plot (Band 13 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 42 of 113

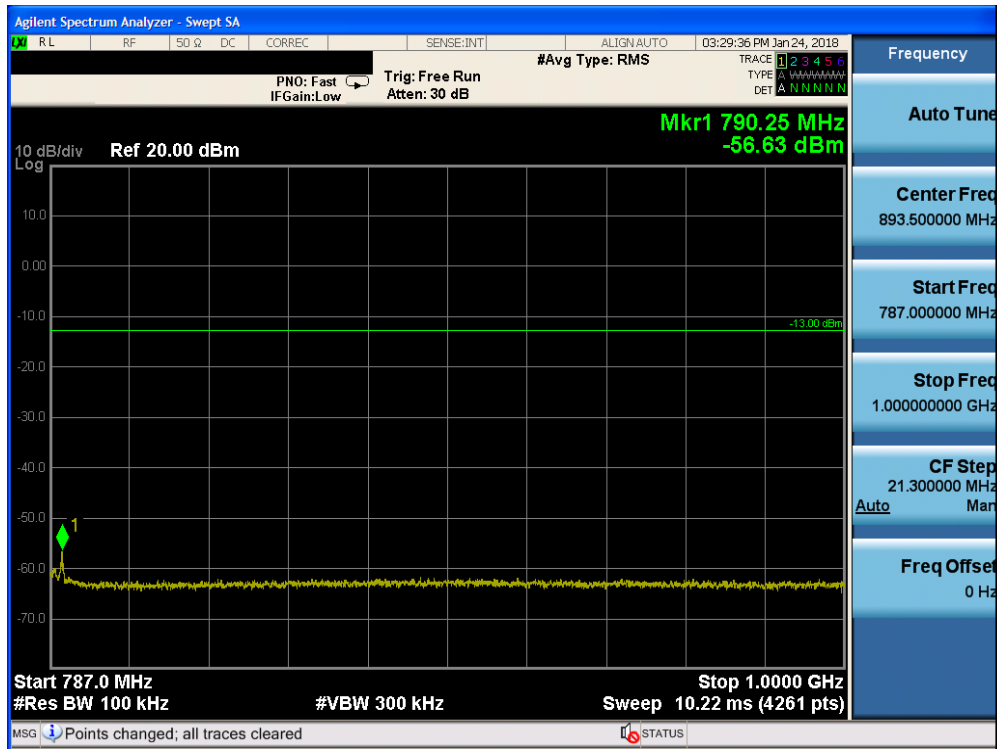


Plot 7-53. Conducted Spurious Plot (Band 13 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

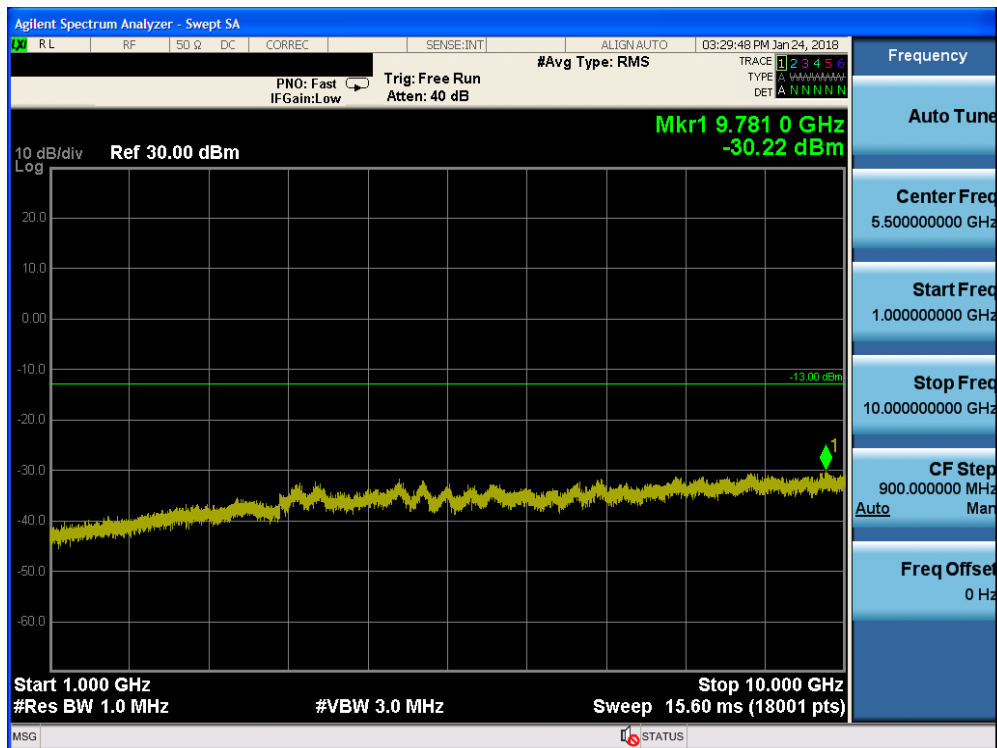


Plot 7-54. Conducted Spurious Plot (Band 13 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 43 of 113

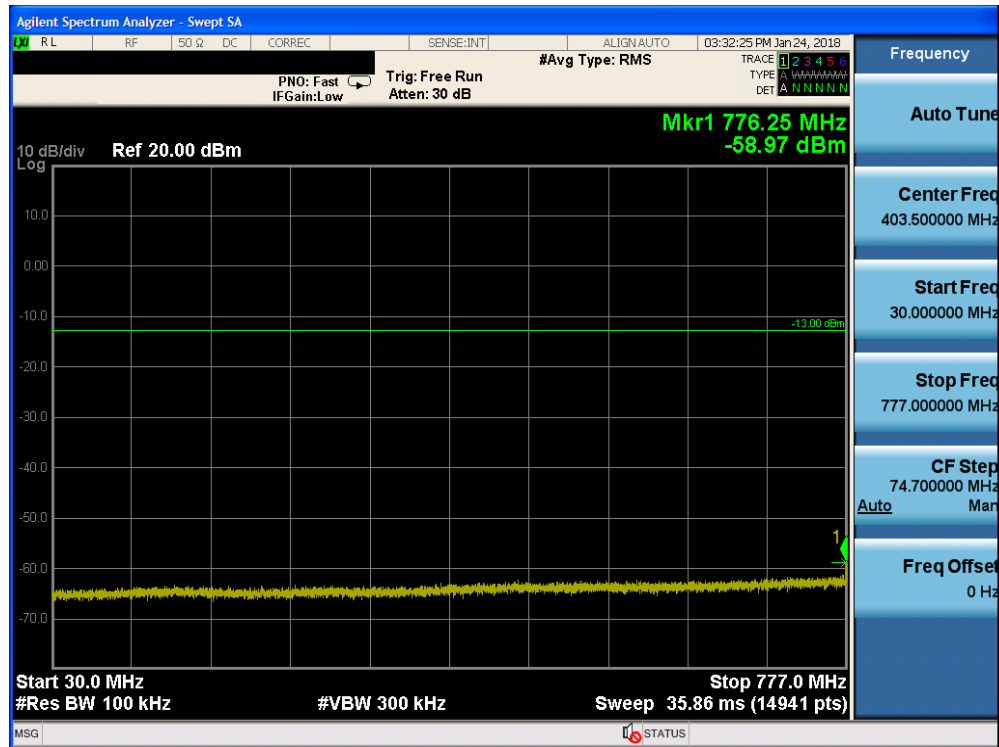


Plot 7-55. Conducted Spurious Plot (Band 13 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

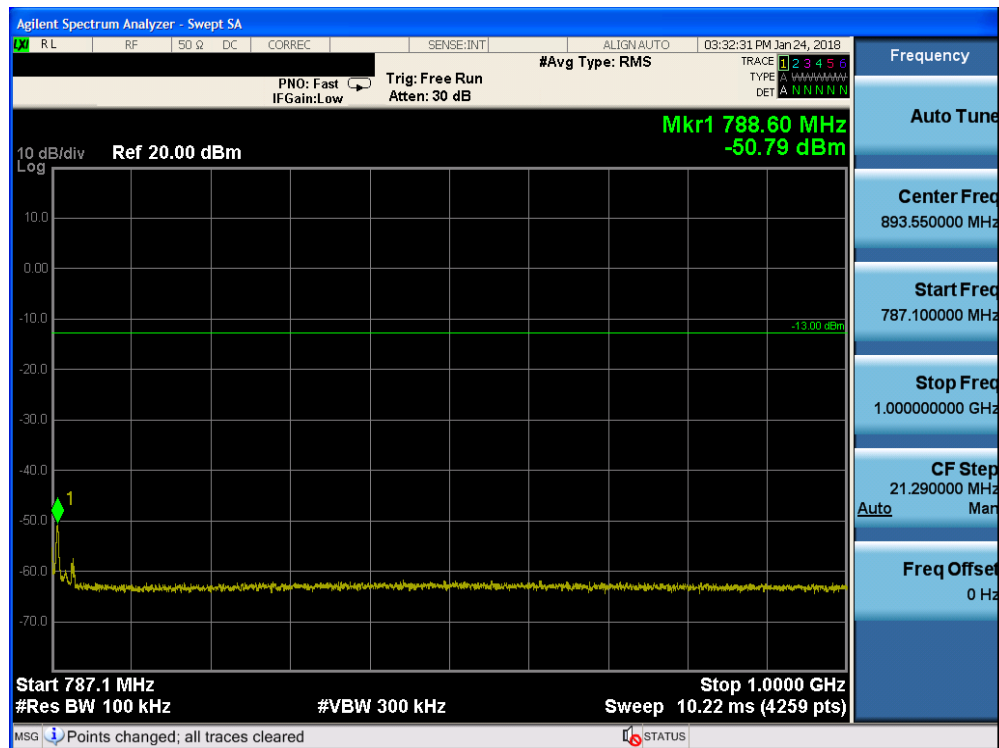

Plot 7-56. Conducted Spurious Plot (Band 13 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: A3LSCV39	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 44 of 113

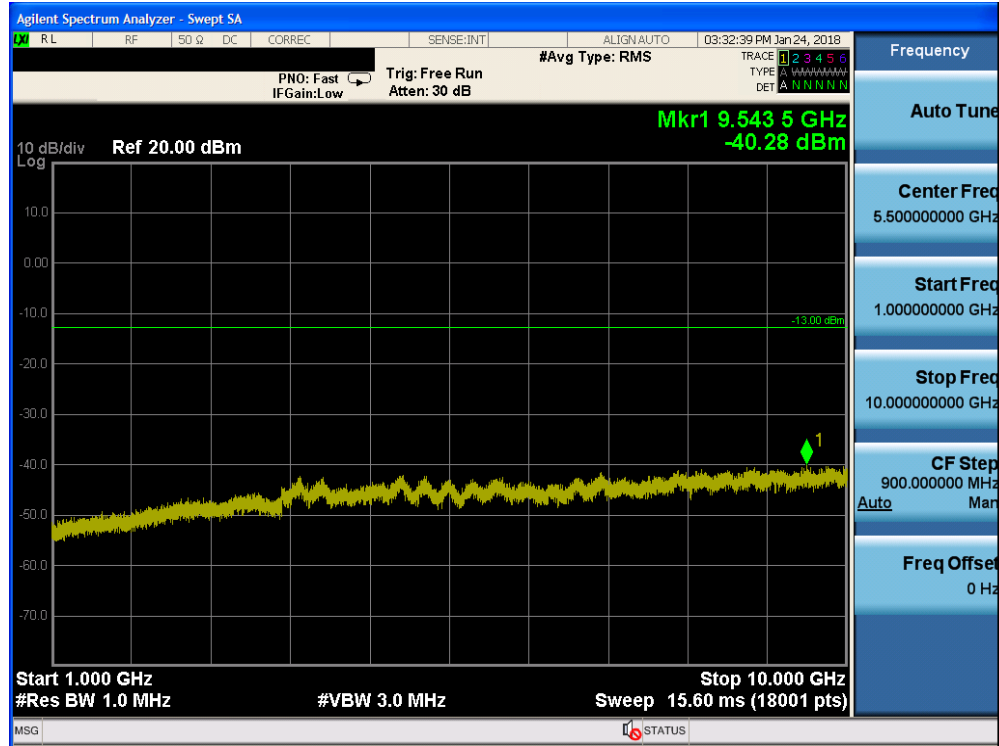


Plot 7-57. Conducted Spurious Plot (Band 13 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: A3LSCV39	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 45 of 113

Band 5/26

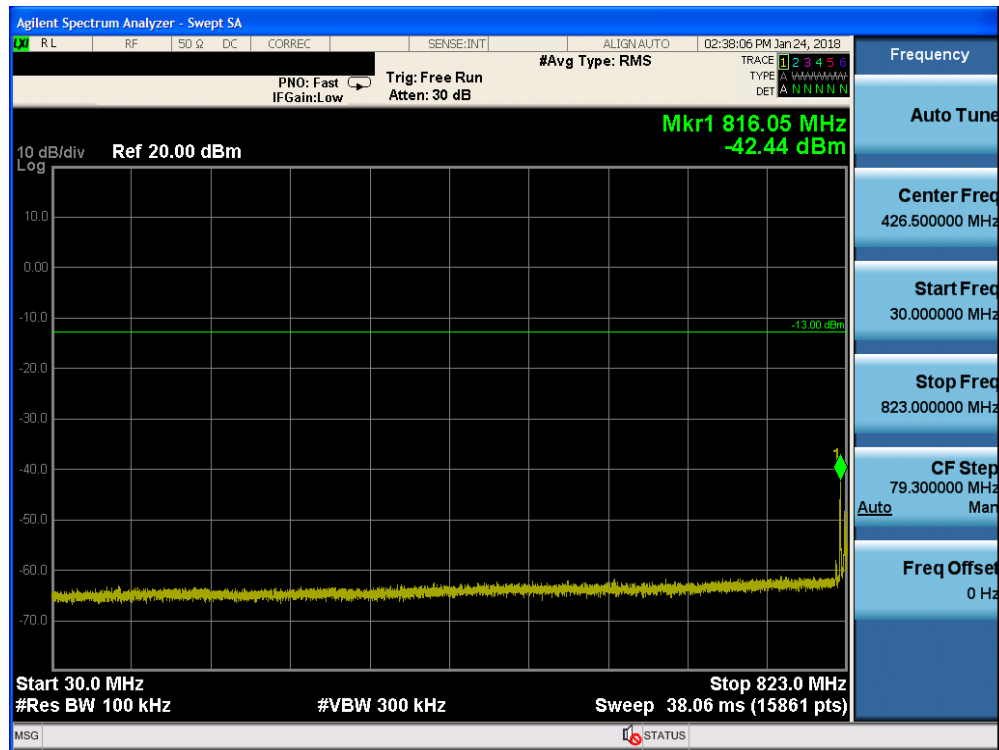


Plot 7-58. Conducted Spurious Plot (Band 5/26 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

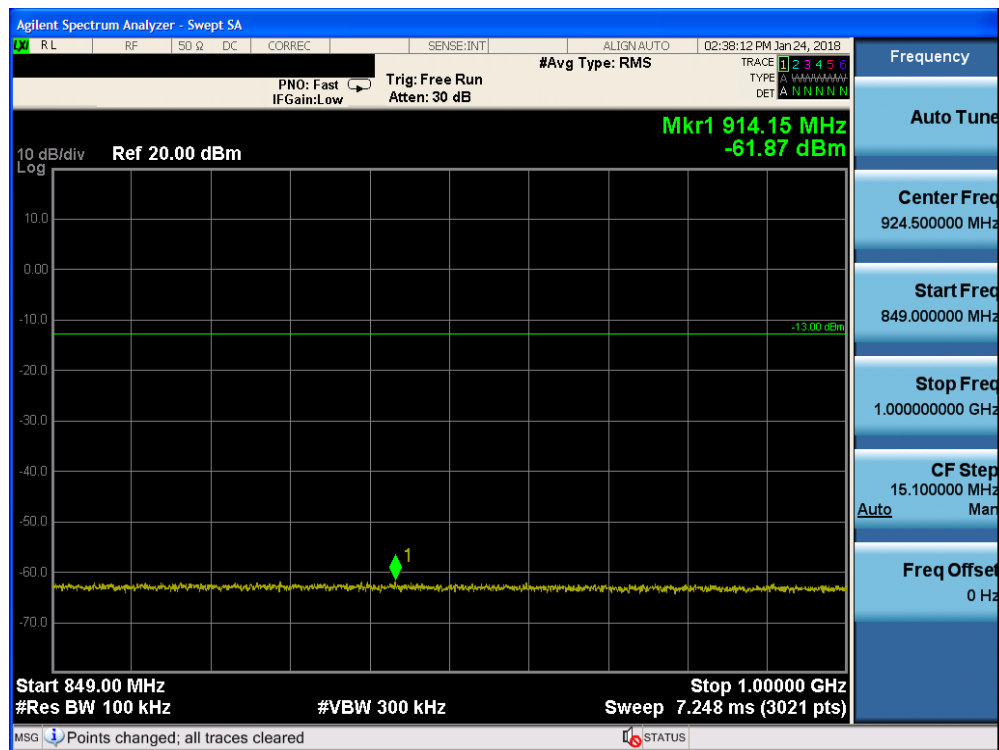


Plot 7-59. Conducted Spurious Plot (Band 5/26 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: A3LSCV39	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 46 of 113

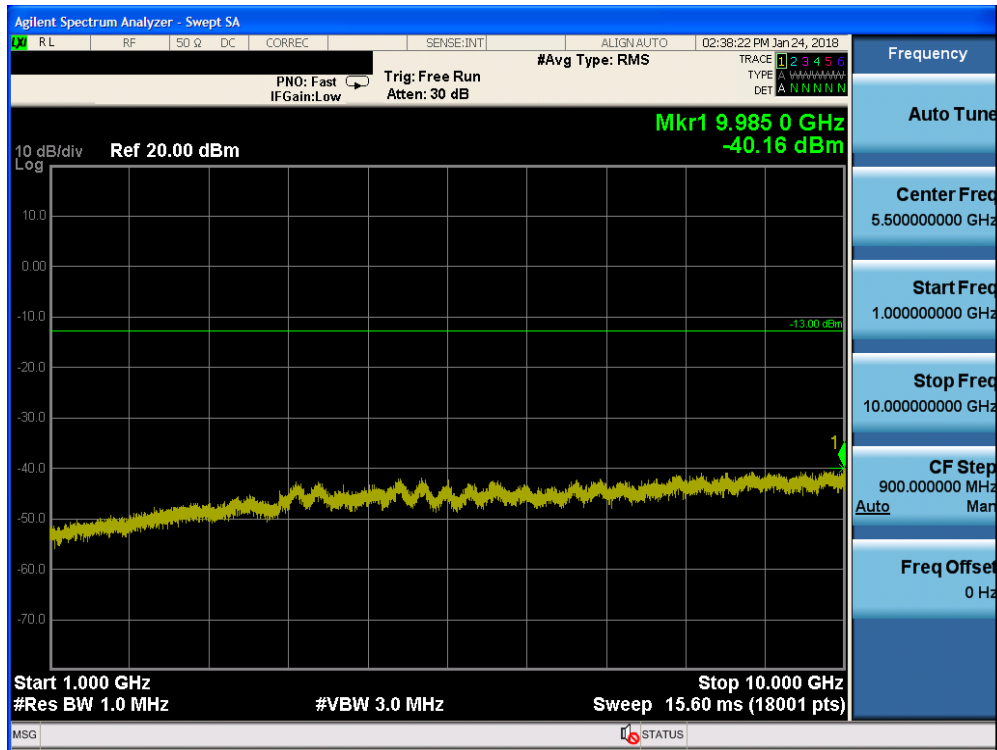


Plot 7-60. Conducted Spurious Plot (Band 5/26 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

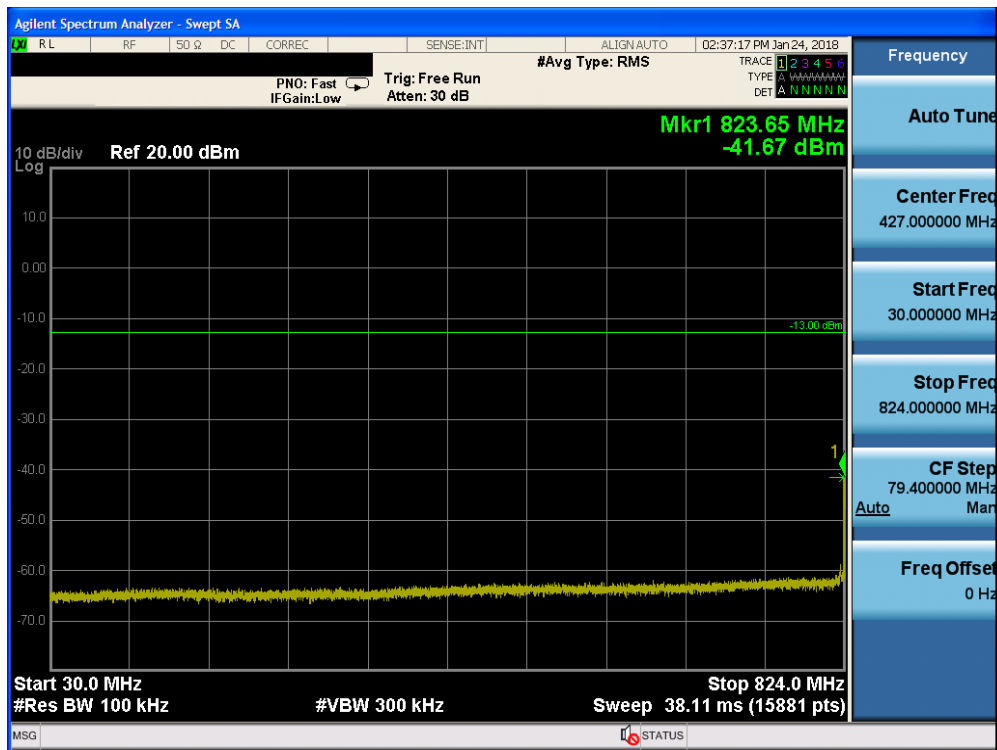


Plot 7-61. Conducted Spurious Plot (Band 5/26 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 47 of 113

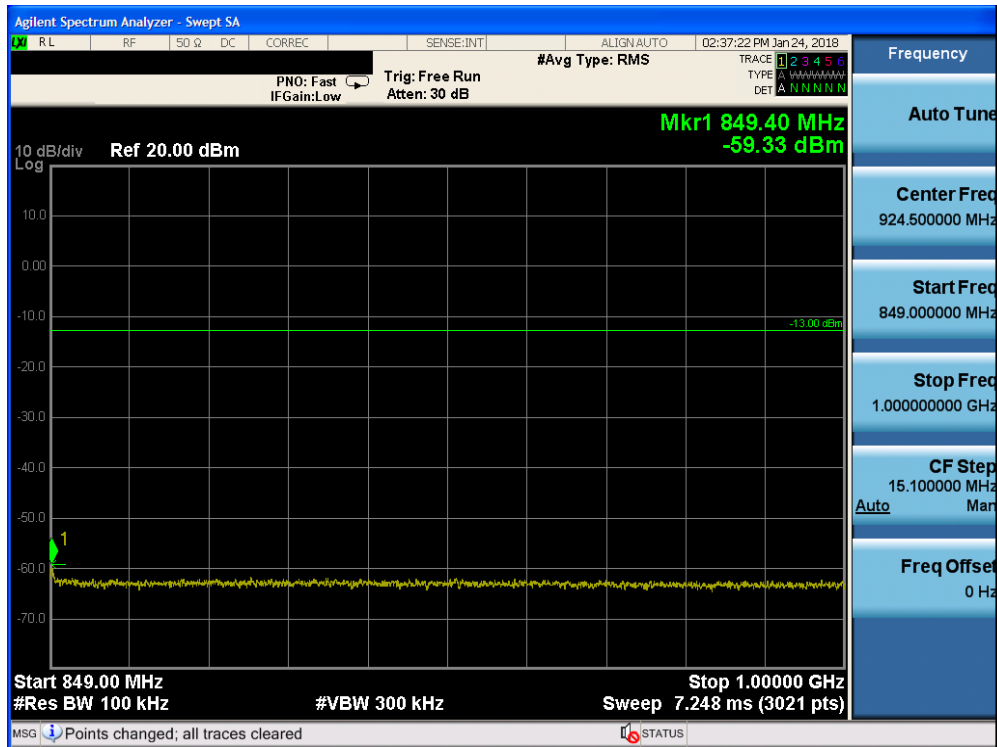


Plot 7-62. Conducted Spurious Plot (Band 5/26 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

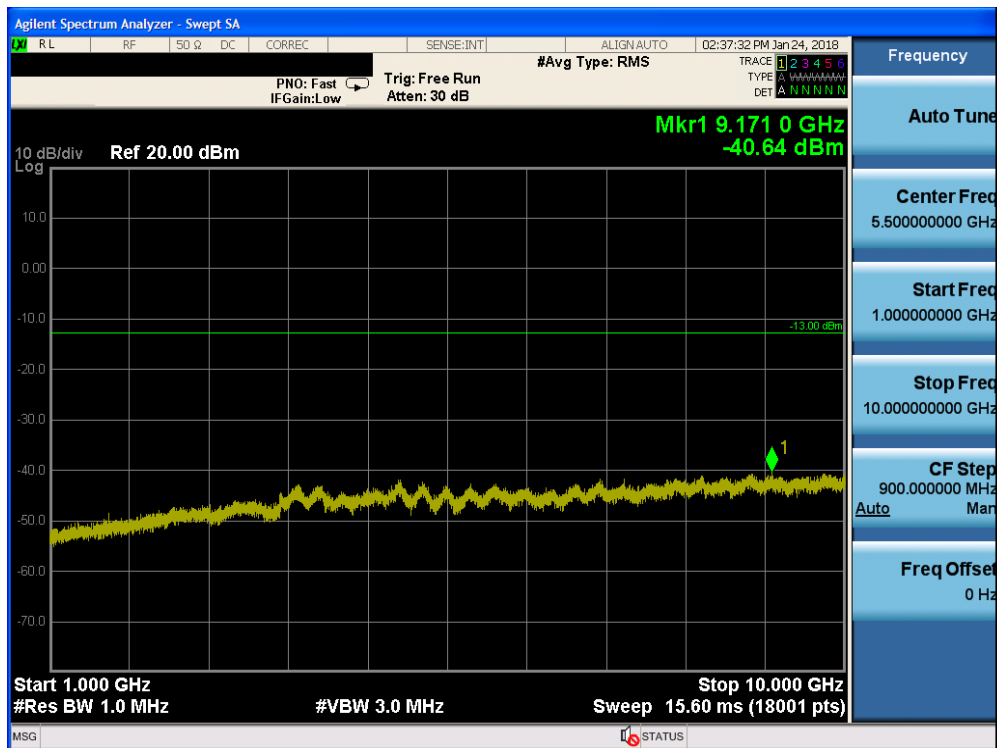


Plot 7-63. Conducted Spurious Plot (Band 5/26 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 48 of 113

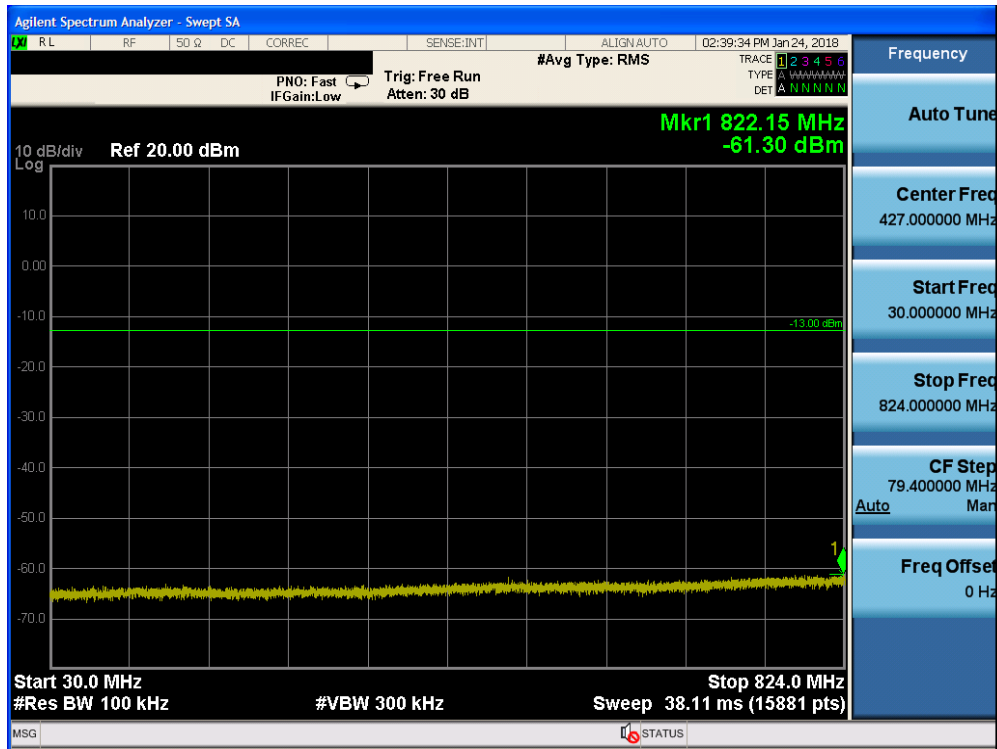


Plot 7-64. Conducted Spurious Plot (Band 5/26 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

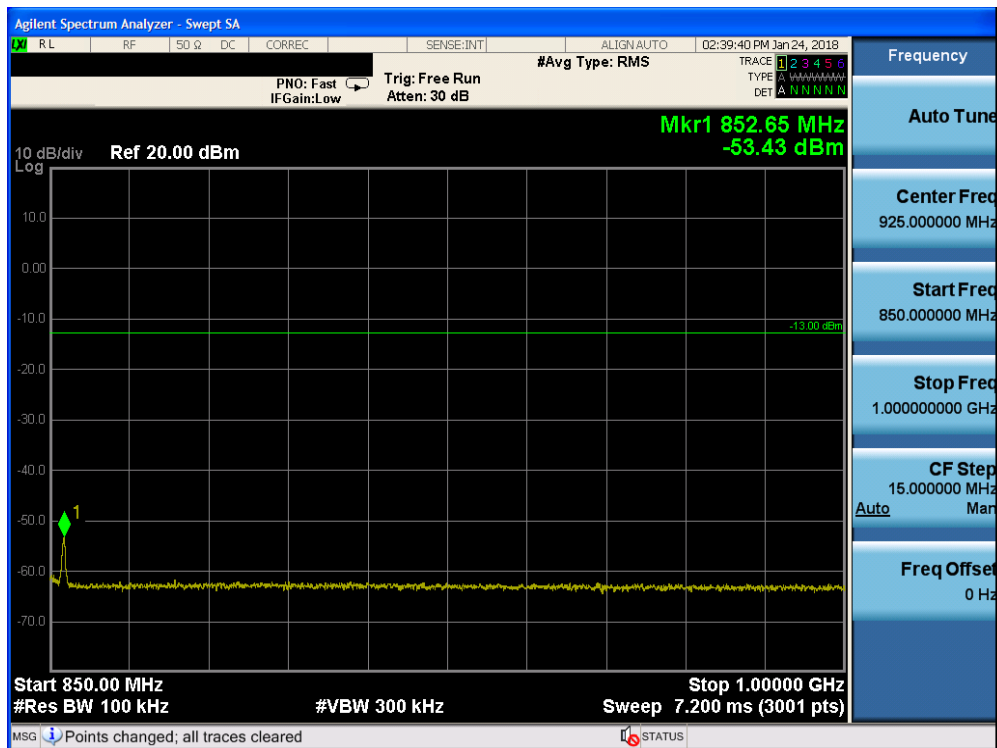

Plot 7-65. Conducted Spurious Plot (Band 5/26 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 49 of 113

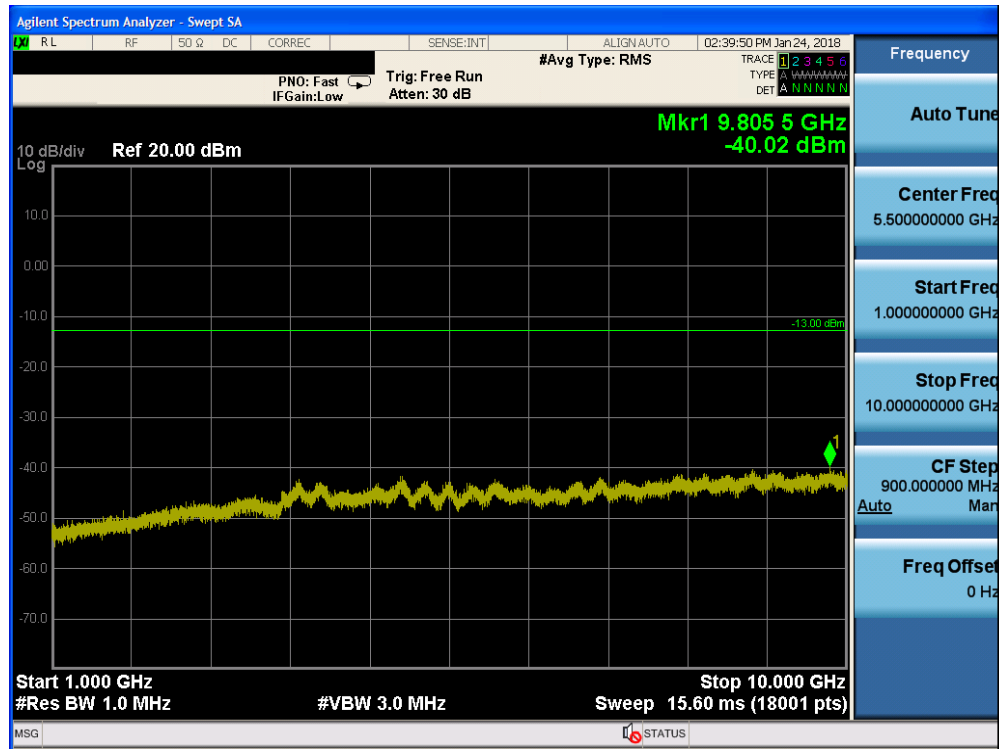


Plot 7-66. Conducted Spurious Plot (Band 5/26 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: A3LSCV39	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 50 of 113

Band 41

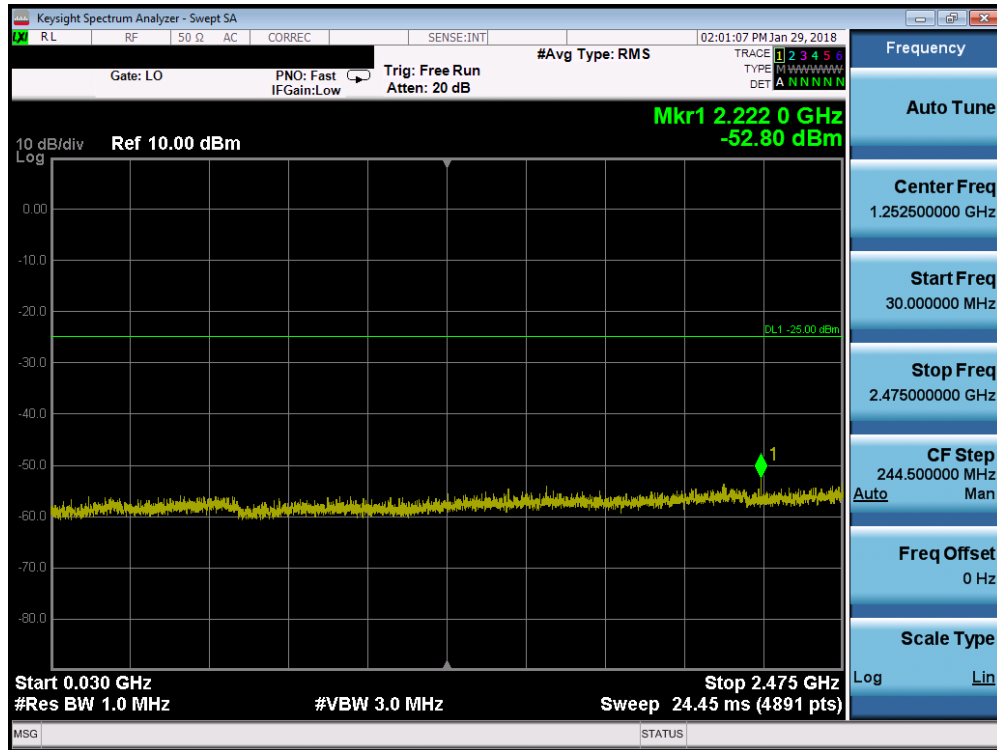


Plot 7-67. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

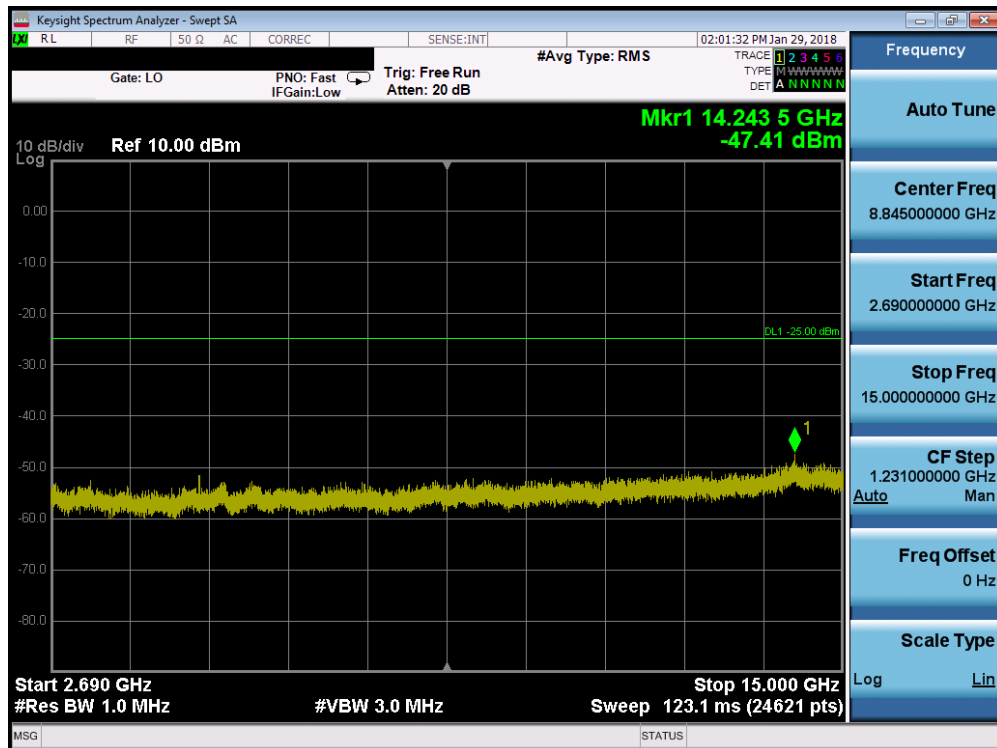


Plot 7-68. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 51 of 113

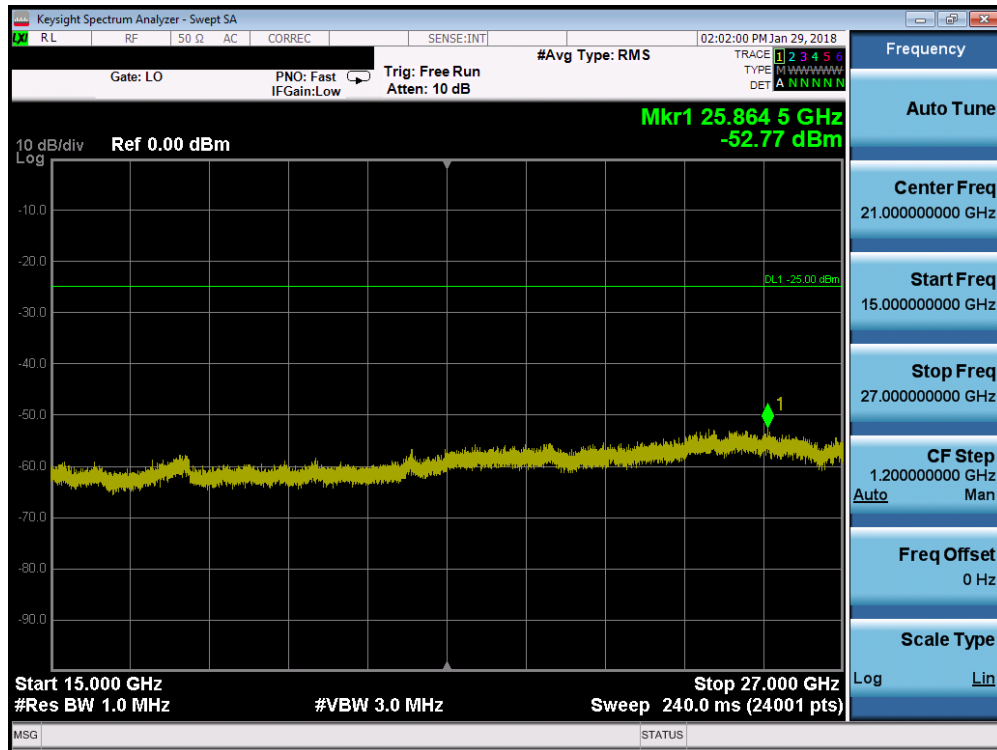


Plot 7-69. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

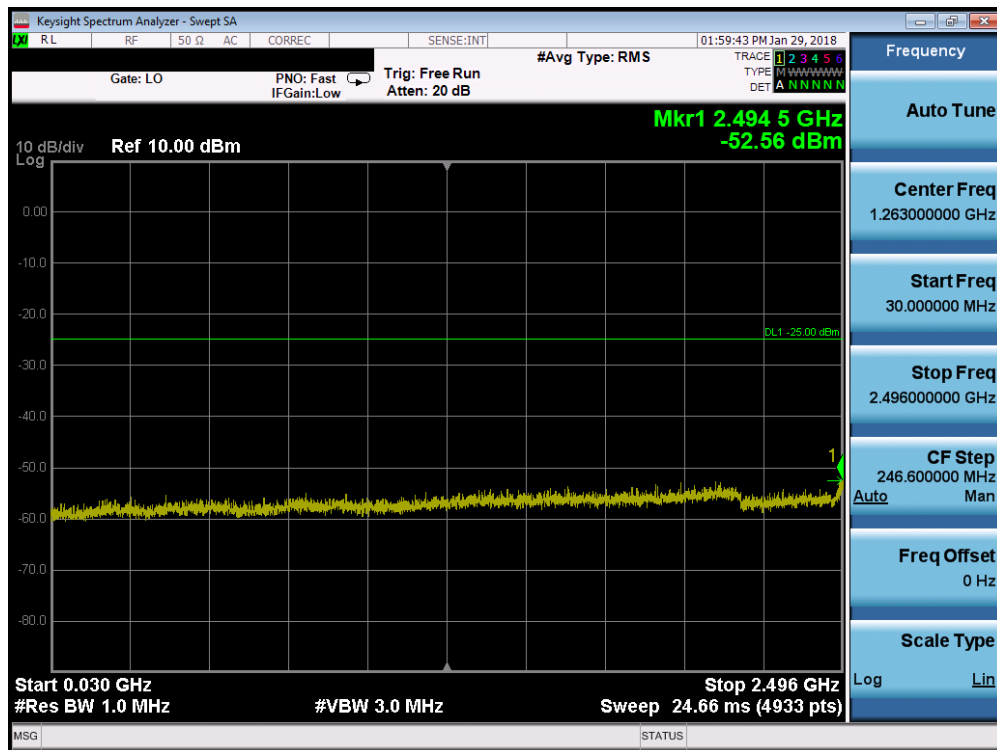


Plot 7-70. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSCV39	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 52 of 113

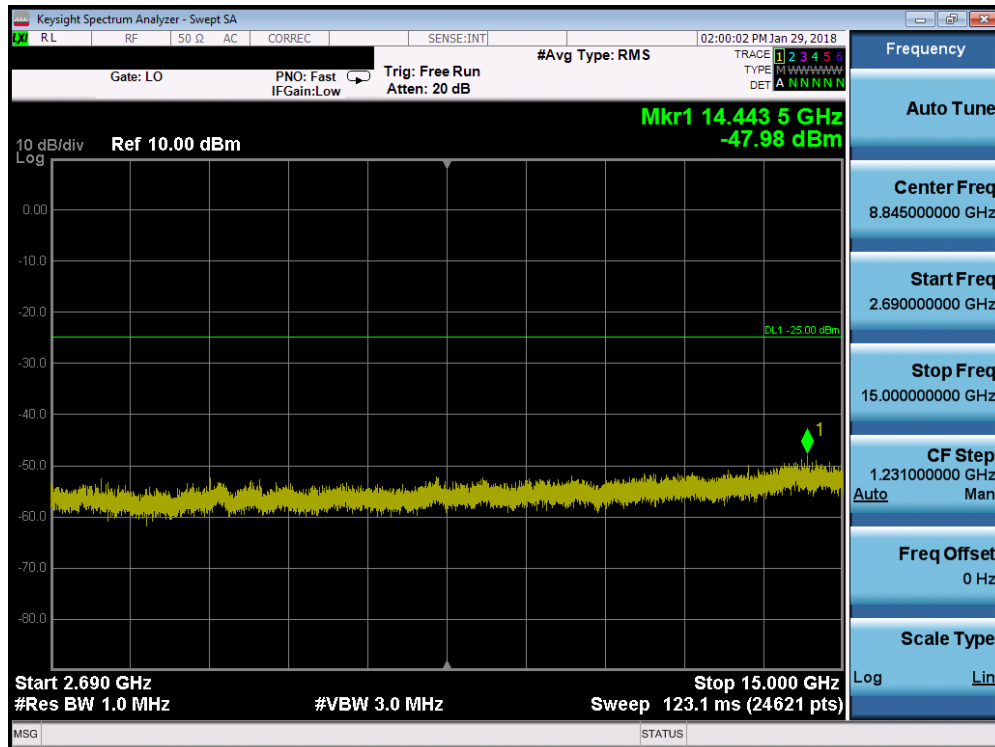


Plot 7-71. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

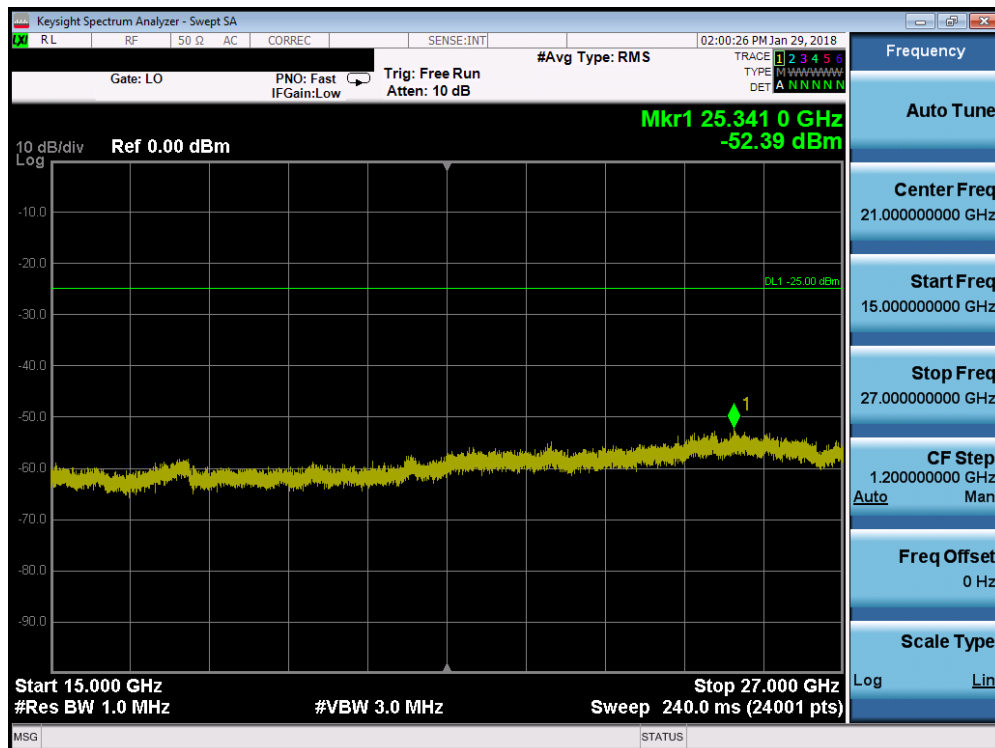


Plot 7-72. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSCV39	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset		Page 53 of 113

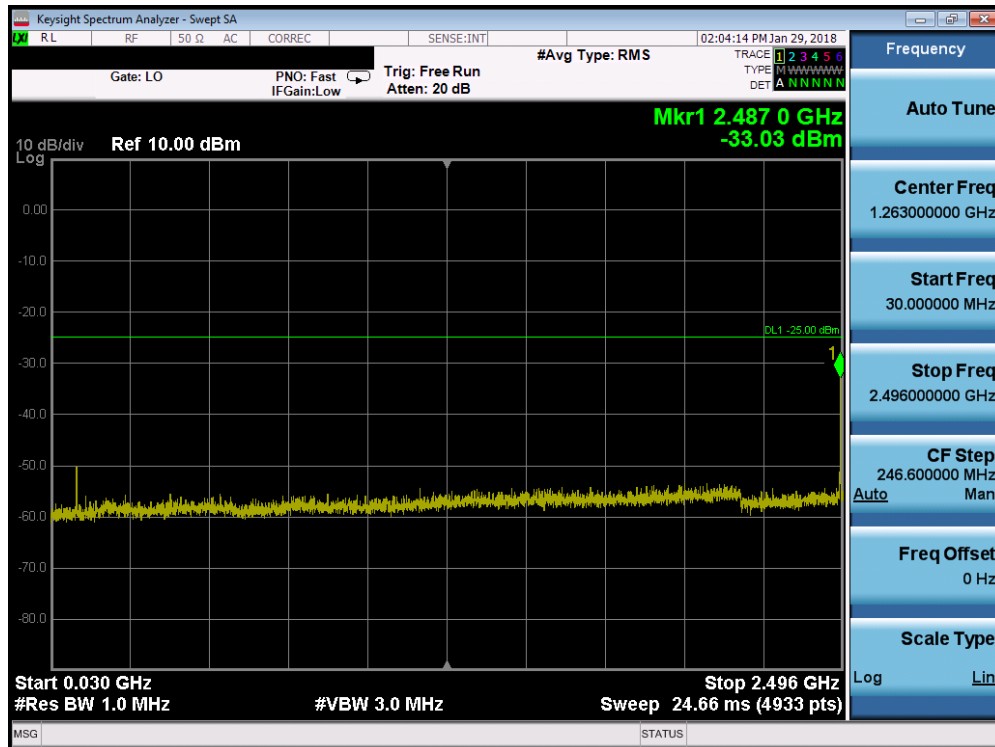


Plot 7-73. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

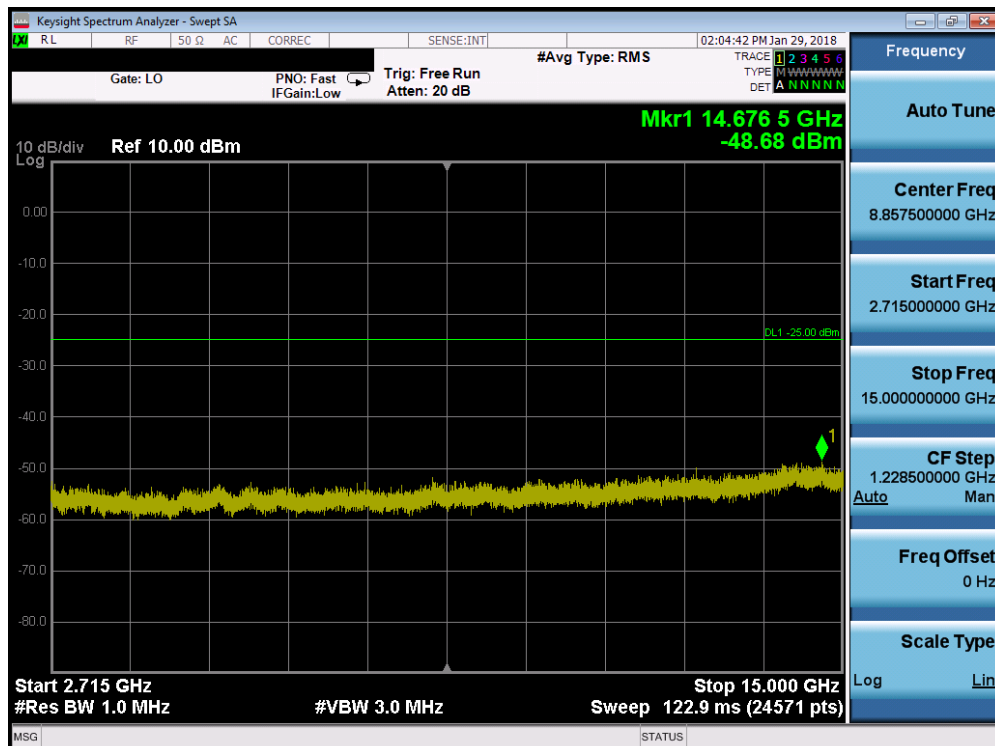

Plot 7-74. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 54 of 113

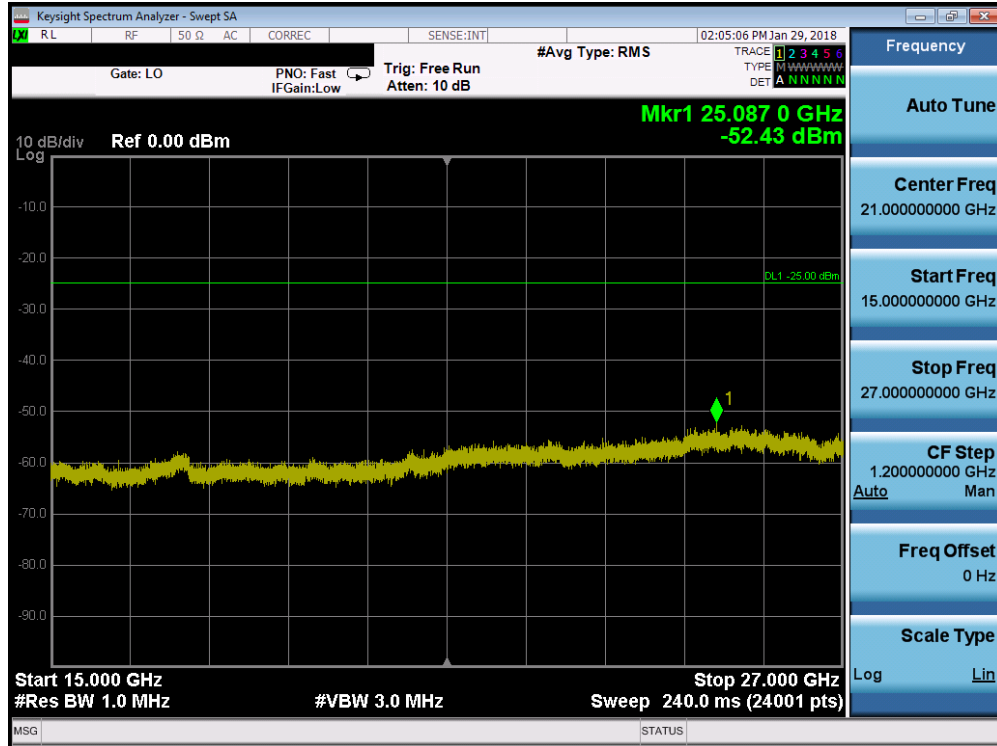

Plot 7-75. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: A3LSCV39	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1801230010-03.A3L	Test Dates: 1/24-2/20/2018	EUT Type: Portable Handset	Page 55 of 113