



MEASUREMENT REPORT

FCC Part 22, 24 & 27 LTE

Applicant Name:

Samsung Electronics Co., Ltd.
416 Maetan 3-Dong, Yeongtong-gu
Suwon-si, Gyeonggi-do
443-742, Republic of Korea

Date of Testing:

August 6-14, 2012

Test Site/Location:

PCTEST Lab., Columbia, MD, USA

Test Report Serial No.:

0Y1207311075.A3L

FCC ID : A3LSGHI437

APPLICANT: SAMSUNG ELECTRONICS CO., LTD.

Application Type:

Certification

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part(s):

§2; §22; §24; §27

EUT Type:

Portable Handset

Model(s):

SGH-I437

Test Device Serial No.:

identical prototype [S/N: LTE Band 2, 4, 5, 17]

Mode	Tx Frequency (MHz)	Emission Designator	Modulation	ERP/EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE Band 17	706.5 - 713.5	4M52G7D	QPSK	0.104	20.190
LTE Band 17	706.5 - 713.5	4M52W7D	16QAM	0.079	18.990
LTE Band 17	709 - 711	8M96G7D	QPSK	0.091	19.570
LTE Band 17	709 - 711	8M94W7D	16QAM	0.086	19.320
LTE Band 5	826.5 - 846.5	4M50G7D	QPSK	0.075	18.740
LTE Band 5	826.5 - 846.5	4M50W7D	16QAM	0.056	17.500
LTE Band 5	829 - 844	8M95G7D	QPSK	0.064	18.050
LTE Band 5	829 - 844	8M92W7D	16QAM	0.049	16.920
LTE Band 4	1712.5 - 1752.5	4M51G7D	QPSK	0.174	22.411
LTE Band 4	1712.5 - 1752.5	4M51W7D	16QAM	0.134	21.281
LTE Band 4	1715 - 1750	8M94G7D	QPSK	0.173	22.368
LTE Band 4	1715 - 1750	8M92W7D	16QAM	0.129	21.098
LTE Band 4	1717.5 - 1747.5	13M4G7D	QPSK	0.254	24.041
LTE Band 4	1717.5 - 1747.5	13M4W7D	16QAM	0.214	23.301
LTE Band 2	1852.5 - 1907.5	4M47G7D	QPSK	0.174	22.416
LTE Band 2	1852.5 - 1907.5	4M47W7D	16QAM	0.132	21.196
LTE Band 2	1855 - 1905	8M93G7D	QPSK	0.164	22.146
LTE Band 2	1855 - 1905	8M93W7D	16QAM	0.125	20.966

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested. Test results reported herein relate only to the item(s) tested. I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortanez
President




FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 1 of 95

TABLE OF CONTENTS


FCC PART 22, 24, 27 MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 SCOPE	4
1.2 TESTING FACILITY	4
2.0 PRODUCT INFORMATION	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 DEVICE CAPABILITIES	5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	5
2.4 LABELING REQUIREMENTS	5
3.0 DESCRIPTION OF TESTS	6
3.1 MEASUREMENT PROCEDURE	6
3.2 OCCUPIED BANDWIDTH	6
3.3 BLOCK A FREQUENCY RANGE	6
3.4 CELLULAR - BASE FREQUENCY BLOCKS	7
3.5 CELLULAR - MOBILE FREQUENCY BLOCKS	7
3.6 PCS - BASE FREQUENCY BLOCKS	7
3.7 PCS - MOBILE FREQUENCY BLOCKS	7
3.8 AWS - BASE FREQUENCY BLOCKS	8
3.9 AWS - MOBILE FREQUENCY BLOCKS	8
3.10 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	8
3.11 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS	9
3.12 PEAK-AVERAGE RATIO	10
3.13 FREQUENCY STABILITY / TEMPERATURE VARIATION	10
4.0 TEST EQUIPMENT CALIBRATION DATA	11
5.0 SAMPLE CALCULATIONS	12
6.0 TEST RESULTS	13
6.1 SUMMARY	13
6.2 EFFECTIVE RADIATED POWER OUTPUT DATA	14
6.3 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT DATA	15
6.4 BAND 17 RADIATED MEASUREMENTS	16
6.5 BAND 5 RADIATED MEASUREMENTS	19
6.6 BAND 4 RADIATED MEASUREMENTS	22
6.7 BAND 2 RADIATED MEASUREMENTS	25
6.8 BAND 17 FREQUENCY STABILITY MEASUREMENTS	28
6.9 BAND 5 FREQUENCY STABILITY MEASUREMENTS	30
6.10 BAND 4 FREQUENCY STABILITY MEASUREMENTS	32
6.11 BAND 2 FREQUENCY STABILITY MEASUREMENTS	34
7.0 PLOT(S) OF EMISSIONS – BAND 17 (5 MHZ)	36
BAND 17 – 10 MHZ BW	42
BAND 5 – 5 MHZ BW	48
BAND 5 – 10 MHZ BW	54
BAND 4 – 5 MHZ BW	60
BAND 4 – 10 MHZ BW	67
BAND 2 – 5 MHZ BW	81
BAND 2 – 10 MHZ BW	88
8.0 CONCLUSION	95

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 2 of 95



MEASUREMENT REPORT

FCC Part 22, 24 & 27





§2.1033 General Information

APPLICANT: Samsung Electronics Co., Ltd.
APPLICANT ADDRESS: 416 Maetan 3-Dong, Yeongtong-gu
 Suwon-si, Gyeonggi-do, 443-742, Republic of Korea
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA
FCC RULE PART(S): §2; §22; §24; §27
BASE MODEL: SGH-I437
FCC ID: A3LSGHI437
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
FREQUENCY TOLERANCE: $\pm 0.00025\%$ (2.5 ppm) for Band 5, within frequency block for Bands 2, 5 and 17
Test Device Serial No.: LTE Band 2, 4, 5, 17 ☐ Production ☒ Pre-Production ☐ Engineering
DATE(S) OF TEST: August 6-14, 2012
TEST REPORT S/N: 0Y1207311075.A3L

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 3 of 95

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Internt'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003/2009 on February 15, 2012.

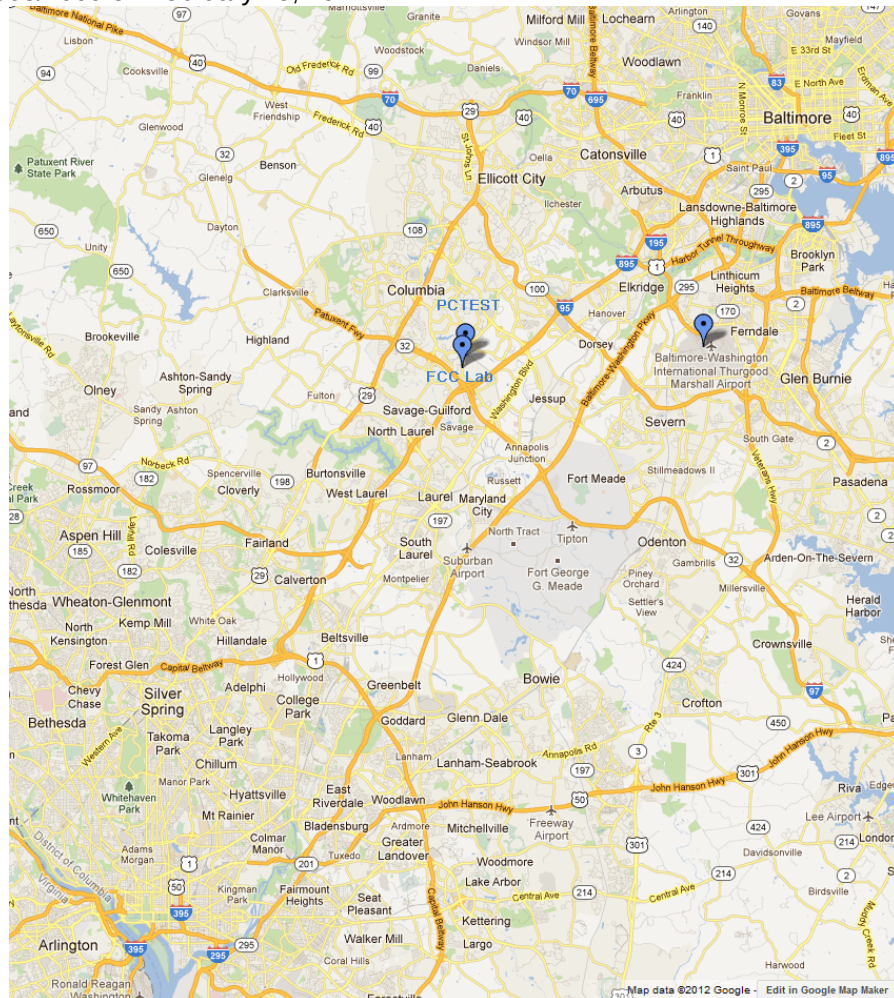


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LSGHI437	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 4 of 95

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSGHI437**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function. The EUT consisted of the following component(s):

Trade Name / Base Model	FCC ID	Description
Samsung / Model: SGH-I437	A3LSGHI437	Portable Handset

Table 2-1. EUT Equipment Description

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, Band 2(5/10MHz BW), 4(5/10/15MHz BW), 5(5/10 MHz BW), 17(5/10 MHz BW) LTE, 802.11a/b/g/n WLAN (DTS/NII), Bluetooth (1x,EDR, LE), NFC

2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.4 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase..

Per 15.19; Docket 95-19

In addition to this requirement, a device subject to certification shall be labeled as follows:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 5 of 95

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The radiated spurious measurements were made outdoors at a 3-meter test range (See Figure 3-1). The equipment under test is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. This power level was recorded using a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded with the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

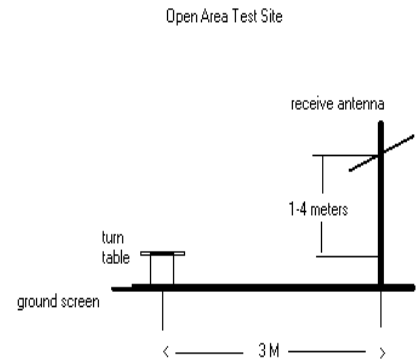


Figure 3-1. Diagram of 3-meter outdoor test range

Deviation from Measurement Procedure.....None

3.2 Occupied Bandwidth

§2.1049, RSS-Gen (4.6.1)

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

3.3 Block A Frequency Range


§27.5(c)

698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;
Block B: 704-710 MHz and 734-740 MHz; and
Block C: 710-716 MHz and 740-746 MHz.

FCC ID: A3LSGHI437	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 6 of 95


3.4 Cellular - Base Frequency Blocks

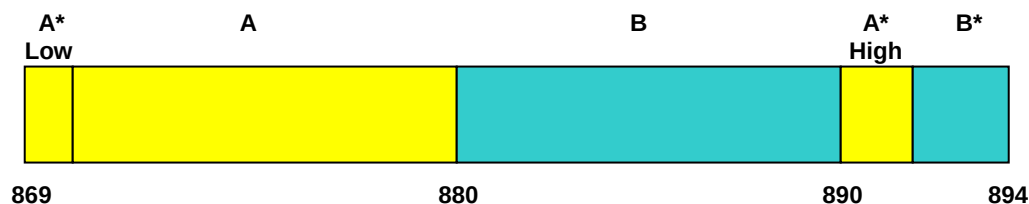

BLOCK 1: 869 – 880 MHz (A* Low + A)
BLOCK 2: 880 – 890 MHz (B)

BLOCK 3: 890 – 891.5 MHz (A* High)
BLOCK 4: 891.5 – 894 MHz (B*)


3.5 Cellular - Mobile Frequency Blocks

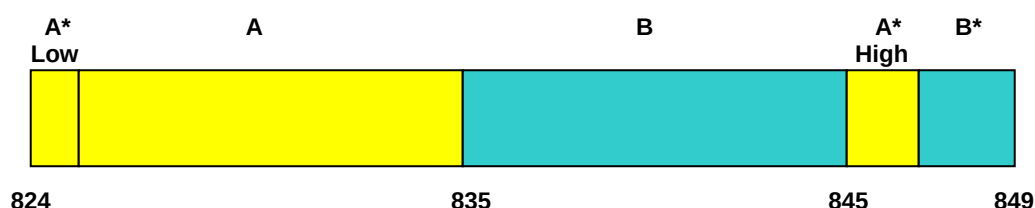

BLOCK 1: 824 – 835 MHz (A* Low + A)
BLOCK 2: 835 – 845 MHz (B)

BLOCK 3: 845 – 846.5 MHz (A* High)
BLOCK 4: 846.5 – 849 MHz (B*)


3.6 PCS - Base Frequency Blocks

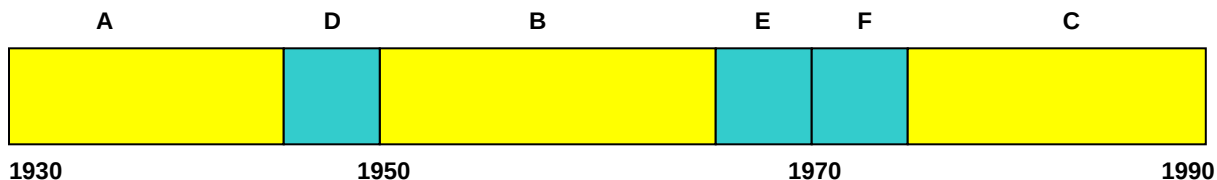

BLOCK 1: 1930 – 1945 MHz (A)
BLOCK 2: 1945 – 1950 MHz (D)
BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 4: 1965 – 1970 MHz (E)
BLOCK 5: 1970 – 1975 MHz (F)
BLOCK 6: 1975 – 1990 MHz (C)

3.7 PCS - Mobile Frequency Blocks

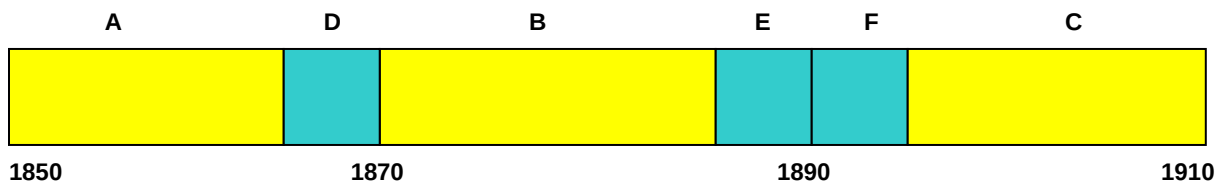


BLOCK 1: 1850 – 1865 MHz (A)
BLOCK 2: 1865 – 1870 MHz (D)
BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 4: 1885 – 1890 MHz (E)
BLOCK 5: 1890 – 1895 MHz (F)
BLOCK 6: 1895 – 1910 MHz (C)

FCC ID: A3LSGHI437			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 7 of 95	


3.8 AWS - Base Frequency Blocks

§27.5(h)

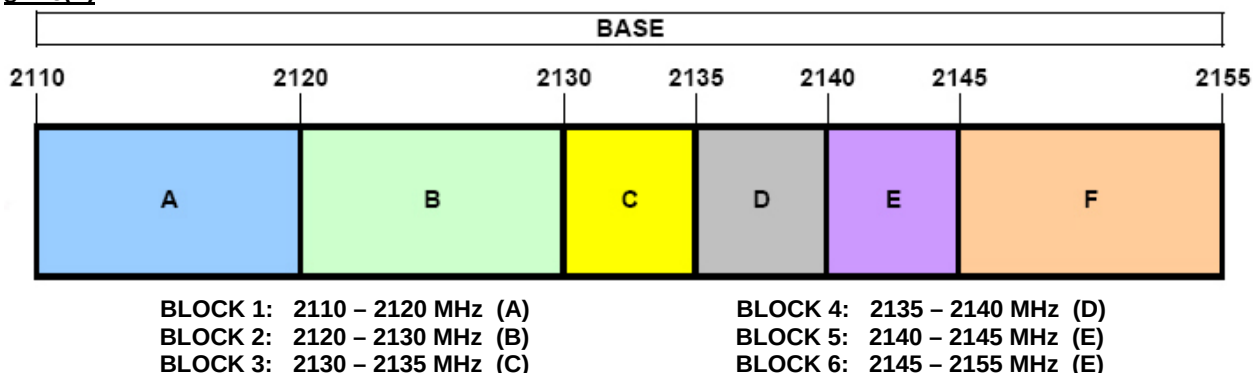

3.9 AWS - Mobile Frequency Blocks

§27.5(h)

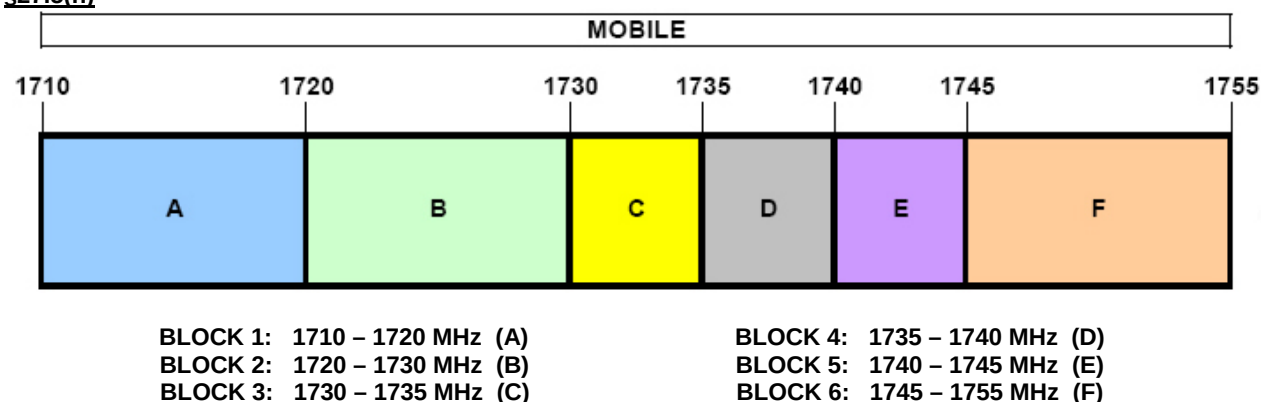

3.10 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, 22.917(a), 24.238(a), §27.53(g), §27.53(h); RSS-132 (4.5.1), RSS-133 (6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. For Bands 5 and 12, Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. For Bands 2 and 4, compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 8 of 95

3.11 Radiated Power and Radiated Spurious Emissions

§2.1053, 22.917(a), 24.238(a), §27.53(g), §27.53(h); RSS-132(4.5.1.2), RSS-133 (6.5.1)

Radiated spurious emissions are investigated indoors in a semi-anechoic chamber to determine the frequencies producing the worst case emissions. Final measurements for radiated power and radiated spurious emissions are performed on the 3 meter OATS per the guidelines of ANSI/TIA-603-C-2004. The measurement area is situated on an 18 meter x 20 meter galvanized 1/2" hardware cloth as the conducting ground plane. This material is sewn together in sections 4 feet wide and 60 feet long. A total of eighteen sections are required to cover the entire measurement area. Sections are laid across the width of the pad, overlapped 1" and sewn and soldered together at intervals of 3" (7.6 cm.) The terrain of the test site is reasonably flat and level. Power and cable to the test site are buried 18" deep into the ground outside the perimeter of the site. An all-weather non-metallic housing is situated on a 2 x 3 meter area adjacent to the measurement area to house the test equipment. The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Emissions are also investigated with the receive antenna horizontally and vertically polarized. The level of the maximized emission is recorded with the spectrum analyzer using a peak detector with RBW = 1MHz, VBW = 3MHz for emissions greater than 1GHz. For emissions below 1GHz, the spectrum analyzer is set to RBW = 100kHz and VBW = 300kHz.

A half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power [Watts]})$ specified in 22.917(a), 24.238(a), and 27.53(g)(h).

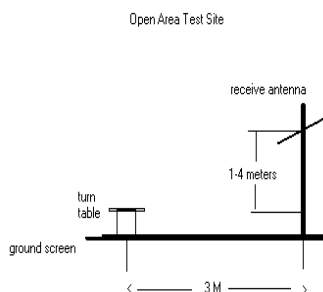


Figure 3-2. Diagram of 3-meter outdoor test range

FCC ID: A3LSGHI437	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 9 of 95

3.12 Peak-Average Ratio

§24.232(d), §27.50(d)(5), RSS-133 (6.4)

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

3.13 Frequency Stability / Temperature Variation

§2.1055, §22.355, §24.235, §27.54, RSS-132 (4.3), RSS-133 (6.3)

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – For Band 5, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Bands 2, 4, and 17 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A sufficient stabilization period at each temperature shall be used prior to each frequency requirement.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 10 of 95

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTX1	Licensed Transmitter Cable Set	1/25/2012	Annual	1/25/2013	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/10/2012	Annual	7/10/2013	N/A
-	RE2	Radiated Emissions Cable Set (VHF/UHF)	2/13/2012	Annual	2/13/2013	N/A
-	LTX2	Licensed Transmitter Cable Set	2/17/2012	Annual	2/17/2013	N/A
Agilent	8447D	Broadband Amplifier	5/8/2012	Annual	5/8/2013	1937A03348
Agilent	8648D	(9kHz-4GHz) Signal Generator	10/10/2011	Annual	10/10/2012	3613A00315
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	2/15/2012	Annual	2/15/2013	US42510244
Agilent	N9020A	MXA Signal Analyzer	10/10/2011	Annual	10/10/2012	US46470561
Agilent	N9030A	PXA Signal Analyzer	2/23/2012	Annual	2/23/2013	MY49432391
Anritsu	ML2495A	Power Meter	10/13/2011	Annual	10/13/2012	1039008
Espec	ESX-2CA	Environmental Chamber	4/4/2012	Annual	4/4/2013	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Biennial	7/22/2013	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Annual	5/30/2013	135427
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	10/1/2010	Biennial	10/1/2012	128337
Mini-Circuits	VHF-1200+	High Pass Filter	1/15/2012	Annual	1/15/2013	30923
Mini-Circuits	VHF-3100+	High Pass Filter	1/15/2012	Annual	1/15/2013	30841
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	N/A		N/A	100976
Rohde & Schwarz	RS-PR18	1-18 GHz Pre-Amplifier	6/26/2012	Annual	6/26/2013	100071
Rohde & Schwarz	RS-PR26	18-26.5 GHz Pre-Amplifier	5/30/2012	Annual	5/30/2013	100040
Rohde & Schwarz	ESU26	EMI Test Receiver	12/15/2011	Annual	12/15/2012	100342
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/14/2011	Biennial	11/14/2013	9105-2404
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	11/14/2011	Biennial	11/14/2013	9105-2403
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

Table 4-1. Test Equipment

Note: Rohde & Schwarz Model: CMW500 was used for signaling purposes only and not for calibrated measurements. Care was taken to ensure that testing occurred while test equipment was in calibration.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 11 of 95

5.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Amplitude/Angle Modulated

16QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Combination (Audio/Data)

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average receive power meter reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the power meter. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 12 of 95

6.0 TEST RESULTS

6.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSGHI437
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)						
2.1049	RSS-Gen (4.6.1) RSS-133 (2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0
2.1051, 22.917(a), 24.238(a), 27.53(g), 27.53(h)	RSS-133 (6.5.1)	Band Edge / Conducted Spurious Emissions	$< 43 + 10\log_{10}$ (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Section 7.0
24.232(d), 27.50(d)(5)	RSS-133 (6.4)	Peak-Average Ratio	< 13 dB		PASS	Section 7.0
2.1046	RSS-132 (4.4) RSS-133 (4.1)	Transmitter Conducted Output Power	N/A		PASS	SAR Report
22.913(a)(2)	RSS-132 (4.4) [SRSP-503(5.1.3)]	Effective Radiated Power (Band 5)	< 7 Watts max. ERP	RADIATED	PASS	Section 6.2
27.50(c)(10)		Effective Radiated Power (Band 17)	< 3 Watts max. ERP		PASS	Section 6.2
24.232(c)	RSS-133 (6.4) [SRSP-510 (5.1.2)]	Equivalent Isotropic Radiated Power (Band 2)	< 2 Watts max. EIRP		PASS	Section 6.3
27.50(d)(4)		Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS	Section 6.3
2.1053, 22.917(a), 24.238(a), 27.53(g), 27.53(h)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Undesirable Emissions	$< 43 + 10\log_{10}$ (P[Watts]) for all out-of-band emissions		PASS	Section 6.4, 6.5, 6.6, 6.7
2.1055, 27.54, 22.355, 24.235	RSS-132 (4.3) RSS-133 (6.3)	Frequency Stability	< 2.5 ppm		PASS	Section 6.8, 6.9, 6.10, 6.11

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Sections 7.0, 8.0, 9.0, and 10.0 were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset	Page 13 of 95	

6.2 Effective Radiated Power Output Data

§22.913(a)(2), §27.50(c)(10).

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Margin [dB]
706.50	5	QPSK	Standard	1/24	-22.63	20.08	-0.82	H	19.26	0.084	-15.51
710.00	5	QPSK	Standard	1/0	-22.57	20.14	-0.81	H	19.33	0.086	-15.44
713.50	5	QPSK	Standard	1/24	-21.72	20.99	-0.80	H	20.19	0.104	-14.58
706.50	5	16-QAM	Standard	1/24	-23.79	18.92	-0.82	H	18.10	0.065	-16.67
710.00	5	16-QAM	Standard	1/0	-23.77	18.94	-0.81	H	18.13	0.065	-16.64
713.50	5	16-QAM	Standard	1/24	-22.92	19.79	-0.80	H	18.99	0.079	-15.78
709.00	10	QPSK	Standard	1/49	-22.75	19.96	-0.82	H	19.14	0.082	-15.63
710.00	10	QPSK	Standard	1/49	-22.80	19.91	-0.81	H	19.10	0.081	-15.67
711.00	10	QPSK	Standard	1/49	-22.34	20.37	-0.80	H	19.57	0.091	-15.20
709.00	10	16-QAM	Standard	1/49	-23.91	18.80	-0.82	H	17.98	0.063	-16.79
710.00	10	16-QAM	Standard	1/49	-23.97	18.74	-0.81	H	17.93	0.062	-16.84
711.00	10	16-QAM	Standard	1/49	-22.59	20.12	-0.80	H	19.32	0.086	-15.45

Table 6-2. Effective Radiated Power Output Data (Band 17)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Margin [dB]
826.50	5	QPSK	Standard	1 / 0	-18.95	19.05	-0.83	H	18.22	0.066	-20.23
836.50	5	QPSK	Standard	1 / 0	-18.46	19.54	-0.80	H	18.74	0.075	-19.71
846.50	5	QPSK	Standard	1 / 0	-21.06	16.94	-0.77	H	16.17	0.041	-22.28
826.50	5	16-QAM	Standard	1 / 0	-19.95	18.05	-0.83	H	17.22	0.053	-21.23
836.50	5	16-QAM	Standard	1 / 0	-19.70	18.30	-0.80	H	17.50	0.056	-20.95
846.50	5	16-QAM	Standard	1 / 0	-22.19	15.81	-0.77	H	15.04	0.032	-23.41
829.00	10	QPSK	Standard	1 / 0	-19.15	18.85	-0.83	H	18.02	0.063	-20.43
836.50	10	QPSK	Standard	1 / 0	-19.50	18.50	-0.80	H	17.70	0.059	-20.75
844.00	10	QPSK	Standard	1 / 0	-19.18	18.82	-0.77	H	18.05	0.064	-20.40
829.00	10	16-QAM	Standard	1 / 0	-20.25	17.75	-0.83	H	16.92	0.049	-21.53
836.50	10	16-QAM	Standard	1 / 0	-20.86	17.14	-0.80	H	16.34	0.043	-22.11
844.00	10	16-QAM	Standard	1 / 0	-20.35	17.65	-0.77	H	16.88	0.049	-21.57

Table 6-3. Effective Radiated Power Output Data (Band 5)

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This level is recorded using the power meter. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW/1RB/Offset of 24 for Band 2, 15MHz BW/1RB/Offset of 74 for Band 4, 5MHz BW/1RB/Offset of 0 for Band 5, and 5MHz BW/1RB/Offset of 24 for Band 17. QPSK modulation was reported as worst case emissions for all bands. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 14 of 95

6.3 Equivalent Isotropic Radiated Power Output Data §24.232(c); §27.50(d)(4)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1712.50	5	QPSK	Standard	1 / 24	-21.47	13.11	8.47	H	21.58	0.144	-8.42
1732.50	5	QPSK	Standard	1 / 0	-20.71	13.87	8.54	H	22.41	0.174	-7.59
1752.50	5	QPSK	Standard	1 / 24	-20.85	13.73	8.60	H	22.33	0.171	-7.67
1712.50	5	16-QAM	Standard	1 / 24	-22.59	11.99	8.47	H	20.46	0.111	-9.54
1732.50	5	16-QAM	Standard	1 / 0	-21.84	12.74	8.54	H	21.28	0.134	-8.72
1752.50	5	16-QAM	Standard	1 / 24	-22.30	12.28	8.60	H	20.88	0.122	-9.12
1715.00	10	QPSK	Standard	1 / 49	-21.27	13.31	8.47	H	21.78	0.151	-8.22
1732.50	10	QPSK	Standard	1 / 0	-21.94	12.64	8.54	H	21.18	0.131	-8.82
1750.00	10	QPSK	Standard	1 / 49	-20.81	13.77	8.60	H	22.37	0.173	-7.63
1715.00	10	16-QAM	Standard	1 / 49	-22.05	12.53	8.47	H	21.00	0.126	-9.00
1732.50	10	16-QAM	Standard	1 / 0	-23.08	11.50	8.54	H	20.04	0.101	-9.96
1750.00	10	16-QAM	Standard	1 / 49	-22.08	12.50	8.60	H	21.10	0.129	-8.90
1717.50	15	QPSK	Standard	1 / 74	-19.50	15.08	8.47	H	23.55	0.226	-6.45
1732.50	15	QPSK	Standard	1 / 74	-19.08	15.50	8.54	H	24.04	0.254	-5.96
1747.50	15	QPSK	Standard	1 / 74	-19.77	14.81	8.60	H	23.41	0.219	-6.59
1717.50	15	16-QAM	Standard	1 / 74	-20.65	13.93	8.47	H	22.40	0.174	-7.60
1732.50	15	16-QAM	Standard	1 / 74	-19.82	14.76	8.54	H	23.30	0.214	-6.70
1747.50	15	16-QAM	Standard	1 / 74	-21.04	13.54	8.60	H	22.14	0.164	-7.86

Table 6-4. Equivalent Isotropic Radiated Power Output Data (Band 4)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1852.50	5	QPSK	Standard	1 / 24	-18.79	13.86	8.56	H	22.42	0.174	-10.59
1880.00	5	QPSK	Standard	1 / 24	-19.17	13.48	8.55	H	22.03	0.159	-10.98
1907.50	5	QPSK	Standard	1 / 24	-19.09	13.56	8.54	H	22.10	0.162	-10.91
1852.50	5	16-QAM	Standard	1 / 24	-20.01	12.64	8.56	H	21.20	0.132	-11.81
1880.00	5	16-QAM	Standard	1 / 24	-20.09	12.56	8.55	H	21.11	0.129	-11.90
1907.50	5	16-QAM	Standard	1 / 24	-20.09	12.56	8.54	H	21.10	0.129	-11.91
1855.00	10	QPSK	Standard	1 / 0	-19.10	13.55	8.56	H	22.11	0.162	-10.90
1880.00	10	QPSK	Standard	1 / 0	-19.37	13.28	8.55	H	21.83	0.152	-11.18
1905.00	10	QPSK	Standard	1 / 0	-19.04	13.61	8.54	H	22.15	0.164	-10.86
1855.00	10	16-QAM	Standard	1 / 0	-20.49	12.16	8.56	H	20.72	0.118	-12.29
1880.00	10	16-QAM	Standard	1 / 0	-20.67	11.98	8.55	H	20.53	0.113	-12.48
1905.00	10	16-QAM	Standard	1 / 0	-20.22	12.43	8.54	H	20.97	0.125	-12.04

Table 6-5. Equivalent Isotropic Radiated Power Output Data (Band 2)

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This level is recorded using the power meter. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW/1RB/Offset of 24 for Band 2, 15MHz BW/1RB/Offset of 74 for Band 4, 5MHz BW/1RB/Offset of 0 for Band 5, and 5MHz BW/1RB/Offset of 24 for Band 17. QPSK modulation was reported as worst case emissions for all bands. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 15 of 95

6.4 Band 17 Radiated Measurements

§2.1053, §27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 706.50 MHz
 CHANNEL: 23755
 MEASURED OUTPUT POWER: 19.26 dBm = 0.084 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 32.26 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1413.00	-52.98	3.63	-49.35	H	68.61
2119.50	-53.45	3.90	-49.56	H	68.81
2826.00	-53.61	5.01	-48.60	H	67.85
3532.50	-55.91	6.25	-49.66	H	68.91
4239.00	-51.66	7.23	-44.43	H	63.68
4945.50	-56.16	7.86	-48.29	H	67.55

Table 6-6. Radiated Spurious Data (Ch. 23755)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW/1RB/Offset of 24 for Band 2, 15MHz BW/1RB/Offset of 74 for Band 4, 5MHz BW/1RB/Offset of 0 for Band 5, and 5MHz BW/1RB/Offset of 24 for Band 17. QPSK modulation was reported as worst case emissions for all bands. This unit was tested with its standard battery. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 16 of 95

Band 17 Radiated Measurements (cont'd)

§2.1053, §27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 710.00 MHz
 CHANNEL: 23790
 MEASURED OUTPUT POWER: 19.33 dBm = 0.086 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) = 32.33$ dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1420.00	-48.98	3.68	-45.30	H	64.63
2130.00	-38.33	3.92	-34.41	H	53.74
2840.00	-88.66	5.02	-83.63	H	102.96
3550.00	-41.18	6.25	-34.93	H	54.26
4260.00	-52.62	7.25	-45.37	H	64.70
4970.00	-56.19	7.90	-48.28	H	67.61

Table 6-7. Radiated Spurious Data (Ch. 23790)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW/1RB/Offset of 24 for Band 2, 15MHz BW/1RB/Offset of 74 for Band 4, 5MHz BW/1RB/Offset of 0 for Band 5, and 5MHz BW/1RB/Offset of 24 for Band 17. QPSK modulation was reported as worst case emissions for all bands. This unit was tested with its standard battery. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 17 of 95

Band 17 Radiated Measurements (cont'd)

§2.1053, §27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 713.50 MHz
 CHANNEL: 23825
 MEASURED OUTPUT POWER: 20.19 dBm = 0.105 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.19 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1427.00	-52.28	3.73	-48.55	H	68.74
2140.50	-47.74	3.94	-43.80	H	63.99
2854.00	-52.28	5.04	-47.25	H	67.44
3567.50	-56.34	6.25	-50.09	H	70.29
4281.00	-51.56	7.25	-44.31	H	64.50
4994.50	-90.41	7.94	-82.47	H	102.66

Table 6-8. Radiated Spurious Data (Ch. 23825)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW/1RB/Offset of 24 for Band 2, 15MHz BW/1RB/Offset of 74 for Band 4, 5MHz BW/1RB/Offset of 0 for Band 5, and 5MHz BW/1RB/Offset of 24 for Band 17. QPSK modulation was reported as worst case emissions for all bands. This unit was tested with its standard battery. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 18 of 95

6.5 Band 5 Radiated Measurements

§2.1053, §22.917(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 826.50 MHz
 CHANNEL: 20425
 MEASURED OUTPUT POWER: 18.22 dBm = 0.066 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 31.216 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1653.00	-53.49	2.50	-50.99	H	69.21
2479.50	-51.04	2.82	-48.22	H	66.43
3306.00	-51.66	5.52	-46.14	H	64.36
4132.50	-90.35	7.08	-83.27	H	101.48
4959.00	-90.41	7.91	-82.50	H	100.71
5785.50	-88.78	8.51	-80.27	H	98.49

Table 6-9. Radiated Spurious Data (Ch. 20425)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW/1RB/Offset of 24 for Band 2, 15MHz BW/1RB/Offset of 74 for Band 4, 5MHz BW/1RB/Offset of 0 for Band 5, and 5MHz BW/1RB/Offset of 24 for Band 17. QPSK modulation was reported as worst case emissions for all bands. This unit was tested with its standard battery. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 19 of 95

Band 5 Radiated Measurements (cont'd)

§2.1053, §22.917(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.50 MHz
 CHANNEL: 20525
 MEASURED OUTPUT POWER: 18.74 dBm = 0.075 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 31.736 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.00	-48.20	2.34	-45.86	H	64.60
2509.50	-46.24	2.84	-43.40	H	62.14
3346.00	-46.80	5.64	-41.15	H	59.89
4182.50	-90.48	7.14	-83.33	H	102.07
5019.00	-90.39	7.97	-82.42	H	101.16
5855.50	-88.48	8.46	-80.01	H	98.75

Table 6-10. Radiated Spurious Data (Ch. 20525)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW/1RB/Offset of 24 for Band 2, 15MHz BW/1RB/Offset of 74 for Band 4, 5MHz BW/1RB/Offset of 0 for Band 5, and 5MHz BW/1RB/Offset of 24 for Band 17. QPSK modulation was reported as worst case emissions for all bands. This unit was tested with its standard battery. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 20 of 95

Band 5 Radiated Measurements (cont'd)

§2.1053, §22.917(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 846.50 MHz
 CHANNEL: 20625
 MEASURED OUTPUT POWER: 16.17 dBm = 0.041 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) = 29.166$ dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1693.00	-52.35	2.18	-50.17	H	66.34
2539.50	-49.20	3.04	-46.16	H	62.32
3386.00	-49.66	5.76	-43.89	H	60.06
4232.50	-90.60	7.20	-83.40	H	99.56
5079.00	-90.34	8.00	-82.33	H	98.50
5925.50	-88.17	8.42	-79.75	H	95.92

Table 6-11. Radiated Spurious Data (Ch. 20625)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW/1RB/Offset of 24 for Band 2, 15MHz BW/1RB/Offset of 74 for Band 4, 5MHz BW/1RB/Offset of 0 for Band 5, and 5MHz BW/1RB/Offset of 24 for Band 17. QPSK modulation was reported as worst case emissions for all bands. This unit was tested with its standard battery. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 21 of 95

6.6 Band 4 Radiated Measurements

§2.1053, §27.53(h)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1717.50 MHz
CHANNEL: 20025
MEASURED OUTPUT POWER: 23.55 dBm = 0.226 W
MODULATION SIGNAL: QPSK
BANDWIDTH: 15 MHz
DISTANCE: 3 meters
LIMIT: $43 + 10 \log_{10} (W) =$ 36.547 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3435.00	-50.46	8.09	-42.37	H	65.92
5152.50	-51.70	10.21	-41.49	H	65.04
6870.00	-92.51	11.31	-81.19	H	104.74
8587.50	-92.93	13.02	-79.91	H	103.46
10305.00	-89.78	13.01	-76.77	H	100.31
12022.50	-86.91	13.21	-73.70	H	97.25

Table 6-12. Radiated Spurious Data (Ch. 19975)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW/1RB/Offset of 24 for Band 2, 15MHz BW/1RB/Offset of 74 for Band 4, 5MHz BW/1RB/Offset of 0 for Band 5, and 5MHz BW/1RB/Offset of 24 for Band 17. QPSK modulation was reported as worst case emissions for all bands. This unit was tested with its standard battery. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 22 of 95

Band 4 Radiated Measurements (cont'd)

§2.1053, §27.53(h)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1732.50 MHz
 CHANNEL: 20175
 MEASURED OUTPUT POWER: 24.04 dBm = 0.254 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) = 37.041$ dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3465.00	-47.92	8.26	-39.65	H	63.69
5197.50	-45.07	10.26	-34.81	H	58.86
6930.00	-57.54	11.42	-46.12	H	70.16
8662.50	-92.78	13.07	-79.71	H	103.75
10395.00	-89.82	13.12	-76.70	H	100.74
12127.50	-86.41	13.25	-73.16	H	97.20

Table 6-13. Radiated Spurious Data (Ch. 20175)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW/1RB/Offset of 24 for Band 2, 15MHz BW/1RB/Offset of 74 for Band 4, 5MHz BW/1RB/Offset of 0 for Band 5, and 5MHz BW/1RB/Offset of 24 for Band 17. QPSK modulation was reported as worst case emissions for all bands. This unit was tested with its standard battery. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 23 of 95

Band 4 Radiated Measurements (cont'd)

§2.1053, §27.53(h)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1747.50 MHz
 CHANNEL: 20325
 MEASURED OUTPUT POWER: 23.41 dBm = 0.219 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) = 36.408$ dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3495.00	-53.28	8.40	-44.88	H	68.29
5242.50	-49.88	10.32	-39.56	H	62.97
6990.00	-92.72	11.51	-81.21	H	104.62
8737.50	-92.62	13.11	-79.51	H	102.91
10485.00	-89.67	13.20	-76.47	H	99.88
12232.50	-85.91	13.31	-72.60	H	96.01

Table 6-14. Radiated Spurious Data (Ch. 20375)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW/1RB/Offset of 24 for Band 2, 15MHz BW/1RB/Offset of 74 for Band 4, 5MHz BW/1RB/Offset of 0 for Band 5, and 5MHz BW/1RB/Offset of 24 for Band 17. QPSK modulation was reported as worst case emissions for all bands. This unit was tested with its standard battery. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 24 of 95

6.7 Band 2 Radiated Measurements

§2.1053, §24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1852.50 MHz
 CHANNEL: 18625
 MEASURED OUTPUT POWER: 22.42 dBm = 0.174 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.42 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3705.00	-37.15	8.40	-28.75	H	51.17
5557.50	-51.87	10.63	-41.24	H	63.66
7410.00	-55.02	11.84	-43.19	H	65.60
9262.50	-45.95	13.29	-32.66	H	55.07
11115.00	-48.85	13.50	-35.35	H	57.76
12967.50	-84.83	13.68	-71.15	H	93.57

Table 6-15. Radiated Spurious Data (Ch. 18625)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW/1RB/Offset of 24 for Band 2, 15MHz BW/1RB/Offset of 74 for Band 4, 5MHz BW/1RB/Offset of 0 for Band 5, and 5MHz BW/1RB/Offset of 24 for Band 17. QPSK modulation was reported as worst case emissions for all bands. This unit was tested with its standard battery. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 25 of 95

Band 2 Radiated Measurements (cont'd)

§2.1053, §24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 18900
 MEASURED OUTPUT POWER: 22.03 dBm = 0.159 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) = 35.03$ dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-32.96	8.42	-24.54	H	46.57
5640.00	-51.32	10.66	-40.66	H	62.69
7520.00	-55.75	11.92	-43.83	H	65.85
9400.00	-45.51	13.24	-32.27	H	54.30
11280.00	-51.92	13.49	-38.43	H	60.46
13160.00	-84.53	13.83	-70.70	H	92.72

Table 6-16. Radiated Spurious Data (Ch. 18900)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW/1RB/Offset of 24 for Band 2, 15MHz BW/1RB/Offset of 74 for Band 4, 5MHz BW/1RB/Offset of 0 for Band 5, and 5MHz BW/1RB/Offset of 24 for Band 17. QPSK modulation was reported as worst case emissions for all bands. This unit was tested with its standard battery. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 26 of 95

Band 2 Radiated Measurements (cont'd)

§2.1053, §24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1907.50 MHz
 CHANNEL: 19175
 MEASURED OUTPUT POWER: 22.10 dBm = 0.162 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.10 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3815.00	-36.48	8.55	-27.93	H	50.03
5722.50	-51.99	10.69	-41.30	H	63.40
7630.00	-54.71	12.05	-42.66	H	64.76
9537.50	-45.35	13.20	-32.15	H	54.24
11445.00	-54.92	13.43	-41.49	H	63.59
13352.50	-84.25	14.00	-70.25	H	92.35

Table 6-17. Radiated Spurious Data (Ch. 19175)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 5MHz BW/1RB/Offset of 24 for Band 2, 15MHz BW/1RB/Offset of 74 for Band 4, 5MHz BW/1RB/Offset of 0 for Band 5, and 5MHz BW/1RB/Offset of 24 for Band 17. QPSK modulation was reported as worst case emissions for all bands. This unit was tested with its standard battery. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 27 of 95

6.8 Band 17 Frequency Stability Measurements

§2.1055, §27.54, RSS-133 (6.3)

OPERATING FREQUENCY: 710,000,000 Hz

CHANNEL: 23090

REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	709,999,978	-22	-0.000003
100 %		- 30	709,999,977	-23	-0.000003
100 %		- 20	709,999,981	-19	-0.000003
100 %		- 10	710,000,020	20	0.000003
100 %		0	709,999,978	-22	-0.000003
100 %		+ 10	710,000,019	19	0.000003
100 %		+ 20	710,000,015	15	0.000002
100 %		+ 30	710,000,020	20	0.000003
100 %		+ 40	709,999,978	-22	-0.000003
100 %		+ 50	710,000,023	23	0.000003
115 %	4.37	+ 20	710,000,020	20	0.000003
85 %	3.23	+ 20	710,000,018	18	0.000003

Table 6-18. Frequency Stability Data (Band 17)

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset	Page 28 of 95	

Band 17 Frequency Stability Measurements (Cont'd)
§2.1055, §27.54, RSS-133 (6.3)

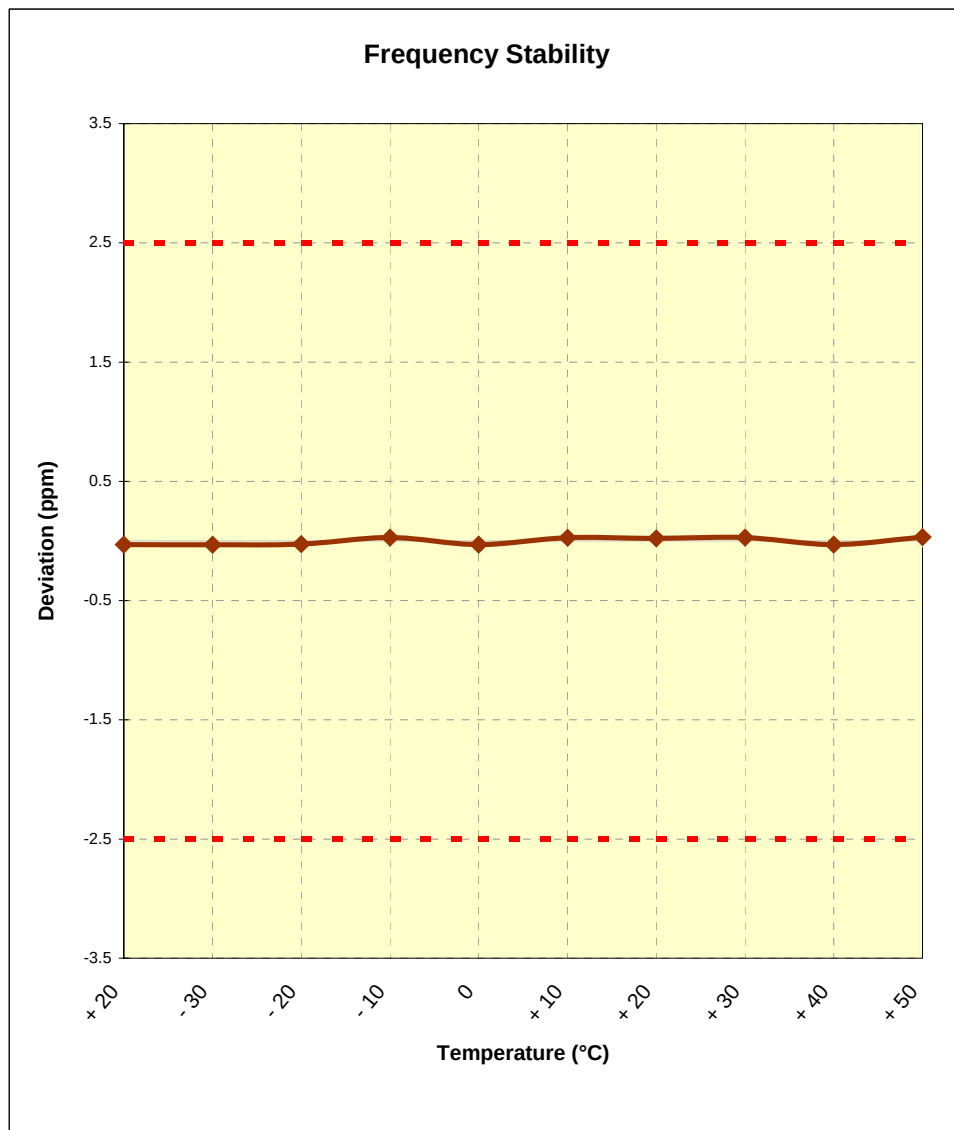


Figure 6-1. Frequency Stability Graph (Band 17)

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004

FCC ID: A3LSGHI437	 FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		 Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset	Page 29 of 95

6.9 Band 5 Frequency Stability Measurements

\$2.1055, \$22.355

OPERATING FREQUENCY: 836,500,000 Hz
 CHANNEL: 20525
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,500,013	13	0.000002
100 %		- 30	836,499,971	-29	-0.000003
100 %		- 20	836,500,030	30	0.000004
100 %		- 10	836,500,011	11	0.000001
100 %		0	836,500,015	15	0.000002
100 %		+ 10	836,499,982	-18	-0.000002
100 %		+ 20	836,499,979	-21	-0.000003
100 %		+ 30	836,500,029	29	0.000003
100 %		+ 40	836,500,018	18	0.000002
100 %		+ 50	836,499,990	-10	-0.000001
115 %	4.37	+ 20	836,500,022	22	0.000003
85 %	3.23	+ 20	836,500,020	20	0.000002

Table 6-19. Frequency Stability Data (Band 5)

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004

FCC ID: A3LSGHI437		FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 30 of 95

Band 5 Frequency Stability Measurements (Cont'd) **§2.1055, §22.355**

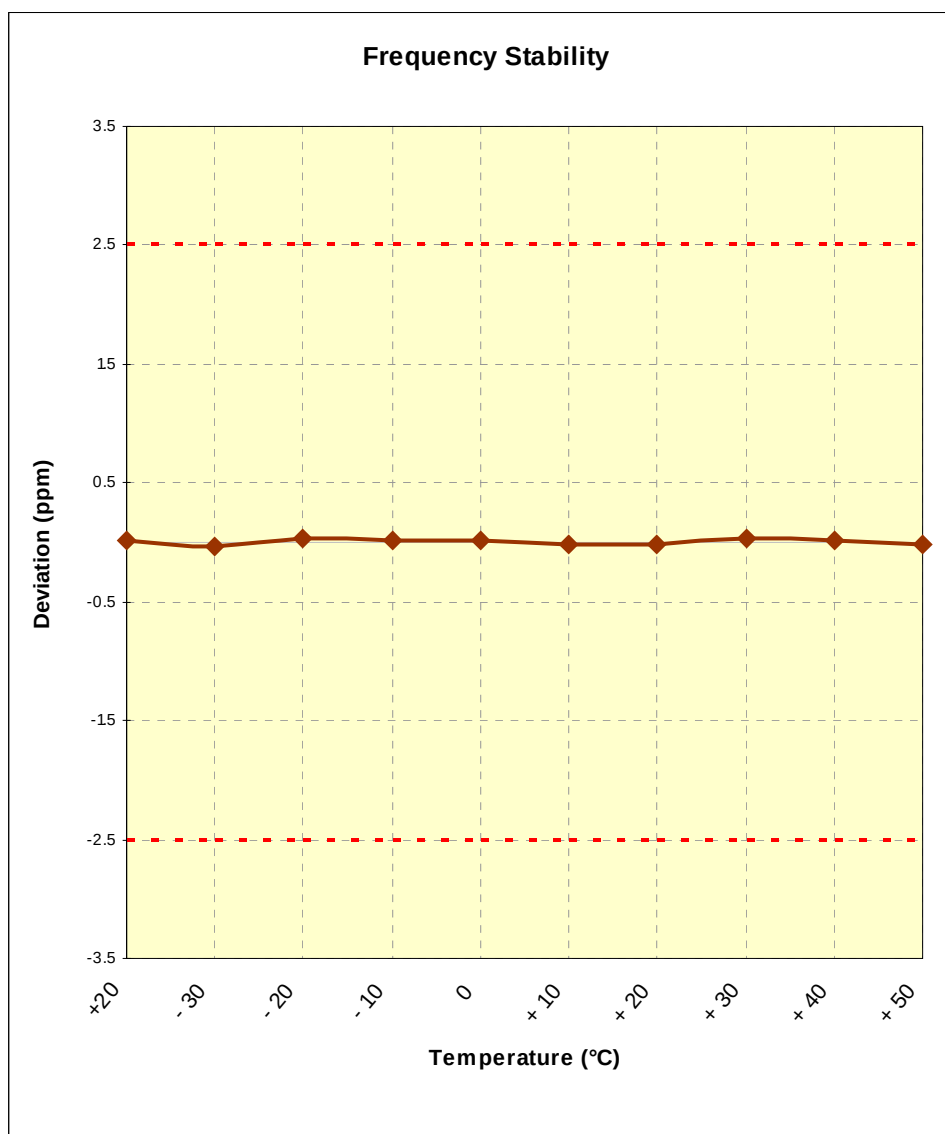


Figure 6-2. Frequency Stability Graph (Band 5)

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004

FCC ID: A3LSGHI437	 FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset	Page 31 of 95

6.10 Band 4 Frequency Stability Measurements

§2.1055, §27.54, RSS-133 (6.3)

OPERATING FREQUENCY: 1,732,500,000 Hz
 CHANNEL: 20175
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,732,499,983	-17	-0.000001
100 %		- 30	1,732,500,010	10	0.000001
100 %		- 20	1,732,500,009	9	0.000001
100 %		- 10	1,732,500,025	25	0.000001
100 %		0	1,732,499,969	-31	-0.000002
100 %		+ 10	1,732,500,022	22	0.000001
100 %		+ 20	1,732,499,986	-14	-0.000001
100 %		+ 30	1,732,500,013	13	0.000001
100 %		+ 40	1,732,500,017	17	0.000001
100 %		+ 50	1,732,499,979	-21	-0.000001
115 %	4.37	+ 20	1,732,499,977	-23	-0.000001
85 %	3.23	+ 20	1,732,499,964	-36	-0.000002

Table 6-20. Frequency Stability Data (Band 4)


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004

FCC ID: A3LSGHI437	 FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset	Page 32 of 95

Band 4 Frequency Stability Measurements (Cont'd)

§2.1055, §27.54; RSS-133 (6.3)

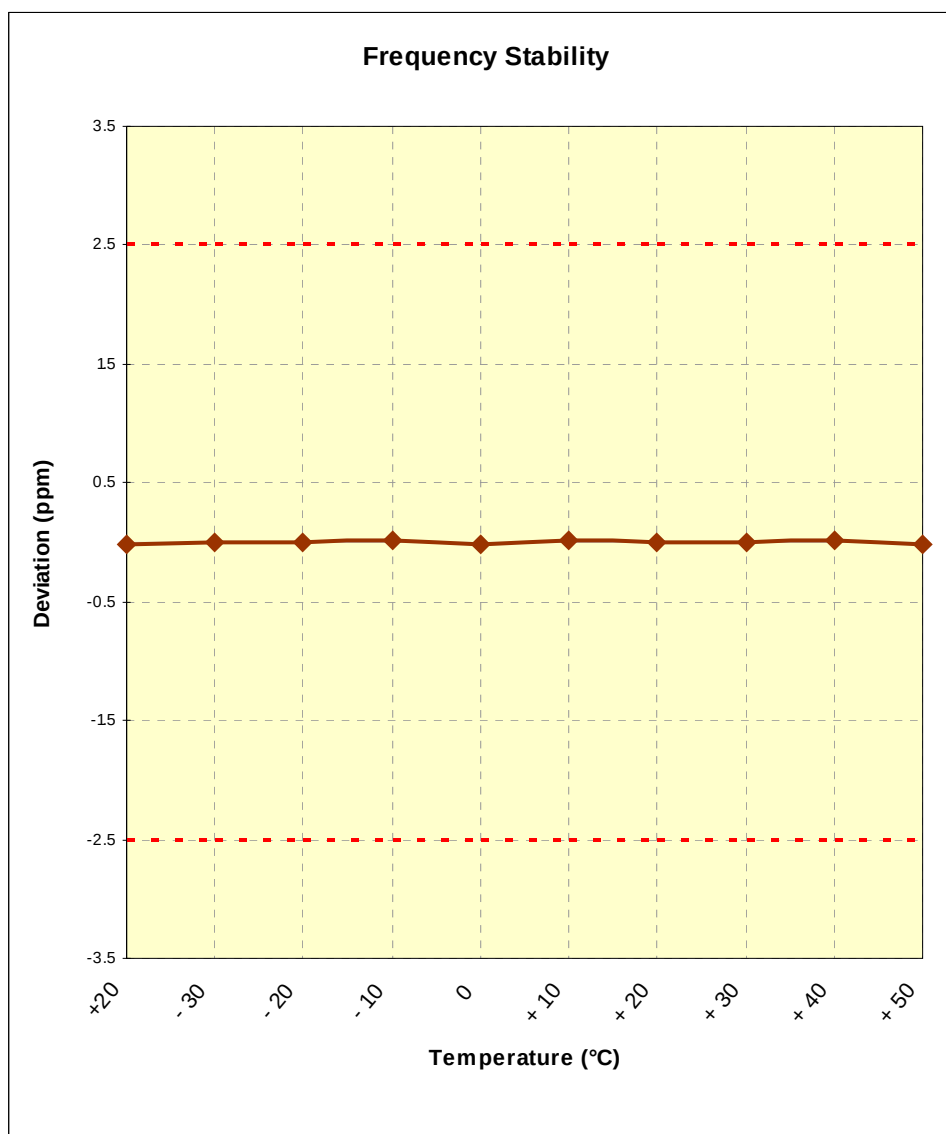

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004

FCC ID: A3LSGHI437	 FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset	Page 33 of 95

6.11 Band 2 Frequency Stability Measurements

§2.1055, §24.235

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 18900

REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,879,999,972	-28	-0.000001
100 %		- 30	1,880,000,020	20	0.000001
100 %		- 20	1,880,000,017	17	0.000001
100 %		- 10	1,880,000,014	14	0.000001
100 %		0	1,879,999,978	-22	-0.000001
100 %		+ 10	1,880,000,013	13	0.000001
100 %		+ 20	1,879,999,969	-31	-0.000002
100 %		+ 30	1,880,000,027	27	0.000001
100 %		+ 40	1,879,999,988	-12	-0.000001
100 %		+ 50	1,879,999,982	-18	-0.000001
115 %	4.37	+ 20	1,879,999,981	-19	-0.000001
85 %	3.20	+ 20	1,880,000,029	29	0.000002

Table 6-21. Frequency Stability Data (Band 2)

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004

FCC ID: A3LSGHI437	 FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset	Page 34 of 95

Band 2 Frequency Stability Measurements (Cont'd)

§2.1055, §24.235

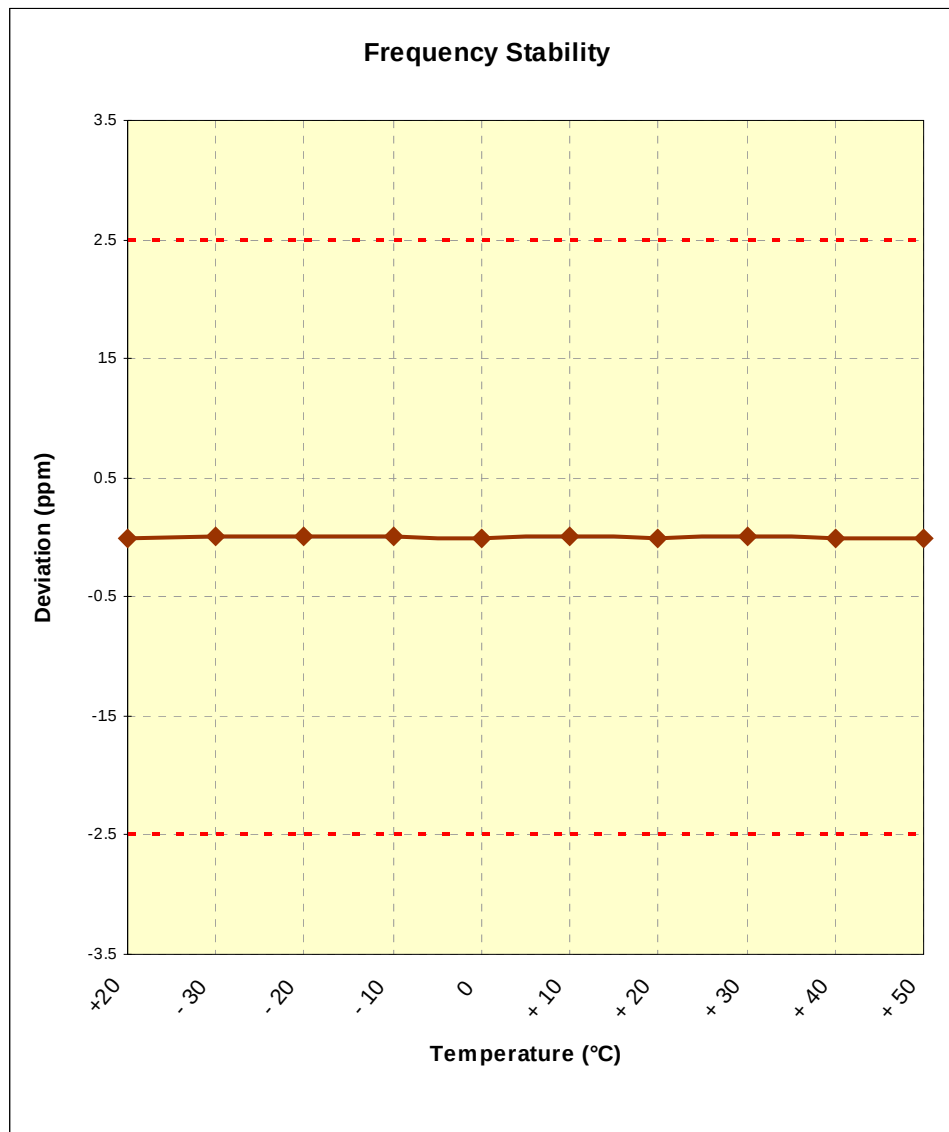


Figure 6-3. Frequency Stability Graph (Band 2)

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004


FCC ID: A3LSGHI437	 FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset	Page 35 of 95

7.0 PLOT(S) OF EMISSIONS – BAND 17 (5 MHz)

Note: For all out-of-band spurious emissions, the RB sizes and offsets that produced the worst case emissions are indicated in the plot captions.



Plot 7-1. Lower Band Edge Plot (QPSK – RB Size 25)

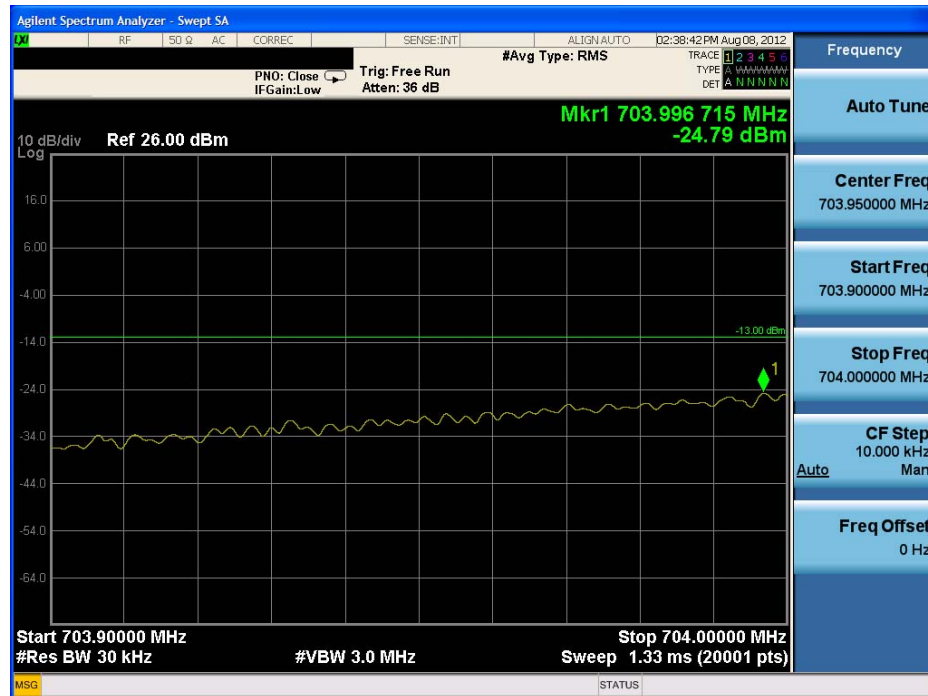


Plot 7-2. Lower Band Edge Plot Plot (QPSK – RB Size 25)

FCC ID: A3LSGHI437	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 36 of 95




Plot 7-3. Occupied Bandwidth Plot (QPSK – RB Size 25)

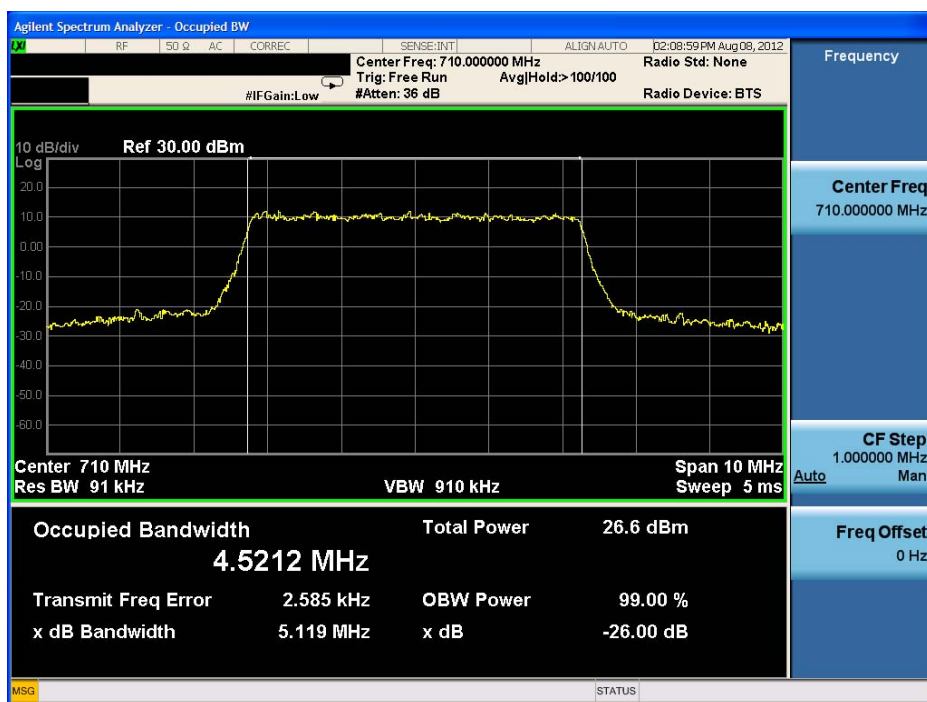


Plot 7-4. Occupied Bandwidth Plot (16-QAM – RB Size 25)

FCC ID: A3LSGHI437	FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 37 of 95

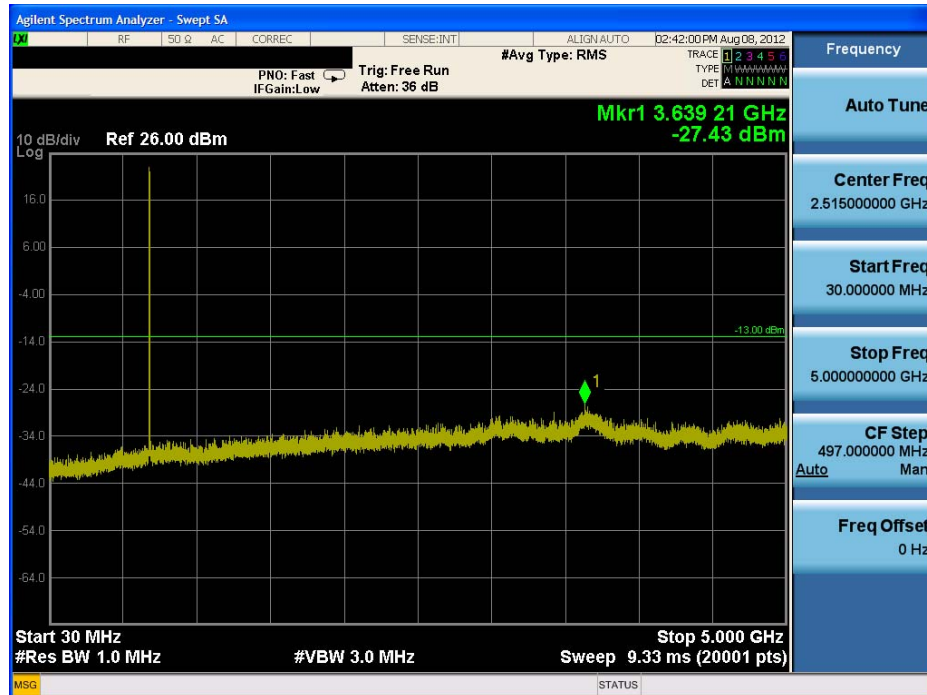


Plot 7-5. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

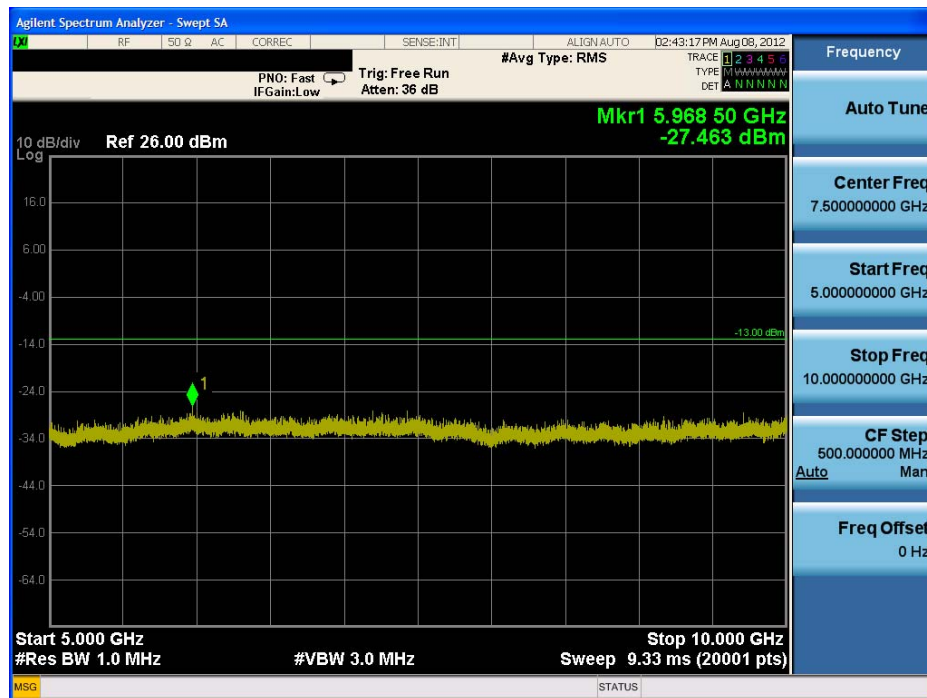


Plot 7-6. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSGHI437	FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 38 of 95

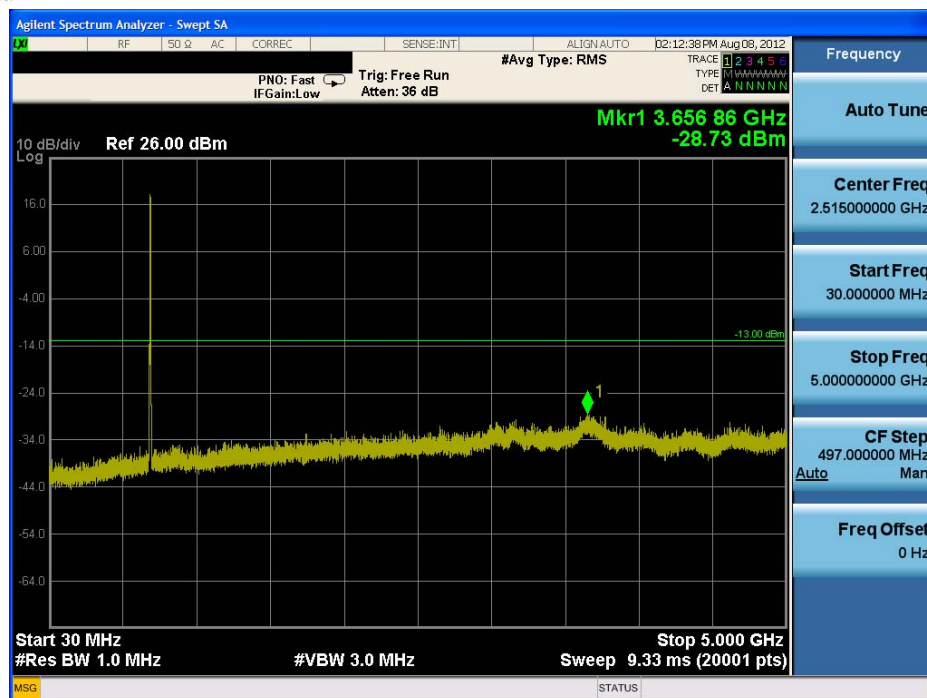


Plot 7-7. Conducted Spurious Plot (16QAM – RB Size 1, RB Offset 0 – Mid Channel)

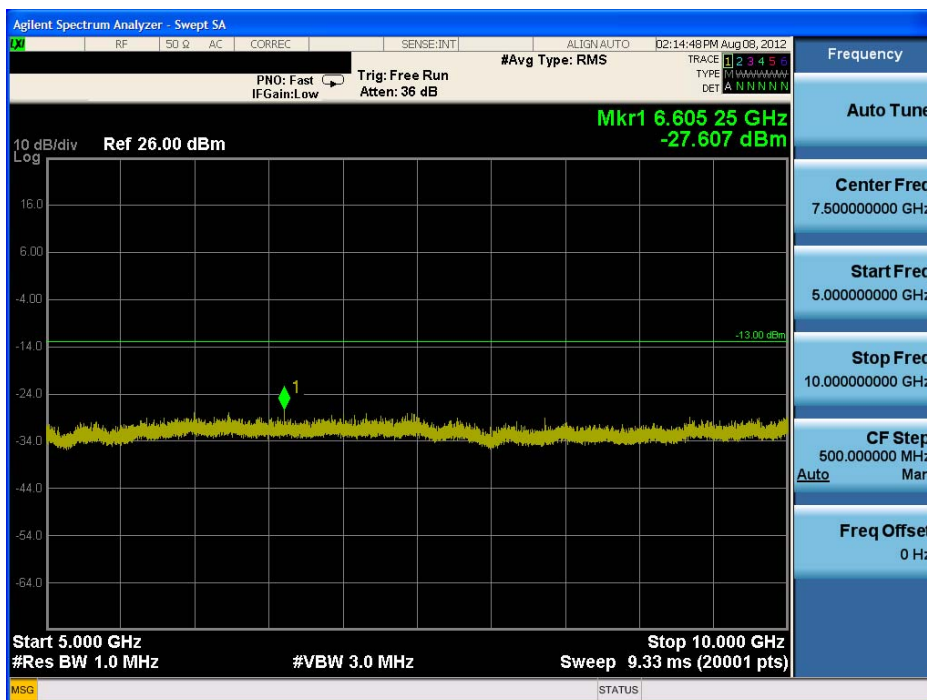


Plot 7-8. Conducted Spurious Plot (16 QAM– RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSGHI437	 FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 39 of 95

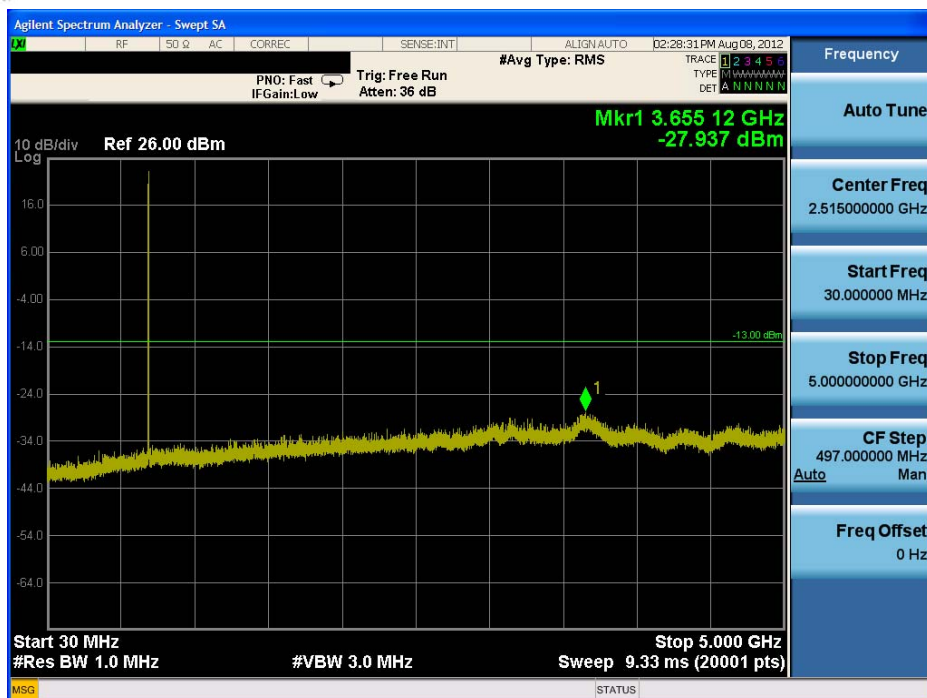


Plot 7-9. Conducted Spurious Plot (16QAM – RB Size 1, RB Offset 0 – High Channel)

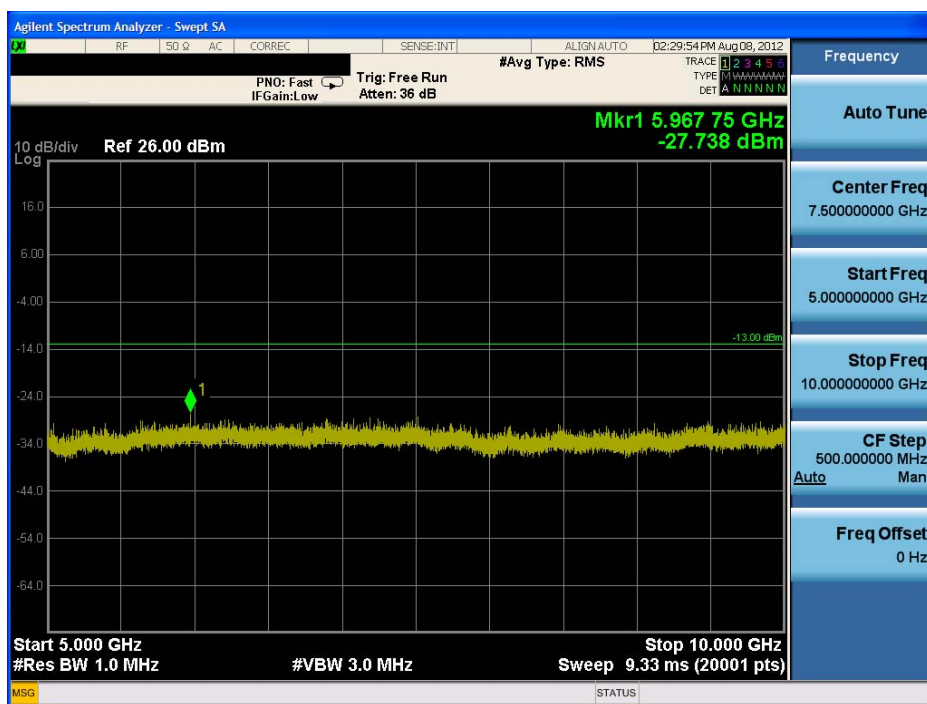

Plot 7-10. Conducted Spurious Plot (16QAM – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSGHI437	 FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 40 of 95

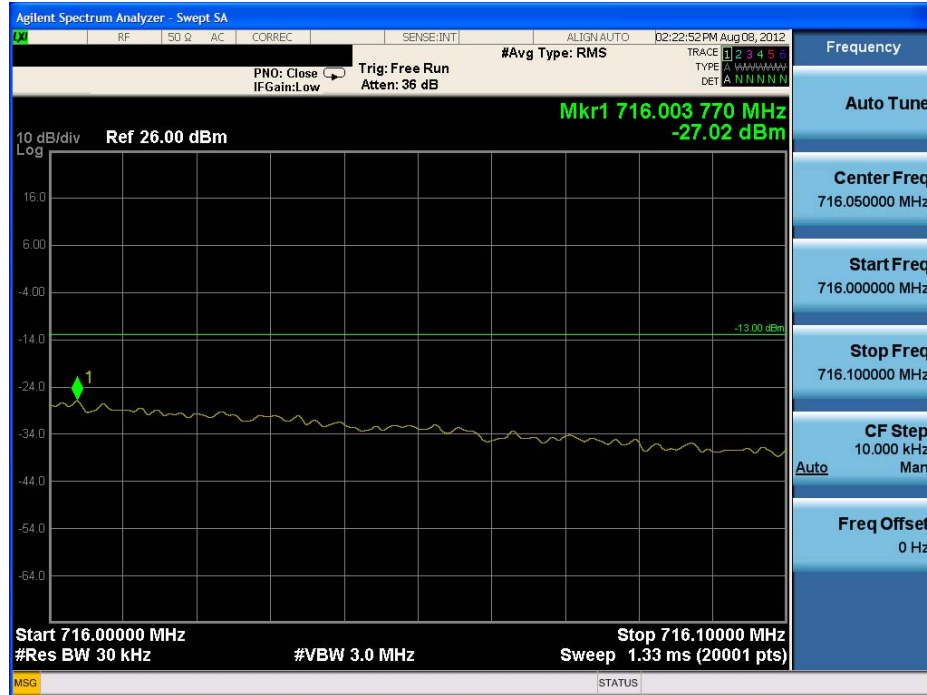


Plot 7-11. Upper Band Edge Plot (QPSK – RB Size 1, Offset 24)




Plot 7-12. Upper Band Edge Plot (QPSK – RB Size 25)

FCC ID: A3LSGHI437	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 41 of 95

BAND 17 – 10 MHz BW

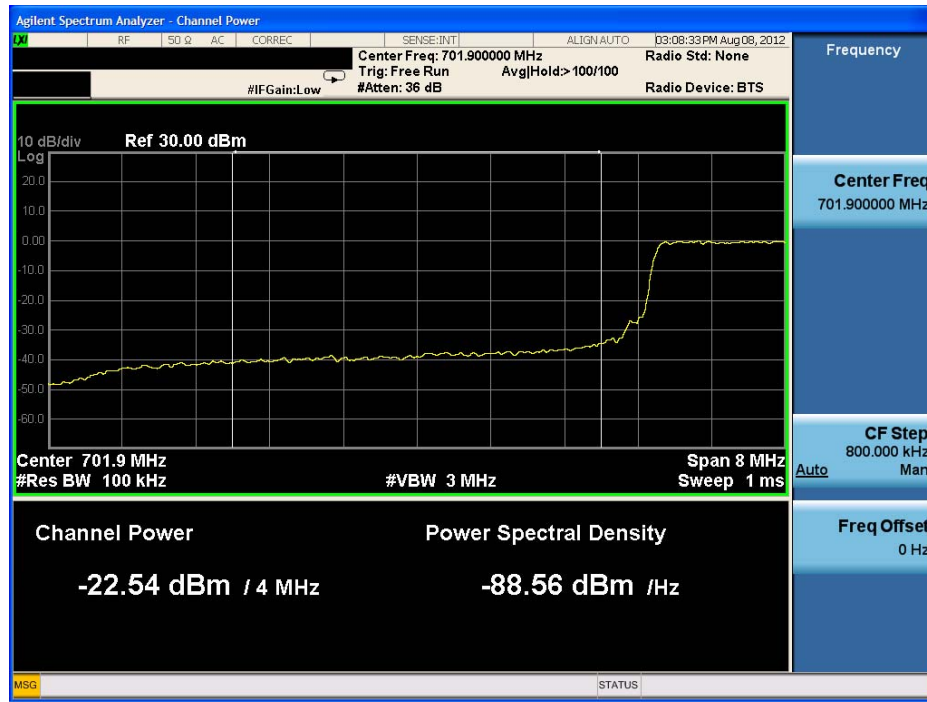


Plot 7-13. Lower Band Edge Plot (QPSK – RB Size 25, Offset 0)

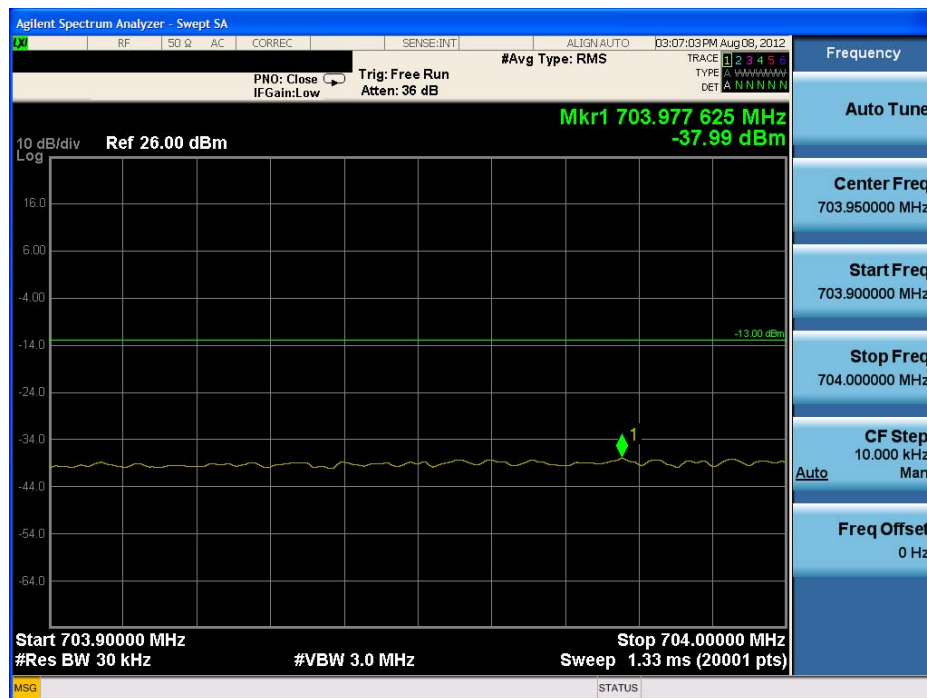


Plot 7-14. Lower Band Edge Plot (QPSK – RB Size 1, Offset 0)

FCC ID: A3LSGHI437	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 42 of 95

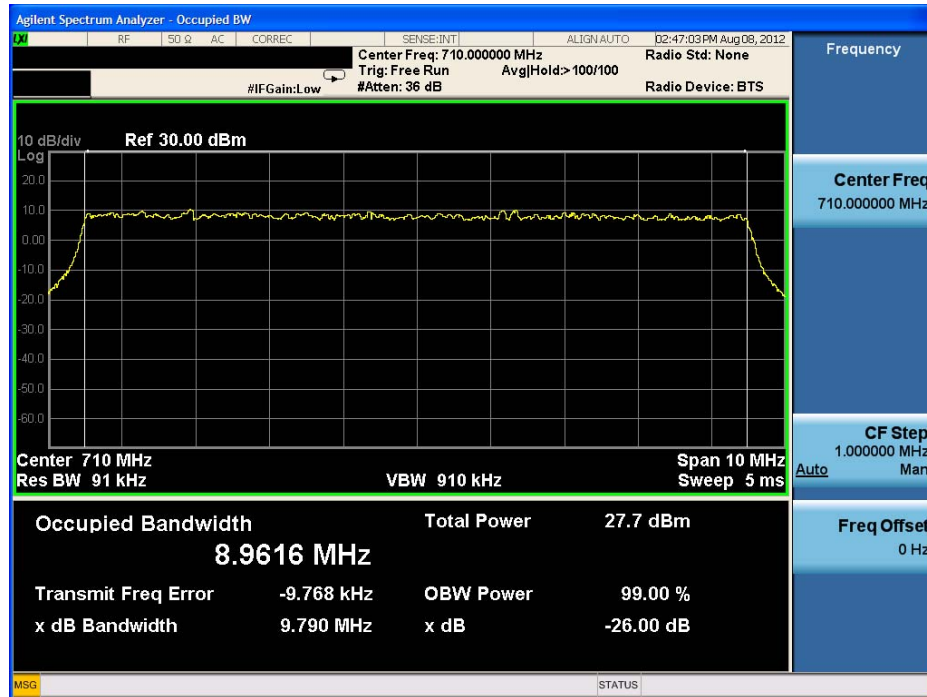


Plot 7-15. Occupied Bandwidth Plot (QPSK – RB Size 50)

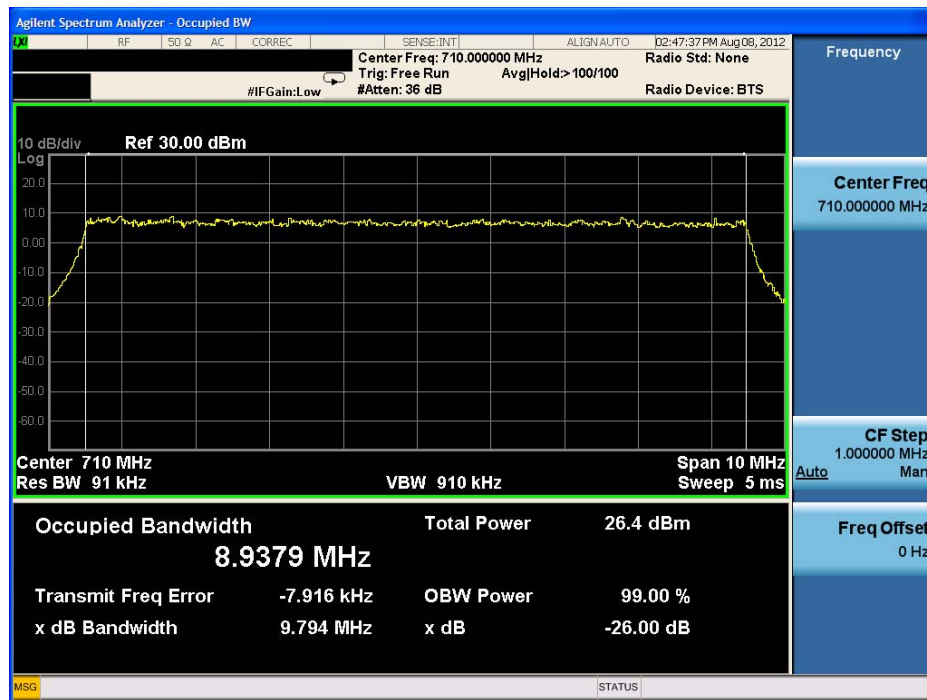


Plot 7-16. Occupied Bandwidth Plot (16-QAM – RB Size 50)

FCC ID: A3LSGHI437	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 43 of 95

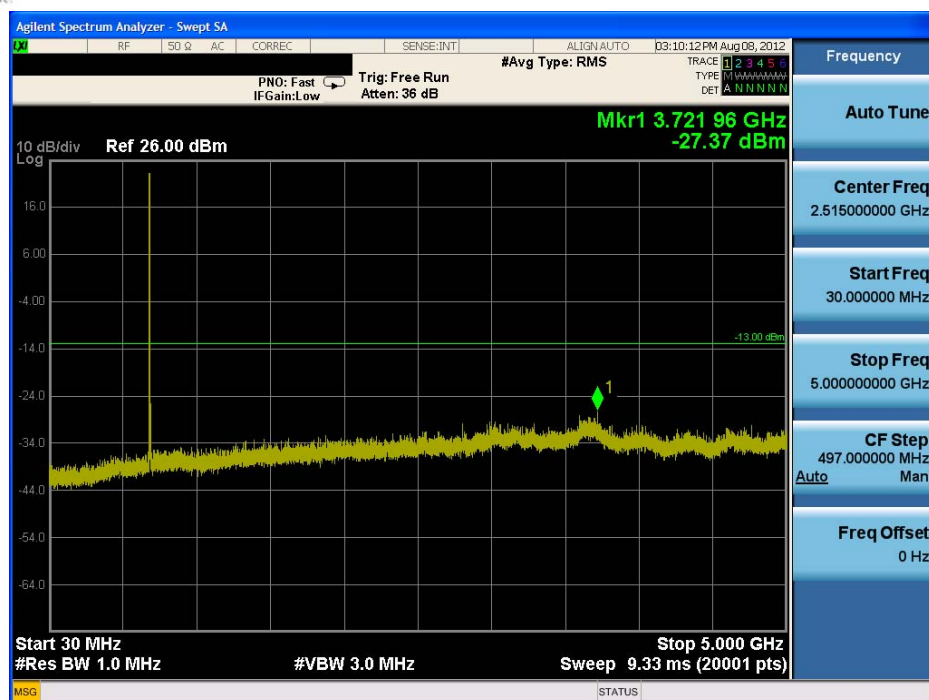


Plot 7-17. Conducted Spurious Plot (QPSK – RB Size 50, Offset 0 – Low Channel)

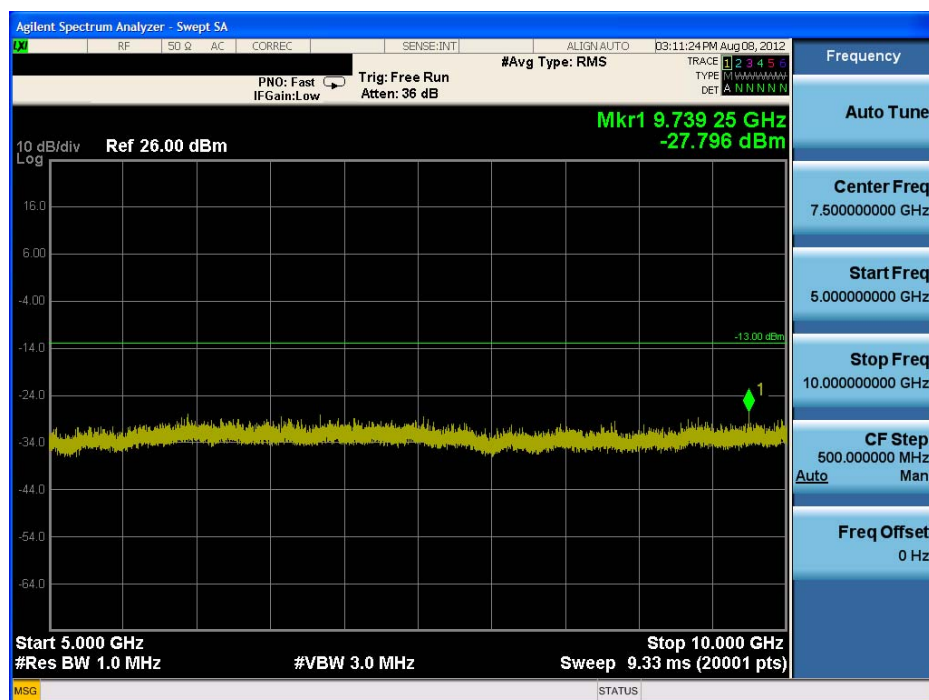


Plot 7-18. Conducted Spurious Plot (QPSK – RB Size 50, Offset 0 – Low Channel)

FCC ID: A3LSGHI437			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset			Page 44 of 95

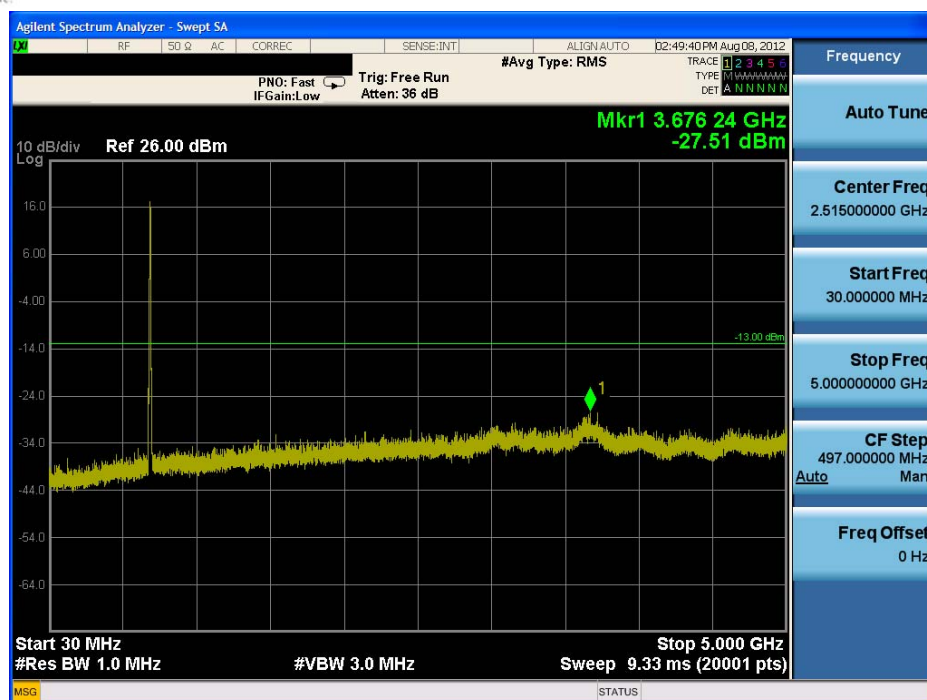


Plot 7-19. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

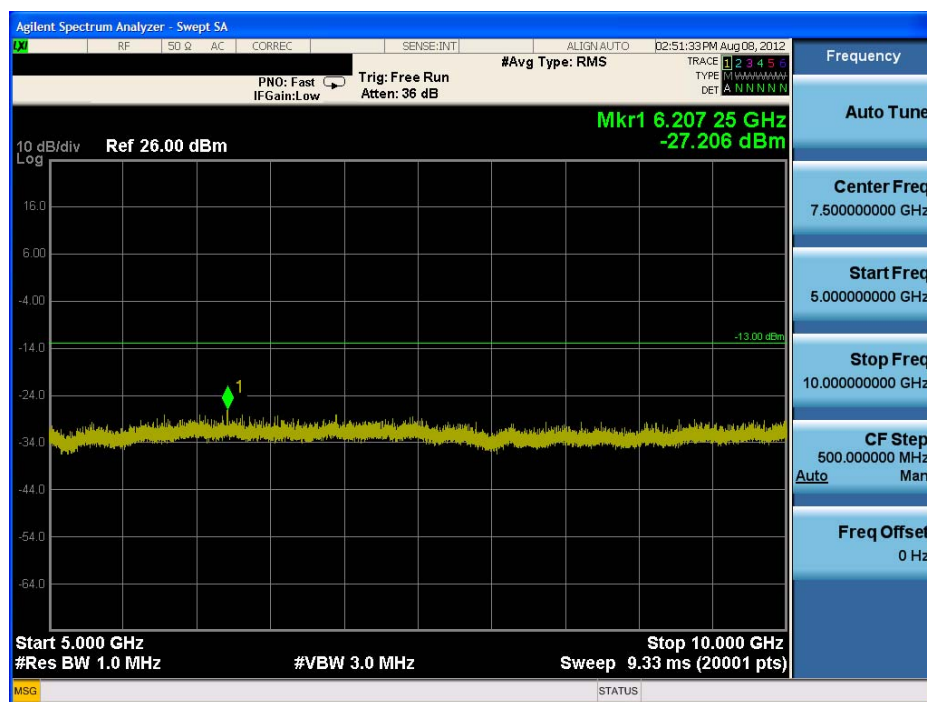


Plot 7-20. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSGHI437	 FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 45 of 95

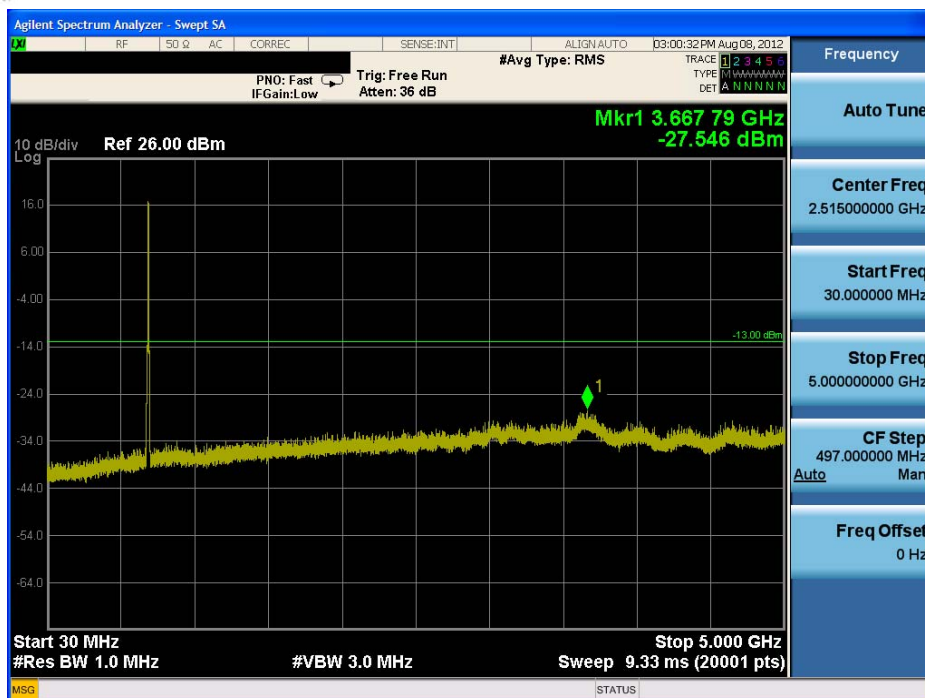


Plot 7-21. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

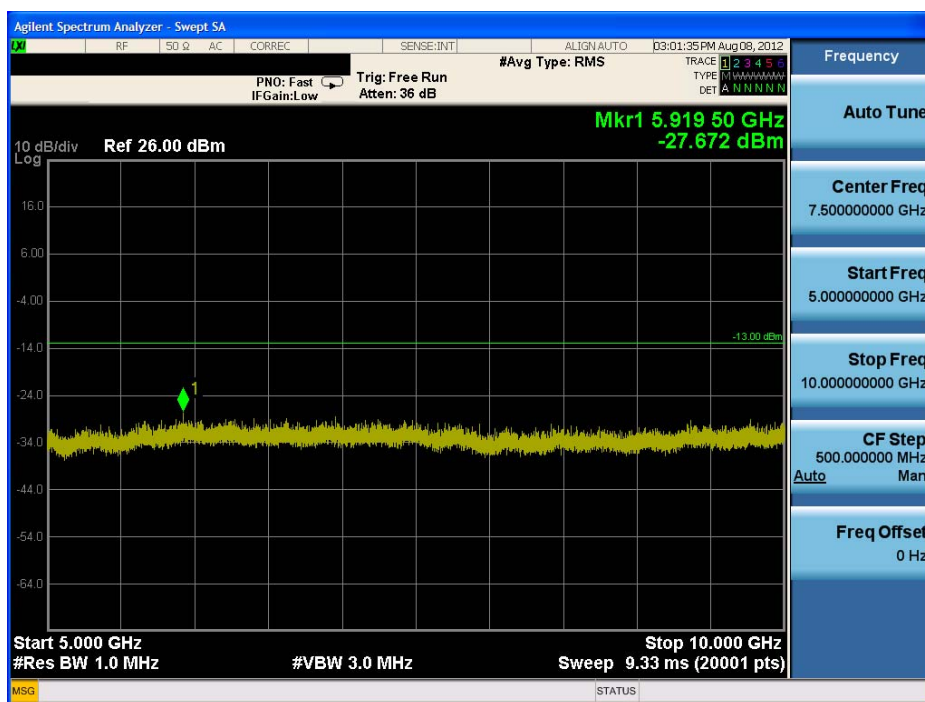

Plot 7-22. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSGHI437			FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset			Page 46 of 95

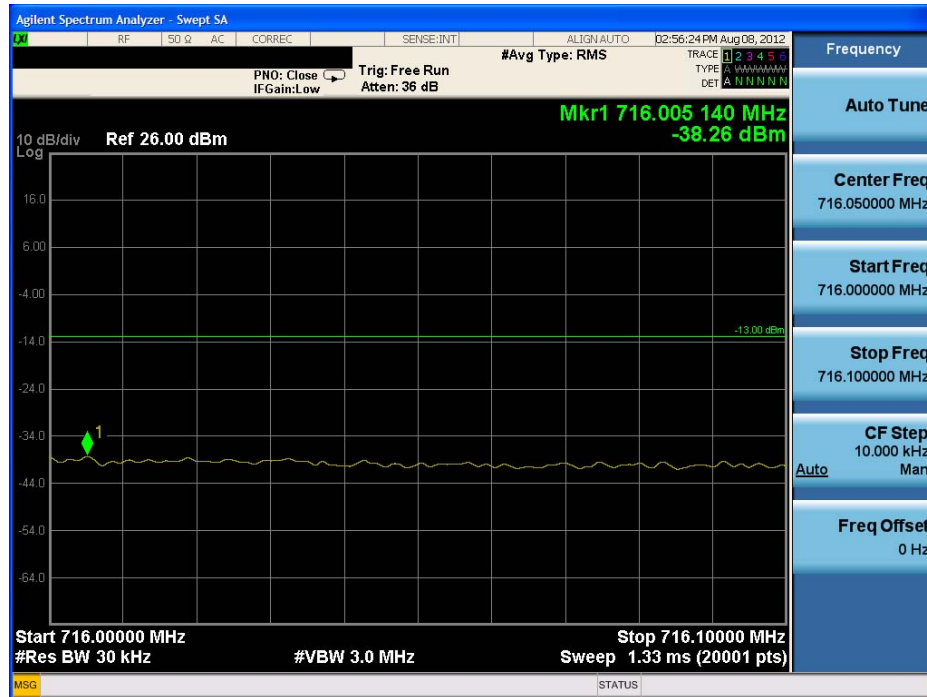

Plot 7-23. Upper Band Edge Plot (QPSK – RB Size 1, Offset 0)



Plot 7-24. Upper Band Edge Plot (QPSK – RB Size 50)

FCC ID: A3LSGHI437	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22-24-27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1207311075.A3L	Test Dates: August 6-14, 2012	EUT Type: Portable Handset		Page 47 of 95