



	1	2	3	4	5	6	7	8
A			Rev. No					
B								
C								
D								
E								
F								
G	Technical Description 1. Use 'FILM' provided by 'SAMSUNG' for letter and contents 2. Background color is 'WHITE', letter color is 'BLACK' (reverse for SAMSUNG LOGO) 3. Put 'release paper' on the back side after the adhesive. 4. No blur and spread for letter 5. Proceed with manufacturing process after the approval of R&D Group 6. The spec. of product must be based on approved limit samples. 7. Stock on as a ROLL 8. Follow drawing instruction above for CE or WEEE mark 9. Unify material and color as one color (blue) for glassine paper 							
H								
I								
J								
K								
L								

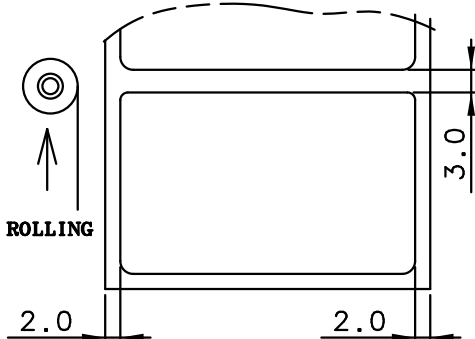

MAT.	White polypropylene 80 μ	FIN.	Semitransparency OPP Lamination + UVP Coating
TITLE	SGH-I708 LABEL (R)-MAIN-EU		
UNIT	mm	DESIGNED	CHECKED
TOLERANCE	+0.0/-0.1	jukyun Kim	kyeonghwan jo
SCALE	N/S		junesop kim
Manufacture	HANSUNG P&I	11-01-25	11-01-25
		PROJECTION	
		SHEET NO	1/1
		Doc. CODE	GH68-00000A

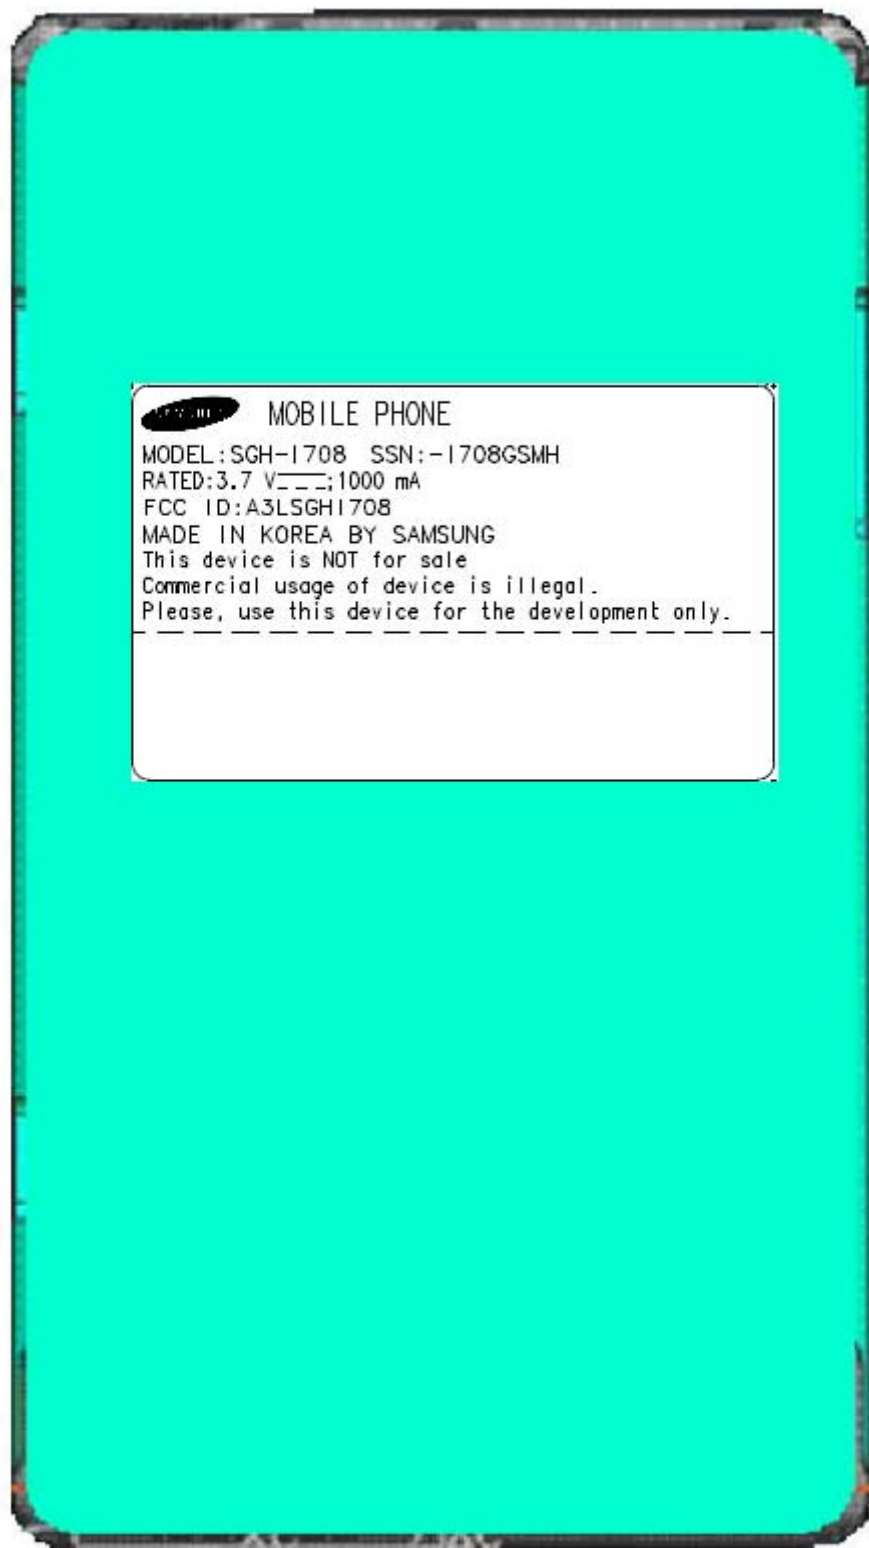

This label is placed inside the battery compartment