


	1	2	3	4	5	6	7	8																																										
A			Rev. No																																															
B																																																		
C																																																		
D																																																		
E																																																		
F																																																		
G	Technical Description 1. Use 'FILM' provided by 'SAMSUNG' for letter and contents 2. Background color is 'WHITE', letter color is 'BLACK' (reverse for SAMSUNG LOGO) 3. Put 'release paper' on the back side after the adhesive. 4. No blur and spread for letter 5. Proceed with manufacturing process after the approval of R&D Group 6. The spec. of product must be based on approved limit samples. 7. Stock on as a ROLL 8. Follow drawing instruction above for CE or WEEE mark 9. Unify material and color as one color (blue) for glassine paper																																																	
H																																																		
I																																																		
J	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">MAT.</td> <td colspan="2">White polypropylene 80μ</td> <td style="width: 10%;">FIN.</td> <td colspan="2">Semitransparency OPP Lamination + UVP Coating</td> </tr> </table>				MAT.	White polypropylene 80 μ		FIN.	Semitransparency OPP Lamination + UVP Coating																																									
MAT.	White polypropylene 80 μ		FIN.	Semitransparency OPP Lamination + UVP Coating																																														
K	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">TITLE</td> <td colspan="7">SGH-I708 LABEL (R)-MAIN-EU</td> </tr> <tr> <td>UNIT</td> <td>mm</td> <td>DESIGNED</td> <td>CHECKED</td> <td>APPROVED</td> <td>PROJECTION</td> <td colspan="2"></td> </tr> <tr> <td>TOLERANCE</td> <td>+0.0 -0.1</td> <td rowspan="2">jukyun Kim</td> <td rowspan="2">kyeonghwan jo</td> <td rowspan="2">junesop kim</td> <td rowspan="2"></td> <td colspan="2" rowspan="2"></td> </tr> <tr> <td>SCALE</td> <td>N/S</td> </tr> <tr> <td>Manufacture</td> <td>HANSUNG P&I</td> <td>11-01-25</td> <td>11-01-25</td> <td>11-01-25</td> <td>SHEET NO</td> <td colspan="2">1/1</td> </tr> <tr> <td colspan="2" style="text-align: center;"> </td> <td>Doc. CODE</td> <td colspan="5" style="text-align: center; font-size: 1.2em;">GH68-00000A</td> </tr> </table>								TITLE	SGH-I708 LABEL (R)-MAIN-EU							UNIT	mm	DESIGNED	CHECKED	APPROVED	PROJECTION			TOLERANCE	+0.0 -0.1	jukyun Kim	kyeonghwan jo	junesop kim				SCALE	N/S	Manufacture	HANSUNG P&I	11-01-25	11-01-25	11-01-25	SHEET NO	1/1				Doc. CODE	GH68-00000A				
TITLE	SGH-I708 LABEL (R)-MAIN-EU																																																	
UNIT	mm	DESIGNED	CHECKED	APPROVED	PROJECTION																																													
TOLERANCE	+0.0 -0.1	jukyun Kim	kyeonghwan jo	junesop kim																																														
SCALE	N/S																																																	
Manufacture	HANSUNG P&I	11-01-25	11-01-25	11-01-25	SHEET NO	1/1																																												
		Doc. CODE	GH68-00000A																																															
L																																																		



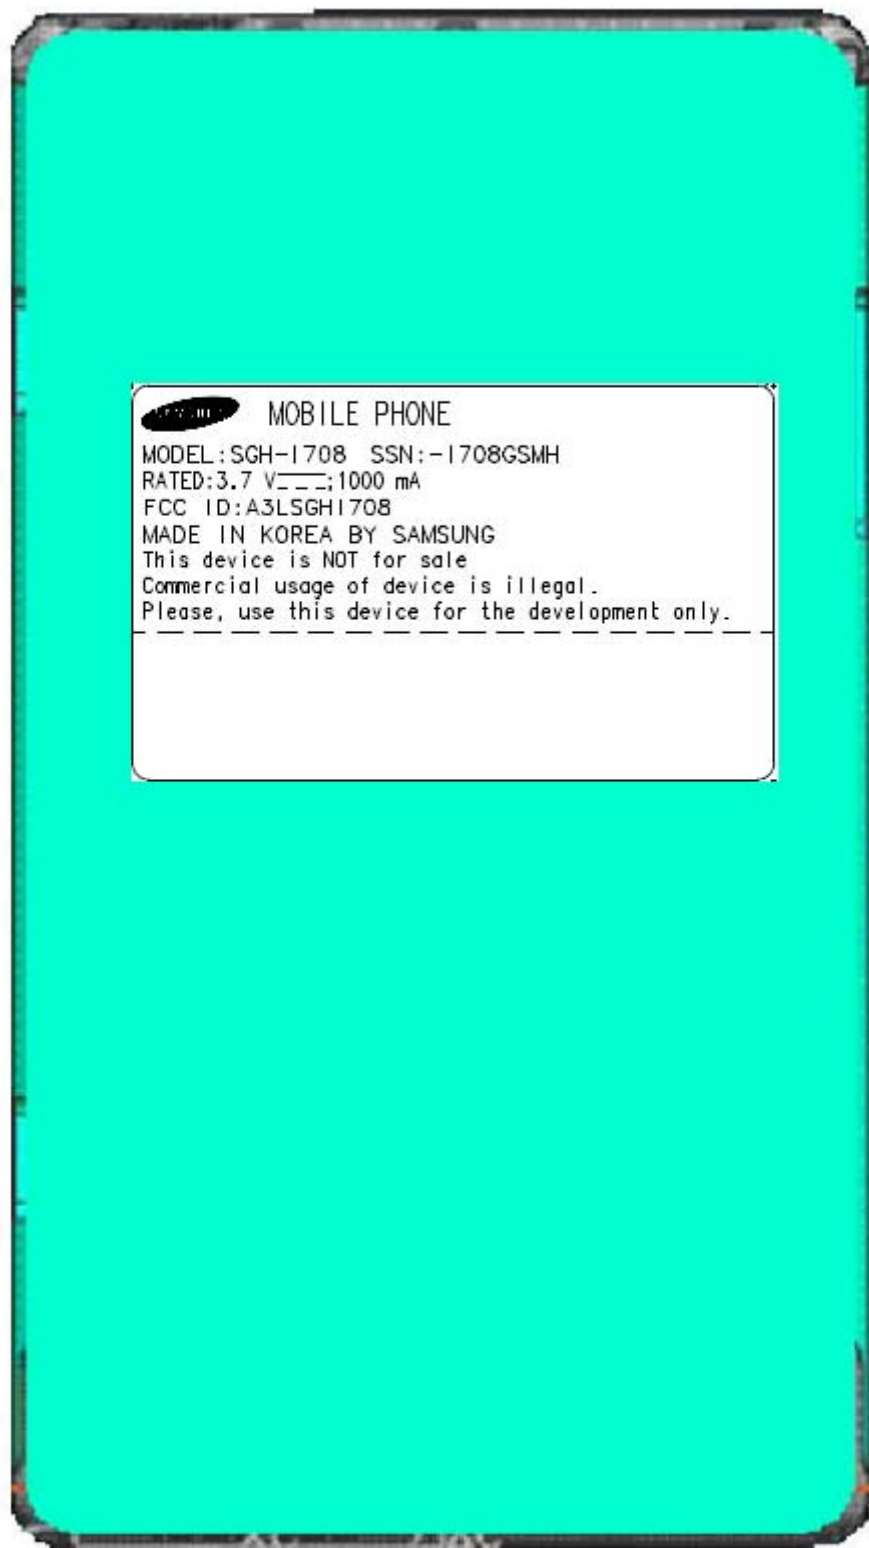

This label is placed inside the battery compartment