


2. Sample Label

	1	2	3	4	5	6	7	8
A			Rev. No					
B	2-R0.5 C2.0 SAMSUNG CE0168! MODEL : SGH-I777 FCC ID : A3LSGHI777 RATED : 3.7 V;1500 mA FOR INFORMATION CALL : 1 888 987 4357 3-R1.0 39.0^{+0.0}_{-0.1} 20.0 36.0^{+0.0}_{-0.1}							
C								
D								
E								
F								
G								
H	Technical Description 1. Use 'AI / PDF' provided by 'SAMSUNG' for letter and contents 2. Background color is 'WHITE', letter color is 'BLACK' (reverse for SAMSUNG LOGO) 3. Back side should be attached to release paper once adhesive is applied. 4. No letter should be blur/smeared 5. The production must be proceed after the approval of R&D Group 6. The product must be within approved sample's specification tolerance. 7. The product must be finished in a ROLL 8. Release paper must be unifiedn for material and color(blue) 9. Do not contain any substances which are specified in (OQA-2049).							
I	3.0 2.0 2.0 ROLLING							
J	MAT. (0.13T±0.01) OPP Laminating 16μ Adhesive 8 μ WHITE POLYPROPYLENE 80μ Adhesive 25 μ FIN. Semi transparency OPP laminating + UVP Coating							
K	TITLE SGH-I777 LABEL-MAIN							
L	UNIT	mm	DESIGNED	CHECKED	APPROVED	PROJECTION		
	TOLERANCE	+0.0 -0.1	Tae Hun Kim	Kyeong Hwan JO	June Sop Kim	SHEET NO	1/1	
	SCALE	N/S						
	Vendor	HSINS	110422	110422	110422			
SAMSUNG ELECTRONICS			Doc. CODE	GH68-000000A				

3. FCC ID Label Location

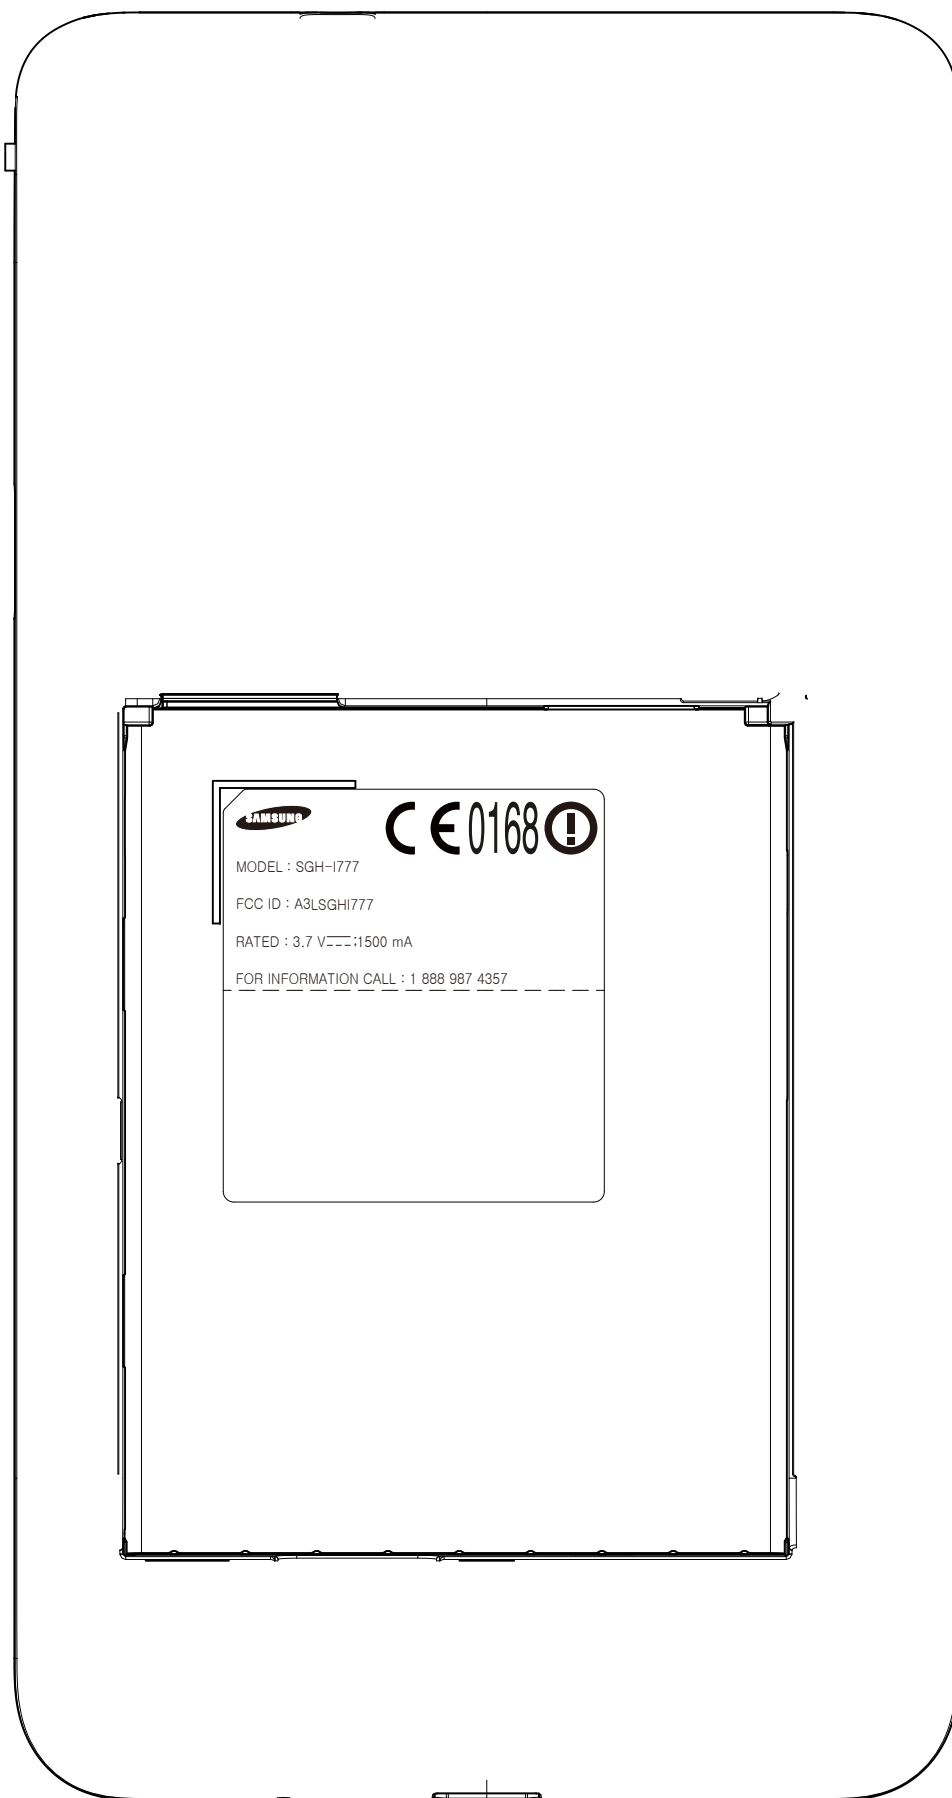

The label is placed inside the battery compartment