

SAMSUNG FCC ID : A3LSGHI858 1900MHz GSM1900 Head SAR

DUT: SGH-i858(Down); Serial: FC-146-A

Program Name: SGH-i858 GSM1900 Right (Slide.Down, Job No. : FC-146)

Procedure Name: Cheek/Touch, Ch.810, Ant.Intenna, Bat.Standard

Procedure Notes: Meas.Ambient Temp(celsius)-22.4; Tissue Temp(celsius)-21.4; Test Date-18/Oct/2005 [OET Bulletin 65-Supplement C, July 2001]

Communication System: GSM 1900; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.36 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3537; ConvF(8.29, 8.29, 8.29); Calibrated: 2004-12-15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn468; Calibrated: 2004-12-07
- Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Cheek/Touch, Ch.810, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.28 V/m ; Power Drift = -0.021 dB


Peak SAR (extrapolated) = 0.332 W/kg

SAR(1 g) = 0.195 mW/g

Maximum value of SAR (measured) = 0.215 mW/g

Cheek/Touch, Ch.810, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.189 mW/g

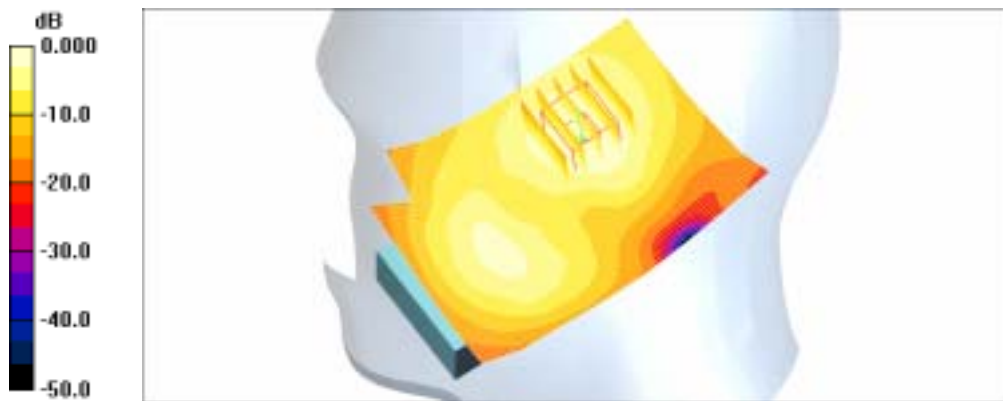

0 dB = 0.189 mW/g

SAMSUNG FCC ID : A3LSGHI858 1900MHz GSM1900 Head SAR

DUT: SGH-i858(Down); Serial: FC-146-A

Program Name: SGH-i858 GSM1900 Right (Slide.Down, Job No. : FC-146)

Procedure Name: Ear/Tilt, Ch.810, Ant.Intenna, Bat.Standard

Procedure Notes: Meas.Ambient Temp(celsius)-22.4; Tissue Temp(celsius)-21.4; Test Date-18/Oct/2005 [OET Bulletin 65-Supplement C, July 2001]

Communication System: GSM 1900; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.36 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3537; ConvF(8.29, 8.29, 8.29); Calibrated: 2004-12-15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn468; Calibrated: 2004-12-07
- Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Ear/Tilt, Ch.810, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

$dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.245 mW/g

Ear/Tilt, Ch.810, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.2 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.220 mW/g

Maximum value of SAR (measured) = 0.235 mW/g

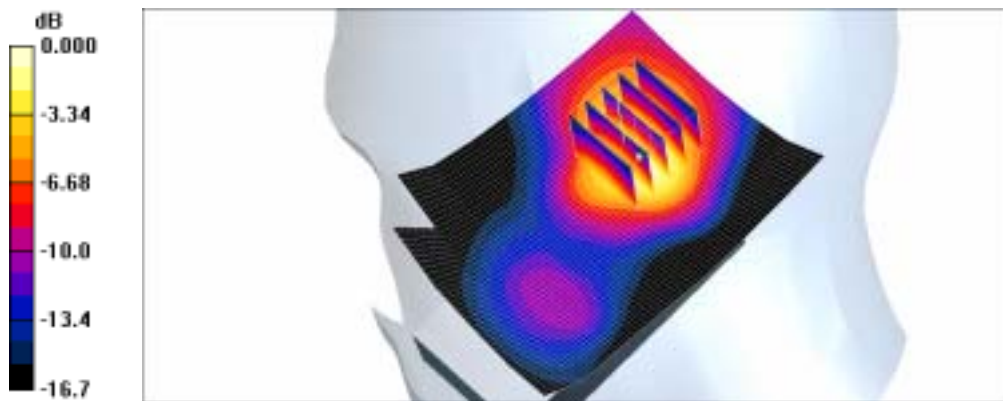

0 dB = 0.235mW/g

SAMSUNG FCC ID : A3LSGHI858 1900MHz GSM1900 Head SAR

DUT: SGH-i858(Down); Serial: FC-146-A

Program Name: SGH-i858 GSM1900 Left (Slide.Down, Job No. : FC-146)

Procedure Name: Cheek/Touch, Ch.810, Ant.Intenna, Bat.Standard

Procedure Notes: Meas.Ambient Temp(celsius) - 22.4; Tissue Temp(celsius) - 21.4; Test Date - 18/Oct/2005 [OET Bulletin 65-Supplement C, July 2001]

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3537; ConvF(8.29, 8.29, 8.29); Calibrated: 2004-12-15
- Sensor - Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn468; Calibrated: 2004-12-07
- Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Cheek/Touch, Ch.810, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.122 mW/g

Cheek/Touch, Ch.810, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.25 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.120 mW/g

Maximum value of SAR (measured) = 0.130 mW/g

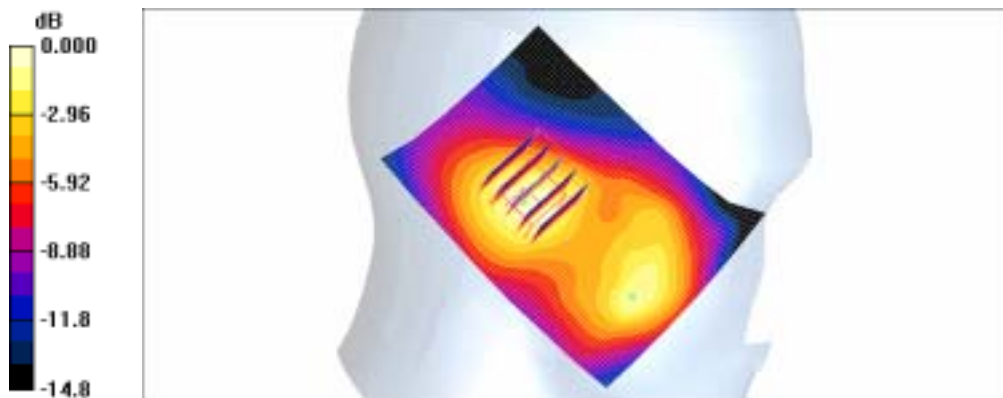

0 dB = 0.130mW/g

SAMSUNG FCC ID : A3LSGHI858 1900MHz GSM1900 Head SAR

DUT: SGH-i858(Down); Serial: FC-146-A

Program Name: SGH-i858 GSM1900 Left (Slide.Down, Job No. : FC-146)

Procedure Name: Ear/Tilt, Ch.810, Ant.Intenna, Bat.Standard

Procedure Notes: Meas.Ambient Temp(celsius)-22.4; Tissue Temp(celsius)-21.4; Test Date-18/Oct/2005 [OET Bulletin 65-Supplement C, July 2001]

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.36 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3537; ConvF(8.29, 8.29, 8.29); Calibrated: 2004-12-15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn468; Calibrated: 2004-12-07
- Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Ear/Tilt, Ch.810, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

$dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.7 V/m ; Power Drift = -0.091 dB

Peak SAR (extrapolated) = 0.257 W/kg

SAR(1 g) = 0.161 mW/g

Maximum value of SAR (measured) = 0.177 mW/g

Ear/Tilt, Ch.810, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

$dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.182 mW/g



0 dB = 0.182mW/g

SAMSUNG FCC ID : A3LSGHI858 1900MHz GSM1900 Head SAR

DUT: SGH-i858(Down); Serial: FC-146-A

Program Name: SGH-i858 GSM1900 Right (Slide.Down, Job No. : FC-146)

Procedure Name: Ear/Tilt, Ch.810, Ant.Intenna, Bat.Standard With BT ON

Procedure Notes: Meas.Ambient Temp(celsius)-22.4; Tissue Temp(celsius)-21.4; Test Date-18/Oct/2005 [OET Bulletin 65-Supplement C, July 2001]

Communication System: GSM 1900; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.36 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3537; ConvF(8.29, 8.29, 8.29); Calibrated: 2004-12-15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn468; Calibrated: 2004-12-07
- Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Ear/Tilt, Ch.810, Ant.Intenna, Bat.Standard With BT ON/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.1 V/m ; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.219 mW/g

Maximum value of SAR (measured) = 0.238 mW/g

Ear/Tilt, Ch.810, Ant.Intenna, Bat.Standard With BT ON/Area Scan (51x71x1): Measurement

grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.252 mW/g



0 dB = 0.252mW/g

SAMSUNG FCC ID : A3LSGHI858 1900MHz GSM1900 Body SAR

DUT: SGH-i858(Body); Serial: FC-146-A

Program Name: SGH-i858 GSM1900 Body (Job No. : FC-146)

Procedure Name: Body, Ch.810, Ant.Intenna, Bat.Standard

Procedure Notes: Meas.Ambient Temp(celsius) - 22.6; Tissue Temp(celsius) - 21.4; Test Date - 18/Oct/2005 [OET Bulletin 65-Supplement C, July 2001]

Communication System: Body GPRS ; Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.49 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3537; ConvF(7.76, 7.76, 7.76); Calibrated: 2004-12-15
- Sensor - Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn468; Calibrated: 2004-12-07
- Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body, Ch.810, Ant.Intenna, Bat.Standard/Zoom Scan (6x6x7)/Cube 0: Measurement grid:

$dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.8 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 0.704 W/kg


SAR(1 g) = 0.482 mW/g

Maximum value of SAR (measured) = 0.523 mW/g

Body, Ch.810, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

$dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.580 mW/g

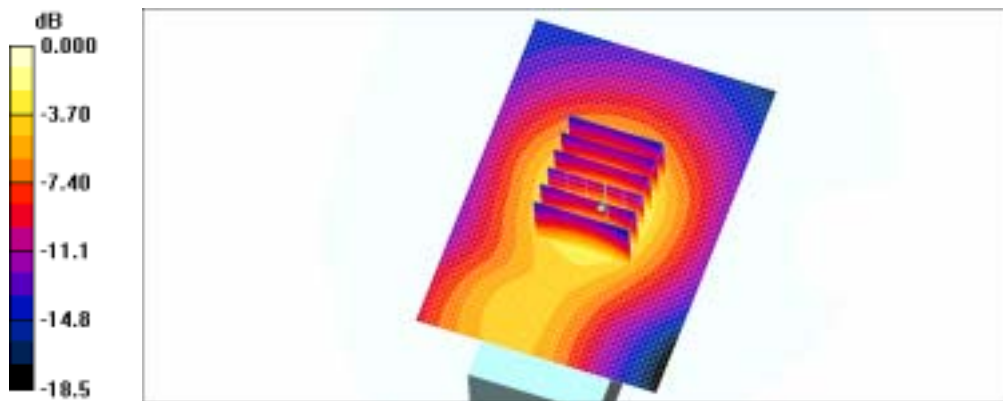

0 dB = 0.580mW/g

SAMSUNG FCC ID : A3LSGHI858 1900MHz GSM1900 Body SAR

DUT: SGH-i858(Body); Serial: FC-146-A

Program Name: SGH-i858 GSM1900 Body (Job No. : FC-146)

Procedure Name: Body, Ch.810, Ant.Intenna, Bat.Standard with BT ON

Procedure Notes: Meas.Ambient Temp(celsius)-22.6; Tissue Temp(celsius)-21.4; Test Date-18/Oct/2005 [OET Bulletin 65-Supplement C, July 2001]

Communication System: Body GPRS ; Frequency: 1909.8 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.49 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3537; ConvF(7.76, 7.76, 7.76); Calibrated: 2004-12-15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn468; Calibrated: 2004-12-07
- Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body, Ch.810, Ant.Intenna, Bat.Standard with BT ON/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.7 V/m ; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 0.703 W/kg


SAR(1 g) = 0.476 mW/g

Maximum value of SAR (measured) = 0.515 mW/g

Body, Ch.810, Ant.Intenna, Bat.Standard with BT ON/Area Scan (51x71x1): Measurement

grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.564 mW/g

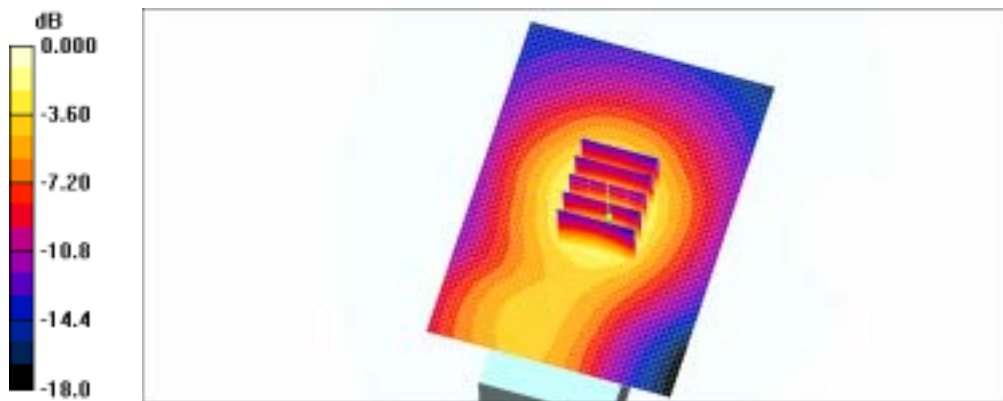

0 dB = 0.564 mW/g

SAMSUNG FCC ID : A3LSGHI858 1900MHz GSM1900 Body SAR

DUT: SGH-i858(Body); Serial: FC-146-A

Program Name: SGH-i858 GSM1900 Body (Job No. : FC-146)

Procedure Name: Body, Ch.810, Ant.Intenna, Bat.Standard

Procedure Notes: Meas.Ambient Temp(celsius)-22.6; Tissue Temp(celsius)-21.4; Test Date-18/Oct/2005 [OET Bulletin 65-Supplement C, July 2001]

Communication System: Body GPRS ; Frequency: 1909.8 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.49 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3537; ConvF(7.76, 7.76, 7.76); Calibrated: 2004-12-15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn468; Calibrated: 2004-12-07
- Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body, Ch.810, Ant.Intenna, Bat.Standard/Zoom Scan (6x6x7)/Cube 0: Measurement grid:

$dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.8 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 0.704 W/kg


SAR(1 g) = 0.482 mW/g

Maximum value of SAR (measured) = 0.523 mW/g

Body, Ch.810, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

$dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.580 mW/g

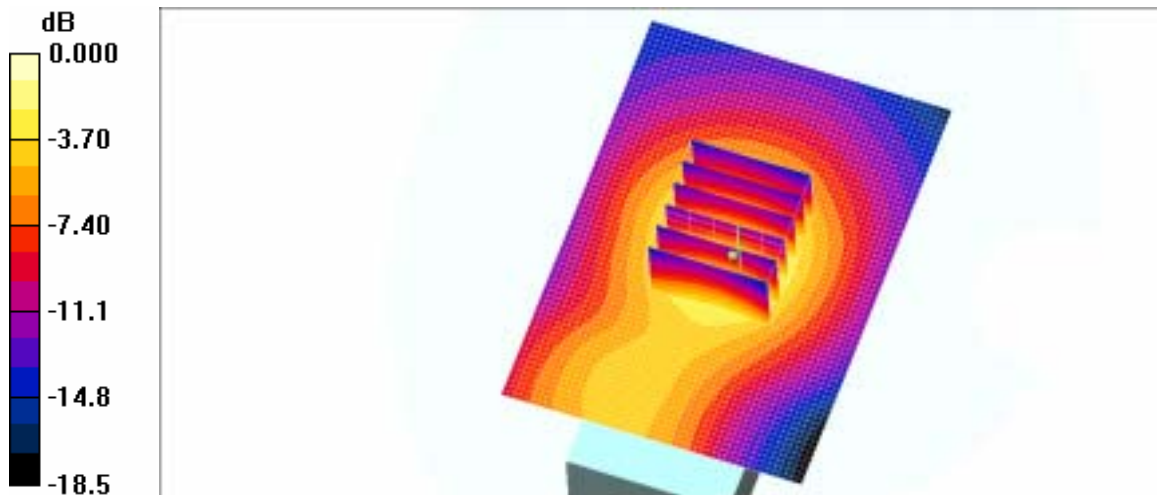

SAMSUNG FCC ID : A3LSGHI858 1900MHz GSM1900 Head SAR

DUT: SGH-i858(Down); Serial: FC-146-A

Program Name: SGH-i858 GSM1900 Right (Slide.Down, Job No. : FC-146)

Procedure Name: Ear/Tilt, Ch.810, Ant.Intenna, Bat.Standard

Procedure Notes: Meas.Ambient Temp(celsius)-22.4; Tissue Temp(celsius)-21.4; Test Date-18/Oct/2005 [OET Bulletin 65-Supplement C, July 2001]

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3537; ConvF(8.29, 8.29, 8.29); Calibrated: 2004-12-15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn468; Calibrated: 2004-12-07
- Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Ear/Tilt, Ch.810, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.245 mW/g

Ear/Tilt, Ch.810, Ant.Intenna, Bat.Standard/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.220 mW/g

Maximum value of SAR (measured) = 0.235 mW/g

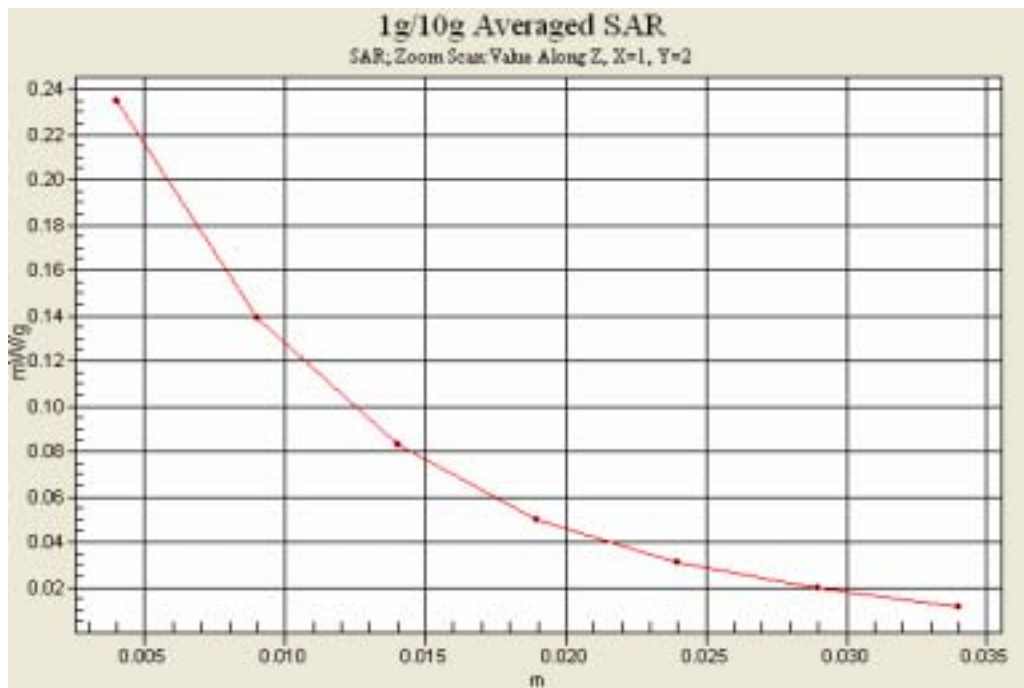

SAMSUNG FCC ID : A3LSGHI858 1900MHz GSM1900 Head SAR

DUT: SGH-i858(Down); Serial: FC-146-A

Program Name: SGH-i858 GSM1900 Right (Slide.Down, Job No. : FC-146)

Procedure Name: Ear/Tilt, Ch.810, Ant.Intenna, Bat.Standard With BT ON

Procedure Notes: Meas.Ambient Temp(celsius)-22.4; Tissue Temp(celsius)-21.4; Test Date-18/Oct/2005 [OET Bulletin 65-Supplement C, July 2001]

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3537; ConvF(8.29, 8.29, 8.29); Calibrated: 2004-12-15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn468; Calibrated: 2004-12-07
- Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Ear/Tilt, Ch.810, Ant.Intenna, Bat.Standard With BT ON/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.012 dB


Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.219 mW/g

Maximum value of SAR (measured) = 0.238 mW/g

Ear/Tilt, Ch.810, Ant.Intenna, Bat.Standard With BT ON/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.252 mW/g

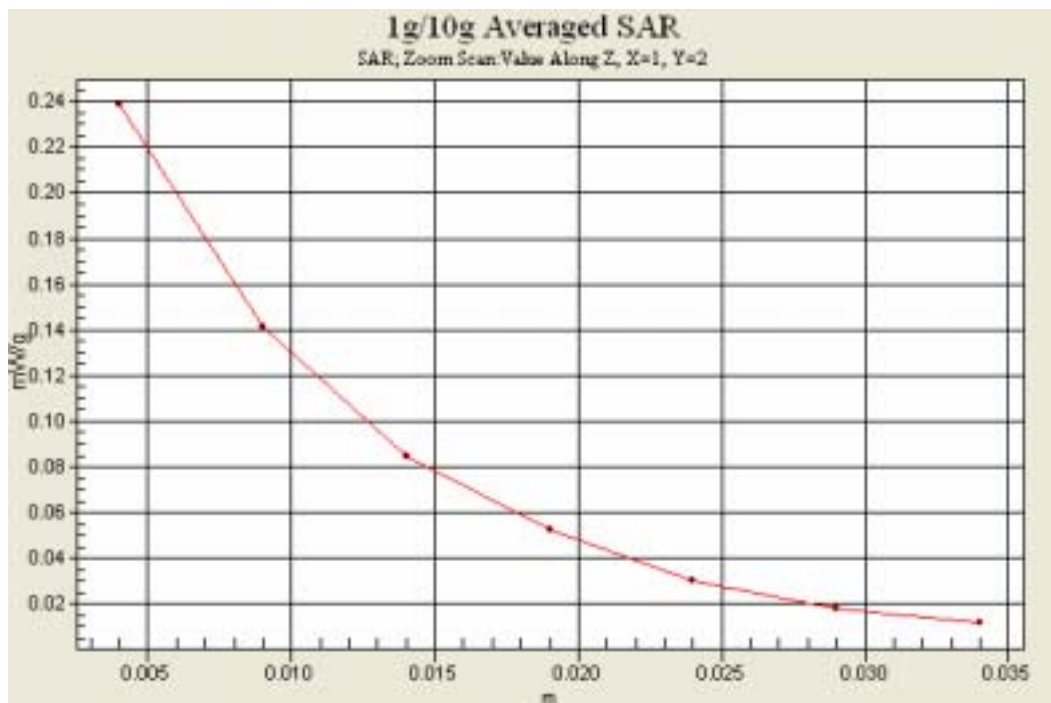

SAMSUNG FCC ID : A3LSGHI858 1900MHz GSM1900 Body SAR

DUT: SGH-i858(Body); Serial: FC-146-A

Program Name: SGH-i858 GSM1900 Body (Job No. : FC-146)

Procedure Name: Body, Ch.810, Ant.Intenna, Bat.Standard

Procedure Notes: Meas.Ambient Temp(celsius)-22.6; Tissue Temp(celsius)-21.4; Test Date-18/Oct/2005 [OET Bulletin 65-Supplement C, July 2001]

Communication System: Body GPRS ; Frequency: 1909.8 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3537; ConvF(7.76, 7.76, 7.76); Calibrated: 2004-12-15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn468; Calibrated: 2004-12-07
- Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body, Ch.810, Ant.Intenna, Bat.Standard/Zoom Scan (6x6x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.8 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 0.704 W/kg


SAR(1 g) = 0.482 mW/g

Maximum value of SAR (measured) = 0.523 mW/g

Body, Ch.810, Ant.Intenna, Bat.Standard/Area Scan (51x71x1): Measurement grid:

dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.580 mW/g

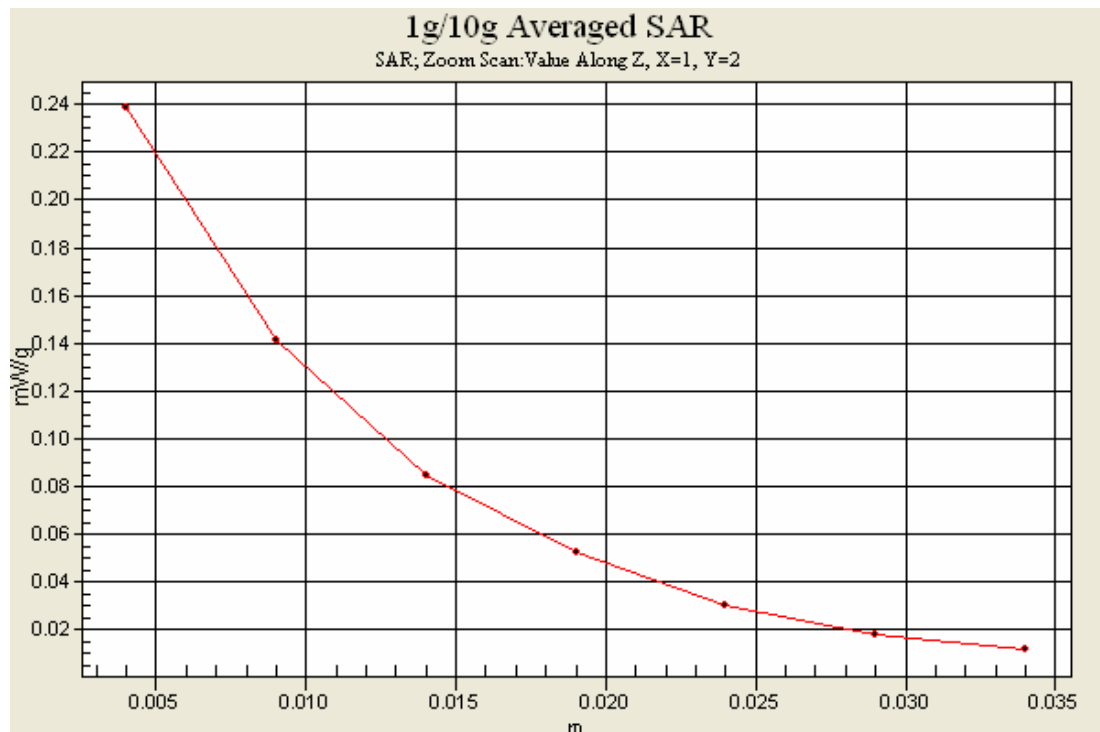

SAMSUNG FCC ID : A3LSGHI858 1900MHz GSM1900 Body SAR

DUT: SGH-i858(Body); Serial: FC-146-A

Program Name: SGH-i858 GSM1900 Body (Job No. : FC-146)

Procedure Name: Body, Ch.810, Ant.Intenna, Bat.Standard with BT ON

Procedure Notes: Meas.Ambient Temp(celsius)-22.6; Tissue Temp(celsius)-21.4; Test Date-18/Oct/2005 [OET Bulletin 65-Supplement C, July 2001]

Communication System: Body GPRS ; Frequency: 1909.8 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3537; ConvF(7.76, 7.76, 7.76); Calibrated: 2004-12-15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn468; Calibrated: 2004-12-07
- Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1248
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body, Ch.810, Ant.Intenna, Bat.Standard with BT ON/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.7 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 0.703 W/kg

SAR(1 g) = 0.476 mW/g

Maximum value of SAR (measured) = 0.515 mW/g

Body, Ch.810, Ant.Intenna, Bat.Standard with BT ON/Area Scan (51x71x1): Measurement

grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.564 mW/g

