

EMC TEST REPORT

Project No.	LBE20133860	Issue No.	0
Applicant	Name of organization	Samsung Electronics Co., Ltd.	
	Address	(Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea	
	Date of application	July 18, 2013	
EUT	Type of device	☒ Class B personal computers and peripherals ☐ All other devices	
	Equipment authorization	☐ Declaration of Conformity ☒ Certification ☐ Verification	
	FCC ID	A3LSGHT399	
	Kind of product	Mobile Phone	
	Model No.	SGH-T399	
	Variant Model No.	Refer to clause 4.6	
	Manufacturer	TSTC Samsung Telecommunication Co., Ltd. 300385 China Tianjin No.9 WeiWu Rd.Micro Electronic Industrial Park Xiqing Dist,Tianjin,China	
Applied Standards		FCC Part 15, Subpart B, Class B / ANSI C63.4-2009	
Test Period		July 18, 2013 ~ July 23, 2013	
Issue date		July 29, 2013	

Test result : Complied

The equipment under test has found to be compliant with the applied standards.
(Refer to the attached test result for more detail.)

Tested by : Jong-Sup Jeong



Reviewed by : Tae-Young Jang



The test results in this report only apply to the tested sample. This report must not be reproduced, except in full, without written permission from CS & Environment center.



(Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea
Tel: 82 31 279 1750, Fax: 82 31 279 1745

Table of contents

1. Report Information

1.1 Revision history	3
----------------------------	---

2. Summary of test results

2.1 Emission	3
--------------------	---

3. General Information

3.1 Test facility	3
-------------------------	---

4. Test Configuration

4.1 Test Peripherals	4
4.2 EUT operating mode	4
4.3 Details of Sampling	5
4.4 Used cable description	5
4.5 Test arrangement	5
4.6 EUT Description	6
4.7 Clock Frequencies	6
4.8 Test configuration and condition	6
4.9 Measurement uncertainty	7

5. Result of individual tests

5.1 Conducted disturbance	8
5.2 Radiated disturbance	11

1. Report Information

1.1 Revision history

No.	Revised detailed information
Issue 0	- LBE20133860 (SAMSUNG)

2. Summary of test results

1.1 Emission

The EUT has been tested according to the following specifications:

Applied	Test type	Applied standard	Result
☒	Conducted Disturbance (Mains port)	FCC Part 15 Subpart B / ANSI C63.4-2009 (Class B)	Complied
☒	Radiated Disturbance		Complied

3. General Information

3.1 Test facility

The CS & Environment center is located on Samsung Electronics Co., Ltd. at (Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Republic of Korea.

All testing are performed in Semi-anechoic chambers conforming to the site attenuation characteristics defined by ANSI C63.4, CISPR 22, 16-1 and 16-2. and Shielded rooms.

The CS & Environment center is operated as testing laboratory in accordance with the requirements of ISO/IEC 17025:2005.

4. Test Setup configuration

4.1 Test Peripherals

The cables used for these peripherals are either permanently attached by the peripheral manufacturer or coupled with an assigned cable as defined below.

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Mark	Description	Model No.	Serial No.	Manufacturer / Trademark	FCC ID / DoC
A	Mobile Phone	SGH-T399	-	SAMSUNG	A3LSGHT399
B	Battery	B105BU	THaD628AS/2-B	SAMSUNG	-
C	Headset	EHS49AS0ME	-	SAMSUNG	-
D	Data Cable	ECC1DU4BBE	-	SAMSUNG	-
E	microSD Card	16GB	-	SANDISK	-
F	Desk-Top Computer	DM300S3A	-	SAMSUNG	DoC
	Desk-Top Computer	DM301S3A	DF3A98ECA000NE	SAMSUNG	DoC
G	LCD TV Monitor	CF19MS	CF19H1LS700048Y	SAMSUNG	DoC
	LCD TV Monitor	EF23TS	EM23H1LS300070L	SAMSUNG	DoC
H	Mouse	M-SBF69	HCA53212225	SAMSUNG	DoC
	Mouse	M-SBF69	-	SAMSUNG	DoC
I	Keyboard	SDM8500P	8M001183	SAMSUNG	DoC
	Keyboard	SDM8500P	8M001033	SAMSUNG	DoC
J	Gigabit Switch 8	3CGSU08	AB/9XRQAC0024825	3COM	DoC
K	Power Supply	PW150	KA1203N03	AULT	DoC

4.2 EUT operating mode

To achieve compliance applied standard specification, the following mode(s) were made during compliance testing:

Operating Mode 1	USB Mode (Data Communication)
-------------------------	-------------------------------

4.3 Details of Sampling


Customer selected, single unit.

4.4 Used cable description

The EUT is configured, installed, arranged and operated in a manner consistent with typical applications. Interface cables/loads/devices are connected to at least one of each type of interface port of the EUT, and where practical, each cable shall be terminated in a device typical of actual usage. The type(s) of interconnecting cables to be used and the interface port (of the EUT) to which these were connected:

No.	Connected cable	Length [m]	Shielded [Y/N]	Note
1	Data Cable / Travel Adapter	1.0	Yes	From EUT to Desk-Top Computer / From EUT to Travel Adapter
2	Headset	1.6	No	For EUT
3	Power	1.8	No	For Desk-Top Computer
4	Power	1.8	No	For LCD TV Monitor
5	Power	1.8	No	From Gigabit Switch 8 to Power Supply
6	Power	1.8	No	For Power Supply
7	LAN	1.5	No	From Desk-Top Computer to Gigabit Switch 8
8	LAN	1.5	No	From Gigabit Switch 8 to Local Area Network
9	RGB	1.8	Yes	From Desk-Top Computer to LCD TV Monitor
10	PS/2	1.8	Yes	From Desk-Top Computer to Mouse
11	PS/2	1.8	Yes	From Desk-Top Computer to Keyboard

4.5 Test arrangement

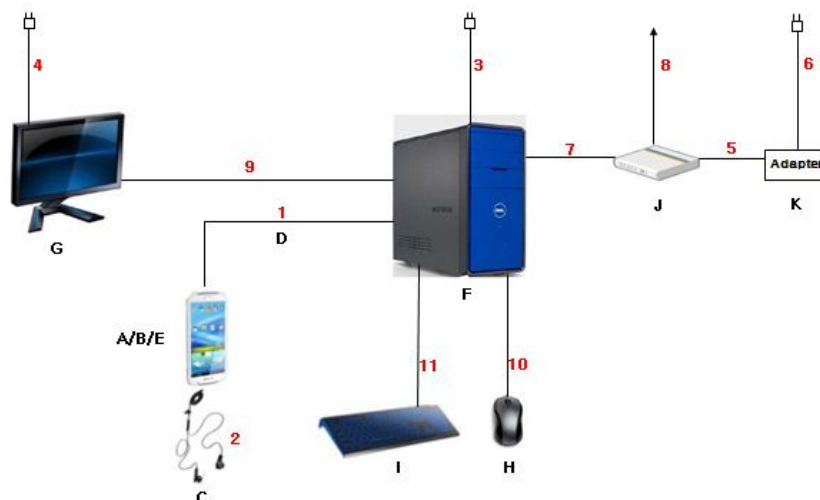

4.6 EUT Description

4.6.1 The following features describe EUT represented by this report:

Item	Specification	
Frequency Range	GSM 850	TX : 824.2 ~ 848.8 MHz, RX : 869.2 ~ 893.8 MHz
	GSM 1900	TX : 1 850.2 ~ 1 909.8 MHz, RX : 1 930.2 ~ 1 989.8 MHz
	WCDMA 850	TX : 826.4 ~ 846.6 MHz, RX : 871.4 ~ 891.6 MHz
	WCDMA 1900	TX : 1 850 ~ 1 910 MHz, RX : 1 930 ~ 1 990 MHz
	LTE BAND17	TX : 704 ~ 716 MHz, RX : 734 ~ 746 MHz
	LTE BAND4	TX : 1 710 ~ 1 755 MHz, RX : 2 110 ~ 2 155 MHz
Operating Temperature (°C)	-20 ~ +60	
Operating Humidity (%)	0 ~ 95	

4.6.2 The variant models

- None

4.7 Clock Frequencies

Kind of Clocks	Frequency [MHz]	Kind of Clocks	Frequency [MHz]
CPU	1 400		

4.8 Test configuration and condition

- ☐ The EUT exercise program which is the samsung standardized emission test program for windows was used during all EMC measurements were tested. This program was contained on the PC hard disk drive. Once loaded, the program sequentially exercises each system component in turn.
- ☒ The EUT was exercised during the testing by data read and write cycles repeated with internal storage devices. At the end of the test, the copied back data was compared with original.
- ☐ The EUT was connected to the PC by using USB data cable to charge.
- ☒ The system was configured for testing in a typical fashion that a customer would normally use, and was tested while in an automated non-attendant mode.

Power source for the EUT operating was supplied by CVCF made by the Pacific Power Source Corp.

- Test Voltage : AC 120 V, 60 Hz

4.9 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus: (According to CISPR 16-4 and UKAS Lab 34.)

4.9.1 Emission

Test type		Measurement uncertainty (C.L. 95 %, k = 2)
Conducted disturbance	AC Mains	± 3.12 dB
Radiated Disturbance (30 MHz ~ 1 GHz)	Horizontal	± 4.03 dB
	Vertical	± 4.13 dB
Radiated Disturbance (1 GHz ~ 10 GHz)	Horizontal	± 4.53 dB
	Vertical	± 4.51 dB

5. Results of individual test

5.1 Conducted disturbance

The EUT was connected to the Desk-Top Computer which was powered from one LISN for the measurements. The support equipment power cables were connected to a second LISN.

Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration. The EUT measured in accordance with the methods described in standards.

Limits for conducted disturbance at the mains ports of Class B ITE

Frequency range Limits [MHz]	Resolution Bandwidth [kHz]	Limits [dB(μV)]	
		Quasi-peak	Average
0,15 to 0,50	9	66 to 56	56 to 46
0,50 to 5	9	56	46
5 to 30	9	60	50

NOTE 1 The lower limit shall apply at the transition frequency.
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.1.1 Test instrumentation


EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E5I-010	LISN	ESH3-Z5	R&S	100263	2012-10-16	12
E5I-016	EMI Test Receiver	ESU8	R&S	100482	2013-06-11	12
E5I-043	LISN	ENV216	R&S	101630	2013-06-07	12

5.1.2 Temperature and humidity condition

Test date	2013-07-23	Test engineer	Jong-Sup Jeong
Climate condition	Ambient temperature	23.5 °C	Limit (15.0 to 35.0) °C
	Relative humidity	50.0 % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	100.2 kPa	Limit (86.0 to 106.0) kPa
Test place	Shield Room (SR14)		

5.1.3 Test results

☐ Operating Mode 1: AC Mains

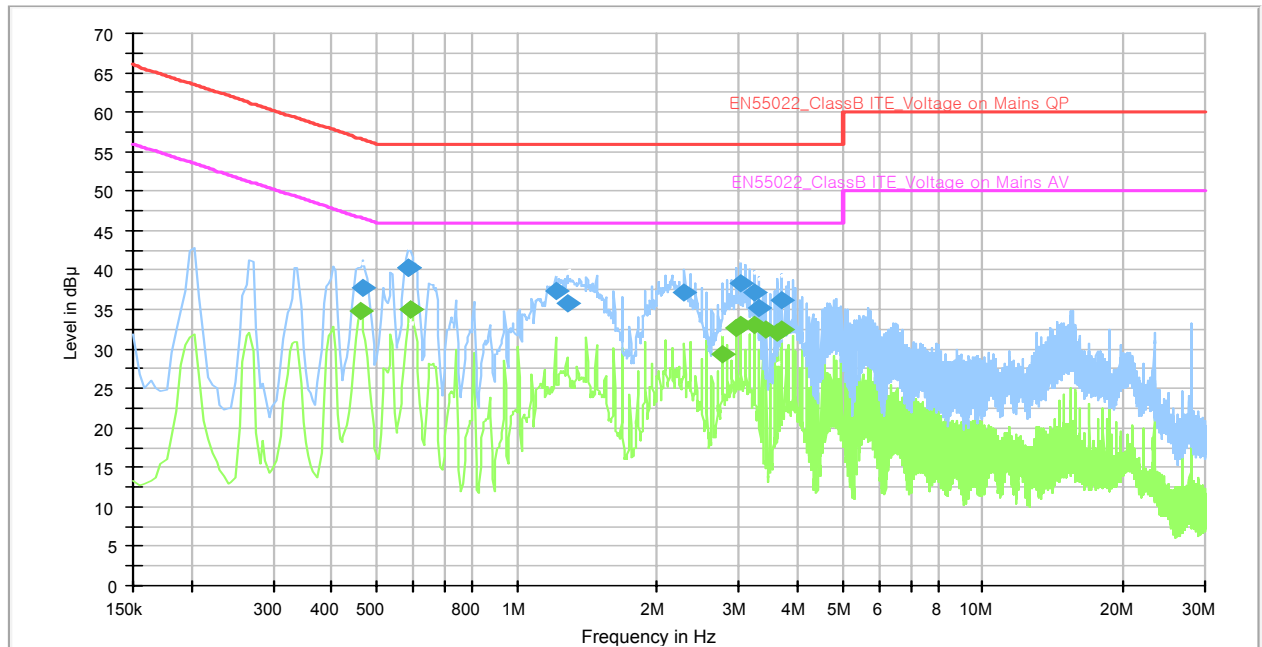

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

Quasi-peak final measurement results table:

Frequency (MHz)	Level (dBμV)	Corr. (dB)	Limit (dBμV)	Margin (dB)	Line
0.468	37.7	9.9	56.6	18.9	L1
0.583	40.2	9.9	56.0	15.8	L1
0.585	40.3	9.9	56.0	15.7	L1
1.214	37.4	9.8	56.0	18.6	L1
1.282	35.7	9.8	56.0	20.3	L1
2.290	37.2	9.7	56.0	18.8	N
3.032	38.3	9.7	56.0	17.7	N
3.235	37.2	9.7	56.0	18.8	N
3.302	35.3	9.7	56.0	20.7	N
3.707	36.2	9.7	56.0	19.8	N

Average final measurement results table:

Frequency (MHz)	Level (dBμV)	Corr. (dB)	Limit (dBμV)	Margin (dB)	Line
0.463	34.8	9.9	46.6	11.8	L1
0.589	35.1	9.9	46.0	10.9	L1
0.589	35.0	9.9	46.0	11.0	L1
2.762	29.4	9.7	46.0	16.6	N
2.965	32.7	9.7	46.0	13.3	N
3.032	33.0	9.7	46.0	13.0	N
3.235	33.1	9.7	46.0	12.9	N
3.437	32.5	9.7	46.0	13.5	N
3.640	32.0	9.7	46.0	14.0	N
3.707	32.5	9.7	46.0	13.5	N

Note 2) Level (QP and/or AV) = Meter Reading (QP and/or AV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or AV) = Limit – Level (QP and/or AV)

QP = Quasi-Peak, AV = Average

5.2 Radiated disturbance

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin.

Peak measurements were made over the changeable frequency range 30 MHz to 1 GHz at a measurement distance of 10 m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarisation	Resolution Bandwidth [kHz]	Video Bandwidth [kHz]	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	120	300	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using quasi-peak detector.

Peak/RMS-Average measurements were made over the changeable frequency range 1 GHz to 40 GHz or 5th harmonics of the highest frequency in accordance with internal maximum operating frequency at a measurement distance of 3 m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarisation	Resolution Bandwidth [MHz]	Video Bandwidth [MHz]	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	1	3	0 ~ 345 (Step size: 15 degrees)

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using peak and rms-average detectors.

Limits for radiated disturbance of Class B ITE at a measuring distance of 3 m and 10 m

Frequency range Limits [MHz]	Field Strength		
	3 m [$\mu\text{V/m}$]	3 m [dB($\mu\text{V/m}$)]	10 m [dB($\mu\text{V/m}$)]
30 to 88	100	40.0	29.5
88 to 216	150	43.5	33.0
216 to 960	200	46.0	35.5
Above 960	500	54.0	43.5

Results checked manually; and points close to the limit line were re-measured.

5.2.1 Test instrumentation

EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E5I-015	EMI Test Receiver	ESU8	R&S	100481	2013-06-11	12
E5I-020	EMI Test Receiver	ESU40	R&S	100375	2013-06-13	12
E5I-036	Double-Ridged Waveguide Horn Antenna	HF907	R&S	100507	2013-04-02	24
E5I-069	BiLOG Antenna	CBL6112D	Teseq	35382	2013-05-21	24
E5I-070	BiLOG Antenna	CBL6112D	Teseq	35383	2013-05-22	24
E5I-073	Preamplifier	310N	Sonoma	332016	2013-06-10	12
E5I-074	Preamplifier	310N	Sonoma	332017	2013-06-10	12


5.2.2 Temperature and humidity condition

Test date	2013-07-18	Test engineer	Jong-Sup Jeong
Climate condition	Ambient temperature	22.6 °C	Limit (15.0 to 35.0) °C
	Relative humidity	45.0 % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	100.5 kPa	Limit (86.0 to 106.0) kPa
Test place	Semi-Anechoic Chamber (SAC8)		

5.2.3 Test results

☐ Operating Mode 1

- Frequency range: 30 ~ 1 000 MHz

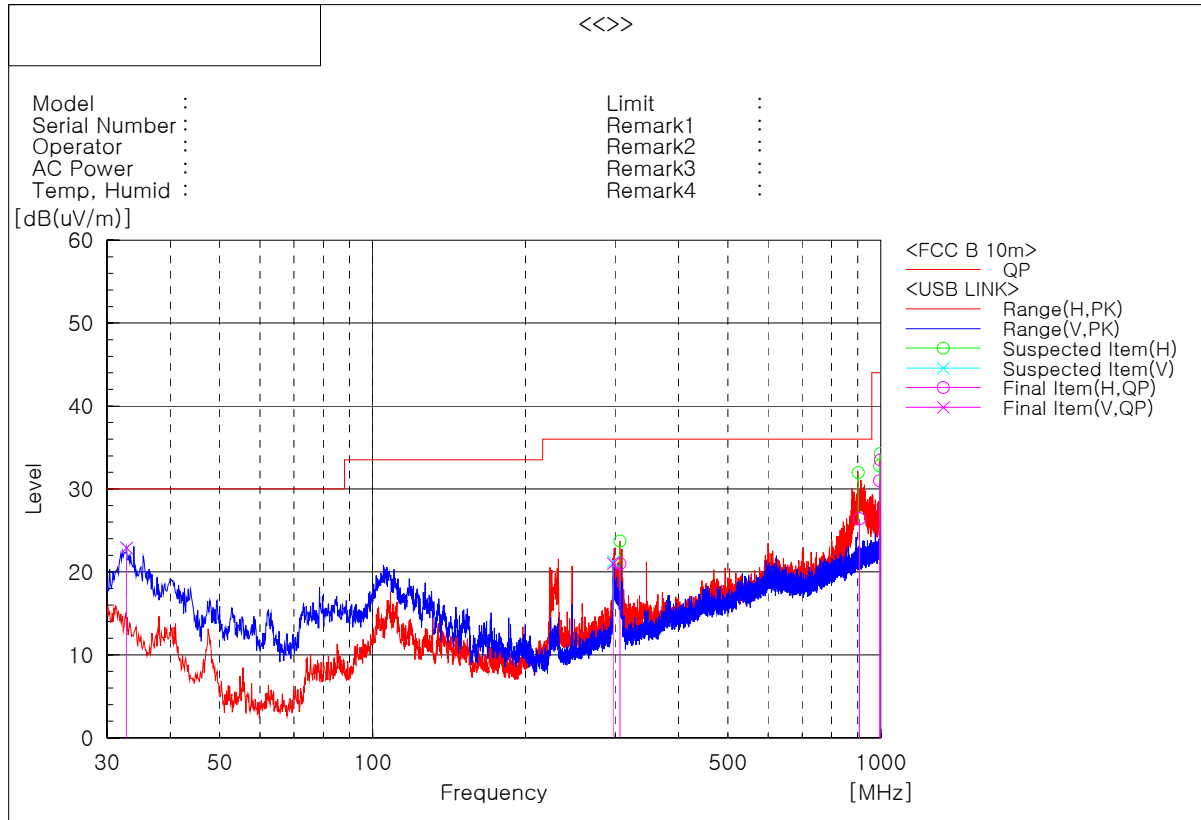

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	System
1	907.543	H	32.4	-6.0	26.4	36.0	9.6	232.7	31.1	1
2	32.789	V	37.2	-14.3	22.9	30.0	7.1	300.0	267.0	2
3	297.478	V	36.8	-15.8	21.0	36.0	15.0	100.0	195.1	2
4	306.450	H	36.9	-15.9	21.0	36.0	15.0	200.1	193.9	1
5	994.180	H	35.8	-4.8	31.0	44.0	13.0	200.1	42.8	1
6	997.332	H	38.2	-4.7	33.5	44.0	10.5	200.1	5.2	1

Note) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 10 m, Antenna Height : 1 to 4 meters

Level (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)


Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak

5.2.3 Test results

☐ Operating Mode 1

- Frequency range: 1 000 ~ 7 000 MHz

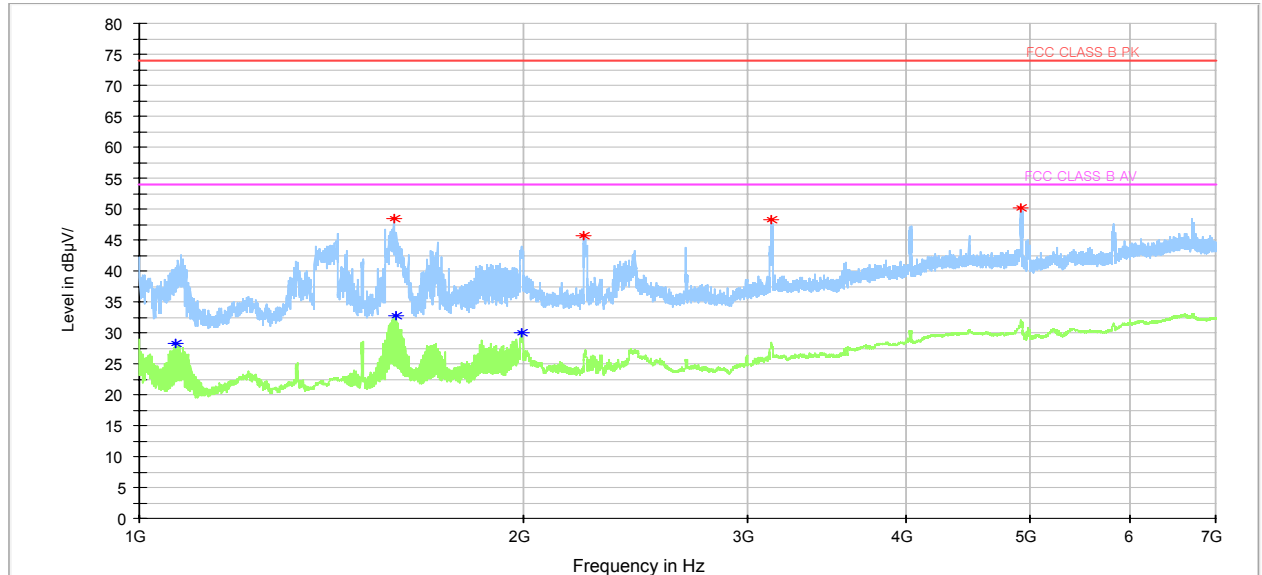

Quasi-peak final measurement results table:

Frequency (MHz)	Level (dBuV/m)	Height (cm)	Polarisation	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
1 583.000	48.5	100	H	0	-7.3	25.5	74.0
2 235.000	45.6	100	H	180	-3.7	28.4	74.0
3 134.500	48.3	100	H	0	2.0	25.7	74.0
4 917.000	50.1	100	V	0	8.3	23.9	74.0

Average final measurement results table:

Frequency (MHz)	Level (dBuV/m)	Height (cm)	Polarisation	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
1 067.000	28.3	100	H	0	-9.6	25.7	54.0
1 590.000	32.8	100	H	0	-7.3	21.2	54.0
1 998.000	30.0	100	H	0	-3.5	24.0	54.0

Note) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters

Level (PK and/or AV) = Reading (PK and/or AV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or AV) = Limit – Level (PK and/or AV)

PK = Peak, AV = Average